

## 10. Bluetooth Operational Description


Within USA:

- Bluetooth v3.0 + EDR


Although the chipset documentation may indicate possible functions, the following have been permanently hardware disabled in this device and cannot be enabled by the end user or service provider:

- 802.11a/n (5GHz)
- FM Transceiver
- Bluetooth v4.0+HS

## SM-G3508 BT/WIFI BLOCK DIAGRAM

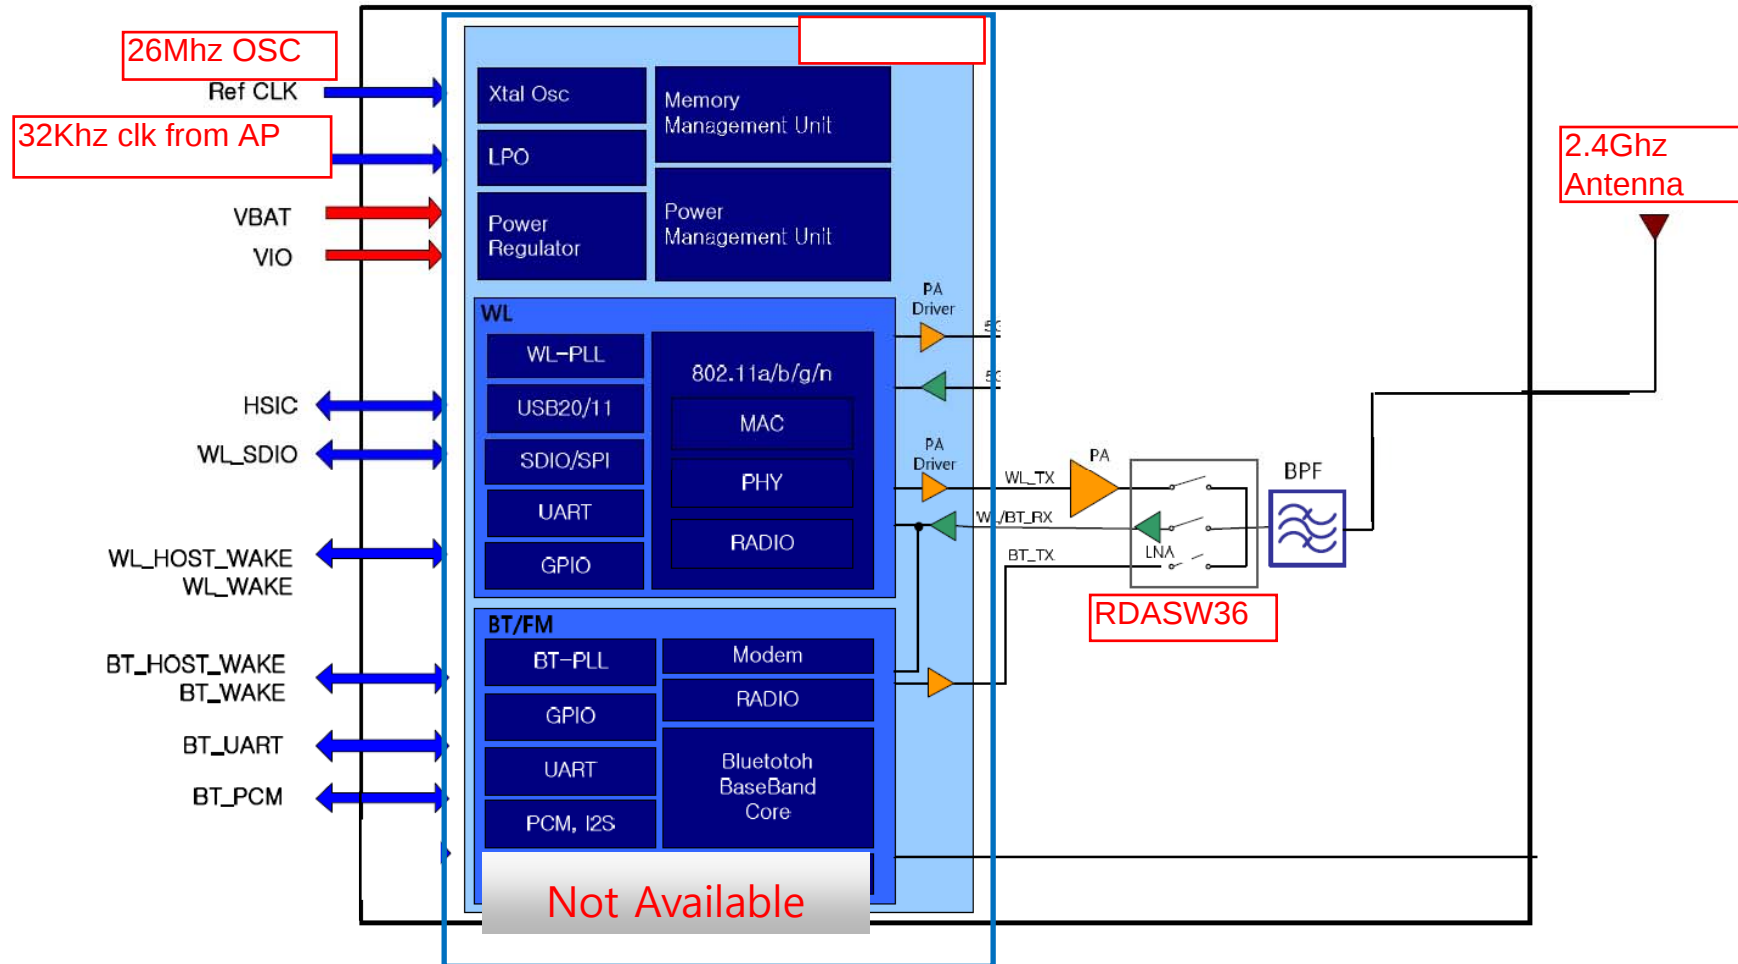

More Detail Block diagrams is in next page for BCM4330

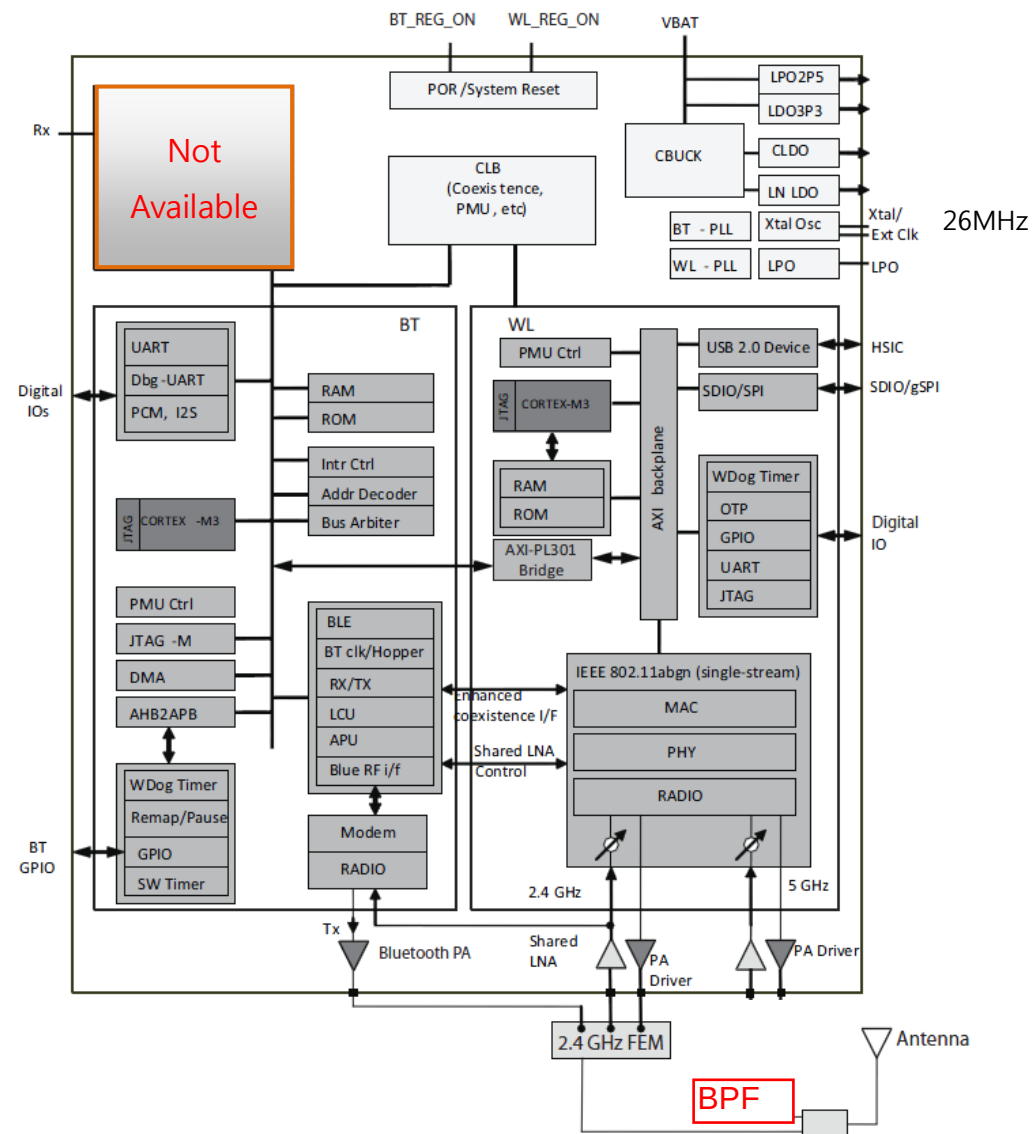

## Single-Chip IEEE 802.11™ a/b/g/n MAC/Baseband/ Radio with Integrated Bluetooth 4.0 + HS and FM Transceiver

### GENERAL DESCRIPTION

The Broadcom® BCM4330 single-chip device provides for the highest level of integration for a mobile or handheld wireless system, with integrated IEEE 802.11™ a/b/g and single-stream 802.11n (MAC/baseband/radio), Bluetooth 4.0 + HS, and an FM radio receiver and transmitter. It includes on-chip 2.4 GHz and 5 GHz WLAN CMOS power amplifiers that meet the output power requirements of most handheld systems while permitting an optional external power amplifier for higher output power applications, if required.

Utilizing advanced design techniques and process technology to reduce active and idle power, the BCM4330 is designed to address the needs of highly mobile devices that require minimal power consumption and compact size. It includes a power management unit that simplifies the system power topology and allows for operation directly from a mobile platform battery while maximizing battery life.

### FEATURES

The BCM4330 implements the highly sophisticated Enhanced Collaborative Coexistence radio coexistence algorithms and hardware mechanisms, allowing for an extremely collaborative Bluetooth coexistence scheme along with coexistence support for external radios (such as GPS, WiMax, or Ultra Wide-band radio technologies, as well as cellular radios) and a single shared antenna (2.4 GHz antenna for Bluetooth and WLAN). As a result, enhanced overall quality for simultaneous voice, video, and data transmission on a handheld system is achieved.

For the WLAN section, two alternative host interface options are included: an SDIO v2.0 interface that can operate in 4b, 1b, or gSPI modes, and an HSIC interface. An independent, high-speed UART is provided for the Bluetooth host interface. Package options include 4.89 mm x 5.33 mm WLBGA and WLCSP, and 6.5 mm x 6.5 mm FCBGA.

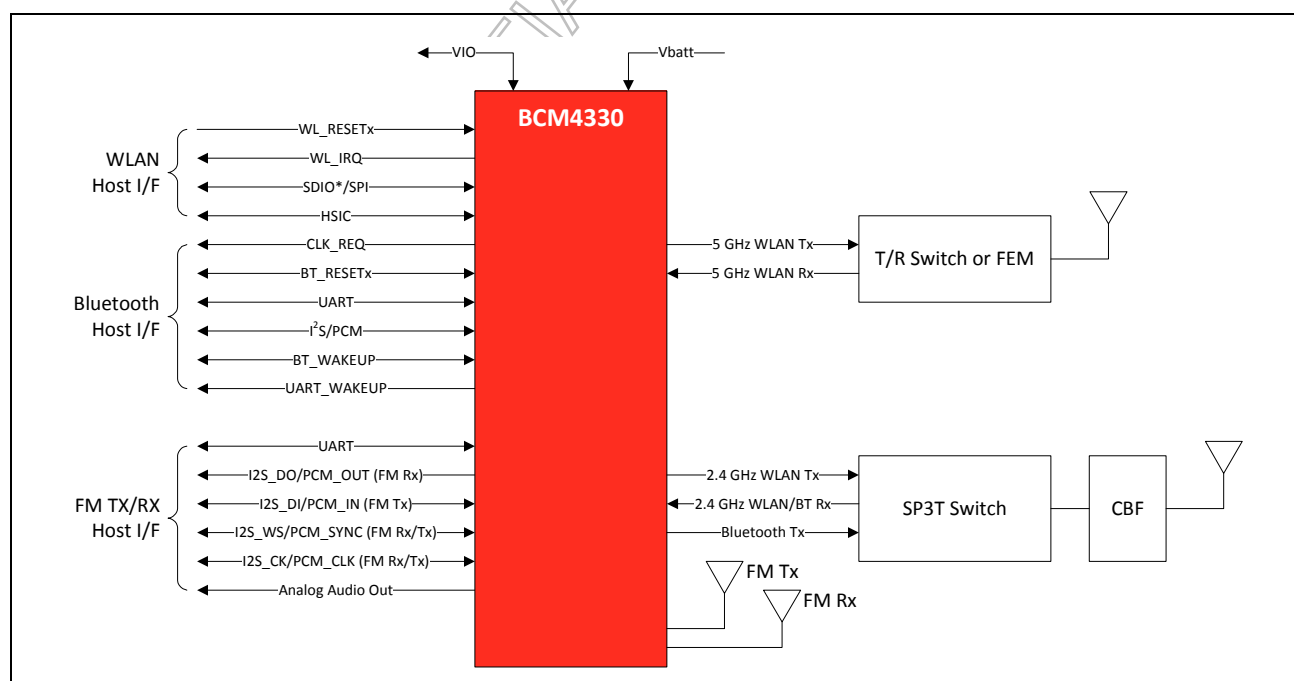


Figure 1: Functional Block Diagram

**FEATURES****IEEE 802.11x Key Features**

- Single-band 2.4 GHz 802.11 b/g/n or dual-band 2.4 GHz and 5 GHz 802.11 a/b/g/n (non-simultaneous)
- Single stream 802.11n support for 20 MHz channels provides PHY layer rates up to MCS7 (65 Mbps) for typical upper-layer throughput in excess of 45 Mbps.
- Integrated CMOS power amplifiers with internal power-detectors and closed-loop power control can deliver greater than 18 dBm of linear output power (in 2.4 GHz band).
- PAs can be powered directly from VBAT, eliminating the need for a PALDO.
- Up to 8 RF control signals are available to support optional external PAs for higher output power and LNAs for enhanced sensitivity.
- Supports a single 2.4 GHz antenna shared between WLAN and Bluetooth.
- Shared Bluetooth and WLAN receive signal path eliminates the need for an external power splitter while maintaining excellent sensitivity for both Bluetooth and WLAN.
- Internal fractional nPLL allows support for a wide range of reference clock frequencies
- Supports IEEE 802.15.2 external three-wire coexistence scheme to optimize bandwidth utilization with other co-located wireless technologies such as GPS, WiMax, or UWB
- Supports standard SDIO v2.0 (50 MHz, 4-bit and 1-bit), and gSPI (48 MHz) host interfaces.
- Alternative host interface supports HSIC (a USB 2.0 derivative for short-distance, on-board connections).
- Integrated ARM® Cortex-M3 processor and on-chip memory for complete WLAN subsystem functionality, minimizing the need to wake up the applications processor for standard WLAN functions. This allows for further minimization of power consumption, while maintaining the ability to field upgrade with future features.
- OneDriver™ software architecture for easy migration from existing embedded WLAN and Bluetooth devices as well as future devices.

**FEATURES****Bluetooth and FM Key Features**

- Bluetooth Core Specification Version 4.0 + HS compliant with provisions for supporting future specifications
- Bluetooth Class 1 or Class 2 transmitter operation
- Supports extended Synchronous Connections (eSCO), for enhanced voice quality by allowing for retransmission of dropped packets
- Adaptive Frequency Hopping (AFH) for reducing radio frequency interference
- Interface support — Host Controller Interface (HCI) using a high-speed UART interface and PCM for audio data
- The FM unit supports HCI for communication, stereo analog input and output
- Low-power consumption improves battery life of handheld devices
- FM receiver: 65 MHz to 108 MHz FM bands; supports the European Radio Data Systems (RDS) and the North American Radio Broadcast Data System (RBDS) standards
- Supports multiple simultaneous Advanced Audio Distribution Profiles (A2DP) for stereo sound
- Automatic frequency detection for standard crystal and TCXO values
- FM transmitter: 65 MHz to 108 MHz bands; supports both RDS and the RBDS standards and programmable output power.

**General Features**

- Supports battery voltage range from 2.3V to 4.8V supplies with internal switching regulator
- Programmable dynamic power management
- 2 Kbit OTP for storing board parameters
- Package options:
  - 144 ball FCBGA (6.5 mm x 6.5 mm, 0.5 mm pitch)
  - 133 ball WLBGA (4.89 mm x 5.33 mm, 0.4 mm pitch)
  - 225 bump WLCSP (4.89 mm x 5.33 mm, 0.2 mm pitch)
- Security:
  - WPA™- and WPA2™- (Personal) support for powerful encryption and authentication
  - AES and TKIP in hardware for faster data encryption and 802.11i compatibility
  - Reference WLAN subsystem provides Cisco® Compatible Extension- (CCX, CCX 2.0, CCX 3.0, CCX 4.0, CCX 5.0) certified
  - Reference WLAN subsystem provides Wi-Fi Protected Setup (WPS)
- Worldwide regulatory support: Global products supported with worldwide homologated design

## Revision History

| <b>Revision</b> | <b>Date</b> | <b>Change Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4330-DS209-R    | 5/17/12     | <b>Updated:</b> <ul style="list-style-type: none"> <li>• <a href="#">Table 54: "Ordering Information," on page 169</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 4330-DS208-R    | 1/16/12     | <b>Updated:</b> <ul style="list-style-type: none"> <li>• <a href="#">"WLAN PHY Description" on page 90</a> (removed support for optional short GI and green field modes in TX and short GI related specs)</li> <li>• <a href="#">Table 54: "Ordering Information," on page 169.</a></li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 4330-DS207-R    | 11/9/11     | <b>Updated:</b> <ul style="list-style-type: none"> <li>• Table 4: "Power Control Pin Descriptions," on page 44.</li> <li>• Table 18: "FCFBGA, WLBGA, and WLCSP Signal Descriptions," on page 104.</li> <li>• Table 34: "WLAN 2.4 GHz Receiver Performance Specifications," on page 135.</li> <li>• Table 35: "WLAN 2.4 GHz Transmitter Performance Specifications," on page 138.</li> <li>• Table 36: "WLAN 5 GHz Receiver Performance Specifications," on page 140.</li> <li>• Table 37: "WLAN 5 GHz Transmitter Performance Specifications," on page 142.</li> <li>• Table 38: "General Spurious Emissions Specifications," on page 143.</li> <li>• Table 44: "WLAN Current Consumption (Ivbat + Ivio)—2.4 GHz Operation," on page 149.</li> </ul> |
| 4330-DS206-R    | 8/17/11     | <b>Updated:</b> <ul style="list-style-type: none"> <li>• Table 51: "HSIC Interface Specifications," on page 156.</li> <li>• Table 54: "Ordering Information," on page 167.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Broadcom Corporation  
5300 California Avenue  
Irvine, CA 92617

© 2012 by Broadcom Corporation  
All rights reserved  
Printed in the U.S.A.

Broadcom®, the pulse logo, Connecting everything®, and the Connecting everything logo are among the trademarks of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Any other trademarks or trade names mentioned are the property of their respective owners.

This data sheet (including, without limitation, the Broadcom component(s) identified herein) is not designed, intended, or certified for use in any military, nuclear, medical, mass transportation, aviation, navigations, pollution control, hazardous substances management, or other high-risk application. BROADCOM PROVIDES THIS DATA SHEET "AS-IS," WITHOUT WARRANTY OF ANY KIND. BROADCOM DISCLAIMS ALL WARRANTIES, EXPRESSED AND IMPLIED, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT.

| <b>Revision</b> | <b>Date</b> | <b>Change Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4330-DS205-R    | 8/10/11     | <p><b>Updated:</b></p> <ul style="list-style-type: none"> <li>• “Voltage Regulators” on page 25.</li> <li>• The introduction of Section 4: “Bluetooth + FM Subsystem Overview,” on page 37.</li> <li>• Figure 8: “Startup Signaling Sequence,” on page 45.</li> <li>• “FM Radio” on page 65.</li> <li>• Table 18: “FCFBGA, WLBGA, and WLCSP Signal Descriptions,” on page 104.</li> <li>• Table 19: “WLAN GPIO Functions and Strapping Options,” on page 113.</li> <li>• Table 23: “I/O States,” on page 116.</li> <li>• Table 26: “ESD Specifications,” on page 119.</li> <li>• Table 27: “Recommended Operating Conditions and DC Characteristics,” on page 120.</li> <li>• Table 31: “FM Transmitter Specifications,” on page 127.</li> <li>• Table 32: “FM Receiver Specifications,” on page 129.</li> <li>• Table 34: “WLAN 2.4 GHz Receiver Performance Specifications,” on page 135.</li> <li>• Table 35: “WLAN 2.4 GHz Transmitter Performance Specifications,” on page 138.</li> <li>• Table 36: “WLAN 5 GHz Receiver Performance Specifications,” on page 140.</li> <li>• Table 37: “WLAN 5 GHz Transmitter Performance Specifications,” on page 142.</li> <li>• “WLAN Current Consumption” on page 150.</li> <li>• Table 51: “HSIC Interface Specifications,” on page 157.</li> <li>• Figure 49: “WLAN = ON, Bluetooth = OFF,” on page 161.</li> </ul> |

| <b>Revision</b> | <b>Date</b> | <b>Change Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4330-DS204-R    | 4/28/11     | <p><b>Updated:</b></p> <ul style="list-style-type: none"> <li>• Global change: the maximum voltage for VBAT, VDD_PA, CBUCK, and LDO3P3, LDO3P1 was changed to <b>4.8V</b> throughout the document.</li> <li>• “General Features” on page 2</li> <li>• “External 32.768 kHz Low Power Oscillator” on page 36</li> <li>• Table 18: “FCFBGA, WLBGA, and WLCSP Signal Descriptions,” on page 104</li> <li>• Table 19: “WLAN GPIO Functions and Strapping Options,” on page 111</li> <li>• Table 26: “ESD Specifications,” on page 117</li> <li>• Table 27: “Recommended Operating Conditions and DC Characteristics,” on page 118</li> <li>• Table 31: “FM Transmitter Specifications,” on page 125</li> <li>• Table 32: “FM Receiver Specifications,” on page 127</li> <li>• Table 34: “WLAN 2.4 GHz Receiver Performance Specifications,” on page 133</li> <li>• Table 36: “WLAN 5 GHz Receiver Performance Specifications,” on page 138</li> <li>• Table 39: “Core Buck Regulator (CBUCK) Specifications,” on page 142</li> <li>• Table 40: “LDO3p1 Specifications,” on page 143</li> <li>• Table 41: “LDO3p3 Specifications,” on page 144</li> <li>• Table 42: “CLDO Specifications,” on page 145</li> <li>• Table 43: “LNLDO1 Specifications,” on page 146</li> <li>• Table 46: “Bluetooth and FM Current Consumption,” on page 150</li> </ul> <p><b>Added:</b></p> <ul style="list-style-type: none"> <li>• Table 20: “Strap Options,” on page 111</li> <li>• “HSIC Interface Specifications” on page 155</li> </ul> |

| <b>Revision</b> | <b>Date</b> | <b>Change Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4330-DS203-R    | 1/26/11     | <p><b>Added:</b></p> <ul style="list-style-type: none"> <li>• “Bluetooth Low Energy” on page 37.</li> <li>• Table 23: “I/O States,” on page 108.</li> <li>• Table 45: “HSIC Power Consumption,” on page 142.</li> <li>• Figure 51: “WLAN Warm Reset,” on page 153.</li> </ul> <p><b>Updated:</b></p> <ul style="list-style-type: none"> <li>• Figure 2: “BCM4330 Block Diagram,” on page 17.</li> <li>• “Power Supply Topology” on page 22.</li> <li>• Figure 4: “Typical Power Topology,” on page 23.</li> <li>• Table 1: “Reset Control Signals,” on page 26.</li> <li>• Figure 7: “Recommended Circuit to Use with an External Shared TCXO,” on page 28.</li> <li>• “Features” on page 33.</li> <li>• “Bluetooth Radio” on page 35.</li> <li>• “Bluetooth 4.0 Features” on page 37.</li> <li>• Table 4: “Power Control Pin Description,” on page 39.</li> <li>• Figure 8: “Startup Signaling Sequence,” on page 40.</li> <li>• “RAM, ROM, and Patch Memory” on page 46.</li> <li>• “I2S Interface” on page 57.</li> <li>• “Audio Features” on page 62.</li> <li>• “WLAN CPU and Memory Subsystem” on page 66.</li> <li>• “External Coexistence Interface” on page 67.</li> <li>• Figure 34: “WLAN MAC Architecture,” on page 80.</li> <li>• Figure 37: “Radio Functional Block Diagram,” on page 87.</li> <li>• Figure 38: “144-FCFBGA Ball Map (top view),” on page 88.</li> <li>• Figure 39: “133-WLBGA Ball Map (bottom view),” on page 89.</li> <li>• Table 18: “FCFBGA, WLBGA, and WLCSP Signal Descriptions,” on page 98.</li> <li>• Table 21: “GPIO Multiplexing Matrix,” on page 106.</li> <li>• Table 22: “Multiplexed GPIO Signals,” on page 107.</li> <li>• Table 26: “ESD Specifications,” on page 111.</li> <li>• Table 27: “Recommended Operating Conditions and DC Characteristics,” on page 112.</li> <li>• Table 28: “Bluetooth Receiver RF Specifications,” on page 115.</li> <li>• Table 29: “Bluetooth Transmitter RF Specifications,” on page 116.</li> <li>• Table 30: “Local Oscillator Performance,” on page 118.</li> <li>• Table 31: “FM Transmitter Specifications,” on page 119.</li> <li>• Table 32: “FM Receiver Specifications,” on page 121.</li> <li>• Figure 42: “FM Receiver Circuit,” on page 125.</li> <li>• Table 34: “WLAN 2.4 GHz Receiver Performance Specifications,” on page 127.</li> <li>• Table 35: “WLAN 2.4 GHz Transmitter Performance Specifications,” on page 130.</li> </ul> |

| <b>Revision</b>             | <b>Date</b> | <b>Change Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4330-DS203-R<br>(continued) | 1/26/11     | <b>Updated:</b> <ul style="list-style-type: none"> <li>Table 39: "Core Buck Regulator (CBUCK) Specifications," on page 136.</li> <li>Table 41: "LDO3p3 Specifications," on page 138.</li> <li>Table 42: "CLDO Specifications," on page 138.</li> <li>Table 43: "LNLDO1 Specifications," on page 140.</li> <li>Table 44: "WLAN Power Consumption (Ivbat+Ivio)," on page 141.</li> <li>Table 46: "Bluetooth and FM Current Consumption," on page 143.</li> <li>Figure 53: "133-Ball WLPGA Package Mechanical Information," on page 156.</li> <li>"WLCSP Package Keep-Out Area" on page 158.</li> <li>Table 53: "Ordering Information," on page 159.</li> </ul> <b>Removed:</b> <ul style="list-style-type: none"> <li>Section 9: "Enhanced Scanning Algorithm".</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 4330-DS202-R                | 7/1/10      | <b>Updated:</b> <ul style="list-style-type: none"> <li>Table 34 on page 125.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 4330-DS201-R                | 6/24/10     | <b>Added:</b> <ul style="list-style-type: none"> <li>Figure 6: "Recommended Circuit to Use with an External Dedicated TCXO," on page 26.</li> <li>Figure 7: "Recommended Circuit to Use with an External Shared TCXO," on page 26.</li> <li>"External 32.768 kHz Low Power Oscillator" on page 30.</li> <li>Section 6: "Music and Audio," on page 43.</li> <li>Figure 37: "WLCSP 225-Bump Map (bottom view)," on page 87.</li> </ul> <b>Updated:</b> <ul style="list-style-type: none"> <li>Figure 1: "Functional Block Diagram," on page 1.</li> <li>Figure 2: "BCM4330 Block Diagram," on page 15.</li> <li>"Features" on page 16.</li> <li>Figure 3: "Mobile Phone Block System Diagram," on page 19.</li> <li>"Voltage Regulators" on page 20.</li> <li>"Reset Circuits" on page 24.</li> <li>Section 3: "Frequency References," on page 25.</li> <li>Table 2: "Crystal Oscillator and External Clock – Requirements and Performance," on page 27.</li> <li>Figure 7: "Recommended Circuit to Use with an External Shared TCXO," on page 26.</li> <li>Table 3: "External 32.768 kHz Sleep Clock Specifications," on page 30.</li> <li>"Bluetooth Radio" on page 33.</li> <li>"Bluetooth Power Management Unit" on page 37.</li> <li>Figure 8: "Startup Signaling Sequence," on page 38.</li> <li>"RAM, ROM, and Patch Memory" on page 44.</li> <li>"PCM Interface" on page 45.</li> <li>"UART Interface" on page 53.</li> <li>"I2S Interface" on page 55.</li> </ul> |

| <b>Revision</b>             | <b>Date</b> | <b>Change Description</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4330-DS201-R<br>(continued) | 6/24/10     | <p><b>Updated:</b></p> <ul style="list-style-type: none"> <li>• Section 10: “FM Transceiver Subsystem,” on page 59.</li> <li>• “GPIO Interface” on page 64.</li> <li>• “JTAG Interface” on page 64.</li> <li>• Figure 35: “144-FCBGA Ball Map (top view),” on page 85.</li> <li>• Figure 36: “133-WLBGA Ball Map (bottom view),” on page 86.</li> <li>• Table 18: “WLCSP 225-Bump Coordinates,” on page 88.</li> <li>• Table 19: “FCBGA, WLBGA, and WLCSP Signal Descriptions,” on page 95.</li> <li>• Table 20: “WLAN GPIO Functions and Strapping Options (Advance Information),” on page 102.</li> <li>• Table 21: “GPIO Multiplexing Matrix,” on page 103.</li> <li>• Table 22: “Multiplexed GPIO Signals,” on page 104.</li> <li>• Table 23: “Absolute Maximum Ratings,” on page 105.</li> <li>• Table 24: “Environmental Ratings,” on page 106.</li> <li>• Table 26: “Recommended Operating Conditions and DC Characteristics,” on page 107.</li> <li>• Table 27: “Bluetooth Receiver RF Specifications,” on page 109.</li> <li>• Table 28: “Bluetooth Transmitter RF Specifications,” on page 110.</li> <li>• Table 29: “Local Oscillator Performance,” on page 112.</li> <li>• Table 30: “FM Transmitter Specifications,” on page 113.</li> <li>• Table 31: “FM Receiver Specifications,” on page 116.</li> <li>• Table 33: “WLAN 2.4 GHz Receiver Performance Specifications,” on page 122.</li> <li>• Table 34: “WLAN 2.4 GHz Transmitter Performance Specifications,” on page 125.</li> <li>• Table 35: “WLAN 5 GHz Receiver Performance Specifications,” on page 127.</li> <li>• Table 36: “WLAN 5 GHz Transmitter Performance Specifications,” on page 129.</li> <li>• Figure 39: “FM Receiver Circuit with External Balun and Cellular Band Blocking Filter,” on page 120.</li> <li>• Table 38: “Core Buck Regulator (CLOCK) Specifications,” on page 131.</li> <li>• Table 43: “WLAN Power Consumption (I<sub>bat</sub>+I<sub>vio</sub>),” on page 135.</li> <li>• Table 44: “Bluetooth and FM Current Consumption,” on page 137.</li> <li>• Figure 49: “133-Ball WLBGA Package Mechanical Information,” on page 148.</li> <li>• Figure 50: “225-Bump WLCSP Package Mechanical Information,” on page 149.</li> <li>• “Ordering Information” on page 150.</li> </ul> <p><b>Removed:</b></p> <ul style="list-style-type: none"> <li>• Table 11: “OTP Select,” on page 70.</li> </ul> |
| 4330-DS200-R                | 10/28/09    | Initial release.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

# Table of Contents

|                                                       |           |
|-------------------------------------------------------|-----------|
| <b>About This Document</b>                            | <b>19</b> |
| Purpose and Audience                                  | 19        |
| Acronyms and Abbreviations                            | 19        |
| Document Conventions                                  | 19        |
| References                                            | 20        |
| <b>Technical Support</b>                              | <b>20</b> |
| <b>Section 1: BCM4330 Overview</b>                    | <b>21</b> |
| Overview                                              | 21        |
| Features                                              | 22        |
| Standards Compliance                                  | 23        |
| Mobile Phone Usage Model                              | 24        |
| <b>Section 2: Power Supplies and Power Management</b> | <b>26</b> |
| Power Supply Topology                                 | 26        |
| Voltage Regulators                                    | 26        |
| WLAN Power Management                                 | 28        |
| PMU Sequencing                                        | 29        |
| Low-Power Shutdown                                    | 30        |
| Reset Circuits                                        | 31        |
| <b>Section 3: Frequency References</b>                | <b>32</b> |
| Crystal Interface and Clock Generation                | 32        |
| TCXO                                                  | 33        |
| Frequency Selection                                   | 36        |
| External 32.768 kHz Low Power Oscillator              | 37        |
| <b>Section 4: Bluetooth + FM Subsystem Overview</b>   | <b>38</b> |
| Features                                              | 38        |
| Bluetooth Radio                                       | 40        |
| Transmit                                              | 40        |
| Digital Modulator                                     | 40        |
| Digital Demodulator and Bit Synchronizer              | 40        |
| Power Amplifier                                       | 40        |
| Receiver                                              | 41        |
| Digital Demodulator and Bit Synchronizer              | 41        |
| Receiver Signal Strength Indicator                    | 41        |

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| Local Oscillator Generation.....                                    | 41        |
| Calibration.....                                                    | 41        |
| <b>Section 5: Bluetooth Baseband Core.....</b>                      | <b>42</b> |
| <b>Bluetooth 4.0 Features.....</b>                                  | <b>42</b> |
| <b>Bluetooth Low Energy .....</b>                                   | <b>42</b> |
| <b>Link Control Layer.....</b>                                      | <b>43</b> |
| <b>Test Mode Support.....</b>                                       | <b>43</b> |
| <b>Bluetooth Power Management Unit .....</b>                        | <b>44</b> |
| RF Power Management .....                                           | 44        |
| Host Controller Power Management.....                               | 45        |
| BBC Power Management.....                                           | 47        |
| FM Power Management .....                                           | 47        |
| Low-Power Scan.....                                                 | 47        |
| Wideband Speech .....                                               | 47        |
| Packet Loss Concealment .....                                       | 48        |
| Audio Rate-Matching Algorithms .....                                | 48        |
| Codec Encoding.....                                                 | 49        |
| Multiple Simultaneous A2DP Audio Stream .....                       | 49        |
| FM Over Bluetooth .....                                             | 49        |
| Burst Buffer Operation .....                                        | 49        |
| <b>Adaptive Frequency Hopping.....</b>                              | <b>49</b> |
| <b>Advanced Bluetooth/WLAN Coexistence .....</b>                    | <b>50</b> |
| <b>Fast Connection (Interlaced Page and Inquiry Scans) .....</b>    | <b>50</b> |
| <b>Section 6: Music and Audio .....</b>                             | <b>51</b> |
| MP3 Encoder.....                                                    | 51        |
| MP3 Decoder .....                                                   | 51        |
| AAC/AAC+ Decoder .....                                              | 51        |
| <b>Section 7: Microprocessor and Memory Unit for Bluetooth.....</b> | <b>52</b> |
| RAM, ROM, and Patch Memory.....                                     | 52        |
| Reset .....                                                         | 52        |
| <b>Section 8: Bluetooth Peripheral Transport Unit .....</b>         | <b>53</b> |
| PCM Interface .....                                                 | 53        |
| Slot Mapping.....                                                   | 53        |
| Frame Synchronization .....                                         | 53        |
| Data Formatting.....                                                | 53        |

|                                                  |           |
|--------------------------------------------------|-----------|
| Wideband Speech Support .....                    | 54        |
| Multiplexed Bluetooth and FM Over PCM.....       | 54        |
| Burst PCM Mode.....                              | 54        |
| PCM Interface Timing .....                       | 55        |
| Short Frame Sync, Master Mode .....              | 55        |
| Short Frame Sync, Slave Mode .....               | 56        |
| Long Frame Sync, Master Mode .....               | 57        |
| Long Frame Sync, Slave Mode .....                | 58        |
| Short Frame Sync, Burst Mode .....               | 59        |
| Long Frame Sync, Burst Mode .....                | 60        |
| <b>UART Interface .....</b>                      | <b>61</b> |
| <b>I<sup>2</sup>S Interface .....</b>            | <b>63</b> |
| I <sup>2</sup> S Timing .....                    | 63        |
| <b>Section 9: FM Transceiver Subsystem .....</b> | <b>66</b> |
| FM Radio .....                                   | 66        |
| Digital FM Audio Interfaces.....                 | 66        |
| Analog FM Audio Interfaces.....                  | 66        |
| FM Over Bluetooth .....                          | 66        |
| eSCO.....                                        | 67        |
| Wide Band Speech Link .....                      | 67        |
| A2DP .....                                       | 67        |
| Dynamic Antenna Switching .....                  | 67        |
| Autotune and Search Algorithms.....              | 68        |
| Audio Features .....                             | 68        |
| On-Chip MP3 Encoding.....                        | 70        |
| RDS/RBDS .....                                   | 71        |
| <b>Section 10: WLAN Global Functions.....</b>    | <b>72</b> |
| WLAN CPU and Memory Subsystem.....               | 72        |
| One-Time-Programmable Memory.....                | 72        |
| GPIO Interface .....                             | 73        |
| External Coexistence Interface .....             | 73        |
| UART Interface .....                             | 73        |
| JTAG Interface .....                             | 73        |
| <b>Section 11: WLAN Host Interfaces .....</b>    | <b>74</b> |
| SDIO v2.0 .....                                  | 74        |

|                                                         |            |
|---------------------------------------------------------|------------|
| SDIO Pin Descriptions .....                             | 74         |
| <b>Generic SPI Mode .....</b>                           | <b>76</b>  |
| SPI Protocol .....                                      | 77         |
| Command Structure .....                                 | 78         |
| Write .....                                             | 78         |
| Write/Read .....                                        | 78         |
| Read .....                                              | 78         |
| Status .....                                            | 79         |
| gSPI Host-Device Handshake .....                        | 81         |
| Boot-Up Sequence .....                                  | 81         |
| <b>HSIC Interface .....</b>                             | <b>84</b>  |
| <b>Section 12: Wireless LAN MAC and PHY.....</b>        | <b>85</b>  |
| <b>MAC Features .....</b>                               | <b>85</b>  |
| MAC Description .....                                   | 85         |
| PSM.....                                                | 87         |
| WEP .....                                               | 87         |
| TXE .....                                               | 88         |
| RXE .....                                               | 88         |
| IFS .....                                               | 89         |
| TSF .....                                               | 89         |
| NAV .....                                               | 89         |
| MAC-PHY Interface .....                                 | 89         |
| <b>WLAN PHY Description.....</b>                        | <b>90</b>  |
| PHY Features.....                                       | 90         |
| <b>Section 13: WLAN Radio Subsystem .....</b>           | <b>93</b>  |
| Receive Path .....                                      | 93         |
| Transmit Path .....                                     | 93         |
| Calibration .....                                       | 93         |
| <b>Section 14: Pinout and Signal Descriptions .....</b> | <b>95</b>  |
| Signal Assignments.....                                 | 95         |
| WLAN GPIO Signals and Strapping Options .....           | 114        |
| Muxed Bluetooth GPIO Signals.....                       | 115        |
| I/O States .....                                        | 117        |
| <b>Section 15: DC Characteristics .....</b>             | <b>119</b> |
| Absolute Maximum Ratings.....                           | 119        |

|                                                                       |            |
|-----------------------------------------------------------------------|------------|
| Environmental Ratings .....                                           | 120        |
| Electrostatic Discharge Specifications .....                          | 120        |
| Recommended Operating Conditions and DC Characteristics .....         | 121        |
| <b>Section 16: Bluetooth RF Specifications .....</b>                  | <b>123</b> |
| <b>Section 17: FM Transmitter Specifications .....</b>                | <b>128</b> |
| <b>Section 18: FM Receiver Specifications .....</b>                   | <b>130</b> |
| <b>Section 19: WLAN RF Specifications .....</b>                       | <b>135</b> |
| Introduction .....                                                    | 135        |
| 2.4 GHz Band General RF Specifications .....                          | 136        |
| WLAN 2.4 GHz Receiver Performance Specifications .....                | 136        |
| WLAN 2.4 GHz Transmitter Performance Specifications .....             | 139        |
| WLAN 5 GHz Receiver Performance Specifications .....                  | 141        |
| WLAN 5 GHz Transmitter Performance Specifications .....               | 143        |
| General Spurious Emissions Specifications .....                       | 144        |
| <b>Section 20: Internal Regulator Electrical Specifications .....</b> | <b>145</b> |
| Core Buck Regulator .....                                             | 145        |
| LDO3p1 .....                                                          | 146        |
| LDO3p3 .....                                                          | 147        |
| CLDO .....                                                            | 148        |
| LNLDO1 .....                                                          | 149        |
| <b>Section 21: System Power Consumption .....</b>                     | <b>150</b> |
| WLAN Current Consumption .....                                        | 150        |
| WLAN Current Consumption — 2.4 GHz Operation .....                    | 150        |
| WLAN Current Consumption — 5 GHz Operation .....                      | 152        |
| HSIC Interface Current Consumption .....                              | 153        |
| Bluetooth and FM Current Consumption .....                            | 153        |
| <b>Section 22: Interface Timing and AC Characteristics .....</b>      | <b>154</b> |
| SDIO/gSPI Timing .....                                                | 154        |
| SDIO Default Mode Timing .....                                        | 154        |
| SDIO High-Speed Mode Timing .....                                     | 156        |
| gSPI Signal Timing .....                                              | 157        |
| HSIC Interface Specifications .....                                   | 158        |
| JTAG Timing .....                                                     | 159        |

---

|                                                                                                      |            |
|------------------------------------------------------------------------------------------------------|------------|
| <b>Section 23: Power-Up Sequence and Timing</b> .....                                                | <b>160</b> |
| <b>Sequencing of Reset and Regulator Control Signals</b> .....                                       | 160        |
| Description of Control Signals.....                                                                  | 161        |
| Control Signal Timing Diagrams.....                                                                  | 161        |
| <b>Section 24: Package Information</b> .....                                                         | <b>164</b> |
| Package Thermal Characteristics .....                                                                | 164        |
| Junction Temperature Estimation and $\text{PSI}_{\text{JT}}$ Versus $\text{THETA}_{\text{JC}}$ ..... | 164        |
| Environmental Characteristics .....                                                                  | 164        |
| <b>Section 25: Mechanical Information</b> .....                                                      | <b>165</b> |
| WLCSP Package Keep-Out Area .....                                                                    | 168        |
| <b>Section 26: Ordering Information</b> .....                                                        | <b>169</b> |

---

## List of Figures

|                                                                           |    |
|---------------------------------------------------------------------------|----|
| Figure 1: Functional Block Diagram .....                                  | 1  |
| Figure 2: BCM4330 Block Diagram .....                                     | 21 |
| Figure 3: Mobile Phone Block System Diagram.....                          | 25 |
| Figure 4: Typical Power Topology.....                                     | 27 |
| Figure 5: Recommended Oscillator Configuration .....                      | 32 |
| Figure 6: Recommended Circuit to Use with an External Dedicated TCXO..... | 33 |
| Figure 7: Recommended Circuit to Use with an External Shared TCXO .....   | 33 |
| Figure 8: Startup Signaling Sequence .....                                | 46 |
| Figure 9: CVSD Decoder Output Waveform Without PLC .....                  | 48 |
| Figure 10: CVSD Decoder Output Waveform After Applying PLC .....          | 48 |
| Figure 11: Functional Multiplex Data Diagram.....                         | 54 |
| Figure 12: PCM Timing Diagram (Short Frame Sync, Master Mode).....        | 55 |
| Figure 13: PCM Timing Diagram (Short Frame Sync, Slave Mode).....         | 56 |
| Figure 14: PCM Timing Diagram (Long Frame Sync, Master Mode).....         | 57 |
| Figure 15: PCM Timing Diagram (Long Frame Sync, Slave Mode).....          | 58 |
| Figure 16: PCM Burst Mode Timing (Receive Only, Short Frame Sync) .....   | 59 |
| Figure 17: PCM Burst Mode Timing (Receive Only, Long Frame Sync) .....    | 60 |
| Figure 18: UART Timing.....                                               | 62 |
| Figure 19: I <sup>2</sup> S Transmitter Timing.....                       | 65 |
| Figure 20: I <sup>2</sup> S Receiver Timing.....                          | 65 |
| Figure 21: Example Blend/Switch Usage.....                                | 69 |
| Figure 22: Example Blend/Switch Separation .....                          | 69 |
| Figure 23: Example Soft Mute Characteristic.....                          | 70 |
| Figure 24: Signal Connections to SDIO Host (SD 4-Bit Mode) .....          | 75 |
| Figure 25: Signal Connections to SDIO Host (SD 1-Bit Mode) .....          | 75 |
| Figure 26: Signal Connections to SDIO Host (gSPI Mode) .....              | 76 |
| Figure 27: gSPI Write Protocol .....                                      | 77 |
| Figure 28: gSPI Read Protocol .....                                       | 77 |
| Figure 29: gSPI Command Structure.....                                    | 78 |
| Figure 30: gSPI Signal Timing Without Status.....                         | 79 |
| Figure 31: gSPI Signal Timing with Status (Response Delay = 0) .....      | 80 |
| Figure 32: WLAN Boot-Up Sequence.....                                     | 83 |
| Figure 33: HSIC Device Block Diagram.....                                 | 84 |
| Figure 34: WLAN MAC Architecture .....                                    | 86 |
| Figure 35: WLAN PHY Block Diagram .....                                   | 91 |

|                                                                 |     |
|-----------------------------------------------------------------|-----|
| Figure 36: STBC Receive Block Diagram .....                     | 92  |
| Figure 37: Radio Functional Block Diagram.....                  | 94  |
| Figure 38: 144-FCFBGA Ball Map (Top View) .....                 | 95  |
| Figure 39: 133-WLBGA Ball Map (bottom view) .....               | 96  |
| Figure 40: WLCSP 225-Bump Map (bottom view).....                | 97  |
| Figure 41: RF Port Location for Bluetooth Testing .....         | 123 |
| Figure 42: FM Receiver Circuit .....                            | 134 |
| Figure 43: Port Locations.....                                  | 135 |
| Figure 44: SDIO Bus Timing (Default Mode).....                  | 154 |
| Figure 45: SDIO Bus Timing (High-Speed Mode) .....              | 156 |
| Figure 46: gSPI Timing .....                                    | 157 |
| Figure 47: WLAN = ON, Bluetooth = ON.....                       | 161 |
| Figure 48: WLAN = OFF, Bluetooth = OFF.....                     | 162 |
| Figure 49: WLAN = ON, Bluetooth = OFF.....                      | 162 |
| Figure 50: WLAN = OFF, Bluetooth = ON.....                      | 163 |
| Figure 51: WLAN Warm Reset.....                                 | 163 |
| Figure 52: 144-Ball FCFBGA Package Mechanical Information ..... | 165 |
| Figure 53: 133-Ball WLBGA Package Mechanical Information.....   | 166 |
| Figure 54: 225-Bump WLCSP Package Mechanical Information .....  | 167 |
| Figure 55: WLCSP Package Keep-outs .....                        | 168 |

## List of Tables

|                                                                                     |     |
|-------------------------------------------------------------------------------------|-----|
| Table 1: Reset Control Signals .....                                                | 31  |
| Table 2: Crystal Oscillator and External Clock – Requirements and Performance ..... | 34  |
| Table 3: External 32.768 kHz Sleep Clock Specifications .....                       | 37  |
| Table 4: Power Control Pin Descriptions .....                                       | 45  |
| Table 5: PCM Interface Timing Specifications (Short Frame Sync, Master Mode) .....  | 55  |
| Table 6: PCM Interface Timing Specifications (Short Frame Sync, Slave Mode) .....   | 56  |
| Table 7: PCM Interface Timing Specifications (Long Frame Sync, Master Mode) .....   | 57  |
| Table 8: PCM Interface Timing Specifications (Long Frame Sync, Slave Mode) .....    | 58  |
| Table 9: PCM Burst Mode (Receive Only, Short Frame Sync) .....                      | 59  |
| Table 10: PCM Burst Mode (Receive Only, Long Frame Sync) .....                      | 60  |
| Table 11: Example of Common Baud Rates .....                                        | 61  |
| Table 12: UART Timing Specifications .....                                          | 62  |
| Table 13: Timing for I <sup>2</sup> S Transmitters and Receivers .....              | 64  |
| Table 14: SDIO Pin Description .....                                                | 74  |
| Table 15: gSPI Status Field Details .....                                           | 80  |
| Table 16: gSPI Registers .....                                                      | 81  |
| Table 17: WLCSP 225-Bump Coordinates .....                                          | 98  |
| Table 18: FCBGA, WLBGA, and WLCSP Signal Descriptions .....                         | 105 |
| Table 19: WLAN GPIO Functions and Strapping Options .....                           | 114 |
| Table 20: Strap Options .....                                                       | 114 |
| Table 21: GPIO Multiplexing Matrix .....                                            | 115 |
| Table 22: Multiplexed GPIO Signals .....                                            | 116 |
| Table 23: I/O States .....                                                          | 117 |
| Table 24: Absolute Maximum Ratings .....                                            | 119 |
| Table 25: Environmental Ratings .....                                               | 120 |
| Table 26: ESD Specifications .....                                                  | 120 |
| Table 27: Recommended Operating Conditions and DC Characteristics .....             | 121 |
| Table 28: Bluetooth Receiver RF Specifications .....                                | 124 |
| Table 29: Bluetooth Transmitter RF Specifications .....                             | 125 |
| Table 30: Local Oscillator Performance .....                                        | 127 |
| Table 31: FM Transmitter Specifications .....                                       | 128 |
| Table 32: FM Receiver Specifications .....                                          | 130 |
| Table 33: 2.4 GHz Band General RF Specifications .....                              | 136 |
| Table 34: WLAN 2.4 GHz Receiver Performance Specifications .....                    | 136 |
| Table 35: WLAN 2.4 GHz Transmitter Performance Specifications .....                 | 139 |

|                                                                                                 |     |
|-------------------------------------------------------------------------------------------------|-----|
| Table 36: WLAN 5 GHz Receiver Performance Specifications .....                                  | 141 |
| Table 37: WLAN 5 GHz Transmitter Performance Specifications.....                                | 143 |
| Table 38: General Spurious Emissions Specifications.....                                        | 144 |
| Table 39: Core Buck Regulator (CLOCK) Specifications.....                                       | 145 |
| Table 40: LDO3p1 Specifications .....                                                           | 146 |
| Table 41: LDO3p3 Specifications .....                                                           | 147 |
| Table 42: CLDO Specifications .....                                                             | 148 |
| Table 43: LNLDO1 Specifications .....                                                           | 149 |
| Table 44: WLAN Current Consumption (I <sub>bat</sub> + I <sub>io</sub> )—2.4 GHz Operation..... | 150 |
| Table 45: WLAN Current Consumption (I <sub>bat</sub> + I <sub>io</sub> )—5 GHz Operation .....  | 152 |
| Table 46: HSIC Interface Current Consumption .....                                              | 153 |
| Table 47: Bluetooth and FM Current Consumption .....                                            | 153 |
| Table 48: SDIO Bus Timing Parameters (Default Mode) .....                                       | 155 |
| Table 49: SDIO Bus Timing Parameters (High-Speed Mode).....                                     | 156 |
| Table 50: gSPI Timing Parameters .....                                                          | 157 |
| Table 51: HSIC Interface Specifications .....                                                   | 158 |
| Table 52: JTAG Timing Characteristics.....                                                      | 159 |
| Table 53: Package Thermal Characteristics .....                                                 | 164 |
| Table 54: Ordering Information .....                                                            | 169 |

---

## About This Document

### Purpose and Audience

This document provides details of the functional, operational, and electrical characteristics of the Broadcom® BCM4330. It is intended for hardware design, application, and OEM engineers.

### Acronyms and Abbreviations

In most cases, acronyms and abbreviations are defined on first use.

For a comprehensive list of acronyms and other terms used in Broadcom documents, go to:  
<http://www.broadcom.com/press/glossary.php>.

### Document Conventions

The following conventions may be used in this document:

| Convention  | Description                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Bold</b> | User input and actions: for example, type <b>exit</b> , click <b>OK</b> , press <b>Alt+C</b>                                                                            |
| Monospace   | Code: <code>#include &lt;iostream&gt;</code><br>HTML: <code>&lt;td rowspan = 3&gt;</code><br>Command line commands and parameters: <code>wl [-1] &lt;command&gt;</code> |
| < >         | Placeholders for <i>required</i> elements: enter your <username> or <code>wl &lt;command&gt;</code>                                                                     |
| [ ]         | Indicates <i>optional</i> command-line parameters: <code>wl [-1]</code><br>Indicates bit and byte ranges (inclusive): <code>[0:3]</code> or <code>[7:0]</code>          |

## References

The references in this section may be used in conjunction with this document.



**Note:** Broadcom provides customer access to technical documentation and software through its Customer Support Portal (CSP) and Downloads & Support site (see [Technical Support](#)).

For Broadcom documents, replace the “xx” in the document number with the largest number available in the repository to ensure that you have the most current version of the document.

| <i>Document (or Item) Name</i>                                                                           | <i>Number</i>     | <i>Source</i> |
|----------------------------------------------------------------------------------------------------------|-------------------|---------------|
| <b>Broadcom Items</b>                                                                                    |                   |               |
| [1] <i>Printed Circuit Board Layout Guidelines and Component Selection for Optimized PMU Performance</i> | 4330_4336_AN1xx-R | CSP           |

## Technical Support

Broadcom provides customer access to a wide range of information, including technical documentation, schematic diagrams, product bill of materials, PCB layout information, and software updates through its customer support portal (<https://support.broadcom.com>). For a CSP account, contact your Sales or Engineering support representative.

In addition, Broadcom provides other product support through its Downloads & Support site (<http://www.broadcom.com/support/>).

# Section 1: BCM4330 Overview

## Overview

The Broadcom® BCM4330 single-chip device provides the highest level of integration for a mobile or handheld wireless system, with integrated IEEE 802.11 a/b/g/n (MAC/baseband/radio), Bluetooth 4.0 + EDR (enhanced data rate), and FM transceiver. It provides a small form-factor solution with minimal external components to drive down cost for mass volumes and allows for handheld device flexibility in size, form, and function. Comprehensive power management circuitry and software ensure the system can meet the needs of highly mobile devices that require minimal power consumption and reliable operation.

Figure 2 shows the interconnect of all the major physical blocks in the BCM4330 and their associated external interfaces, which are described in greater detail in the following sections.

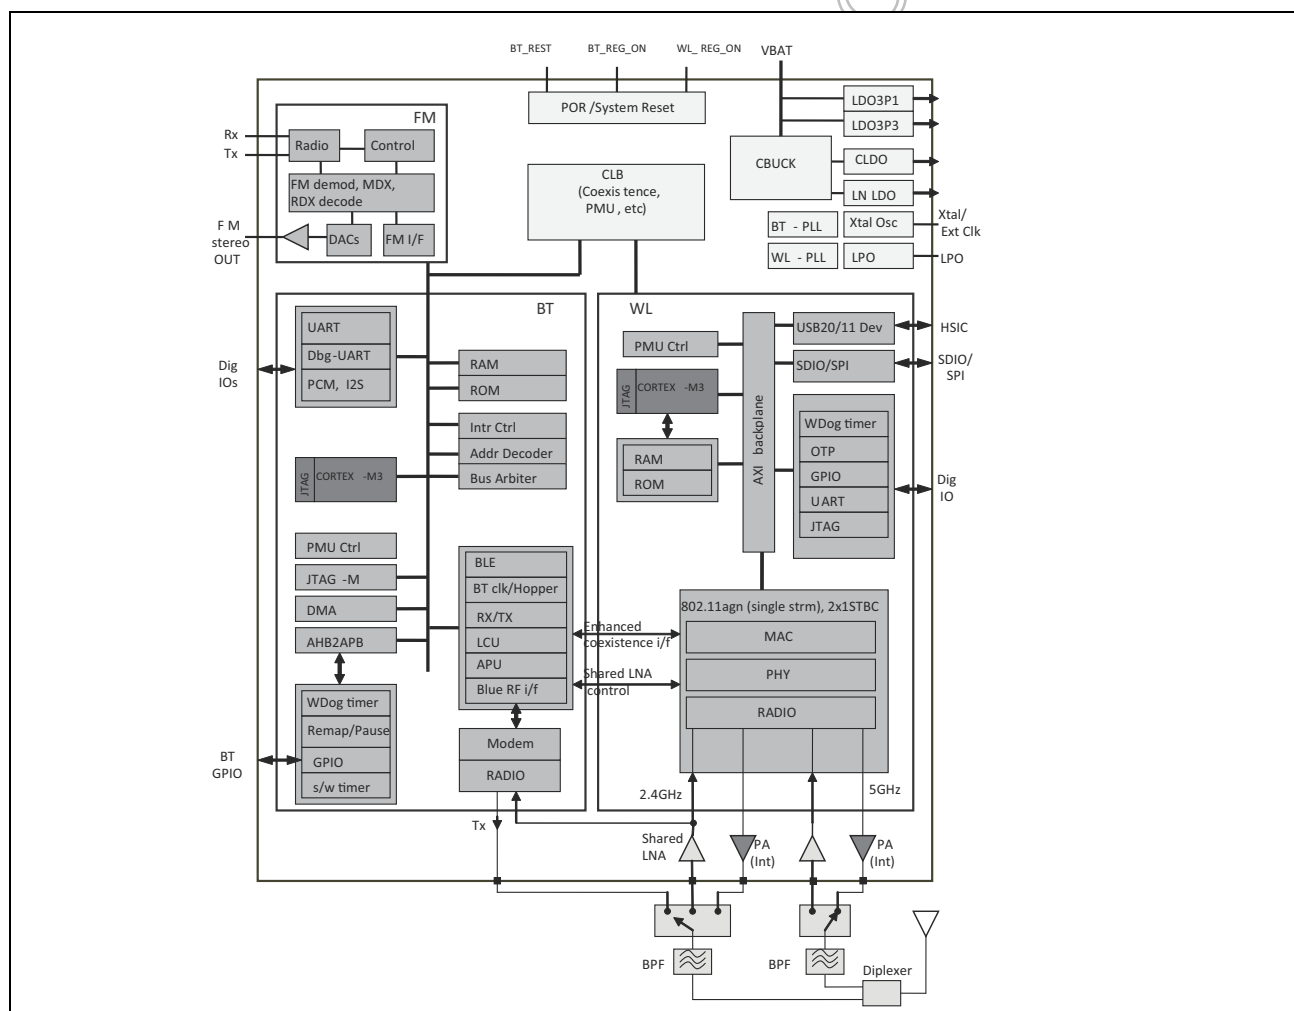


Figure 2: BCM4330 Block Diagram

---

## Features

The BCM4330 supports the following features:

- 802.11a/b/g/n dual-band radio — non-simultaneous dual-band operation
- Bluetooth v4.0 + EDR with integrated Class 1 PA
- Concurrent Bluetooth, FM (RX) RDS/RBDS, and WLAN operation
- On-chip WLAN driver execution capable of supporting 802.11 functionality
- Single- and dual-antenna support
  - Single antenna without external switch (shared LNA)
  - Simultaneous BT/WLAN receive with single antenna
  - Support for a 2×1 dual receiver system
- WLAN host interface options:
  - SDIO v1.2x (1-bit/4-bit) — up to 50 MHz clock rate
  - gSPI — up to 48 MHz clock rate
  - HSIC (USB device interface for short distance on-board applications)
- BT host digital interface (can be used concurrently with above interfaces):
  - UART (up to 4 Mbps)
- ECI — enhanced coexistence support, ability to coordinate BT SCO transmissions around WLAN receives
- I<sup>2</sup>S/PCM for FM/BT audio, HCI for FM block control
- HCI high-speed UART (H4, H4+, H5) transport support
- Wideband speech support (16 bits linear data, MSB first, left justified at 4K samples/s for transparent air coding, both through I<sup>2</sup>S and PCM interface)
- Bluetooth SmartAudio technology improves voice and music quality to headsets
- Bluetooth low power inquiry and page scan
- Bluetooth Low Energy (BLE) support
- Bluetooth Packet Loss Concealment (PLC)
- Bluetooth Wide Band Speech (WBS)
- FM advanced internal antenna support
- FM auto search/tuning functions
- FM multiple audio routing options: I<sup>2</sup>S, PCM, eSCO, A2DP
- FM mono-stereo blend and switch, and soft mute support
- FM audio pause detect support
- Audio rate-matching algorithms
- Multiple simultaneous A2DP audio stream
- FM over Bluetooth operation and on-chip stereo headset emulation (SBC, MP3, and AAC+)
- MP3, AAC+ on-chip decoder for low power music playback

---

## Standards Compliance

The BCM4330 supports the following standards:

- Bluetooth 2.1 + EDR
- Bluetooth 3.0 + HS
- Bluetooth 4.0 (Bluetooth Low Energy)
- 65 MHz to 108 MHz FM bands (US, Europe, and Japan)
- IEEE 802.11n — Handheld Device Class (Section 11)
- 802.11a
- 802.11b
- 802.11g
- 802.11d
- 802.11h
- 802.11i

The BCM4330 will support the following future drafts/standards:

- 802.11r — Fast Roaming (between APs)
- 802.11k — resource management
- 802.11w — Secure Management Frames
- 802.11 Extensions:
  - 802.11e QoS Enhancements (as per the WMM® specification is already supported)
  - 802.11h 5 GHz Extensions
  - 802.11i MAC Enhancements
  - 802.11r Fast Roaming Support
  - 802.11k Radio Resource Measurement
- Security:
  - WEP
  - WPA™ Personal
  - WPA2™ Personal
  - WMM
  - WMM-PS (U-APSD)
  - WMM-SA
  - AES (Hardware Accelerator)
  - TKIP (HW Accelerator)
  - CKIP (SW Support)
- Proprietary Protocols:
  - CCXv2
  - CCXv3
  - CCXv4
  - CCXv5
  - WFAEC

- 802.15.2 Coexistence Compliance — on silicon solution compliant with IEEE 3 wire requirements

---

## Mobile Phone Usage Model

The BCM4330 incorporates a number of unique features to simplify integration into mobile phone platforms. Its flexible PCM and UART interfaces enable it to transparently connect with the existing circuits. In addition, the TCXO and LPO inputs allow the use of existing handset features to further minimize the size, power, and cost of the complete system.

- The PCM interface provides multiple modes of operation to support both master and slave as well as hybrid interfacing to single or multiple external codec devices.
- The UART interface supports hardware flow control with tight integration to power control sideband signaling to support the lowest power operation.
- The TCXO interface accommodates any of the typical reference frequencies used by cell phones.
- An analog FM receiver interface is available for legacy systems.
- FM digital interfaces can use either I<sup>2</sup>S or PCM.
- The highly linear design of the radio transceiver ensures that the device has the lowest spurious emissions output regardless of the state of operation. It has been fully characterized in the global cellular bands.
- The transceiver design has excellent blocking (eliminating desensitization of the Bluetooth receiver) and intermodulation performance (distortion of the transmitted signal caused by the mixing of the cellular and Bluetooth transmissions) in the presence of a any cellular transmission (GSM®, GPRS, CDMA, WCDMA, or iDEN). Minimal external filtering is required for integration inside the handset.

The BCM4330 is designed to provide direct interface with new and existing handset designs as shown in [Figure 3](#).

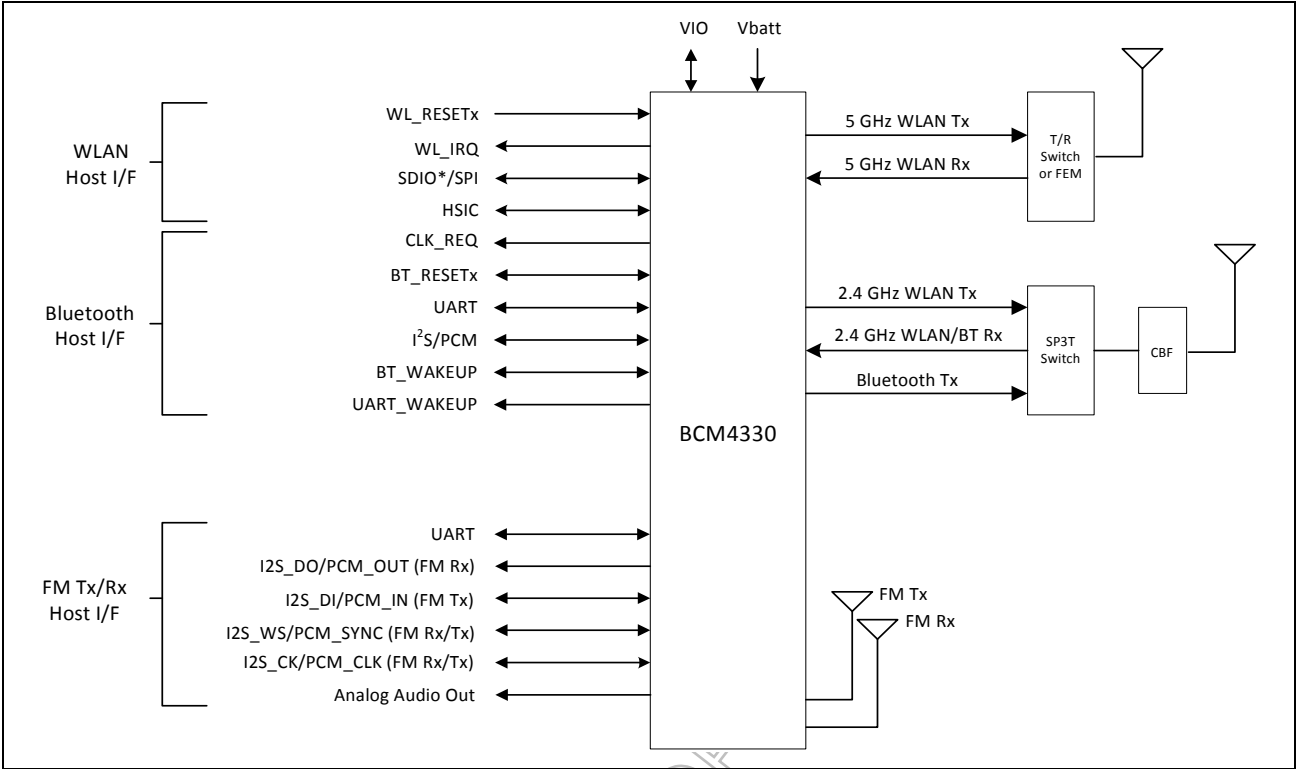


Figure 3: Mobile Phone Block System Diagram

## Section 2: Power Supplies and Power Management

### Power Supply Topology

One Buck regulator, four LDO regulators, and a Power Management Unit (PMU) are integrated into the BCM4330. All regulators are programmable via the PMU. These blocks simplify power supply design for Bluetooth, WLAN, and FM functions in embedded designs. All regulator inputs and outputs are brought out to pins on the BCM4330. This allows maximum flexibility for the system designer to choose which of the BCM4330 integrated regulators to use.

A single host power supply can be used (including VBATT ranging from 2.3V to 4.8V) with all additional voltages being provided by the regulators in the BCM4330.

Two control signals, BT\_REG\_ON and WL\_REG\_ON, are used to power-up the regulators. The CBuck CLDO and LNLDO power up when any of the reset signals are de-asserted. All regulators are powered down only when both resets are asserted. The CLDO and LNLDO may be turned off/on based on the dynamic demands of the digital baseband.

### Voltage Regulators

All BCM4330 regulator output voltages are PMU-programmable and have the following nominal ratings. The currents listed below indicate the capabilities of each regulator. See [Section 21: "System Power Consumption," on page 150](#) for the actual operating loads.

- Core Buck switching regulator (CBUCK): 2.3–4.8V in; nominal 1.5V, up to 500 mA out
- LDO3p1: 2.3–4.8V in; nominal 3.1V, up to 80 mA out
- LDO3p3: 2.3–4.8 in; nominal 3.3V, up to 80 mA out
- CLDO (for the core): 1.5V in; nominal 1.2V, up to 150 mA out
- Low-noise LNLDO1: 1.5V in; nominal 1.2V, up to 300 mA out

Figure 4 shows the typical power topology.

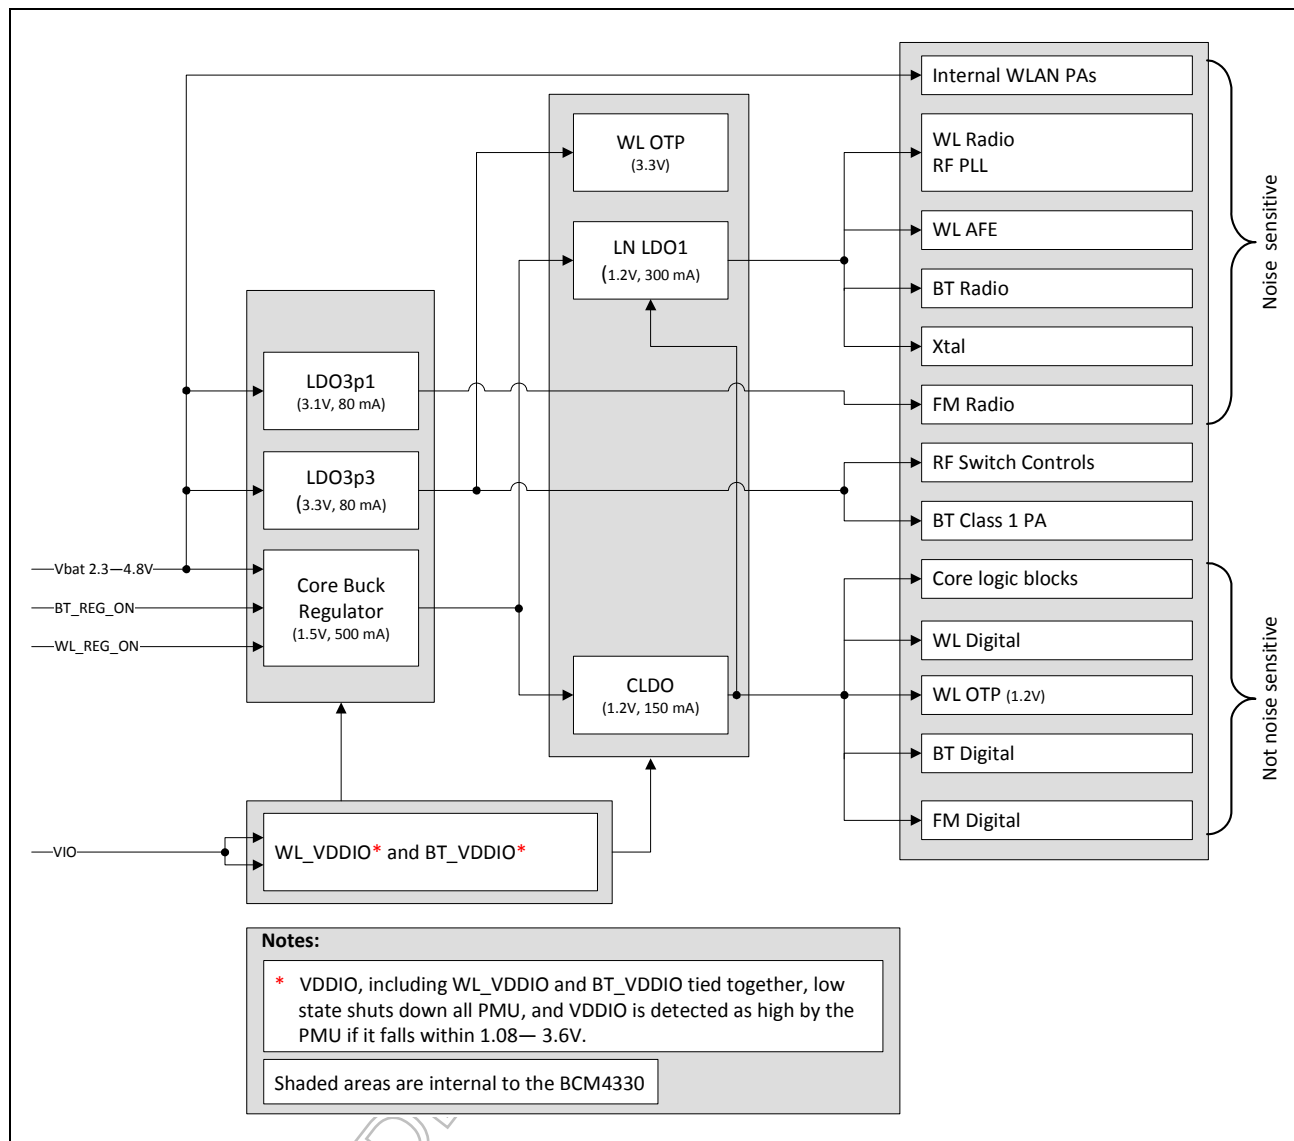


Figure 4: Typical Power Topology

---

## WLAN Power Management

The BCM4330 has been designed with the stringent power consumption requirements of mobile devices in mind. All areas of the chip design are optimized to minimize power consumption. Silicon processes and cell libraries were chosen to reduce leakage current and supply voltages. Additionally, the BCM4330 integrated RAM is a high Vt memory with dynamic clock control. The dominant supply current consumed by the RAM is leakage current only. Additionally, the BCM4330 includes an advanced WLAN power management unit (PMU) sequencer. The PMU sequencer provides significant power savings by putting the BCM4330 into various power management states appropriate to the current environment and activities that are being performed. The power management unit enables and disables internal regulators, switches, and other blocks based on a computation of the required resources and a table that describes the relationship between resources and the time needed to enable and disable them. Power up sequences are fully programmable. Configurable, free-running counters (running from the 32.768 kHz LPO clock) in the PMU sequencer are used to turn on/turn off individual regulators and power switches. Clock speeds are dynamically changed (or gated off) based on the instantaneous requirements of the system. Slower clock speeds are used wherever possible.

The BCM4330 WLAN power states are described as follows:

- Active mode — All components in the BCM4330 are powered up and fully functional with active carrier sensing and frame transmission and receiving. All required regulators are enabled and put in the most efficient mode (PWM or Burst) based on the load current. Clock speeds are dynamically adjusted by the PMU sequencer.
- Doze mode — The radio, analog front end (AFE), PLLs, and the ROMs are powered down. The rest of the BCM4330 remains powered up in an IDLE state. All main clocks are shut down. The 32.768 kHz LPO clock is available only for the PMU sequencer. This condition is necessary to allow the PMU sequencer to wake up the chip and transition to Active mode. In Doze mode, the primary power consumed is due to leakage current. The external switcher and internal baseband switcher are put into Burst mode (for better efficiency at low load currents).
- Power-down mode — The BCM4330 is effectively powered off by shutting down all internal regulators. The chip is brought out of this mode by external logic re-enabling the internal regulators.

---

## PMU Sequencing

The PMU sequencer is responsible for minimizing system power consumption. It enables and disables various system resources based on a computation of the required resources and a table that describes the relationship between resources and the time needed to enable and disable them.

Resource requests may come from several sources: clock requests from cores, the minimum resources defined in the ResourceMin register, and the resources requested by any active resource request timers. The PMU sequencer maps clock requests into a set of resources required to produce the requested clocks.

Each resource is in one of four states: enabled, disabled, transition\_on, and transition\_off and has a timer that contains 0 when the resource is enabled or disabled and a non-zero value in the transition states. The timer is loaded with the resource's time\_on or time\_off value when the PMU determines that the resource must be enabled or disabled. That timer decrements on each 32.768 kHz PMU clock. When it reaches 0, the state changes from transition\_off to disabled or transition\_on to enabled. If the time\_on value is 0, the resource can go immediately from disabled to enabled. Similarly, a time\_off value of 0 indicates that the resource can go immediately from enabled to disabled. The terms enable sequence and disable sequence refer to either the immediate transition or the timer load-decrement sequence.

During each clock cycle, the PMU sequencer performs the following actions:

1. Computes the required resource set based on requests and the resource dependency table.
2. Decrements all timers whose values are non zero. If a timer reaches 0, the PMU clears the ResourcePending bit for the resource and inverts the ResourceState bit.
3. Compares the request with the current resource status and determines which resources must be enabled or disabled.
4. Initiates a disable sequence for each resource that is enabled, no longer being requested, and has no powered up dependents.
5. Initiates an enable sequence for each resource that is disabled, is being requested, and has all of its dependencies enabled.

---

## Low-Power Shutdown

The BCM4330 provides a low-power shutdown feature that allows the device to be turned off while the host, and any other devices in the system, remain operational. When the BCM4330 is not needed in the system, VDDRF and VDDC are shut down while VDDO remains powered. This allows the BCM4330 to be effectively off while keeping the I/O pins powered so that they do not draw extra current from any other devices connected to the I/O.

During a low-power shut-down state, provided VDDO remains applied to the BCM4330, all outputs are tristated, and most inputs signals are disabled. Input voltages must remain within the limits defined for normal operation. This is done to prevent current paths or create loading on any digital signals in the system, and enables the BCM4330 to be fully integrated in an embedded device and take full advantage of the lowest power-savings modes.

Two signals on the BCM4330, the frequency reference input (WRF\_XTAL\_ON) and the LPO input, are designed to be high-impedance inputs that do not load down the driving signal even if the chip does not have VDDO power applied to it.

When the BCM4330 is powered on from this state, it is the same as a normal power-up and the device does not contain any information about its state from before it was powered down.

CONFIDENTIAL FOR BROADCOM

## Reset Circuits

The BCM4330 has three signals (see [Table 1](#)) that enable or disable the Bluetooth and WLAN circuits and the internal regulator blocks, allowing the host to control power consumption. For timing diagrams of these signals and the required power-up sequences, see [Section 23: “Power-Up Sequence and Timing,”](#) on page 160.

**Table 1: Reset Control Signals**

| Signal    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| WL_REG_ON | This signal is used by the PMU (with BT_REG_ON) to power up the WLAN section. It is also OR-gated with the BT_REG_ON input to control the internal BCM4330 regulators. When this pin is high, the regulators are enabled and the WLAN section is out of reset. When this pin is low, the WLAN section is in reset. If BT_REG_ON and WL_REG_ON are both low, the regulators are disabled.<br>Logic High Level: 1.08V–3.6V. 200k pull-down resistor included. |
| BT_REG_ON | This signal is used by the PMU (with WL_REG_ON) to decide whether or not to power down the internal BCM4330 regulators. If BT_REG_ON and WL_REG_ON are low, the regulators will be disabled.<br>Logic High Level: 1.08V–3.6V. 200k pull-down resistor included.                                                                                                                                                                                             |
| BT_RST_N  | Low asserting reset for the Bluetooth core. This pin has no effect on WLAN and does not control any PMU functions. It must be driven high or low (not left floating).                                                                                                                                                                                                                                                                                       |

In addition, two other input signals control PMU modes:

- When EXT\_SMPS\_REQ is pulled high, it forces CBUCK to stay on, even when the other regulators are shut down by WL\_REG\_ON or BT\_REG\_ON.
- When WLAN and/or Bluetooth are out of reset and EXT\_SMPS\_REQ is high, then pulling EXT\_PWM\_REQ high makes CBUCK go into PWM mode, even if internal settings from WLAN and/or Bluetooth are requesting burst mode. During such contention, the request for the higher-power mode wins.

## Section 3: Frequency References


An external crystal is used for generating all radio frequencies and normal operation clocking. As an alternative, an external frequency reference driven by a temperature-compensated crystal oscillator (TCXO) signal may be used. In addition, a low-power oscillator (LPO) is provided for lower power mode timing.



**Note:** The crystal and TCXO implementations have different power supplies (WRF\_XTAL\_VDD1P2 for crystal, WRF\_TCXO\_VDD for TCXO).

### Crystal Interface and Clock Generation

The BCM4330 can use an external crystal to provide a frequency reference. The recommended configuration for the crystal oscillator including all external components is shown in [Figure 5](#). Consult the reference schematics for the latest configuration.

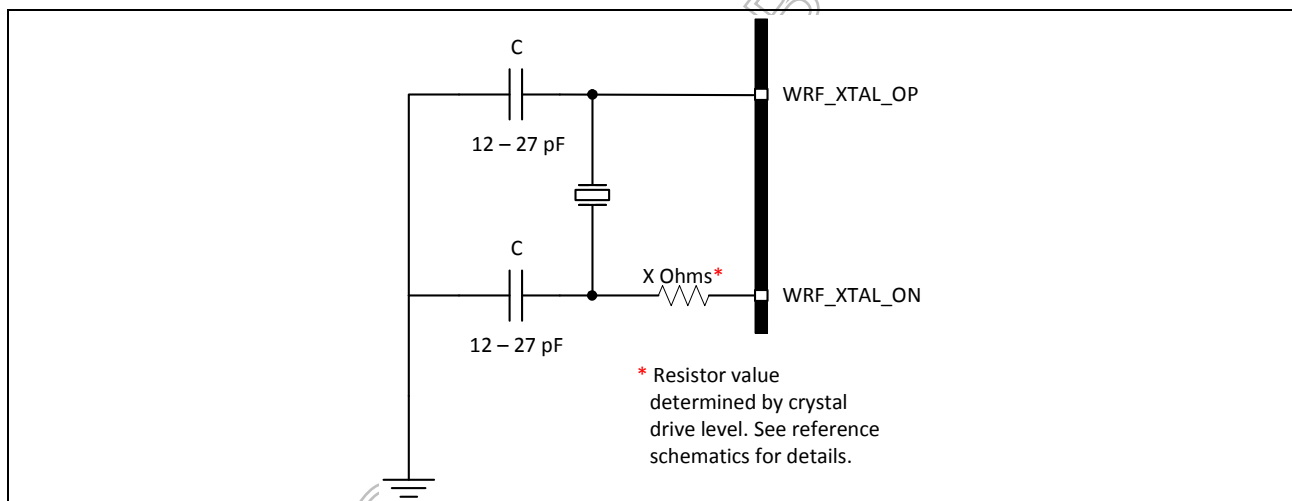

**Figure 5: Recommended Oscillator Configuration**

A fractional-N synthesizer in the BCM4330 generates the radio frequencies, clocks, and data/packet timing, enabling it to operate using a wide selection of frequency references.

For SDIO applications the default frequency reference is a 37.4 MHz crystal or TCXO. For HSIC applications, the recommended frequency reference is also 37.4 MHz. The signal characteristics for the crystal interface are listed in [Table 2 on page 34](#).




**Note:** The fractional-N synthesizer can support many reference frequencies. However, frequencies other than the default require support to be added in the driver plus additional, extensive system testing. Contact Broadcom for further details.


## TCXO

As an alternative to a crystal, an external precision TCXO can be used as the frequency reference, provided that it meets the Phase Noise requirements listed in [Table 2 on page 34](#). When the clock is provided by an external TCXO, there are two possible connection methods, as shown in [Figure 6](#) and [Figure 7](#):

1. If the TCXO is dedicated to driving the BCM4330, it should be connected to the WRF\_XTAL\_OP pin through an external 1000 pF coupling capacitor, as shown in [Figure 6](#). The internal clock buffer connected to this pin will be turned OFF when the BCM4330 goes into sleep mode. When the clock buffer turns ON and OFF there will be a small impedance variation. Power must be supplied to the WRF\_XTAL\_VDD1P2 pin.
2. For 2.4 GHz operation only, an alternative is to DC-couple the TCXO to the WRF\_TCXO\_IN pin, as shown in [Figure 7](#). Use this method when the same TCXO is shared with other devices and a change in the input impedance is not acceptable because it may cause a frequency shift that cannot be tolerated by the other device sharing the TCXO. This pin is connected to a clock buffer powered from WRF\_TCXO\_VDD. If the power supply to this buffer is always on (even in sleep mode), the clock buffer is always on, thereby ensuring a constant input impedance in all states of the device. The maximum current drawn from WRF\_TCXO\_VDD is approximately 500  $\mu$ A.

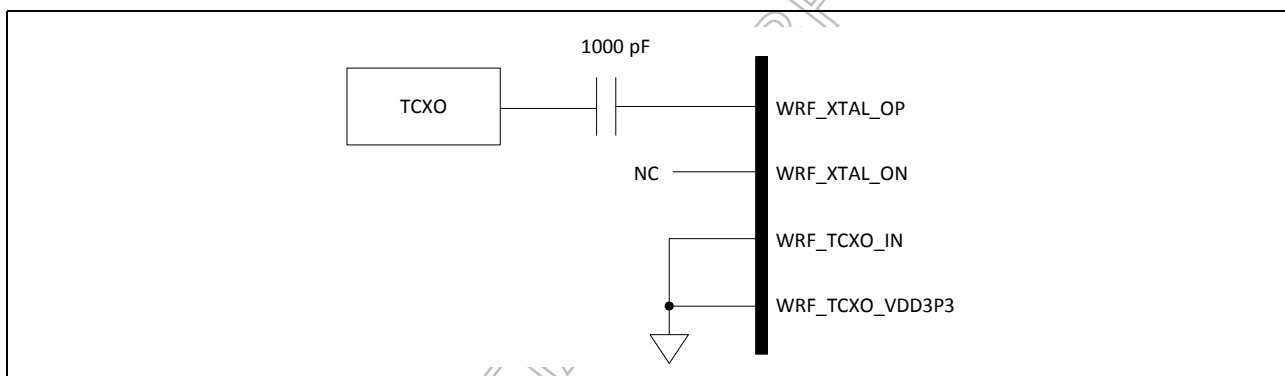

**Figure 6: Recommended Circuit to Use with an External Dedicated TCXO**

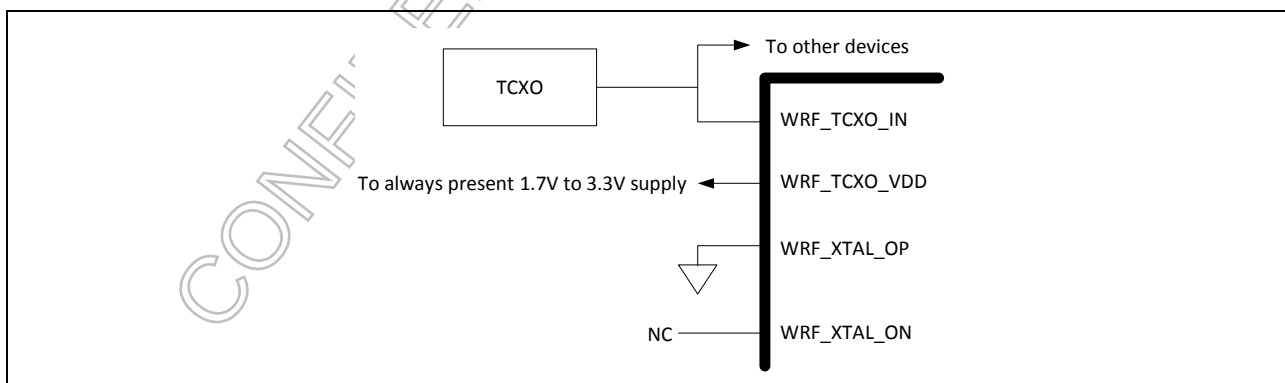

**Figure 7: Recommended Circuit to Use with an External Shared TCXO**

Table 2 provides crystal oscillator and external clock requirements and performance information.

**Table 2: Crystal Oscillator and External Clock – Requirements and Performance**

| Parameter                                           | Conditions/Notes                 | Crystal <sup>a</sup>                     |      |     | External Frequency Reference <sup>b c</sup> |      |      | Units             |
|-----------------------------------------------------|----------------------------------|------------------------------------------|------|-----|---------------------------------------------|------|------|-------------------|
|                                                     |                                  | Min                                      | Typ  | Max | Min                                         | Typ  | Max  |                   |
| Frequency                                           | —                                | Between 12 MHz and 52 MHz <sup>d,e</sup> |      |     |                                             |      |      |                   |
| Crystal load capacitance                            | —                                | —                                        | 12   | —   | —                                           | —    | —    | pF                |
| ESR                                                 | —                                | —                                        | —    | 60  | —                                           | —    | —    | Ω                 |
| Drive level                                         | External crystal                 | —                                        | —    | 200 | —                                           | —    | —    | μW                |
| Input impedance (WRF_XTAL_OP)                       | Resistive                        | 30k                                      | 100k | —   | 30k                                         | 100k | —    | Ω                 |
|                                                     | Capacitive                       | —                                        | —    | 7.5 | —                                           | —    | 7.5  | pF                |
| Input impedance (WRF_TCXO_IN)                       | Resistive                        | —                                        | —    | —   | 30k                                         | 100k | —    | Ω                 |
|                                                     | Capacitive                       | —                                        | —    | —   | —                                           | —    | 4    | pF                |
| WRF_XTAL_OP input voltage (see Figure 6 on page 33) | AC-coupled analog signal         | —                                        | —    | —   | 400                                         | —    | 1320 | mV <sub>p-p</sub> |
| WRF_TCXO_IN Input voltage (see Figure 7 on page 33) | DC-coupled analog signal         | —                                        | —    | —   | 400                                         | —    | 3300 | mV <sub>p-p</sub> |
| Frequency tolerance Initial + over temperature      | Without trimming                 | −20                                      | —    | 20  | −20                                         | —    | 20   | ppm               |
| Duty cycle                                          | 37.4 MHz clock                   | —                                        | —    | —   | 40                                          | 50   | 60   | %                 |
| Phase Noise <sup>f</sup> (802.11b/g)                | 37.4 MHz clock at 1 kHz offset   | —                                        | —    | —   | —                                           | —    | −115 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 10 kHz offset  | —                                        | —    | —   | —                                           | —    | −125 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 100 kHz offset | —                                        | —    | —   | —                                           | —    | −130 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 1 MHz offset   | —                                        | —    | —   | —                                           | —    | −135 | dBc/Hz            |
| Phase Noise <sup>f</sup> (802.11a)                  | 37.4 MHz clock at 1 kHz offset   | —                                        | —    | —   | —                                           | —    | −123 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 10 kHz offset  | —                                        | —    | —   | —                                           | —    | −133 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 100 kHz offset | —                                        | —    | —   | —                                           | —    | −138 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 1 MHz offset   | —                                        | —    | —   | —                                           | —    | −143 | dBc/Hz            |
| Phase Noise <sup>f</sup> (802.11n, 2.4 GHz)         | 37.4 MHz clock at 1 kHz offset   | —                                        | —    | —   | —                                           | —    | −120 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 10 kHz offset  | —                                        | —    | —   | —                                           | —    | −130 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 100 kHz offset | —                                        | —    | —   | —                                           | —    | −135 | dBc/Hz            |
|                                                     | 37.4 MHz clock at 1 MHz offset   | —                                        | —    | —   | —                                           | —    | −140 | dBc/Hz            |

**Table 2: Crystal Oscillator and External Clock – Requirements and Performance (Cont.)**

| Parameter                                    | Conditions/Notes                 | Crystal <sup>a</sup> |     |     | External Frequency Reference <sup>b c</sup> |     |      | Units  |
|----------------------------------------------|----------------------------------|----------------------|-----|-----|---------------------------------------------|-----|------|--------|
|                                              |                                  | Min                  | Typ | Max | Min                                         | Typ | Max  |        |
| Phase Noise <sup>f</sup><br>(802.11n, 5 GHz) | 37.4 MHz clock at 1 kHz offset   | –                    | –   | –   | –                                           | –   | –128 | dBc/Hz |
|                                              | 37.4 MHz clock at 10 kHz offset  | –                    | –   | –   | –                                           | –   | –138 | dBc/Hz |
|                                              | 37.4 MHz clock at 100 kHz offset | –                    | –   | –   | –                                           | –   | –143 | dBc/Hz |
|                                              | 37.4 MHz clock at 1 MHz offset   | –                    | –   | –   | –                                           | –   | –148 | dBc/Hz |

a. (Crystal) Use WRF\_XTAL\_OP and WRF\_XTAL\_ON, internal power to pin WRF\_XTAL\_VDD1P2.

b. (TCXO) See “TCXO” on page 33 for alternative connection methods.

c. For a clock reference other than 37.4 MHz,  $20 \times \log_{10}(f/37.4)$  dB should be added to the limits, where f = the reference clock frequency in MHz.

d. BT\_TM6 should be tied low for a 52 MHz clock reference. For other frequencies, BT\_TM6 should be tied high. Note that 52 MHz is not an auto-detected frequency using the LPO clock.

e. The frequency step size is approximately 80 Hz resolution.

f. If the selected clock has a flat phase noise response above 100 kHz, that is, the phase noise at and above 100 kHz is constant, then subtract 1dB from all 1 kHz, 10 kHz, and 100 kHz values shown. For example, for the 2.4 GHz 802.11b/g values, the phase noise requirements change from –115, –125, and –130 dBc/Hz to –116, –126, and –131 dBc/Hz respectively. Ignore the 1 MHz requirements when the phase noise is flat above 100 kHz.

---

## Frequency Selection

Any frequency within the ranges specified for the crystal and TCXO reference may be used. These include not only the standard handset reference frequencies of 12, 13, 14.4, 16.2, 16.8, 19.2, 19.44, 19.68, 19.8, 20, 26, 37.4, and 52 MHz, but also other frequencies in this range, with approximately 80 Hz resolution. The BCM4330 must have the reference frequency set correctly in order for any of the UART or PCM interfaces to function correctly, since all bit timing is derived from the reference frequency.



**Note:** The fractional-N synthesizer can support many reference frequencies. However, frequencies other than the default require support to be added in the driver plus additional, extensive system testing. Contact Broadcom for further details.

The reference frequency for the BCM4330 may be set in the following ways:

- Set the “xtalfreq=xxxxx” parameter in the nvram.txt file (used to load the driver) to correctly match the crystal frequency.
- Auto-detect any of the standard handset reference frequencies using an external LPO clock.

For applications such as handsets and portable smart communication devices, where the reference frequency is one of the standard frequencies commonly used, the BCM4330 automatically detects the reference frequency and programs itself to the correct reference frequency. In order for auto frequency detection to work correctly, the BCM4330 must have a valid and stable 32.768 kHz LPO clock that meets the requirements listed in [Table 3 on page 37](#) and is present during power-on reset.

## External 32.768 kHz Low Power Oscillator

The BCM4330 uses a secondary low frequency clock for low power mode timing.

A precision external 32.768 kHz clock that meets the specifications listed in [Table 3](#) is required by the BCM4330.

**Table 3: External 32.768 kHz Sleep Clock Specifications**

| Parameter                                    | LPO Clock                | Units    |
|----------------------------------------------|--------------------------|----------|
| Nominal input frequency                      | 32.768                   | kHz      |
| Frequency accuracy                           | $\pm 200^{\text{a, b}}$  | ppm      |
| Duty cycle                                   | 30–70                    | %        |
| Input signal amplitude                       | 200–1800 <sup>c</sup>    | mV, p-p  |
| Signal type                                  | Square-wave or sine-wave | –        |
| Input impedance <sup>d</sup>                 | >100k                    | $\Omega$ |
|                                              | <5                       | pF       |
| Clock jitter (integrated over 300 Hz–15 kHz) | <5                       | ns       |
| Clock jitter (during initial start-up)       | <10,000                  | ppm      |

- a. If FM RX is used:  $\pm 150$  ppm maximum with frequency error indication,  $\pm 50$  ppm without frequency error indication.
- b. If FM TX is used:  $\pm 100$  ppm maximum with frequency error indication,  $\pm 50$  ppm without frequency error indication.
- c. 200–1800 mVp-p to avoid additional current consumption and degradation in FM SNR. 3.3 Vp-p maximum.
- d. When power is applied or switched off.

## Section 4: Bluetooth + FM Subsystem Overview

The Broadcom BCM4330 is a Bluetooth 4.0 + EDR-compliant, baseband processor/ 2.4 GHz transceiver with an integrated FM/ RDS/RBDS receiver and FM/RDS transmitter. It features the highest level of integration and eliminates all critical external components, thus minimizing the footprint, power consumption, and system cost of a Bluetooth plus FM radio solution.

The BCM4330 is the optimal solution for any Bluetooth voice and/or data application that also requires an FM radio receiver and transmitter. The Bluetooth subsystem presents a standard Host Controller Interface (HCI) via a high speed UART and PCM for audio. The FM subsystem supports the HCI control interface, analog output, as well as I<sup>2</sup>S and PCM interfaces. The BCM4330 incorporates all Bluetooth 4.0 features including Secure Simple Pairing, Sniff Subrating, and Encryption Pause and Resume.

The BCM4330 Bluetooth radio transceiver provides enhanced radio performance to meet the most stringent mobile phone temperature applications and the tightest integration into mobile handsets and portable devices. It is fully compatible with any of the standard TCXO frequencies and provides full radio compatibility to operate simultaneously with GPS, WLAN, and cellular radios.

The Bluetooth transmitter also features a Class 1 power amplifier with Class 2 capability.

---

### Features

#### Major Bluetooth features of the BCM4330 include:

- Supports key features of upcoming Bluetooth standards
- Fully supports Bluetooth Core Specification version 4.0 + (Enhanced Data Rate) EDR features:
  - Adaptive Frequency Hopping (AFH)
  - Quality of Service (QoS)
  - Extended Synchronous Connections (eSCO) — Voice Connections
  - Fast Connect (interlaced page and inquiry scans)
  - Secure Simple Pairing (SSP)
  - Sniff Subrating (SSR)
  - Encryption Pause Resume (EPR)
  - Extended Inquiry Response (EIR)
  - Link Supervision Timeout (LST)
- UART baud rates up to 4 Mbps
- Supports all Bluetooth 4.0 + HS packet types
- Supports maximum Bluetooth data rates over HCI UART
- Multipoint operation with up to seven active slaves
  - Maximum of seven simultaneous active ACL links
  - Maximum of three simultaneous active SCO and eSCO connections with scatternet support

- Narrowband and wideband packet loss concealment
- Scatternet operation with up to four active piconets with background scan and support for scatter mode
- High-speed HCI UART transport support with low-power out-of-band BT\_WAKE and HOST\_WAKE signaling (see “Host Controller Power Management” on page 45)
- Channel quality driven data rate and packet type selection
- Standard Bluetooth test modes
- Extended radio and production test mode features
- Full support for power savings modes
  - Bluetooth clock request
  - Bluetooth standard sniff
  - Deep-sleep modes and software regulator shutdown
- TCXO input and auto-detection of all standard handset clock frequencies. Also supports a low-power crystal, which can be used during power save mode for better timing accuracy.

**Major FM Radio features include:**

- 65 MHz to 108 MHz FM bands supported (US, Europe, and Japan)
- FM subsystem control using the Bluetooth HCI interface
- FM subsystem operates from 32.768 kHz low-power oscillator (LPO) or reference clock inputs
- Improved audio interface capabilities with full-featured bidirectional PCM, I<sup>2</sup>S, and analog stereo DAC
- I<sup>2</sup>S can be master or slave

**FM Receiver-Specific Features Include:**

- Excellent FM radio performance with 1  $\mu$ V sensitivity for 26 dB (S+N)/N
- Signal-dependent stereo/mono blending
- Signal dependent soft mute
- Auto search and tuning modes
- Audio silence detection
- RSSI, IF frequency, status indicators
- RDS and RBDS demodulator and decoder with filter and buffering functions
- Automatic frequency jump

**FM Transmitter-Specific Features Include:**

- Programmable output power with +120 dB $\mu$ V maximum output power and 24 dB range
- RDS and RBDS encoder and modulator with intelligent frame encoding and programmable scroll rate
- Programmable audio swing to FM modulation deviation
- Programmable mono or stereo transmission
- Concurrent Bluetooth v4.0 + EDR and FM transmit functionality
- Digital audio input from I<sup>2</sup>S or PCM
- Host programmable frequency from 76 MHz to 108 MHz in 50 kHz channel steps
- Digitally programmable audio level and mute control

---

## Bluetooth Radio

The BCM4330 has an integrated radio transceiver that has been optimized for use in 2.4 GHz Bluetooth wireless systems. It has been designed to provide low-power, low-cost, robust communications for applications operating in the globally available 2.4 GHz unlicensed ISM band. It is fully compliant with the Bluetooth Radio Specification and EDR specification and meets or exceeds the requirements to provide the highest communication link quality of service.

### Transmit

The BCM4330 features a fully integrated zero-IF transmitter. The baseband transmit data is GFSK-modulated in the modem block and upconverted to the 2.4 GHz ISM band in the transmitter path. The transmitter path consists of signal filtering, I/Q upconversion, output power amplifier, and RF filtering. The transmitter path also incorporates  $\pi/4$ -DQPSK for 2 Mbps and 8-DPSK for 3 Mbps to support EDR. The transmitter section is compatible to the Bluetooth Low Energy specification. The transmitter PA bias can also be adjusted to provide Bluetooth Class 1 operation.

### Digital Modulator

The digital modulator performs the data modulation and filtering required for the GFSK,  $\pi/4$ -DQPSK, and 8-DPSK signal. The fully digital modulator minimizes any frequency drift or anomalies in the modulation characteristics of the transmitted signal and is much more stable than direct VCO modulation schemes.

### Digital Demodulator and Bit Synchronizer

The digital demodulator and bit synchronizer take the low-IF received signal and perform an optimal frequency tracking and bit-synchronization algorithm.

### Power Amplifier

The fully integrated PA supports Class 1 or Class 2 output using a highly linearized, temperature-compensated design. This provides greater flexibility in front-end matching and filtering. The fully integrated PA supports Class 1 and Class 2 output using a temperature-compensated, auto-transformer-based design. This provides a simplified front end that does not require off-chip components for matching and better efficiency. External filtering is required for meeting Bluetooth and regulatory harmonic and spurious requirements. For integrated mobile handset applications where the Bluetooth is integrated next to the cellular radio, minimal external filtering can be applied to achieve near thermal noise levels for spurious and radiated noise emissions. The transmitter features a sophisticated on-chip transmit signal strength indicator (TSSI) block to keep the absolute output power variation within a tight range across process, voltage, and temperature.

## Receiver

The receiver path uses a low-IF scheme to downconvert the received signal for demodulation in the digital demodulator and bit synchronizer. The receiver path provides a high degree of linearity, an extended dynamic range, and high-order on-chip channel filtering to ensure reliable operation in the noisy 2.4 GHz ISM band. The front-end topology with built-in out-of-band attenuation enables the BCM4330 to be used in most applications with no off-chip filtering. For integrated handset operation, where the Bluetooth function is integrated close to the cellular transmitter, minimal external filtering is required to eliminate the desensitization of the receiver by the cellular transmit signal.

## Digital Demodulator and Bit Synchronizer

The digital demodulator and bit synchronizer take the low-IF received signal and perform an optimal frequency tracking and bit synchronization algorithm.

## Receiver Signal Strength Indicator

The radio portion of the BCM4330 provides a Receiver Signal Strength Indicator (RSSI) signal to the baseband, so that the controller can take part in a Bluetooth power-controlled link by providing a metric of its own receiver signal strength to determine whether the transmitter should increase or decrease its output power.

## Local Oscillator Generation

Local Oscillator (LO) generation provides fast frequency hopping (1600 hops/second) across the 79 maximum available channels. The LO generation subblock employs an architecture for high immunity to LO pulling during PA operation. The BCM4330 uses an internal RF and IF loop filter.

## Calibration

The BCM4330 radio transceiver features an automated calibration scheme that is fully self contained in the radio. No user interaction is required during normal operation or during manufacturing to provide the optimal performance. Calibration optimizes the performance of all the major blocks within the radio to optimal conditions, including gain and phase characteristics of filters, matching between key components, and key gain blocks. This takes into account process variation and temperature variation. Calibration occurs transparently during normal operation during the settling time of the hops and calibrates for temperature variations as the device cools and heats during normal operation in its environment.

## Section 5: Bluetooth Baseband Core

The Bluetooth Baseband Core (BBC) implements all of the time critical functions required for high-performance Bluetooth operation. The BBC manages the buffering, segmentation, and routing of data for all connections. It also buffers data that passes through it, handles data flow control, schedules SCO/ACL TX/RX transactions, monitors Bluetooth slot usage, optimally segments and packages data into baseband packets, manages connection status indicators, and composes and decodes HCI packets. In addition to these functions, it independently handles HCI event types, and HCI command types.

The following transmit and receive functions are also implemented in the BBC hardware to increase reliability and security of the TX/RX data before sending over the air:

- Symbol timing recovery, data deframing, forward error correction (FEC), header error control (HEC), cyclic redundancy check (CRC), data decryption, and data dewatering in the receiver.
- Data framing, FEC generation, HEC generation, CRC generation, key generation, data encryption, and data whitening in the transmitter.

### Bluetooth 4.0 Features

The BBC supports Bluetooth 4.0 features with the following benefits:

- Dual mode Bluetooth Low Energy (BT and BLE operation).
- Extended Inquiry Response (EIR): Shortens the time to retrieve the device name, specific profile, and operating mode.
- Encryption Pause Resume (EPR): Enables the use of Bluetooth technology in a much more secure environment.
- Sniff Subrating (SSR): Optimizes power consumption for low duty cycle asymmetrical data flow, which subsequently extends battery lifetime.
- Secure Simple Pairing (SSP): Reduces the number of steps for connecting two devices with minimal or no user interaction required.
- Link Supervision Time Out (LSTO): Additional commands added to HCI and Link Management Protocol (LMP) for improved link time-out supervision.
- QoS Enhancements: Changes to data traffic control, which results in better link performance. Audio, human interface design (HID), bulk traffic, SCO and enhanced SCO (eSCO) are improved with the erroneous data (ED) and packet boundary flag (PBF) enhancements.

### Bluetooth Low Energy

The BCM4330 is forward-compatible with the impending Bluetooth Low Energy operating mode, which provides a dramatic reduction in the power consumption of the Bluetooth radio and baseband. The primary application for this mode is to provide support for low data rate devices, such as sensors and remote controls.

---

## Link Control Layer

The link control layer is part of the Bluetooth link control functions that are implemented in dedicated logic in the link control unit (LCU). This layer consists of the command controller that takes commands from the software, and other controllers that are activated or configured by the command controller, to perform the link control tasks. Each task performs a different state in the Bluetooth Link Controller.

- Major states:
  - Standby
  - Connection
- Substates:
  - Page
  - Page Scan
  - Inquiry
  - Inquiry Scan
  - Sniff

---

## Test Mode Support

The BCM4330 fully supports Bluetooth Test mode as described in Part I:1 of the *Specification of the Bluetooth System Version 3.0*. This includes the transmitter tests, normal and delayed loopback tests, and reduced hopping sequence.

In addition to the standard Bluetooth Test Mode, the BCM4330 also supports enhanced testing features to simplify RF debugging and qualification and type-approval testing. These features include:

- Fixed frequency carrier wave (unmodulated) transmission
  - Simplifies some type-approval measurements (Japan)
  - Aids in transmitter performance analysis
- Fixed frequency constant receiver mode
  - Receiver output directed to I/O pin
  - Allows for direct BER measurements using standard RF test equipment
  - Facilitates spurious emissions testing for receive mode
- Fixed frequency constant transmission
  - Eight-bit fixed pattern or PRBS-9
  - Enables modulated signal measurements with standard RF test equipment

---

## Bluetooth Power Management Unit

The Bluetooth Power Management Unit (PMU) provides power management features that can be invoked by either software through power management registers or packet handling in the baseband core. The power management functions provided by the BCM4330 are:

- [RF Power Management](#)
- [Host Controller Power Management](#)
- [BBC Power Management](#)
- [FM Power Management](#)

### RF Power Management

The BBC generates power-down control signals for the transmit path, receive path, PLL, and power amplifier to the 2.4 GHz transceiver. The transceiver then processes the power-down functions accordingly.

CONFIDENTIAL FOR BROADCOM

## Host Controller Power Management

When running in UART mode, the BCM4330 may be configured so that dedicated signals are used for power management hand-shaking between the BCM4330 and the host. The basic power saving functions supported by those hand-shaking signals include the standard Bluetooth defined power savings modes and standby modes of operation.

Table 4 describes the power-control hand-shake signals used with the UART interface.


**Table 4: Power Control Pin Descriptions**

| Signal         | Mapped to Pin  | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------|----------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| BT_WAKE        | BT_GPIO_0      | I    | <p>Bluetooth device wake-up: Signal from the host to the BCM4330 indicating that the host requires attention.</p> <ul style="list-style-type: none"> <li>Asserted: Bluetooth device must wake-up or remain awake.</li> <li>Deasserted: Bluetooth device may sleep when sleep criteria are met.</li> </ul> <p>The polarity of this signal is software configurable and can be asserted high or low.</p>                                         |
| HOST_WAKE      | BT_GPIO_1      | O    | <p>Host wake up. Signal from the BCM4330 to the host indicating that the BCM4330 requires attention.</p> <ul style="list-style-type: none"> <li>Asserted: host device must wake-up or remain awake.</li> <li>Deasserted: host device may sleep when sleep criteria are met.</li> </ul> <p>The polarity of this signal is software configurable and can be asserted high or low.</p>                                                            |
| BT_CLK_REQ_OUT | BT_CLK_REQ_OUT | O    | <p>Reference clock request output signal for WLAN/BT. Leave this pin as a no connect when using a dedicated crystal. For clock sharing with a TCXO, the signal is active-high by default when BCM4330 is requesting the reference clock. The signal goes low when the reference clock is not needed (that is, in sleep mode). Provide an external 100 k<math>\Omega</math> pull-down to this pin to prevent it from floating during reset.</p> |

**Note:** Pad function Control Register is set to 0 for these pins. See [Table 21: "GPIO Multiplexing Matrix," on page 115](#) for details.



**Note:** Successful operation of the power management hand-shaking signals requires coordination between the BCM4330 firmware and the host software (see [Figure 8](#)).

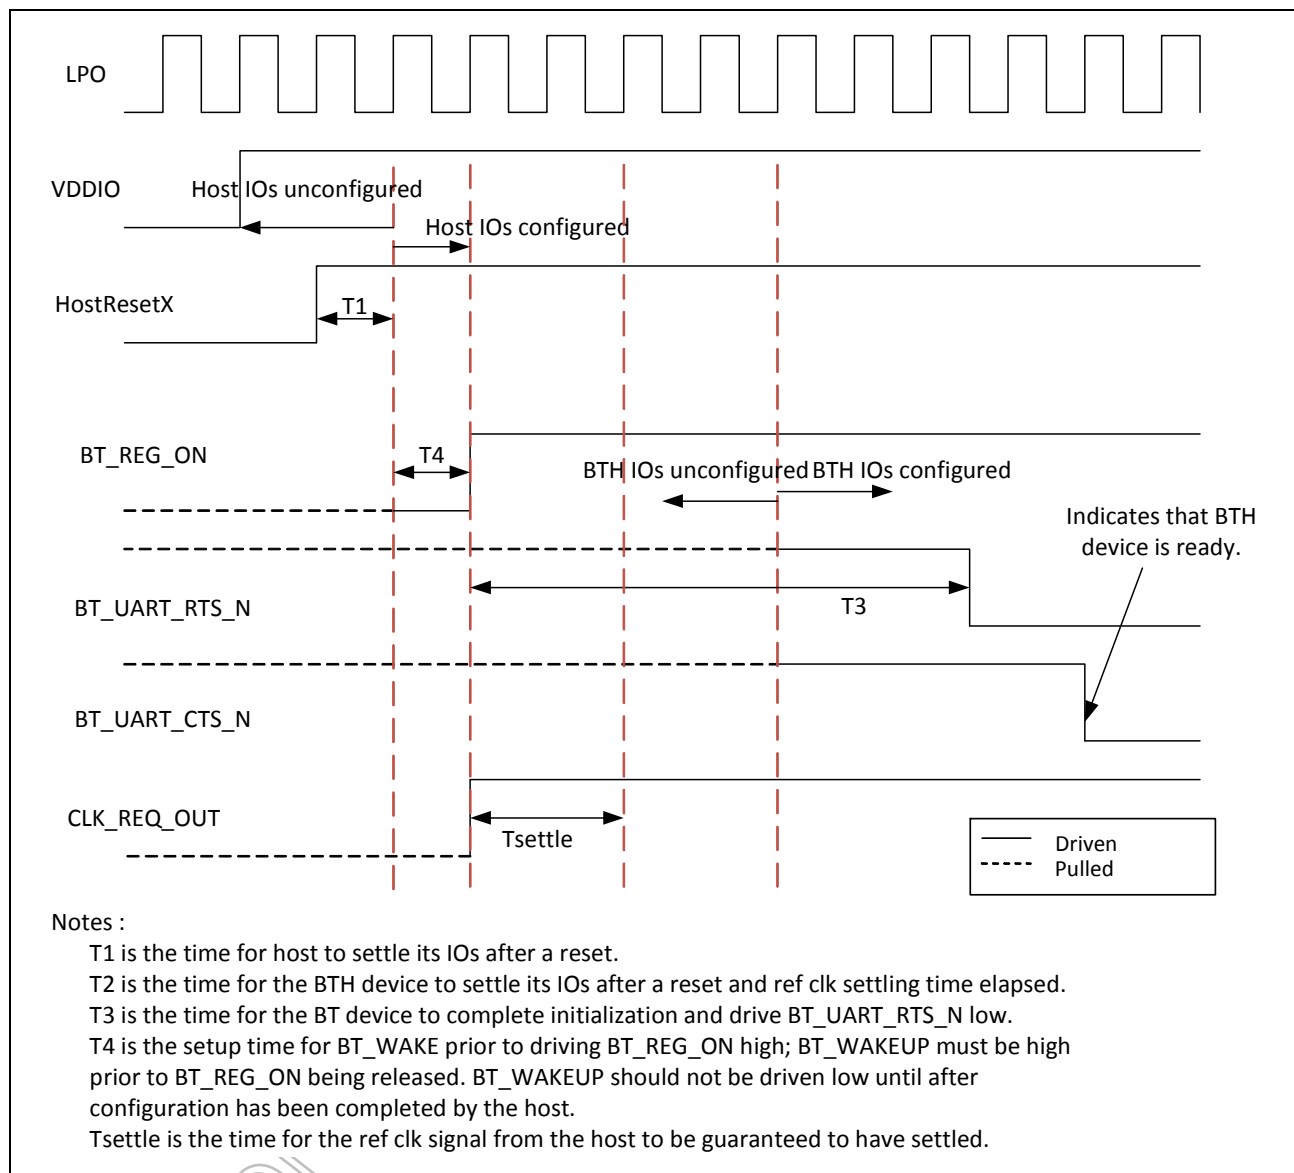

**Figure 8: Startup Signaling Sequence**

## BBC Power Management

The following are low-power operations for the BBC:

- Physical layer packet-handling turns the RF on and off dynamically within transmit/receive packets.
- Bluetooth-specified low-power connection modes: sniff, hold, and park. While in these modes, the BCM4330 runs on the low-power oscillator and wakes up after a predefined time period.
- A low-power shutdown feature allows the device to be turned off while the host and any other devices in the system remain operational. When the BCM4330 is not needed in the system, the RF and core supplies are shut down while the I/O remains powered. This allows the BCM4330 to effectively be off while keeping the I/O pins powered so they do not draw extra current from any other devices connected to the I/O.

During the low-power shut-down state, provided VDDIO remains applied to the BCM4330, all outputs are tri-stated, and most input signals are disabled. Input voltages must remain within the limits defined for normal operation. This is done to prevent current paths or create loading on any digital signals in the system and enables the BCM4330 to be fully integrated in an embedded device to take full advantage of the lowest power-saving modes.

Two BCM4330 input signals are designed to be high-impedance inputs that do not load the driving signal even if the chip does not have VDDIO power supplied to it: the frequency reference input (WRF\_TCXO\_IN) and the 32.768 kHz input (LPO). When the BCM4330 is powered on from this state, it is the same as a normal power-up, and the device does not contain any information about its state from the time before it was powered down.

## FM Power Management

The BCM4330 FM subsystem can operate independently of, or in tandem with, the Bluetooth RF and BBC subsystems. The FM subsystem power management scheme operates in conjunction with the Bluetooth RF and BBC subsystems. The FM block does not have a low power state, it is either on or off.

## Low-Power Scan

The BCM4330 has an optional low-power scan mode that replaces conventional page/inquiry scans with a proprietary scan scheme. When this mode is activated, it significantly reduces current consumption for page and inquiry scans. The mode will switch to conventional scans if energy in page/inquiry channels with an appropriate activation pattern is detected.

## Wideband Speech


The BCM4330 provides support for wideband speech (WBS) using on-chip Smart Audio technology. The BCM4330 can perform subband-codec (SBC), as well as mSBC, encoding and decoding of linear 16 bits at 16 kHz (256 kbps rate) transferred over the PCM bus.

## Packet Loss Concealment


Packet Loss Concealment (PLC) improves apparent audio quality for systems with marginal link performance. Bluetooth messages are sent in packets. When a packet is lost, it creates a gap in the received audio bit-stream. Packet loss can be mitigated in several ways:

- Fill in zeros.
- Ramp down the output audio signal toward zero (this is the method used in current Bluetooth headsets).
- Repeat the last frame (or packet) of the received bit-stream and decode it as usual (frame repeat).

These techniques cause distortion and popping in the audio stream. The BCM4330 uses a proprietary waveform extension algorithm to provide dramatic improvement in the audio quality. [Figure 9](#) and [Figure 10](#) show audio waveforms with and without Packet Loss Concealment. Broadcom PLC/BEC algorithms also support wide band speech.

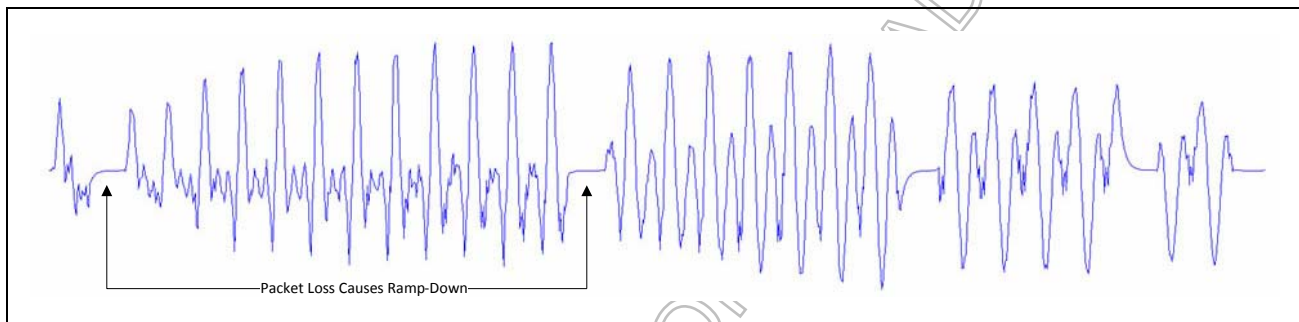

**Figure 9: CVSD Decoder Output Waveform Without PLC**

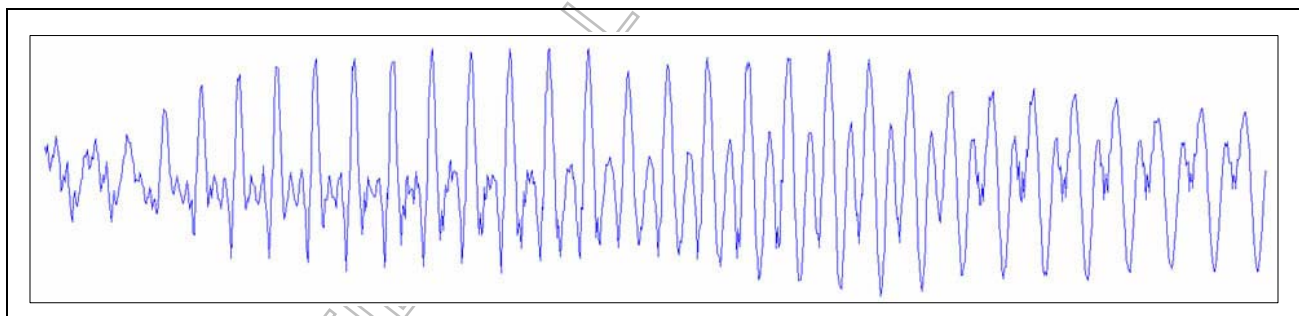

**Figure 10: CVSD Decoder Output Waveform After Applying PLC**

## Audio Rate-Matching Algorithms

The BCM4330 has an enhanced rate-matching algorithm that uses interpolation algorithms to reduce audio stream jitter that may be present when the rate of audio data coming from the host is not the same as the Bluetooth or FM audio data rates.

## Codec Encoding

The BCM4330 can support SBC and mSBC encoding and decoding for wideband speech.

## Multiple Simultaneous A2DP Audio Stream

The BCM4330 has the ability to take a single audio stream and output it to multiple Bluetooth devices simultaneously. This allows a user to share his or her music (or any audio stream) with a friend.

## FM Over Bluetooth

FM Over Bluetooth enables the BCM4330 to stream data from FM over Bluetooth without requiring the host to be awake. This can significantly extend battery life for usage cases where someone is listening to FM radio on a Bluetooth headset.

## Burst Buffer Operation

The BCM4330 has a data buffer that can buffer data being sent over the HCI and audio transports, then send the data at an increased rate. This mode of operation allows the host to sleep for the maximum amount of time, dramatically reducing system current consumption.

---

## Adaptive Frequency Hopping

The BCM4330 gathers link quality statistics on a channel by channel basis to facilitate channel assessment and channel map selection. The link quality is determined using both RF and baseband signal processing to provide a more accurate frequency-hop map.

---

## Advanced Bluetooth/WLAN Coexistence

The BCM4330 includes advanced coexistence technologies that are only possible with a Bluetooth/WLAN integrated die solution. These coexistence technologies are targeted at small form-factor platforms, such as cell phones and media players, including applications such as VoWLAN + SCO and Video-over-WLAN + High Fidelity BT Stereo.

Support is provided for platforms that share a single antenna between Bluetooth and 802.11g. Dual-antenna applications are also supported. The BCM4330 radio architecture allows for lossless simultaneous Bluetooth and WLAN reception for shared antenna applications. This is possible only via an integrated solution (shared LNA and joint AGC algorithm). It has superior performance versus implementations that need to arbitrate between Bluetooth and WLAN reception.

The BCM4330 integrated solution enables MAC-layer signaling (firmware) and a greater degree of sharing via an enhanced coexistence interface. Information is exchanged between the Bluetooth and WLAN cores without host processor involvement.

The BCM4330 also supports Transmit Power Control on the STA together with standard Bluetooth TPC to limit mutual interference and receiver desensitization. Preemption mechanisms are utilized to prevent AP transmissions from colliding with Bluetooth frames. Improved channel classification techniques have been implemented in Bluetooth for faster and more accurate detection and elimination of interferers (including non-WLAN 2.4 GHz interference).

The Bluetooth AFH classification is also enhanced by the WLAN core's channel information.

---

## Fast Connection (Interlaced Page and Inquiry Scans)

The BCM4330 supports page scan and inquiry scan modes that significantly reduce the average inquiry response and connection times. These scanning modes are compatible with the Bluetooth version 2.1 page and inquiry procedures.

## Section 6: Music and Audio

The BCM4330 provides superior total system current during music or audio playback and recording. To enable these functions, several features of the device are combined to provide superior system power consumption.

### MP3 Encoder

- ISO/IEC 11172-3 compliant
- Supports 32 kHz sampling frequencies only
- Encodes mono and stereo signals

### MP3 Decoder

The MP3 decoder supports mono and stereo audio recording with the following specifications:

- Supports MPEG-1 Layer 3 decoding
- Output is fully bit compliant with MPEG-1 standard specification
- Supports sampling frequencies from 32 kHz to 48 kHz
- Minimum bit-rate supported 32 Kbps and maximum bit-rate supported 320 Kbps for Layer 3

### AAC/AAC+ Decoder

Compliant to ISO/IEC 14496-3: 2004 specifications:

- MPEG-2, MPEG-4 AAC LC decoding up to level 2
- SBR tool, up to level 3
- Low power SBR tool
- Full support up to level 3 for the HE AAC profile
- Implicit and explicit SBR signaling mechanisms
- Mono and stereo channel streams decoding sampling frequencies from 8 kHz to 96 kHz only
- ADTS frame decoding

## Section 7: Microprocessor and Memory Unit for Bluetooth

The Bluetooth microprocessor core is based on the ARM® Cortex™-M3 32-bit RISC processor with embedded ICE-RT debug and JTAG interface units. It runs software from the link control (LC) layer, up to the host controller interface (HCI).

The ARM core is paired with a memory unit that contains 560 KB of ROM memory for program storage and boot ROM, 152 KB of RAM for data scratchpad and patch RAM code. The internal ROM allows for flexibility during power-on reset to enable the same device to be used in various configurations. At power-up, the lower-layer protocol stack is executed from the internal ROM memory.

External patches may be applied to the ROM-based firmware to provide flexibility for bug fixes or features additions. These patches may be downloaded from the host to the BCM4330 through the UART transports. The mechanism for downloading via UART is identical to the proven interface of the BCM4329 device.

---

### RAM, ROM, and Patch Memory

The BCM4330 Bluetooth core has 152 KB of internal RAM which is mapped between general purpose scratch pad memory and patch memory and 560 KB of ROM used for the lower-layer protocol stack, test mode software, and boot ROM. The patch memory capability enables the addition of code changes for purposes of feature additions and bug fixes to the ROM memory.

---

### Reset

The BCM4330 has an integrated power-on reset circuit that resets all circuits to a known power-on state. The reset can also be driven by an active-low, external reset signal, BT\_RST\_N, that can be used to externally control the device, forcing it into a power-on reset state. (Note that the BT\_RST\_N signal is independent of the POR reset.)

## Section 8: Bluetooth Peripheral Transport Unit

### PCM Interface

The BCM4330 supports two independent PCM interfaces that share the pins with the I<sup>2</sup>S interfaces. The PCM Interface on the BCM4330 can connect to linear PCM Codec devices in master or slave mode. In master mode, the BCM4330 generates the PCM\_CLK and PCM\_SYNC signals, and in slave mode, these signals are provided by another master on the PCM interface and are inputs to the BCM4330.

The configuration of the PCM interface may be adjusted by the host through the use of vendor-specific HCI commands.

### Slot Mapping

The BCM4330 supports up to three simultaneous full-duplex SCO or eSCO channels through the PCM interface. These three channels are time-multiplexed onto the single PCM interface by using a time-slotting scheme where the 8 kHz or 16 kHz audio sample interval is divided into as many as 16 slots. The number of slots is dependent on the selected interface rate of 128 kHz, 512 kHz, or 1024 kHz. The corresponding number of slots for these interface rate is 1, 2, 4, 8, and 16, respectively. Transmit and receive PCM data from an SCO channel is always mapped to the same slot. The PCM data output driver tri-states its output on unused slots to allow other devices to share the same PCM interface signals. The data output driver tri-states its output after the falling edge of the PCM clock during the last bit of the slot.

### Frame Synchronization

The BCM4330 supports both short- and long-frame synchronization in both master and slave modes. In short-frame synchronization mode, the frame synchronization signal is an active-high pulse at the audio frame rate that is a single-bit period in width and is synchronized to the rising edge of the bit clock. The PCM slave looks for a high on the falling edge of the bit clock and expects the first bit of the first slot to start at the next rising edge of the clock. In long-frame synchronization mode, the frame synchronization signal is again an active-high pulse at the audio frame rate; however, the duration is three bit periods and the pulse starts coincident with the first bit of the first slot.

### Data Formatting

The BCM4330 may be configured to generate and accept several different data formats. For conventional narrowband speech mode, the BCM4330 uses 13 of the 16 bits in each PCM frame. The location and order of these 13 bits can be configured to support various data formats on the PCM interface. The remaining three bits are ignored on the input and may be filled with 0s, 1s, a sign bit, or a programmed value on the output. The default format is 13-bit 2's complement data, left justified, and clocked MSB first.

## Wideband Speech Support

When the host encodes Wideband Speech (WBS) packets in transparent mode, the encoded packets are transferred over the PCM bus for an eSCO voice connection. In this mode, the PCM bus is typically configured in master mode for a 4 kHz sync rate with 16-bit samples, resulting in a 64 kbps bit rate. The BCM4330 also supports slave transparent mode using a proprietary rate-matching scheme. In SBC-code mode, linear 16-bit data at 16 kHz (256 kbps rate) is transferred over the PCM bus.

## Multiplexed Bluetooth and FM Over PCM

In this mode of operation, the BCM4330 multiplexes both FM and Bluetooth audio PCM channels over the same interface, reducing the number of required I/Os. This mode of operation is initiated through an HCI command from the host. The format of the data stream consists of three channels: a Bluetooth channel followed by two FM channels (audio left and right). In this mode of operation, the bus data rate only supports 48 kHz operation per channel with 16 bits sent for each channel. This is done to allow the low data rate Bluetooth data to coexist in the same interface as the higher speed I<sup>2</sup>S data. To accomplish this, the Bluetooth data is repeated six times for 8 kHz data and three times for 16 kHz data. An initial sync pulse on the PCM\_SYNC line is used to indicate the beginning of the frame.

To support multiple Bluetooth audio streams within the Bluetooth channel, both 16 kHz and 8 kHz streams can be multiplexed. This mode of operation is only supported when the Bluetooth host is the master. Figure 11 shows the operation of the multiplexed transport with three simultaneous SCO connections. To accommodate additional SCO channels, the transport clock speed is increased. To change between modes of operation, the transport must be halted and restarted in the new configuration.

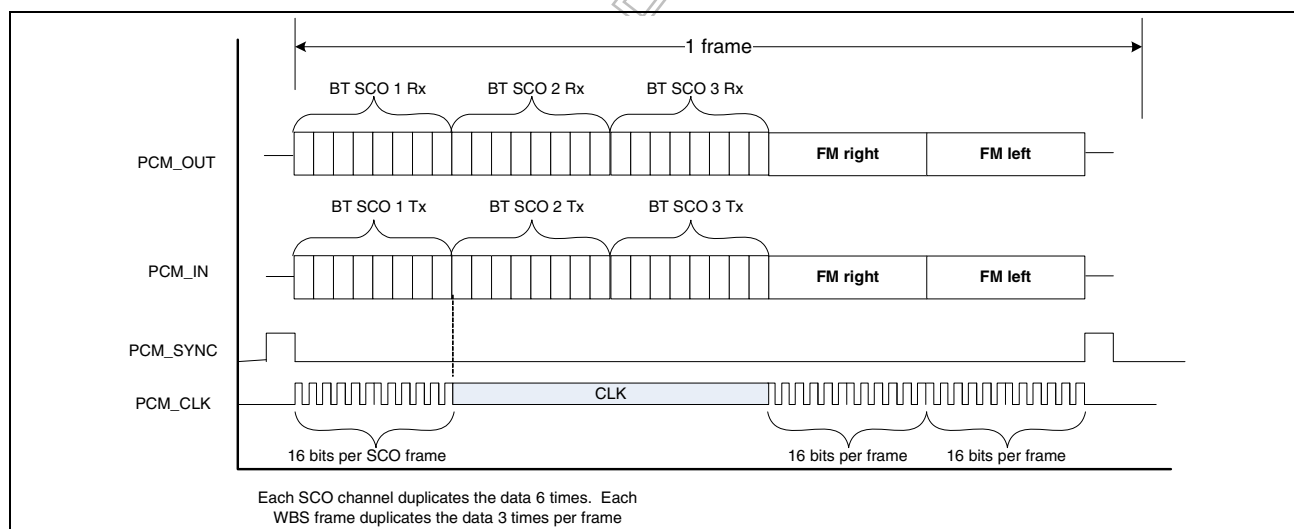


Figure 11: Functional Multiplex Data Diagram

## Burst PCM Mode

In this mode of operation, the PCM bus runs at a significantly higher rate of operation to allow the host to duty cycle its operation and save current. In this mode of operation, the PCM bus can operate at a rate of up to 24 MHz. This mode of operation is initiated with an HCI command from the host.

## PCM Interface Timing

### Short Frame Sync, Master Mode


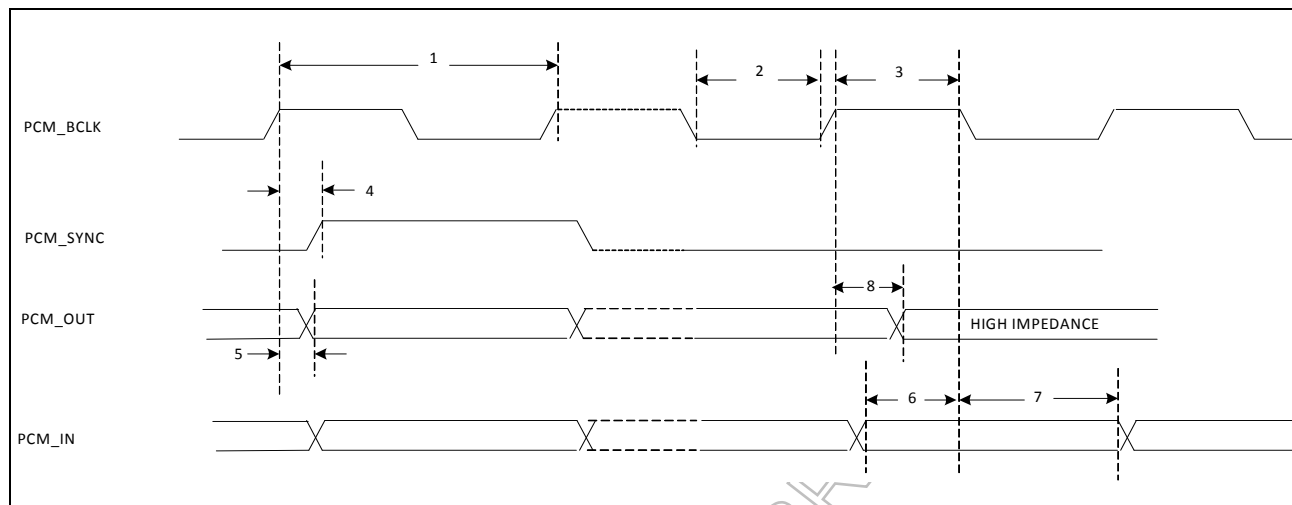


Figure 12: PCM Timing Diagram (Short Frame Sync, Master Mode)

Table 5: PCM Interface Timing Specifications (Short Frame Sync, Master Mode)

| Ref No. | Characteristics                                                                              | Minimum | Typical | Maximum | Unit |
|---------|----------------------------------------------------------------------------------------------|---------|---------|---------|------|
| 1       | PCM bit clock frequency                                                                      | —       | —       | 12      | MHz  |
| 2       | PCM bit clock HIGH                                                                           | 41      | —       | —       | ns   |
| 3       | PCM bit clock LOW                                                                            | 41      | —       | —       | ns   |
| 4       | PCM_SYNC delay                                                                               | 0       | —       | 25      | ns   |
| 5       | PCM_OUT delay                                                                                | 0       | —       | 25      | ns   |
| 6       | PCM_IN setup                                                                                 | 8       | —       | —       | ns   |
| 7       | PCM_IN hold                                                                                  | 8       | —       | —       | ns   |
| 8       | Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance | 0       | —       | 25      | ns   |

## Short Frame Sync, Slave Mode

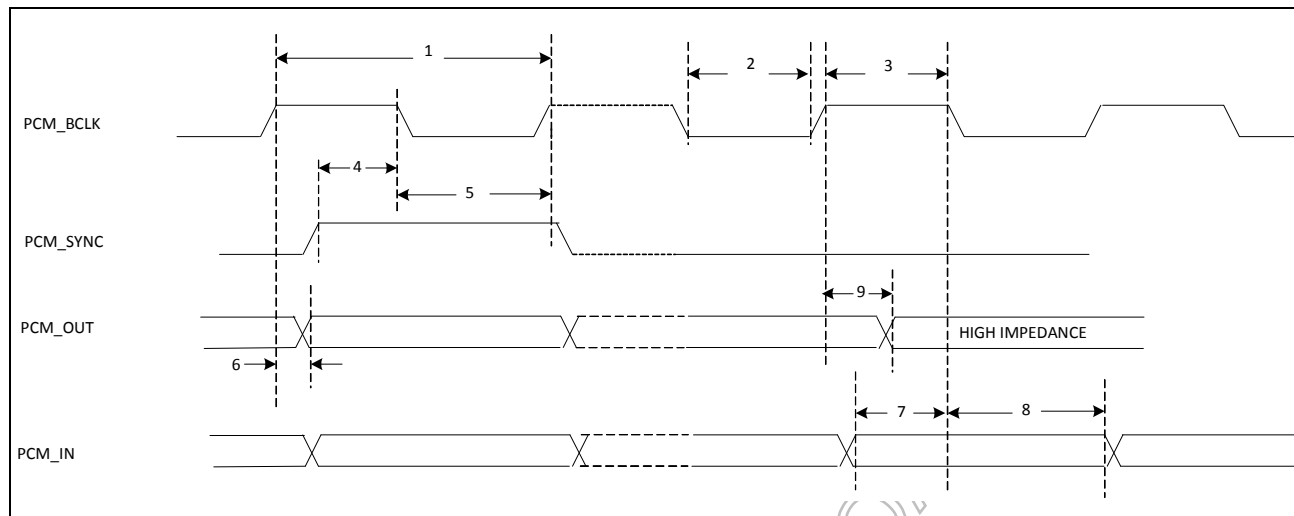

**Figure 13: PCM Timing Diagram (Short Frame Sync, Slave Mode)**

**Table 6: PCM Interface Timing Specifications (Short Frame Sync, Slave Mode)**

| Ref No. | Characteristics                                                                              | Minimum | Typical | Maximum | Unit |
|---------|----------------------------------------------------------------------------------------------|---------|---------|---------|------|
| 1       | PCM bit clock frequency                                                                      | —       | —       | 12      | MHz  |
| 2       | PCM bit clock HIGH                                                                           | 41      | —       | —       | ns   |
| 3       | PCM bit clock LOW                                                                            | 41      | —       | —       | ns   |
| 4       | PCM_SYNC setup                                                                               | 8       | —       | —       | ns   |
| 5       | PCM_SYNC hold                                                                                | 8       | —       | —       | ns   |
| 6       | PCM_OUT delay                                                                                | 0       | —       | 25      | ns   |
| 7       | PCM_IN setup                                                                                 | 8       | —       | —       | ns   |
| 8       | PCM_IN hold                                                                                  | 8       | —       | —       | ns   |
| 9       | Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance | 0       | —       | 25      | ns   |

## Long Frame Sync, Master Mode


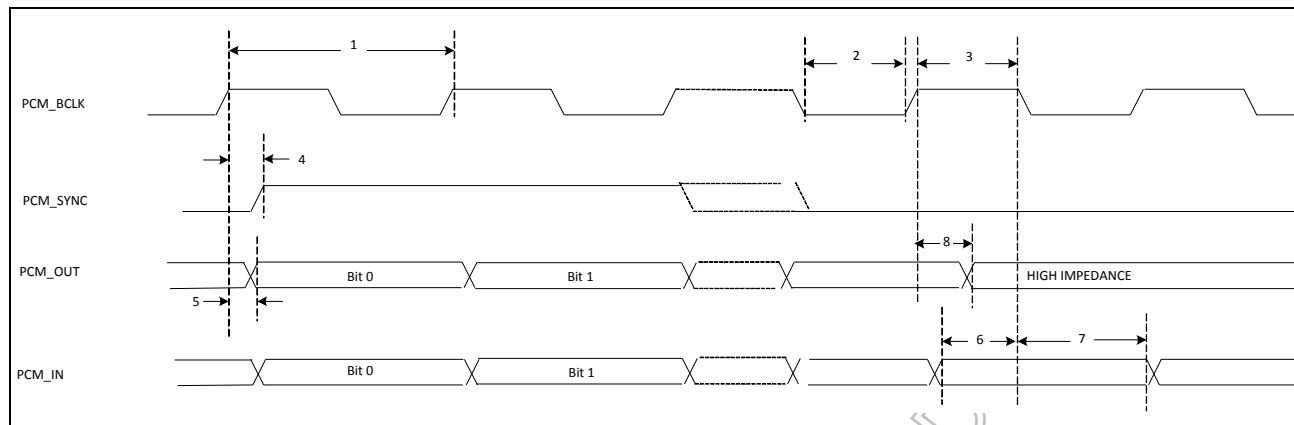


Figure 14: PCM Timing Diagram (Long Frame Sync, Master Mode)

Table 7: PCM Interface Timing Specifications (Long Frame Sync, Master Mode)

| Ref No. | Characteristics                                                                              | Minimum | Typical | Maximum | Unit |
|---------|----------------------------------------------------------------------------------------------|---------|---------|---------|------|
| 1       | PCM bit clock frequency                                                                      | —       | —       | 12      | MHz  |
| 2       | PCM bit clock HIGH                                                                           | 41      | —       | —       | ns   |
| 3       | PCM bit clock LOW                                                                            | 41      | —       | —       | ns   |
| 4       | PCM_SYNC delay                                                                               | 0       | —       | 25      | ns   |
| 5       | PCM_OUT delay                                                                                | 0       | —       | 25      | ns   |
| 6       | PCM_IN setup                                                                                 | 8       | —       | —       | ns   |
| 7       | PCM_IN hold                                                                                  | 8       | —       | —       | ns   |
| 8       | Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance | 0       | —       | 25      | ns   |

## Long Frame Sync, Slave Mode

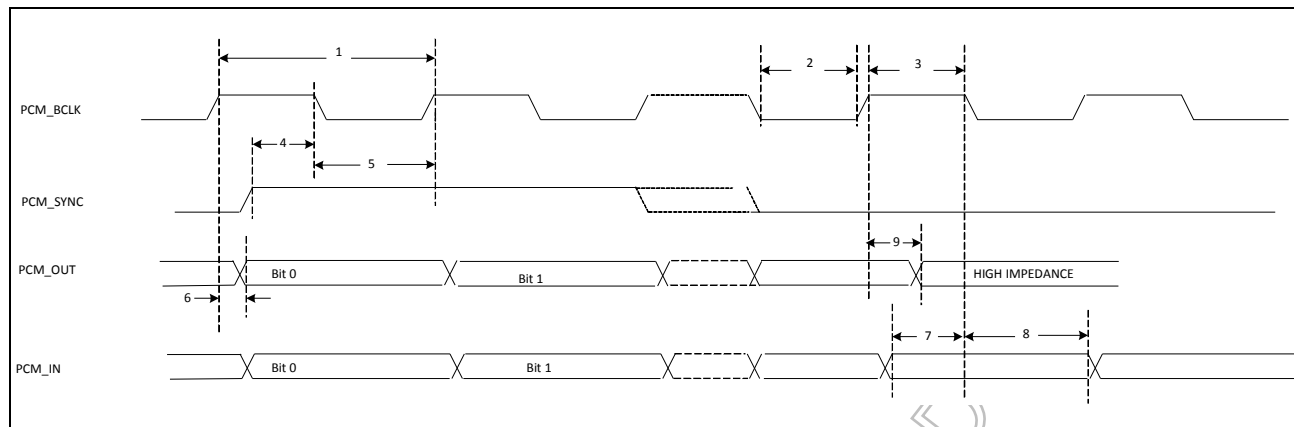

**Figure 15: PCM Timing Diagram (Long Frame Sync, Slave Mode)**

**Table 8: PCM Interface Timing Specifications (Long Frame Sync, Slave Mode)**

| Ref No. | Characteristics                                                                              | Minimum | Typical | Maximum | Unit |
|---------|----------------------------------------------------------------------------------------------|---------|---------|---------|------|
| 1       | PCM bit clock frequency                                                                      | —       | —       | 12      | MHz  |
| 2       | PCM bit clock HIGH                                                                           | 41      | —       | —       | ns   |
| 3       | PCM bit clock LOW                                                                            | 41      | —       | —       | ns   |
| 4       | PCM_SYNC setup                                                                               | 8       | —       | —       | ns   |
| 5       | PCM_SYNC hold                                                                                | 8       | —       | —       | ns   |
| 6       | PCM_OUT delay                                                                                | 0       | —       | 25      | ns   |
| 7       | PCM_IN setup                                                                                 | 8       | —       | —       | ns   |
| 8       | PCM_IN hold                                                                                  | 8       | —       | —       | ns   |
| 9       | Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance | 0       | —       | 25      | ns   |

## Short Frame Sync, Burst Mode

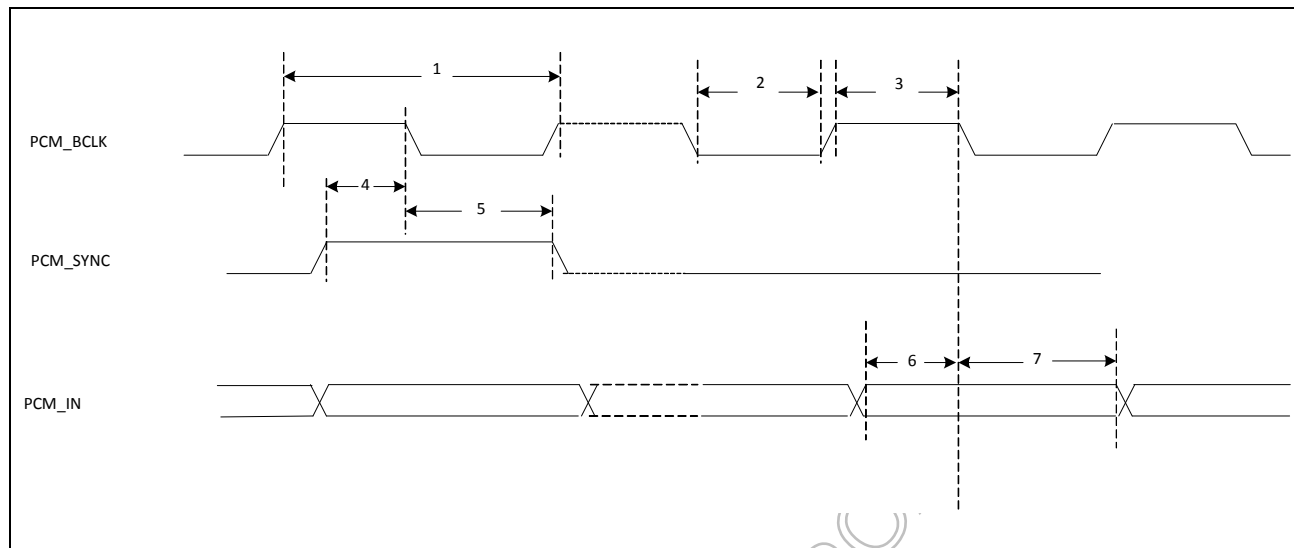


Figure 16: PCM Burst Mode Timing (Receive Only, Short Frame Sync)

Table 9: PCM Burst Mode (Receive Only, Short Frame Sync)

| Ref No. | Characteristics         | Minimum | Typical | Maximum | Unit |
|---------|-------------------------|---------|---------|---------|------|
| 1       | PCM bit clock frequency | —       | —       | 24      | MHz  |
| 2       | PCM bit clock HIGH      | 20.8    | —       | —       | ns   |
| 3       | PCM bit clock LOW       | 20.8    | —       | —       | ns   |
| 4       | PCM_SYNC setup          | 8       | —       | —       | ns   |
| 5       | PCM_SYNC hold           | 8       | —       | —       | ns   |
| 6       | PCM_IN setup            | 8       | —       | —       | ns   |
| 7       | PCM_IN hold             | 8       | —       | —       | ns   |

## Long Frame Sync, Burst Mode

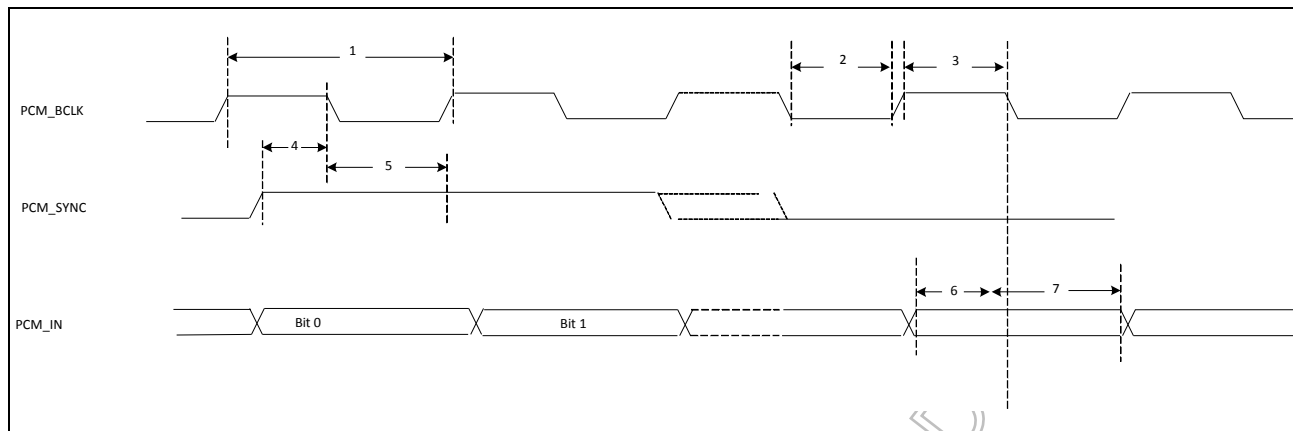


Figure 17: PCM Burst Mode Timing (Receive Only, Long Frame Sync)

Table 10: PCM Burst Mode (Receive Only, Long Frame Sync)

| Ref No. | Characteristics         | Minimum | Typical | Maximum | Unit |
|---------|-------------------------|---------|---------|---------|------|
| 1       | PCM bit clock frequency | —       | —       | 24      | MHz  |
| 2       | PCM bit clock HIGH      | 20.8    | —       | —       | ns   |
| 3       | PCM bit clock LOW       | 20.8    | —       | —       | ns   |
| 4       | PCM_SYNC setup          | 8       | —       | —       | ns   |
| 5       | PCM_SYNC hold           | 8       | —       | —       | ns   |
| 6       | PCM_IN setup            | 8       | —       | —       | ns   |
| 7       | PCM_IN hold             | 8       | —       | —       | ns   |

## UART Interface

The BCM4330 shares a single UART for Bluetooth and FM. The UART is a standard 4-wire interface (RX, TX, RTS, and CTS) with adjustable baud rates from 9600 bps to 4.0 Mbps. The interface features an automatic baud rate detection capability that returns a baud rate selection. Alternatively, the baud rate may be selected through a vendor-specific UART HCI command.

UART has a 1040-byte receive FIFO and a 1040-byte transmit FIFO to support EDR. Access to the FIFOs is conducted through the AHB interface through either DMA or the CPU. The UART supports the Bluetooth 4.0 UART HCI specification: H4, a custom Extended H4, and H5. The default baud rate is 115.2 Kbaud.

The UART supports the 3-wire H5 UART transport, as described in the Bluetooth specification ("Three-wire UART Transport Layer"). Compared to H4, the H5 UART transport reduces the number of signal lines required by eliminating the CTS and RTS signals.

The BCM4330 UART can perform XON/XOFF flow control and includes hardware support for the Serial Line Input Protocol (SLIP). It can also perform wake-on activity. For example, activity on the RX or CTS inputs can wake the chip from a sleep state.

Normally, the UART baud rate is set by a configuration record downloaded after device reset, or by automatic baud rate detection, and the host does not need to adjust the baud rate. Support for changing the baud rate during normal HCI UART operation is included through a vendor-specific command that allows the host to adjust the contents of the baud rate registers. The BCM4330 UARTs operate correctly with the host UART as long as the combined baud rate error of the two devices is within  $\pm 2\%$ .

**Table 11: Example of Common Baud Rates**

| <b>Desired Rate</b> | <b>Actual Rate</b> | <b>Error (%)</b> |
|---------------------|--------------------|------------------|
| 4000000             | 4000000            | 0.00             |
| 3692000             | 3692308            | 0.01             |
| 3000000             | 3000000            | 0.00             |
| 2000000             | 2000000            | 0.00             |
| 1500000             | 1500000            | 0.00             |
| 1444444             | 1454544            | 0.70             |
| 921600              | 923077             | 0.16             |
| 460800              | 461538             | 0.16             |
| 230400              | 230796             | 0.17             |
| 115200              | 115385             | 0.16             |
| 57600               | 57692              | 0.16             |
| 38400               | 38400              | 0.00             |
| 28800               | 28846              | 0.16             |
| 19200               | 19200              | 0.00             |
| 14400               | 14423              | 0.16             |
| 9600                | 9600               | 0.00             |

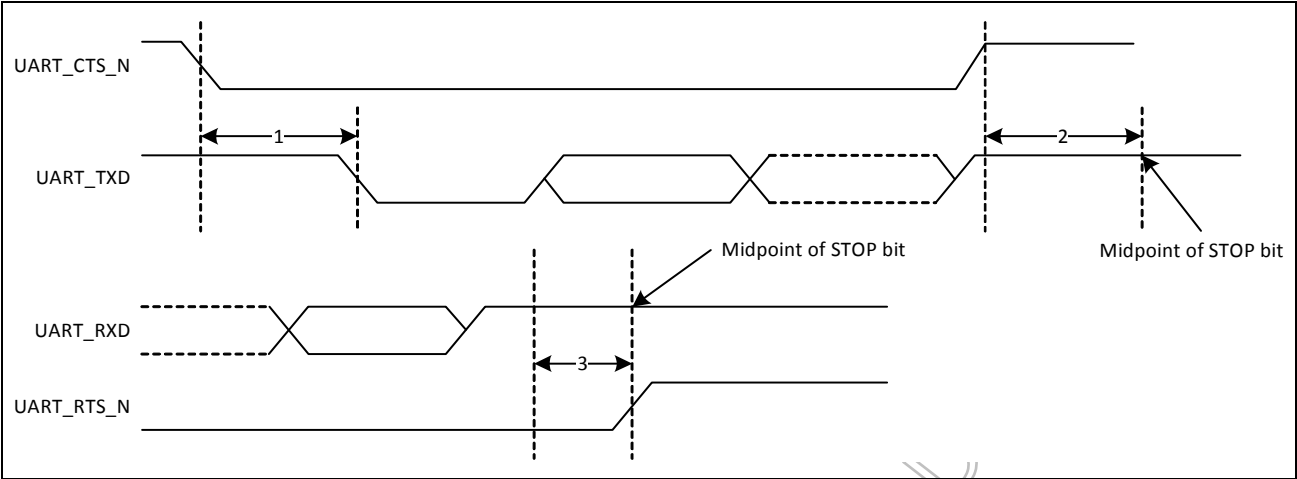


Figure 18: UART Timing

Table 12: UART Timing Specifications

| Ref No. | Characteristics                                         | Minimum | Typical | Maximum | Unit        |
|---------|---------------------------------------------------------|---------|---------|---------|-------------|
| 1       | Delay time, UART_CTS_N low to UART_TXD valid            | —       | —       | 1.5     | Bit periods |
| 2       | Setup time, UART_CTS_N high before midpoint of stop bit | —       | —       | 0.5     | Bit periods |
| 3       | Delay time, midpoint of stop bit to UART_RTS_N high     | —       | —       | 0.5     | Bit periods |

## I<sup>2</sup>S Interface

The BCM4330 supports two independent I<sup>2</sup>S digital audio ports: one for Bluetooth audio, and one for high-fidelity FM audio. The I<sup>2</sup>S interface for FM audio supports both master and slave modes. The I<sup>2</sup>S signals are:

- I<sup>2</sup>S clock: I<sup>2</sup>S SCK
- I<sup>2</sup>S Word Select: I<sup>2</sup>S WS
- I<sup>2</sup>S Data Out: I<sup>2</sup>S SDO
- I<sup>2</sup>S Data In: I<sup>2</sup>S SDI

I<sup>2</sup>S SCK and I<sup>2</sup>S WS become outputs in master mode and inputs in slave mode, while I<sup>2</sup>S SDO always stays as an output. I<sup>2</sup>S data input is used for FM Tx. The channel word length is 16 bits and the data is justified so that the MSB of the left-channel data is aligned with the MSB of the I<sup>2</sup>S bus, per the I<sup>2</sup>S specification. The MSB of each data word is transmitted one bit clock cycle after the I<sup>2</sup>S WS transition, synchronous with the falling edge of bit clock. Left-channel data is transmitted when I<sup>2</sup>S WS is low, and right-channel data is transmitted when I<sup>2</sup>S WS is high. Data bits sent by the BCM4330 are synchronized with the falling edge of I2S\_SCK and should be sampled by the receiver on the rising edge of I2S\_SSCK.

The clock rate in master mode is either of the following:

48 kHz x 32 bits per frame = 1.536 MHz

48 kHz x 50 bits per frame = 2.400 MHz

The master clock is generated from the input reference clock using a N/M clock divider.

In the slave mode, any clock rate is supported to a maximum of 3.072 MHz.

## I<sup>2</sup>S Timing



**Note:** Timing values specified in [Table 13](#) are relative to high and low threshold levels.

**Table 13: Timing for I<sup>2</sup>S Transmitters and Receivers**

|                                                                | Transmitter         |                     |                     |      | Receiver            |                     |             |     | Notes |
|----------------------------------------------------------------|---------------------|---------------------|---------------------|------|---------------------|---------------------|-------------|-----|-------|
|                                                                | Lower Limit         |                     | Upper Limit         |      | Lower Limit         |                     | Upper Limit |     |       |
|                                                                | Min                 | Max                 | Min                 | Max  | Min                 | Max                 | Min         | Max |       |
| Clock Period T                                                 | T <sub>tr</sub>     | —                   | —                   | —    | T <sub>r</sub>      | —                   | —           | —   | 1     |
| <b>Master Mode: Clock generated by transmitter or receiver</b> |                     |                     |                     |      |                     |                     |             |     |       |
| HIGH t <sub>HC</sub>                                           | 0.35T <sub>tr</sub> | —                   | —                   | —    | 0.35T <sub>tr</sub> | —                   | —           | —   | 2     |
| LOW t <sub>LC</sub>                                            | 0.35T <sub>tr</sub> | —                   | —                   | —    | 0.35T <sub>tr</sub> | —                   | —           | —   | 2     |
| <b>Slave Mode: Clock accepted by transmitter or receiver</b>   |                     |                     |                     |      |                     |                     |             |     |       |
| HIGH t <sub>HC</sub>                                           | —                   | 0.35T <sub>tr</sub> | —                   | —    | —                   | 0.35T <sub>tr</sub> | —           | —   | 3     |
| LOW t <sub>LC</sub>                                            | —                   | 0.35T <sub>tr</sub> | —                   | —    | —                   | 0.35T <sub>tr</sub> | —           | —   | 3     |
| Rise time t <sub>RC</sub>                                      | —                   | —                   | 0.15T <sub>tr</sub> | —    | —                   | —                   | —           | —   | 4     |
| <b>Transmitter</b>                                             |                     |                     |                     |      |                     |                     |             |     |       |
| Delay t <sub>dtr</sub>                                         | —                   | —                   | —                   | 0.8T | —                   | —                   | —           | —   | 5     |
| Hold time t <sub>htr</sub>                                     | 0                   | —                   | —                   | —    | —                   | —                   | —           | —   | 4     |
| <b>Receiver</b>                                                |                     |                     |                     |      |                     |                     |             |     |       |
| Setup time t <sub>sr</sub>                                     | —                   | —                   | —                   | —    | —                   | 0.2T <sub>r</sub>   | —           | —   | 6     |
| Hold time t <sub>hr</sub>                                      | —                   | —                   | —                   | —    | —                   | 0                   | —           | —   | 6     |

**Note:**

- The system clock period T must be greater than  $T_{tr}$  and  $T_r$  because both the transmitter and receiver have to be able to handle the data transfer rate.
- At all data rates in master mode, the transmitter or receiver generates a clock signal with a fixed mark/space ratio. For this reason,  $t_{HC}$  and  $t_{LC}$  are specified with respect to T.
- In slave mode, the transmitter and receiver need a clock signal with minimum HIGH and LOW periods so that they can detect the signal. So long as the minimum periods are greater than  $0.35T_r$ , any clock that meets the requirements can be used.
- Because the delay ( $t_{dtr}$ ) and the maximum transmitter speed (defined by  $T_{tr}$ ) are related, a fast transmitter driven by a slow clock edge can result in  $t_{dtr}$  not exceeding  $t_{RC}$  which means  $t_{htr}$  becomes zero or negative. Therefore, the transmitter has to guarantee that  $t_{htr}$  is greater than or equal to zero, so long as the clock rise-time  $t_{RC}$  is not more than  $t_{RCmax}$ , where  $t_{RCmax}$  is not less than  $0.15T_{tr}$ .
- To allow data to be clocked out on a falling edge, the delay is specified with respect to the rising edge of the clock signal and T, always giving the receiver sufficient setup time.
- The data setup and hold time must not be less than the specified receiver setup and hold time.



**Note:** The time periods specified in [Figure 19](#) and [Figure 20](#) are defined by the transmitter speed. The receiver specifications must match transmitter performance.

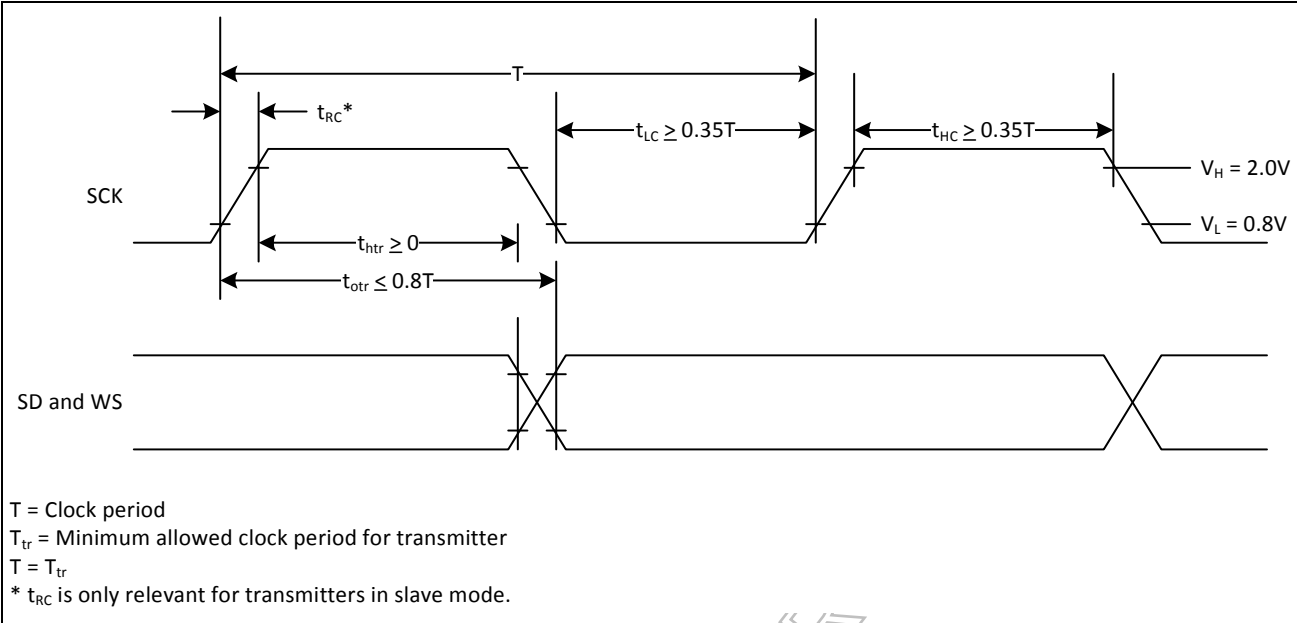


Figure 19: I<sup>2</sup>S Transmitter Timing

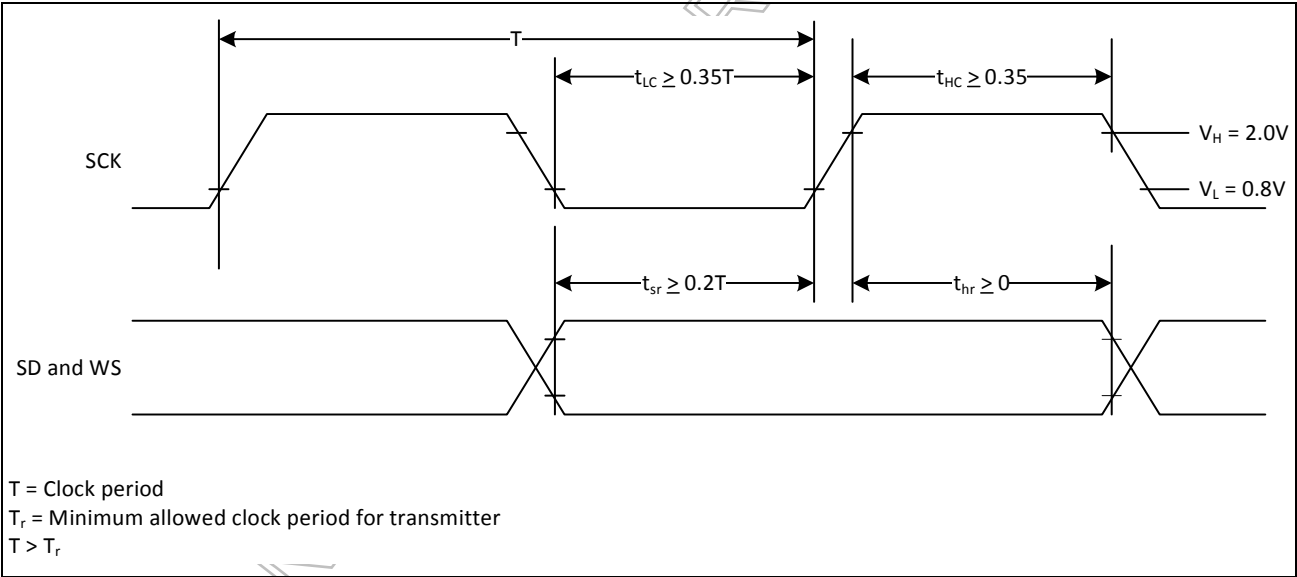


Figure 20: I<sup>2</sup>S Receiver Timing

## Section 9: FM Transceiver Subsystem

### FM Radio

The BCM4330 includes a completely integrated FM radio receiver and transmitter with RDS/RBDS covering all FM bands from 65 MHz to 108 MHz. The transceiver is controlled through commands on the HCI. FM received audio is available as stereo analog output or in digital form through I<sup>2</sup>S or PCM. The FM audio to be transmitted can be delivered via the I<sup>2</sup>S or PCM interface. The FM radio is capable of operating from the 32.768 kHz LPO clock.

### Digital FM Audio Interfaces

The FM audio can be received or transmitted via the shared PCM and I<sup>2</sup>S pins, and the sampling rate is nominally at 48 kHz. The BCM4330 supports a three-wire PCM or I<sup>2</sup>S audio interface in either master or slave configuration. The master or slave configuration is selected using vendor specific commands over the HCI interface. In addition, multiple sampling rates are supported, derived from either the FM or Bluetooth clocks. In master mode, the clock rate is either of the following:

- 48 kHz x 32 bits per frame = 1.536 MHz
- 48 kHz x 50 bits per frame = 2.400 MHz

In slave mode, any clock rate is supported up to a maximum of 3.072 MHz.

### Analog FM Audio Interfaces

The demodulated FM audio signal is available as line-level analog stereo output, generated by twin internal high SNR audio DACs.

### FM Over Bluetooth

The BCM4330 can output received FM audio onto Bluetooth using one of following three links: eSCO, WBS, and A2DP. In all of the above modes, once the link has been set up, the host processor can enter sleep mode while the BCM4330 continues to stream FM audio to the remote Bluetooth device, allowing the system current consumption to be minimized.

---

## eSCO

In this use case, the stereo FM audio is downsampled to 8 kHz and a mono or stereo stream is then sent through the Bluetooth eSCO link to a remote Bluetooth device, typically a headset. Two Bluetooth voice connections must be used to transport stereo.

---

## Wide Band Speech Link

In this case, the stereo FM audio is downsampled to 16 kHz and a mono or stereo stream is then sent through the Bluetooth wideband speech link to a remote Bluetooth device, typically a headset. Two Bluetooth voice connections must be used to transport stereo.

---

## A2DP

In this case, the stereo FM audio is encoded by the on-chip SBC encoder and transported as an A2DP link to a remote Bluetooth device. Sampling rates of 48 kHz, 44.1 kHz, and 32 kHz joint stereo are supported. An A2DP “lite” stack is implemented in the BCM4330 to support this use case, which eliminates the need to route the SBC-encoded audio back to the host to create the A2DP packets.

---

## Dynamic Antenna Switching

The BCM4330 includes a circuit to detect the presence of ground-coupled antenna.

---

## Autotune and Search Algorithms

The BCM4330 supports a number of FM search and tune functions that allows the host to implement many convenient user functions, which are accessed through the Broadcom FM stack.

- **Tune to Play** — Allows the FM receiver to be programmed to a specific frequency.
- **Search for RSSI > Threshold** — Searches for valid FM channels within the band that have signal strength above a specified threshold. This function can be set to search for the next valid channel up or down the band or can be set to search for a list of valid channels across the entire band.
- **Search for RSSI < Threshold** — Searches for empty or under-utilized channels that can be used to transmit FM. Available channels can be identified before suggesting an FM transmit channel to the user. This allows the BCM4330 to determine the best channel for FM transmit operation instead of requiring the user to find an unused channel manually.
- **Search for SNR > Threshold** — Checks the power level of the available channel and the estimated SNR of the channel to help achieve precise control of the expected sound quality for the selected FM channel. Specifically, the host can adjust its SNR requirements to retrieve a signal with a specific sound quality, or adjust this to return the weakest channels.
- **Alternate Frequency Jump** — Allows the FM receiver to automatically jump to an alternate FM channel that carries the same information, but has a better SNR. For example, when traveling, a user may pass through a region where a number of channels carry the same station. When the user passes from one area to the next, the FM receiver can automatically switch to another channel with a stronger signal to spare the user from having to manually change the channel to continue listening to the same station.

---

## Audio Features

A number of features are implemented in the BCM4330 to provide the best possible audio experience for the user.

- **Mono/Stereo Blend or Switch** — The BCM4330 provides automatic control of the stereo or mono settings based on the RSSI and estimated audio SNR. This feature is used to achieve a minimum audio SNR based on the channel conditions. Two modes of operation are supported:
  - **Blend** — In this mode, fine control of stereo separation is used to achieve optimal audio quality over a wide range of input C/N. The amount of separation is fully programmable. In [Figure 21](#), the separation is programmed to maintain a minimum 50 dB SNR across the blend range.
  - **Switch** — In this mode, the audio switches from full stereo to full mono at a predetermined level to maintain optimal audio quality. The stereo-to-mono switch point and the mono-to-stereo switch points are fully programmable to provide the desired amount of audio SNR. In [Figure 22](#), the switch point is programmed to switch to mono to maintain a 40 dB SNR.

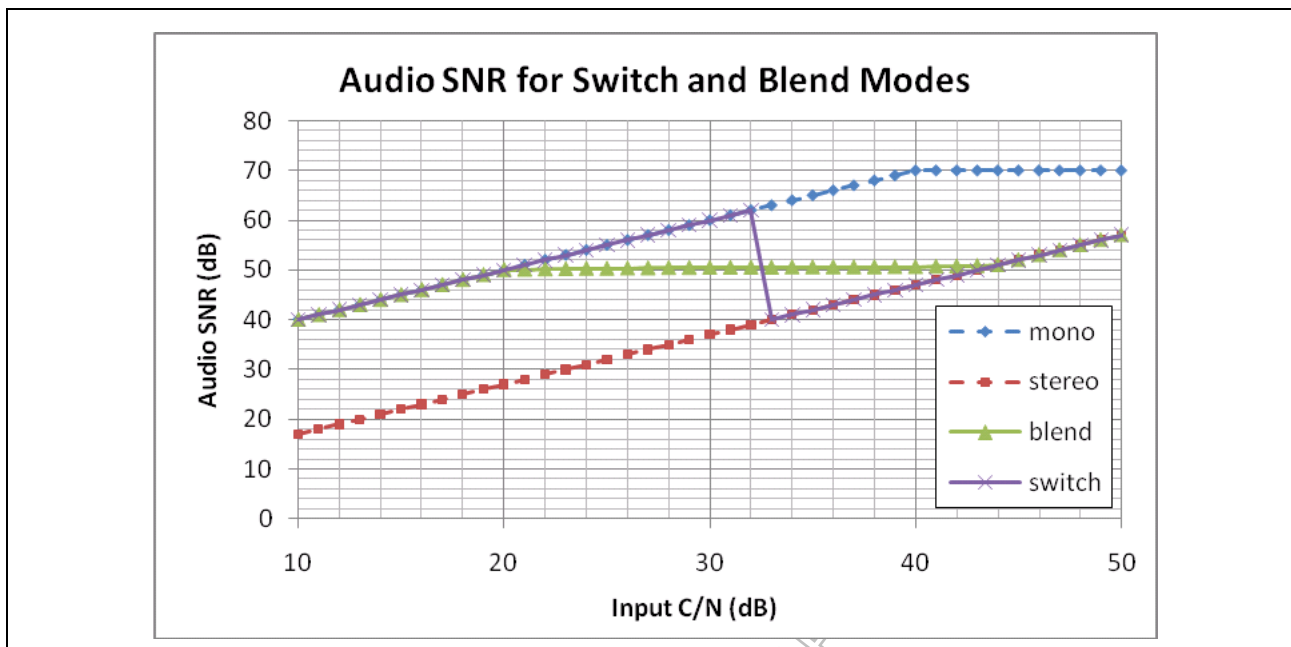


Figure 21: Example Blend/Switch Usage

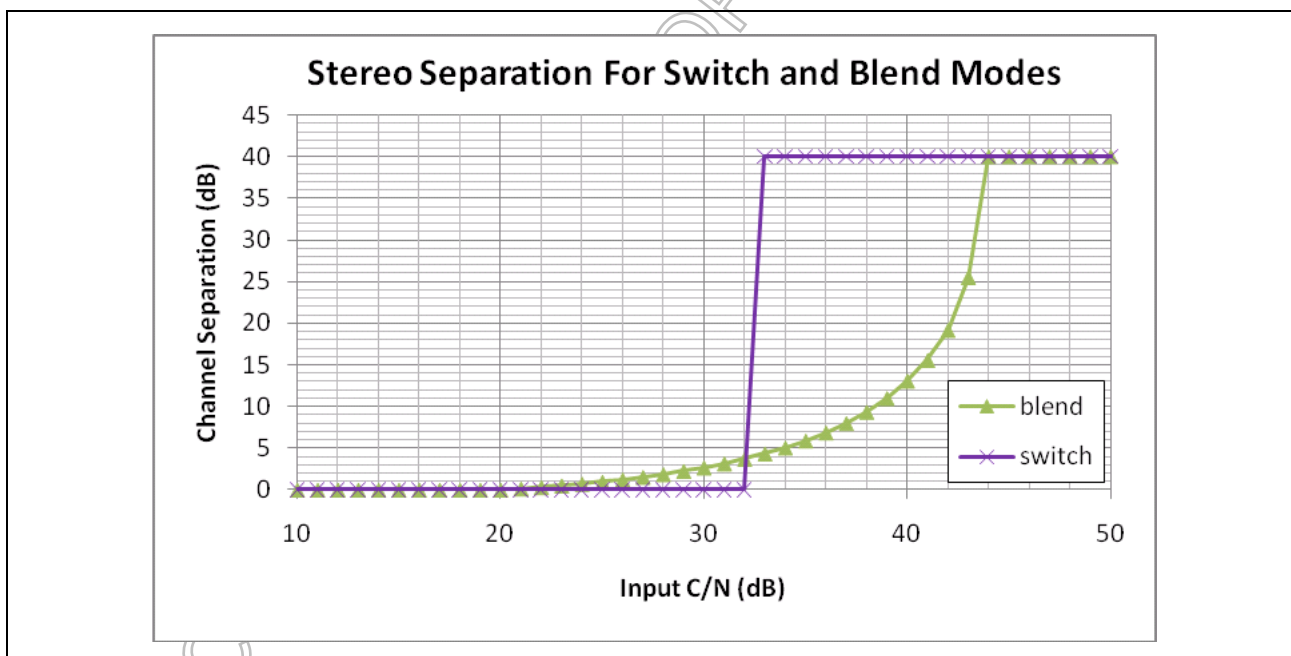


Figure 22: Example Blend/Switch Separation

- **Soft Mute** — Improves the user experience by dynamically muting the output audio proportionate to the FM signal C/N. This prevents the user from being assaulted with a blast of static. The mute characteristic is fully programmable to accommodate fine tuning of the output signal level. An example mute characteristic is shown in [Figure 23](#).

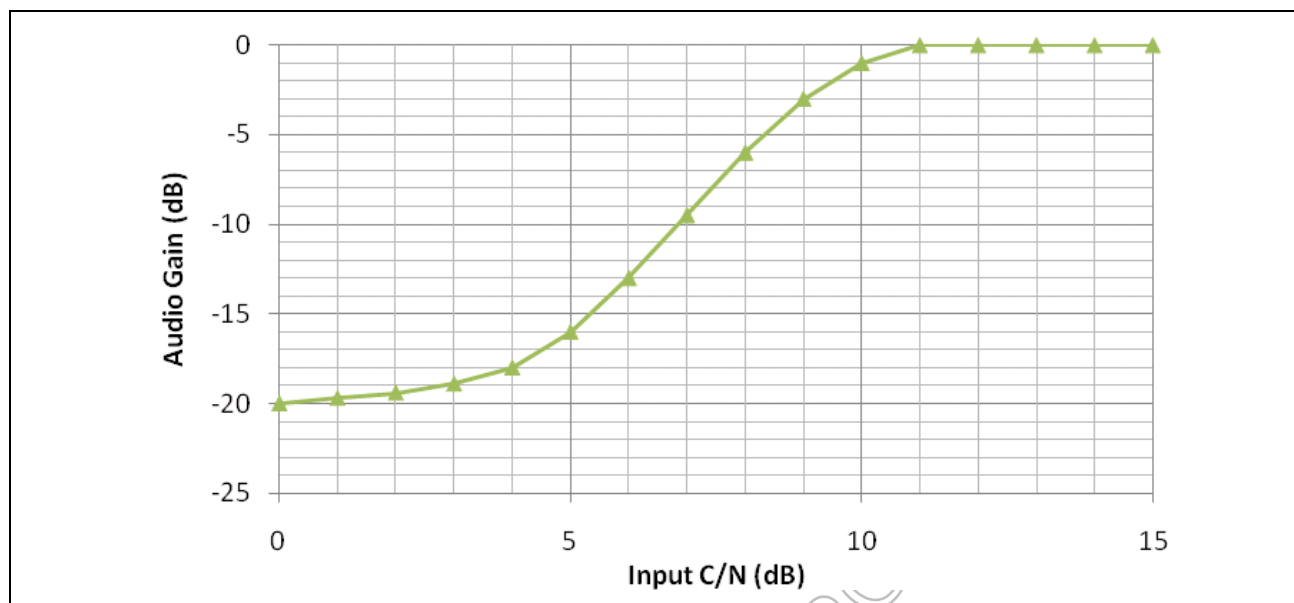


Figure 23: Example Soft Mute Characteristic

- **Audio Pause Detect** — The FM receiver monitors the magnitude of the audio signal and notifies the host through an interrupt when the magnitude of the signal has fallen below the threshold set for a programmable period. This feature can be used to provide alternate frequency jumps during periods of silence to minimize disturbances to the listener. Filtering techniques are used within the audio pause detection block to provide more robust presence-to-silence detection and silence-to-presence detection.

## On-Chip MP3 Encoding

In this mode of operation, the device can record the FM audio to MP3, then output the MP3 data over the HCI interface. The feature effectively off loads the MP3 recording processing load from the host and assists in FM time shift applications. This feature can also be used in conjunction with burst mode buffering to provide significant FM system record times.

---

## RDS/RBDS

The BCM4330 integrates a RDS/RBDS modem and codec, the decoder includes programmable filtering and buffering functions, and the encoder includes the option to encode messages to PS or RT frame format with programmable scrolling in PS mode. The RDS/RBDS data can be read out in receive mode or delivered in transmit mode through the HCI interface.

In addition, the RDS/RBDS functionality supports the following:

### Receive

- Block decoding, error correction and synchronization
- Flywheel synchronization feature, allowing the host to set parameters for acquisition, maintenance, and loss of sync. (It is possible to set up the BCM4330 such that synch is achieved when a minimum of two good blocks (error free) are decoded in sequence. The number of good blocks required for sync is programmable.)
- Storage capability up to 126 blocks of RDS data
- Full or partial block B match detect and interrupt to host
- Audio pause detection with programmable parameters
- Program Identification (PI) code detection and interrupt to host
- Automatic frequency jump
- Block E filtering

### Transmit

- Support simple block encoding or RT/PS message to frame encoding (RT/PS mode minimizes host communication for improved system power saving)
- Programmable scroll rate in PS mode
- 256 bytes of storage for either RT/PS message or simple RDS/RBDS blocks
-

## Section 10: WLAN Global Functions

### WLAN CPU and Memory Subsystem

The BCM4330 includes an integrated ARM Cortex-M3™ processor with internal RAM and ROM. The ARM Cortex-M3 processor is a low-power processor that features low gate count, low interrupt latency, and low-cost debug. It is intended for deeply embedded applications that require fast interrupt response features. The processor implements the ARM architecture v7-M with support for Thumb®-2 instruction set. ARM Cortex-M3 delivers 30% more performance gain over ARM7TDMI.

At 0.19uW/MHz, the Cortex-M3 is the most power efficient general purpose microprocessor available, outperforming 8- and 16-bit devices on MIPS/uW. It supports integrated sleep modes.

ARM Cortex-M3 uses multiple technologies to reduce cost through improved memory utilization, reduced pin overhead, and reduced silicon area. ARM Cortex-M3 supports independent buses for Code and Data access (Icode/Dcode and System buses). ARM Cortex-M3 supports extensive debug features including real time trace of program execution.

On-chip memory for the CPU includes 288 KB SRAM and 512 KB ROM.

### One-Time-Programmable Memory

Various hardware configuration parameters may be stored in an internal 2 Kbit one-time-programmable (OTP) memory, which is read by system software after device reset. In addition, customer-specific parameters, including the system vendor ID and the MAC address can be stored, depending on the specific board design.

The initial state of all bits in an unprogrammed OTP device is 0. After any bit is programmed to a 1, it cannot be reprogrammed to 0. The entire OTP array can be programmed in a single write cycle using a utility provided with the Broadcom WLAN manufacturing test tools. Alternatively, multiple write cycles can be used to selectively program specific bytes, but only bits which are still in the 0 state can be altered during each programming cycle.

Prior to OTP programming, all values should be verified using the appropriate editable nvram.txt file, which is provided with the reference board design package. Documentation on the OTP development process is available on the Broadcom customer support portal (<http://www.broadcom.com/support>).

---

## GPIO Interface

There are seven general purpose I/O (GPIO) pins available on the WLAN section of the BCM4330 that can be used to connect to various external devices.

Upon power up and reset, these pins become tri-stated. Subsequently, they can be programmed to be either input or output pins via the GPIO control register. An internal pull-up resistor is included on each GPIO. If a GPIO output enable is not asserted, and the corresponding GPIO signal is not being driven externally, the GPIO is read as high.

---

## External Coexistence Interface

An external handshake interface is available to enable signaling between the device and an external co-located wireless device, such as GPS, WiMax, or UWB, to manage wireless medium sharing for optimum performance. The following signals can be enabled by software on the indicated WL\_GPIO pins:

- ERCX\_STATUS — WL\_GPIO1
- ERCX\_FREQ — WL\_GPIO2
- ERCX\_RF\_ACTIVE — WL\_GPIO3
- ERCX\_TXCONF — WL\_GPIO4
- ERCX\_PRISEL — WL\_GPIO5

---

## UART Interface

One UART interface can be enabled by software as an alternate function on pins WL\_GPIO4 and WL\_GPIO\_3. Provided primarily for debugging during development, this UART enables the BCM4330 to operate as RS-232 data termination equipment (DTE) for exchanging and managing data with other serial devices. It is compatible with the industry standard 16550 UART, and it provides a FIFO size of 64 × 8 in each direction.

---

## JTAG Interface

The BCM4330 supports the IEEE 1149.1 JTAG boundary scan standard for performing device package and PCB assembly testing during manufacturing. In addition, the JTAG interface allows Broadcom to assist customers by using proprietary debug and characterization test tools during board bringup. Therefore, it is highly recommended to provide access to the JTAG pins by means of test points or a header on all PCB designs.



**Caution!** The BCM4330 I/O interface pins are not 3.3V tolerant. All I/O signaling should be limited to 2.9V ±3%, 2.5V, 1.8V, or 1.2V, depending on the I/O power supply voltage VDDIO. This applies to the GPIO, External Coexistence, UART, and JTAG signals.

## Section 11: WLAN Host Interfaces

### SDIO v2.0

The BCM4330 WLAN section supports SDIO version 2.0. for both 1-bit (25 Mbps), 4-bit modes (100 Mbps), and high speed 4-bit (50 MHz clocks — 200 Mbps). It has the ability to map the interrupt signal onto a GPIO pin. This out-of-band interrupt signal notifies the host when the WLAN device wants to turn on the SDIO interface. The ability to force control of the gated clocks from within the WLAN chip is also provided.

SDIO mode is enabled using the strapping option pins strap\_host\_ifc\_[3:1] ([Table 19: "WLAN GPIO Functions and Strapping Options," on page 114](#)).

Three functions are supported:

- Function 0 Standard SDIO function (Max BlockSize/ByteCount = 32B)
- Function 1 Backplane Function to access the internal System On Chip (SOC) address space (Max BlockSize/ByteCount = 64B)
- Function 2 WLAN Function for efficient WLAN packet transfer through DMA (Max BlockSize/ByteCount = 512B)

### SDIO Pin Descriptions



**Caution!** The SDIO interface pins are not 3.3V tolerant. All SDIO signaling should be limited to 2.9V  $\pm$ 3%, 2.5V, 1.8V, or 1.2V, depending on the I/O power supply voltage VDDIO.

**Table 14: SDIO Pin Description**

| <i>SD 4-Bit Mode</i> |                          | <i>SD 1-Bit Mode</i> |              | <i>gSPI Mode</i> |             |
|----------------------|--------------------------|----------------------|--------------|------------------|-------------|
| DATA0                | Data line 0              | DATA                 | Data line    | DO               | Data output |
| DATA1                | Data line 1 or Interrupt | IRQ                  | Interrupt    | IRQ              | Interrupt   |
| DATA2                | Data line 2 or Read Wait | RW                   | Read Wait    | NC               | Not used    |
| DATA3                | Data line 3              | N/C                  | Not used     | CS               | Card select |
| CLK                  | Clock                    | CLK                  | Clock        | SCLK             | Clock       |
| CMD                  | Command line             | CMD                  | Command line | DI               | Data input  |

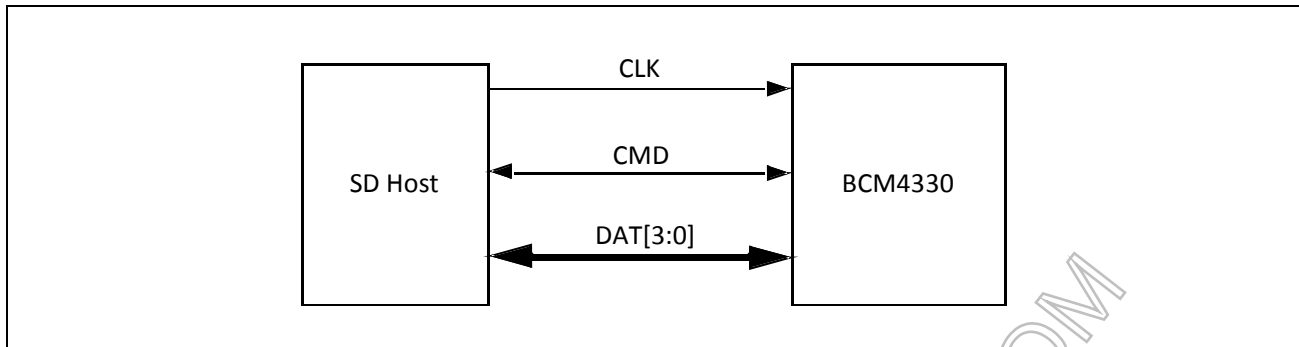


Figure 24: Signal Connections to SDIO Host (SD 4-Bit Mode)

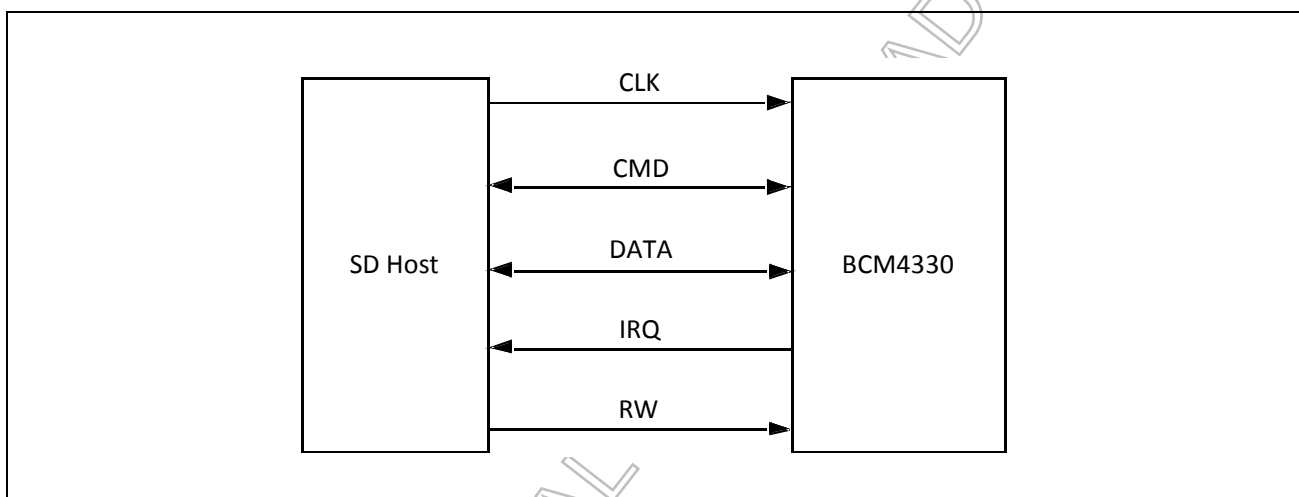


Figure 25: Signal Connections to SDIO Host (SD 1-Bit Mode)

## Generic SPI Mode

In addition to the full SDIO mode, the BCM4330 includes the option of using the simplified generic SPI (gSPI) interface/protocol. Characteristics of the gSPI mode include:

- Supports up to 48 MHz operation
- Supports fixed delays for responses and data from device
- Supports alignment to host gSPI frames (16- or 32-bits)
- Supports up to 2 KB frame size per transfer
- Supports little endian and big endian configurations
- Supports configurable active edge for shifting
- Supports packet transfer through DMA for WLAN

gSPI mode is enabled using the strapping option pins strap\_host\_ifc\_[3:1], [Table 19: “WLAN GPIO Functions and Strapping Options,” on page 114.](#)

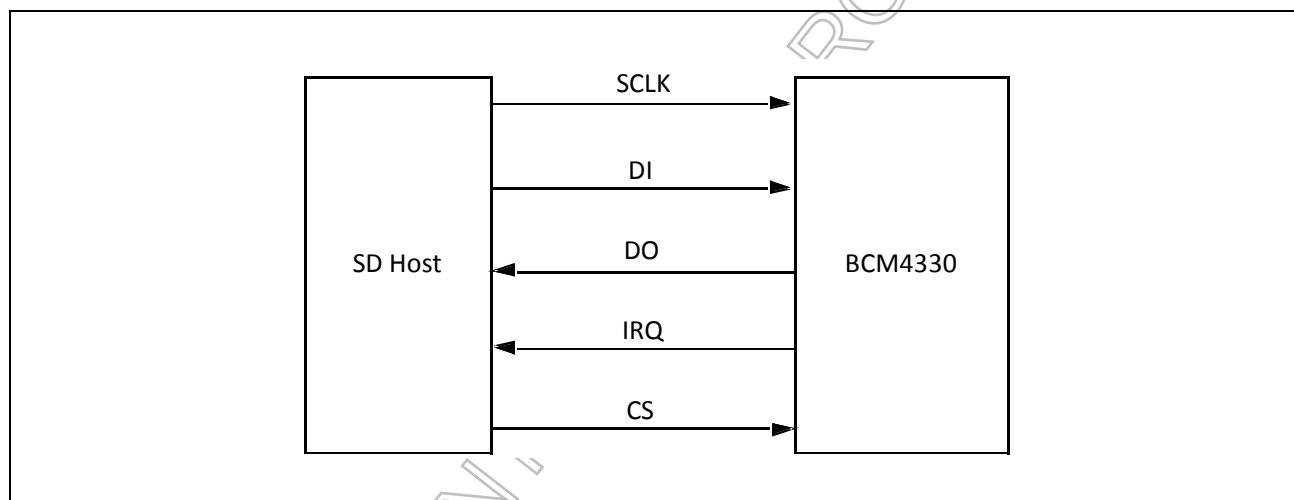


Figure 26: Signal Connections to SDIO Host (gSPI Mode)

## SPI Protocol

The SPI protocol supports both 16-bit and 32-bit word operation. Byte endianness is supported in both modes. Figure 27 and Figure 28 show the basic write and write/read commands.

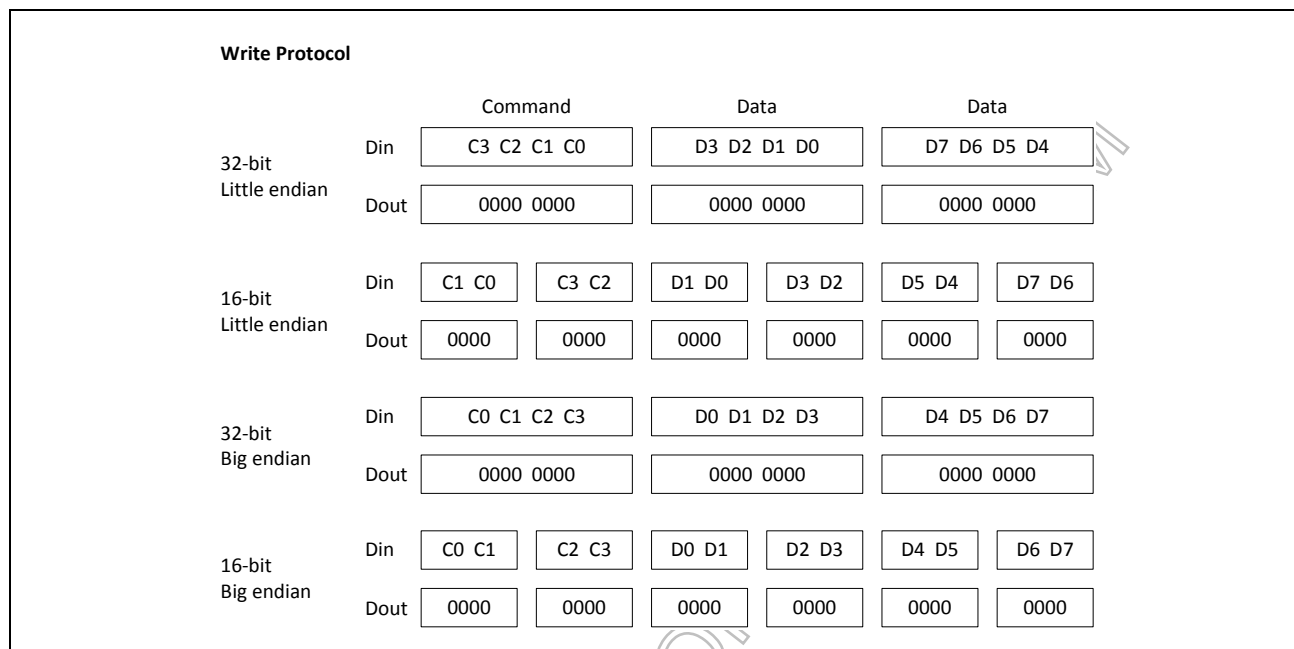


Figure 27: gSPI Write Protocol

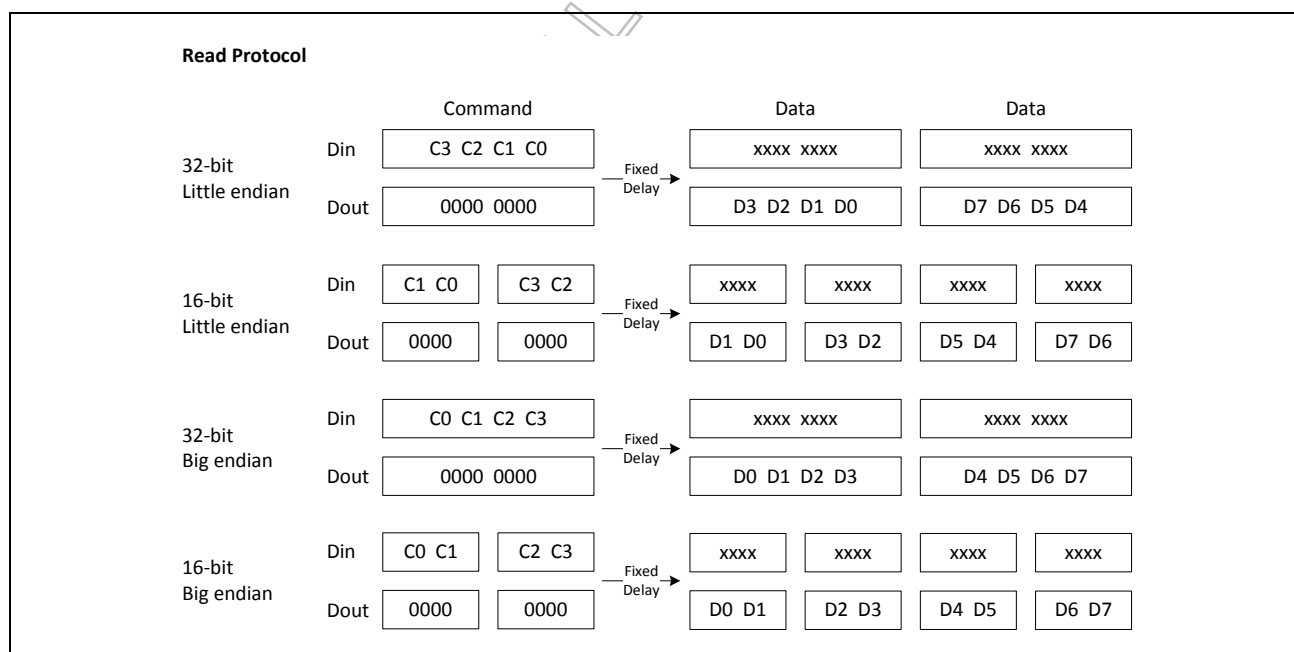


Figure 28: gSPI Read Protocol

## Command Structure

The gSPI command structure is 32 bits. The bit positions and definitions are as shown in [Figure 29](#).

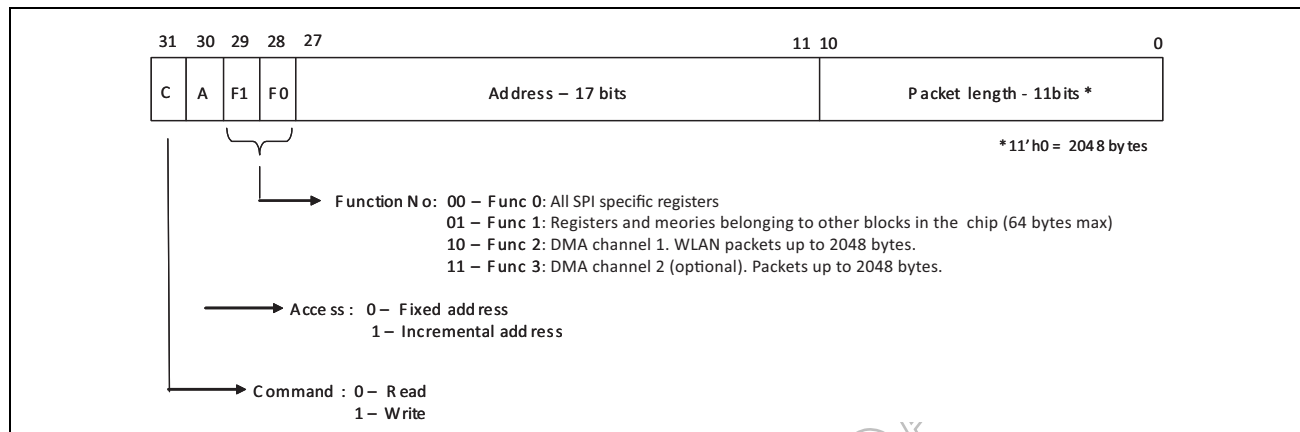


Figure 29: gSPI Command Structure

## Write

The host puts the first bit of the data onto the bus half a clock-cycle before the first active edge following the CS going low. The following bits are clocked out on the falling edge of the gSPI clock. The device samples the data on the active edge.

## Write/Read

The host reads on the rising edge of the clock requiring data from the device to be made available before the first rising clock edge of the clock burst for the data. The last clock edge of the fixed delay word can be used to represent the first bit of the following data word. This allows data to be ready for the first clock edge without relying on asynchronous delays.

## Read

The read command always follows a separate write to set up the WLAN device for a read. This command differs from the write/read command in the following respects: a) chip selects go high between the command/address and the data and b) the time interval between the command/address is not fixed.

Status

The gSPI interface supports status notification to the host after a read/write transaction. This status notification provides information about any packet errors, protocol errors, information about available packet in the RX queue, etc. The status information helps in reducing the number of interrupts to the host. The status-reporting feature can be switched off using a register bit, without any timing overhead. The gSPI bus timing for read/write transactions with and without status notification are as shown in [Figure 30](#) and [Figure 31](#) on page 80. See [Table 15](#) on page 80 for information on status field details.

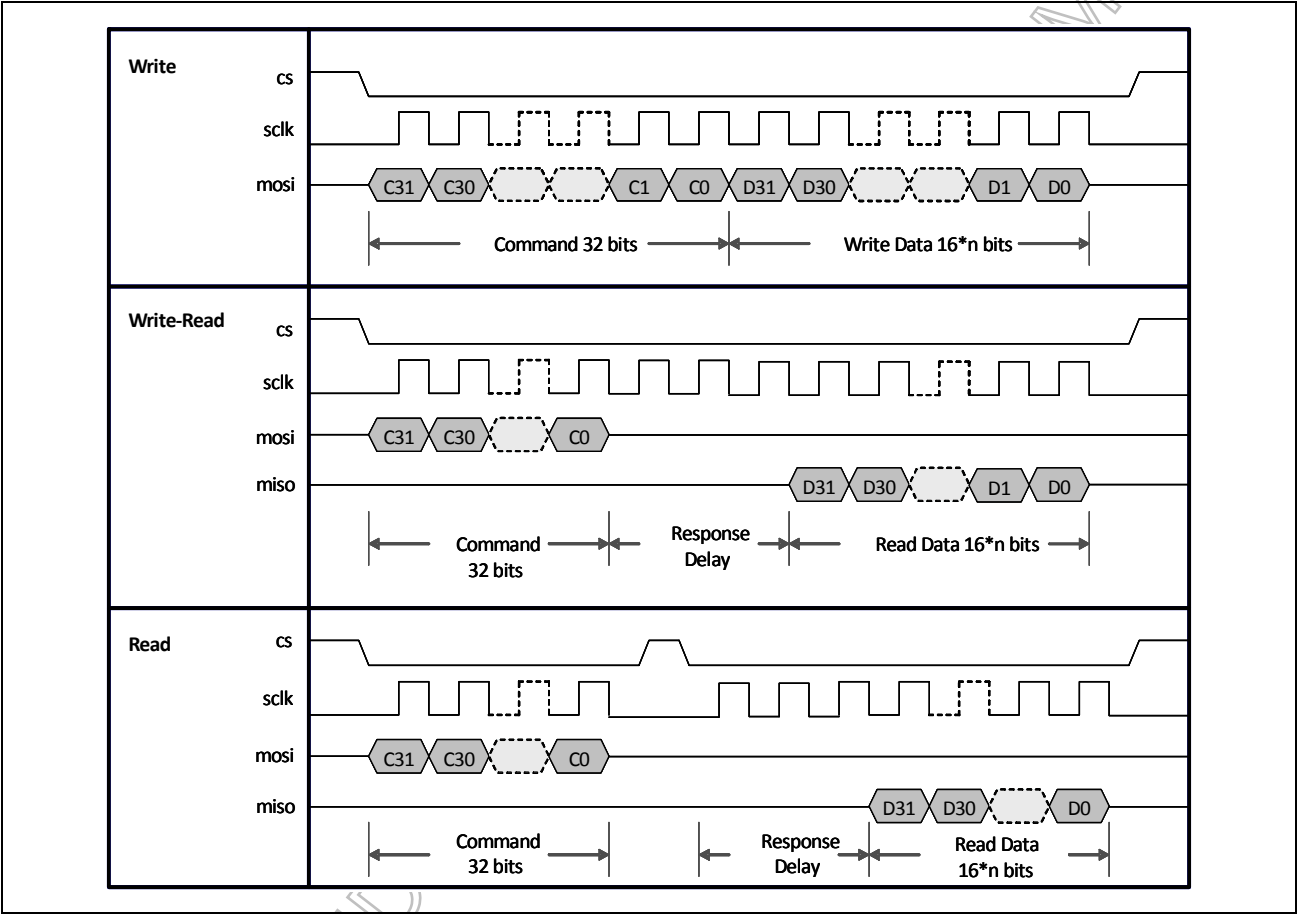


Figure 30: gSPI Signal Timing Without Status

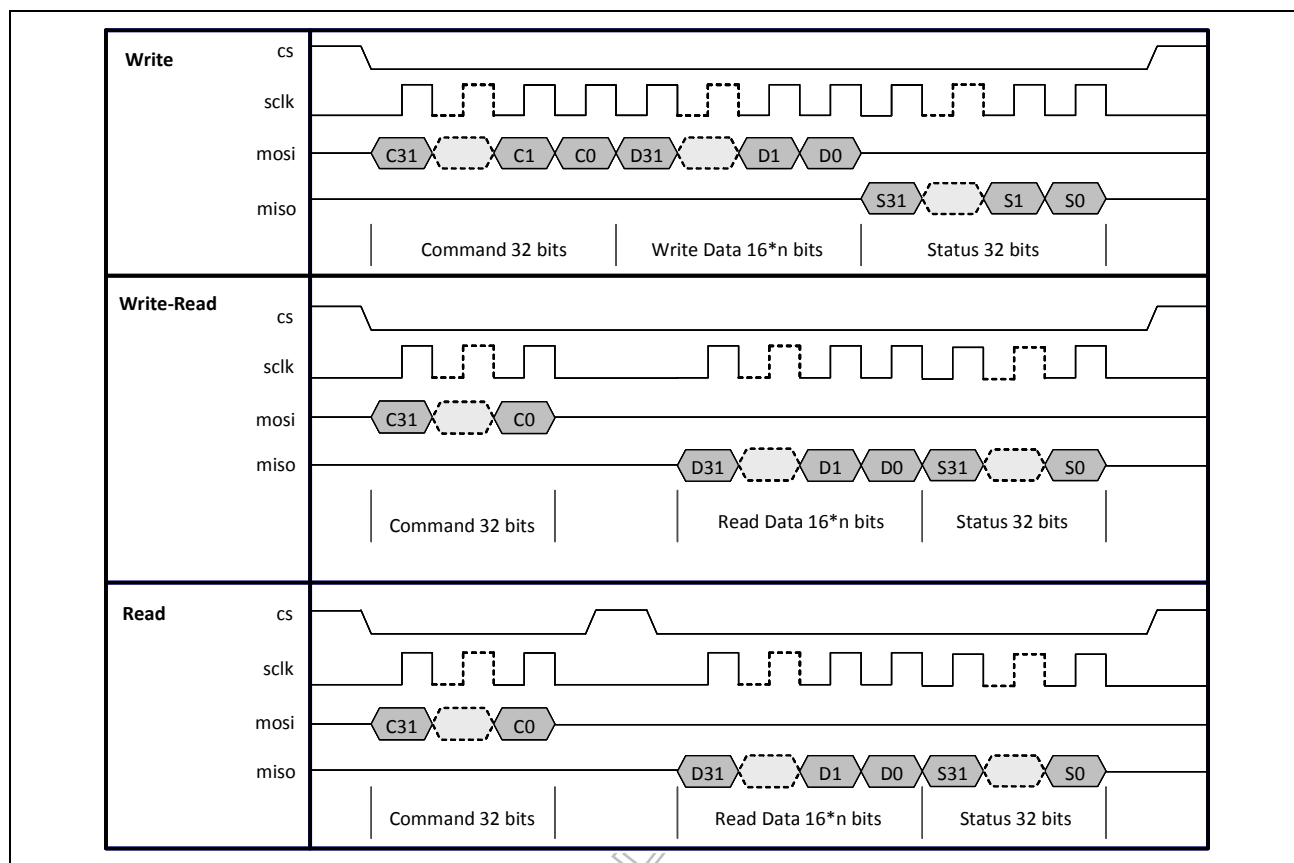


Figure 31: gSPI Signal Timing with Status (Response Delay = 0)

Table 15: gSPI Status Field Details

| Bit   | Name                | Description                                                      |
|-------|---------------------|------------------------------------------------------------------|
| 0     | Data not available  | The requested read data is not available                         |
| 1     | Underflow           | FIFO underflow occurred due to current (F2, F3) read command     |
| 2     | Overflow            | FIFO overflow occurred due to current (F1, F2, F3) write command |
| 3     | F2 interrupt        | F2 channel interrupt                                             |
| 4     | F3 interrupt        | F3 channel interrupt                                             |
| 5     | F2 RX Ready         | F2 FIFO is ready to receive data (FIFO empty)                    |
| 6     | F3 RX Ready         | F3 FIFO is ready to receive data (FIFO empty)                    |
| 7     | Reserved            | —                                                                |
| 8     | F2 Packet Available | Packet is available/ready in F2 TX FIFO                          |
| 9:19  | F2 Packet Length    | Length of packet available in F2 FIFO                            |
| 20    | F3 Packet Available | Packet is available/ready in F3 TX FIFO                          |
| 21:31 | F3 Packet Length    | Length of packet available in F3 FIFO                            |

## gSPI Host-Device Handshake

To initiate communication through the gSPI after power-up, the host needs to bring up the WLAN/Chip by writing to the wake-up WLAN register bit. Writing a 1 to this bit will start up the necessary crystals and PLLs so that the BCM4330 is ready for data transfer. The device can signal an interrupt to the host indicating that the device is awake and ready. This procedure also needs to be followed for waking up the device in sleep mode. The device can interrupt the host using the WLAN IRQ line whenever it has any information to pass to the host. On getting an interrupt, the host needs to read the interrupt and/or status register to determine the cause of interrupt and then take necessary actions.

## Boot-Up Sequence

After power-up, the gSPI host needs to wait 150 ms for the device to be out of reset. For this, the host needs to poll with a read command to F0 addr 0x14. Address 0x14 contains a predefined bit pattern. As soon as the host gets a response back with the correct register content, it implies that the device has powered up and is out of reset. After that, the host needs to set the wakeup-WLAN bit (F0 reg 0x00 bit 7). The wakeup-WLAN issues a clock request to the PMU.

For the first time after power-up, the host needs to wait for the availability of low power clock inside the device. Once that is available, the host needs to write to a PMU register to set the crystal frequency. This will turn on the PLL. After the PLL is locked, the chipActive interrupt is issued to the host. This indicates device awake/ready status. See [Table 16](#) for information on gSPI registers.

In [Table 16](#), the following notation is used for register access:

- R: Readable from host and CPU
- W: Writable from host
- U: Writable from CPU

**Table 16: gSPI Registers**

| Address | Register           | Bit | Access | Default | Description                                                                                                                                                     |
|---------|--------------------|-----|--------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| x0000   | Word length        | 0   | R/W/U  | 0       | 0: 16 bit word length<br>1: 32 bit word length                                                                                                                  |
|         | Endianness         | 1   | R/W/U  | 0       | 0: Little Endian<br>1: Big Endian                                                                                                                               |
|         | High speed mode    | 4   | R/W/U  | 1       | 0: Normal mode. RX and TX at different edges.<br>1: High speed mode. RX and TX on same edge (default).                                                          |
|         | Interrupt polarity | 5   | R/W/U  | 1       | 0: Interrupt active polarity is low<br>1: Interrupt active polarity is high (default)                                                                           |
|         | Wake-up            | 7   | R/W    | 0       | A write of 1 will denote wake-up command from host to device. This will be followed by a F2 Interrupt from gSPI device to host, indicating device awake status. |
| x0001   | Response delay     | 7:0 | R/W/U  | 8'h04   | Configurable read response delay in multiples of 8 bits                                                                                                         |

**Table 16: gSPI Registers (Cont.)**

| Address         | Register                  | Bit  | Access | Default          | Description                                                                                                                             |
|-----------------|---------------------------|------|--------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| x0002           | Status enable             | 0    | R/W    | 1                | 0: no status sent to host after read/write<br>1: status sent to host after read/write                                                   |
|                 | Interrupt with status     | 1    | R/W    | 0                | 0: do not interrupt if status is sent<br>1: interrupt host even if status is sent                                                       |
|                 | Response delay for all    | 2    | R/W    | 0                | 0: response delay applicable to F1 read only<br>1: response delay applicable to all function read                                       |
| x0003           | Reserved                  | –    | –      | –                | –                                                                                                                                       |
| x0004           | Interrupt register        | 0    | R/W    | 0                | Requested data not available; Cleared by writing a 1 to this location                                                                   |
|                 |                           | 1    | R      | 0                | F2/F3 FIFO underflow due to last read                                                                                                   |
|                 |                           | 2    | R      | 0                | F2/F3 FIFO overflow due to last write                                                                                                   |
|                 |                           | 5    | R      | 0                | F2 packet available                                                                                                                     |
|                 |                           | 6    | R      | 0                | F3 packet available                                                                                                                     |
|                 |                           | 7    | R      | 0                | F1 overflow due to last write                                                                                                           |
| x0005           | Interrupt register        | 5    | R      | 0                | F1 Interrupt                                                                                                                            |
|                 |                           | 6    | R      | 0                | F2 Interrupt                                                                                                                            |
|                 |                           | 7    | R      | 0                | F3 Interrupt                                                                                                                            |
| x0006–<br>x0007 | Interrupt enable register | 15:0 | R/W/U  | 16'hE0E7         | Particular Interrupt is enabled if a corresponding bit is set                                                                           |
| x0008–<br>x000B | Status register           | 31:0 | R      | 32'h0000         | Same as status bit definitions                                                                                                          |
| x000C–<br>x000D | F1 info register          | 0    | R      | 1                | F1 enabled                                                                                                                              |
|                 |                           | 1    | R      | 0                | F1 ready for data transfer                                                                                                              |
|                 |                           | 13:2 | R/U    | 12'h40           | F1 max packet size                                                                                                                      |
| x000E–<br>x000F | F2 info register          | 0    | R/U    | 1                | F2 enabled                                                                                                                              |
|                 |                           | 1    | R      | 0                | F2 ready for data transfer                                                                                                              |
|                 |                           | 15:2 | R/U    | 14'h800          | F2 max packet size                                                                                                                      |
| x0010–<br>x0011 | F3 info register          | 0    | R/U    | 1                | F3 enabled                                                                                                                              |
|                 |                           | 1    | R      | 0                | F3 ready for data transfer                                                                                                              |
|                 |                           | 15:2 | R/U    | 14'h800          | F3 max packet size                                                                                                                      |
| x0014–<br>x0017 | Test–Read only register   | 31:0 | R      | 32'hFEED<br>BEAD | This register contains a predefined pattern, which the host can read and determine if the gSPI interface is working properly.           |
| x0018–<br>x001B | Test–R/W register         | 31:0 | R/W/U  | 32'h0000<br>0000 | This is a dummy register where the host can write some pattern and read it back to determine if the gSPI interface is working properly. |

Figure 32 shows the WLAN boot-up sequence from power-up to firmware download.

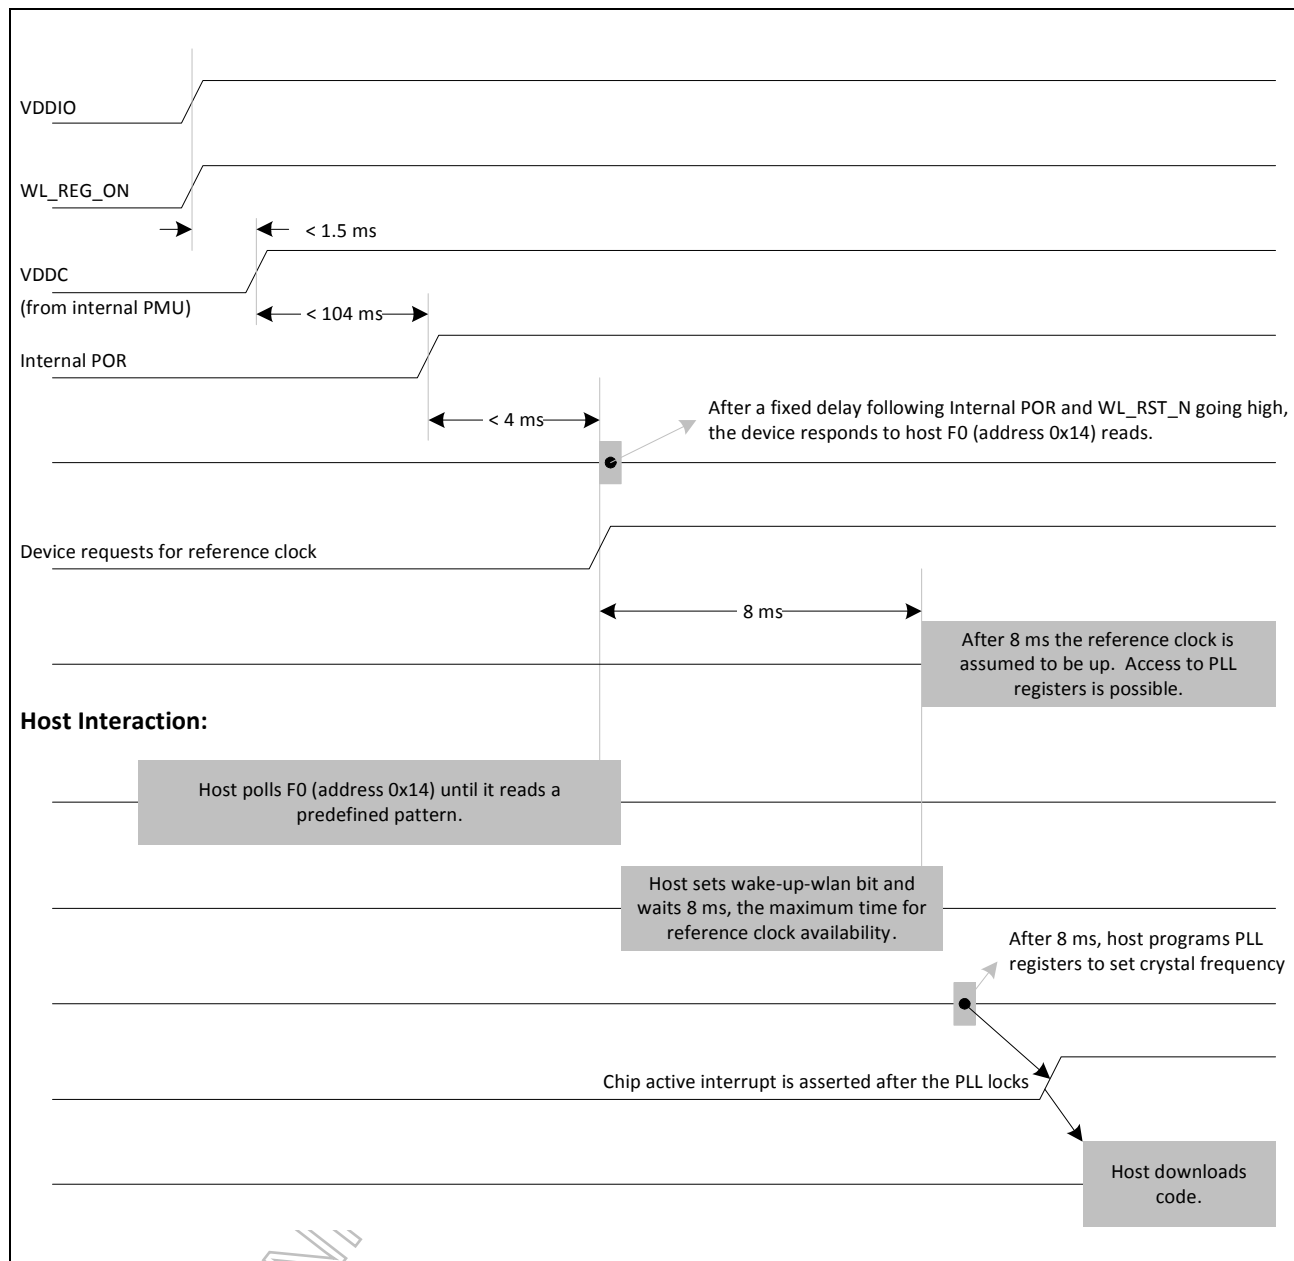


Figure 32: WLAN Boot-Up Sequence

## HSIC Interface


As an alternative to SDIO, an HSIC host interface can be enabled using the strapping option pins `strap_host_ifc_[3:1]` ([Table 19: “WLAN GPIO Functions and Strapping Options,” on page 114](#)). HSIC is a simplified derivative of the USB2.0 interface designed to replace a standard USB PHY and cable for short distances (up to 10 cm) on board point-to-point connections. Using two signals, a bidirectional data strobe (STROBE) and a bidirectional DDR data signal (DATA), it provides high-speed serial 480 Mbps USB transfers that are 100% host driver compatible with traditional USB 2.0 cable-connected topologies.

[Figure 33](#) shows the blocks in the HSIC device core.

A clock reference frequency of 37.4 MHz should always be used for HSIC mode.

Key features of HSIC include:

- High-speed 480 Mbps data rate only
- Source-synchronous serial interface using 1.2V LVCMOS signal levels
- No power consumed except when a data transfer is in progress
- Maximum trace length of 10 cm.
- No Plug-n-Play support, no hot attach/removal

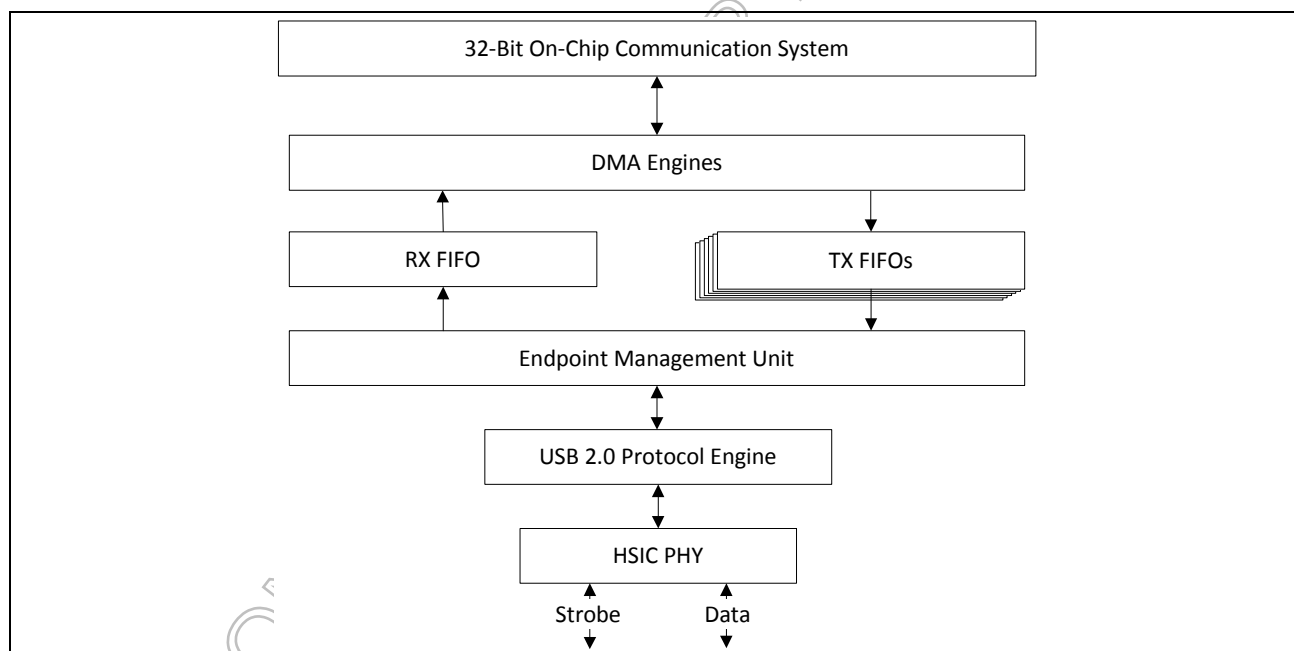

**Figure 33: HSIC Device Block Diagram**

## Section 12: Wireless LAN MAC and PHY

### MAC Features

The BCM4330 WLAN media access controller (MAC) supports features specified in the 802.11 base standard, and amended by 802.11n. The salient features are listed below:

- Transmission and reception of aggregated MPDUs (A-MPDU)
- Support for power management schemes, including WMM power-save, power-save multi-poll (PSMP) and multiphase PSMP operation
- Support for immediate ACK and Block-ACK policies
- Interframe space timing support, including RIFS
- Support for RTS/CTS and CTS-to-self frame sequences for protecting frame exchanges
- Back-off counters in hardware for supporting multiple priorities as specified in the WMM specification
- Timing synchronization function (TSF), network allocation vector (NAV) maintenance, and target beacon transmission time (TBTT) generation in hardware
- Hardware offload for AES-CCMP, legacy WPA TKIP, legacy WEP ciphers, WAPI, and support for key management
- Support for coexistence with Bluetooth and other external radios
- Programmable independent basic service set (IBSS) or infrastructure basic service set functionality
- Statistics counters for MIB support

### MAC Description

The 4329 WLAN MAC is designed to support high-throughput operation with low-power consumption. It does so without compromising the Bluetooth coexistence policies, thereby enabling optimal performance over both networks. In addition, several power saving modes have been implemented that allow the MAC to consume very little power while maintaining network-wide timing synchronization. The architecture diagram of the MAC is shown in [Figure 34 on page 86](#).

The following sections provide an overview of the important modules in the MAC.

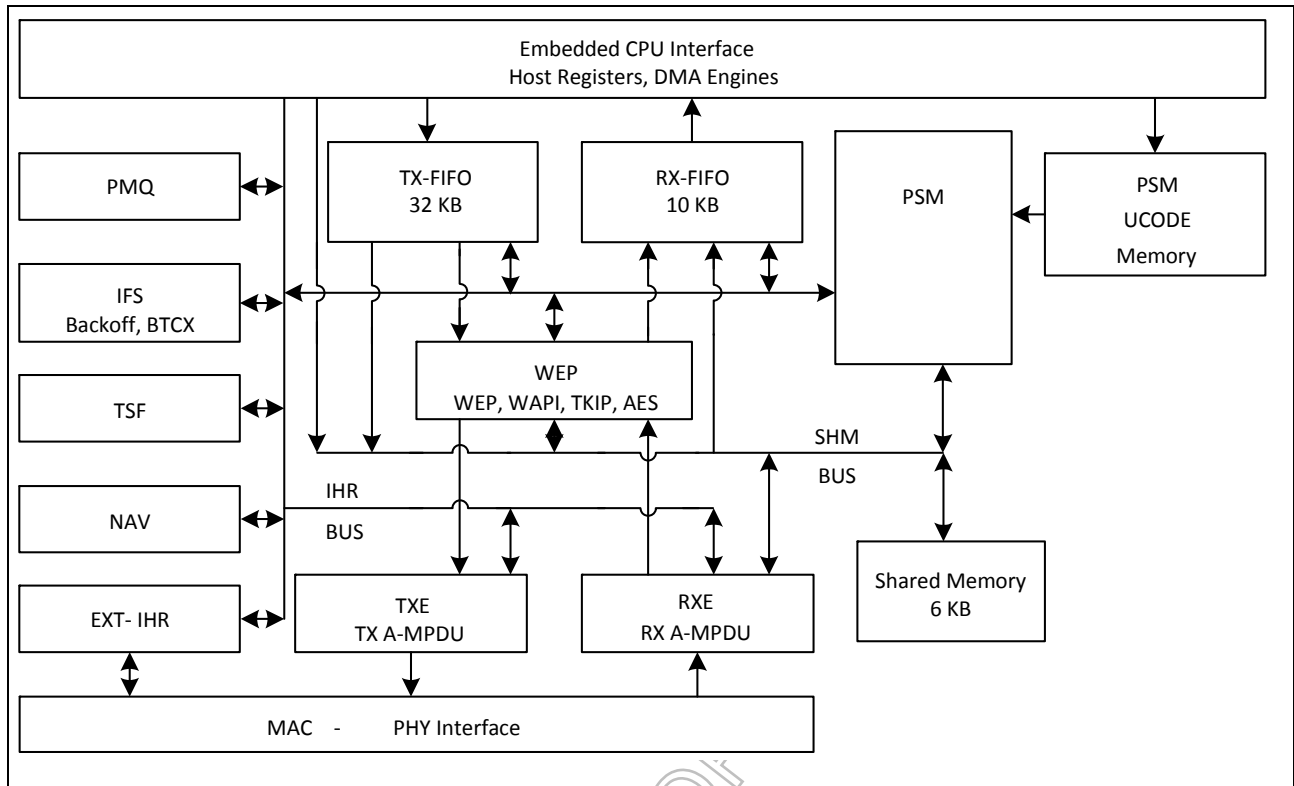


Figure 34: WLAN MAC Architecture

## PSM

The programmable state machine (PSM) is a micro-coded engine, which provides most of the low-level control to the hardware, to implement the 802.11 specification. It is a microcontroller that is highly optimized for flow control operations, which are predominant in implementations of communication protocols. The instruction set and fundamental operations are simple and general, which allows algorithms to be optimized until very late in the design process. It also allows for changes to the algorithms to track evolving 802.11 specifications.

The PSM fetches instructions from the microcode memory. It uses the shared memory to obtain operands for instructions, as a data store, and to exchange data between both the host and the MAC data pipeline (via the SHM bus). The PSM also uses a scratchpad memory (similar to a register bank) to store frequently accessed and temporary variables.

The PSM exercises fine-grained control over the hardware engines, by programming internal hardware registers (IHR). These IHRs are co-located with the hardware functions they control, and are accessed by the PSM via the IHR bus.

The PSM fetches instructions from the microcode memory using an address determined by the program counter, instruction literal, or a program stack. For ALU operations the operands are obtained from shared memory, scratchpad, IHRs, or instruction literals, and the results are written into the shared memory, scratchpad, or IHRs.

There are two basic branch instructions: conditional branches and ALU based branches. To better support the many decision points in the 802.11 algorithms, branches can depend on either a readily available signals from the hardware modules (branch condition signals are available to the PSM without polling the IHRs), or on the results of ALU operations.

## WEP

The wired equivalent privacy (WEP) engine encapsulates all the hardware accelerators to perform the encryption and decryption, and MIC computation and verification. The accelerators implement the following cipher algorithms: legacy WEP, WPA TKIP, WPA2 AES-CCMP.

The PSM determines, based on the frame type and association information, the appropriate cipher algorithm to be used. It supplies the keys to the hardware engines from an on-chip key table. The WEP interfaces with the TXE to encrypt and compute the MIC on transmit frames, and the RXE to decrypt and verify the MIC on receive frames.

## TXE

The transmit engine (TXE) constitutes the transmit data path of the MAC. It coordinates the DMA engines to store the transmit frames in the TXFIFO. It interfaces with WEP module to encrypt frames, and transfers the frames across the MAC-PHY interface at the appropriate time determined by the channel access mechanisms.

The data received from the DMA engines are stored in transmit FIFOs. The MAC supports multiple logical queues to support traffic streams that have different QoS priority requirements. The PSM uses the channel access information from the IFS module to schedule a queue from which the next frame is transmitted. Once the frame is scheduled, the TXE hardware transmits the frame based on a precise timing trigger received from the IFS module.

The TXE module also contains the hardware that allows the rapid assembly of MPDUs into an A-MPDU for transmission. The hardware module aggregates the encrypted MPDUs by adding appropriate headers and pad delimiters as needed.

## RXE

The receive engine (RXE) constitutes the receive data path of the MAC. It interfaces with the DMA engine to drain the received frames from the RXFIFO. It transfers bytes across the MAC-PHY interface and interfaces with the WEP module to decrypt frames. The decrypted data is stored in the RXFIFO.

The RXE module contains programmable filters that are programmed by the PSM to accept or filter frames based on several criteria such as receiver address, BSSID, and certain frame types.

The RXE module also contains the hardware required to detect A-MPDUs, parse the headers of the containers, and disaggregate them into component MPDUS.

## IFS

The IFS module contains the timers required to determine interframe space timing including RIFS timing. It also contains multiple backoff engines required to support prioritized access to the medium as specified by WMM.

The interframe spacing timers are triggered by the cessation of channel activity on the medium, as indicated by the PHY. These timers provide precise timing to the TXE to begin frame transmission. The TXE uses this information to send response frames or perform transmit frame-bursting (RIFS or SIFS separated, as within a TXOP).

The backoff engines (for each access category) monitor channel activity, in each slot duration, to determine whether to continue or pause the backoff counters. When the backoff counters reach 0, the TXE gets notified, so that it may commence frame transmission. In the event of multiple backoff counters decrementing to 0 at the same time, the hardware resolves the conflict based on policies provided by the PSM.

The IFS module also incorporates hardware that allows the MAC to enter a low-power state when operating under the IEEE power save mode. In this mode, the MAC is in a suspended state with its clock turned off. A sleep timer, whose count value is initialized by the PSM, runs on a slow clock and determines the duration over which the MAC remains in this suspended state. Once the timer expires the MAC is restored to its functional state. The PSM updates the TSF timer based on the sleep duration ensuring that the TSF is synchronized to the network.

The IFS module also contains the PTA hardware that assists the PSM in Bluetooth coexistence functions.

## TSF

The timing synchronization function (TSF) module maintains the TSF timer of the MAC. It also maintains the target beacon transmission time (TBTT). The TSF timer hardware, under the control of the PSM, is capable of adopting timestamps received from beacon and probe response frames in order to maintain synchronization with the network.

The TSF module also generates trigger signals for events that are specified as offsets from the TSF timer, such as uplink and downlink transmission times used in PSMP.

## NAV

The network allocation vector (NAV) timer module is responsible for maintaining the NAV information conveyed through the duration field of MAC frames. This ensures that the MAC complies with the protection mechanisms specified in the standard.

The hardware, under the control of the PSM, maintains the NAV timer and updates the timer appropriately based on received frames. This timing information is provided to the IFS module, which uses it as a virtual carrier-sense indication.

## MAC-PHY Interface

The MAC-PHY interface consists of a data path interface to exchange RX/TX data from/to the PHY. In addition, there is an programming interface, which can be controlled either by the host or the PSM to configure and control the PHY.

---


## WLAN PHY Description

The BCM4330 WLAN Digital PHY is designed to comply with IEEE 802.11a/b/g/n single stream to provide wireless LAN connectivity supporting data rates from 1 Mbps to 65 Mbps for low power, high performance handheld applications.

The PHY has been designed to work with interference, radio nonlinearity, and impairments. It incorporates efficient implementations of the filters, FFT and Viterbi decoder algorithms. Efficient algorithms have been designed to achieve maximum throughput and reliability, including algorithms for carrier sense/rejection, frequency/phase/timing acquisition and tracking, channel estimation and tracking. The PHY receiver also contains a robust 11b demodulator. The PHY carrier sense has been tuned to provide high-throughput for 802.11g/11b hybrid networks with Bluetooth coexistence. It has also been designed for shared single antenna systems between WL and BT to support simultaneous Rx-Rx.

### PHY Features


- Supports IEEE 802.11a, 11b, 11g, 11n single stream PHY standards
- 802.11n single-stream operation in 20 MHz channels
- Supports optional short GI and green field modes in RX
- Supports optional space-time block code (STBC) receive of two space-time streams
- Supports 802.11h/k for worldwide operation
- Advanced algorithms for low power, enhanced sensitivity, range, and reliability
- Algorithms to improve performance in presence of Bluetooth
- Simultaneous Rx-Rx (WL-BT) architecture
- Automatic gain control scheme for blocking and non blocking application scenario for cellular applications.
- Closed loop transmit power control
- Digital RF chip calibration algorithms to handle CMOS RF chip non-idealities
- On-the-fly channel frequency and transmit power selection
- Supports per packet Rx antenna diversity
- Designed to meet FCC and other worldwide regulatory requirements

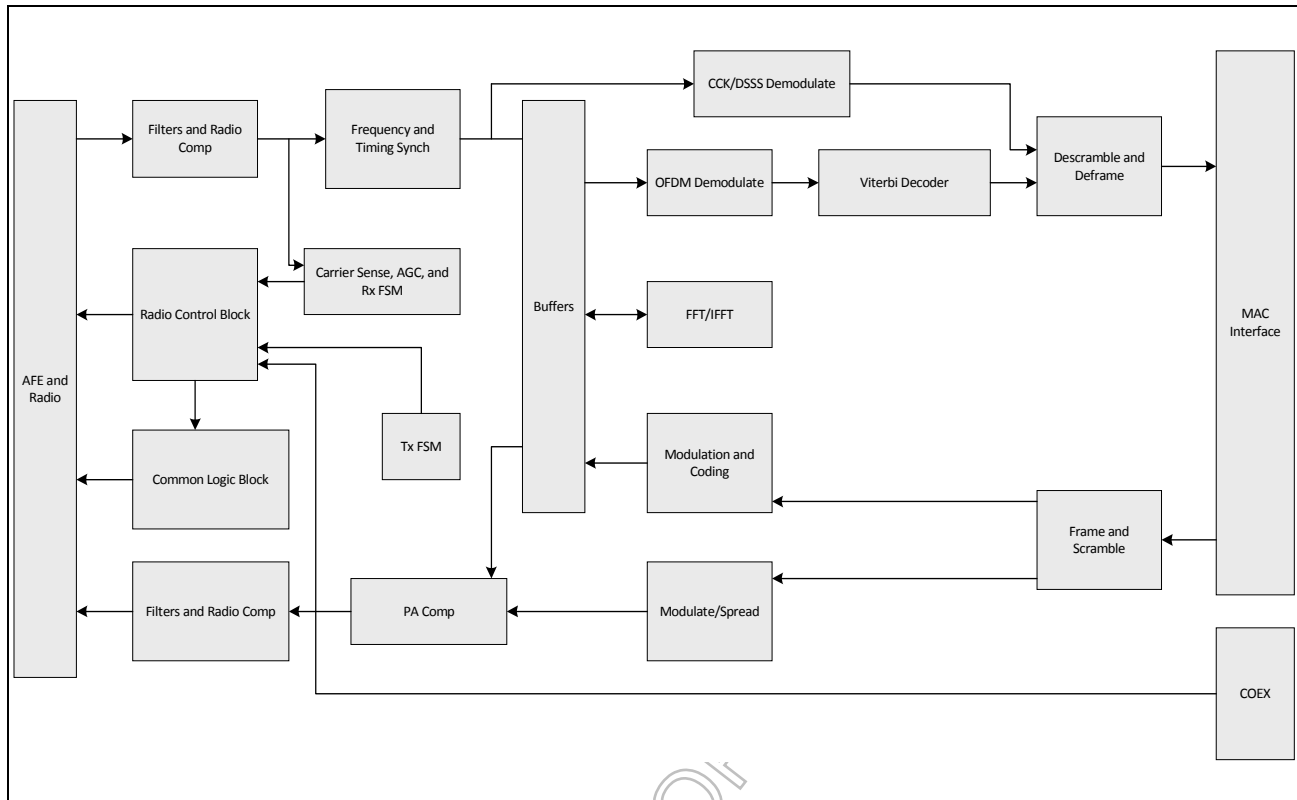

**Figure 35: WLAN PHY Block Diagram**

The PHY is capable of fully calibrating the RF front end to extract the highest performance. On power-up, the PHY performs a full suite of calibration to correct for IQ mismatch and local oscillator leakage. The PHY also performs periodic calibration to compensate for any temperature related drift thus maintaining high-performance over time. A closed loop transmit control algorithm maintains the output power to required level with capability control Tx power on a per packet basis.

One of the key feature of the PHY is two space-time stream receive capability. The STBC scheme can obtain diversity gains by using multiple transmit antennas in AP (Access Point) in a fading channel environment, without increasing the complexity at the STA. Details of the STBC receive is shown in the block diagram shown in [Figure 36 on page 92](#).

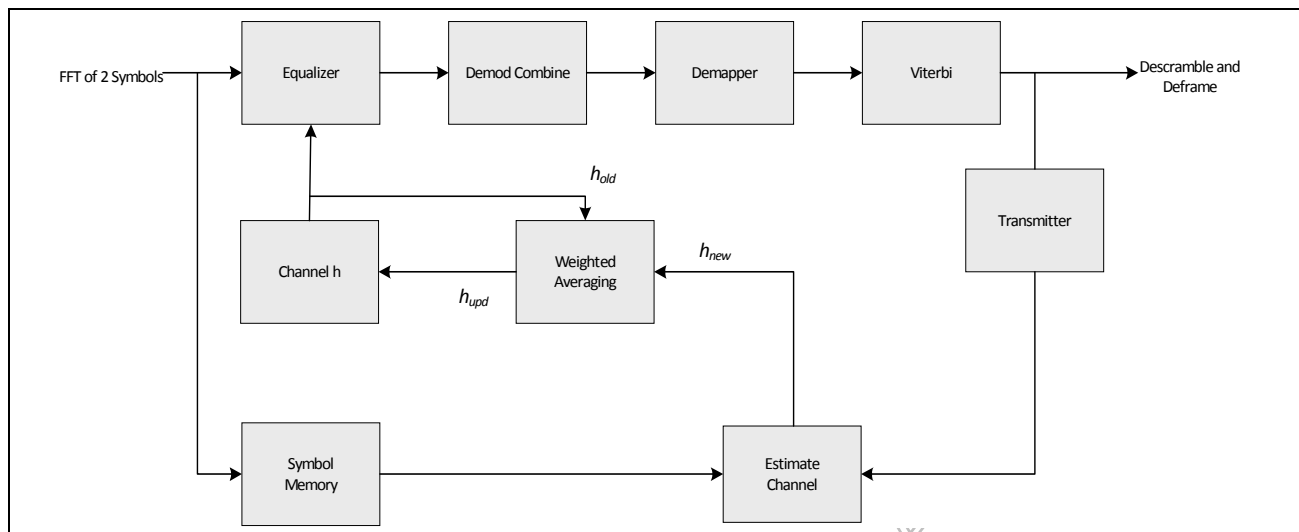

**Figure 36: STBC Receive Block Diagram**

In STBC mode, symbols are processed in pairs. Equalized output symbols are linearly combined and decoded. Channel estimate is refined on every pair of symbols using the received symbols and reconstructed symbols.

## Section 13: WLAN Radio Subsystem

The BCM4330 includes an integrated dual-band WLAN RF transceiver that has been optimized for use in 2.4 GHz and 5 GHz Wireless LAN systems (but not both simultaneously). It has been designed to provide low-power, low-cost, and robust communications for applications operating in the globally available 2.4 GHz unlicensed ISM or 5 GHz U-NII bands. The transmit and receive sections include all on-chip filtering, mixing, and gain control functions.

Up to eight RF control signals are available to drive the external RF switches and support the addition of optional external power amplifiers and low noise amplifiers for either or both bands. See the reference board schematics for further details.

### Receive Path

The BCM4330 has a wide dynamic range, direct conversion receiver. It employs high order on-chip channel filtering to ensure reliable operation in the noisy 2.4 GHz ISM band or the entire 5 GHz U-NII band. Control signals are available that can support the use of optional external low noise amplifiers (LNA), which can increase the receive sensitivity by several dB.

### Transmit Path

Baseband data is modulated and upconverted to the 2.4 GHz ISM or 5-GHz U-NII bands, respectively. Linear on-chip power amplifiers are included, which are capable of delivering high output powers while meeting 802.11a/b/g/n specifications without the need for external PAs.

These PAs can be powered directly from VBAT, thereby eliminating the need for a separate PALDO. Closed-loop output power control is completely integrated.

Several spare RF control signals are available to support the addition of optional external power amplifiers for either or both bands.

### Calibration

The BCM4330 features dynamic on-chip calibration, eliminating process variation across components. This enables the BCM4330 to be used in high-volume applications, because calibration routines are not required during manufacturing testing. These calibration routines are performed periodically in the course of normal radio operation. Examples of this automatic calibration are baseband filter calibration for optimum transmit and receive performance and LOFT calibration for leakage reduction. In addition, I/Q Calibration, R Calibration, and VCO Calibration are performed on-chip.

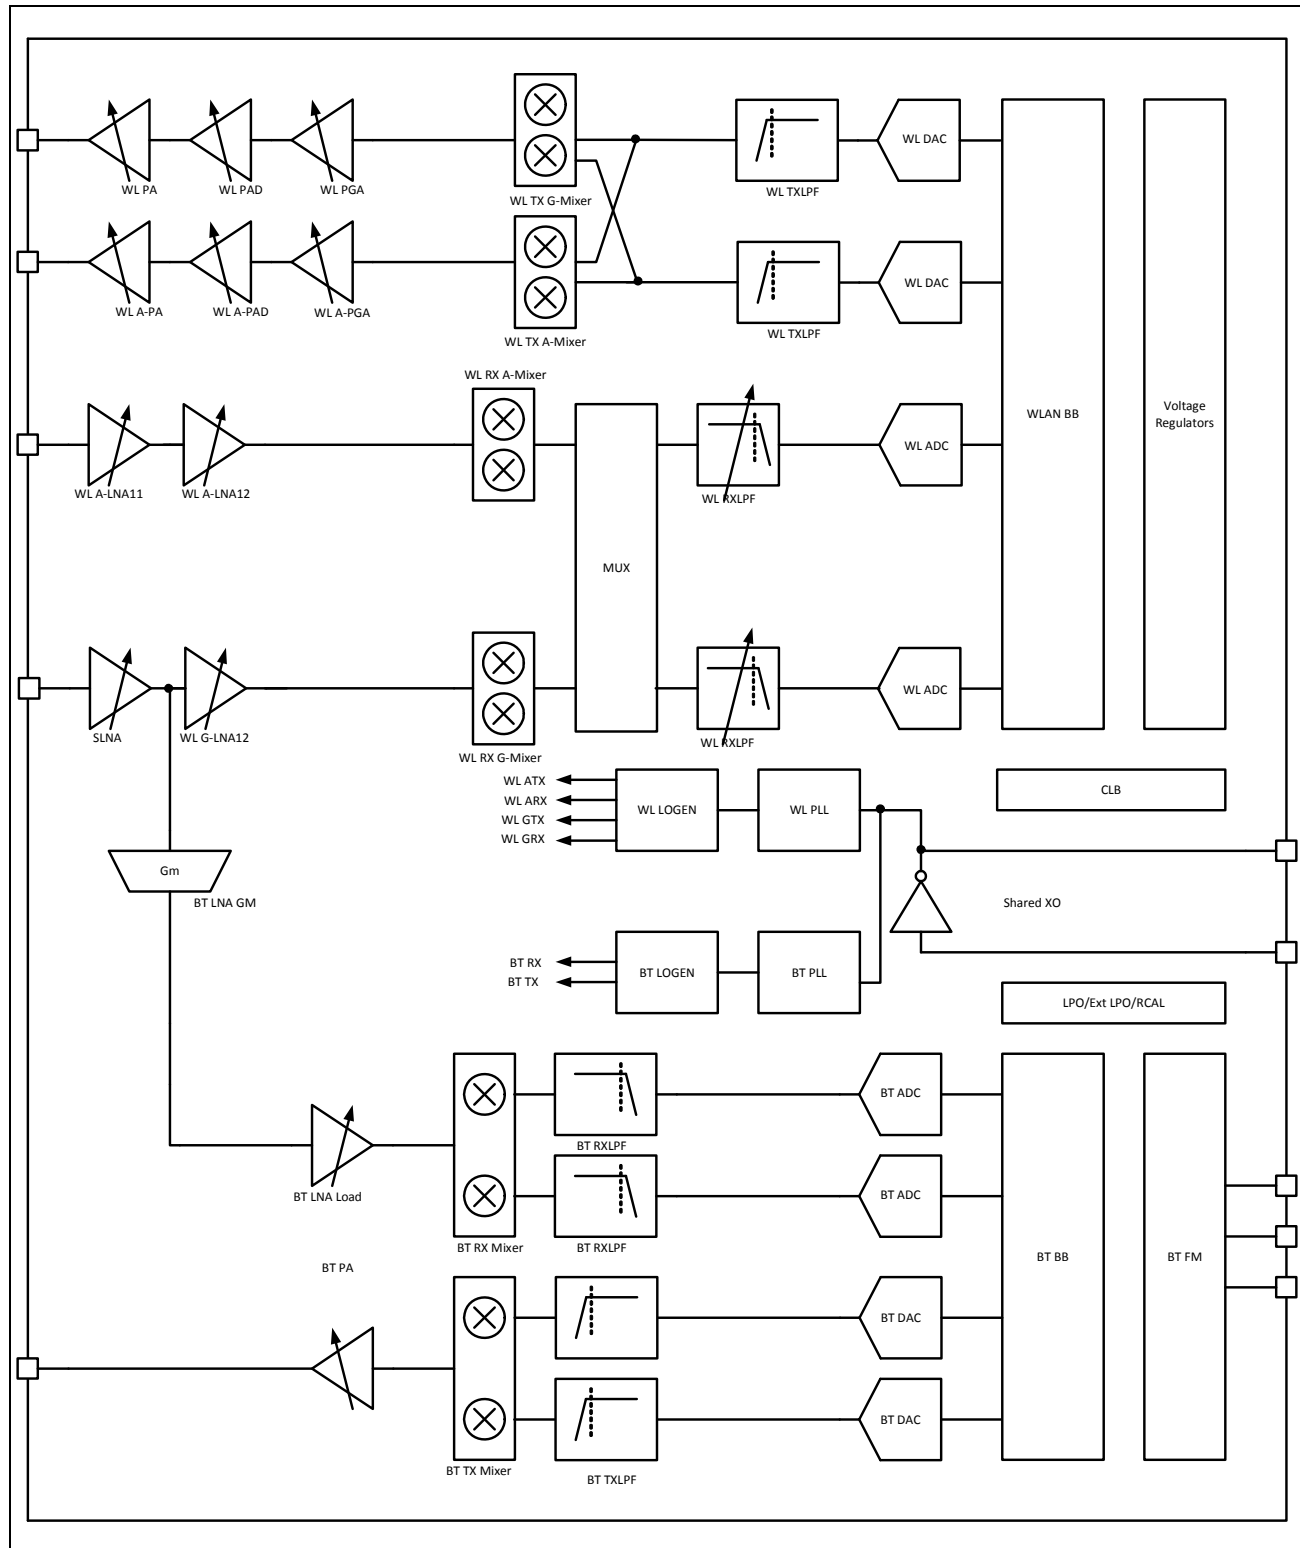


Figure 37: Radio Functional Block Diagram

## Section 14: Pinout and Signal Descriptions

### Signal Assignments

Figure 38 shows the FCFBGA ball map. Figure 39 shows the WLPGA ball map. Figure 40 shows the WLCSP bump map.

Table 17 on page 98 contains the WLCSP bump coordinates.

Table 18 on page 105 contains the signal description for all packages.

|   | 1                     | 2               | 3                  | 4             |
|---|-----------------------|-----------------|--------------------|---------------|
| A | WRF_RFIN_5G           | WRF_RFOUT_5G    | WRF_VDDPA_5G       | WRF_VDDPA_2G  |
| B | WRF_VDDLNA_1P2_5G     | WRF_GNDLNA_5G   | WRF_A_TSSI_IN      | WRF_GNDPA_5G  |
| C | WRF_LOGEN_A_VDD1P2    | WRF_LOGEN_A_GND | WRF_ANA_GND        | WRF_PADRV_VDD |
| D | WRF_VDD_VCOLDO_IN_1P8 | WRF_VDDANA_1P2  | WRF_VCOLDO_OUT_1P2 | WRF_GPIO_OUT  |
| E | WRF_TCXO_VDD          | WRF_VCO_GND     | WRF_VDDAFE_1P2     | WRF_RES_EXT   |
| F | WRF_XTAL_OP           | WRF_TCXO_IN     | WRF_AFE_GND        | BT_PCM_IN     |
| G | WRF_XTAL_ON           | WRF_XTAL_GND    | WRF_XTAL_VDD1P2    | WL_GPIO_4     |
| H | WL_GPIO_1             | WL_GPIO_0       | WL_GPIO_2          | WL_GPIO_6     |
| J | HSIC_AVDD12           | WL_VDDC         | WL_GPIO_3          | VSSC          |
| K | HSIC_STROBE           | HSIC_AVSS       | RF_SW_CTRL_7       | VDDIO_RF      |
| L | HSIC_DATA             | HSIC_RREF       | RF_SW_CTRL_2       | RF_SW_CTRL_4  |
| M | RF_SW_CTRL_5          | RF_SW_CTRL_1    | RF_SW_CTRL_0       | RF_SW_CTRL_6  |

|   | 5             | 6                 | 7             | 8               |
|---|---------------|-------------------|---------------|-----------------|
| A | WRF_RFOUT_2G  | WRF_RFIN_2G       | BT_PAVDD3P3   | BT_RF           |
| B | WRF_GNDPA_2G  | WRF_VDDLNA_1P2_2G | BT_IFVDD1P2   | BT_FEVSS        |
| C | WRF_PADRV_GND | WRF_GNDLNA_2G     | BT_IFVSS      | BT_VSS          |
| D | WRF_G_TSSI_IN | BT_UART_CTS_N     | BT_CLK_REQ_IN | BT_CLK_REQ_POL  |
| E | BT_PCM_CLK    | BT_UART_RXD       | BT_UART_TXD   | BT_CLK_REQ_MODE |
| F | BT_PCM_SYNC   | BT_UART_RTS_N     | WL_VDDC       | BT_VDDC         |
| G | BT_PCM_OUT    | VSSC              | VSSC          | VSSC            |
| H | WL_GPIO_5     | WL_VDDC           | LPO           | BT_I2S_WS       |
| J | VSSC          | VSSC              | BT_VDDIO      | BT_VDDC         |
| K | RF_SW_CTRL_3  | WL_VDDIO          | VDD_ISLAND    | BT_VDDC         |
| L | JTAG_SEL      | WL_VDDC           | SDIO_DATA_0   | SDIO_DATA_3     |
| M | SDIO_DATA_1   | SDIO_CLK          | SDIO_CMD      | SDIO_DATA_2     |

|   | 9            | 10           | 11          | 12             |
|---|--------------|--------------|-------------|----------------|
| A | BT_LNAVDD1P2 | BT_VCOVDD1P2 | FM_AOUT1    | FM_AOUT2       |
| B | BT_RFVSS     | BT_PLLVDD1P2 | FM_VDDAUDIO | FM_TX          |
| C | BT_VCOVSS    | FM_VSSAUDIO  | FM_IFVDD1P2 | FM_RFVDD_1P2   |
| D | BT_PLLVSS    | FM_PLLVSS    | FM_RFVSS    | FM_RXN         |
| E | FM_VSS       | FM_VDD2P5    | FM_VSSVCO   | FM_RXP         |
| F | BT_GPIO_0    | BT_RST_N     | BT_TM0      | BT_CLK_REQ_OUT |
| G | BT_I2S_CLK   | BT_I2S_DI    | BT_GPIO_4   | BT_GPIO_2      |
| H | BT_I2S_DO    | BT_GPIO_5    | BT_GPIO_1   | BT_GPIO_3      |
| J | EXT_SMPS_REQ | EXT_PWM_REQ  | VOUT_3P1    | VOUT_3P3       |
| K | BT_REG_ON    | PMU_AVSS     | SR_VDDBAT2  | SR_VDDBAT1     |
| L | WL_REG_ON    | VOUT_LNLD01  | SR_VLX      | SR_VDDBAT1     |
| M | VOUT_CLDO    | VIN_LDO      | SR_PVSS     | SR_VLX         |

Figure 38: 144-FCFBGA Ball Map (Top View)

|          | 12             | 11           | 10           | 9               | 8           | 7                 | 6             | 5            | 4              | 3                | 2                  | 1                      |          |
|----------|----------------|--------------|--------------|-----------------|-------------|-------------------|---------------|--------------|----------------|------------------|--------------------|------------------------|----------|
| <b>A</b> | FM_AOUT1       | BT_VCOVDD1P2 | BT_FEVSS     | BT_RF           | BT_PAVDD3P3 | WRF_RFIN_2G       | WRF_RFOUT_2G  |              | WRF_VDDPA      |                  | WRF_RFOUT_5G       |                        | <b>A</b> |
| <b>B</b> | FM_AOUT2       | BT_PLLVDD1P2 | BT_RFVSS     | BT_RFVDD1P2     | BT_IFVDD1P2 | WRF_VDDLNA_1P2_2G | WRF_PA_GND    |              | WRF_PA_GND     |                  | WRF_PA_GND         | WRF_RFIN_5G            | <b>B</b> |
| <b>C</b> | FM_TX          | FM_VSSAUDIO  | BT_PLLVSS    | BT_VSS          | BT_IFVSS    | WRF_GNDLNA_2G     |               | WRF_GND      | WRF_PADRV_GND  | WRF_PADRV_VDD    |                    | WRF_ANA_GND            | <b>C</b> |
| <b>D</b> | FM_RXN         | FM_RXP       | FM_VDDAUDIO  | BT_GPIO_1       | WL_GPIO_6   | BT_CLK_REQ_IN     | BT_UART_TXD   | WL_GPIO_3    | WRF_A_TSSI_IN  | WRF_LOGEN_A_GND  | WRF_LOGEN_A_VDD1P2 | WRF_VDDANA_1P2         | <b>D</b> |
| <b>E</b> | FM_RFVDD1P2    | FM_RXVSS     | FM_VDDPLL1P2 | BT_CLK_REQ_MODE | BT_VDDC     | WL_VDDC           | BT_UART_RXD   | WL_VSS_2     | WRF_GPIO_OUT   | WRF_RES_EXT      |                    | WRF_VDD_VCO_LDO_IN_1P8 | <b>E</b> |
| <b>F</b> | FM_VDD2P5      | FM_VSSVCO    | FM_PLLVSS    | BT_GPIO_0       | BT_VSSC     | BT_VDDIO          | BT_UART_RTS_N | JTAG_SEL     | WRF_AFE_GND    | WRF_TCXO_VDD     | WRF_VCOLDO_OUT_1P2 | WRF_VCO_GND            | <b>F</b> |
| <b>G</b> | BT_CLK_REQ_OUT | BT_TMO       | BT_RST_N     |                 | BT_I2S_WS   | BT_I2S_DI         | BT_UART_CTS_N | WL_GPIO_1    | WRF_VDDAFE_1P2 | WRF_TCXO_IN      |                    | WRF_XTAL_OP            | <b>G</b> |
| <b>H</b> | BT_GPIO_4      |              | BT_GPIO_2    | BT_GPIO_3       | BT_I2S_CLK  | BT_I2S_DO         | BT_PCM_CLK    | WL_GPIO_2    | WL_GPIO_0      | WRF_XTAL_VDD_1P2 | WRF_XTAL_GND       | WRF_XTAL_ON            | <b>H</b> |
| <b>J</b> | VOUT_3P3       | VOUT_3P1     | EXT_PWM_REQ  | BT_GPIO_5       | WL_GPIO_4   | LPO               | BT_PCM_IN     | BT_PCM_OUT   | RF_SW_CTRL_5   | RF_SW_CTRL_6     | RF_SW_CTRL_1       | HSIC_RREF              | <b>J</b> |
| <b>K</b> | SR_VDDBAT1     | SR_VDDBAT2   | BT_REG_ON    | EXT_SMPS_REQ    | BT_VDDC     | WL_VDDC           | BT_PCM_SYNC   | RF_SW_CTRL_0 | RF_SW_CTRL_7   | RF_SW_CTRL_4     | WL_VSS_0           | WL_VDDC                | <b>K</b> |
| <b>L</b> | SR_VDDBAT1     | PMU_AVSS     | VOUT_LNLD01  | WL_REG_ON       | SDIO_DATA_3 | SDIO_CMD          | WL_GPIO_5     | WL_VSS_1     | RF_SW_CTRL_2   | VDDIO_RF         | HSIC_DATA          | HSIC_AVDD12            | <b>L</b> |
| <b>M</b> | SR_VLX         | SR_PVSS      | VIN_LDO      | VOUT_CLDO       | SDIO_DATA_1 | SDIO_CLK          | SDIO_DATA_0   | SDIO_DATA_2  | RF_SW_CTRL_3   | WL_VDDO          | HSIC_STROBE        | HSIC_AVSS              | <b>M</b> |
|          | 12             | 11           | 10           | 9               | 8           | 7                 | 6             | 5            | 4              | 3                | 2                  | 1                      |          |

Figure 39: 133-WLBGA Ball Map (bottom view)

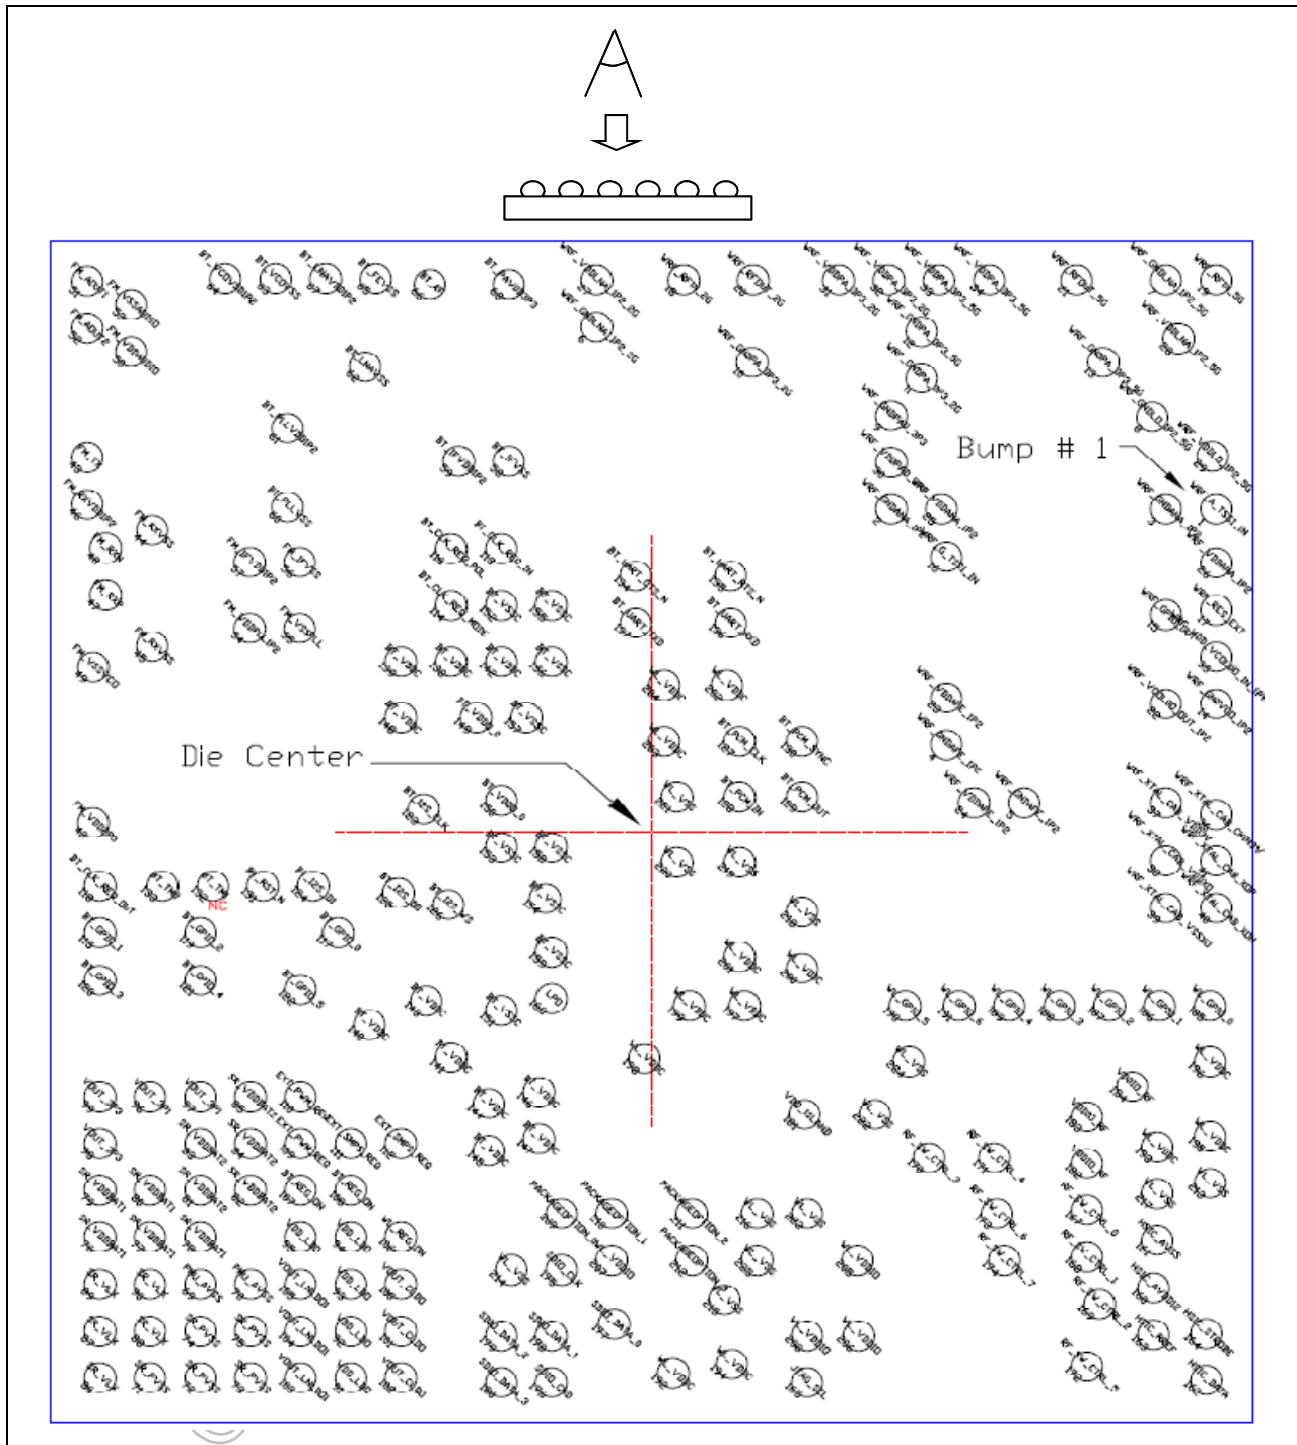


Figure 40: WLCSP 225-Bump Map (bottom view)

Table 17: WLCSP 225-Bump Coordinates

|             |                     | Bump Side View                  |      | Top Side View |      |
|-------------|---------------------|---------------------------------|------|---------------|------|
|             |                     | 0,0 is in the Center of the Die |      |               |      |
| Bump Number | Signal              | X                               | Y    | X             | Y    |
| 1           | WRF_A_TSSI_IN       | 2250                            | 1490 | -2250         | 1490 |
| 2           | WRF_ANA_GND         | 955                             | 1490 | -955          | 1490 |
| 3           | WRF_ANA_GND         | 2050                            | 1490 | -2050         | 1490 |
| 4           | WRF_AFE_GND         | 1175                            | 485  | -1175         | 485  |
| 5           | WRF_AFE_GND         | 1485                            | 235  | -1485         | 235  |
| 6           | WRF_GNDLNA_2G       | -220                            | 2270 | 220           | 2270 |
| 7           | WRF_GNDLNA_5G       | 2050                            | 2470 | -2050         | 2470 |
| 8           | WRF_LOGEN_A_GND     | 1995                            | 1885 | -1995         | 1885 |
| 9           | WRF_PADRV_GND       | 955                             | 1890 | -955          | 1890 |
| 10          | WRF_GNDPA_2G        | 400                             | 2120 | -400          | 2120 |
| 11          | WRF_GNDPA_2G        | 1075                            | 2050 | -1075         | 2050 |
| 12          | WRF_GNDPA_5G        | 1075                            | 2250 | -1075         | 2250 |
| 13          | WRF_GNDPA_5G        | 1800                            | 2120 | -1800         | 2120 |
| 14          | WRF_VCO_GND         | 2250                            | 660  | -2250         | 660  |
| 15          | WRF_GPIO_OUT        | 2050                            | 1040 | -2050         | 1040 |
| 16          | WRF_G_TSSI_IN       | 1175                            | 1285 | -1175         | 1285 |
| 17          | WRF_RES_EXT         | 2250                            | 1060 | -2250         | 1060 |
| 18          | WRF_RFIN_2G         | 128                             | 2470 | -128          | 2470 |
| 19          | WRF_RFIN_5G         | 2250                            | 2470 | -2250         | 2470 |
| 20          | WRF_RFOUT_2G        | 404                             | 2470 | -404          | 2470 |
| 21          | WRF_RFOUT_5G        | 1693                            | 2470 | -1693         | 2470 |
| 22          | WRF_VCOLD_O_OUT_1P2 | 2050                            | 660  | -2050         | 660  |
| 23          | WRF_VDDAFE_1P2      | 1175                            | 685  | -1175         | 685  |
| 24          | WRF_VDDAFE_1P2      | 1285                            | 235  | -1285         | 235  |
| 25          | WRF_VDDANA_1P2      | 1155                            | 1490 | -1155         | 1490 |
| 26          | WRF_LOGEN_A_VDD1P2  | 2250                            | 1260 | -2250         | 1260 |
| 27          | WRF_VDDLNA_1P2_2G   | -220                            | 2470 | 220           | 2470 |
| 28          | WRF_VDDLNA_1P2_5G   | 2100                            | 2220 | -2100         | 2220 |
| 29          | WRF_VDDL_O_1P2_5G   | 2235                            | 1715 | -2235         | 1715 |
| 30          | WRF_PADRV_VDD       | 955                             | 1690 | -955          | 1690 |
| 31          | WRF_VDDPA_2G        | 745                             | 2470 | -745          | 2470 |
| 32          | WRF_VDDPA_2G        | 945                             | 2470 | -945          | 2470 |
| 33          | WRF_VDDPA_5G        | 1145                            | 2470 | -1145         | 2470 |

Table 17: WLCSP 225-Bump Coordinates (Cont.)

|             |                       | Bump Side View                  |      | Top Side View |      |
|-------------|-----------------------|---------------------------------|------|---------------|------|
|             |                       | 0,0 is in the Center of the Die |      |               |      |
| Bump Number | Signal                | X                               | Y    | X             | Y    |
| 34          | WRF_VDDPA_5G          | 1345                            | 2470 | -1345         | 2470 |
| 35          | WRF_VDD_VCOLDO_IN_1P8 | 2250                            | 860  | -2250         | 860  |
| 36          | WRF_TCXO_IN           | 2250                            | 186  | -2250         | 186  |
| 37          | WRF_TCXO_VDD          | 2050                            | 235  | -2050         | 235  |
| 38          | WRF_XTAL_VDD1P2       | 2050                            | -14  | -2050         | -14  |
| 39          | WRF_XTAL_GND          | 2050                            | -214 | -2050         | -214 |
| 40          | WRF_XTAL_ON           | 2250                            | -214 | -2250         | -214 |
| 41          | WRF_XTAL_OP           | 2250                            | -14  | -2250         | -14  |
| 42          | FM_VDD2P5             | -2227                           | 151  | 2227          | 151  |
| 43          | FM_TX                 | -2250                           | 1711 | 2250          | 1711 |
| 44          | FM_RXVSS              | -1991                           | 1400 | 1991          | 1400 |
| 45          | FM_RXVSS              | -1991                           | 906  | 1991          | 906  |
| 46          | FM_RFVDD1P2           | -2250                           | 1511 | 2250          | 1511 |
| 47          | FM_RXP                | -2177                           | 1123 | 2177          | 1123 |
| 48          | FM_RXN                | -2177                           | 1323 | 2177          | 1323 |
| 49          | FM_VSSVCO             | -2227                           | 817  | 2227          | 817  |
| 50          | FM_VDDAUDIO           | -2076                           | 2165 | 2076          | 2165 |
| 51          | FM_AOUT1              | -2250                           | 2465 | 2250          | 2465 |
| 52          | FM_AOUT2              | -2250                           | 2265 | 2250          | 2265 |
| 53          | FM_VSSAUDIO           | -2076                           | 2365 | 2076          | 2365 |
| 54          | FM_VDDPLL1P2          | -1603                           | 983  | 1603          | 983  |
| 55          | FM_PLLVSS             | -1403                           | 983  | 1403          | 983  |
| 56          | FM_IFVSS              | -1403                           | 1263 | 1403          | 1263 |
| 57          | FM_IFVDD1P2           | -1603                           | 1263 | 1603          | 1263 |
| 58          | BT_IFVSS              | -570                            | 1695 | 570           | 1695 |
| 59          | BT_IFVDD1P2           | -770                            | 1695 | 770           | 1695 |
| 60          | BT_PLLVSS             | -1452                           | 1499 | 1452          | 1499 |
| 61          | BT_PLLVDD1P2          | -1452                           | 1837 | 1452          | 1837 |
| 62          | BT_LNAVSS             | -1143                           | 2101 | 1143          | 2101 |
| 63          | BT_VCOVSS             | -1500                           | 2475 | 1500          | 2475 |
| 64          | BT_VCOVDD1P2          | -1700                           | 2475 | 1700          | 2475 |
| 65          | BT_FEVSS              | -1100                           | 2475 | 1100          | 2475 |
| 66          | BT_RF                 | -885                            | 2452 | 885           | 2452 |
| 67          | BT_LNAVDD1P2          | -1300                           | 2475 | 1300          | 2475 |

**Table 17: WLCSP 225-Bump Coordinates (Cont.)**

|             |             | Bump Side View                  |       | Top Side View |       |
|-------------|-------------|---------------------------------|-------|---------------|-------|
|             |             | 0,0 is in the Center of the Die |       |               |       |
| Bump Number | Signal      | X                               | Y     | X             | Y     |
| 68          | BT_PAVDD3P3 | −570                            | 2452  | 570           | 2452  |
| 69          | PMU_AVSS    | −1800                           | −1820 | 1800          | −1820 |
| 70          | PMU_AVSS    | −1600                           | −1820 | 1600          | −1820 |
| 71          | SR_PVSS     | −2000                           | −2220 | 2000          | −2220 |
| 72          | SR_PVSS     | −1800                           | −2220 | 1800          | −2220 |
| 73          | SR_PVSS     | −1600                           | −2220 | 1600          | −2220 |
| 74          | SR_PVSS     | −1800                           | −2020 | 1800          | −2020 |
| 75          | SR_PVSS     | −1600                           | −2020 | 1600          | −2020 |
| 76          | SR_VDDBAT1  | −2200                           | −1620 | 2200          | −1620 |
| 77          | SR_VDDBAT1  | −2000                           | −1620 | 2000          | −1620 |
| 78          | SR_VDDBAT1  | −1800                           | −1620 | 1800          | −1620 |
| 79          | SR_VDDBAT1  | −2200                           | −1420 | 2200          | −1420 |
| 80          | SR_VDDBAT1  | −2000                           | −1420 | 2000          | −1420 |
| 81          | SR_VDDBAT2  | −1800                           | −1420 | 1800          | −1420 |
| 82          | SR_VDDBAT2  | −1600                           | −1420 | 1600          | −1420 |
| 83          | SR_VDDBAT2  | −1800                           | −1220 | 1800          | −1220 |
| 84          | SR_VDDBAT2  | −1600                           | −1220 | 1600          | −1220 |
| 85          | SR_VDDBAT2  | −1600                           | −1020 | 1600          | −1020 |
| 86          | SR_VLX      | −2200                           | −2220 | 2200          | −2220 |
| 87          | SR_VLX      | −2200                           | −2020 | 2200          | −2020 |
| 88          | SR_VLX      | −2000                           | −2020 | 2000          | −2020 |
| 89          | SR_VLX      | −2200                           | −1820 | 2200          | −1820 |
| 90          | SR_VLX      | −2000                           | −1820 | 2000          | −1820 |
| 91          | VDD_LDO     | −1200                           | −2220 | 1200          | −2220 |
| 92          | VDD_LDO     | −1200                           | −2020 | 1200          | −2020 |
| 93          | VDD_LDO     | −1200                           | −1820 | 1200          | −1820 |
| 94          | VDD_LDO     | −1200                           | −1620 | 1200          | −1620 |
| 95          | VDD_LDO     | −1400                           | −1620 | 1400          | −1620 |
| 96          | VOUT_3P1    | −2000                           | −1020 | 2000          | −1020 |
| 97          | VOUT_3P1    | −1800                           | −1020 | 1800          | −1020 |
| 98          | VOUT_3P3    | −2200                           | −1220 | 2200          | −1220 |
| 99          | VOUT_3P3    | −2200                           | −1020 | 2200          | −1020 |
| 100         | VOUT_CLDO   | −1000                           | −1820 | 1000          | −1820 |
| 101         | VOUT_CLDO   | −1000                           | −2020 | 1000          | −2020 |

Table 17: WLCSP 225-Bump Coordinates (Cont.)

|             |                 | Bump Side View                  |       | Top Side View |       |
|-------------|-----------------|---------------------------------|-------|---------------|-------|
|             |                 | 0,0 is in the Center of the Die |       |               |       |
| Bump Number | Signal          | X                               | Y     | X             | Y     |
| 102         | VOUT_CLDO       | −1000                           | −2220 | 1000          | −2220 |
| 103         | VOUT_LNLDO1     | −1400                           | −2220 | 1400          | −2220 |
| 104         | VOUT_LNLDO1     | −1400                           | −2020 | 1400          | −2020 |
| 105         | VOUT_LNLDO1     | −1400                           | −1820 | 1400          | −1820 |
| 106         | WL_REG_ON       | −1000                           | −1620 | 1000          | −1620 |
| 107         | BT_REG_ON       | −1400                           | −1420 | 1400          | −1420 |
| 108         | BT_REG_ON       | −1200                           | −1420 | 1200          | −1420 |
| 109         | EXT_PWM_REQ     | −1400                           | −1220 | 1400          | −1220 |
| 110         | EXT_PWM_REQ     | −1400                           | −1020 | 1400          | −1020 |
| 111         | EXT_SMPS_REQ    | −1200                           | −1220 | 1200          | −1220 |
| 112         | EXT_SMPS_REQ    | −1000                           | −1220 | 1000          | −1220 |
| 113         | BT_CLK_REQ_IN   | −600                            | 1320  | 600           | 1320  |
| 114         | BT_CLK_REQ_MODE | −800                            | 1080  | 800           | 1080  |
| 115         | BT_GPIO_1       | −2200                           | −320  | 2200          | −320  |
| 116         | BT_CLK_REQ_POL  | −800                            | 1320  | 800           | 1320  |
| 117         | BT_GPIO_0       | −1250                           | −320  | 1250          | −320  |
| 118         | BT_CLK_REQ_OUT  | −2200                           | −120  | 2200          | −120  |
| 119         | BT_GPIO_2       | −1800                           | −320  | 1800          | −320  |
| 120         | BT_GPIO_3       | −2200                           | −520  | 2200          | −520  |
| 121         | BT_GPIO_4       | −1800                           | −520  | 1800          | −520  |
| 122         | BT_GPIO_5       | −1400                           | −560  | 1400          | −560  |
| 123         | BT_I2S_CLK      | −910                            | 210   | 910           | 210   |
| 124         | BT_I2S_DI       | −1350                           | −120  | 1350          | −120  |
| 125         | BT_I2S_DO       | −1010                           | −150  | 1010          | −150  |
| 126         | BT_I2S_WS       | −810                            | −200  | 810           | −200  |
| 127         | BT_PCM_CLK      | 350                             | 500   | −350          | 500   |
| 128         | BT_PCM_IN       | 350                             | 260   | −350          | 260   |
| 129         | BT_PCM_OUT      | 600                             | 260   | −600          | 260   |
| 130         | BT_PCM_SYNC     | 600                             | 500   | −600          | 500   |
| 131         | BT_RST_N        | −1550                           | −120  | 1550          | −120  |
| 132         | BT_TM1          | −1750                           | −120  | 1750          | −120  |
| 133         | BT_TM0          | −1950                           | −120  | 1950          | −120  |
| 134         | BT_UART_CTS_N   | −65                             | 1205  | 65            | 1205  |
| 135         | BT_UART_RTS_N   | 315                             | 1205  | −315          | 1205  |

Table 17: WLCSP 225-Bump Coordinates (Cont.)

|             |              | Bump Side View                  |       | Top Side View |       |
|-------------|--------------|---------------------------------|-------|---------------|-------|
|             |              | 0,0 is in the Center of the Die |       |               |       |
| Bump Number | Signal       | X                               | Y     | X             | Y     |
| 136         | BT_UART_RXD  | 315                             | 1005  | -315          | 1005  |
| 137         | BT_UART_TXD  | -65                             | 1005  | 65            | 1005  |
| 138         | BT_VDDC      | -800                            | 840   | 800           | 840   |
| 139         | BT_VDDC      | -1000                           | 840   | 1000          | 840   |
| 140         | BT_VDDC      | -1125                           | -710  | 1125          | -710  |
| 141         | BT_VDDC      | -800                            | -850  | 800           | -850  |
| 142         | BT_VDDC      | -600                            | 840   | 600           | 840   |
| 143         | BT_VDDC      | -900                            | -610  | 900           | -610  |
| 144         | BT_VDDC      | -650                            | -1050 | 650           | -1050 |
| 145         | BT_VDDC      | -650                            | -1250 | 650           | -1250 |
| 146         | BT_VDDC      | -450                            | -1000 | 450           | -1000 |
| 147         | BT_VDDC      | -450                            | -1200 | 450           | -1200 |
| 148         | BT_VDDC      | -1000                           | 600   | 1000          | 600   |
| 149         | BT_VDDIO     | -700                            | 600   | 700           | 600   |
| 150         | BT_VDDIO     | -600                            | 245   | 600           | 245   |
| 151         | BT_VSSC      | -600                            | -650  | 600           | -650  |
| 152         | BT_VSSC      | -600                            | 1080  | 600           | 1080  |
| 153         | BT_VSSC      | -600                            | 45    | 600           | 45    |
| 154         | BT_VSSC      | -425                            | -175  | 425           | -175  |
| 155         | BT_VSSC      | -400                            | 1080  | 400           | 1080  |
| 156         | BT_VSSC      | -400                            | 840   | 400           | 840   |
| 157         | BT_VSSC      | -500                            | 600   | 500           | 600   |
| 158         | BT_VSSC      | -400                            | 45    | 400           | 45    |
| 159         | BT_VSSC      | -400                            | -400  | 400           | -400  |
| 160         | HSIC_AVDD12  | 2000                            | -1835 | -2000         | -1835 |
| 161         | HSIC_AVSS    | 2015                            | -1635 | -2015         | -1635 |
| 162         | HSIC_DATA    | 2210                            | -2230 | -2210         | -2230 |
| 163         | HSIC_RREF    | 2000                            | -2035 | -2000         | -2035 |
| 164         | HSIC_STROBE  | 2210                            | -2030 | -2210         | -2030 |
| 165         | JTAG_SEL     | 620                             | -2240 | -620          | -2240 |
| 166         | LPO          | -400                            | -600  | 400           | -600  |
| 167         | RF_SW_CTRL_0 | 1735                            | -1505 | -1735         | -1505 |
| 168         | RF_SW_CTRL_1 | 1735                            | -1705 | -1735         | -1705 |
| 169         | RF_SW_CTRL_2 | 1785                            | -1905 | -1785         | -1905 |

**Table 17: WLCSP 225-Bump Coordinates (Cont.)**

|             |              | Bump Side View                  |       | Top Side View |       |
|-------------|--------------|---------------------------------|-------|---------------|-------|
|             |              | 0,0 is in the Center of the Die |       |               |       |
| Bump Number | Signal       | X                               | Y     | X             | Y     |
| 170         | RF_SW_CTRL_3 | 1105                            | -1280 | -1105         | -1280 |
| 171         | RF_SW_CTRL_4 | 1365                            | -1280 | -1365         | -1280 |
| 172         | RF_SW_CTRL_5 | 1735                            | -2170 | -1735         | -2170 |
| 173         | RF_SW_CTRL_6 | 1375                            | -1520 | -1375         | -1520 |
| 174         | RF_SW_CTRL_7 | 1405                            | -1720 | -1405         | -1720 |
| 175         | SDIO_CLK     | -360                            | -1760 | 360           | -1760 |
| 176         | SDIO_CMD     | -400                            | -2240 | 400           | -2240 |
| 177         | SDIO_DATA_0  | -150                            | -1990 | 150           | -1990 |
| 178         | SDIO_DATA_1  | -400                            | -2040 | 400           | -2040 |
| 179         | SDIO_DATA_2  | -600                            | -2040 | 600           | -2040 |
| 180         | SDIO_DATA_3  | -600                            | -2240 | 600           | -2240 |
| 181         | VDD_ISLAND   | 610                             | -1095 | -610          | -1095 |
| 182         | VDDIO_RF     | 1735                            | -1305 | -1735         | -1305 |
| 183         | VDDIO_RF     | 1735                            | -1105 | -1735         | -1105 |
| 184         | VDDIO_RF     | 1915                            | -975  | -1915         | -975  |
| 185         | WL_GPIO_0    | 2225                            | -630  | -2225         | -630  |
| 186         | WL_GPIO_1    | 2025                            | -630  | -2025         | -630  |
| 187         | WL_GPIO_2    | 1825                            | -630  | -1825         | -630  |
| 188         | WL_GPIO_3    | 1625                            | -630  | -1625         | -630  |
| 189         | WL_GPIO_4    | 1425                            | -630  | -1425         | -630  |
| 190         | WL_GPIO_5    | 1010                            | -630  | -1010         | -630  |
| 191         | WL_GPIO_6    | 1225                            | -630  | -1225         | -630  |
| 192         | WL_VDDC      | 85                              | -2200 | -85           | -2200 |
| 193         | WL_VDDC      | 2015                            | -1235 | -2015         | -1235 |
| 194         | WL_VDDC      | 320                             | -2160 | -320          | -2160 |
| 195         | WL_VDDC      | 2225                            | -1190 | -2225         | -1190 |
| 196         | WL_VDDC      | 2225                            | -870  | -2225         | -870  |
| 197         | WL_VDDC      | 370                             | -630  | -370          | -630  |
| 198         | WL_VDDC      | -30                             | -855  | 30            | -855  |
| 199         | WL_VDDC      | 150                             | -630  | -150          | -630  |
| 200         | WL_VDDC      | 600                             | -470  | -600          | -470  |
| 201         | WL_VDDC      | 350                             | -420  | -350          | -420  |
| 202         | WL_VDDC      | 300                             | 740   | -300          | 740   |
| 203         | WL_VDDC      | 50                              | 500   | -50           | 500   |

**Table 17: WLCSP 225-Bump Coordinates (Cont.)**

|             |                 | Bump Side View                  |       | Top Side View |       |
|-------------|-----------------|---------------------------------|-------|---------------|-------|
|             |                 | 0,0 is in the Center of the Die |       |               |       |
| Bump Number | Signal          | X                               | Y     | X             | Y     |
| 204         | WL_VDDC         | 50                              | 740   | −50           | 740   |
| 205         | WL_VDDIO        | 820                             | −1720 | −820          | −1720 |
| 206         | WL_VDDIO        | 825                             | −2040 | −825          | −2040 |
| 207         | WL_VDDIO        | −160                            | −1720 | 160           | −1720 |
| 208         | WL_VDDIO        | 620                             | −2040 | −620          | −2040 |
| 209         | PACKAGEOPTION_0 | −360                            | −1520 | 360           | −1520 |
| 210         | PACKAGEOPTION_1 | −160                            | −1520 | 160           | −1520 |
| 211         | PACKAGEOPTION_2 | 160                             | −1520 | −160          | −1520 |
| 212         | PACKAGEOPTION_3 | 160                             | −1720 | −160          | −1720 |
| 213         | WL_VSS          | 2225                            | −1390 | −2225         | −1390 |
| 214         | WL_VSS          | −560                            | −1760 | 560           | −1760 |
| 215         | WL_VSS          | 290                             | −1885 | −290          | −1885 |
| 216         | WL_VSS          | 420                             | −1520 | −420          | −1520 |
| 217         | WL_VSS          | 2015                            | −1435 | −2015         | −1435 |
| 218         | WL_VSS          | 600                             | −230  | −600          | −230  |
| 219         | WL_VSS          | 350                             | −20   | −350          | −20   |
| 220         | WL_VSS          | 100                             | −20   | −100          | −20   |
| 221         | WL_VSS          | 100                             | 260   | −100          | 260   |
| 222         | WL_VSS          | 890                             | −1095 | −890          | −1095 |
| 223         | WL_VSS          | 620                             | −1520 | −620          | −1520 |
| 224         | WL_VSS          | 1025                            | −870  | −1025         | −870  |
| 225         | WL_VSS          | 420                             | −1720 | −420          | −1720 |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions**

| Ball#             |       | Bump#   |                       | Signal Name | Type                                                                                                                                  | Description |
|-------------------|-------|---------|-----------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------|-------------|
| FCFBGA            | WLBGA | WLCSP   |                       |             |                                                                                                                                       |             |
| WLAN RF Interface |       |         |                       |             |                                                                                                                                       |             |
| E4                | E3    | 17      | WRF_RES_EXT           | I           | Connect to external 15 kΩ (1%) to ground                                                                                              |             |
| A1                | B1    | 19      | WRF_RFIN_5G           | I           | WLAN 802.11a internal LNA Rx input                                                                                                    |             |
| A2                | A2    | 21      | WRF_RFOUT_5G          | O           | WLAN 802.11a internal power amplifier output                                                                                          |             |
| A6                | A7    | 18      | WRF_RFIN_2G           | I           | WLAN 802.11b/g and BT shared LNA RX input                                                                                             |             |
| A5                | A6    | 20      | WRF_RFOUT_2G          | O           | WLAN 802.11b/g internal power amplifier output                                                                                        |             |
| B3                | D4    | 1       | WRF_A_TSSI_IN         | I           | TSSI_11a-band (see reference schematics)                                                                                              |             |
| D5                | —     | 16      | WRF_G_TSSI_IN         | I           | TSSI_11g-band (see reference schematics). For the WLBGA package, WRF_GPIO_OUT can be used as an 11g-band TSSI input.                  |             |
| RF Control Lines  |       |         |                       |             |                                                                                                                                       |             |
| M3                | K5    | 167     | RF_SW_CTRL_0          | O           | Programmable RF switch control lines. The control lines are programmable via the driver and NVRAM file. Contact Broadcom for details. |             |
| M2                | J2    | 168     | RF_SW_CTRL_1          | O           |                                                                                                                                       |             |
| L3                | L4    | 169     | RF_SW_CTRL_2          | O           |                                                                                                                                       |             |
| K5                | M4    | 170     | RF_SW_CTRL_3          | O           |                                                                                                                                       |             |
| L4                | K3    | 171     | RF_SW_CTRL_4          | O           |                                                                                                                                       |             |
| M1                | J4    | 172     | RF_SW_CTRL_5          | O           |                                                                                                                                       |             |
| M4                | J3    | 173     | RF_SW_CTRL_6          | O           |                                                                                                                                       |             |
| K3                | K4    | 174     | RF_SW_CTRL_7          | O           |                                                                                                                                       |             |
| Integrated LDOs   |       |         |                       |             |                                                                                                                                       |             |
| L10               | L10   | 103–105 | VOUT_LNLDO1           | O           | Output of low noise LNLDO1                                                                                                            |             |
| M9                | M9    | 100–102 | VOUT_CLDO             | O           | Output of core LDO                                                                                                                    |             |
| D1                | E1    | 35      | WRF_VDD_VCOLDO_IN_1P8 | I           | Input to VCOLD0                                                                                                                       |             |
| D3                | F2    | 22      | WRF_VCOLDO_OUT_1P2    | O           | Output of VCOLD0                                                                                                                      |             |
| M10               | M10   | 91–95   | VIN_LDO               | I           | Input supply pin to LDO                                                                                                               |             |
| J11               | J11   | 96–97   | VOUT_3P1              | O           | LDO3p1 output (+3.1V output by default)                                                                                               |             |
| J12               | J12   | 98–99   | VOUT_3P3              | O           | LDO3p3 output (+3.3V output by default)                                                                                               |             |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions (Cont.)**

| Ball#                                                                                                                                                                                                                                                                                                                                                                                                                                                         |          | Bump# |             | Signal Name | Type                                                                | Description |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|-------|-------------|-------------|---------------------------------------------------------------------|-------------|
| FCFBGA                                                                                                                                                                                                                                                                                                                                                                                                                                                        | WLBGA    | WLCSP |             |             |                                                                     |             |
| Integrated Switching Regulators                                                                                                                                                                                                                                                                                                                                                                                                                               |          |       |             |             |                                                                     |             |
| L12, K12                                                                                                                                                                                                                                                                                                                                                                                                                                                      | L12, K12 | 76–80 | SR_VDDBAT1  | I           | Buck regulator: Battery Voltage Input                               |             |
| K11                                                                                                                                                                                                                                                                                                                                                                                                                                                           | K11      | 81–85 | SR_VDDBAT2  | I           |                                                                     |             |
| L11, M12                                                                                                                                                                                                                                                                                                                                                                                                                                                      | M12      | 86–90 | SR_VLX      | O           | Core buck regulator: output to inductor                             |             |
| WLAN SDIO Bus Interface                                                                                                                                                                                                                                                                                                                                                                                                                                       |          |       |             |             |                                                                     |             |
| L7                                                                                                                                                                                                                                                                                                                                                                                                                                                            | M6       | 177   | SDIO_DATA_0 | I/O         | SDIO data line 0                                                    |             |
| M5                                                                                                                                                                                                                                                                                                                                                                                                                                                            | M8       | 178   | SDIO_DATA_1 | I/O         | SDIO data line 1                                                    |             |
| M8                                                                                                                                                                                                                                                                                                                                                                                                                                                            | M5       | 179   | SDIO_DATA_2 | I/O         | SDIO data line 2                                                    |             |
| L8                                                                                                                                                                                                                                                                                                                                                                                                                                                            | L8       | 180   | SDIO_DATA_3 | I/O         | SDIO data line 3                                                    |             |
| M6                                                                                                                                                                                                                                                                                                                                                                                                                                                            | M7       | 175   | SDIO_CLK    | I           | SDIO clock                                                          |             |
| M7                                                                                                                                                                                                                                                                                                                                                                                                                                                            | L7       | 176   | SDIO_CMD    | I/O         | SDIO command line                                                   |             |
| <b>Note:</b> See Table 19 and Table 20 for further details on how WL_GPIO_6, SDIO_DATA1, and SDIO_DATA2 are used as strapping options.                                                                                                                                                                                                                                                                                                                        |          |       |             |             |                                                                     |             |
| <b>Note:</b> For HSIC mode:                                                                                                                                                                                                                                                                                                                                                                                                                                   |          |       |             |             |                                                                     |             |
| <ul style="list-style-type: none"><li>• Pull WL_GPIO_6 high with a resistor between 4.7–10 kΩ.</li><li>• Pull SDIO_DATA2 high, either directly to VIO or through no more than 10 kΩ.</li><li>• Pull SDIO_DATA1 low either directly to ground or through no more than 10 kΩ.</li><li>• Tie all other SDIO data lines high, either directly to VIO or through a resistor.</li><li>• Ground the SDIO_CLK pin.</li><li>• SDIO_CMD can be left floating.</li></ul> |          |       |             |             |                                                                     |             |
| JTAG Interface                                                                                                                                                                                                                                                                                                                                                                                                                                                |          |       |             |             |                                                                     |             |
| L5                                                                                                                                                                                                                                                                                                                                                                                                                                                            | F5       | 165   | JTAG_SEL    | I           | JTAG selection pin (pulled HIGH by default)                         |             |
| –                                                                                                                                                                                                                                                                                                                                                                                                                                                             | –        | –     | TCK         | I           | These JTAG signals can be enabled by software on pins WL_GPIO[1:5]. |             |
| –                                                                                                                                                                                                                                                                                                                                                                                                                                                             | –        | –     | TDI         | I           |                                                                     |             |
| –                                                                                                                                                                                                                                                                                                                                                                                                                                                             | –        | –     | TDO         | I           | TMS                                                                 | WL_GPIO1    |
| –                                                                                                                                                                                                                                                                                                                                                                                                                                                             | –        | –     | TMS         | I           | TCK                                                                 | WL_GPIO2    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |       |             |             | TDI                                                                 | WL_GPIO3    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |       |             |             | TDO                                                                 | WL_GPIO4    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                               |          |       |             |             | TRST_L                                                              | WL_GPIO5    |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions (Cont.)**

| Ball#          |       | Bump# |  | Signal Name | Type | Description                                                                                                                                                 |
|----------------|-------|-------|--|-------------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCFBGA         | WLBGA | WLCSP |  |             |      |                                                                                                                                                             |
| HSIC Interface |       |       |  |             |      |                                                                                                                                                             |
| K1             | M2    | 164   |  | HSIC_STROBE | I/O  | HSIC bidirectional data strobe signal. HSIC terminations are built in, external resistors are not needed. On SDIO designs this pin should not be connected. |
| L1             | L2    | 162   |  | HSIC_DATA   | I/O  | HSIC bidirectional DDR data signal. HSIC terminations are built in, external resistors are not needed. On SDIO designs this pin should not be connected.    |
| L2             | J1    | 163   |  | HSIC_RREF   | I    | HSIC bias pin. Connect to ground via a 49.9 Ohm series resistor. On SDIO designs this pin should not be connected.                                          |
| Clocks         |       |       |  |             |      |                                                                                                                                                             |
| F1             | G1    | 41    |  | WRF_XTAL_OP | I    | Crystal oscillator input                                                                                                                                    |
| G1             | H1    | 40    |  | WRF_XTAL_ON | O    | Crystal oscillator output                                                                                                                                   |
| F2             | G3    | 36    |  | WRF_TCXO_IN | I    | External TCXO input                                                                                                                                         |
| H7             | J7    | 166   |  | LPO         | I    | Input for external low-power clock                                                                                                                          |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions (Cont.)**

| Ball#          |       | Bump# |               | Signal Name | Type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Description |
|----------------|-------|-------|---------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| FCFBGA         | WLBGA | WLCSP |               |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| WLAN GPIO      |       |       |               |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| D4             | E4    | 15    | WRF_GPIO_OUT  | O           | Auxiliary RF I/O (see reference schematics). For the WLBGA package, WRF_GPIO_OUT can be used as an 11g-band TSSI signal.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |
| H2             | H4    | 185   | WL_GPIO_0     | I/O         | WLAN general interface pins. These pins are high-impedance on power up and reset. Subsequently, they become inputs or outputs through software control. These pins have programmable pull-up/down.<br>WL_GPIO_0 may be configured by software to function as SDIO_Host_Wake.<br>WL_GPIO[1:5] may be enabled as JTAG signals (see“JTAG Interface” on page 73).<br>WL_GPIO[3:4] may be configured by software to function as UART_RX and UART_TX. WL_GPIO[1:5] can be configured as external coexistence interface pins (see “External Coexistence Interface” on page 73).<br>For HSIC mode pull WL_GPIO_6 high with a resistor between 4.7–10 kΩ.<br><b>Note:</b> See Table 19 and Table 20 for further details on how WL_GPIO_6, SDIO_DATA1, and SDIO_DATA2 are used as strapping options. |             |
| H1             | G5    | 186   | WL_GPIO_1     | I/O         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| H3             | H5    | 187   | WL_GPIO_2     | I/O         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| J3             | D5    | 188   | WL_GPIO_3     | I/O         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| G4             | J8    | 189   | WL_GPIO_4     | I/O         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| H5             | L6    | 190   | WL_GPIO_5     | I/O         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| H4             | D8    | 191   | WL_GPIO_6     | I/O         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| FM Transceiver |       |       |               |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| A11            | A12   | 51    | FM_AOUT1      | O           | FM analog audio output channel 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |
| A12            | B12   | 52    | FM_AOUT2      | O           | FM analog audio output channel 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |
| B12            | C12   | 43    | FM_TX         | O           | FM radio RF output antenna port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| E12            | D11   | 47    | FM_RXP        | I           | FM radio RF antenna port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |
| D12            | D12   | 48    | FM_RXN        | I           | FM radio RF antenna port                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |
| Bluetooth UART |       |       |               |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |
| E6             | E6    | 136   | BT_UART_RXD   | I/O         | Bluetooth UART signal input. Serial data input for the HCI UART Interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |
| E7             | D6    | 137   | BT_UART_TXD   | I/O         | Bluetooth UART signal output. Serial data input for the HCI UART Interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |
| F6             | F6    | 135   | BT_UART_RTS_N | I/O         | Bluetooth UART REquest to Send. Active-low request-to-send signal for the HCI UART interface.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions (Cont.)**

| Ball#                         |       | Bump# |  | Signal Name     | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------------|-------|-------|--|-----------------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCFBGA                        | WLBGA | WLCSP |  |                 |      |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| D6                            | G6    | 134   |  | BT_UART_CTS_N   | I/O  | Bluetooth UART clear to send. Active-low clear-to-send signal for the HCI UART interface.                                                                                                                                                                                                                                                                                                                                 |
| Bluetooth Test Mode           |       |       |  |                 |      |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| F11                           | G11   | 133   |  | BT_TM0          | I    | Bluetooth test mode pin (no connect)                                                                                                                                                                                                                                                                                                                                                                                      |
| –                             | –     | 132   |  | BT_TM1          | I    | Bluetooth test mode pin (no connect)                                                                                                                                                                                                                                                                                                                                                                                      |
| Bluetooth                     |       |       |  |                 |      |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| A8                            | A9    | 66    |  | BT_RF           | O    | Bluetooth PA output                                                                                                                                                                                                                                                                                                                                                                                                       |
| D7                            | D7    | 113   |  | BT_CLK_REQ_IN   | I    | Reference clock request input. Leave as a no connect. To use this pin as an external clock request input, consult with Broadcom.                                                                                                                                                                                                                                                                                          |
| D8                            | –     | 116   |  | BT_CLK_REQ_POL  | I    | Polarity selection for BT_CLK_REQ_OUT. This pin has an internal pull-down that makes BT_CLK_REQ_OUT active-high by default. Leave it as a no connect when using a dedicated crystal or when implementing clock sharing.                                                                                                                                                                                                   |
| E8                            | E9    | 114   |  | BT_CLK_REQ_MODE | I    | Reference clock request mode. Pull this pin low (tie it directly to GND) if a dedicated crystal is used, or when connecting BT_CLK_REQ_OUT to a TCXO or implementing clock sharing with the host.                                                                                                                                                                                                                         |
| F12                           | G12   | 118   |  | BT_CLK_REQ_OUT  | O    | Reference clock request output signal for WLAN/BT. Leave this pin as a no connect when using a dedicated crystal. For clock sharing with a TCXO, the signal is active-high by default when the BCM4330 is requesting the reference clock. The signal goes low when the reference clock is not needed (that is, in sleep mode). Provide an external 100 kΩ pull-down to this pin to prevent it from floating during reset. |
| Bluetooth/FM I <sup>2</sup> S |       |       |  |                 |      |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| G9                            | H8    | 123   |  | BT_I2S_CLK      | I    | Bluetooth I <sup>2</sup> S pins                                                                                                                                                                                                                                                                                                                                                                                           |
| G10                           | G7    | 124   |  | BT_I2S_DI       | I/O  |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| H8                            | G8    | 126   |  | BT_I2S_WS       | I/O  |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| H9                            | H7    | 125   |  | BT_I2S_DO       | I/O  |                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Bluetooth PCM                 |       |       |  |                 |      |                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions (Cont.)**

| Ball#              |       | Bump#   |              | Signal Name | Type                                                                                                                                                                                                                                                                                                 | Description |
|--------------------|-------|---------|--------------|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| FCFBGA             | WLBGA | WLCSP   |              |             |                                                                                                                                                                                                                                                                                                      |             |
| E5                 | H6    | 127     | BT_PCM_CLK   | I/O         | PCM clock, can be master (output) or slave (input)                                                                                                                                                                                                                                                   |             |
| F4                 | J6    | 128     | BT_PCM_IN    | I/O         | PCM data input                                                                                                                                                                                                                                                                                       |             |
| G5                 | J5    | 129     | BT_PCM_OUT   | I/O         | PCM data output                                                                                                                                                                                                                                                                                      |             |
| F5                 | K6    | 130     | BT_PCM_SYNC  | I/O         | PCM sync signal, can be master (output) or slave (input)                                                                                                                                                                                                                                             |             |
| Bluetooth GPIO     |       |         |              |             |                                                                                                                                                                                                                                                                                                      |             |
| F9                 | F9    | 117     | BT_GPIO_0    | I/O         | Bluetooth general interface pins. These pins are high impedance during power-up and reset. Subsequently, they become inputs or outputs through software control. These pins have programmable pull-ups and pull-downs. See <a href="#">Table 23: “I/O States,” on page 117</a> for more information. |             |
| H11                | D9    | 115     | BT_GPIO_1    | I/O         |                                                                                                                                                                                                                                                                                                      |             |
| G12                | H10   | 119     | BT_GPIO_2    | I/O         |                                                                                                                                                                                                                                                                                                      |             |
| H12                | H9    | 120     | BT_GPIO_3    | I/O         |                                                                                                                                                                                                                                                                                                      |             |
| G11                | H12   | 121     | BT_GPIO_4    | I/O         |                                                                                                                                                                                                                                                                                                      |             |
| H10                | J9    | 122     | BT_GPIO_5    | I/O         |                                                                                                                                                                                                                                                                                                      |             |
| Miscellaneous      |       |         |              |             |                                                                                                                                                                                                                                                                                                      |             |
| L9                 | L9    | 106     | WL_REG_ON    | I           | Used by PMU (OR-gated with BT_REG_ON) to power up or power down the internal BCM4330 regulators used by the WLAN section. This pin is also a low-asserting reset for WLAN only (Bluetooth is not affected by this pin).<br>Logic High Level: 1.08V–3.6V<br>200k pull-down resistor included.         |             |
| K9                 | K10   | 107–108 | BT_REG_ON    | I           | Used by PMU (OR-gated with WL_REG_ON) to power up or power down internal BCM4330 regulators used by the BT/FM section.<br>Logic High Level: 1.08V–3.6V<br>200k pull-down resistor included.                                                                                                          |             |
| F10                | G10   | 131     | BT_RST_N     | I           | Low asserting reset for Bluetooth/FM only (WLAN is not affected by this pin).                                                                                                                                                                                                                        |             |
| J9                 | K9    | 111–112 | EXT_SMPS_REQ | I           | Auxiliary PMU control inputs (see <a href="#">“Reset Circuits” on page 31</a> ). These pins have 200k internal pull-down resistors and should be no-connect when not used.<br>Logic High Level: 1.08V–3.6V                                                                                           |             |
| J10                | J10   | 109–110 | EXT_PWM_REQ  | I           |                                                                                                                                                                                                                                                                                                      |             |
| Bluetooth Supplies |       |         |              |             |                                                                                                                                                                                                                                                                                                      |             |
| A7                 | A8    | 68      | BT_PAVDD3P3  | I           | 3.3V Bluetooth internal PA power supply                                                                                                                                                                                                                                                              |             |
| –                  | B9    | –       | BT_RFVDD1P2  | I           | 1.2V Bluetooth power supply                                                                                                                                                                                                                                                                          |             |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions (Cont.)**

| <b>Ball#</b>                   |              | <b>Bump#</b> | <b>Signal Name</b> | <b>Type</b> | <b>Description</b>                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------|--------------|--------------|--------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FCFBGA</b>                  | <b>WLBGA</b> | <b>WLCSP</b> |                    |             |                                                                                                                                                                                                                                                                                                                                                    |
| A9                             | –            | 67           | BT_LNAVDD1P2       | I           | 1.2V Bluetooth LNA power supply                                                                                                                                                                                                                                                                                                                    |
| A10                            | A11          | 64           | BT_VCOVDD1P2       | I           | 1.2V Bluetooth VCO power supply                                                                                                                                                                                                                                                                                                                    |
| B7                             | B8           | 59           | BT_IFVDD1P2        | I           | 1.2V Bluetooth IF block power supply                                                                                                                                                                                                                                                                                                               |
| B10                            | B11          | 61           | BT_PLLVDD1P2       | I           | 1.2V Bluetooth PLL power supply                                                                                                                                                                                                                                                                                                                    |
| F8, J8, K8                     | K8, E8       | 138–148      | BT_VDDC            | I           | 1.2V Bluetooth baseband core supply                                                                                                                                                                                                                                                                                                                |
| <b>WLAN Supplies</b>           |              |              |                    |             |                                                                                                                                                                                                                                                                                                                                                    |
| A3                             | –            | 33, 34       | WRF_VDDPA_5G       | I           | VDD power supply (from VBAT) for the internal 11a-band power amplifier                                                                                                                                                                                                                                                                             |
| A4                             | –            | 31, 32       | WRF_VDDPA_2G       | I           | VDD power supply (from VBAT) for the internal 11g-band power amplifier                                                                                                                                                                                                                                                                             |
| –                              | A4           | –            | WRF_VDDPA          | I           | VDD power supply (from VBAT) for both internal power amplifiers                                                                                                                                                                                                                                                                                    |
| C4                             | C3           | 30           | WRF_PADRV_VDD      | I           | VDD power supply (from VBAT) supply for the WLAN PA driver                                                                                                                                                                                                                                                                                         |
| B1                             | –            | 28           | WRF_VDDLNA_1P2_5G  | I           | 1.2V supply for the 11a-band internal LNA. If the IEEE 802.11a band is not used, tie this supply pin to WRF_VDDLNA_1P2_2G.                                                                                                                                                                                                                         |
| B6                             | B7           | 27           | WRF_VDDLNA_1P2_2G  | I           | 1.2V supply for the 11g-band internal LNA                                                                                                                                                                                                                                                                                                          |
| G3                             | H3           | 38           | WRF_XTAL_VDD1P2    | I           | 1.2V supply for the crystal oscillator circuit                                                                                                                                                                                                                                                                                                     |
| E1                             | F3           | 37           | WRF_TCXO_VDD       | I           | 1.7V to 3.3V supply for the BCM4330 TCXO driver. To maintain a constant load on the WRF_TCXO_IN pin (even when power is removed from the BCM4330), connect this supply pin to a 1.7V to 3.3V supply that is always present. If not used, this pin must be connected to ground (see <a href="#">Section 3: “Frequency References,”</a> on page 32). |
| C1                             | D2           | 29           | WRF_LOGEN_A_VDD1P2 | I           | 1.2V supply for WLAN PLL                                                                                                                                                                                                                                                                                                                           |
| E3                             | G4           | 23, 24       | WRF_VDDAFE_1P2     | I           | 1.2V supply for WLAN AFE                                                                                                                                                                                                                                                                                                                           |
| D2                             | D1           | 25–26        | WRF_VDDANA_1P2     | I           | 1.2V supply for WLAN ADC/DAC block                                                                                                                                                                                                                                                                                                                 |
| F7, H6, J2, L6                 | E7, K7, K1   | 192–204      | WL_VDDC            | I           | 1.2V supply for WLAN core                                                                                                                                                                                                                                                                                                                          |
| <b>FM Transceiver Supplies</b> |              |              |                    |             |                                                                                                                                                                                                                                                                                                                                                    |
| C12                            | E12          | 46           | FM_RFVDD1P2        | I           | 1.2V FM transceiver power supply                                                                                                                                                                                                                                                                                                                   |
| C11                            | –            | 57           | FM_IFVDD1P2        | I           | 1.2V FM IF power supply                                                                                                                                                                                                                                                                                                                            |
| –                              | E10          | 54           | FM_VDDPLL1P2       | I           | 1.2V FM PLL power supply                                                                                                                                                                                                                                                                                                                           |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions (Cont.)**

| <b>Ball#</b>                  |              | <b>Bump#</b> | <b>Signal Name</b> | <b>Type</b> | <b>Description</b>                                                        |
|-------------------------------|--------------|--------------|--------------------|-------------|---------------------------------------------------------------------------|
| <b>FCFBGA</b>                 | <b>WLBGA</b> | <b>WLCSP</b> |                    |             |                                                                           |
| E10                           | F12          | 42           | FM_VDD2P5          | I           | FM power supply (nominal 3.1V)                                            |
| B11                           | D10          | 50           | FM_VDDAUDIO        | I           | FM audio power supply                                                     |
| <b>Miscellaneous Supplies</b> |              |              |                    |             |                                                                           |
| J1                            | L1           | 160          | HSIC_AVDD12        | I           | 1.2V HSIC power supply: on SDIO designs this pin should not be connected. |
| K4                            | L3           | 182–184      | VDDIO_RF           | I/O         | RF I/O supply (3.3V)                                                      |
| K6                            | M3           | 205–208      | WL_VDDIO           | I           | WLAN digital I/O supply (1.2V to 2.5V)                                    |
| J7                            | F7           | 149–150      | BT_VDDIO           |             | BT digital I/O supply (1.2V to 2.5V)                                      |
| –                             | –            | 212          | PACKAGEOPTION_3    | I           | Connect to VDD                                                            |
| <b>Ground</b>                 |              |              |                    |             |                                                                           |
| C2                            | D3           | 8            | WRF_LOGEN_A_GND    | I           | WLAN 11a-band LO ground                                                   |
| B4                            | –            | 12–13        | WRF_GNDPA_5G       | I           | WLAN 11a-band PA ground                                                   |
| B5                            | –            | 10–11        | WRF_GNDPA_2G       | I           | WLAN 11g-band PA ground                                                   |
| –                             | B2, B4, B6   | –            | WRF_PA_GND         | I           | WLAN PA ground                                                            |
| C5                            | C4           | 9            | WRF_PADRV_GND      | I           | WLAN PA driver ground                                                     |
| B2                            | –            | 7            | WRF_GNDLNA_5G      | I           | WLAN 11a-band LNA ground                                                  |
| C6                            | C7           | 6            | WRF_GNDLNA_2G      | I           | WLAN 11g-band LNA ground                                                  |
| C3                            | C1           | 2–3          | WRF_ANA_GND        | I           | WLAN ADC/DAC ground                                                       |
| E2                            | F1           | 14           | WRF_VCO_GND        | I           | WLAN VCO ground                                                           |
| F3                            | F4           | 4–5          | WRF_AFE_GND        | I           | WLAN AFE ground                                                           |
| G2                            | H2           | 39           | WRF_XTAL_GND       | I           | WLAN PLL ground                                                           |
| –                             | K2           | –            | WL_VSS_0           | I           | WLAN ground                                                               |
| –                             | L5           | –            | WL_VSS_1           | I           |                                                                           |
| –                             | E5           | –            | WL_VSS_2           | I           |                                                                           |
| –                             | C5           | –            | WRF_GND            | I           | WLAN RF block ground                                                      |
| C7                            | C8           | 58           | BT_IFVSS           | I           | Bluetooth IF block ground                                                 |
| C8                            | C9           | –            | BT_VSS             | I           | Bluetooth ground                                                          |
| B8                            | A10          | 65           | BT_FEVSS           | I           | Bluetooth ground                                                          |
| C9                            | –            | 63           | BT_VCOVSS          | I           | Bluetooth VCO ground                                                      |
| B9                            | B10          | –            | BT_RFVSS           | I           | Bluetooth ground                                                          |
| D9                            | C10          | 60           | BT_PLLVSS          | I           | Bluetooth PLL ground                                                      |
| –                             | –            | 62           | BT_LNAVSS          | I           | Bluetooth LNA ground                                                      |
| –                             | F8           | 151–159      | BT_VSSC            | I           | Bluetooth ground                                                          |

**Table 18: FCFBGA, WLBGA, and WLCSP Signal Descriptions (Cont.)**

| <b>Ball#</b>                 |              | <b>Bump#</b> | <b>Signal Name</b> | <b>Type</b> | <b>Description</b>         |
|------------------------------|--------------|--------------|--------------------|-------------|----------------------------|
| <b>FCFBGA</b>                | <b>WLBGA</b> | <b>WLCSP</b> |                    |             |                            |
| –                            | –            | 209          | PACKAGEOPTION_0    | I           | Connect to ground          |
| –                            | –            | 210          | PACKAGEOPTION_1    | I           |                            |
| –                            | –            | 211          | PACKAGEOPTION_2    | I           |                            |
| C10                          | C11          | 53           | FM_VSSAUDIO        | I           | FM audio ground            |
| D11                          | E11          | 44–45        | FM_RXVSS           | I           | FM receiver ground         |
| E11                          | F11          | 49           | FM_VSSVCO          | I           | FM VCO ground              |
| D10                          | F10          | 55           | FM_PLLVSS          | I           | FM PLL ground              |
| E9                           | –            | –            | FM_VSS             | I           | FM ground                  |
| –                            | –            | 56           | FM_IFVSS           | I           | FM IF block ground         |
| G6, G7,<br>G8, J4,<br>J5, J6 | –            | –            | VSSC               | I           | Ground                     |
| K2                           | M1           | 161          | HSIC_AVSS          | I           | HSIC block ground          |
| K10                          | L11          | 69–70        | PMU_AVSS           | I           | PMU block analog ground    |
| M11                          | M11          | 71–75        | SR_PVSS            | I           | Switching regulator ground |
| –                            | –            | 213–225      | WL_VSS             | I           | WLAN ground                |
| <b>No Connect</b>            |              |              |                    |             |                            |
| A1, A2                       | –            | –            | NC                 | N/A         | No connect                 |
| K7                           | –            | 181          | VDD_ISLAND         | I           | No connect                 |

## WLAN GPIO Signals and Strapping Options

The pins listed in Table 19 are sampled at power-on reset (POR) to determine the various operating modes. Sampling occurs a few milliseconds after an internal POR or deassertion of the external POR. After the POR, each pin assumes the GPIO or alternative function specified in the signal descriptions table. Each strapping option pin has an internal pull-up (PU) or pull-down (PD) resistor that determines the default mode. To change the mode, connect an external PU resistor to VDDIO or a PD resistor to GND, using a 10 kΩ resistor or less.



**Note:** Refer to the reference board schematics for more information.

**Table 19: WLAN GPIO Functions and Strapping Options**

| Pin Name    | FCFBGA<br>Pin # | WLBGA<br>Pin # | WLCSP<br>Pin # | Default | Function         | Description                                                                                                                                         |
|-------------|-----------------|----------------|----------------|---------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| SDIO_DATA_1 | M5              | M8             | 179            | X       | strap_host_ifc_1 | The three pins strap_host_ifc_[3:1] together select the host interface mode:                                                                        |
| SDIO_DATA_2 | M8              | M5             | 180            | X       | strap_host_ifc_2 |                                                                                                                                                     |
| WL_GPIO_6   | H4              | D8             | 181            | 0       | strap_host_ifc_3 |                                                                                                                                                     |
|             |                 |                |                |         |                  | <ul style="list-style-type: none"> <li>• 0XX: SDIO</li> <li>• 10X: gSPI</li> <li>• 110: normal HSIC</li> <li>• 111: bootloader-less HSIC</li> </ul> |

**Note:** For HSIC mode:

- Pull WL\_GPIO\_6 high with a resistor between 4.7–10 kΩ.
- Pull SDIO\_DATA2 high, either directly to VIO or through no more than 10 kΩ.
- Pull SDIO\_DATA1 low, either directly to ground or through no more than 10 kΩ.
- Tie all other SDIO data lines high, either directly to VIO or through a resistor.
- Ground the SDIO\_CLK pin.
- SDIO\_CMD can be left floating.

**Table 20: Strap Options**

|                                    | strap_host_ifc_3<br>WL_GPIO_6 | strap_host_ifc_2<br>SDIO_DATA_2 | strap_host_ifc_1<br>SDIO_DATA_1 |
|------------------------------------|-------------------------------|---------------------------------|---------------------------------|
| Default states at sampling instant | 0                             | Float                           | Float                           |
| SDIO                               | 0                             | x                               | x                               |
| gSPI                               | 1                             | 0                               | x                               |
| HSIC (normal)                      | 1                             | 1                               | 0                               |
| Bootloader-less HSIC (debug only)  | 1                             | 1                               | 1                               |

## Muxed Bluetooth GPIO Signals

The Bluetooth GPIO pins (BT\_GPIO\_0 to BT\_GPIO\_7) are multiplexed pins and can be programmed to be used as GPIOs or for other Bluetooth interface signals such as I<sup>2</sup>S. The specific function for a given BT\_GPIO\_X pin is chosen by programming the Pad Function Control Register for that specific pin. Table 21 shows the possible options for each BT\_GPIO\_X pin. Note that each BT\_GPIO\_X pin's Pad Function Control Register Setting is independent (i.e. BT\_GPIO\_1 can be set to Pad Function 7 at the same time that BT\_GPIO\_3 is set to PAD Function 0). When the Pad Function Control Register is set to 0 the BT\_GPIOs do not have specific functions assigned to them and behave as generic GPIOs. The A\_GPIO\_X pins described below are multiplexed behind the BCM4330 PCM and I<sup>2</sup>S interface pins.

**Table 21: GPIO Multiplexing Matrix**

| Pin Name       | Pad Function Control Register Setting |          |          |          |               |          |   |               |
|----------------|---------------------------------------|----------|----------|----------|---------------|----------|---|---------------|
|                | 0                                     | 1        | 2        | 3        | 4             | 5        | 6 | 7             |
| BT_UART_CTS_N  | UART_CTS_N                            | –        | –        | –        | –             | –        | – | A_GPIO[1]     |
| BT_UART_RTS_N  | UART_RTS_N                            | –        | –        | –        | –             | –        | – | A_GPIO[0]     |
| BT_UART_RXD    | UART_RXD                              | –        | –        | –        | –             | –        | – | GPIO[5]       |
| BT_UART_TXD    | UART_TXD                              | –        | –        | –        | –             | –        | – | GPIO[4]       |
| BT_PCM_IN      | A_GPIO[3]                             | PCM_IN   | PCM_IN   | HCLK     | –             | –        | – | I2S_SSDI/MSDI |
| BT_PCM_OUT     | A_GPIO[2]                             | PCM_OUT  | PCM_OUT  | LINK_IND | –             | I2S_MSDO | – | I2S_SSDO      |
| BT_PCM_SYNC    | A_GPIO[1]                             | PCM_SYNC | PCM_SYNC | HCLK     | INT_LPO       | I2S_MWS  | – | I2S_SWS       |
| BT_PCM_CLK     | A_GPIO[0]                             | PCM_CLK  | PCM_CLK  | –        | –             | I2S_MSCK | – | I2S_SSCK      |
| BT_I2S_DO      | A_GPIO[5]                             | PCM_OUT  | –        | –        | I2S_SSDO      | I2S_MSDO | – | STATUS        |
| BT_2S_DI       | A_GPIO[6]                             | PCM_IN   | –        | HCLK     | I2S_SSDI/MSDI | –        | – | TX_CON_FX     |
| BT_I2S_WS      | GPIO[7]                               | PCM_SYNC | –        | LINK_IND | –             | I2S_MWS  | – | I2S_SWS       |
| BT_I2S_CLK     | GPIO[6]                               | PCM_CLK  | –        | –        | INT_LPO       | I2S_MSCK | – | I2S_SSCK      |
| BT_GPIO_5      | GPIO[5]                               | HCLK     | –        | I2S_MSCK | I2S_SSCK      | –        | – | CLK_REQ       |
| BT_GPIO_4      | GPIO[4]                               | LINK_IND | –        | I2S_MSDO | I2S_SSDO      | –        | – | –             |
| BT_GPIO_3      | GPIO[3]                               | –        | –        | I2S_MWS  | I2S_SWS       | –        | – | –             |
| BT_GPIO_2      | GPIO[2]                               | –        | –        | –        | I2S_SSDI/MSDI | –        | – | –             |
| BT_GPIO_1      | GPIO[1]                               | –        | –        | –        | –             | –        | – | –             |
| BT_GPIO_0      | GPIO[0]                               | –        | –        | –        | clk_12p288    | –        | – | RF_ACTIVE     |
| BT_CLK_REQ_IN  | A_GPIO[4]                             | –        | –        | –        | –             | –        | – | A_GPIO[4]     |
| BT_CLK_REQ_OUT | WL/BT_CLK_REQ                         | –        | –        | –        | –             | –        | – | A_GPIO[7]     |

The multiplexed GPIO signals are described in [Table 22](#).

**Table 22: Multiplexed GPIO Signals**

| <b>Pin Name</b> | <b>Type</b> | <b>Description</b>                                                        |
|-----------------|-------------|---------------------------------------------------------------------------|
| UART_CTS_N      | I           | Host UART clear to send                                                   |
| UART_RTS_N      | O           | Device UART request to send                                               |
| UART_RXD        | I           | Device UART receive data                                                  |
| UART_TXD        | O           | Host UART transmit data                                                   |
| PCM_IN          | I           | PCM data input                                                            |
| PCM_OUT         | O           | PCM data output                                                           |
| PCM_SYNC        | I/O         | PCM sync signal, can be master (output) or slave (input)                  |
| PCM_CLK         | I/O         | PCM clock, can be master (output) or slave (input)                        |
| GPIO[7:0]       | I/O         | General purpose I/O                                                       |
| A_GPIO[7:0]     | I/O         | A group general purpose I/O                                               |
| I2S_MSDO        | O           | I <sup>2</sup> S master data output                                       |
| I2S_MWS         | O           | I <sup>2</sup> S master word select                                       |
| I2S_MSCK        | O           | I <sup>2</sup> S master clock                                             |
| I2S_SSCK        | I           | I <sup>2</sup> S slave clock                                              |
| I2S_SSDO        | O           | I <sup>2</sup> S slave data output                                        |
| I2S_SWS         | I           | I <sup>2</sup> S slave word select                                        |
| I2S_SSDI/MSDI   | I           | I <sup>2</sup> S slave/master data input                                  |
| STATUS          | O           | Signals Bluetooth priority status                                         |
| TX_CON_FX       | I           | WLAN-BT coexist. Transmission confirmation; permission for BT to transmit |
| RF_ACTIVE       | O           | WLAN-BT coexist. Asserted (logic high) during local BT RX and TX slots    |
| LINK_IND        | O           | BT receiver/transmitter link indicator                                    |
| WL/BT_CLK_REQ   | O           | WLAN clock request output                                                 |

## I/O States

The following notations are used in [Table 23](#):

- I: Input signal
- O: Output signal
- I/O: Input/Output signal
- PU = Pulled up
- PD = Pulled down
- NoPull = Neither pulled up nor pulled down

**Table 23: I/O States**

| <i>Name</i>            | <i>I/O</i> | <i>Keeper<sup>a</sup></i> | <i>Active Mode</i>                    | <i>Low Power State/Sleep (all power present)</i> | <i>Power Down<sup>b</sup><br/>(BT_REG_ON and WL_REG_ON held low)</i> | <i>Out of Reset; Before SW Download<br/>(BT_RST_N high; xx_REG_ON high)</i> | <i>(xx_REG_ON-high and BT_RST_N = 0) and VDDIOs are Present</i> | <i>Power Rail</i> |
|------------------------|------------|---------------------------|---------------------------------------|--------------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------|-------------------|
| WL_REG_ON              | I          | N                         | I; PD<br>(pull down can be disabled)  | I; PD<br>(pull down can be disabled)             | I; PD (of 200K)                                                      | I; PD (of 200K)                                                             | I; PD (of 200K)                                                 | –                 |
| BT_RST_N               | I          | Y                         | I; NoPull                             | I; NoPull                                        | I; NoPull                                                            | I; NoPull                                                                   | I; NoPull                                                       | BT_VDDIO          |
| BT_REG_ON              | I          | N                         | I; PD<br>(pull down can be disabled)  | I; PD<br>(pull down can be disabled)             | I; PD (of 200K)                                                      | I; PD (of 200K)                                                             | I; PD (of 200K)                                                 | –                 |
| BT_GPIO<br>0,1,2,3,4,5 | I/O        | Y                         | I/O; PU, PD, NoPull<br>(programmable) | I/O; PU, PD, NoPull<br>(programmable)            | High-Z, NoPull                                                       | I, PD                                                                       | I, PD                                                           | BT_VDDIO          |
| BT_UART_CTS            | I          | Y                         | I; NoPull                             | I; NoPull                                        | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | BT_VDDIO          |
| BT_UART_RTS            | O          | Y                         | O; NoPull                             | O; NoPull                                        | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | BT_VDDIO          |
| BT_UART_RXD            | I          | Y                         | I; NoPull                             | I; NoPull                                        | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | BT_VDDIO          |
| BT_UART_TXD            | O          | Y                         | O; NoPull                             | O; NoPull                                        | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | BT_VDDIO          |
| SDIO Data <sup>c</sup> | I/O        | N                         | I/O; PU                               | I; PU                                            | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | WL_VDDIO          |
| SDIO CMD <sup>c</sup>  | I/O        | N                         | I/O; PU                               | I; PU                                            | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | WL_VDDIO          |
| SDIO_CLK <sup>c</sup>  | I          | N                         | I; NoPull                             | I; NoPull                                        | High-Z, NoPull                                                       | I; NoPull                                                                   | I; NoPull                                                       | WL_VDDIO          |
| BT_PCM_CLK             | I/O        | Y                         | I; NoPull <sup>d</sup>                | I; NoPull <sup>d</sup>                           | High-Z, NoPull                                                       | I, PD                                                                       | I, PD                                                           | BT_VDDIO          |
| BT_PCM_IN              | I/O        | Y                         | I; NoPull <sup>d</sup>                | I; NoPull <sup>d</sup>                           | High-Z, NoPull                                                       | I, PD                                                                       | I, PD                                                           | BT_VDDIO          |
| BT_PCM_OUT             | I/O        | Y                         | I; NoPull <sup>d</sup>                | I; NoPull <sup>d</sup>                           | High-Z, NoPull                                                       | I, PD                                                                       | I, PD                                                           | BT_VDDIO          |

**Table 23: I/O States (Cont.)**

| <b>Name</b>            | <b>I/O</b> | <b>Keeper<sup>a</sup></b> | <b>Active Mode</b>                                      | <b>Low Power State/Sleep (all power present)</b>        | <b>Power Down<sup>b</sup><br/>(BT_REG_ON and WL_REG_ON held low)</b> | <b>Out of Reset; Before SW Download<br/>(BT_RST_N high; xx_REG_ON high)</b> | <b>(xx_REG_ON-high and BT_RST_N = 0) and VDDIOs are Present</b> | <b>Power Rail</b> |
|------------------------|------------|---------------------------|---------------------------------------------------------|---------------------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------|-------------------|
| BT_PCM_SYNC            | I/O        | Y                         | I; NoPull <sup>d</sup>                                  | I; NoPull <sup>d</sup>                                  | High-Z, NoPull                                                       | I, PD                                                                       | I, PD                                                           | BT_VDDIO          |
| BT_I2S_WS              | I/O        | Y                         | I; NoPull <sup>e</sup>                                  | I; NoPull <sup>e</sup>                                  | High-Z, NoPull                                                       | I, PD                                                                       | I, PD                                                           | BT_VDDIO          |
| BT_I2S_CLK             | I/O        | Y                         | I; NoPull <sup>e</sup>                                  | I; NoPull <sup>e</sup>                                  | High-Z, NoPull                                                       | I, PD                                                                       | I, PD                                                           | BT_VDDIO          |
| WL_GPIO_0              | I/O        | Y                         | I/O; PU, PD, NoPull<br>(programmable [Default: PD])     | I/O; PU, PD, NoPull<br>(programmable [Default: PD])     | High-Z, NoPull                                                       | I; PD                                                                       | I; PD                                                           | WL_VDDIO          |
| WL_GPIO_1              | I/O        | Y                         | I/O; PU, PD, NoPull<br>(programmable [Default: PU])     | I/O; PU, PD, NoPull<br>(programmable [Default: PU])     | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | WL_VDDIO          |
| WL_GPIO_2              | I/O        | Y                         | I/O; PU, PD, NoPull<br>(programmable [Default: PU])     | I/O; PU, PD, NoPull<br>(programmable [Default: PU])     | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | WL_VDDIO          |
| WL_GPIO_3              | I/O        | Y                         | I/O; PU, PD, NoPull<br>(programmable [Default: PU])     | I/O; PU, PD, NoPull<br>(programmable [Default: PU])     | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | WL_VDDIO          |
| WL_GPIO_4              | I/O        | Y                         | I/O; PU, PD, NoPull<br>(programmable [Default: NoPull]) | I/O; PU, PD, NoPull<br>(programmable [Default: NoPull]) | High-Z, NoPull                                                       | I; NoPull                                                                   | I; NoPull                                                       | WL_VDDIO          |
| WL_GPIO_5              | I/O        | Y                         | I/O; PU, PD, NoPull<br>(programmable [Default: PU])     | I/O; PU, PD, NoPull<br>(programmable [Default: PU])     | High-Z, NoPull                                                       | I; PU                                                                       | I; PU                                                           | WL_VDDIO          |
| WL_GPIO_6 <sup>c</sup> | I/O        | Y                         | I/O; PU, PD, NoPull<br>(programmable [Default: PD])     | I/O; PU, PD, NoPull<br>(programmable [Default: PD])     | High-Z, NoPull                                                       | I; PD                                                                       | I; PD                                                           | WL_VDDIO          |

- a. N = Pad has no keeper; Y = Pad has a keeper. The keeper is always active except in power down state.  
If there is no keeper, it is an input, and there is no pull, then the pad should be driven to prevent leakage due to the floating pad (e.g., SDIO\_CLK).
- b. In the power down state (xx\_REG\_ON = 0), High-Z; noPull: the pad is disabled because power is not supplied.
- c. Internal pull-up resistors on the SDIO\_DATA lines are disabled after the internal power-on reset when the BCM4330 is strapped for HSIC mode. To use the device in HSIC mode: pull WL\_GPIO\_6 high with a resistor between 4.7–10 kΩ; pull SDIO\_DATA2 high, either directly to VIO or through no more than 10 kΩ; pull SDIO\_DATA1 low, either directly to ground or through no more than 10 kΩ; tie all other SDIO data lines high, either directly to VIO or through a resistor; and ground the SDIO\_CLK pin. SDIO\_CMD can be left floating.
- d. Depending on whether the PCM interface is enabled and the configuration of PCM is in master or slave mode, this can be either output or input.
- e. The I<sup>2</sup>S interface is shared with GPIO2, 3, 4, and 5. Up to master or slave mode, it can be either output or input.

## Section 15: DC Characteristics

### Absolute Maximum Ratings



**Caution!** The absolute maximum ratings in Table 24 indicate levels where permanent damage to the device can occur, even if these limits are exceeded for only a brief duration. Functional operation is not guaranteed under these conditions. Operation at absolute maximum conditions for extended periods can adversely affect long-term reliability of the device.

**Table 24: Absolute Maximum Ratings**

| Rating                                                                                                                                                                                                                                                                        | Symbol                  | Value        | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|--------------|------|
| DC supply for VBATT                                                                                                                                                                                                                                                           | VBATT                   | –0.5 to 6.0  | V    |
| DC supply for WLAN power amplifier                                                                                                                                                                                                                                            | VDDPA                   | –0.5 to 6.0  | V    |
| DC supply voltage for I/O                                                                                                                                                                                                                                                     | VDDIO                   | –0.5 to 2.98 | V    |
| <b>Note:</b> When using a 2.9V $\pm 3\%$ supply, a 2.98V to 3.09V range is allowed for a duration not to exceed 1.5 seconds for each power-up cycle. After that, the VDDIO supply for the chip must have a steady state operating condition within the range 2.9V $\pm 3\%$ . |                         |              |      |
| DC supply voltage for RF                                                                                                                                                                                                                                                      | VDDRF                   | –0.5 to 1.32 | V    |
| DC supply voltage for core                                                                                                                                                                                                                                                    | VDDC                    | –0.5 to 1.32 | V    |
| DC supply voltage for RF I/Os                                                                                                                                                                                                                                                 | VDDIO_RF                | –0.5 to 3.8  | V    |
| DC input supply voltage for CLDO and LNLDO1                                                                                                                                                                                                                                   | –                       | –0.5 to 2.1  | V    |
| WRF_VDD_VCOLDO_IN_1P8                                                                                                                                                                                                                                                         | –                       | –0.5 to 2.75 | V    |
| WRF_TCXO_VDD                                                                                                                                                                                                                                                                  | –                       | –0.5 to 3.63 | V    |
| Maximum undershoot voltage for I/O                                                                                                                                                                                                                                            | V <sub>undershoot</sub> | –0.5         | V    |
| Maximum Junction Temperature                                                                                                                                                                                                                                                  | T <sub>j</sub>          | 125          | °C   |

## Environmental Ratings

The environmental ratings are shown in [Table 25](#).

**Table 25: Environmental Ratings**

| Characteristic                | Value        | Units | Conditions/Comments               |
|-------------------------------|--------------|-------|-----------------------------------|
| Ambient Temperature ( $T_A$ ) | –30 to +85   | °C    | Functional operation <sup>a</sup> |
| Storage Temperature           | –40 to +125  | °C    | –                                 |
| Relative Humidity             | Less than 60 | %     | Storage                           |
|                               | Less than 85 | %     | Operation                         |

- a. Functionality is guaranteed but specifications require derating at extreme temperatures; see the specification tables for details.

## Electrostatic Discharge Specifications

Extreme caution must be exercised to prevent electrostatic discharge (ESD) damage. Proper use of wrist and heel grounding straps to discharge static electricity is required when handling these devices. Always store unused material in its antistatic packaging.

**Table 26: ESD Specifications**

| Pin Type                                                                   | Symbol       | Condition                                                        | ESD Rating | Unit |
|----------------------------------------------------------------------------|--------------|------------------------------------------------------------------|------------|------|
| ESD, Handling<br>Reference: NQY00083,<br>Section 3.4, Group D9,<br>Table B | ESD_HAND_HBM | Human body model contact discharge per JEDEC EID/JESD22-A114     | ±1.5       | kV   |
| Machine Model (MM)                                                         | ESD_HAND_MM  | JESD22-A115                                                      | ±50        | V    |
| CDM                                                                        | ESD_HAND_CDM | Charged device model contact discharge per JEDEC EIA/JESD22-C101 | ±200       | V    |

## Recommended Operating Conditions and DC Characteristics



**Caution!** Functional operation is not guaranteed outside of the limits shown in [Table 27](#) and operation outside these limits for extended periods can adversely affect long-term reliability of the device.

**Table 27: Recommended Operating Conditions and DC Characteristics**

| Element                                                                                                                                                                                                                                                          | Symbol                | Value            |         |                  | Unit |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------|---------|------------------|------|
|                                                                                                                                                                                                                                                                  |                       | Minimum          | Typical | Maximum          |      |
| DC supply voltage for VBATT                                                                                                                                                                                                                                      | VBATT                 | 2.3 <sup>a</sup> | —       | 4.8 <sup>b</sup> | V    |
| DC supply for WLAN power amplifier                                                                                                                                                                                                                               | VDDPA                 | 2.3 <sup>a</sup> | 3.3     | 4.8 <sup>b</sup> | V    |
| DC supply voltage for core                                                                                                                                                                                                                                       | VDD                   | 1.14             | 1.2     | 1.26             | V    |
| DC supply voltage for RF blocks in chip                                                                                                                                                                                                                          | VDDRF                 | 1.14             | 1.2     | 1.26             | V    |
| DC supply voltage for RF I/Os                                                                                                                                                                                                                                    | VDDIO_RF <sup>c</sup> | 3.14             | 3.3     | 3.46             | V    |
| DC supply voltage for I/O                                                                                                                                                                                                                                        | VDDIO                 | 1.2              | 1.8     | 2.9 ±3%          | V    |
| <b>Note:</b> When using a 2.9V ±3% supply, a 2.98V to 3.09V range is allowed for a duration not to exceed 1.5 seconds for each power-up cycle. After that, the VDDIO supply for the chip must have a steady state operating condition within the range 2.9V ±3%. |                       |                  |         |                  |      |
| DC supply for HSIC interface <sup>d</sup>                                                                                                                                                                                                                        | HSIC<br>AVDD12        | 1.1              | 1.2     | 1.3              | V    |
| Input High Voltage (WL_REG_ON, BT_REG_ON, EXT_SMS_REQ, EXT_PWM_REQ)                                                                                                                                                                                              | VIH                   | 1.08             | —       | 3.6              | V    |
| Input Low Voltage (WL_REG_ON, BT_REG_ON, EXT_SMS_REQ, EXT_PWM_REQ)                                                                                                                                                                                               | VIL                   | —                | —       | 0.4              | V    |
| Input High Voltage (VDDIO = 1.2V) <sup>d,e</sup>                                                                                                                                                                                                                 | VIH                   | 0.7 × VDDIO      | —       | —                | V    |
| Input Low Voltage (VDDIO = 1.2V) <sup>d,e</sup>                                                                                                                                                                                                                  | VIL                   | —                | —       | 0.3 × VDDIO      | V    |
| Input High Voltage (VDDIO = 1.8V to 2.5V) <sup>d,e</sup>                                                                                                                                                                                                         | VIH                   | 0.65 × VDDIO     | —       | —                | V    |
| Input Low Voltage (VDDIO = 1.8V to 2.5V) <sup>d,e</sup>                                                                                                                                                                                                          | VIL                   | —                | —       | 0.35 × VDDIO     | V    |
| Input High Voltage (VDDIO = 2.9V ±3%) <sup>d,e</sup>                                                                                                                                                                                                             | VIH                   | 0.65 × VDDIO     | —       | —                | V    |
| Input Low Voltage (VDDIO = 2.9V ±3%) <sup>d,e</sup>                                                                                                                                                                                                              | VIL                   | —                | —       | 0.35 × VDDIO     | V    |
| Output High Voltage @ 100 μA (VDDIO = 1.2V)                                                                                                                                                                                                                      | VOH                   | VDDIO – 0.1      | —       | —                | V    |
| Output High Voltage @ 2 mA (VDDIO = 1.2V)                                                                                                                                                                                                                        | VOH                   | VDDIO – 0.2      | —       | —                | V    |
| Output Low Voltage @ 100 μA (VDDIO = 1.2V)                                                                                                                                                                                                                       | VOL                   | —                | —       | 0.1              | V    |
| Output Low Voltage @ 2 mA (VDDIO = 1.2V)                                                                                                                                                                                                                         | VOL                   | —                | —       | 0.2              | V    |
| Output High Voltage @ 100 μA (VDDIO = 1.8V to 2.9V)                                                                                                                                                                                                              | VOH                   | VDDIO – 0.2      | —       | —                | V    |

**Table 27: Recommended Operating Conditions and DC Characteristics (Cont.)**


| <b>Element</b>                                             | <b>Symbol</b>   | <b>Value</b>   |                |                | <b>Unit</b> |
|------------------------------------------------------------|-----------------|----------------|----------------|----------------|-------------|
|                                                            |                 | <b>Minimum</b> | <b>Typical</b> | <b>Maximum</b> |             |
| Output High Voltage @ 2 mA<br>(VDDIO = 1.8V to 2.9V)       | VOH             | VDDIO – 0.45   | –              | –              | V           |
| Output Low Voltage @ 100 $\mu$ A<br>(VDDIO = 1.8V to 2.9V) | VOL             | –              | –              | 0.2            | V           |
| Output Low Voltage @ 2 mA<br>(VDDIO = 1.8V to 2.9V)        | VOL             | –              | –              | 0.45           | V           |
| Input capacitance                                          | C <sub>IN</sub> | –              | –              | 5              | pF          |

- The BCM4330 is functional across this range of voltages. Optimal RF performance specified in this Data Sheet, however it is guaranteed only for  $3.0V < V_{BAT} < 4.8V$ .
- The max continuous voltage is 4.8V. Voltages up to 5.5V for up to 10 seconds, cumulative duration, over the lifetime of the device are allowed. Voltages as high as 5.0V for up to 250 seconds, cumulative duration, over the lifetime of the device are allowed.
- VDDIO\_RF is generally supplied by the BCM4330 VOUT\_3P3 output.
- See [Table 51: “HSIC Interface Specifications,” on page 158](#) for HSIC STROBE (HSIC\_STROBE) and DATA (HSIC\_DATA) specifications.
- Applies to GPIO and SDIO signals.

## Section 16: Bluetooth RF Specifications

Unless otherwise stated, limit values apply for the conditions specified in [Table 25: “Environmental Ratings,” on page 120](#) and [Table 27: “Recommended Operating Conditions and DC Characteristics,” on page 121](#). Typical values apply for the following conditions:

- Vbatt = 3.6V
- Ambient temperature +25°C

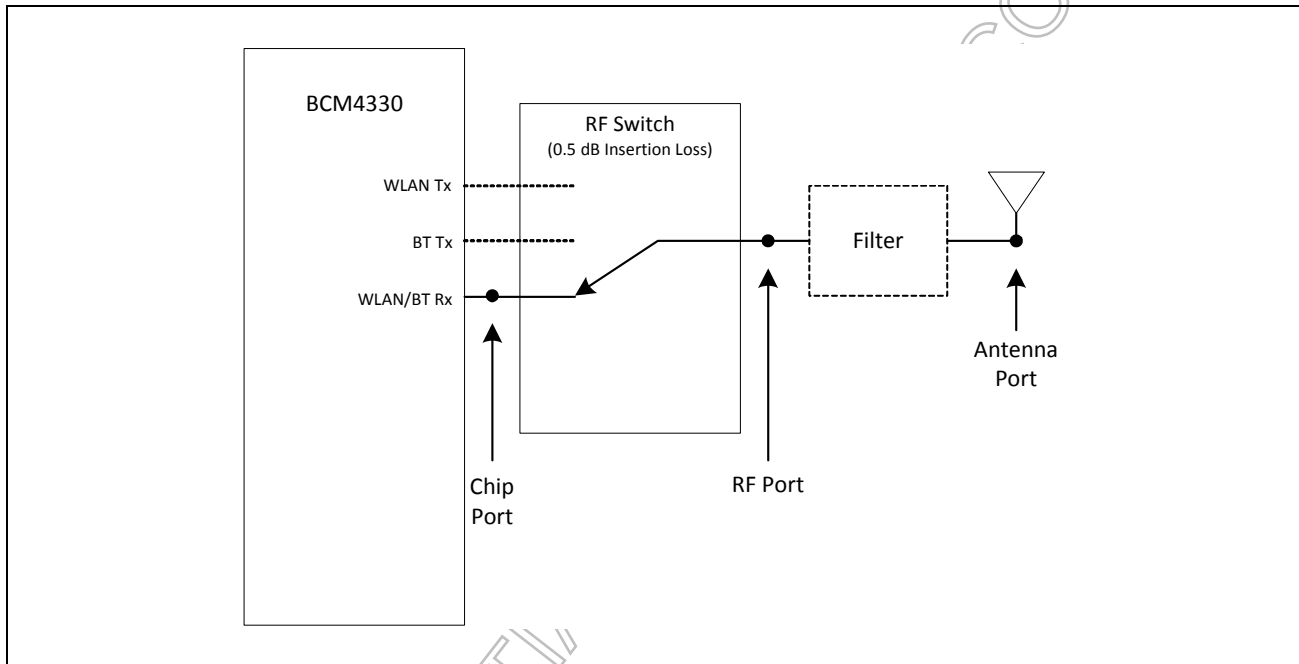

**Figure 41: RF Port Location for Bluetooth Testing**



**Note:** All Bluetooth specifications are measured at the RF port unless otherwise specified.

**Table 28: Bluetooth Receiver RF Specifications**

| <b>Parameter</b>                            | <b>Conditions</b>                 | <b>Minimum</b> | <b>Typical</b> | <b>Maximum</b> | <b>Unit</b> |
|---------------------------------------------|-----------------------------------|----------------|----------------|----------------|-------------|
| <b>General</b>                              |                                   |                |                |                |             |
| Frequency range                             | —                                 | 2402           | —              | 2480           | MHz         |
| RX sensitivity                              | GFSK, 0.1% BER, 1 Mbps            | —              | −93            | −87.5          | dBm         |
|                                             | $\pi/4$ -DQPSK, 0.01% BER, 2 Mbps | —              | −95            | −87.5          | dBm         |
|                                             | 8-DPSK, 0.01% BER, 3 Mbps         | —              | −89            | −82.5          | dBm         |
| Input IP3                                   | —                                 | −16            | −9             | —              | dBm         |
| Maximum input at antenna                    | —                                 | —              | —              | −20            | dBm         |
| Return loss of BT Rx and Tx pins 50Ω port   | —                                 | 10             | —              | —              | dB          |
| <b>Interference Performance<sup>1</sup></b> |                                   |                |                |                |             |
| C/I cochannel                               | GFSK, 0.1% BER                    | —              | —              | 11.0           | dB          |
| C/I 1 MHz adjacent channel                  | GFSK, 0.1% BER                    | —              | —              | 0.0            | dB          |
| C/I 2 MHz adjacent channel                  | GFSK, 0.1% BER                    | —              | —              | −30.0          | dB          |
| C/I ≥ 3 MHz adjacent channel                | GFSK, 0.1% BER                    | —              | —              | −40.0          | dB          |
| C/I image channel                           | GFSK, 0.1% BER                    | —              | —              | −9.0           | dB          |
| C/I 1 MHz adjacent to image channel         | GFSK, 0.1% BER                    | —              | —              | −20.0          | dB          |
| C/I cochannel                               | $\pi/4$ -DQPSK, 0.1% BER          | —              | —              | 13.0           | dB          |
| C/I 1 MHz adjacent channel                  | $\pi/4$ -DQPSK, 0.1% BER          | —              | —              | 0.0            | dB          |
| C/I 2 MHz adjacent channel                  | $\pi/4$ -DQPSK, 0.1% BER          | —              | —              | −30.0          | dB          |
| C/I ≥ 3 MHz adjacent channel                | 8-DPSK, 0.1% BER                  | —              | —              | −40.0          | dB          |
| C/I image channel                           | $\pi/4$ -DQPSK, 0.1% BER          | —              | —              | −7.0           | dB          |
| C/I 1 MHz adjacent to image channel         | $\pi/4$ -DQPSK, 0.1% BER          | —              | —              | −20.0          | dB          |
| C/I cochannel                               | 8-DPSK, 0.1% BER                  | —              | —              | 21.0           | dB          |
| C/I 1 MHz adjacent channel                  | 8-DPSK, 0.1% BER                  | —              | —              | 5.0            | dB          |
| C/I 2 MHz adjacent channel                  | 8-DPSK, 0.1% BER                  | —              | —              | −25.0          | dB          |
| C/I ≥ 3 MHz adjacent channel                | 8-DPSK, 0.1% BER                  | —              | —              | −33.0          | dB          |
| C/I Image channel                           | 8-DPSK, 0.1% BER                  | —              | —              | 0.0            | dB          |
| C/I 1 MHz adjacent to image channel         | 8-DPSK, 0.1% BER                  | —              | —              | −13.0          | dB          |

**Table 28: Bluetooth Receiver RF Specifications (Cont.)**

| <b>Parameter</b>                                                          | <b>Conditions</b> | <b>Minimum</b> | <b>Typical</b> | <b>Maximum</b> | <b>Unit</b> |
|---------------------------------------------------------------------------|-------------------|----------------|----------------|----------------|-------------|
| <b>Out-of-Band Blocking Performance (CW)</b>                              |                   |                |                |                |             |
| 30–2000 MHz                                                               | 0.1% BER          | –              | –10.0          | –              | dBm         |
| 2000–2399 MHz                                                             | 0.1% BER          | –              | –27            | –              | dBm         |
| 2498–3000 MHz                                                             | 0.1% BER          | –              | –27            | –              | dBm         |
| 3000 MHz–12.75 GHz                                                        | 0.1% BER          | –              | –10.0          | –              | dBm         |
| <b>Out-of-Band Blocking Performance, Modulated Interferer<sup>2</sup></b> |                   |                |                |                |             |
| 776–794 MHz                                                               | CDMA2000          | –              | –7             | –              | dBm         |
| 824–849 MHz                                                               | cdmaOne           | –              | –7             | –              | dBm         |
| 824–849 MHz                                                               | GSM850            | –              | –7             | –              | dBm         |
| 880–915 MHz                                                               | E-GSM             | –              | –8             | –              | dBm         |
| 1710–1785 MHz                                                             | GSM1800           | –              | –14            | –              | dBm         |
| 1850–1910 MHz                                                             | GSM1900           | –              | –15            | –              | dBm         |
| 1850–1910 MHz                                                             | cdmaOne           | –              | –14            | –              | dBm         |
| 1850–1910 MHz                                                             | WCDMA             | –              | –14            | –              | dBm         |
| 1920–1980 MHz                                                             | WCDMA             | –              | –15            | –              | dBm         |
| <b>Spurious Emissions</b>                                                 |                   |                |                |                |             |
| 30 MHz–1 GHz                                                              |                   | –              | –              | –62            | dBm         |
| 1–12.75 GHz                                                               |                   | –              | –              | –47            | dBm         |
| 851–894 MHz                                                               |                   | –              | –147           | –              | dBm/Hz      |
| 925–960 MHz                                                               |                   | –              | –147           | –              | dBm/Hz      |
| 1805–1880 MHz                                                             |                   | –              | –147           | –              | dBm/Hz      |
| 1930–1990 MHz                                                             |                   | –              | –147           | –              | dBm/Hz      |
| 2110–2170 MHz                                                             |                   | –              | –147           | –              | dBm/Hz      |

1. The maximum value represents the actual Bluetooth specification required for Bluetooth qualification as defined in the version 4.0 specification.

2. Bluetooth reference level for wanted signal at the Bluetooth RF port = –84.5 dBm.

**Table 29: Bluetooth Transmitter RF Specifications**

| <b>Parameter</b>                                | <b>Conditions</b> | <b>Minimum</b> | <b>Typical</b> | <b>Maximum</b> | <b>Unit</b> |
|-------------------------------------------------|-------------------|----------------|----------------|----------------|-------------|
| <b>General</b>                                  |                   |                |                |                |             |
| Frequency range                                 |                   | 2402           | –              | 2480           | MHz         |
| Basic rate (GFSK) Tx power at Bluetooth RF port |                   | –              | 12             | –              | dBm         |
| QPSK Tx Power at Bluetooth RF Port              |                   | –              | 10             | –              | dBm         |
| 8PSK Tx Power at Bluetooth RF Port              |                   | –              | 10             | –              | dBm         |
| Power control step                              |                   | 2              | 4              | 6              | dB          |

**Table 29: Bluetooth Transmitter RF Specifications (Cont.)**

| Parameter                            | Conditions                                                                                                         | Minimum | Typical | Maximum                  | Unit   |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------|---------|---------|--------------------------|--------|
| GFSK In-Band Spurious Emissions      |                                                                                                                    |         |         |                          |        |
| −20 dBc BW                           | −                                                                                                                  | −       | −       | 1                        | MHz    |
| EDR In-Band Spurious Emissions       |                                                                                                                    |         |         |                          |        |
| 1.0 MHz <  M − N  < 1.5 MHz          | M − N = the frequency range for which the spurious emission is measured relative to the transmit center frequency. | −       | −33     | −26.0                    | dBc    |
| 1.5 MHz <  M − N  < 2.5 MHz          |                                                                                                                    | −       | −27     | −20.0                    | dBm    |
| M − N  ≥ 2.5 MHz                     |                                                                                                                    | −       | −43     | −40.0                    | dBm    |
| Out-of-Band Spurious Emissions       |                                                                                                                    |         |         |                          |        |
| 30 MHz to 1 GHz                      |                                                                                                                    | −       | −       | −36.0 <sup>a, b</sup>    | dBm    |
| 1 GHz to 12.75 GHz                   |                                                                                                                    | −       | −       | −30.0 <sup>b, c, d</sup> | dBm    |
| 1.8 GHz to 1.9 GHz                   |                                                                                                                    | −       | −       | −47.0                    | dBm    |
| 5.15 GHz to 5.3 GHz                  |                                                                                                                    | −       | −       | −47.0                    | dBm    |
| Rx LO Leakage                        |                                                                                                                    |         |         |                          |        |
| 2.4 GHz band                         |                                                                                                                    | −       | −       | −60.0                    | dBm    |
| GPS Band Spurious Emissions          |                                                                                                                    |         |         |                          |        |
| Spurious emissions                   |                                                                                                                    | −       | −150    | −127                     | dBm/Hz |
| Out-of-Band Noise Floor <sup>e</sup> |                                                                                                                    |         |         |                          |        |
| 65–108 MHz                           | FM Rx                                                                                                              | −       | −146    | −                        | dBm/Hz |
| 776–794 MHz                          | CDMA2000                                                                                                           | −       | −146    | −                        | dBm/Hz |
| 869–960 MHz                          | cdmaOne, GSM850                                                                                                    | −       | −146    | −                        | dBm/Hz |
| 925–960 MHz                          | E-GSM                                                                                                              | −       | −146    | −                        | dBm/Hz |
| 1570–1580 MHz                        | GPS                                                                                                                | −       | −143    | −                        | dBm/Hz |
| 1805–1880 MHz                        | GSM1800                                                                                                            | −       | −140    | −                        | dBm/Hz |
| 1930–1990 MHz                        | GSM1900, cdmaOne, WCDMA                                                                                            | −       | −138    | −                        | dBm/Hz |
| 2110–2170 MHz                        | WCDMA                                                                                                              | −       | −135    | −                        | dBm/Hz |

- The maximum value represents the value required for Bluetooth qualification as defined in the v4.0 specification.
- The spurious emissions during Idle mode are the same as specified in [Table 29 on page 125](#).
- Specified at the Bluetooth antenna port.
- Meets this specification using a front-end band-pass filter.
- Transmitted power in cellular and FM bands at the Bluetooth antenna port. See [Figure 41 on page 123](#) for location of the port.

**Table 30: Local Oscillator Performance**

| <b>Parameter</b>                          | <b>Minimum</b> | <b>Typical</b> | <b>Maximum</b> | <b>Unit</b> |
|-------------------------------------------|----------------|----------------|----------------|-------------|
| <b>LO Performance</b>                     |                |                |                |             |
| Lock time                                 | –              | 72             | –              | μs          |
| Initial carrier frequency tolerance       | –              | ±25            | ±75            | kHz         |
| <b>Frequency Drift</b>                    |                |                |                |             |
| DH1 packet                                | –              | 25             | ±25            | kHz         |
| DH3 packet                                | –              | 40             | ±40            | kHz         |
| DH5 packet                                | –              | 40             | ±40            | kHz         |
| Drift rate                                | –              | 6              | 20             | kHz/50 μs   |
| <b>Frequency Deviation</b>                |                |                |                |             |
| 00001111 sequence in payload <sup>a</sup> | 140            | 147            | 175            | kHz         |
| 10101010 sequence in payload <sup>b</sup> | 115            | 138            | –              | kHz         |
| Channel spacing                           | –              | 1              | –              | MHz         |

a. This pattern represents an average deviation in payload.

b. Pattern represents the maximum deviation in payload for 99.9% of all frequency deviations.

## ■ Adaptive Frequency Hopping

The BCM4330 gathers link quality statistics on a channel by channel basis to facilitate channel assessment and channel map selection. The link quality is determined using both RF and baseband signal processing to provide a more accurate frequency-hop map.

**Adaptive Frequency Hopping (AFH)** can **reduce the effects of interference between Bluetooth and other types of devices**. AFH adapts the access channel sharing method so that the transmission does not occur on channels that have significant interference. By using **interference avoidance**, devices that operate within the same frequency band and within the same physical area can detect the presence of each other and adjust their communication systems to reduce the amount of overlap (interference) caused by each other.

The adaptive frequency hopping process **reassigns the transmission of packets** on frequency channels that have interference **to other channels that have lesser interference levels**. This reduced level of interference increases the amount of successful transmissions therefore increasing the overall efficiency and increased overall data transmission rates for the Bluetooth device and reduces the effects of interference from the Bluetooth transmitter to other devices. The minimum number of channels employed in the AFH mode is twenty (20).

- AFH and Hop Sequence


A piconet channel is divided into time slots, where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. All Bluetooth devices participating in the piconet are time- and hop-synchronized to the channel. Devices

in a piconet use a specific frequency-hopping pattern that is algorithmically determined by certain fields in the Bluetooth address and clock of the master. The basic hopping pattern is a pseudorandom ordering of all 79 frequencies in the ISM band used for Bluetooth. This hopping pattern may be adapted to exclude a portion of the frequencies that are used by interfering devices. For the basic and adapted piconet physical channels, frequency hopping is used to change frequency periodically to reduce the effects of interference and for regulator reasons.


The adaptive hopping technique, known as Adaptive Frequency Hopping, improves Bluetooth coexistence with static (non-hopping) ISM systems when these are co-located.

There are two distinctions between the basic and adapted piconet physical channels:

1. The same channel mechanism that make the slave frequency the same as the preceding master transmission.
2. The adapted piconet physical channel may be based on less than the full 79 frequencies of the basic piconet physical channel. The adapted piconet channel shall use at least  $N_{\min}$  RF channels (where  $N_{\min}$  is 20).

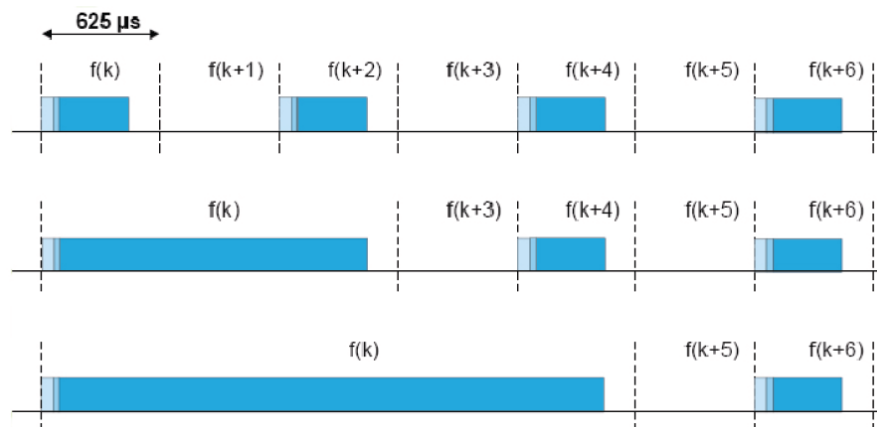

Frequency Hopping, Basic Hopping Pattern

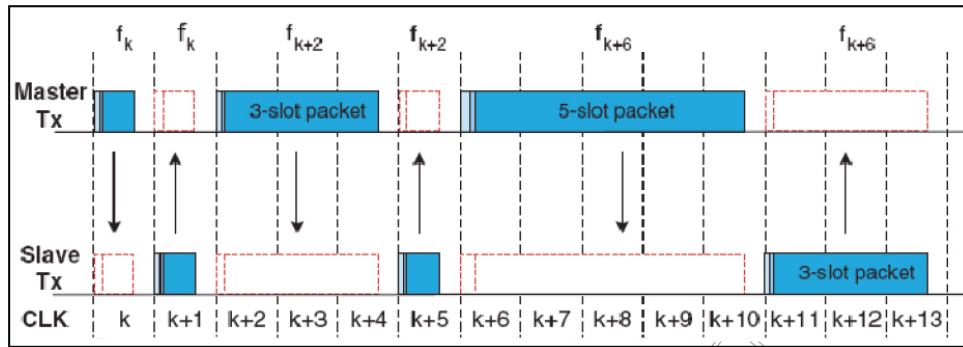

Adaptive Frequency Hopping, Same Channel Mechanism

The following six types of hopping sequences are defined:

1. Page Hopping Sequence using 32 wake-up frequencies.
2. Page Response Hopping Sequence using 32 response frequencies.
3. Inquiry Hopping Sequence using 32 wake-up frequencies.
4. Inquiry Response Hopping Sequence using 32 response frequencies.
5. Basic Channel Hopping Sequence using all 79 hop frequencies.
6. Adapted Channel Hopping Sequence using  $N_{\min} \leq N \leq 79$  hop frequencies

The adapted channel hopping sequence is used only in place of the basic channel hopping sequence. All other hopping sequence are not affected by hop-sequence adaptation. When the adapted channel hopping sequence is used, the pseudorandom sequence contains only frequencies that are in the RF channel set by the AFH\_channel\_map. The AFH\_channel\_map indicates which RF channels shall be used and which shall be unused. Adaptation of the hopping sequence is achieved through two additions to the basic channel-hopping sequence.

1. Unused RF channels are remapped uniformly onto used RF channels. That is, if the hop selection kernel of the basic system generates an unused RF channel, an alternative RF channel out of the set of used RF channels is selected, pseudorandomly. If the RF channel determined by the basic hop selection kernel is already in the set of used RF channels, no adjustment is made.
2. The used RF channel generated for the master-to-slave packet is also used for the immediately following slave-to-master packet.



## DESIGN SPECIFICATION

Part Number: 3001999

Rev. A

# DESIGN SPECIFICATION

|                  |                               |
|------------------|-------------------------------|
| DESIGN           | INTERNAL ANTENNA              |
| MODEL / TYPE     | SM-G3508 / BT INTENNA         |
| ETHERTRONICS P/N | 3001999                       |
| SEC CODE         | GH42-04495A                   |
| CUSTOMER         | SAMSUNG ELECTRONICS CO., LTD. |
| SUPPLIER         | ETHERTRONICS INC.             |

|                                                                                               |                                                                                                |                                                                                                  |
|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| ENGINEERING MANAGER<br>CHECKED                                                                | MECHANICAL MANAGER<br>CHECKED                                                                  | DESIGN MANAGER<br>CHECKED                                                                        |
| <br>JR Lee | <br>SW Choi | <br>JY Baek |



**2013 © COPYRIGHT ETHERTRONICS INC.**

This document is issued by Ethertronics Inc. (hereinafter called Ethertronics) in confidence, and is not to be reproduced in whole or in part without the prior written permission of Ethertronics. The information contained herein is the property of Ethertronics and is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without the prior written permission of Ethertronics.



## DESIGN SPECIFICATION

**Part Number: 3001999**

**Rev. A**

### CONTENTS

|        |                                              |    |
|--------|----------------------------------------------|----|
| 1.     | Purpose and Scope.....                       | 3  |
| 2.     | Abbreviations and Definitions .....          | 3  |
| 3.     | ELECTRICAL SPECIFICATION FOR SM-G3508.....   | 4  |
| 3.1.   | Frequency Band.....                          | 4  |
| 3.2.   | Electrical Characteristics .....             | 4  |
| 3.2.1. | VSWR.....                                    | 4  |
| 3.3.   | Matching Requirements.....                   | 4  |
| 3.4.   | Passive Measurement .....                    | 5  |
| 3.4.1. | Input Return Loss and VSWR .....             | 5  |
| 3.5.   | Radiation Patterns.....                      | 6  |
| 3.5.1  | SM-G3508 Phone BT band (H-plane).....        | 6  |
| 3.5.2  | SM-G3508 Phone BT band (E1-plane) .....      | 7  |
| 3.5.3  | SM-G3508 Phone BT band (E2-plane) .....      | 8  |
| 3.5.4  | SM-G3508 Phone Wifi 5G band (H-plane).....   | 9  |
| 3.5.5  | SM-G3508 Phone Wifi 5G band (E1-plane) ..... | 10 |
| 3.5.6  | SM-G3508 Phone Wifi 5G band (E2-plane) ..... | 11 |
| 4      | DRAWING and PART LIST .....                  | 12 |
| 4.1    | DRAWING OF INTERNAL ANTENNA.....             | 12 |
| 4.2    | PART LIST .....                              | 15 |
| 6      | TEST METHOD .....                            | 16 |
| 6.1    | Return Loss & VSWR Test .....                | 16 |
| 6.2    | Radiation Pattern Test .....                 | 16 |
| 6.3    | Test Method (Manufacturing).....             | 17 |
| 6.4    | Corrosion (Salt Spray) Test .....            | 17 |



## DESIGN SPECIFICATION

**Part Number: 3001999**

**Rev. A**

### 1. Purpose and Scope

The purpose of this document is to establish a design specification for the antenna DESIGN that Ethertronics is developing for the Samsung GT-I9190/I9192 wireless handset. Any changes or additions to this specification can affect schedule and/or cost or the DESIGN and should be negotiated between Ethertronics and Samsung before being incorporated into the specification. Upon agreement of this specification, Ethertronics will make no changes without the written approval from Samsung. Any changes requested by Samsung will be given to Ethertronics with sufficient time to evaluate the cost impact and react as required.

### 2. Abbreviations and Definitions

|      |                              |
|------|------------------------------|
| AVG  | Average                      |
| °    | Degree                       |
| °C   | Celsius (degrees Centigrade) |
| cm   | Centimeter                   |
| G    | Gravitational Force          |
| g    | Grams                        |
| Hz   | Hertz                        |
| In   | Inches                       |
| IQC  | Incoming Quality Control     |
| MHz  | Megahertz                    |
| m    | Meter                        |
| mm   | Millimeter                   |
| N    | Newton                       |
| PCB  | Printed Circuit Board        |
| TX   | Transmit Band                |
| RH   | Relative Humidity            |
| RX   | Receive Band                 |
| VSWR | Voltage Standing Wave Ratio  |
| W    | Watt                         |

Design specification: A target specification to guide design process.

DESIGN Specification: A final specification for the qualified DESIGN.



## DESIGN SPECIFICATION

Part Number: 3001999

Rev. A

### 3. ELECTRICAL SPECIFICATION FOR SM-G3508

#### 3.1. Frequency Band

| Mode | Frequency Band (MHz) |
|------|----------------------|
| BT   | 2,400 ~ 2,500 MHz    |
| WIFI | 5,150 ~ 5,850 MHz    |

#### 3.2. Electrical Characteristics


##### 3.2.1. VSWR

< Phone mounted typical measurements >

| Frequency Range | 2,400MHz      | 2,500MHz      | 5,150 MHz     | 5,850 MHz     |
|-----------------|---------------|---------------|---------------|---------------|
| V.S.W.R         | 1.6:1<br>±0.5 | 1.4:1<br>±0.5 | 1.2:1<br>±0.5 | 1.6:1<br>±0.5 |

#### 3.3. Matching Requirements

In order to assure the best performance of the antenna, the matching will be evaluated in free space and in talk position. The antenna will comply with the Electrical Specification requirements, as set out below, while mounted on the handset containing the PCB. The handset and PCB are to be provided by the customer and should be representative of the latest design version of all parts. Any modifications in the handset or PCB can affect the performance of the antenna and should be discussed with Ethertronics to determine the affect of such changes on the antenna performance and delivery requirements.

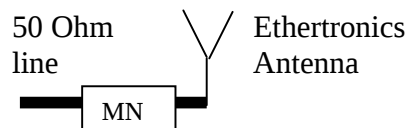

Optional matching network to be  
determined by SAMSUNG RF team if needed.




## DESIGN SPECIFICATION

Part Number: 3001999

Rev. A

### 3.4. Passive Measurement

#### 3.4.1. Input Return Loss and VSWR

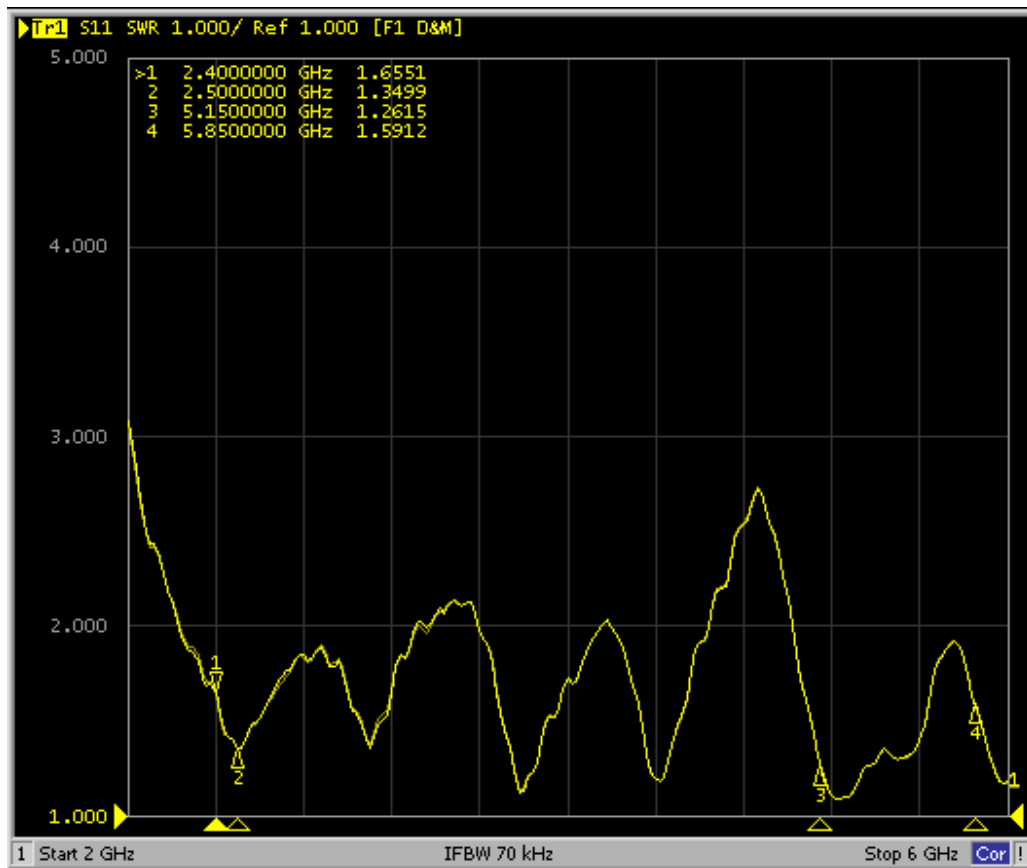


BT,WIFI Antenna



**DESIGN SPECIFICATION**  
**Part Number: 3001999**  
**Rev. A**

**3.5. Radiation Patterns**

**3.5.1 SM-G3508 Phone BT band (H-plane)**

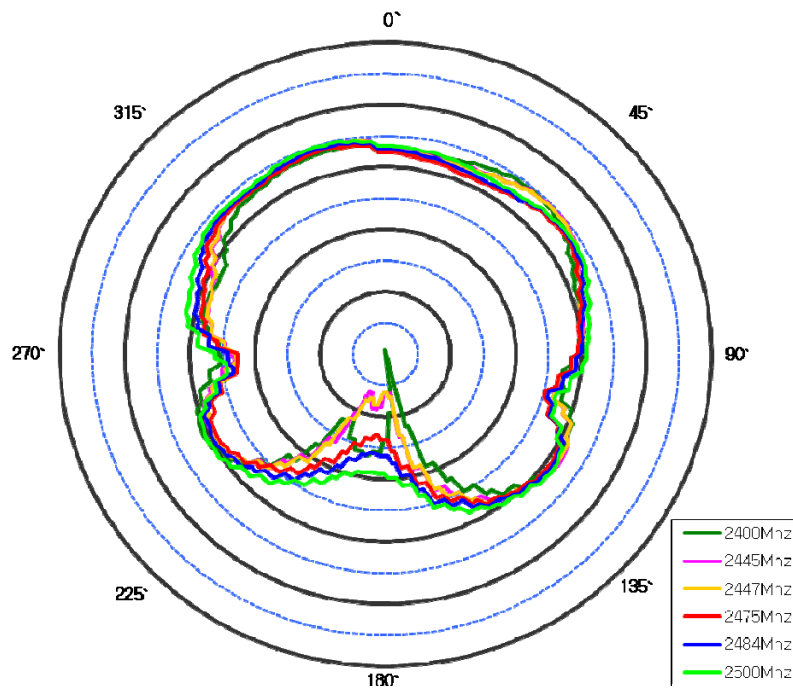

< Phone mounted typical measurements >

| Frequency | Max.  | Min.   | Avg.  |
|-----------|-------|--------|-------|
| 2400Mhz   | -5.44 | -40.65 | -9.54 |
| 2445Mhz   | -5.29 | -33.86 | -9.24 |
| 2447Mhz   | -5.39 | -33.88 | -9.30 |
| 2475Mhz   | -5.94 | -26.94 | -9.81 |
| 2484Mhz   | -5.53 | -23.99 | -9.31 |
| 2500Mhz   | -5.12 | -20.93 | -8.72 |




## DESIGN SPECIFICATION

Part Number: 3001999

Rev. A

### 3.5.2 SM-G3508 Phone BT band (E1-plane)

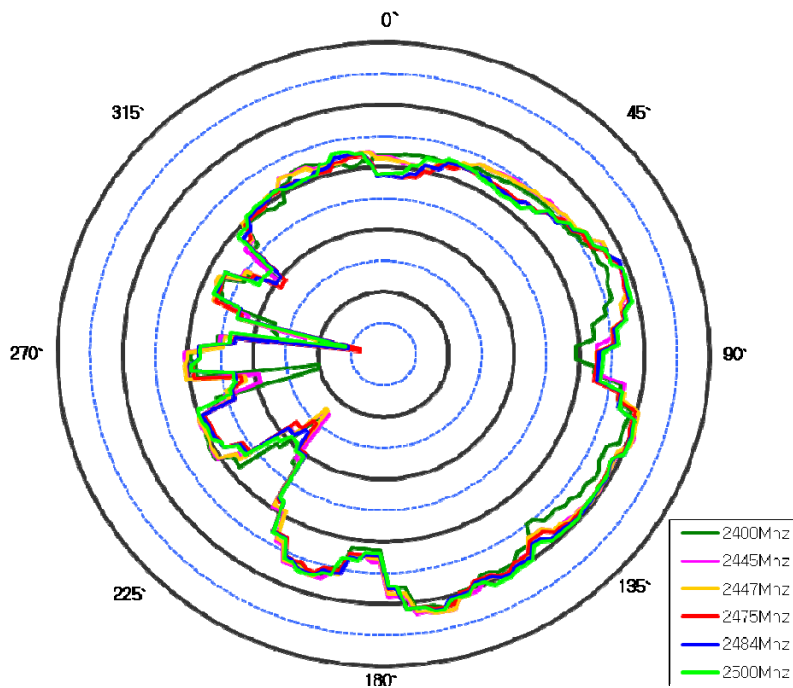

< Phone mounted typical measurements >

| Frequency | Max. | Min.   | Avg.  |
|-----------|------|--------|-------|
| 2400Mhz   | 1.50 | -29.82 | -5.49 |
| 2445Mhz   | 2.29 | -27.65 | -4.29 |
| 2447Mhz   | 2.29 | -29.37 | -4.35 |
| 2475Mhz   | 1.53 | -36.36 | -4.78 |
| 2484Mhz   | 1.80 | -34.56 | -4.57 |
| 2500Mhz   | 1.95 | -33.95 | -4.42 |




## DESIGN SPECIFICATION

**Part Number: 3001999**

**Rev. A**

### 3.5.3 SM-G3508 Phone BT band (E2-plane)

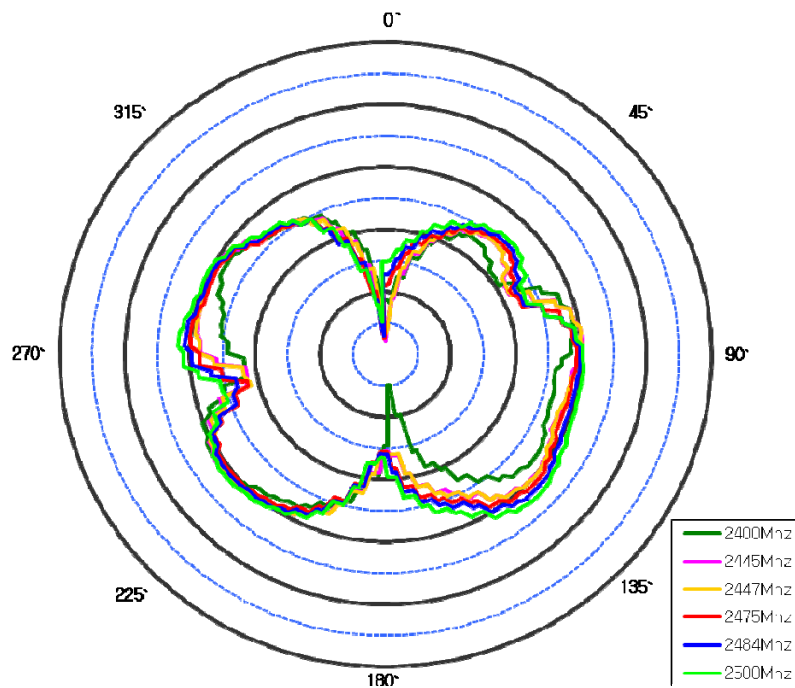

< Phone mounted typical measurements >

| Frequency | Max.  | Min.   | Avg.   |
|-----------|-------|--------|--------|
| 2400Mhz   | -9.04 | -35.10 | -14.00 |
| 2445Mhz   | -8.91 | -37.81 | -12.90 |
| 2447Mhz   | -8.91 | -36.84 | -12.90 |
| 2475Mhz   | -9.19 | -37.43 | -12.90 |
| 2484Mhz   | -8.40 | -37.03 | -12.40 |
| 2500Mhz   | -7.47 | -34.83 | -11.60 |




## DESIGN SPECIFICATION

**Part Number: 3001999**

**Rev. A**

### 3.5.4 SM-G3508 Phone Wifi 5G band (H-plane)

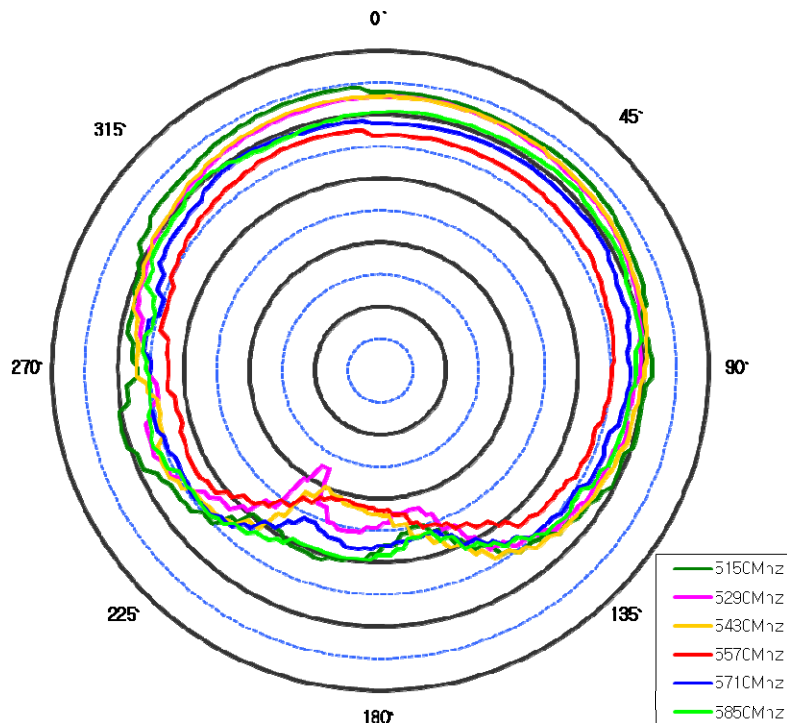

< Phone mounted typical measurements >

| Frequency | Max.  | Min.   | Avg.  |
|-----------|-------|--------|-------|
| 5150Mhz   | 4.33  | -14.95 | 0.55  |
| 5290Mhz   | 2.88  | -22.75 | -0.89 |
| 5430Mhz   | 2.93  | -20.04 | -0.57 |
| 5570Mhz   | -2.34 | -19.09 | -5.56 |
| 5710Mhz   | -0.45 | -14.19 | -3.28 |
| 5850Mhz   | 1.07  | -13.55 | -2.11 |




## DESIGN SPECIFICATION

Part Number: 3001999

Rev. A

### 3.5.5 SM-G3508 Phone Wifi 5G band (E1-plane)

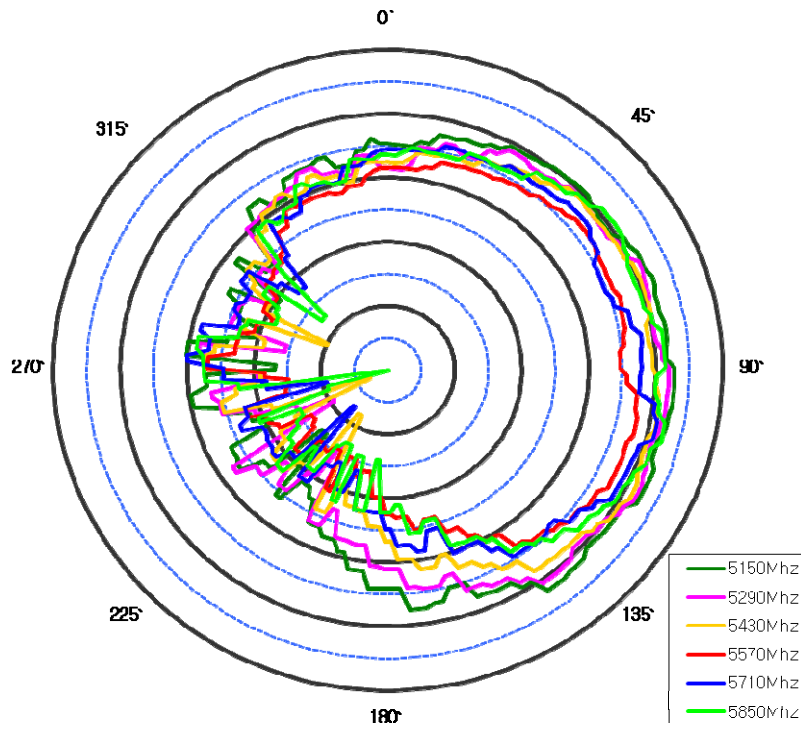

< Phone mounted typical measurements >

| Frequency | Max.  | Min.   | Avg.  |
|-----------|-------|--------|-------|
| 5150Mhz   | 2.82  | -26.45 | -2.25 |
| 5290Mhz   | 2.02  | -30.59 | -3.36 |
| 5430Mhz   | 1.26  | -37.08 | -4.43 |
| 5570Mhz   | -2.01 | -26.66 | -7.73 |
| 5710Mhz   | 1.12  | -32.44 | -6.18 |
| 5850Mhz   | 2.29  | -40.12 | -4.49 |




## DESIGN SPECIFICATION

Part Number: 3001999

Rev. A

### 3.5.6 SM-G3508 Phone Wifi 5G band (E2-plane)

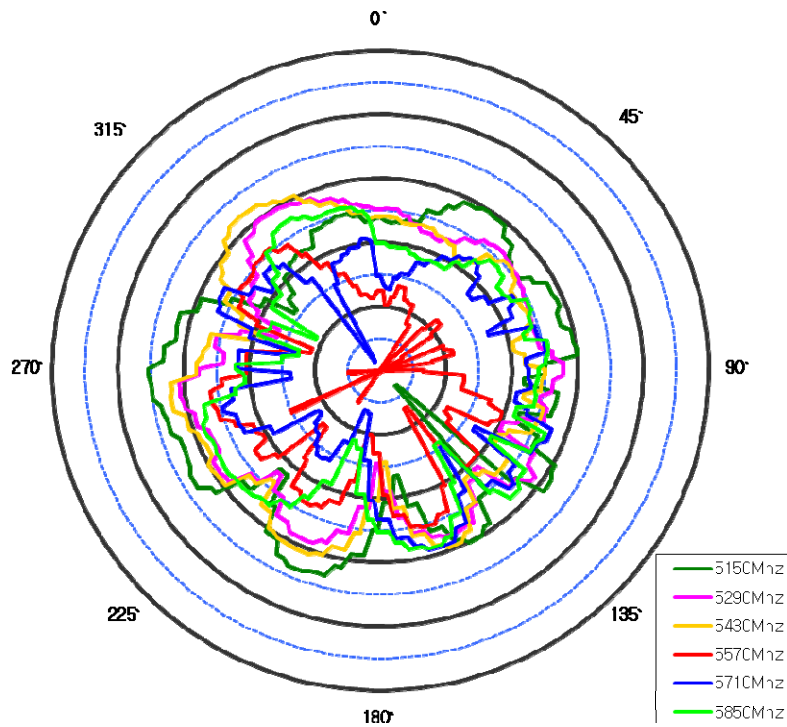

< Phone mounted typical measurements >

| Frequency | Max.   | Min.   | Avg.   |
|-----------|--------|--------|--------|
| 5150Mhz   | -4.67  | -36.70 | -10.90 |
| 5290Mhz   | -9.29  | -25.46 | -13.60 |
| 5430Mhz   | -7.82  | -25.61 | -12.70 |
| 5570Mhz   | -13.80 | -54.97 | -19.80 |
| 5710Mhz   | -10.96 | -38.35 | -17.40 |
| 5850Mhz   | -11.16 | -28.95 | -15.30 |

**DESIGN SPECIFICATION**  
**Part Number: 3001999**  
**Rev. A**

## 4 DRAWING and PART LIST

#### 4.1 DRAWING OF INTERNAL ANTENNA

(Refer to the next page.)


| TOLERANCE TABLE |           |           |           |
|-----------------|-----------|-----------|-----------|
| DIMENSION       | TOLERANCE | DIMENSION | TOLERANCE |
| 0.5 - 3         | ±0.05     | 40 - 10   | ±1*       |
| 3 - 6           | ±0.05     | 10 - 50   | ±0.30*    |
| 6 - 30          | ±0.1      | 50 - 120  | ±0.20*    |
| 30 - 120        | ±0.15     | 120 - 400 | ±0.10*    |



## DESIGN SPECIFICATION

Part Number: 3001999

Rev. A

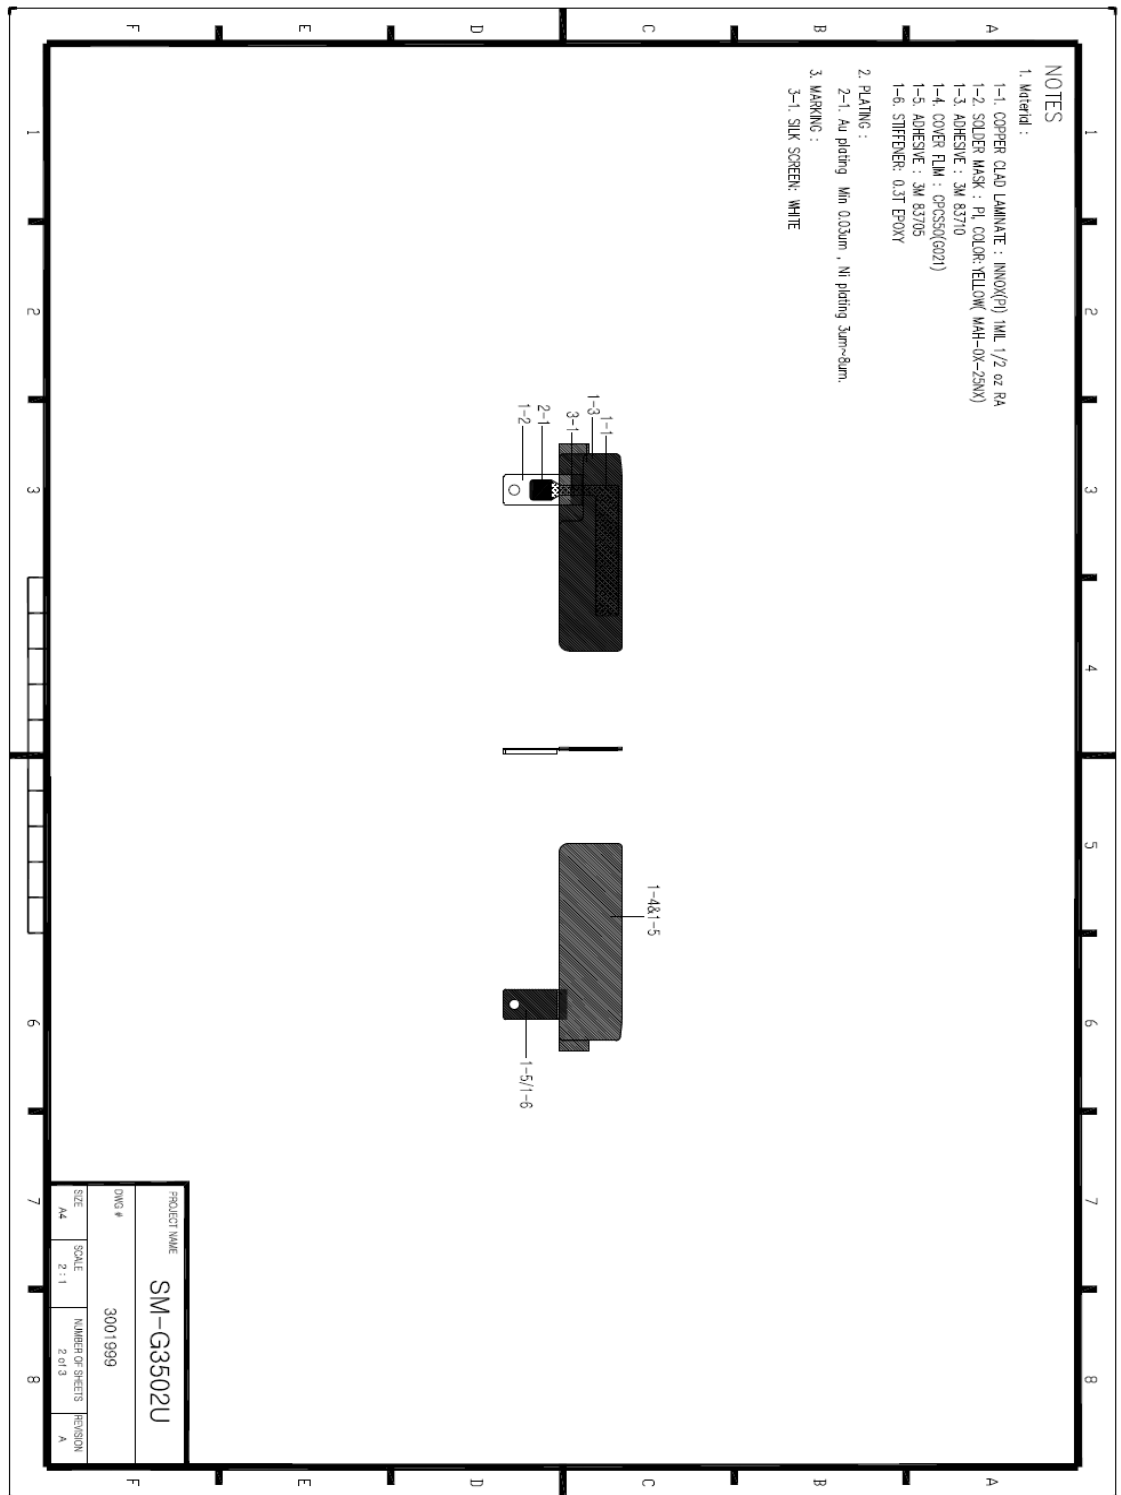




# DESIGN SPECIFICATION

## Part Number: 3001999

### Rev. A

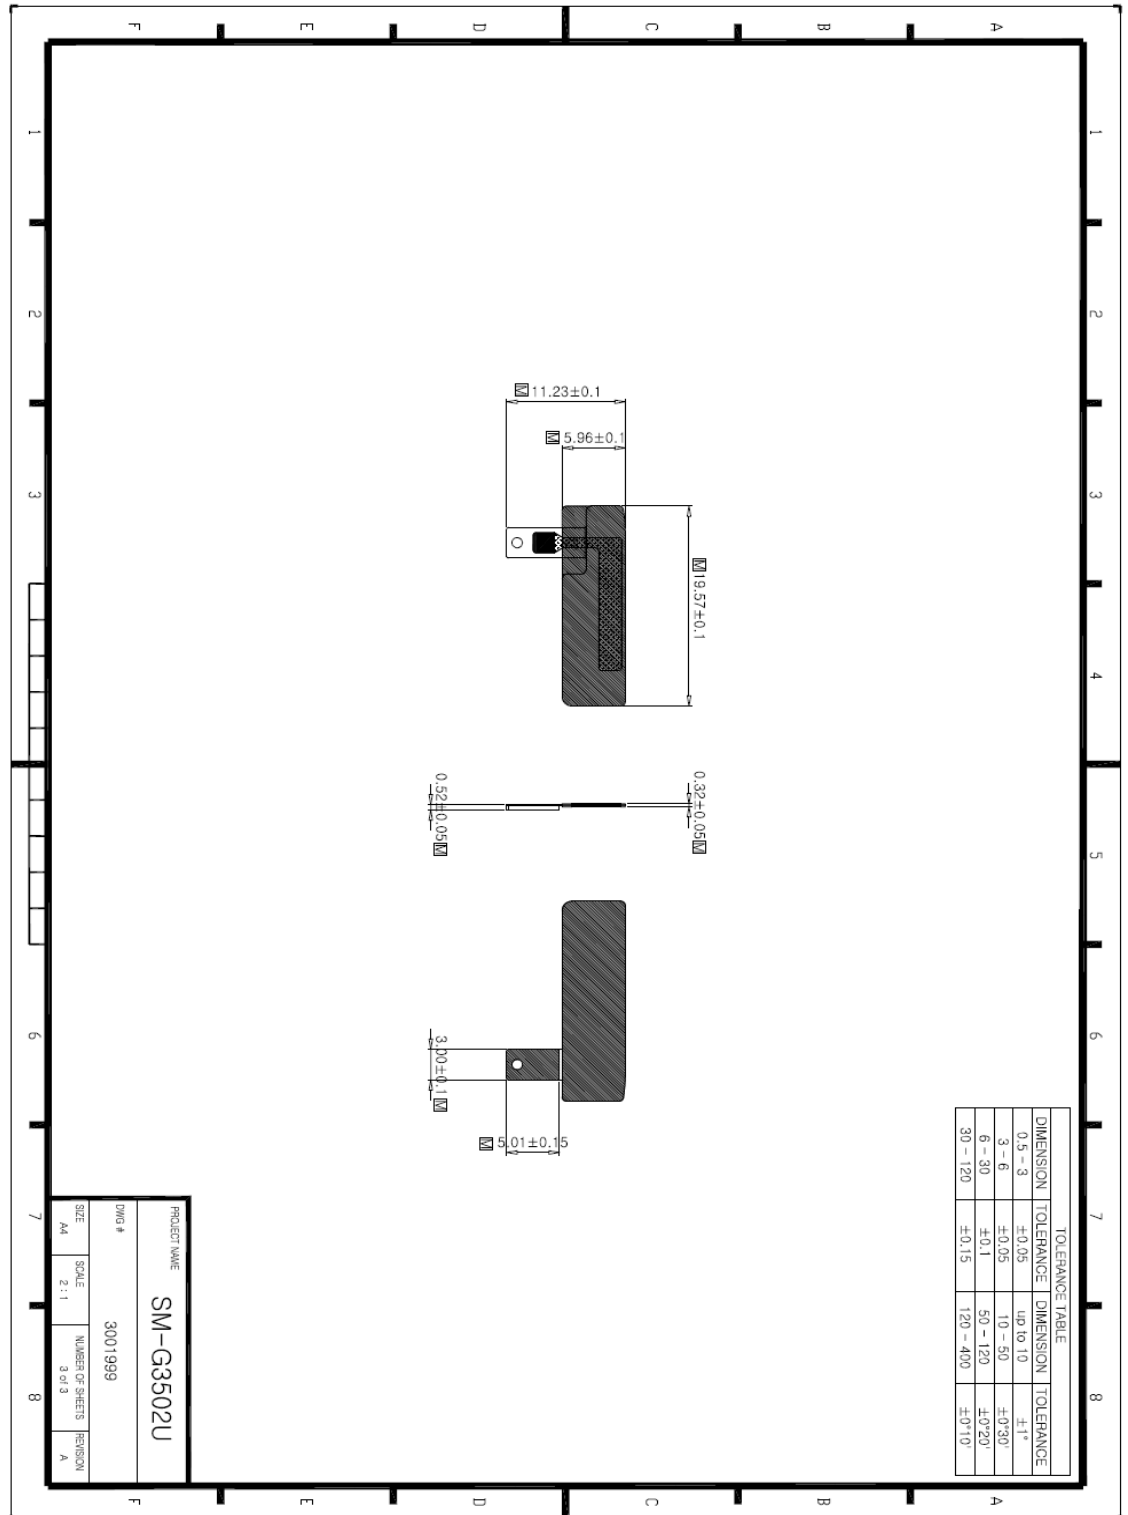



## DESIGN SPECIFICATION

**Part Number: 3001999**

**Rev. A**

### 4.2 PART LIST

5

| NAME<br>부품명 | METERIAL<br>원료명 (사양) | MATERIAL<br>원료업체 | COLOR<br>색상 | FACTORY<br>가공업체<br>(조립) | METHOD<br>가공방법                   | FINISH<br>후가공                             | FINISH<br>후가공<br>업체 | QTY<br>개수 | 비고<br>신규유무 |
|-------------|----------------------|------------------|-------------|-------------------------|----------------------------------|-------------------------------------------|---------------------|-----------|------------|
| F-PCB       | RA<br>(1mil 1/2 oz)  | 이녹스              | NATURAL     | 이노플렉스                   | ASSAM<br>BLY<br>&<br>PLATIN<br>G | Ni<br>(3~8 마이크론) /<br>Au(0.03 마이크론<br>이상) | -                   | 1         | 신규         |
|             | Cover lay(PI)        | 이녹스              | YELLOW      |                         |                                  |                                           |                     |           |            |
|             | STIFFENER<br>(EPOXY) |                  | 0.3T        |                         |                                  |                                           |                     |           |            |
|             | SILK (INK)           | 다이요              | WHITE       |                         |                                  |                                           |                     |           |            |
|             | ADHESIVE<br>TAPE     | 3M<br>(9293)     | WHITE       |                         |                                  |                                           |                     |           |            |
| TAPE        | CPSC50               | -                | White       | 신전                      | TAPE                             |                                           |                     |           |            |
|             | ADHESIVE<br>TAPE     | 3M<br>(9293)     | WHITE       |                         |                                  |                                           |                     |           |            |



## DESIGN SPECIFICATION

Part Number: 3001999

Rev. A

### 6 TEST METHOD

#### 6.1 Return Loss & VSWR Test

The VSWR measurement of antennas assembled into a fully operating GT-I9190/I9192phone handset is measured on the Network Analyzer. The handset is set up with a 50 Ohm coaxial cable connected to the 50 Ohm point. Calibration is done at the end of the 50 Ohm coaxial cable connection. The other end of the 50 Ohm coaxial cable is connected to a network analyzer. The handset is positioned on a non-conductive table for free space measurements.



Figure 1: Testing with network analyzer

#### 6.2 Radiation Pattern Test

Antennas tested for Gain and Efficiency must be assembled into the enclosure and tested in the fully assembled and operating GT-I9190/I9192handset. The antenna is tested in free space in the anechoic chamber in the H, E1 and, E2 planes. The radiation patterns are measured at the center of transmit and receive bands.

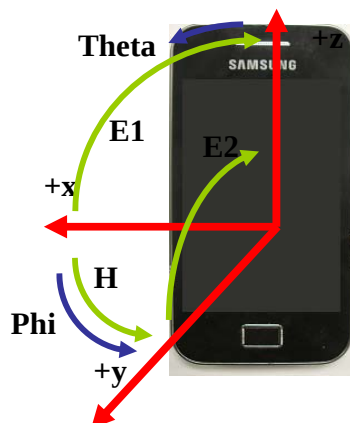


Figure 4: Geometry for SM-G3508 for radiation patterns.



## **DESIGN SPECIFICATION**

**Part Number: 3001999**

**Rev. A**

### **6.3 Test Method (Manufacturing)**

In manufacturing it is not practical to electrically test all antennas until it is heat staked into a fully assembled and operating handset supplied by the customer. To ensure the customer has the ability to sample test the antennas prior to heat staking and assembling them into a phone handset, Ethertronics typically designs a test fixture for use to electrically sample test the antennas.

### **6.4 Corrosion (Salt Spray) Test**

Place the antennas into the Corrosion (Salt Spray) environmental chamber with 5% sodium atmosphere at 35°C for 72 hours. Then remove antennas from chamber and allow to stabilize at room temperature before measurement.

Post Test Requirements: There will be no evidence of mechanical damage.

Electrical characteristics should be within +/-0.5% of their initial value.

# T I S Measurement Report

RC#2 Chamber




|                |                          |
|----------------|--------------------------|
| Model Name     | 130729_SM-G3508_#1_GGU_조 |
| 일수_BT_PC1      |                          |
| ESN            |                          |
| Version        | .....                    |
| Serial         |                          |
| Test Band      | BlueTooth                |
| Test Condition |                          |
| Memo           | .....                    |

P  
h  
o  
t  
o



Tested by **Airlink**

| Channel   | 0 Ch. | 39 Ch. | 78 Ch. |
|-----------|-------|--------|--------|
| T I S     | 81.97 | 83.52  | 83.71  |
| Max.      | 86.97 | 88.97  | 88.97  |
| NHPIS 60° | 82.14 | 83.45  | 84.18  |
| UHS       | 82.56 | 83.92  | 84.86  |

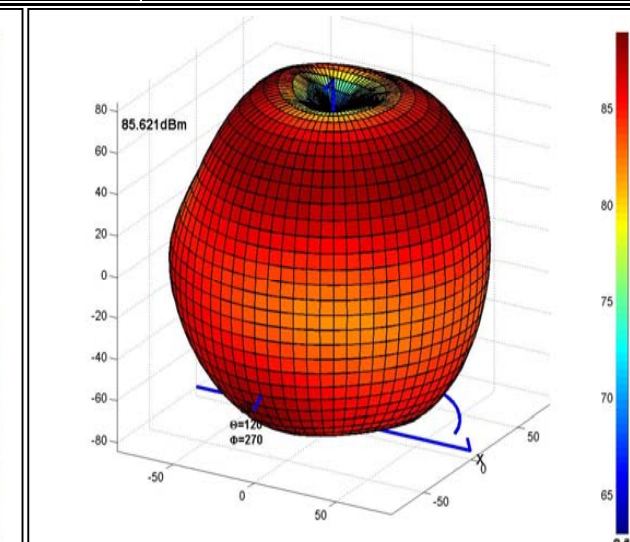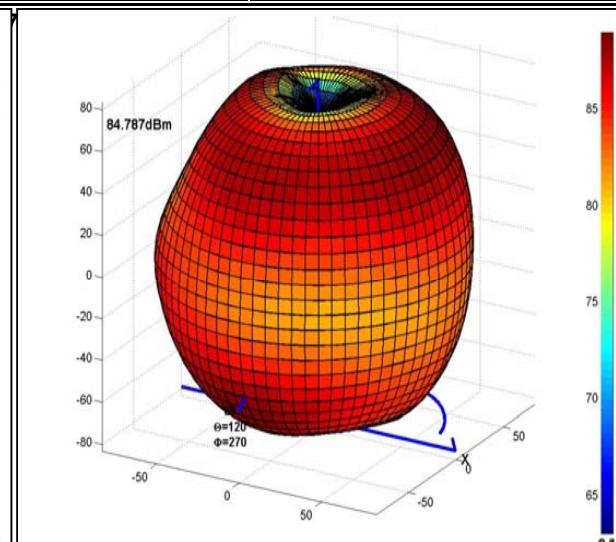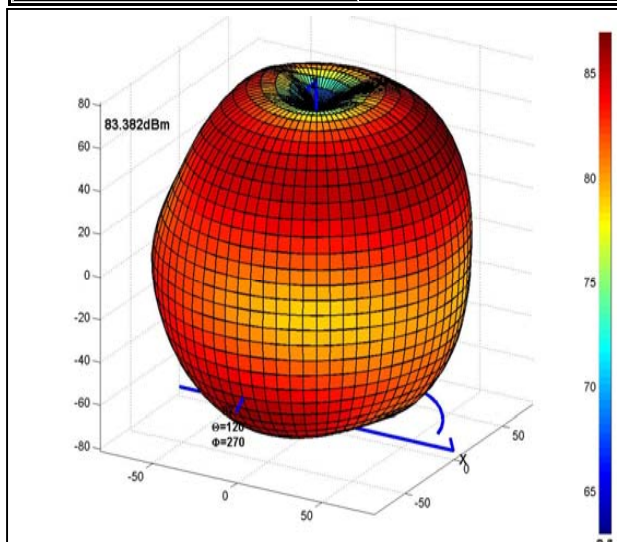

# T R P Measurement Report

Airlink 3D

|                |                            |
|----------------|----------------------------|
| Model Name     | 130729_SM-G3508_#1_GGU_조일수 |
| ESN            |                            |
| Version        | .....                      |
| Serial         |                            |
| Test Band      | BlueTooth                  |
| Test Condition |                            |
| Memo           | .....                      |
| Tested by      | Airlink                    |

BT PC1

P  
h  
o  
t  
o



| Channel    | 0 Ch.  | 39 Ch. | 78 Ch. |
|------------|--------|--------|--------|
| T R P      | 4.73   | 5.92   | 4.71   |
| Max.       | 9.97   | 10.79  | 8.97   |
| NHPRP 60`  | 4.62   | 5.44   | 4.18   |
| UHRP       | 5.10   | 5.99   | 4.86   |
| UHRP Ratio | 59.17% | 58.33% | 58.49% |

