

PRODUCT SPECIFICATION



Product specification for product no. 82184.1 Retractable Bottom Helical Antenna System for LG model DB-520 hand portable unit.

DOCUMENT 82184.1 Issue P3

2000 © COPYRIGHT ALLGON

This document is issued by Allgon Mobile Communications AB (hereinafter called Allgon) in confidence, and is not to be reproduced in whole or in part without the prior written permission of Allgon. The information contained herein is the property of Allgon, and is intended solely for contractual use between Allgon and LG Information & Communication LTD (hereinafter called LG).

The product described in this document is protected by at least one of the following Patents and Patent Applications and any corresponding national rights: PCT/SE93/00386, PCT/SE94/00391, PCT/SE96/00147, PCT/SE94/01008, PCT/SE97/01046, US5,710,567, SE505119, PCT/SE99/00472.

The product specification is a complete description of the product only together with the specification drawing.

Checked RF, date: January 29, 2001

Franck Campagna
RF-Engineer

Checked Mech., date: January 29, 2001

Kjell Carlsson
Mechanical Engineer

Approved date: January 29, 2001
Allgon Mobile Communications AB

Per Johansson
Project Manager

Approved date:
LG Information & Communication LTD

3 ELECTRICAL PROPERTIES

3.1 FREQUENCY BANDS

3.1.1 Transmit Bands (Tx)

Tx₁: 824 - 849 MHz

Tx₂: 1850 - 1910 MHz

3.1.2 Receive Bands (Rx)

Rx₁: 869 - 894 MHz

Rx₂: 1930 - 1990 MHz

3.2 IMPEDANCE

3.2.1 Nominal Value

50 ohms

3.2.2 Method

Allgon will supply engineering assistance to ensure that the impedance over the frequency bands is as close to 50 ohms as possible after matching, both in extended and retracted modes. Both free space and talk position are considered.

3.3 THE HANDSET

3.3.1 Handset Revision

Allgon chassis ID Number

1407

Received at Allgon

December, 2000

3.3.2 Matching

The matching on the PCB of the handset, as specified in 3.3.1, is according to figure 3.3.1. The following matching components are used:

Capacitors: no capacitor
Inductors: 2.7 nH serie, 10nH shunt

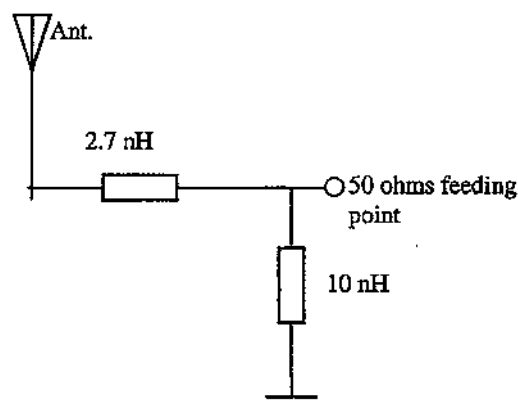


Figure 3.3.1 Matching circuit

3.4 VSWR

3.4.1 Free Space

Below are listed the typical values of the worst matched frequency within each band.

Mode	Typical Maximum Values			
	Tx ₁	Rx ₁	Tx ₂	Rx ₂
Extended	3.19	1.44	3.31	2.55
Retracted	3.4	3.26	2.28	2.07

3.4.2 Talk Position

Below are listed the typical values of the worst matched frequency within each band.

Mode	Typical Maximum Values			
	Tx ₁	Rx ₁	Tx ₂	Rx ₂
Extended	1.85	1.48	2.65	2.48
Retracted	2.4	2.71	1.43	2.56

3.4.3 Free Space

Below are listed the typical values of the worst matched frequency within each band.

Mode	Maximum Values			
	Tx ₁	Rx ₁	Tx ₂	Rx ₂
Extended	TBD:1	TBD:1	TBD:1	TBD:1
Retracted	TBD:1	TBD:1	TBD:1	TBD:1

3.4.4 Measuring Method

A 50 ohms coaxial cable is connected (soldered) to the 50 ohms feeding point (see fig. 3.3.1) on the PCB. The connection of the coaxial cable is done so as to introduce a minimum of mismatch. Ferrite beads are mounted on the cable outside the handset to reduce induced currents on the cable. The cable exits the handset in the negative Y direction. In the other end, the coaxial cable is connected to a network analyzer. The analyzer is calibrated so that the reference plane is at the 50 ohms feeding point.

The handset, including the PCB, must not in any significant way differ from the mass produced handset, e.g. the antenna feeding parts have to be equivalent to the parts in mass production.

Free space means that the handset is placed on a non-conductive surface of polystyrene. Talk position means that the handset is positioned according to "Intended Use" position described in paragraph 7.3.1.1 in "Considerations for evaluation of human exposure to Electromagnetic Fields (EMFs) from Mobile Telecommunication Equipment (MTE) in the frequency range 30 MHz-6 GHz", Final

3.4.5 Electrical Performance Assurance

In order to guarantee the specified electrical performance in mass production the following procedure is used (example given for a single band antenna). During the development phase, two antennas are selected; one defining the lowest allowable resonance frequency (when measured on the handset), marked "low freq.", and one defining the highest allowable resonance frequency, marked "high freq.", see figure 3.4.1. These antennas are our reference antennas. These antennas are then measured on a ground plane used in mass production and define the highest and lowest allowable resonance frequencies on this ground plane and each produced antenna is automatically tested on this ground plane.

Only the retracted mode is considered when finding the reference antennas, since the production variation of the extended mode is negligible.


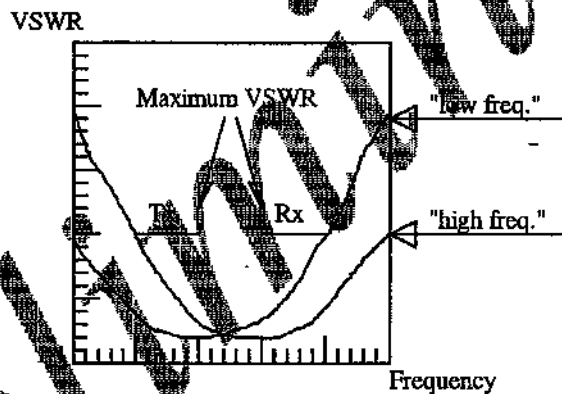


Figure 3.4.1 Reference antennas defining the lowest and highest allowable resonance frequencies for a single band antenna.

This document and its contents are the property of ALLCON MOBILE COMMUNICATIONS AB, SWEDEN and must not be copied, reproduced, transmitted or disclosed to any third part without the consent of us. Contravention will be prosecuted.

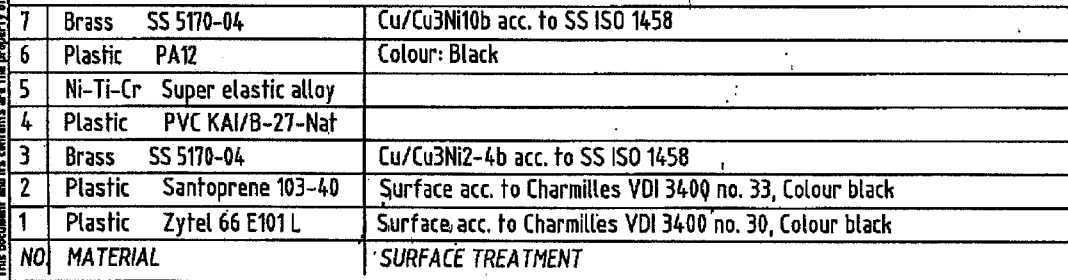

Name		Material / Drawing		Dim		Note	
Format Scale		Date/Sign		Department		Edges unless otherwise stated	
A3 2:1		2001-01-30 mcmhnn		R & D			
		Approved		Checked Mec	Checked El	General tolerance	
						Surface treatment	
ALLGON MOBILE COMMUNICATIONS AB SWEDEN 		Product Specification				Changeorder no Date/Sign 01/30/2001 KLC	Page 1
						S82184.1 P.7	