



Appendix E

RF Test Data for 5.3GWIFI(Conducted Measurement)

Product Name: eNote Pro

Test Model: M10

Environmental Conditions

Temperature:	24.6°C
Relative Humidity:	53.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Jerry Chu
Supervised by:	Can Kun



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5260	Ant1	29.86
NVNT	a	5280	Ant1	28.19
NVNT	a	5320	Ant1	28.22
NVNT	n20	5260	Ant1	28.82
NVNT	n20	5280	Ant1	28.96
NVNT	n20	5320	Ant1	29.76
NVNT	n40	5270	Ant1	54.34
NVNT	n40	5310	Ant1	58.46
NVNT	ac20	5260	Ant1	28.63
NVNT	ac20	5280	Ant1	29.5
NVNT	ac20	5320	Ant1	29.18
NVNT	ac40	5270	Ant1	50.93
NVNT	ac40	5310	Ant1	54.68
NVNT	ac80	5290	Ant1	84.67




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

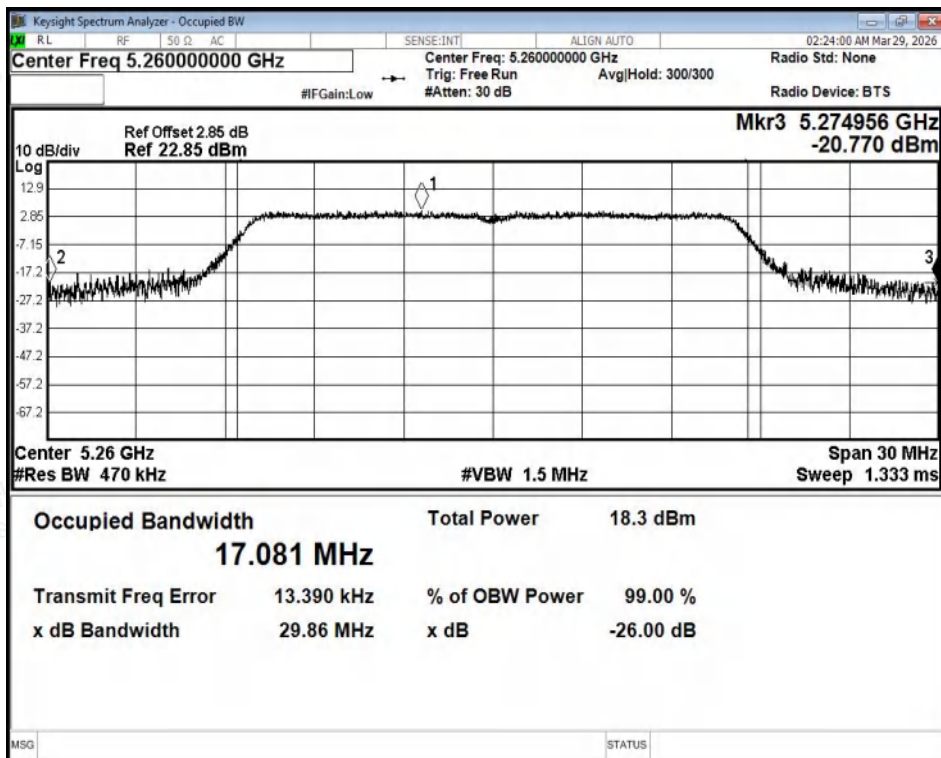

-26dB Bandwidth NVNT a 5260MHz Ant1

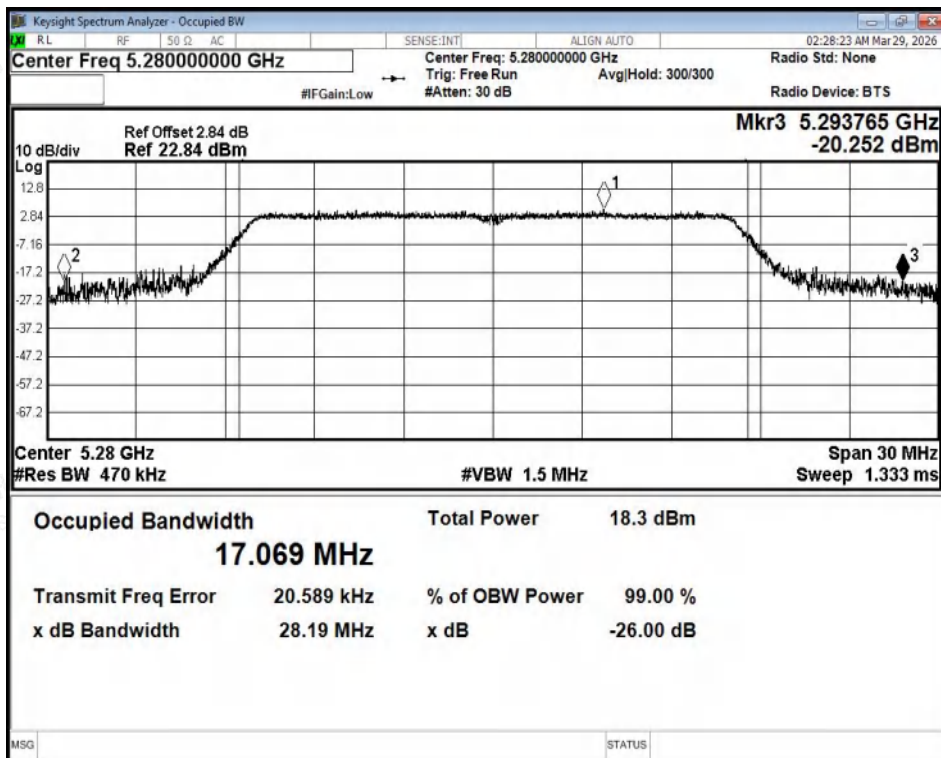

-26dB Bandwidth NVNT a 5280MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

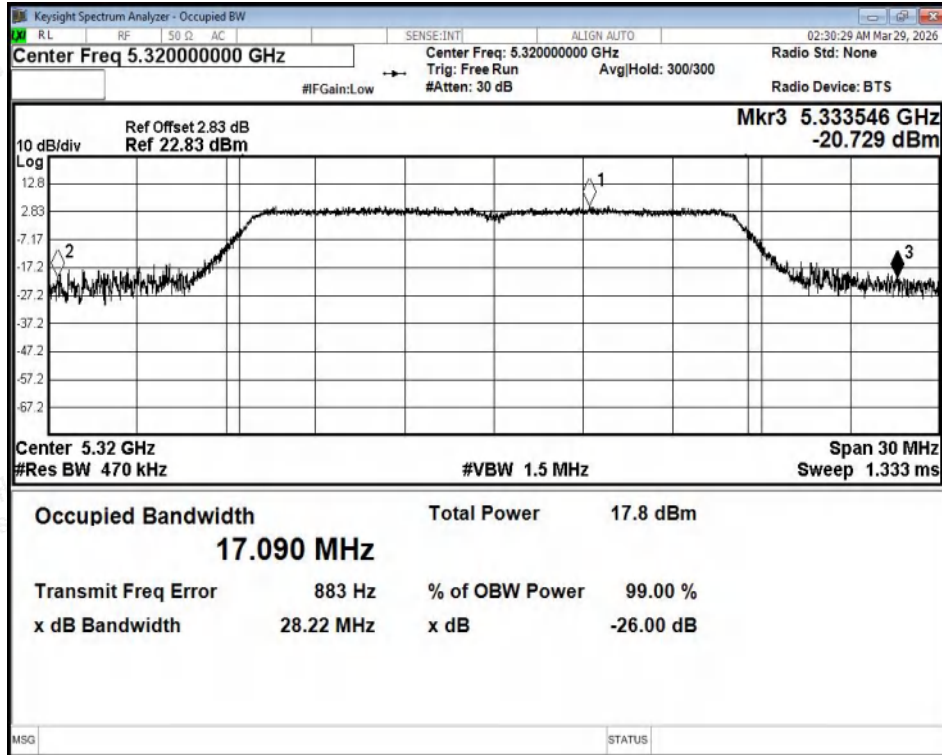

-26dB Bandwidth NVNT a 5320MHz Ant1

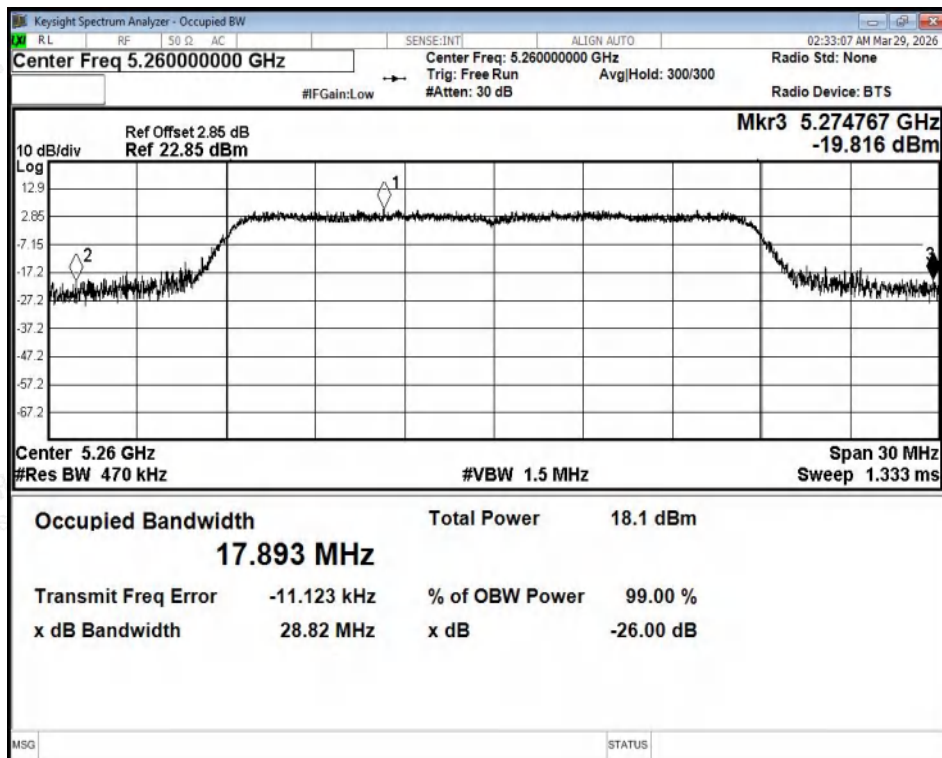

-26dB Bandwidth NVNT n20 5260MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

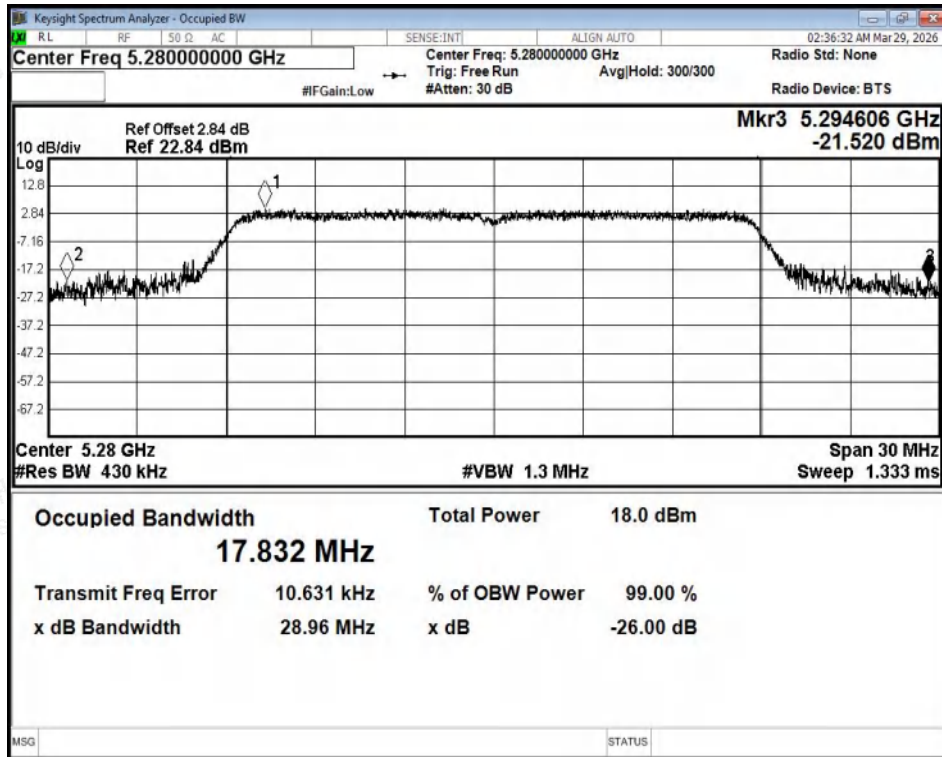

-26dB Bandwidth NVNT n20 5280MHz Ant1

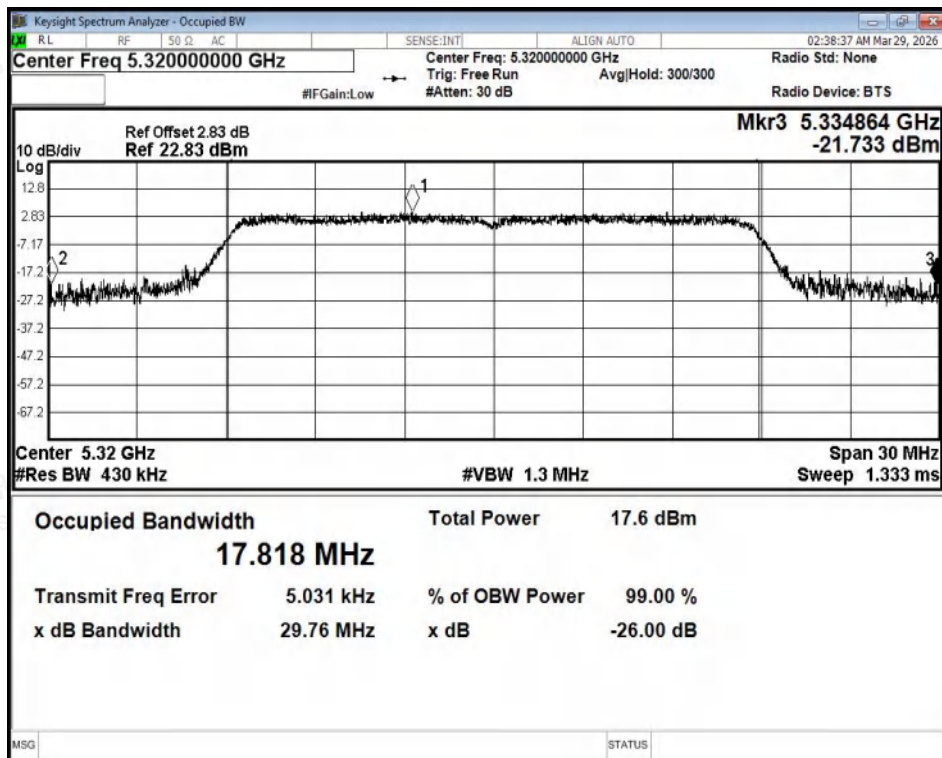

-26dB Bandwidth NVNT n20 5320MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

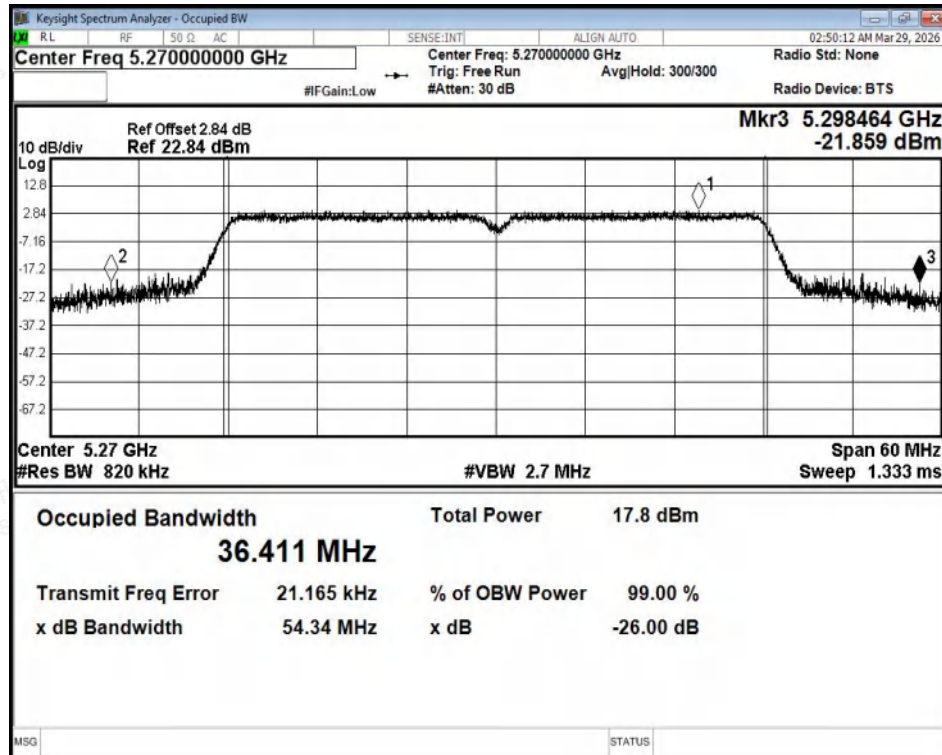


-26dB Bandwidth NVNT n40 5270MHz Ant1

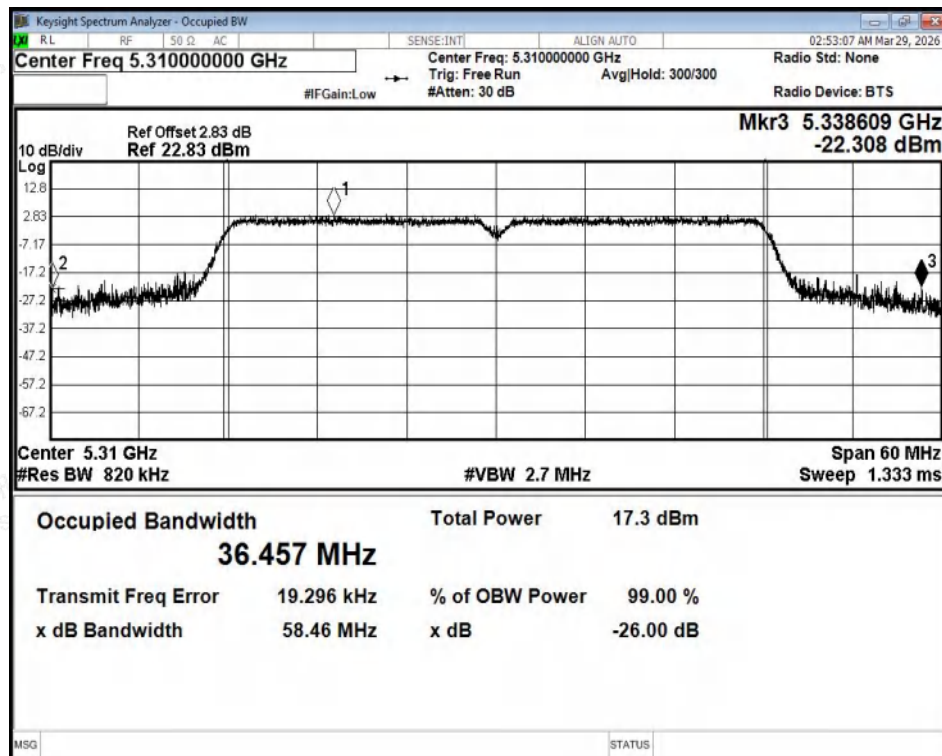


-26dB Bandwidth NVNT n40 5310MHz Ant1



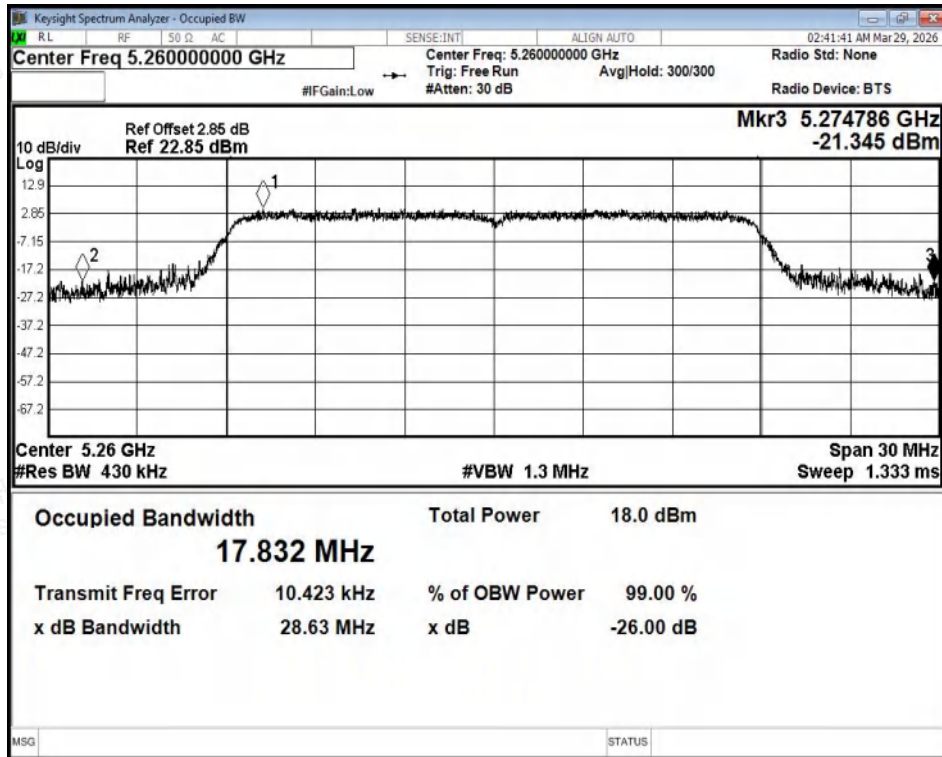

-26dB Bandwidth NVNT ac20 5260MHz Ant1

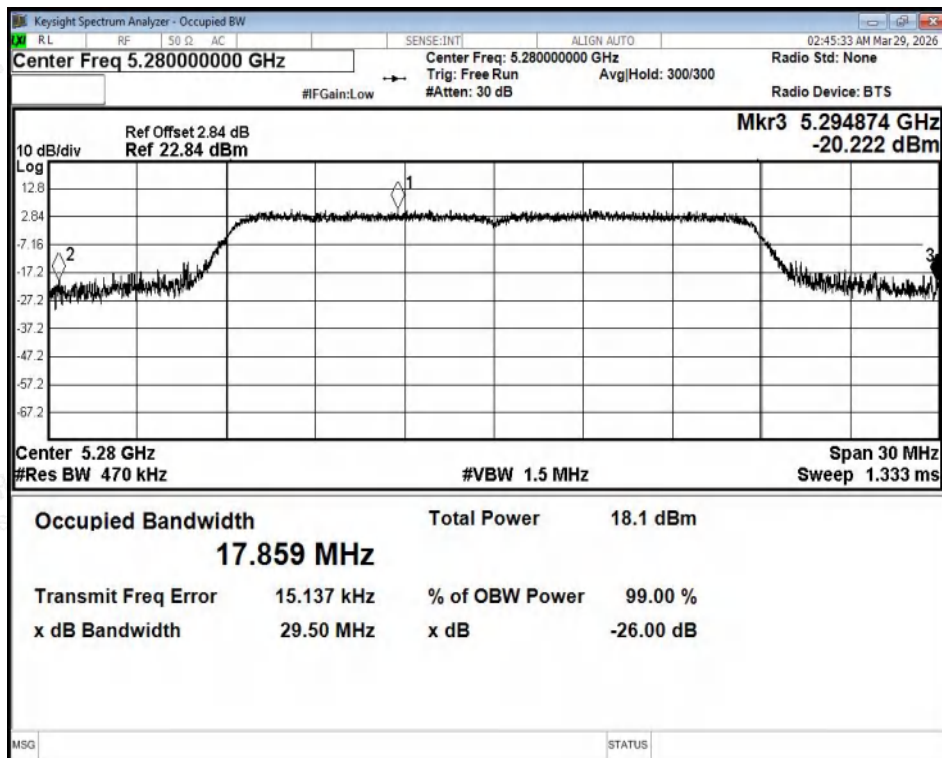

-26dB Bandwidth NVNT ac20 5280MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

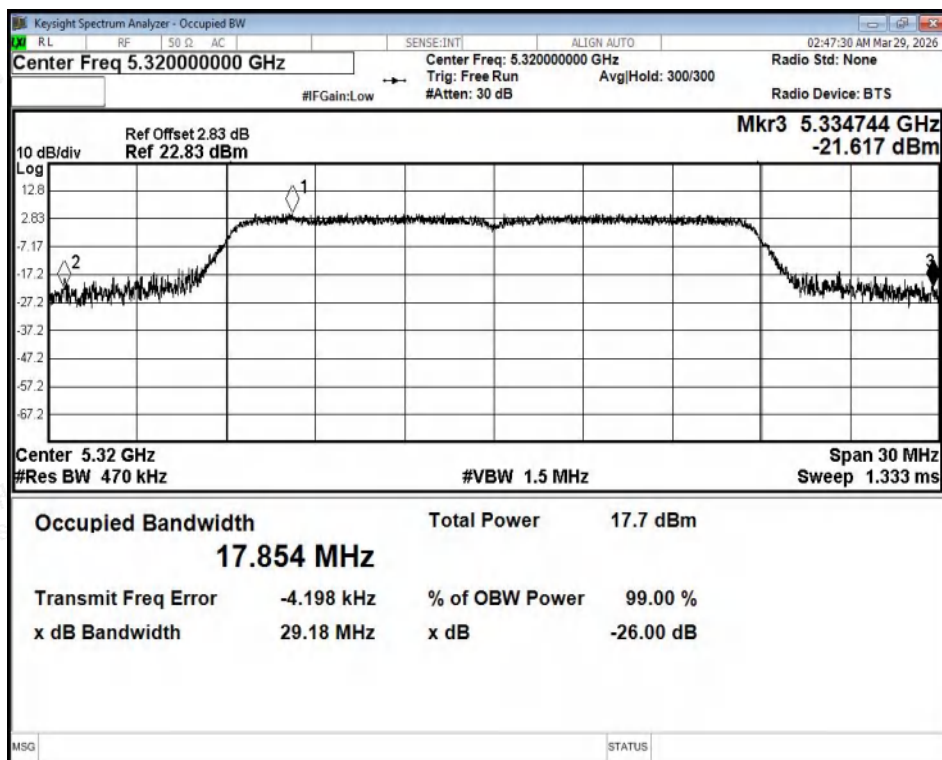

-26dB Bandwidth NVNT ac20 5320MHz Ant1

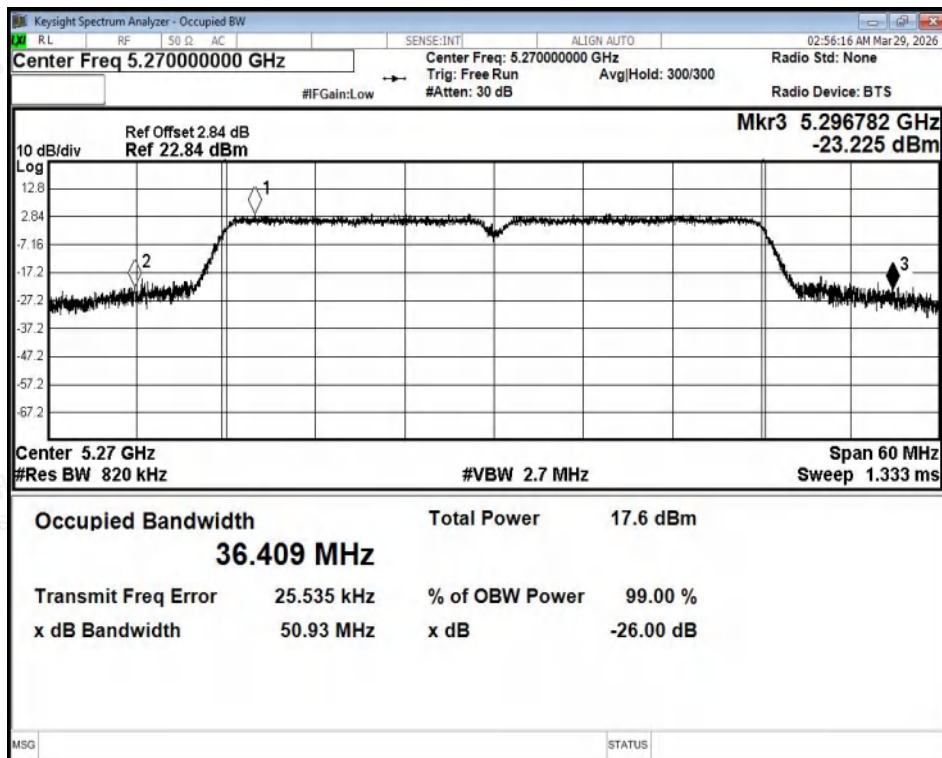

-26dB Bandwidth NVNT ac40 5270MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

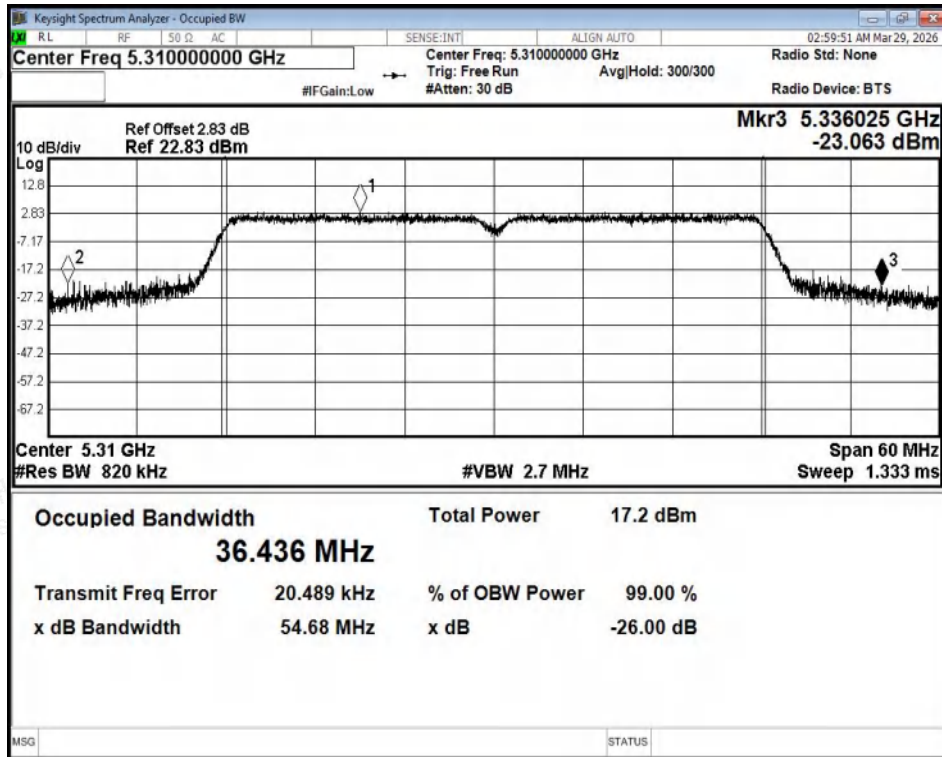

-26dB Bandwidth NVNT ac40 5310MHz Ant1

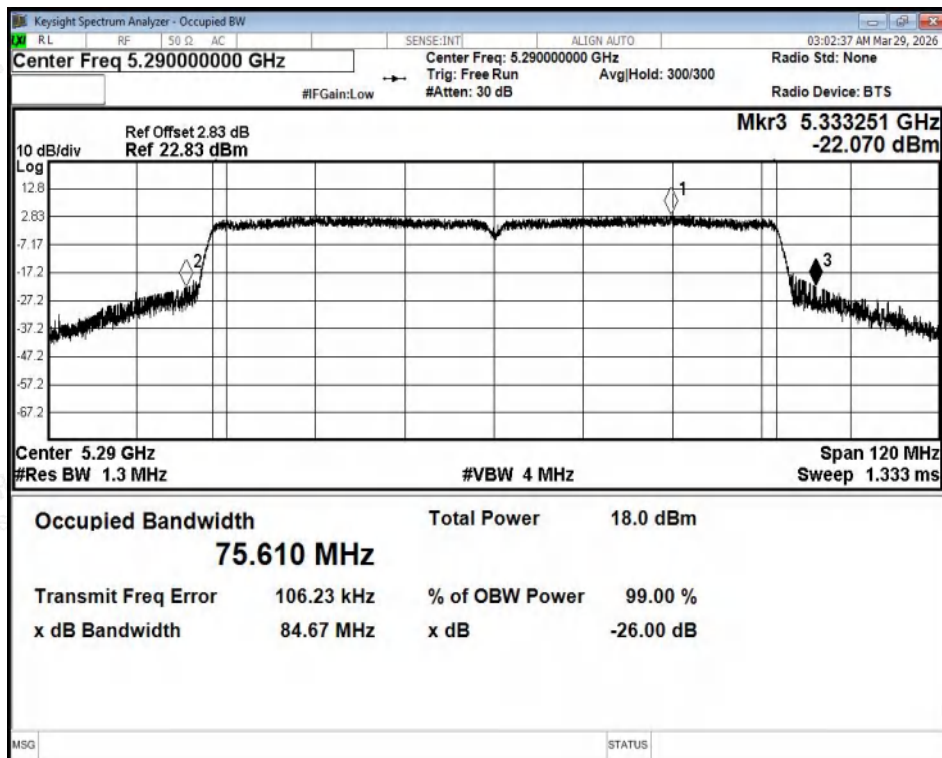

-26dB Bandwidth NVNT ac80 5290MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	a	5260	Ant1	12.04	0.11	12.15	24	Pass
NVNT	a	5280	Ant1	12.03	0.1	12.13	24	Pass
NVNT	a	5320	Ant1	11.55	0.11	11.66	24	Pass
NVNT	n20	5260	Ant1	11.44	0.11	11.55	24	Pass
NVNT	n20	5280	Ant1	11.37	0.11	11.48	24	Pass
NVNT	n20	5320	Ant1	10.98	0.11	11.09	24	Pass
NVNT	n40	5270	Ant1	10.46	0.27	10.73	24	Pass
NVNT	n40	5310	Ant1	10.02	0.23	10.25	24	Pass
NVNT	ac20	5260	Ant1	11.34	0.11	11.45	24	Pass
NVNT	ac20	5280	Ant1	11.34	0.11	11.45	24	Pass
NVNT	ac20	5320	Ant1	11	0.11	11.11	24	Pass
NVNT	ac40	5270	Ant1	10.32	0.23	10.55	24	Pass
NVNT	ac40	5310	Ant1	10.03	0.23	10.26	24	Pass
NVNT	ac80	5290	Ant1	10.17	0.46	10.63	24	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



E.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total Conducted PSD (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5260	Ant1	0.84	0.11	0.95	11	Pass
NVNT	a	5280	Ant1	0.75	0.1	0.85	11	Pass
NVNT	a	5320	Ant1	0.35	0.11	0.46	11	Pass
NVNT	n20	5260	Ant1	-0.09	0.11	0.02	11	Pass
NVNT	n20	5280	Ant1	-0.11	0.11	0	11	Pass
NVNT	n20	5320	Ant1	-0.54	0.11	-0.43	11	Pass
NVNT	n40	5270	Ant1	-4.1	0.27	-3.83	11	Pass
NVNT	n40	5310	Ant1	-4.65	0.23	-4.42	11	Pass
NVNT	ac20	5260	Ant1	-0.14	0.11	-0.03	11	Pass
NVNT	ac20	5280	Ant1	-0.07	0.11	0.04	11	Pass
NVNT	ac20	5320	Ant1	-0.47	0.11	-0.36	11	Pass
NVNT	ac40	5270	Ant1	-4.26	0.23	-4.03	11	Pass
NVNT	ac40	5310	Ant1	-4.66	0.23	-4.43	11	Pass
NVNT	ac80	5290	Ant1	-7.18	0.46	-6.72	11	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

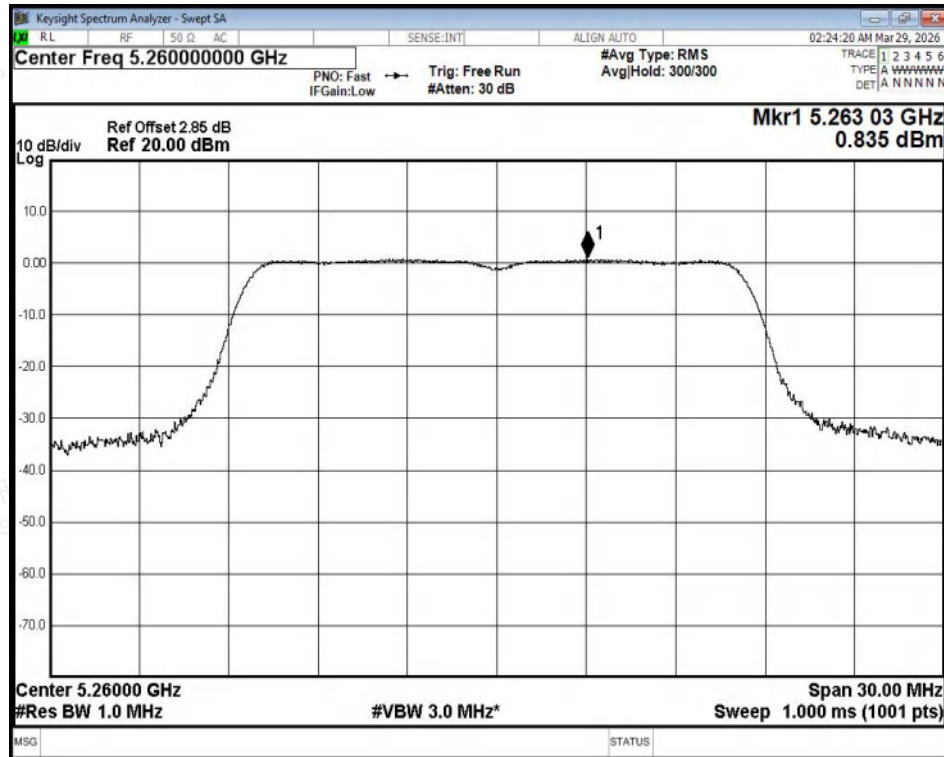


PSD NVNT a 5260MHz Ant1

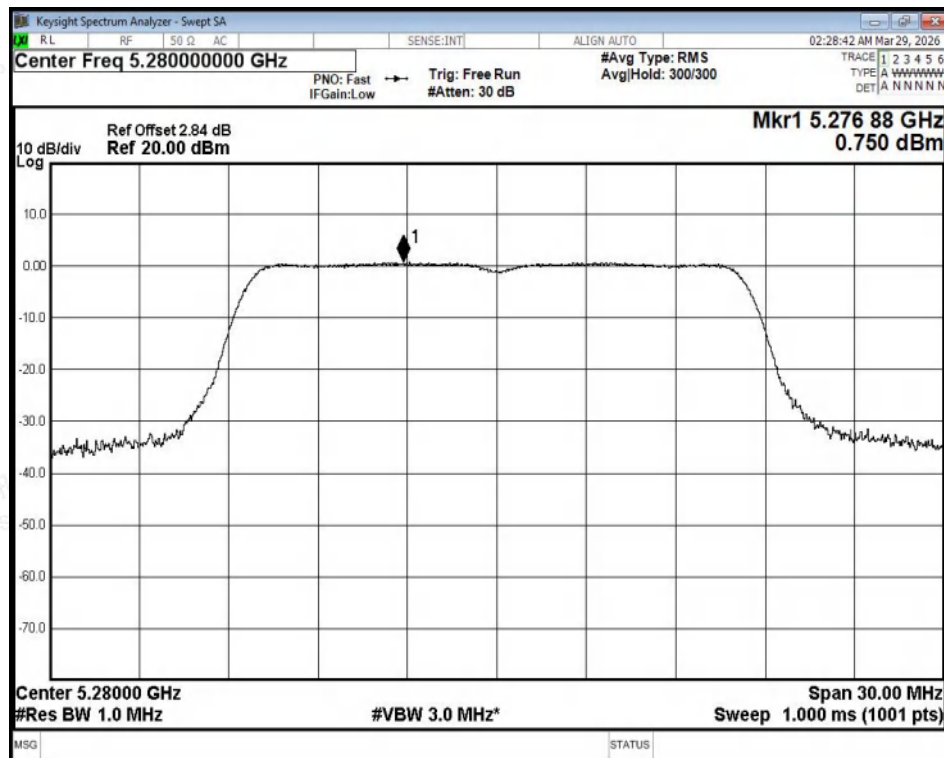


PSD NVNT a 5280MHz Ant1



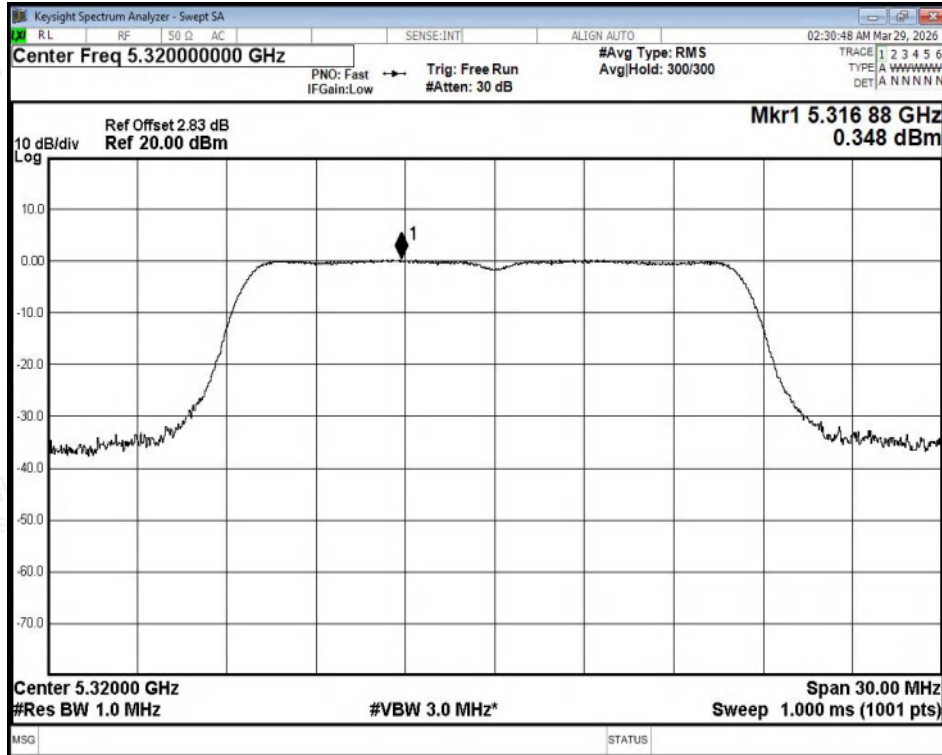


PSD NVNT a 5320MHz Ant1

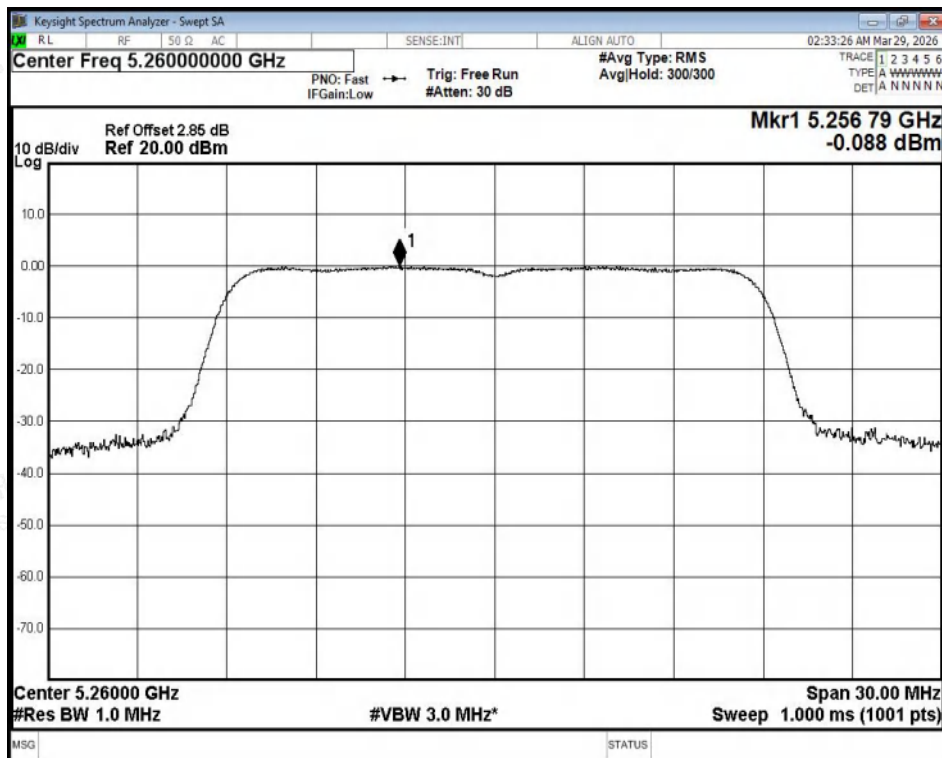


PSD NVNT n20 5260MHz Ant1



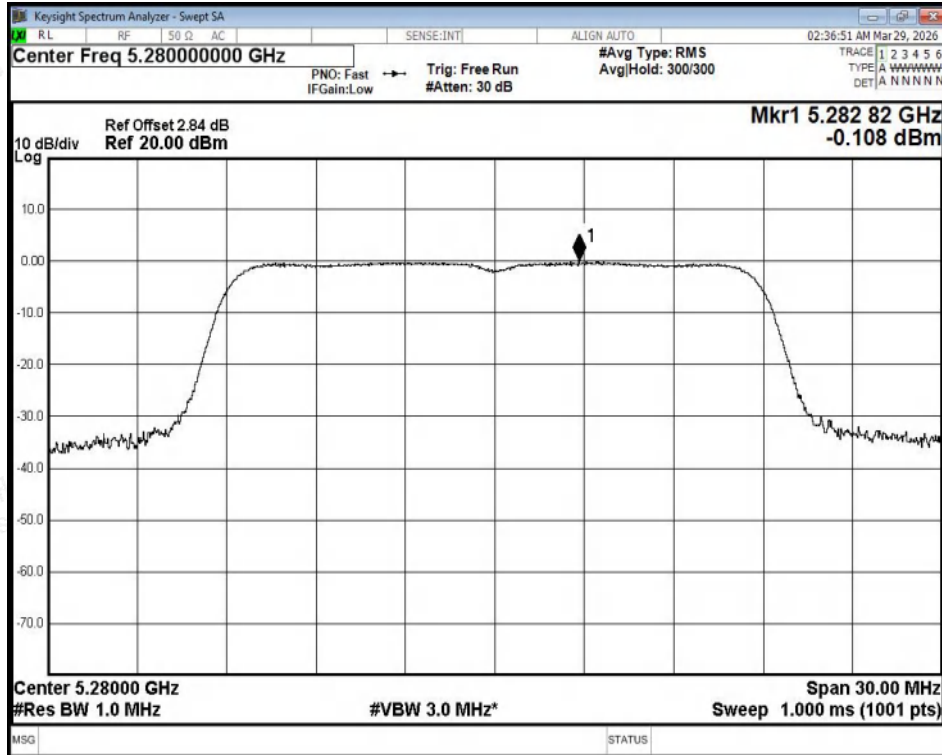


PSD NVNT n20 5280MHz Ant1

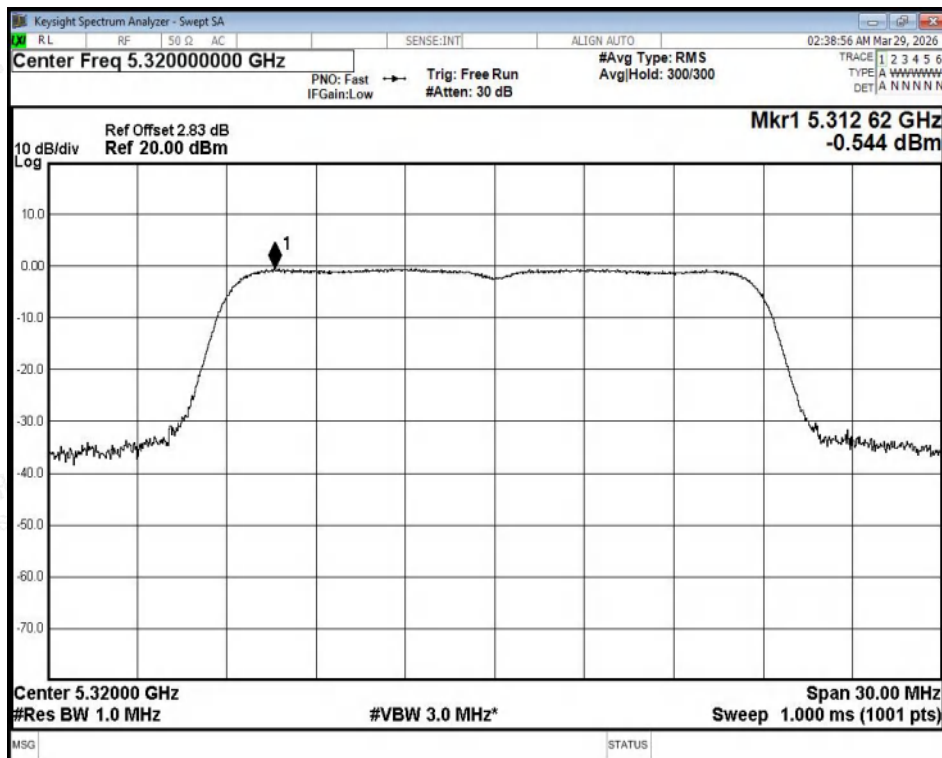


PSD NVNT n20 5320MHz Ant1



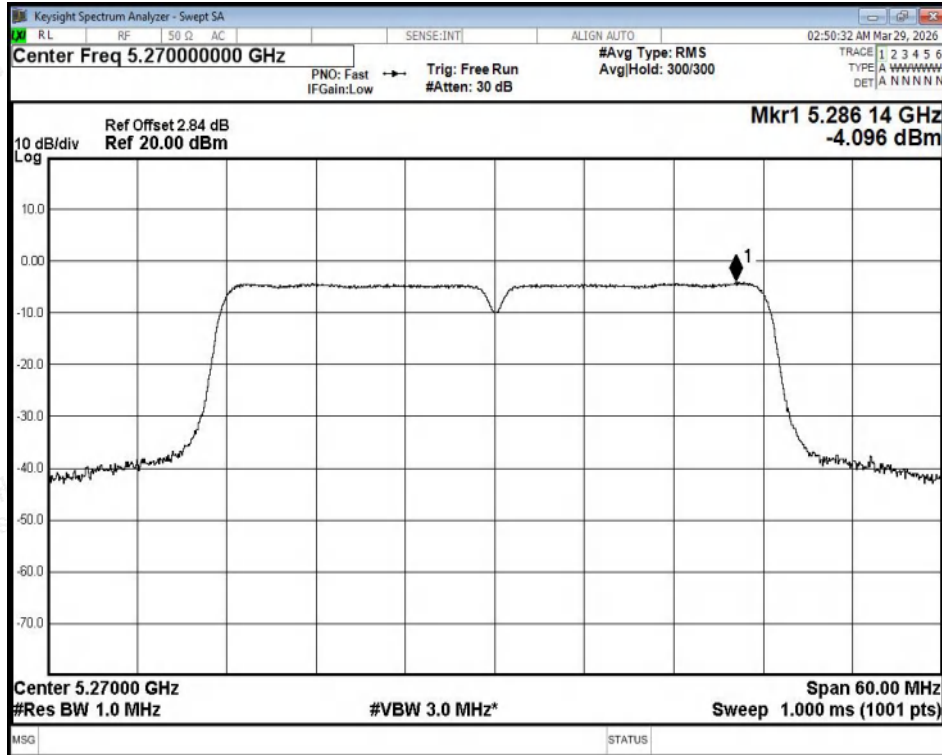


PSD NVNT n40 5270MHz Ant1

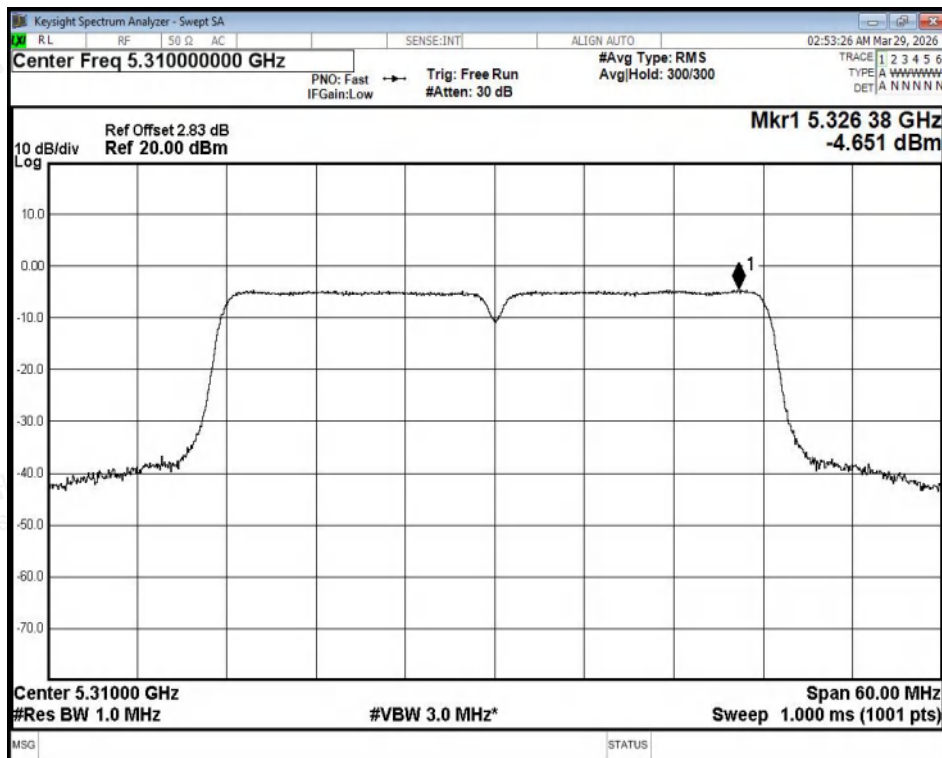


PSD NVNT n40 5310MHz Ant1



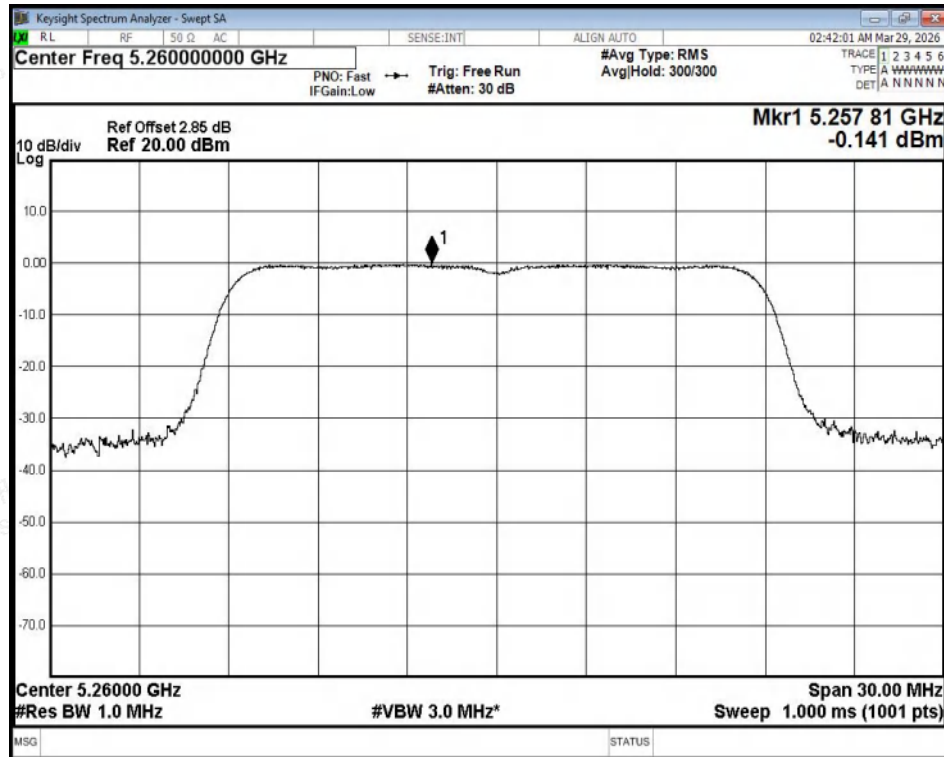


PSD NVNT ac20 5260MHz Ant1

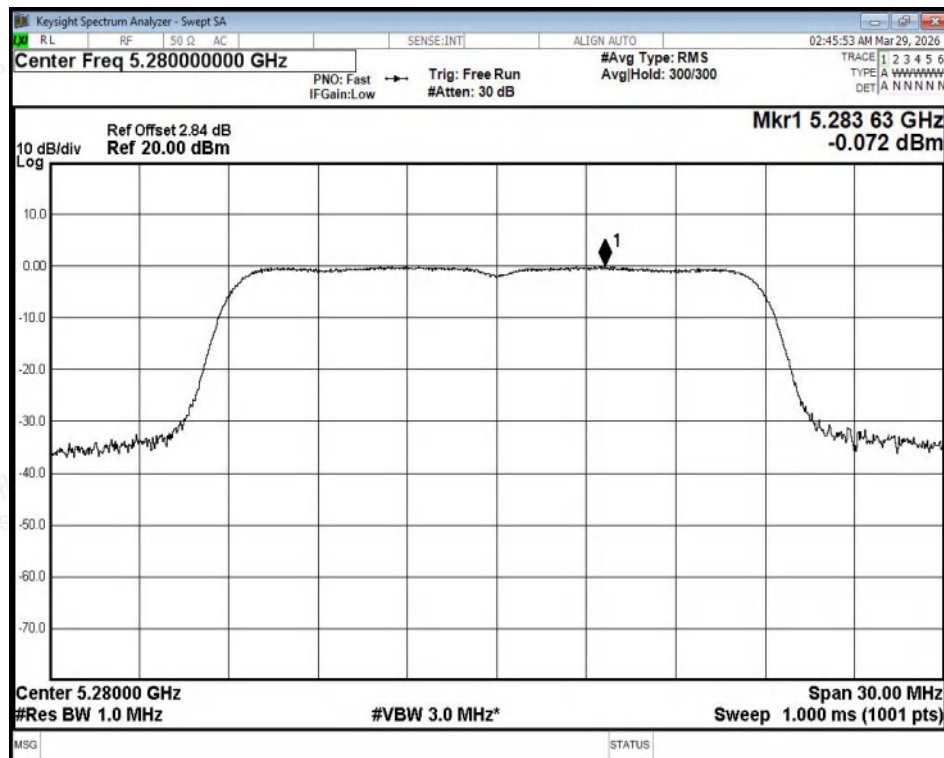


PSD NVNT ac20 5280MHz Ant1



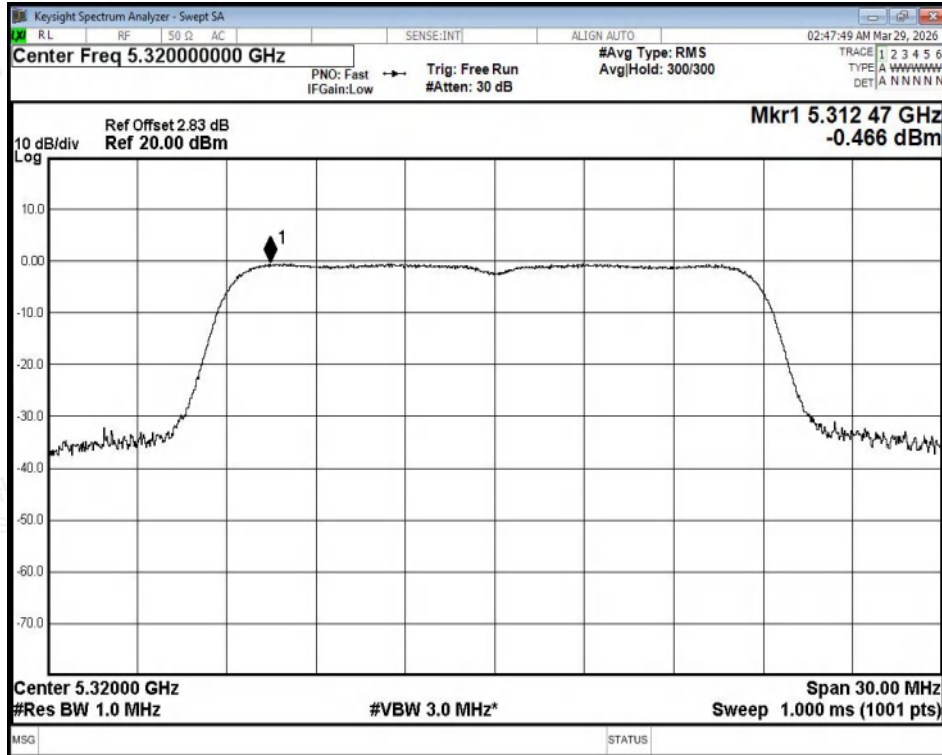


PSD NVNT ac20 5320MHz Ant1

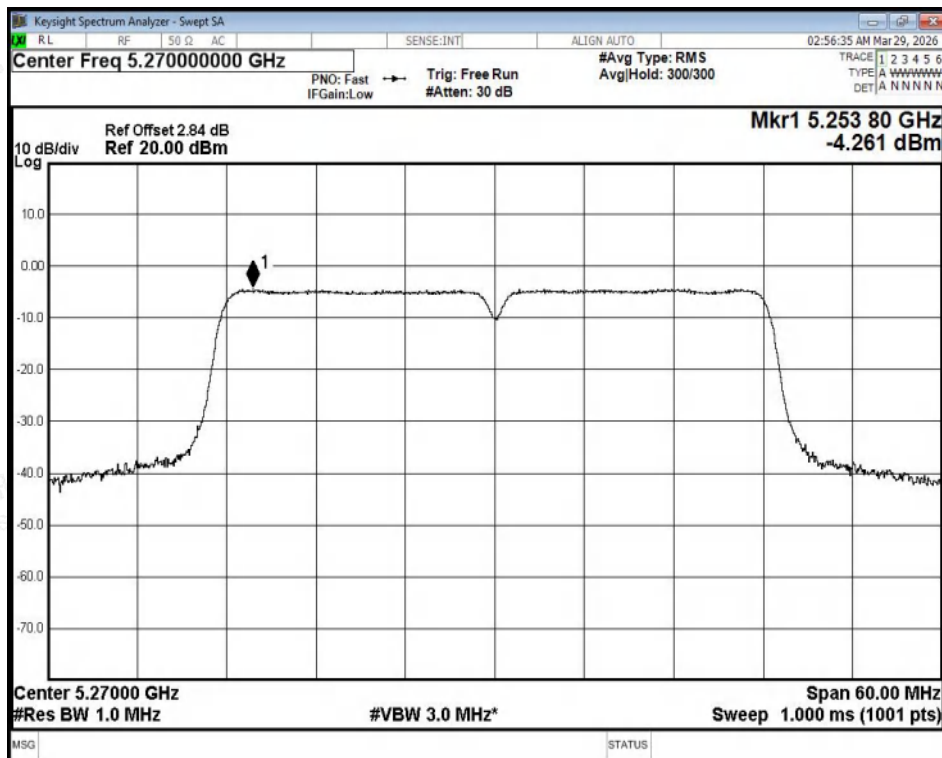


PSD NVNT ac40 5270MHz Ant1



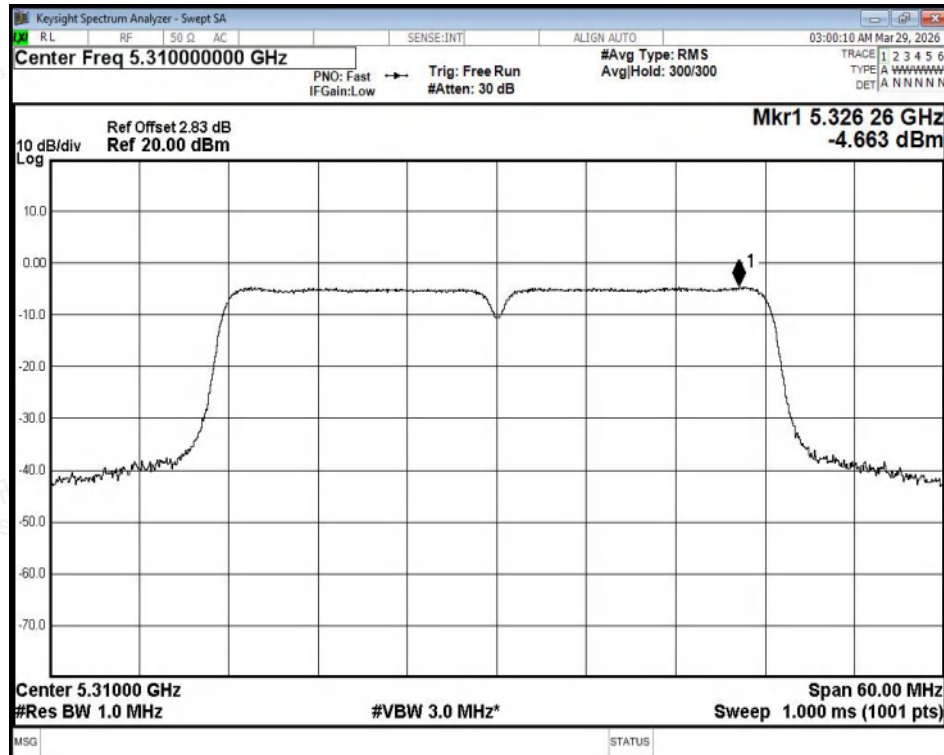

PSD NVNT ac40 5310MHz Ant1

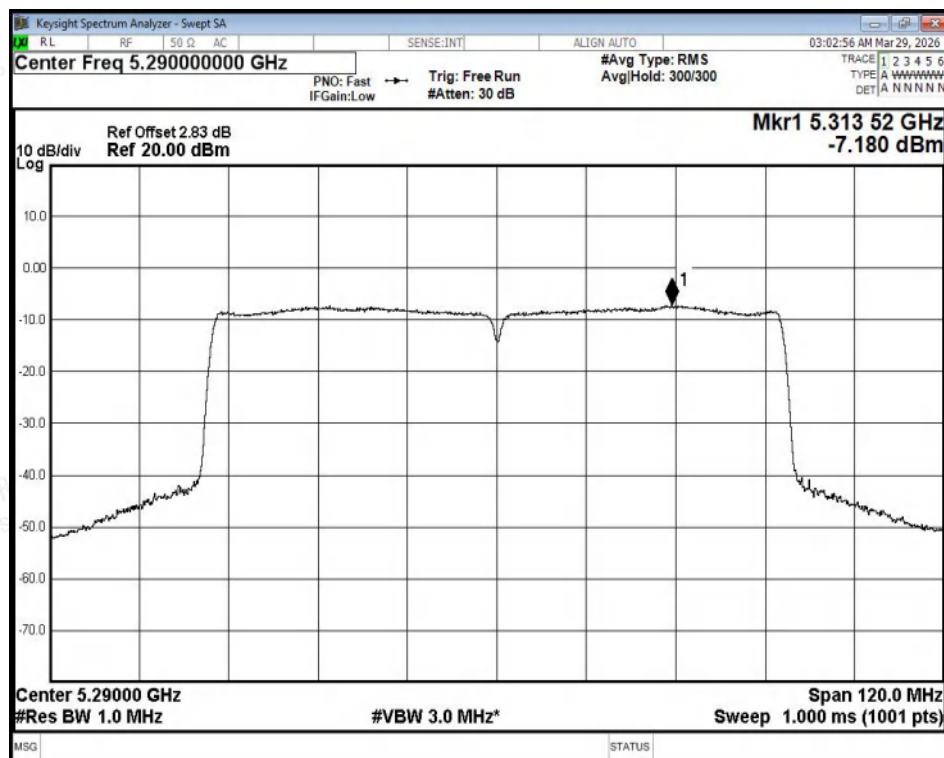

PSD NVNT ac80 5290MHz Ant1





E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant1	4500	-52.62	2	44.61	Peak	68.2	Pass
NVNT	a	5260	Ant1	4500	-59.11	2	38.12	Average	54	Pass
NVNT	a	5260	Ant1	5055.36	-46.37	2	50.86	Peak	68.2	Pass
NVNT	a	5260	Ant1	4787.82	-54.51	2	42.72	Average	54	Pass
NVNT	a	5260	Ant1	5150	-50.36	2	46.87	Peak	68.2	Pass
NVNT	a	5260	Ant1	5150	-56.3	2	40.93	Average	54	Pass
NVNT	a	5320	Ant1	5350	-39.13	2	58.1	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350	-49.28	2	47.95	Average	54	Pass
NVNT	a	5320	Ant1	5351.8	-32.39	2	64.84	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350	-49.28	2	47.95	Average	54	Pass
NVNT	a	5320	Ant1	5460	-49.25	2	47.98	Peak	68.2	Pass
NVNT	a	5320	Ant1	5460	-57.51	2	39.72	Average	54	Pass
NVNT	n20	5260	Ant1	4500	-51.55	2	45.68	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4500	-59.14	2	38.09	Average	54	Pass
NVNT	n20	5260	Ant1	5020.26	-47.29	2	49.94	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4787.82	-54.67	2	42.56	Average	54	Pass
NVNT	n20	5260	Ant1	5150	-49.88	2	47.35	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5150	-56.41	2	40.82	Average	54	Pass
NVNT	n20	5320	Ant1	5350	-37.37	2	59.86	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-48.33	2	48.9	Average	54	Pass
NVNT	n20	5320	Ant1	5351	-36.05	2	61.18	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-48.33	2	48.9	Average	54	Pass
NVNT	n20	5320	Ant1	5460	-50.97	2	46.26	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5460	-57.4	2	39.83	Average	54	Pass
NVNT	n40	5270	Ant1	4500	-53.55	2	43.68	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4500	-59.13	2	38.1	Average	54	Pass
NVNT	n40	5270	Ant1	4807.8	-44.99	2	52.24	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4806.99	-51.62	2	45.61	Average	54	Pass
NVNT	n40	5270	Ant1	5150	-47.61	2	49.62	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5150	-56.75	2	40.48	Average	54	Pass
NVNT	n40	5310	Ant1	5350	-35.44	2	61.79	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350	-47.55	2	49.68	Average	54	Pass
NVNT	n40	5310	Ant1	5350	-35.44	2	61.79	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350	-47.55	2	49.68	Average	54	Pass
NVNT	n40	5310	Ant1	5460	-49.65	2	47.58	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5460	-57.24	2	39.99	Average	54	Pass
NVNT	ac20	5260	Ant1	4500	-52.34	2	44.89	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ac20	5260	Ant1	4500	-59.22	2	38.01	Average	54	Pass
NVNT	ac20	5260	Ant1	5108.4	-46.43	2	50.8	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	4787.82	-54.78	2	42.45	Average	54	Pass
NVNT	ac20	5260	Ant1	5150	-49.58	2	47.65	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5150	-56.4	2	40.83	Average	54	Pass
NVNT	ac20	5320	Ant1	5350	-33.56	2	63.67	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-48.21	2	49.02	Average	54	Pass
NVNT	ac20	5320	Ant1	5350	-33.56	2	63.67	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-48.21	2	49.02	Average	54	Pass
NVNT	ac20	5320	Ant1	5460	-51.38	2	45.85	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5460	-57.44	2	39.79	Average	54	Pass
NVNT	ac40	5270	Ant1	4500	-50.9	2	46.33	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4500	-58.91	2	38.32	Average	54	Pass
NVNT	ac40	5270	Ant1	5041.89	-45.54	2	51.69	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4806.99	-51.5	2	45.73	Average	54	Pass
NVNT	ac40	5270	Ant1	5150	-50.5	2	46.73	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5150	-56.73	2	40.5	Average	54	Pass
NVNT	ac40	5310	Ant1	5350	-35.25	2	61.98	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-47.06	2	50.17	Average	54	Pass
NVNT	ac40	5310	Ant1	5350.4	-35.02	2	62.21	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-47.06	2	50.17	Average	54	Pass
NVNT	ac40	5310	Ant1	5460	-50.16	2	47.07	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5460	-57.15	2	40.08	Average	54	Pass
NVNT	ac80	5290	Ant1	5350	-42.66	2	54.57	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350	-49.09	2	48.14	Average	54	Pass
NVNT	ac80	5290	Ant1	5357.5	-38.98	2	58.25	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350.25	-48.64	2	48.59	Average	54	Pass
NVNT	ac80	5290	Ant1	5460	-49.51	2	47.72	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5460	-56.75	2	40.48	Average	54	Pass
NVNT	ac80	5290	Ant1	4500	-52.51	2	44.72	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	4500	-58.9	2	38.33	Average	54	Pass
NVNT	ac80	5290	Ant1	5055.93	-46.92	2	50.31	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5149.89	-55.13	2	42.1	Average	54	Pass
NVNT	ac80	5290	Ant1	5150	-50.1	2	47.13	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5150	-55.32	2	41.91	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

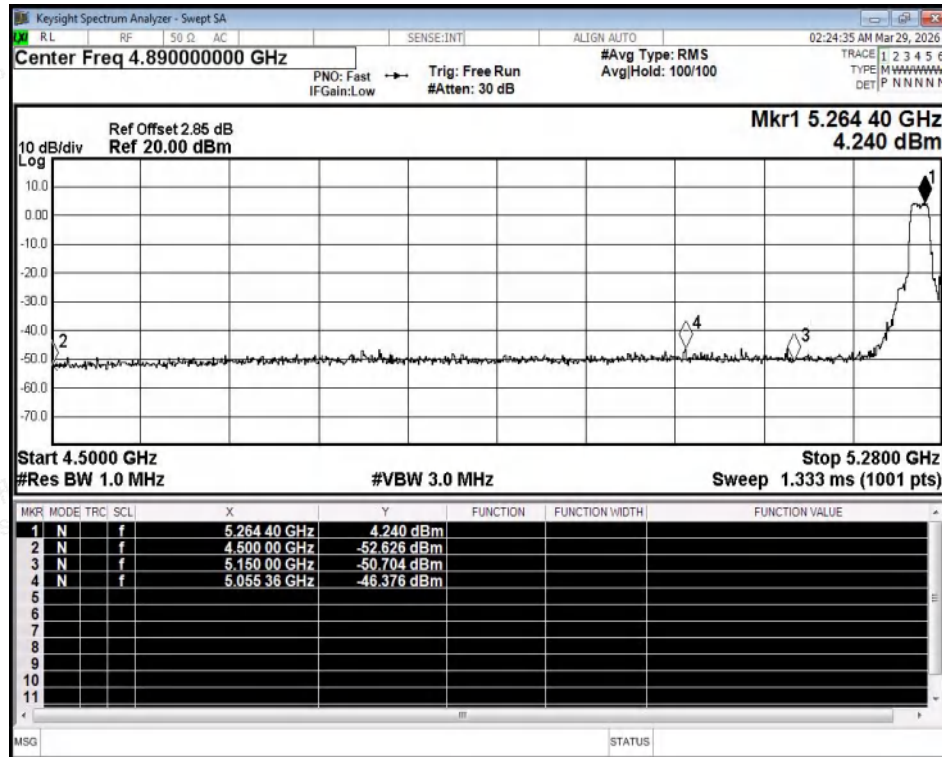

Restrict Band NVNT a 5260MHz Ant1 Peak

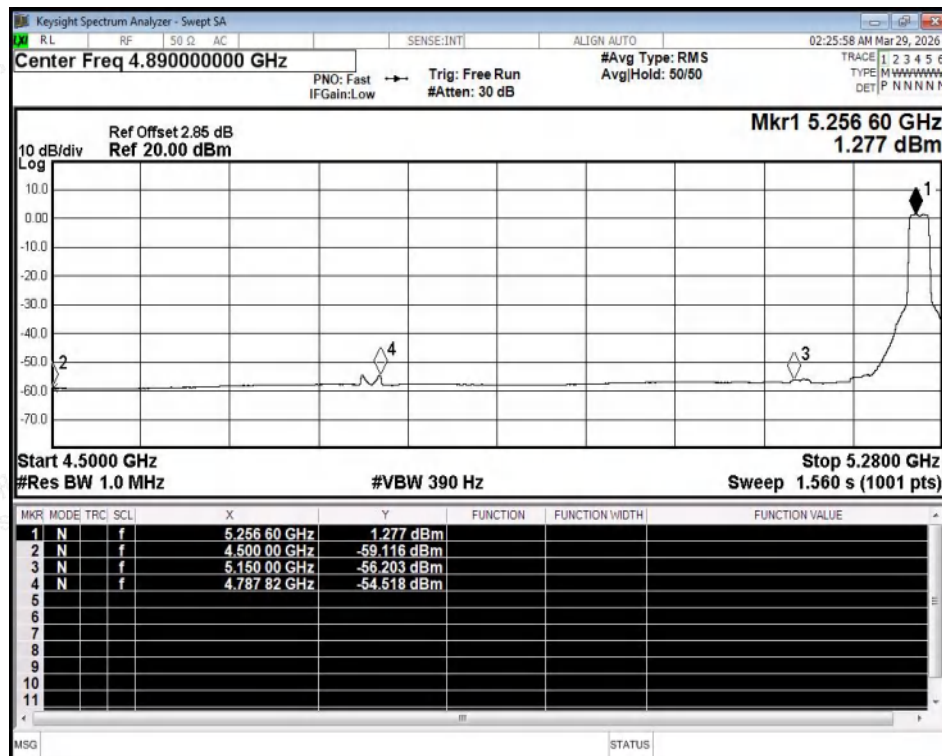

Restrict Band NVNT a 5260MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

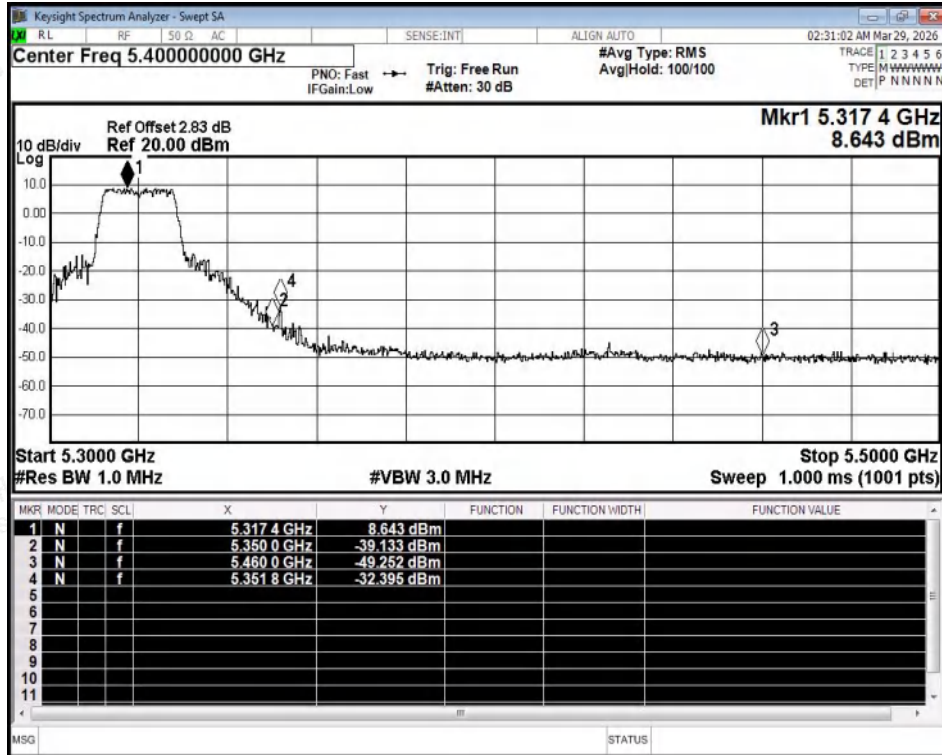

Restrict Band NVNT a 5320MHz Ant1 Peak

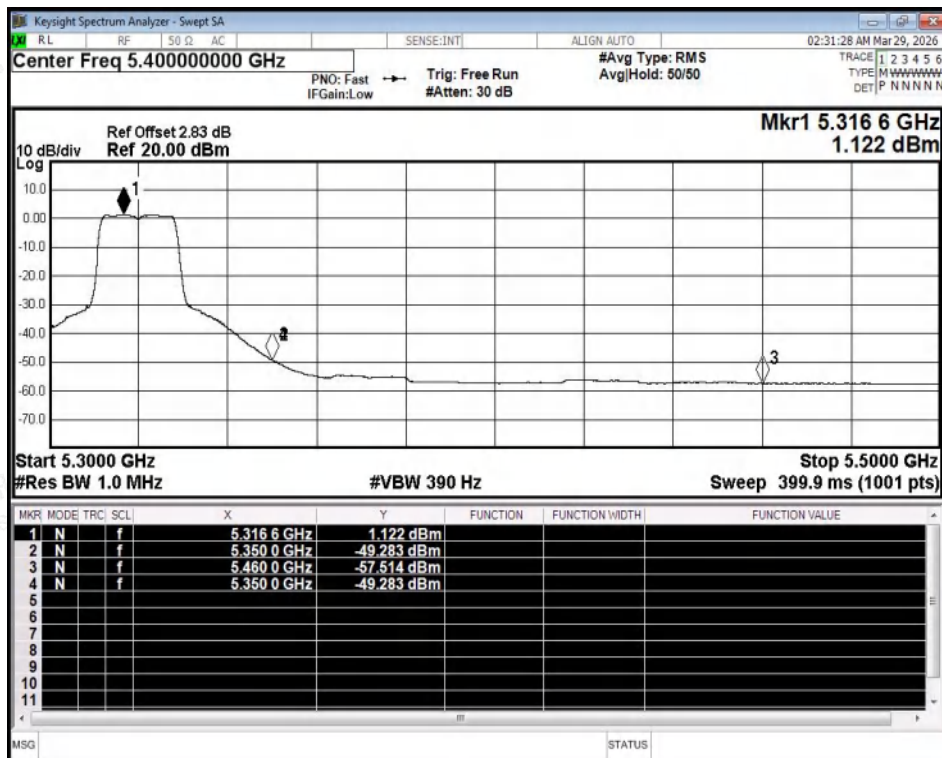

Restrict Band NVNT a 5320MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

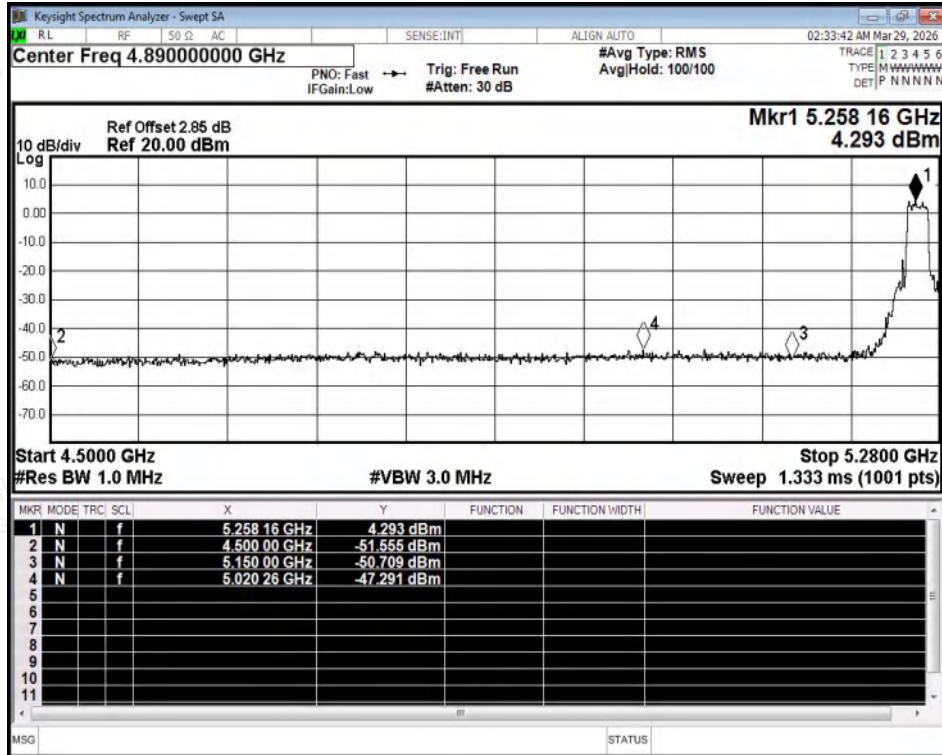

Restrict Band NVNT n20 5260MHz Ant1 Peak

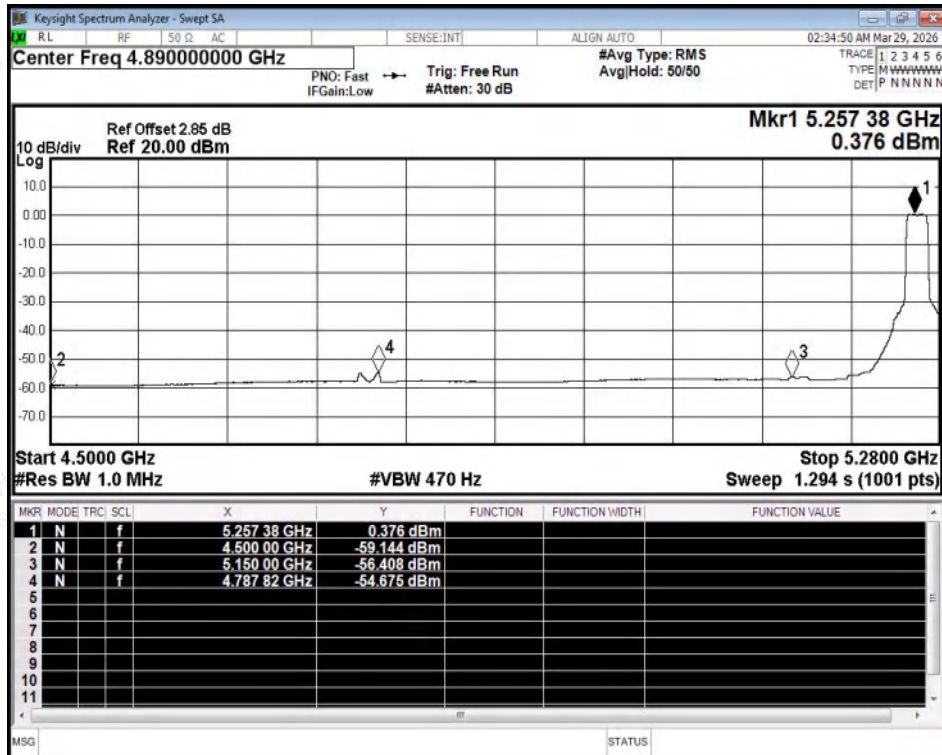

Restrict Band NVNT n20 5260MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

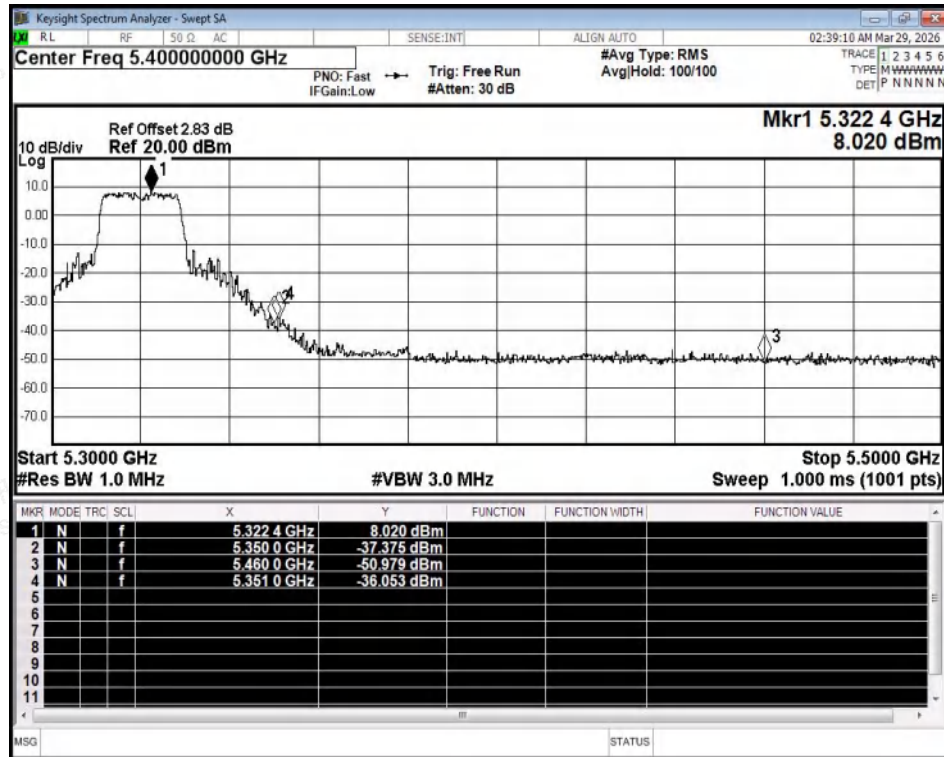


Restrict Band NVNT n20 5320MHz Ant1 Peak

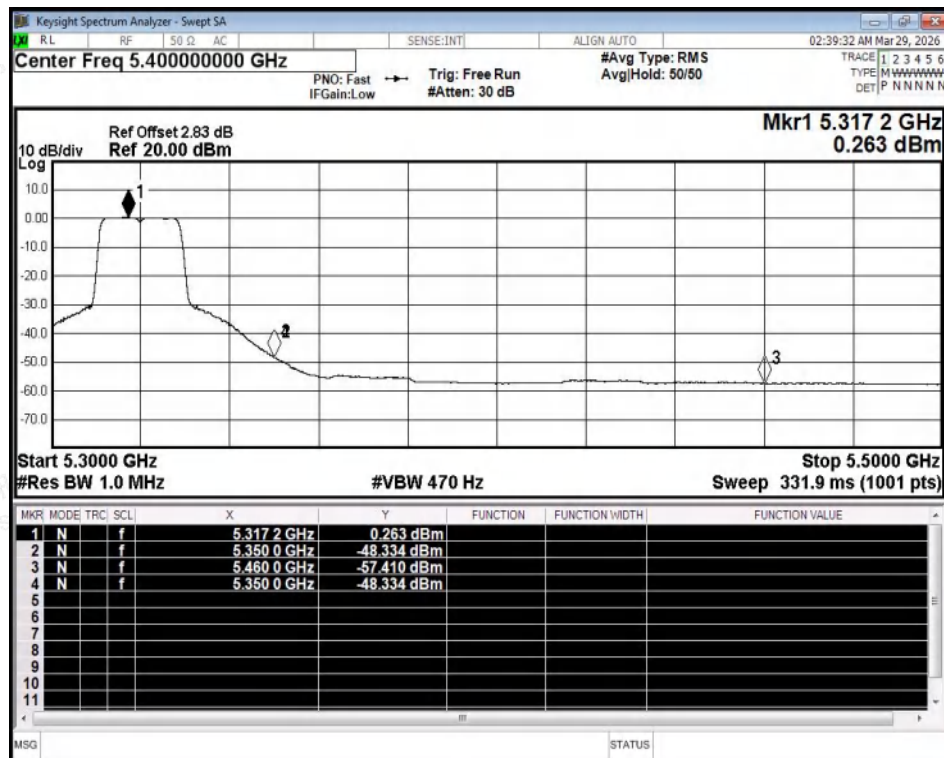


Restrict Band NVNT n20 5320MHz Ant1 Average



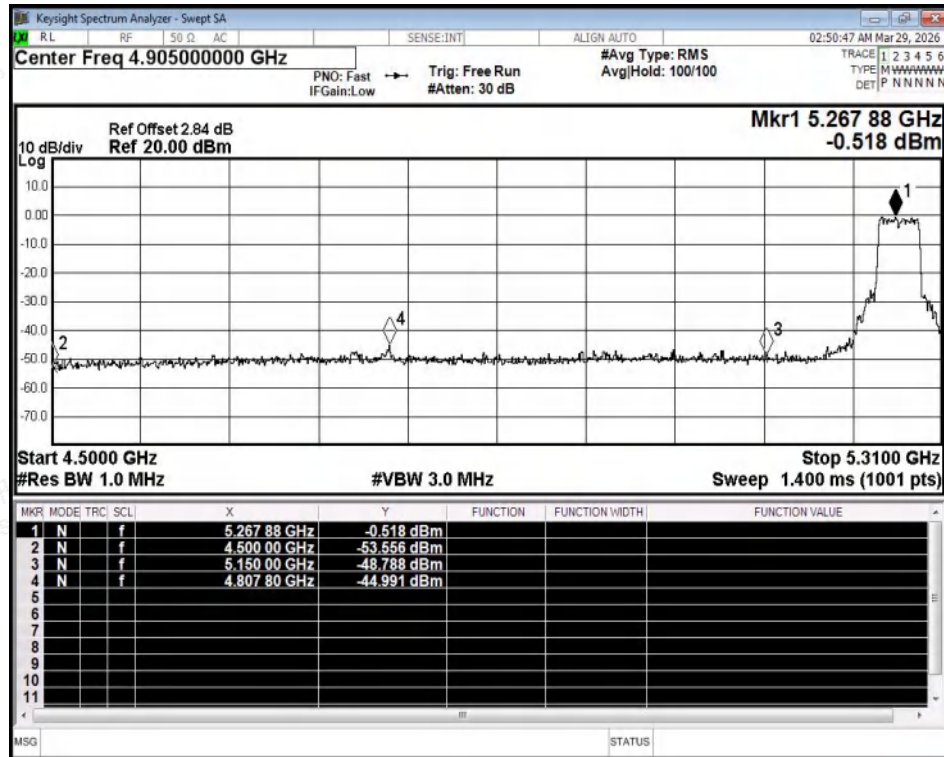

Restrict Band NVNT n40 5270MHz Ant1 Peak

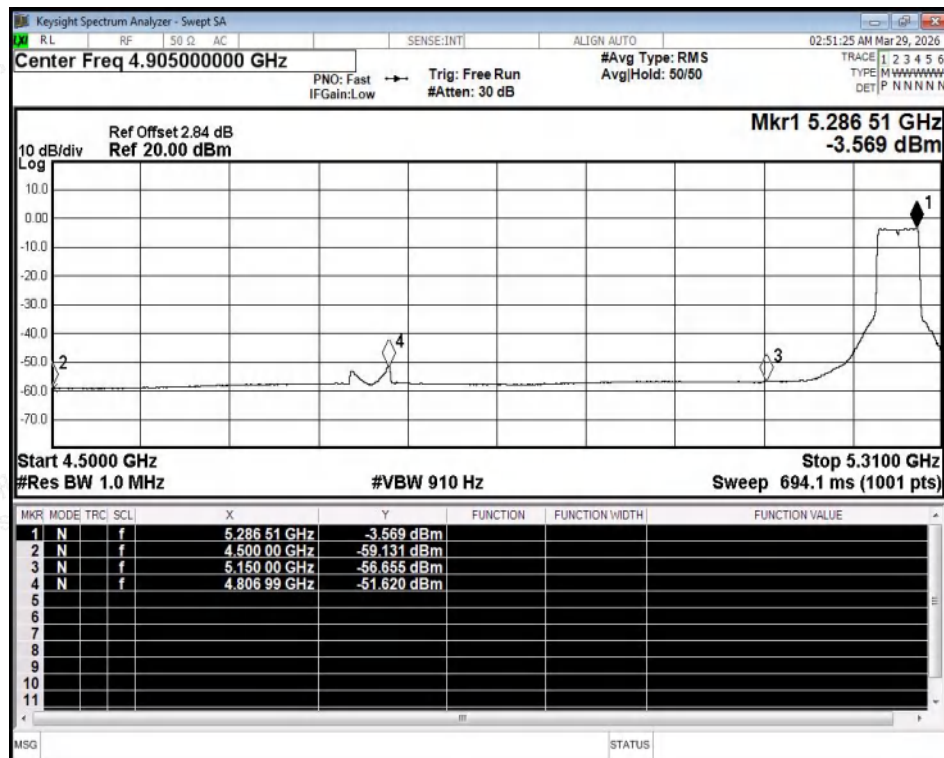

Restrict Band NVNT n40 5270MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

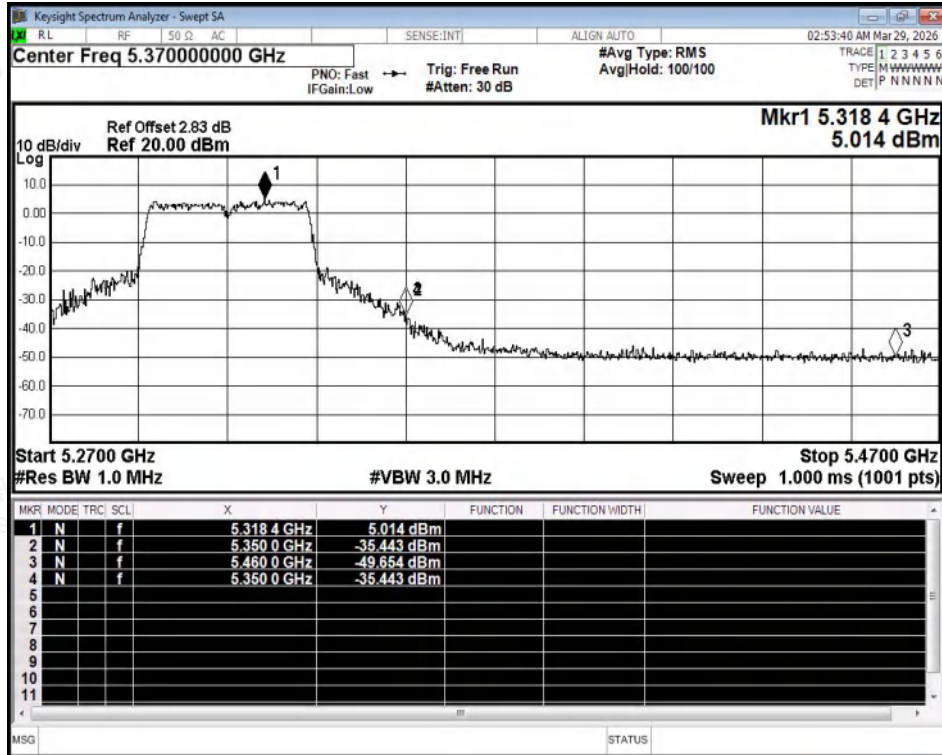

Restrict Band NVNT n40 5310MHz Ant1 Peak

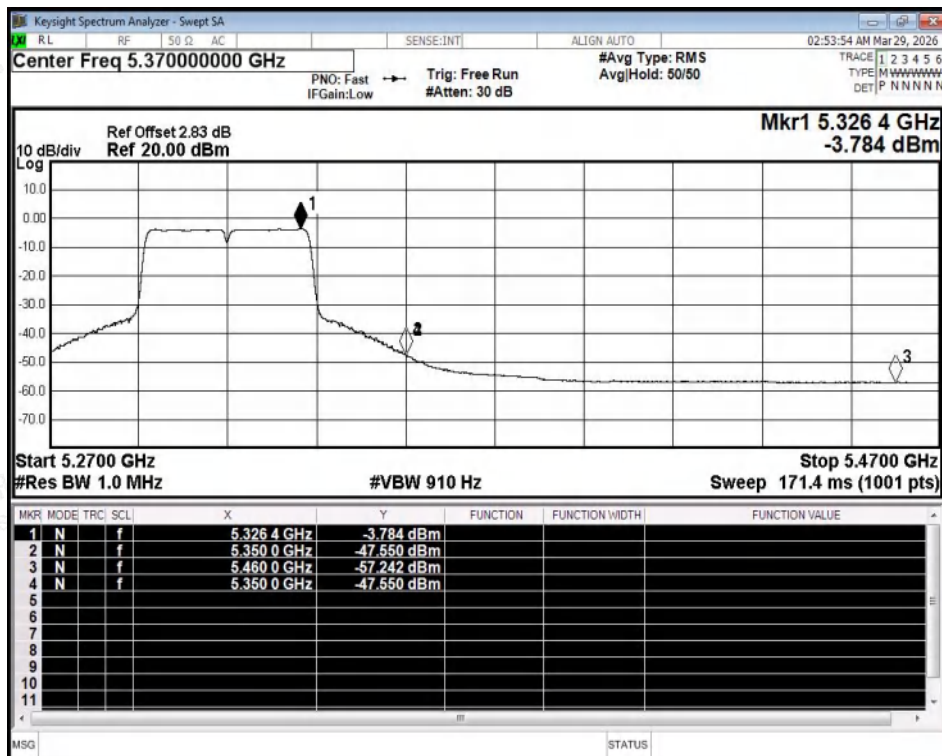

Restrict Band NVNT n40 5310MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

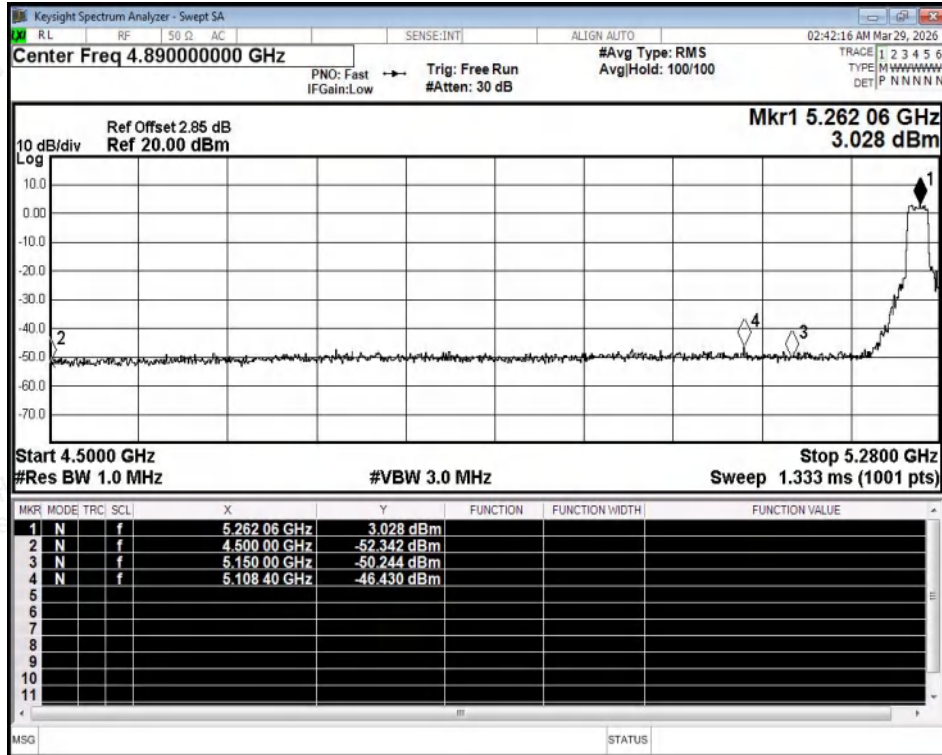


Restrict Band NVNT ac20 5260MHz Ant1 Peak

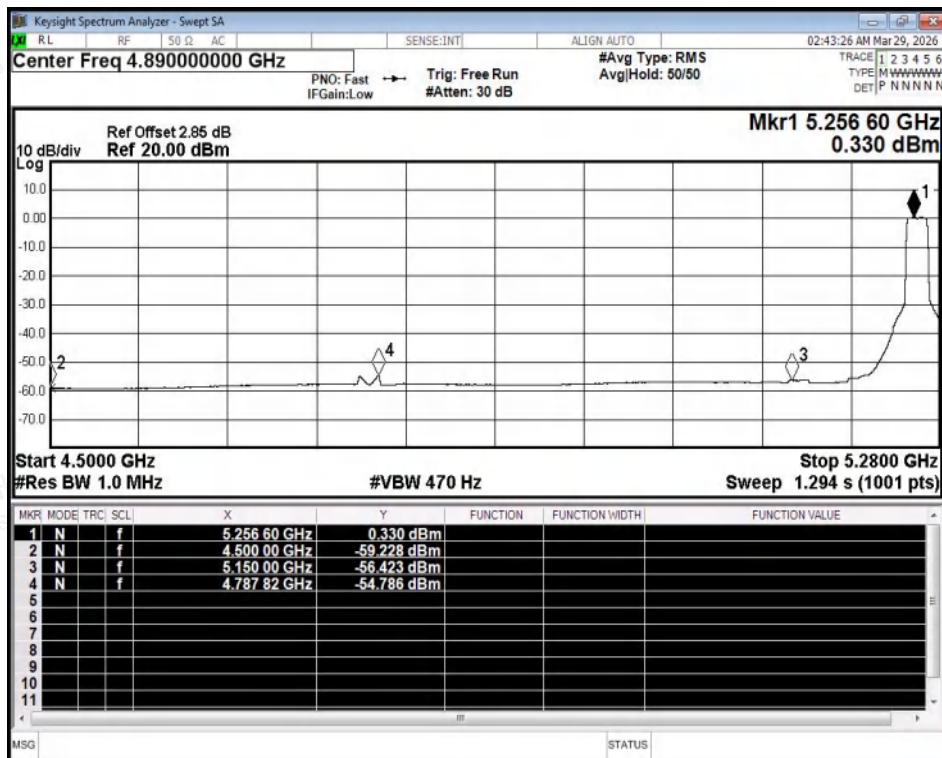


Restrict Band NVNT ac20 5260MHz Ant1 Average



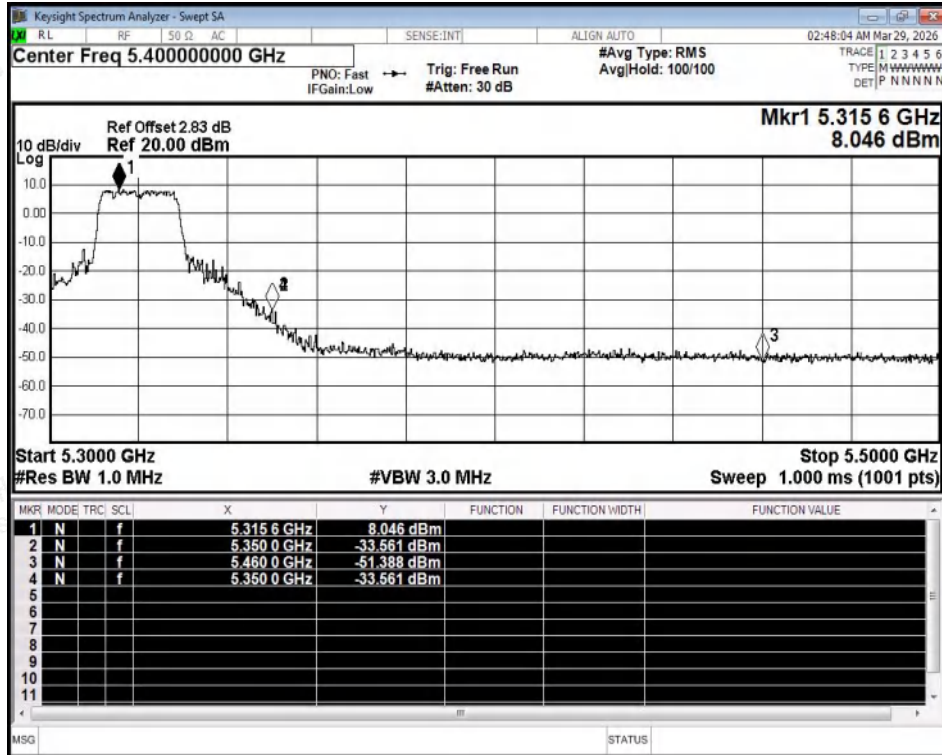


Restrict Band NVNT ac20 5320MHz Ant1 Peak

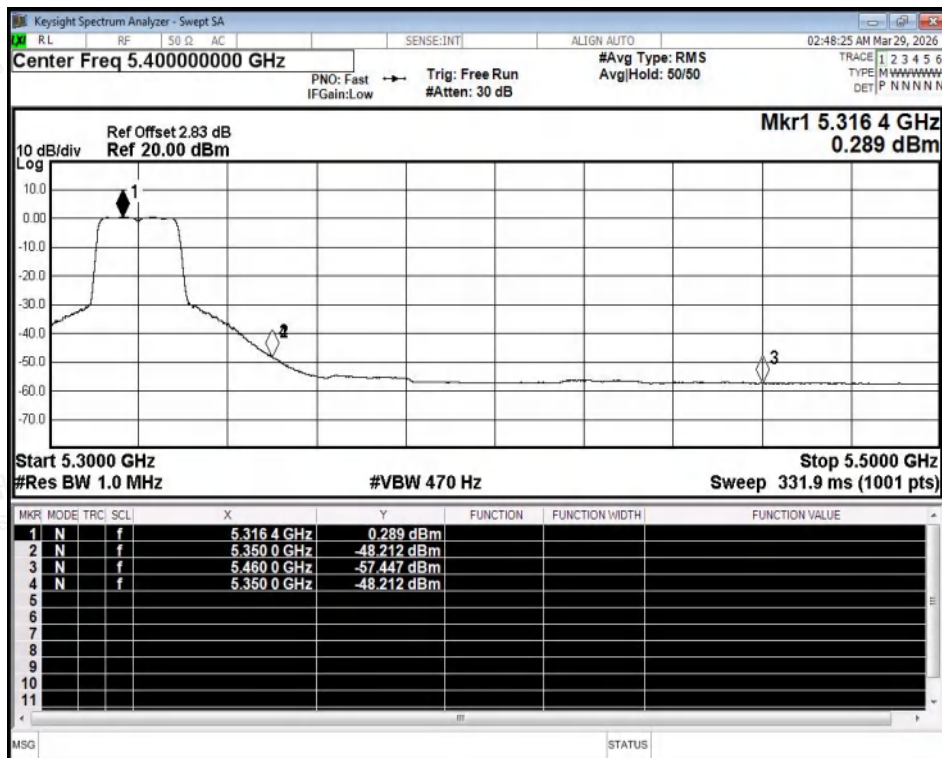


Restrict Band NVNT ac20 5320MHz Ant1 Average



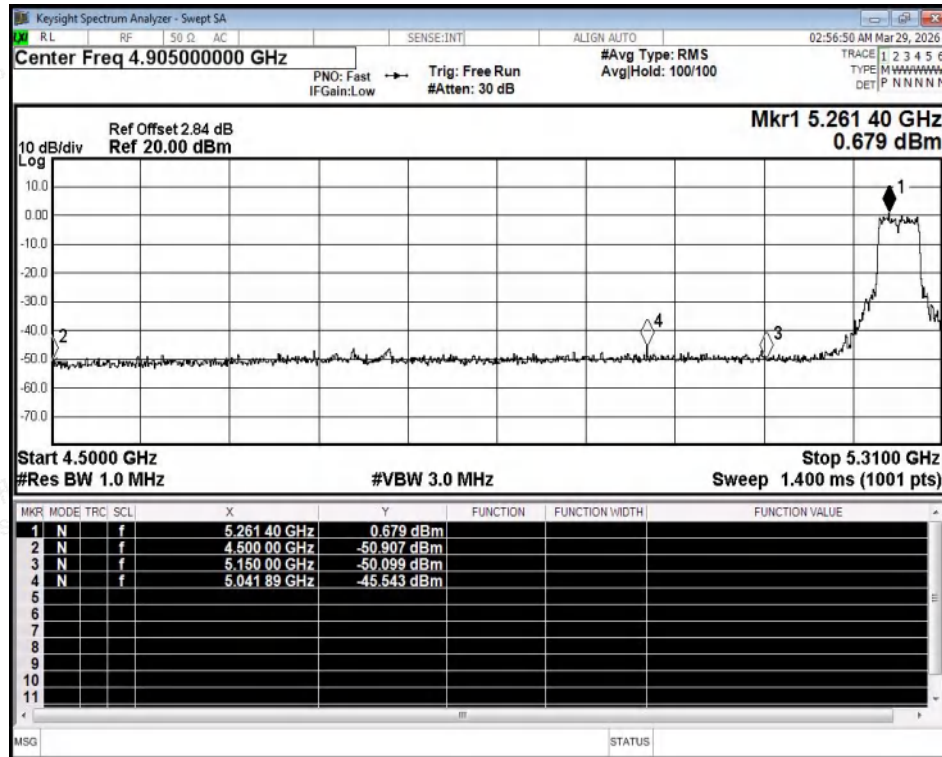


Restrict Band NVNT ac40 5270MHz Ant1 Peak

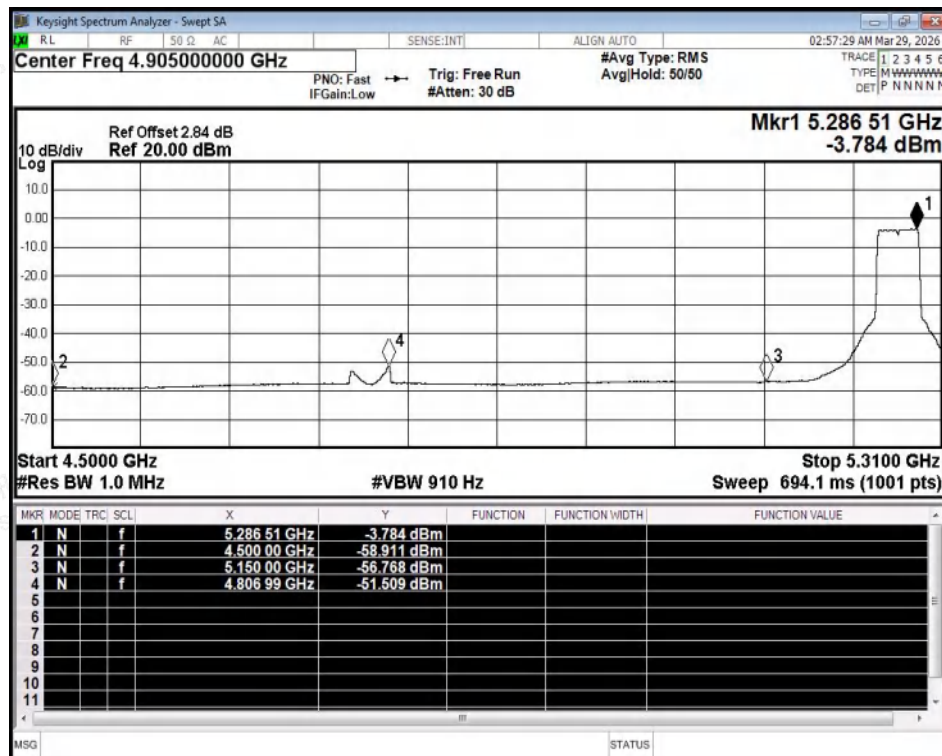


Restrict Band NVNT ac40 5270MHz Ant1 Average



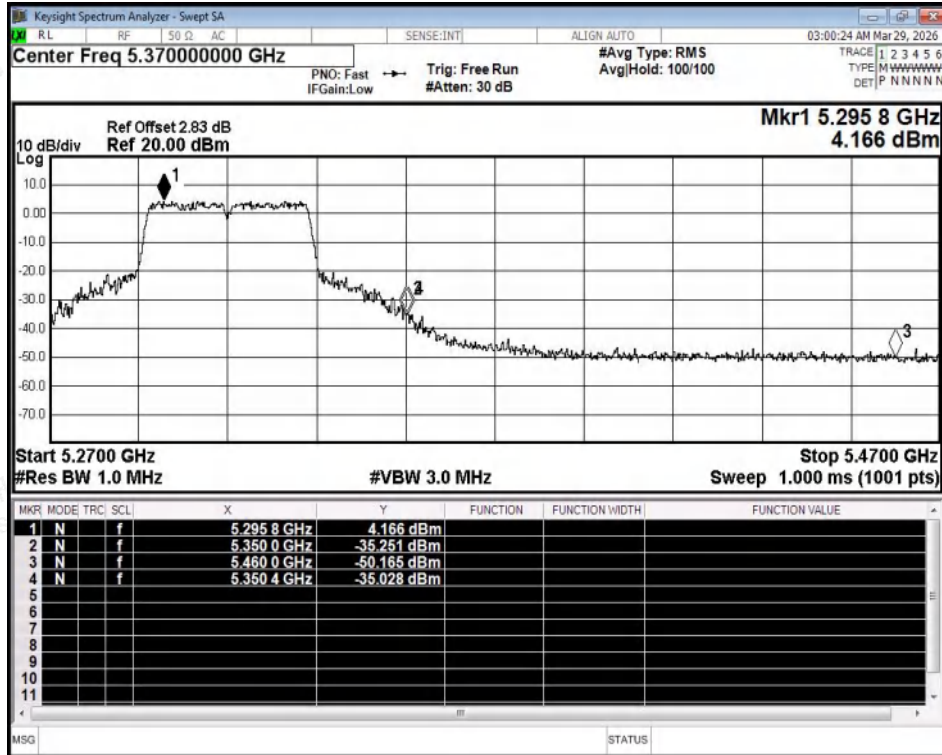

Restrict Band NVNT ac40 5310MHz Ant1 Peak

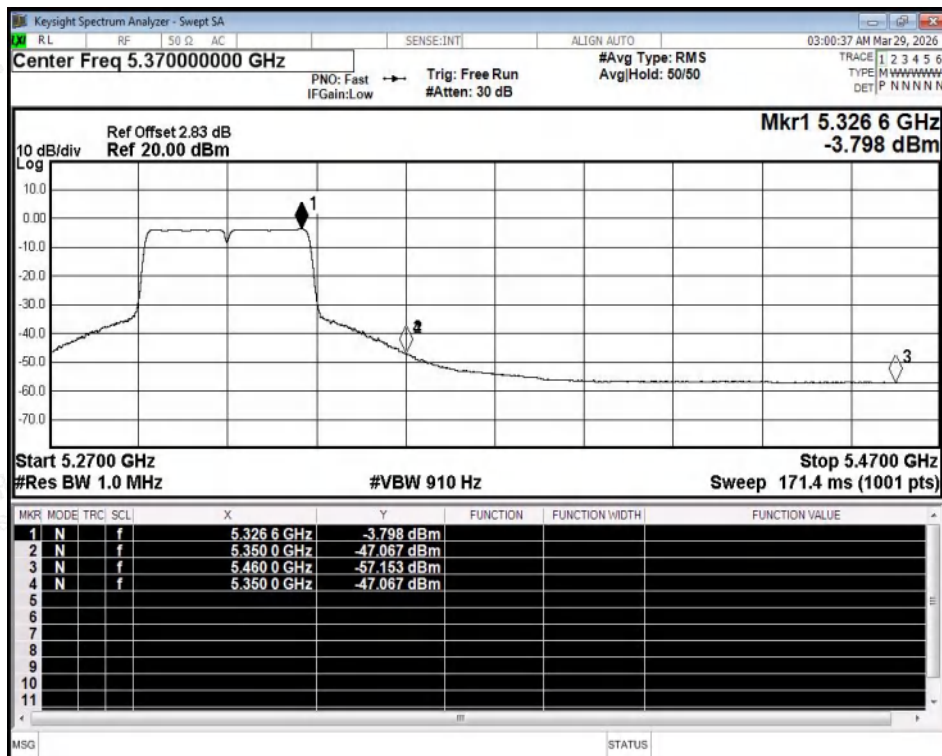

Restrict Band NVNT ac40 5310MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

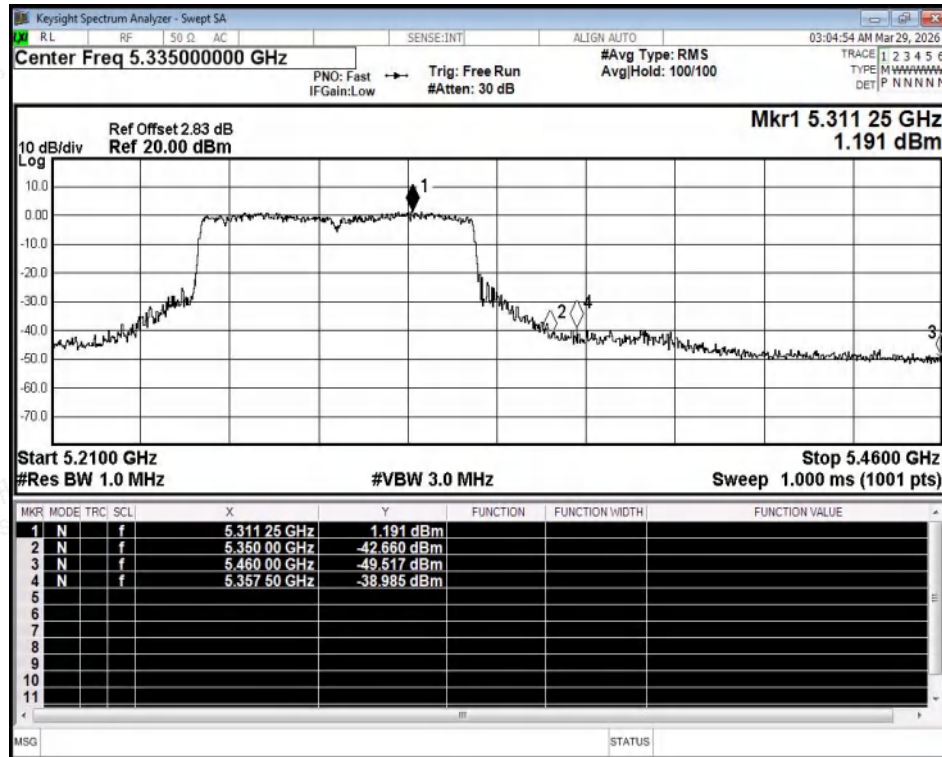


Restrict Band NVNT ac80 5290MHz Ant1 Peak

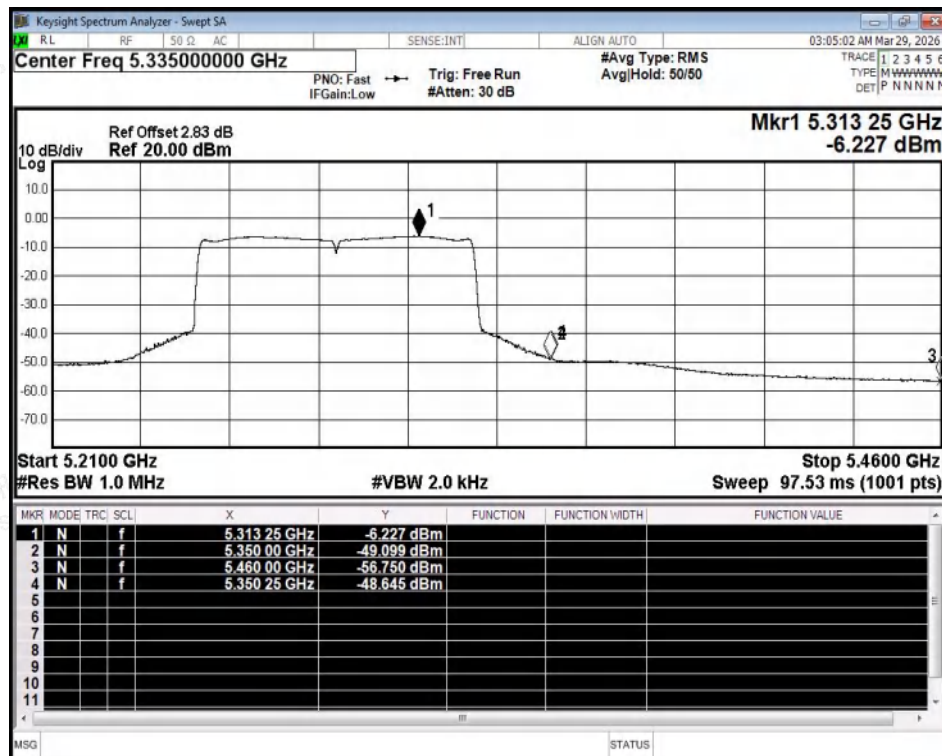


Restrict Band NVNT ac80 5290MHz Ant1 Average



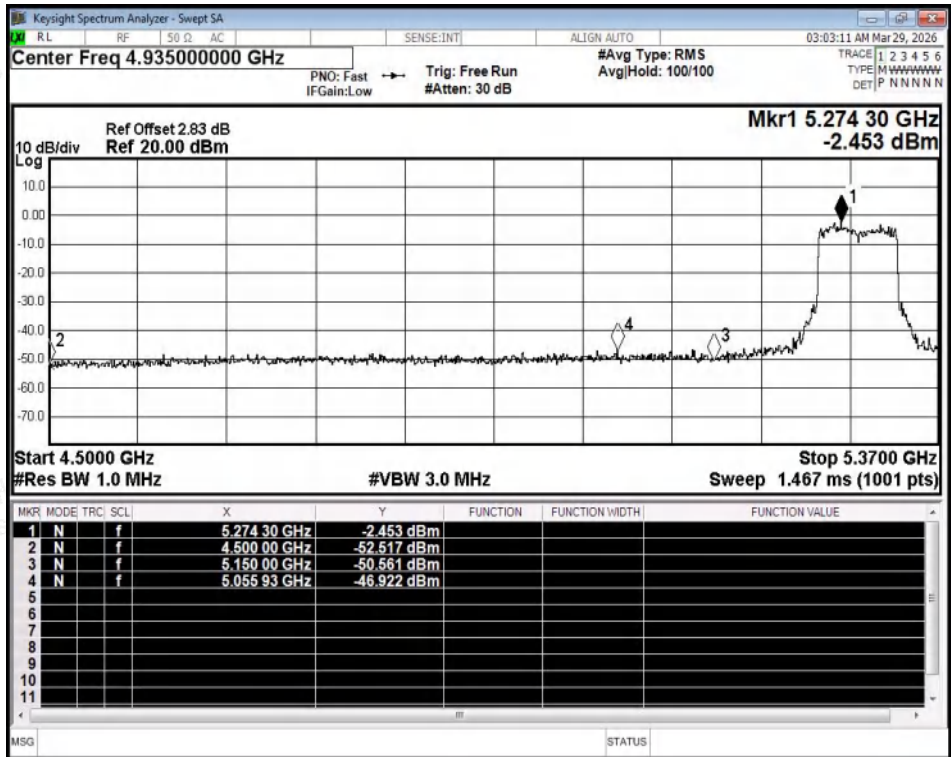

Restrict Band NVNT ac80 5290MHz Ant1 Peak

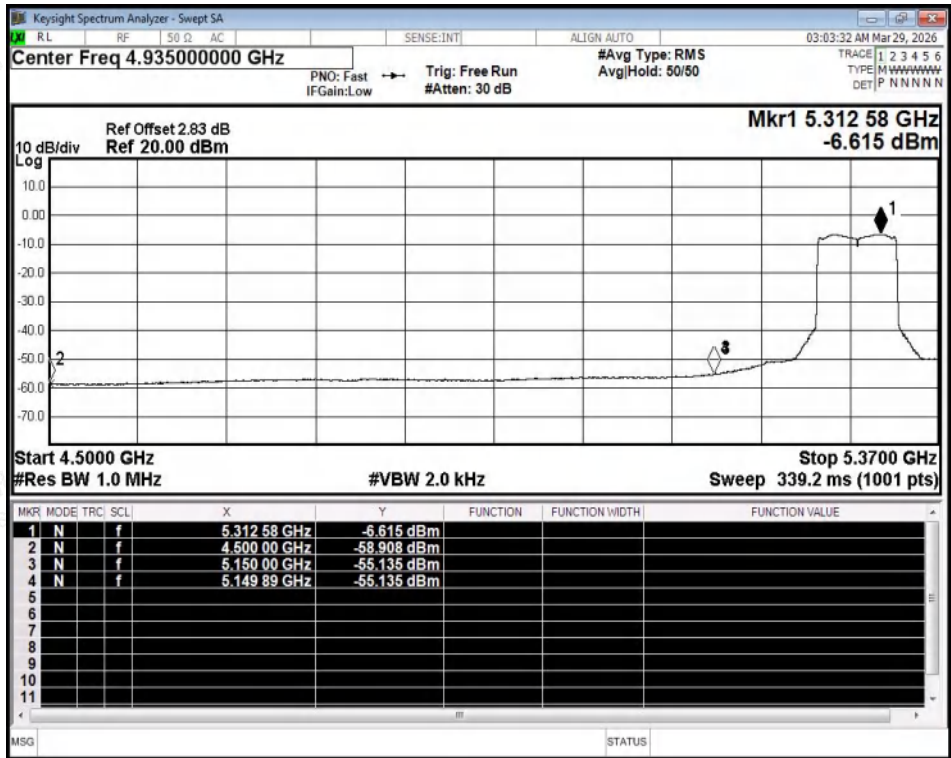

Restrict Band NVNT ac80 5290MHz Ant1 Average






E.5 Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5260	Ant1	5260	0	0	25	Pass
NVNT	a	5280	Ant1	5279.98	-20000	-3.79	25	Pass
NVNT	a	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	n20	5260	Ant1	5259.98	-20000	-3.8	25	Pass
NVNT	n20	5280	Ant1	5279.98	-20000	-3.79	25	Pass
NVNT	n20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	n40	5270	Ant1	5269.96	-40000	-7.59	25	Pass
NVNT	n40	5310	Ant1	5310	0	0	25	Pass
NVNT	ac20	5260	Ant1	5259.98	-20000	-3.8	25	Pass
NVNT	ac20	5280	Ant1	5279.98	-20000	-3.79	25	Pass
NVNT	ac20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	ac40	5270	Ant1	5269.96	-40000	-7.59	25	Pass
NVNT	ac40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac80	5290	Ant1	5290	0	0	25	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

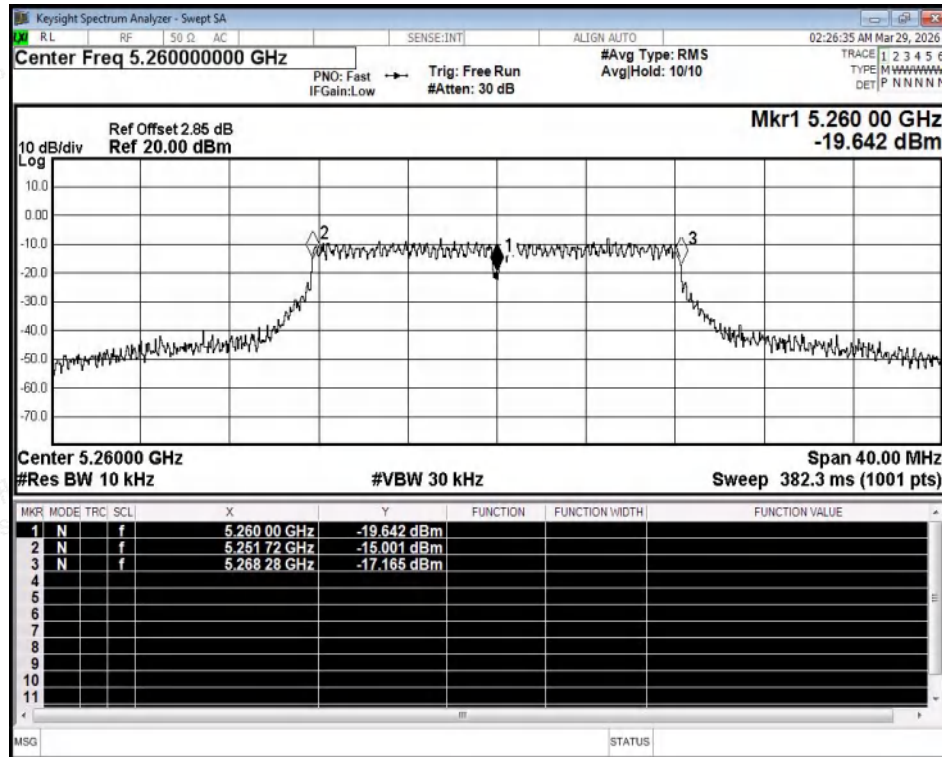


Freq. Stability NVNT a 5260MHz Ant1

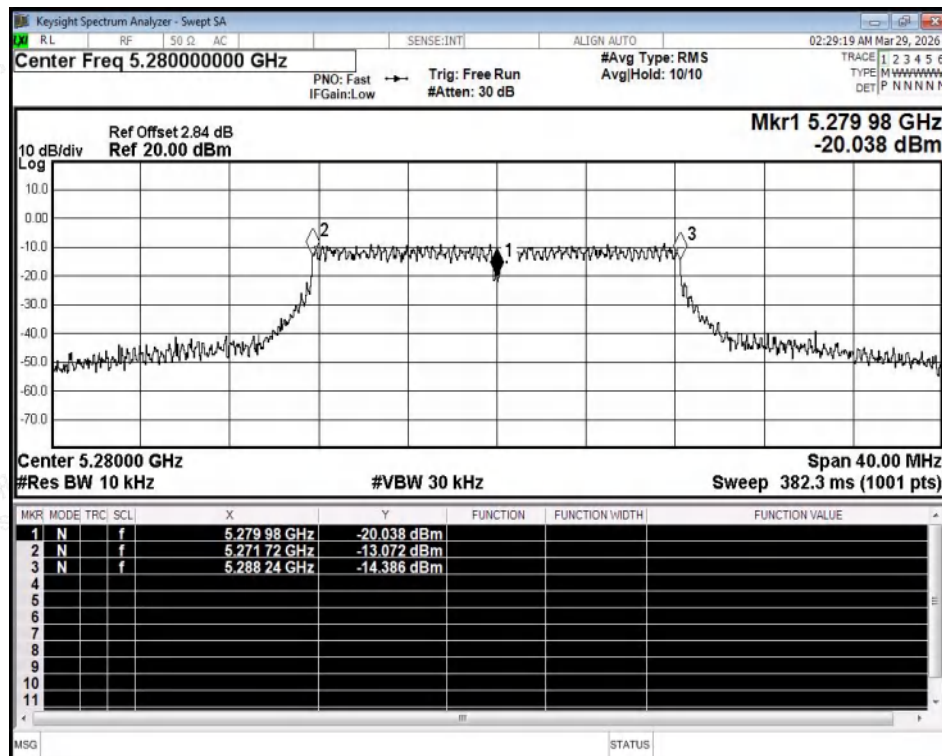


Freq. Stability NVNT a 5280MHz Ant1



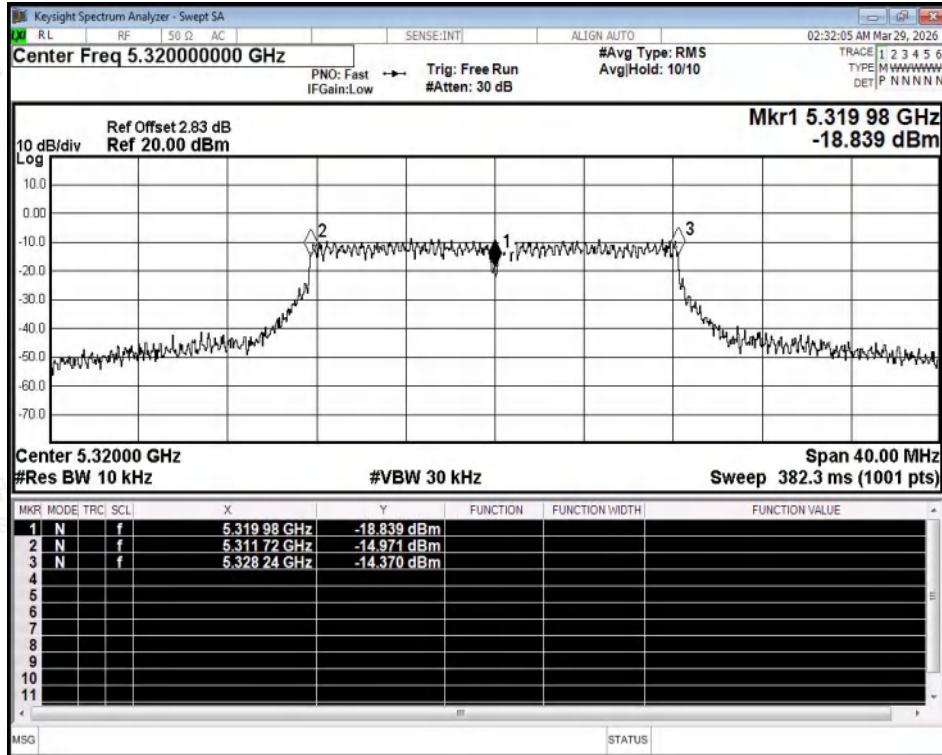

Freq. Stability NVNT a 5320MHz Ant1

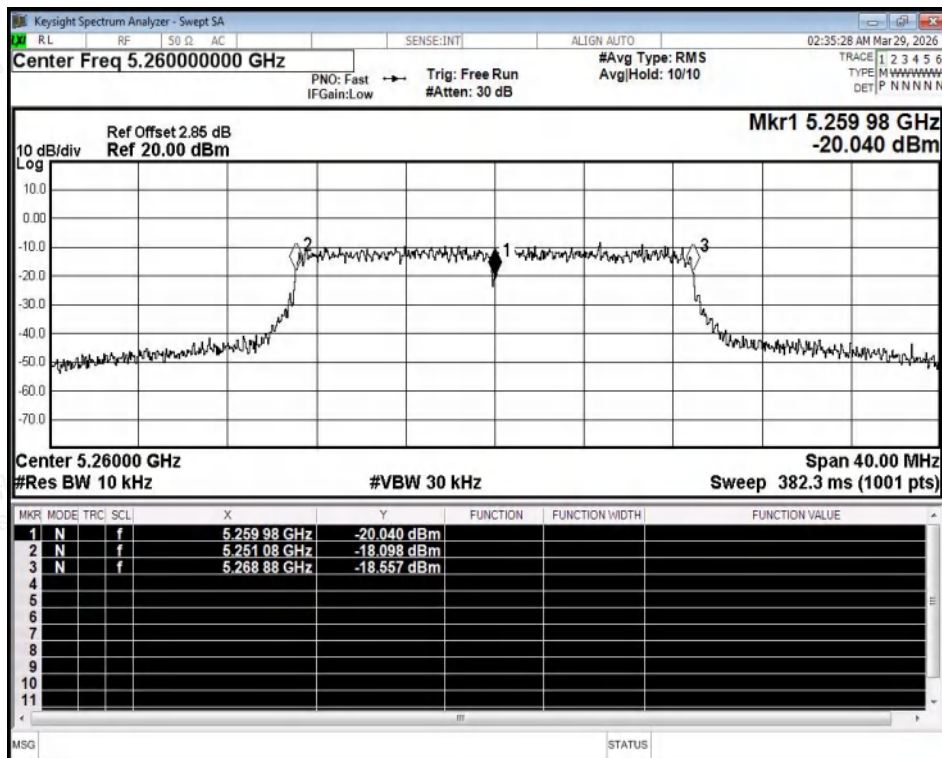

Freq. Stability NVNT n20 5260MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

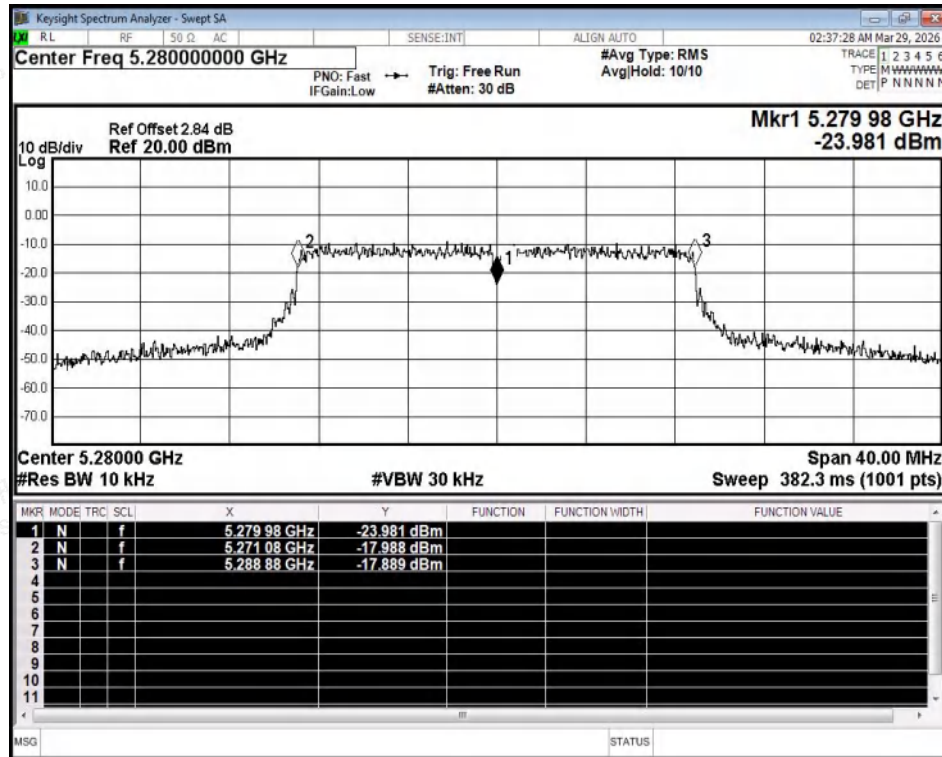


Freq. Stability NVNT n20 5280MHz Ant1

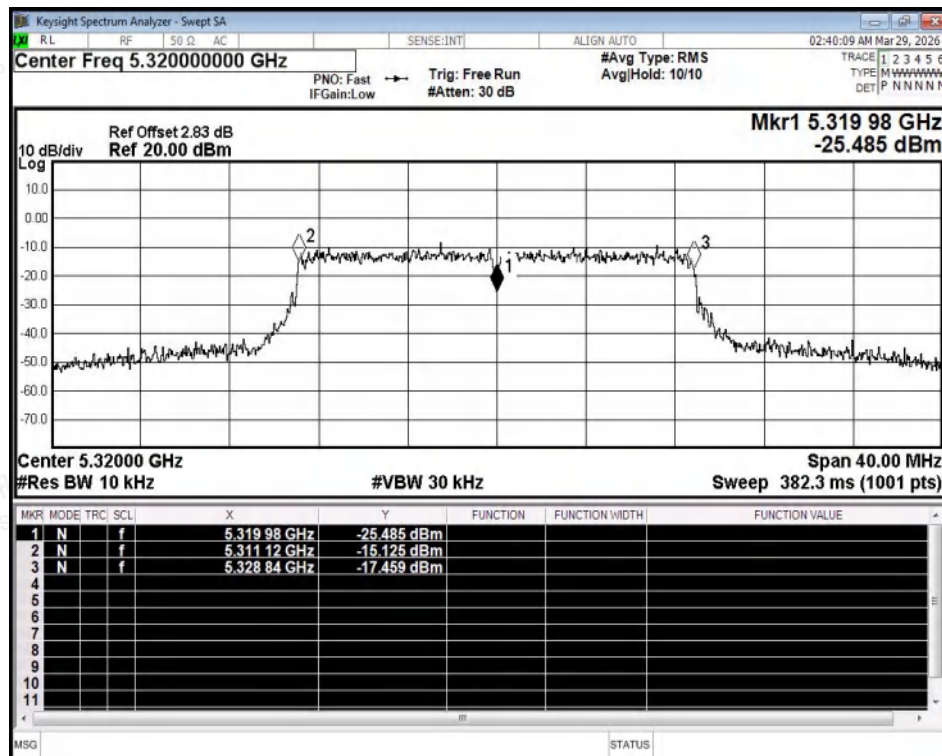


Freq. Stability NVNT n20 5320MHz Ant1



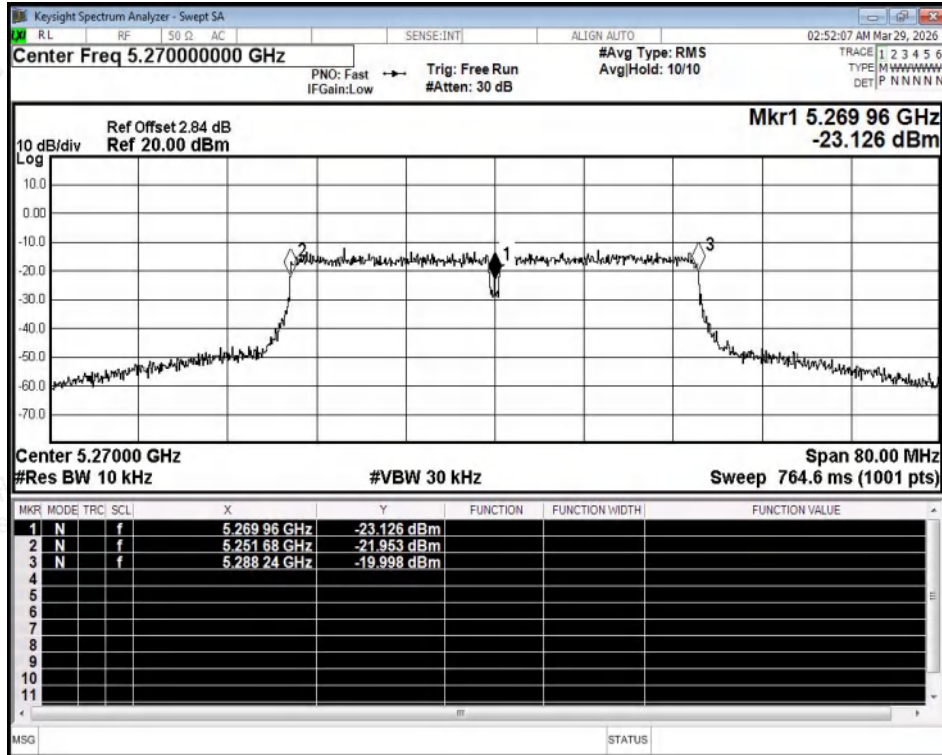


Freq. Stability NVNT n40 5270MHz Ant1

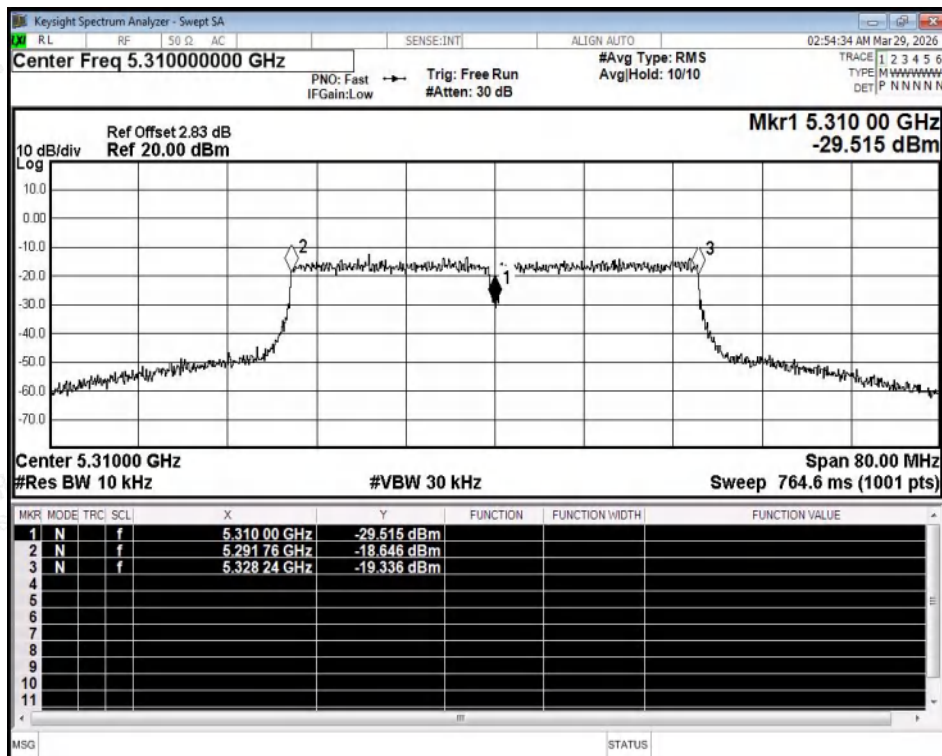


Freq. Stability NVNT n40 5310MHz Ant1



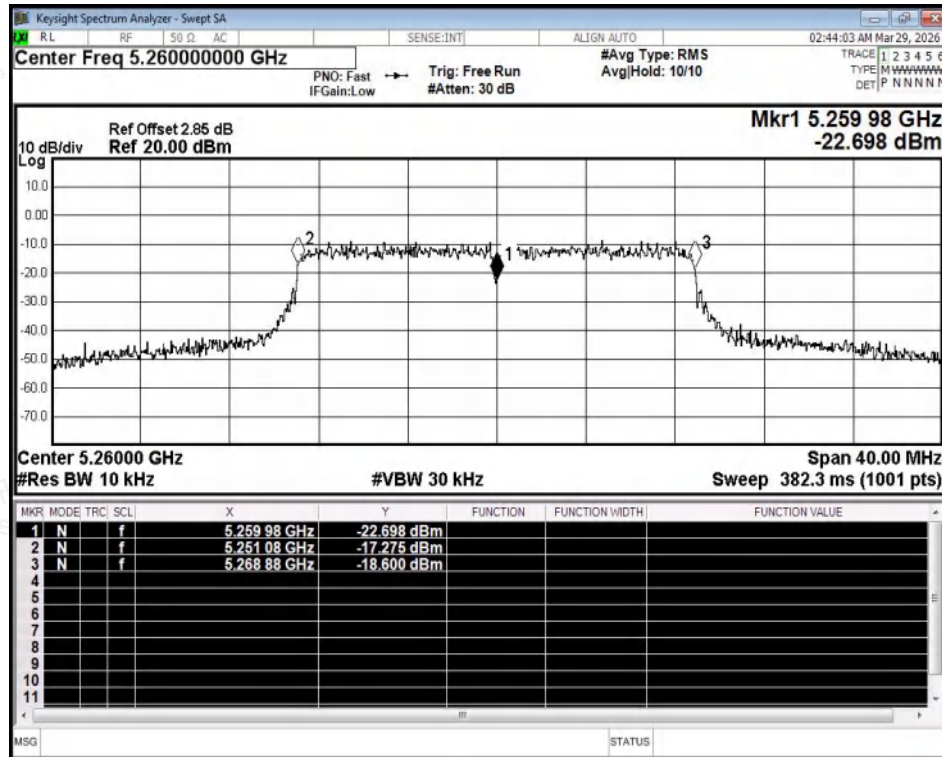


Freq. Stability NVNT ac20 5260MHz Ant1

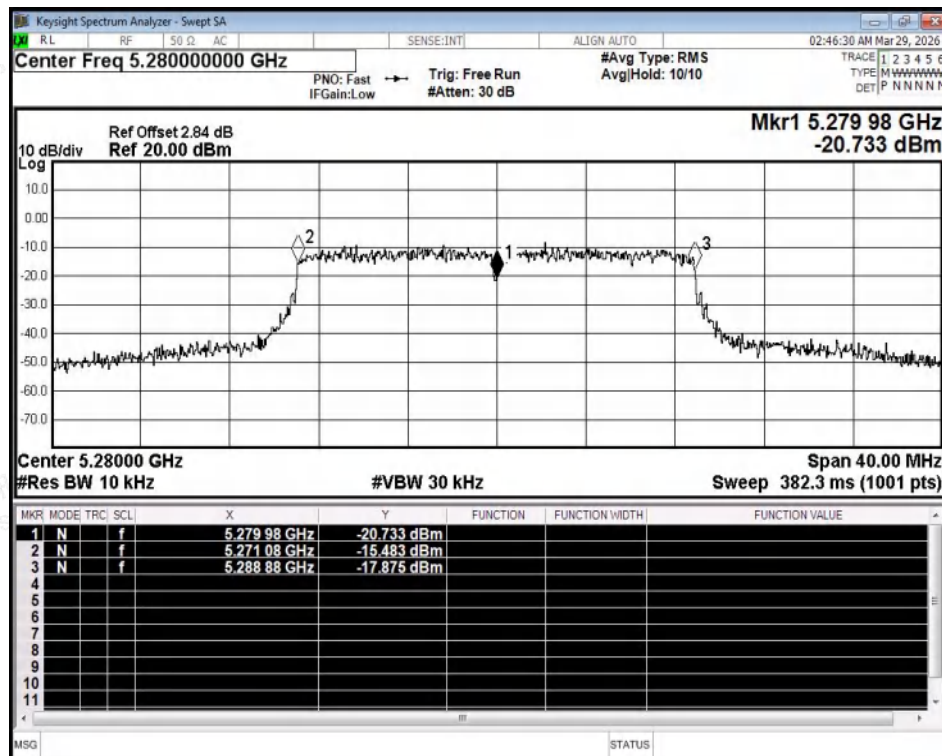


Freq. Stability NVNT ac20 5280MHz Ant1



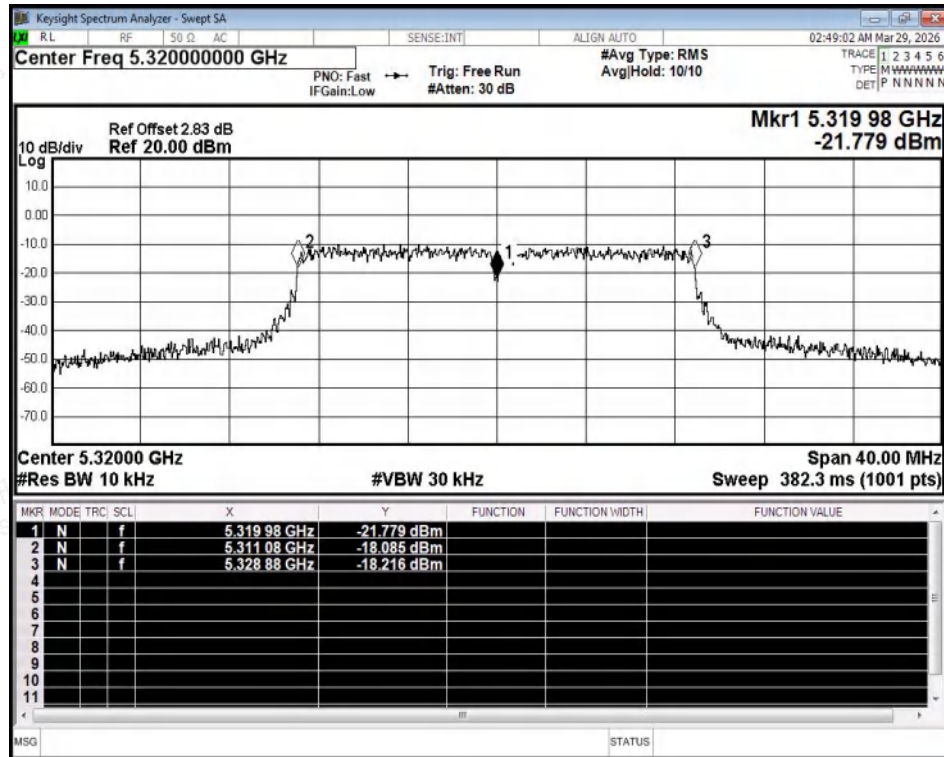


Freq. Stability NVNT ac20 5320MHz Ant1

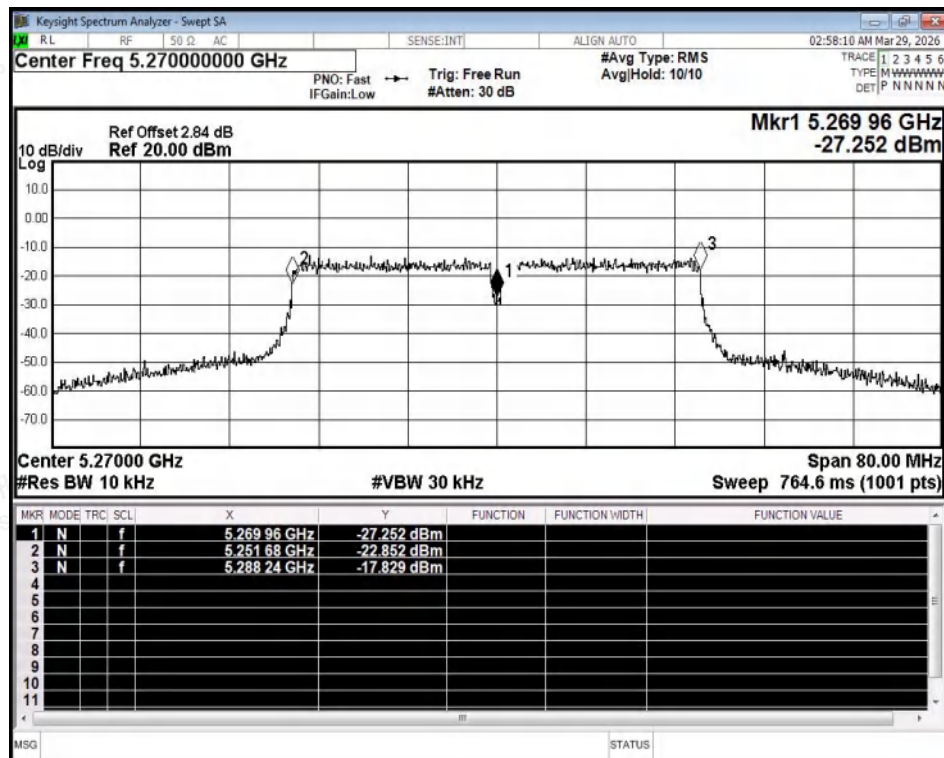


Freq. Stability NVNT ac40 5270MHz Ant1



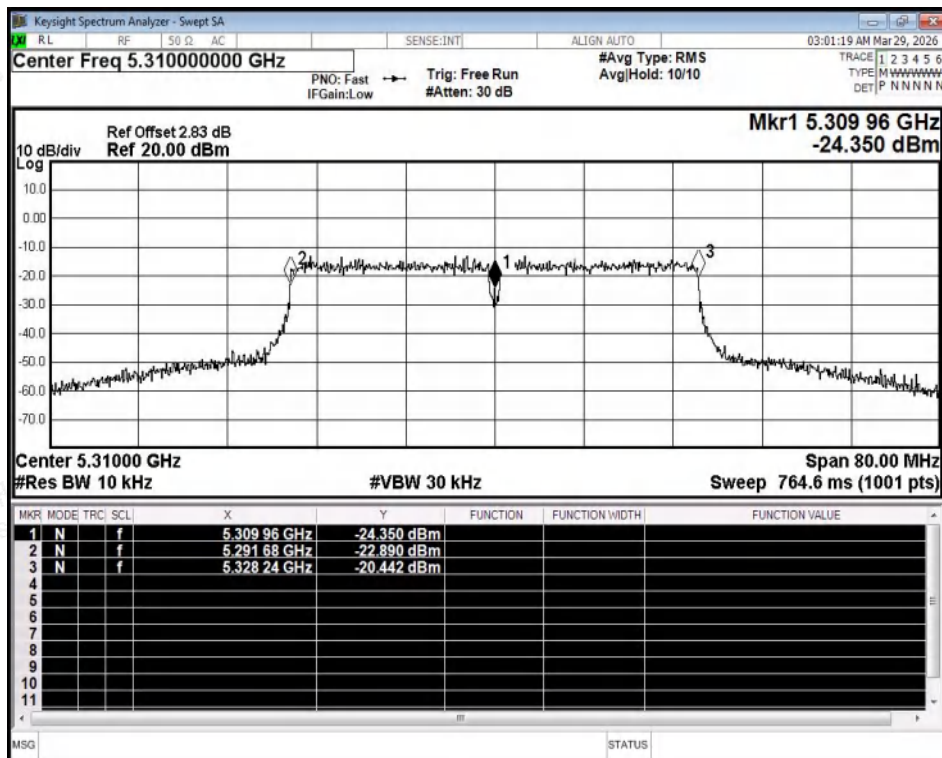

Freq. Stability NVNT ac40 5310MHz Ant1

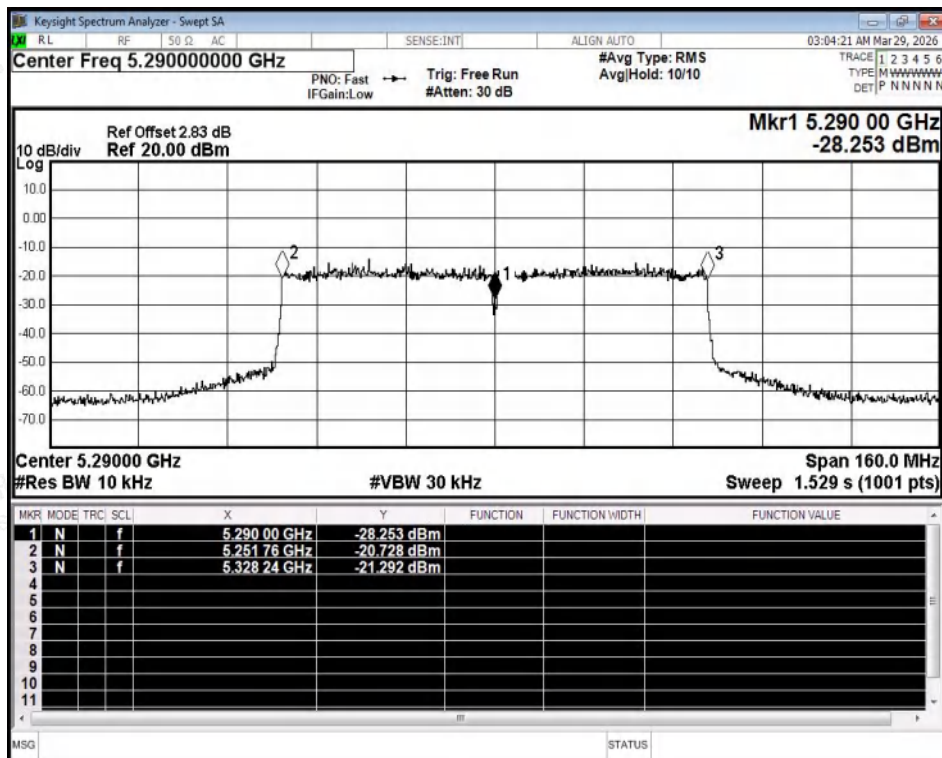

Freq. Stability NVNT ac80 5290MHz Ant1





E.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	97.46	0.11	0.37
NVNT	a	5280	Ant1	97.83	0.1	0.37
NVNT	a	5320	Ant1	97.46	0.11	0.37
NVNT	n20	5260	Ant1	97.41	0.11	0.44
NVNT	n20	5280	Ant1	97.41	0.11	0.44
NVNT	n20	5320	Ant1	97.41	0.11	0.44
NVNT	n40	5270	Ant1	94.02	0.27	0.91
NVNT	n40	5310	Ant1	94.87	0.23	0.9
NVNT	ac20	5260	Ant1	97.42	0.11	0.44
NVNT	ac20	5280	Ant1	97.42	0.11	0.44
NVNT	ac20	5320	Ant1	97.42	0.11	0.44
NVNT	ac40	5270	Ant1	94.92	0.23	0.89
NVNT	ac40	5310	Ant1	94.87	0.23	0.9
NVNT	ac80	5290	Ant1	90	0.46	1.85




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

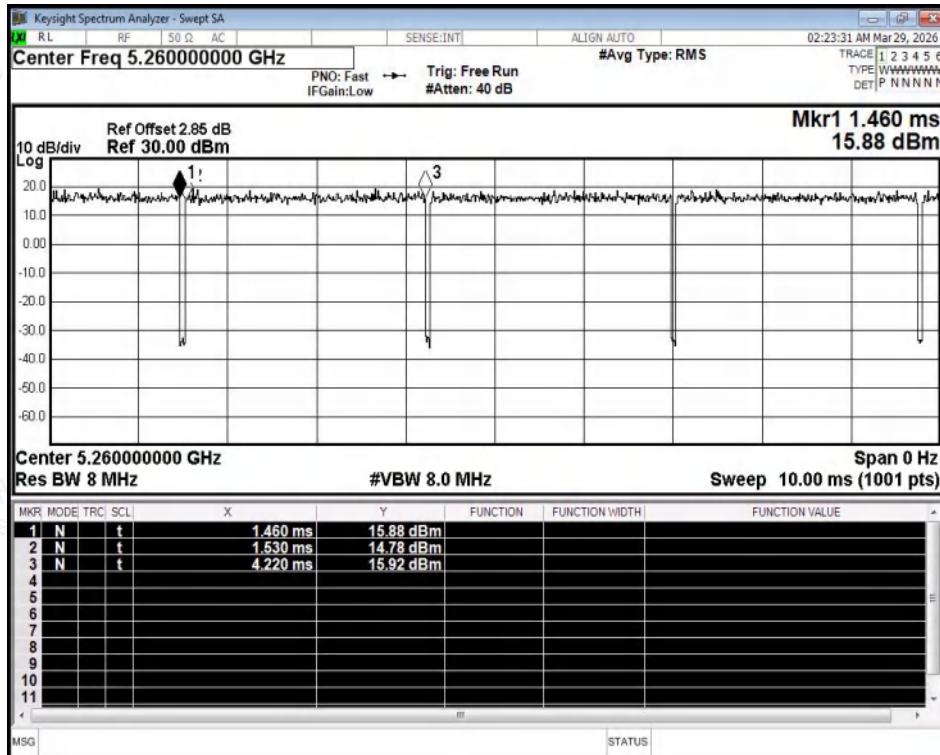


Duty Cycle NVNT a 5260MHz Ant1

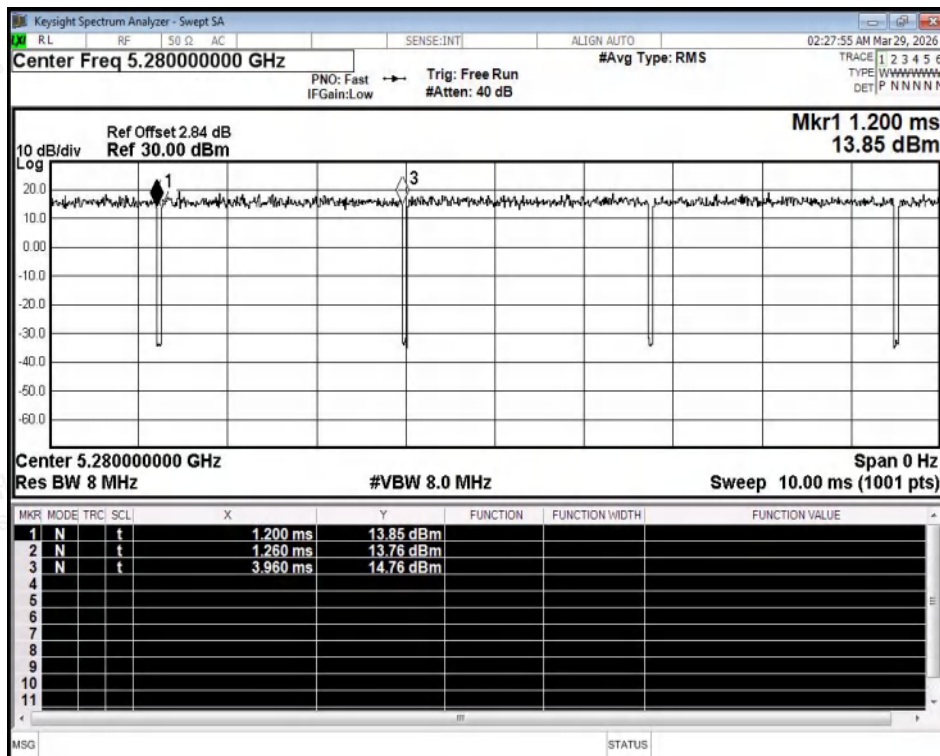


Duty Cycle NVNT a 5280MHz Ant1



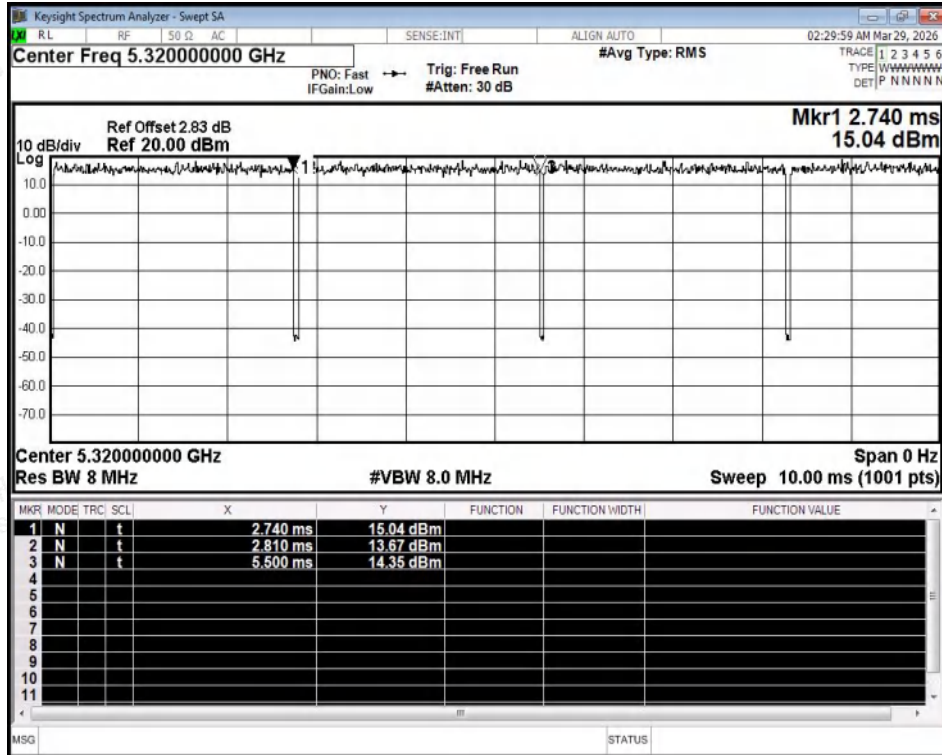


Duty Cycle NVNT a 5320MHz Ant1

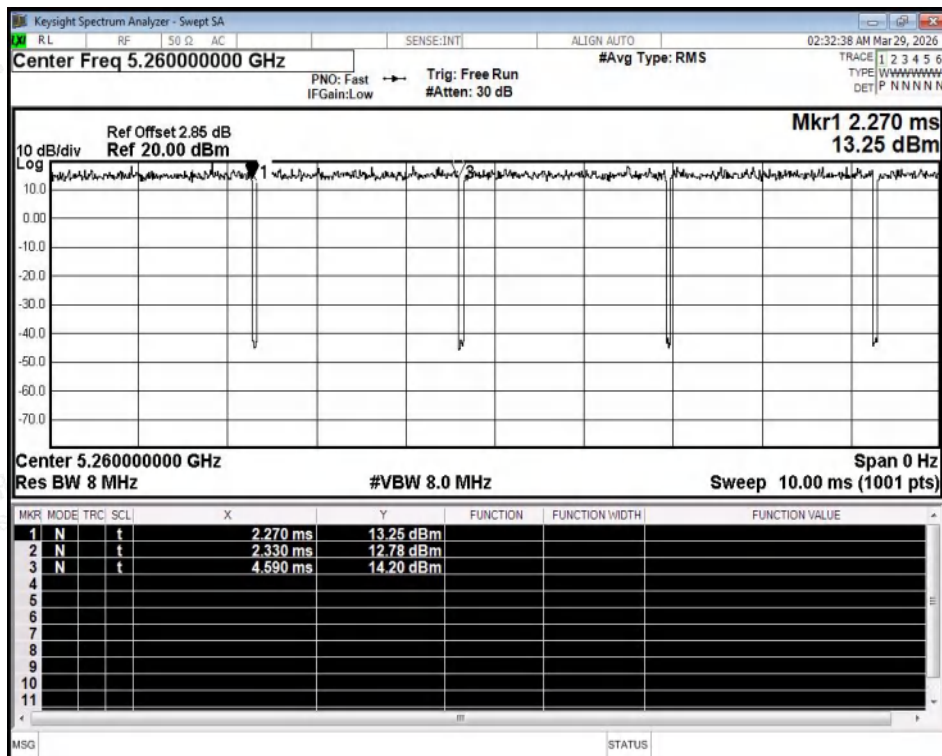


Duty Cycle NVNT n20 5260MHz Ant1



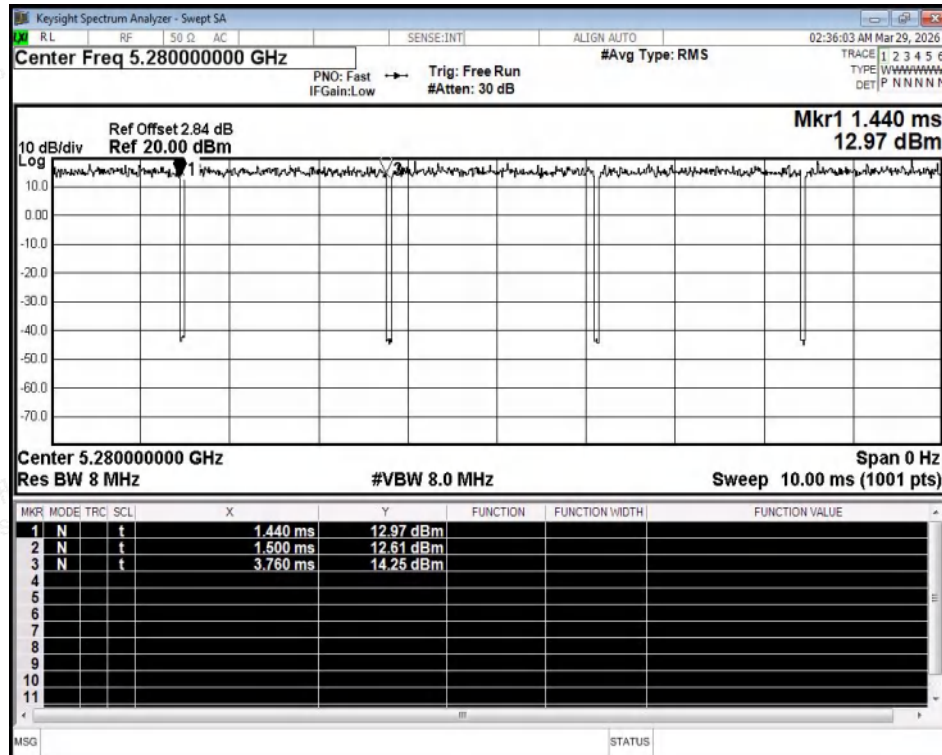


Duty Cycle NVNT n20 5280MHz Ant1

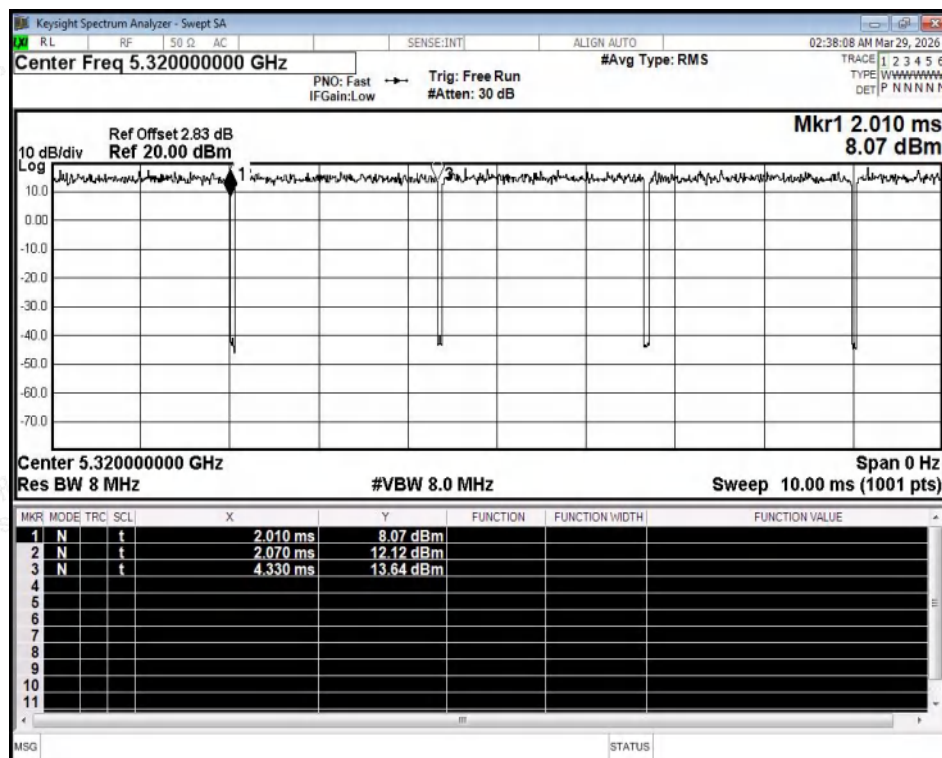


Duty Cycle NVNT n20 5320MHz Ant1



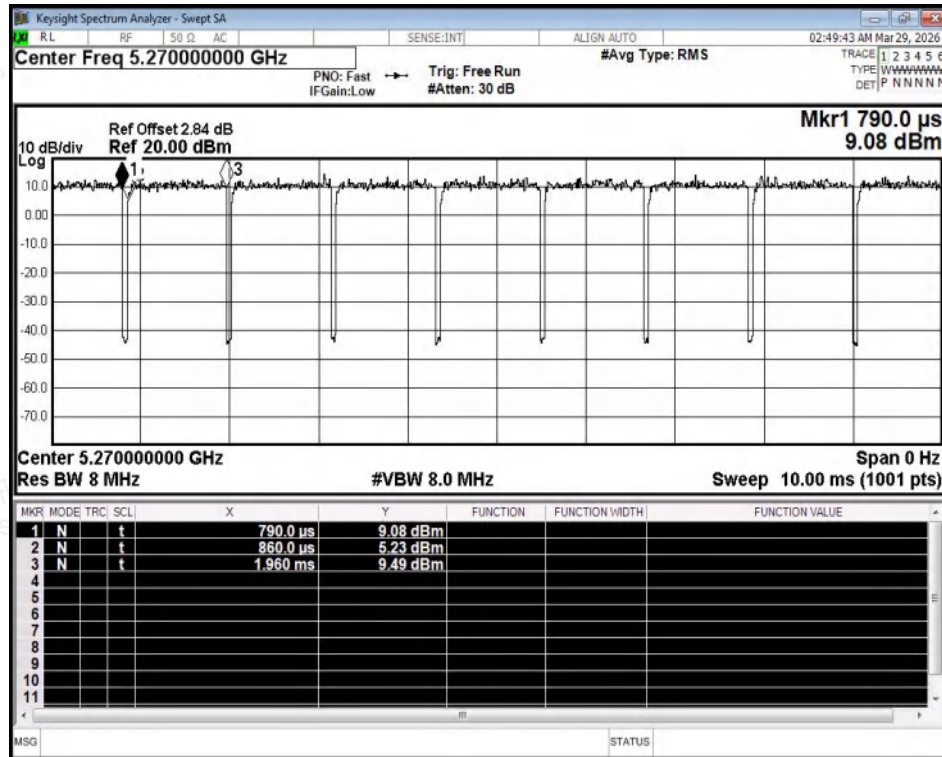


Duty Cycle NVNT n40 5270MHz Ant1

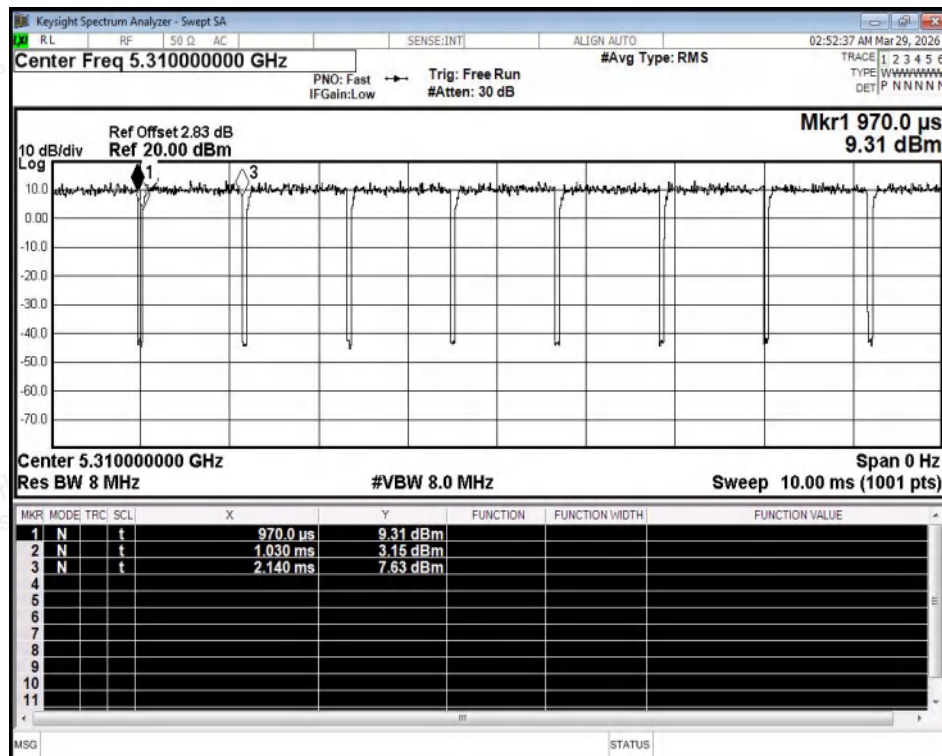


Duty Cycle NVNT n40 5310MHz Ant1



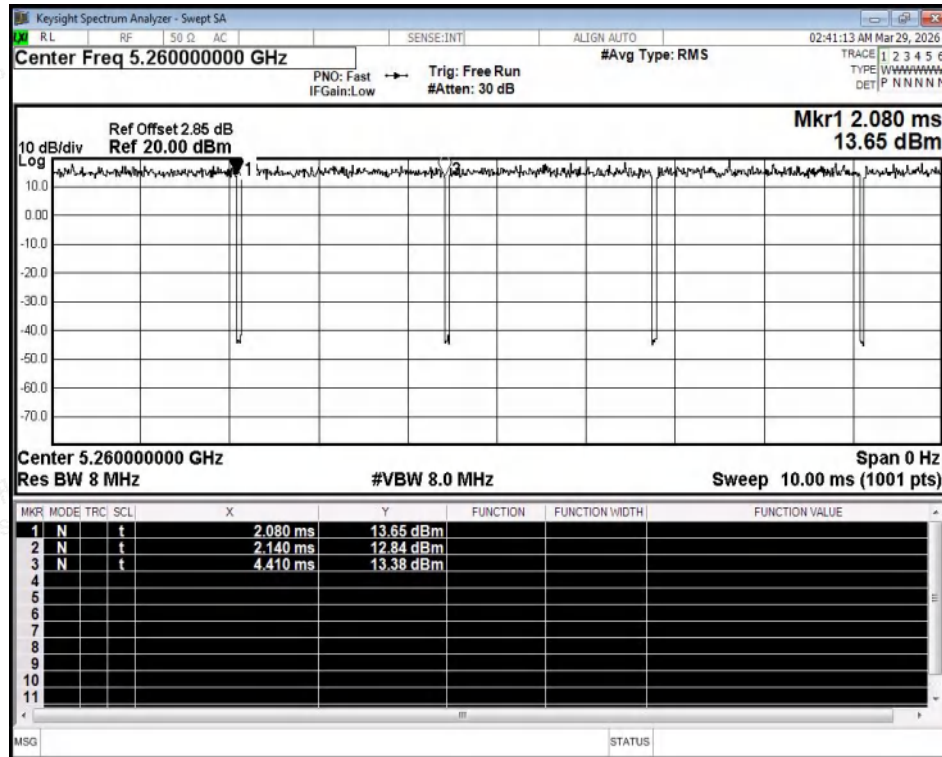


Duty Cycle NVNT ac20 5260MHz Ant1

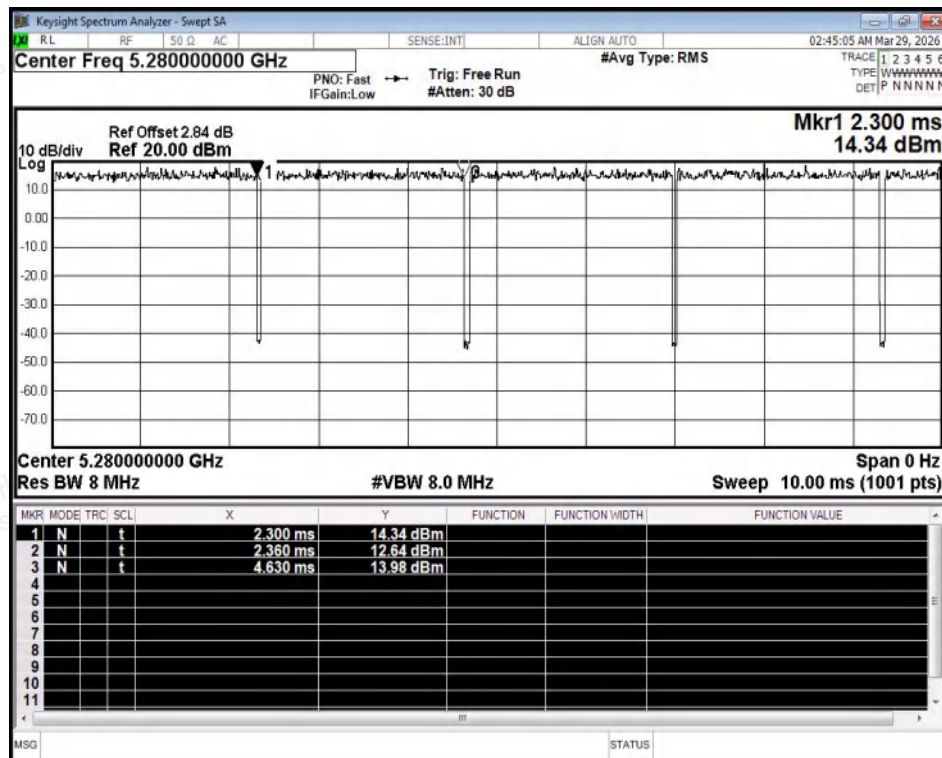


Duty Cycle NVNT ac20 5280MHz Ant1



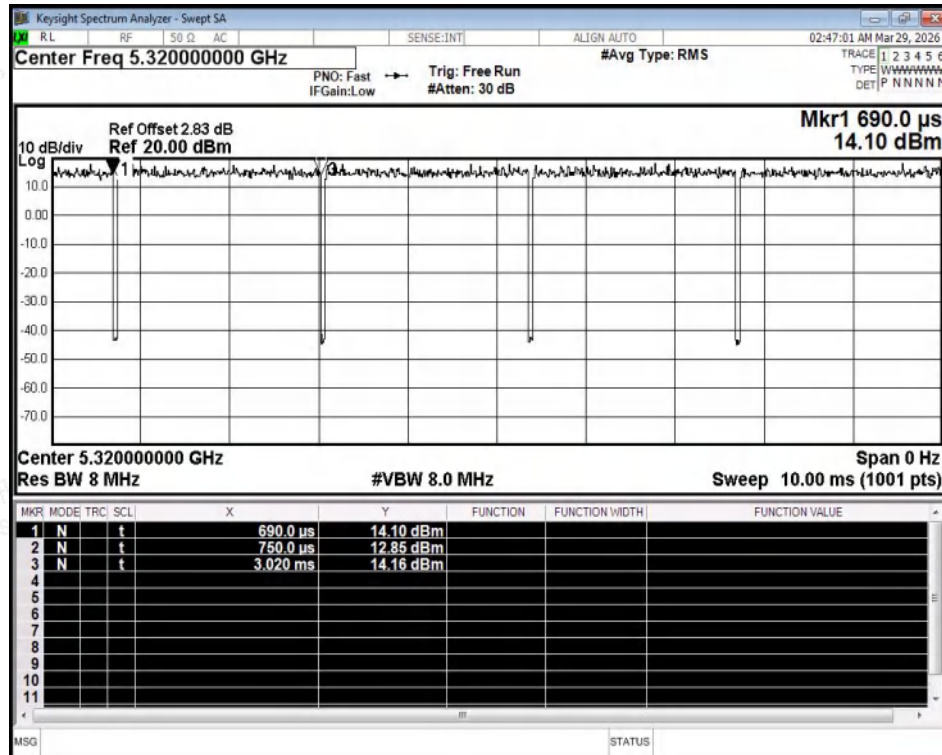

Duty Cycle NVNT ac20 5320MHz Ant1

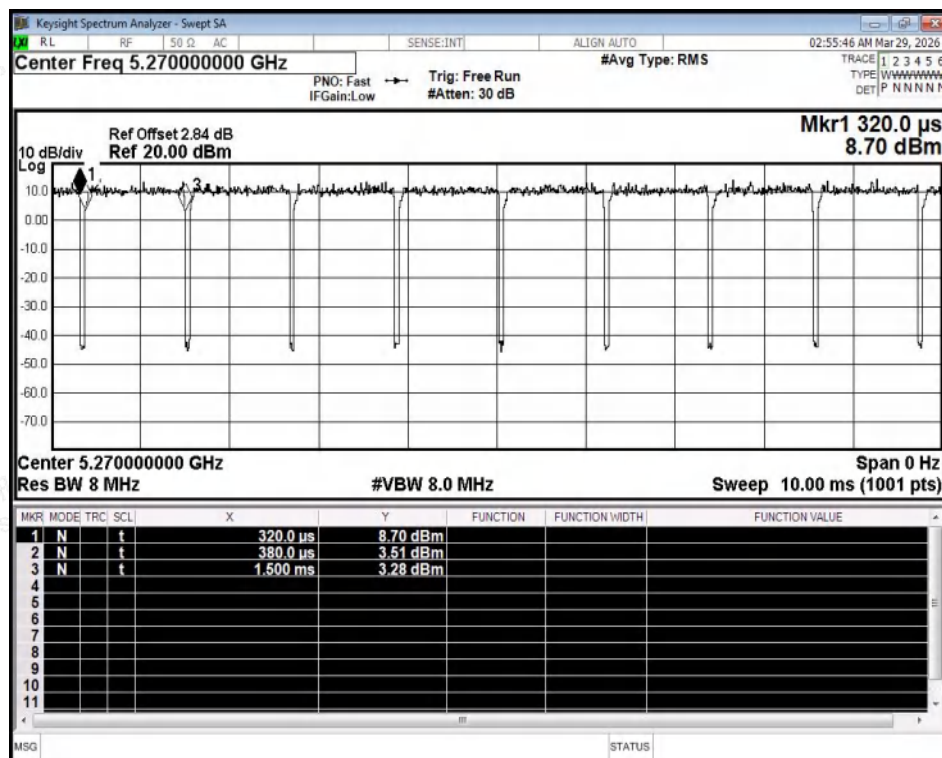


Duty Cycle NVNT ac40 5270MHz Ant1





Duty Cycle NVNT ac40 5310MHz Ant1

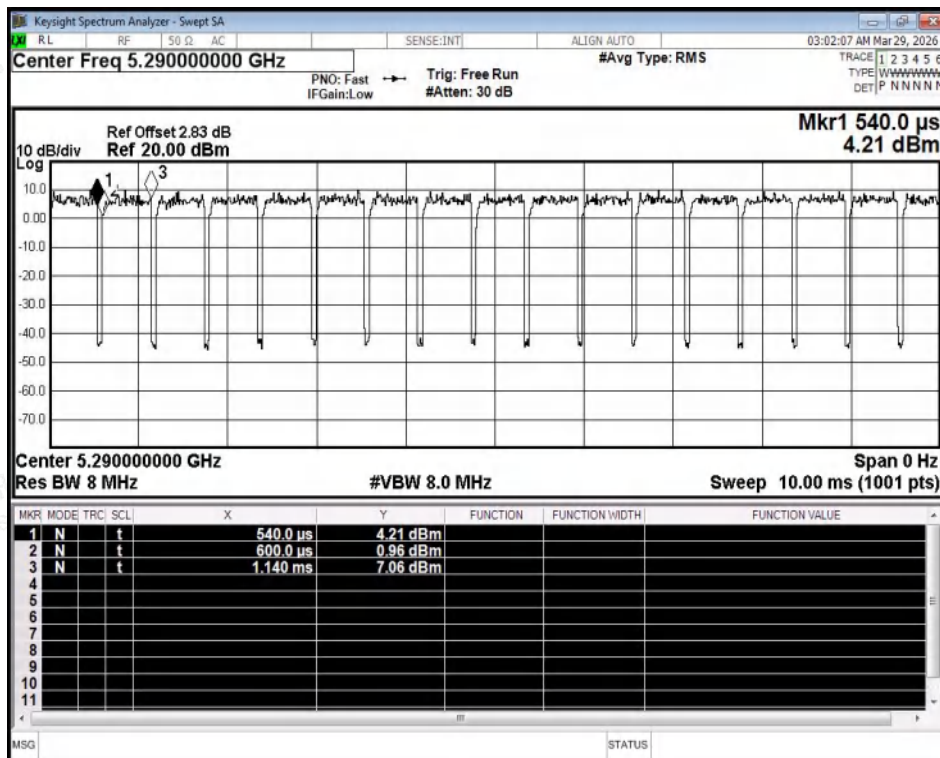

Duty Cycle NVNT ac80 5290MHz Ant1

