



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-E1086L
FCC ID(Requested) : A3LGTE1086L
Report No : FG-334-R1
Job No : FG-334
Date issued : December 3, 2009

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

HJ AN - Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION.....	4
2.1. General.....	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission.....	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation.....	13
6. TEST DATA.....	14
6.1. Effective Radiated Power (E.R.P.)	14
6.2. Equivalent Isotropic Radiated Power (E.I.R.P.).....	15
6.3. GSM850 Radiated Spurious & Harmonic measurement	16
6.4. GSM1900 Radiated Spurious & Harmonic measurement.....	17
6.5. GSM850 Radiated Spurious & Harmonic Conversion Table	18
6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table	19
6.7. Frequency Stability	20
6.7.1. GSM850 Frequency Stability Table	20
6.7.2. GSM850 Frequency Stability Graph.....	21
6.7.3. GSM1900 Frequency Stability Table	24
6.7.4. GSM1900 Frequency Stability Graph.....	25
7. CONCLUSION.....	29
8. TEST PLOTS.....	30

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTE1086L
Model : GTE1086L
- Quantity : Quantity production is planned
- Emission Designators : 253KGXW(GSM850)
249KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.681 W ERP GSM850 (28.33 dBm)
0.740 W EIRP GSM1900 (28.69 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM Phone
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : November 17-18, 2009
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FG-334-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2010-10-20
	E4440A(3Hz~26.5GHz)	MY46187454	2010-03-06
	E4440A(3Hz~26.5GHz)	MY41000236	2010-04-14
Network Analyzer	8753E	JP38160590	2010-06-19
Pre-Amplifier	8449B	3008A00691	2009-12-15
Communication test set	8960	MY47510060	2010-03-06
	8960	GB42230535	2009-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2011-09-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2011-09-24
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2010-06-19
	E3640A	MY40003595	2010-06-19
	E3632A	MY40022438	2010-03-06
Divider	11636B	51946	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2010-11-11
	SH-241	92000548	2010-11-11
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

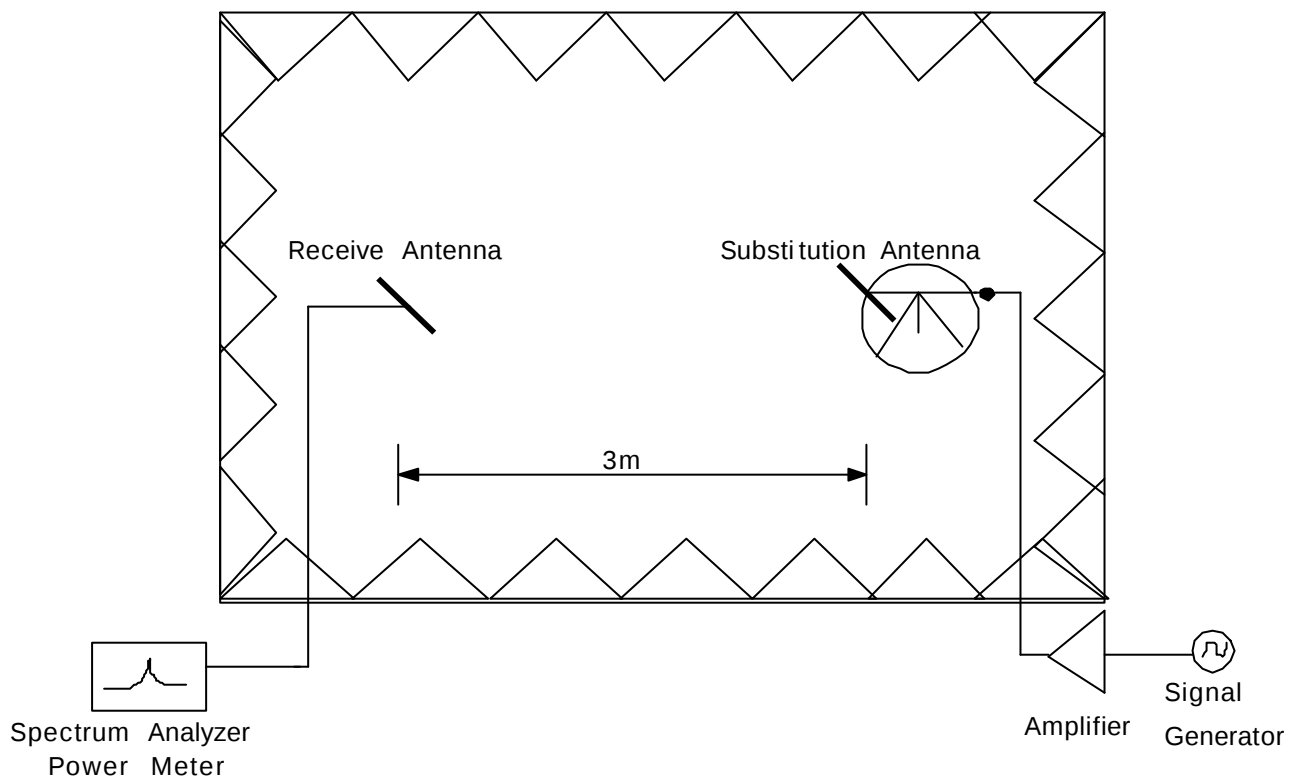


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

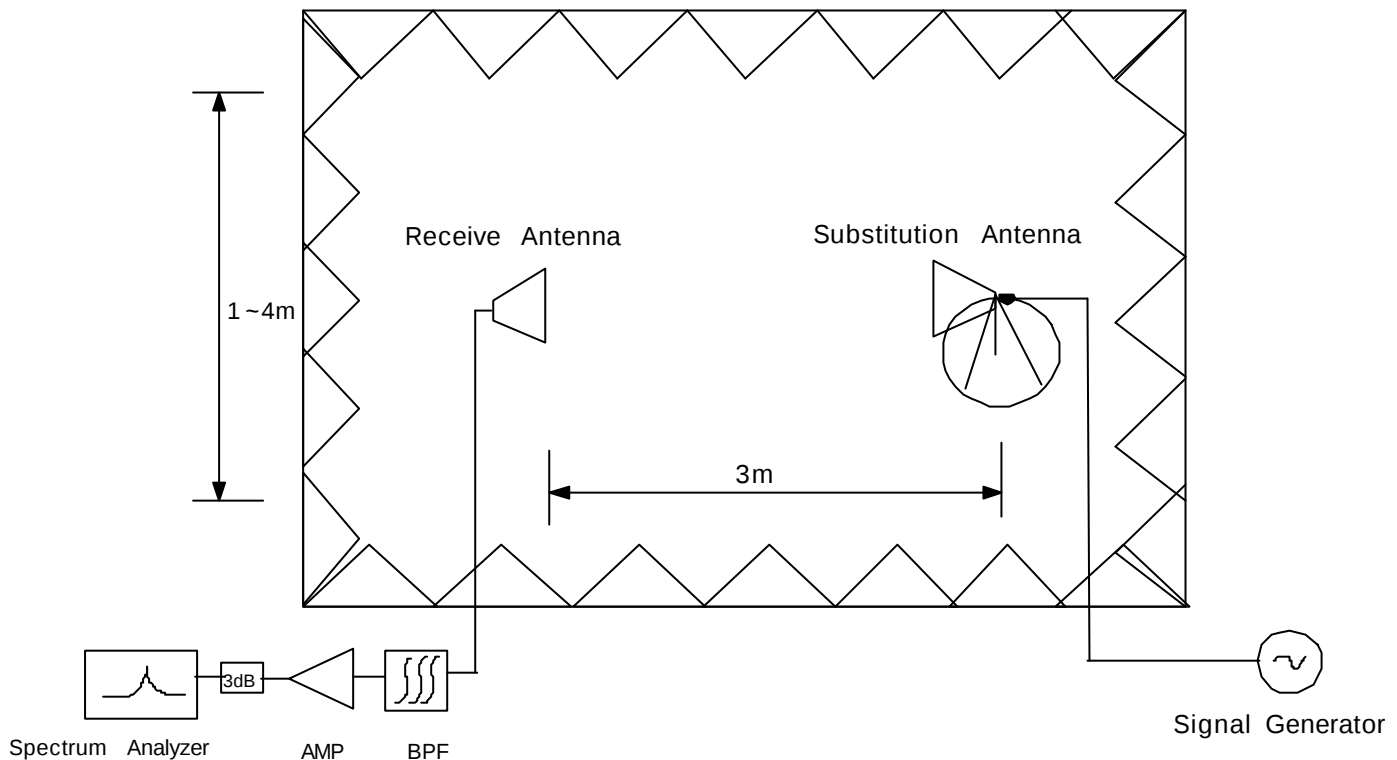


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.681 \text{ W}) = 41.33 \text{ dB}$$

$$28.33 \text{ dBm} - 41.33 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30 °C to +60 °C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25 °C to 27 °C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30 °C without any power applied.
3. After the overnight "soak" at -30 °C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30 °C up to +60 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	27.00	H	-9.48	-0.67	-8.81
		V	-9.67	-0.67	-9.00
836.60	28.00	H	-9.90	-0.73	-9.17
		V	-9.42	-0.73	-8.69
848.80	28.00	H	-12.55	-0.79	-11.76
		V	-11.22	-0.79	-10.43

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-8.61	H	286/65	27.20	0.525	Standard
836.60	-9.63	H	286/70	27.54	0.568	Standard
848.80	-11.43	H	277/80	28.33	0.681	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.2. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-9.75	9.70	-19.45
		V	-9.38	9.70	-19.08
1880.00	28.00	H	-11.11	9.70	-20.81
		V	-11.11	9.70	-20.81
1909.80	28.00	H	-11.11	9.70	-20.81
		V	-10.80	9.70	-20.50

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.76	H	302/180	28.69	0.740	Standard
1880.00	-20.37	H	68/10	28.44	0.698	Standard
1909.80	-20.40	H	66/10	28.41	0.693	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 28.33 dBm = 0.681 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 41.33 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-61.53	H	77.76
	3	2472.60	-63.25	H	75.02
	4	3296.80	-58.29	V	66.33
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-61.69	H	77.42
	3	2509.80	-62.89	H	74.67
	4	3346.40	-60.55	H	68.56
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-57.31	H	72.83
	3	2546.40	-60.82	H	72.71
	4	3395.20	-61.24	H	69.54
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 28.69 dBm = 0.740 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 41.69 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-64.31	H	69.06
	3	5550.60	-59.68	H	58.69
	4	7400.80	-64.31	V	59.04
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-65.87	H	70.48
	3	5640.00	-57.55	V	56.16
	4	7520.00	-61.31	H	55.88
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-66.35	V	69.36
	3	5729.40	-55.81	V	54.01
	4	7639.20	-65.21	H	59.55
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 11. 18

Test Engineer : HJ AN

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= ERP+2.15 - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBd	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-27.24	-27.10	-61.53	-62.60	77.76	78.97
	3	2472.60	-11.41	10.70	-12.30	-31.70	-31.45	-63.25	-65.41	75.02	77.43
	4	3296.80	-13.59	12.30	-11.70	-34.96	-35.43	-59.01	-58.29	67.52	66.33
	5	4121.00	-15.15	12.50	-10.30	-38.60	-38.90	-	-	-	-
	6	4945.20	-16.71	12.70	-9.00	-40.65	-40.69	-	-	-	-
	7	5769.40	-18.17	12.90	-7.70	-43.29	-43.30	-	-	-	-
190	2	1673.20	-9.07	9.50	-13.40	-27.74	-28.63	-61.69	-62.85	77.42	77.69
	3	2509.80	-11.43	10.70	-12.30	-31.69	-31.64	-62.89	-64.94	74.67	76.77
	4	3346.40	-13.78	12.30	-11.50	-35.46	-35.60	-60.55	-64.82	68.56	72.69
	5	4183.00	-15.26	12.50	-10.20	-38.67	-39.11	-	-	-	-
	6	5019.60	-16.94	12.70	-8.80	-41.28	-41.32	-	-	-	-
	7	5856.20	-18.23	12.90	-7.70	-43.94	-43.84	-	-	-	-
251	2	1697.60	-9.08	9.50	-13.40	-27.95	-27.75	-57.31	-59.53	72.83	75.25
	3	2546.40	-11.41	10.70	-12.30	-31.58	-32.94	-60.82	-65.71	72.71	76.24
	4	3395.20	-13.82	12.30	-11.50	-35.17	-35.46	-61.24	-62.55	69.54	70.56
	5	4244.00	-15.38	12.50	-10.10	-38.81	-39.07	-	-	-	-
	6	5092.80	-17.06	12.70	-8.60	-41.51	-41.42	-	-	-	-
	7	5941.60	-18.41	12.90	-7.50	-43.83	-43.32	-	-	-	-

6.6. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 11. 18

Test Engineer : HJ AN

Tx Cable loss

Tx Horn Ant Gain

Tx Level to radiate -13dBm

ESI Level received from Tx with -13dBm

Tested Level from EUT

= EIRP - (-13 + -)

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-14.91	12.40	-10.50	-36.94	-36.57	-64.31	-65.29	69.06	70.41
	3	5550.60	-17.69	12.90	-8.20	-42.68	-42.80	-59.68	-60.72	58.69	59.61
	4	7400.80	-20.43	10.50	-3.10	-47.33	-46.96	-65.38	-64.31	59.74	59.04
	5	9251.00	-23.63	11.20	-0.60	-51.79	-50.45	-	-	-	-
	6	11101.20	-26.86	11.60	2.30	-54.95	-55.26	-	-	-	-
	7	12951.40	-28.80	12.90	2.90	-58.88	-58.56	-	-	-	-
661	2	3760.00	-15.19	12.40	-10.20	-37.08	-37.05	-65.87	-66.70	70.48	71.34
	3	5640.00	-17.78	12.90	-8.10	-42.73	-43.08	-57.59	-57.55	56.55	56.16
	4	7520.00	-20.67	10.60	-2.90	-47.12	-46.95	-61.31	-64.88	55.88	59.62
	5	9400.00	-23.23	11.60	-1.40	-51.75	-52.22	-	-	-	-
	6	11280.00	-26.34	12.10	1.20	-55.98	-56.30	-	-	-	-
	7	13160.00	-28.12	12.80	2.30	-59.32	-58.91	-	-	-	-
810	2	3819.60	-14.23	12.40	-11.20	-38.02	-38.68	-66.97	-66.35	70.64	69.36
	3	5729.40	-18.11	13.00	-7.90	-43.48	-43.49	-56.64	-55.81	54.85	54.01
	4	7639.20	-21.16	11.20	-3.00	-47.29	-47.44	-65.21	-65.30	59.61	59.55
	5	9549.00	-23.54	11.70	-1.20	-52.60	-52.08	-	-	-	-
	6	11458.80	-26.84	11.70	2.10	-56.26	-56.23	-	-	-	-
	7	13368.60	-28.23	12.30	2.90	-60.44	-59.84	-	-	-	-

6.7. Frequency Stability

6.7.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	25.50	836,600,026	0.000003	0.030
100%		-30	30.50	836,600,031	0.000004	0.036
100%		-20	13.40	836,600,013	0.000002	0.016
100%		-10	15.80	836,600,016	0.000002	0.019
100%		0	6.90	836,600,007	0.000001	0.008
100%		+10	34.60	836,600,035	0.000004	0.041
100%		+20	25.50	836,600,026	0.000003	0.030
100%		+30	27.90	836,600,028	0.000003	0.033
100%		+40	-1.20	836,599,999	0.000000	-0.001
100%		+50	-9.50	836,599,991	-0.000001	-0.011
100%		+60	23.10	836,600,023	0.000003	0.028
85%	3.35	+20	-6.50	836,599,994	-0.000001	-0.008
115%	4.26	+20	12.30	836,600,012	0.000001	0.015
Batt.Endpoint	3.35	+20	-6.50	836,599,994	-0.000001	-0.008


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.2. GSM850 Frequency Stability Graph

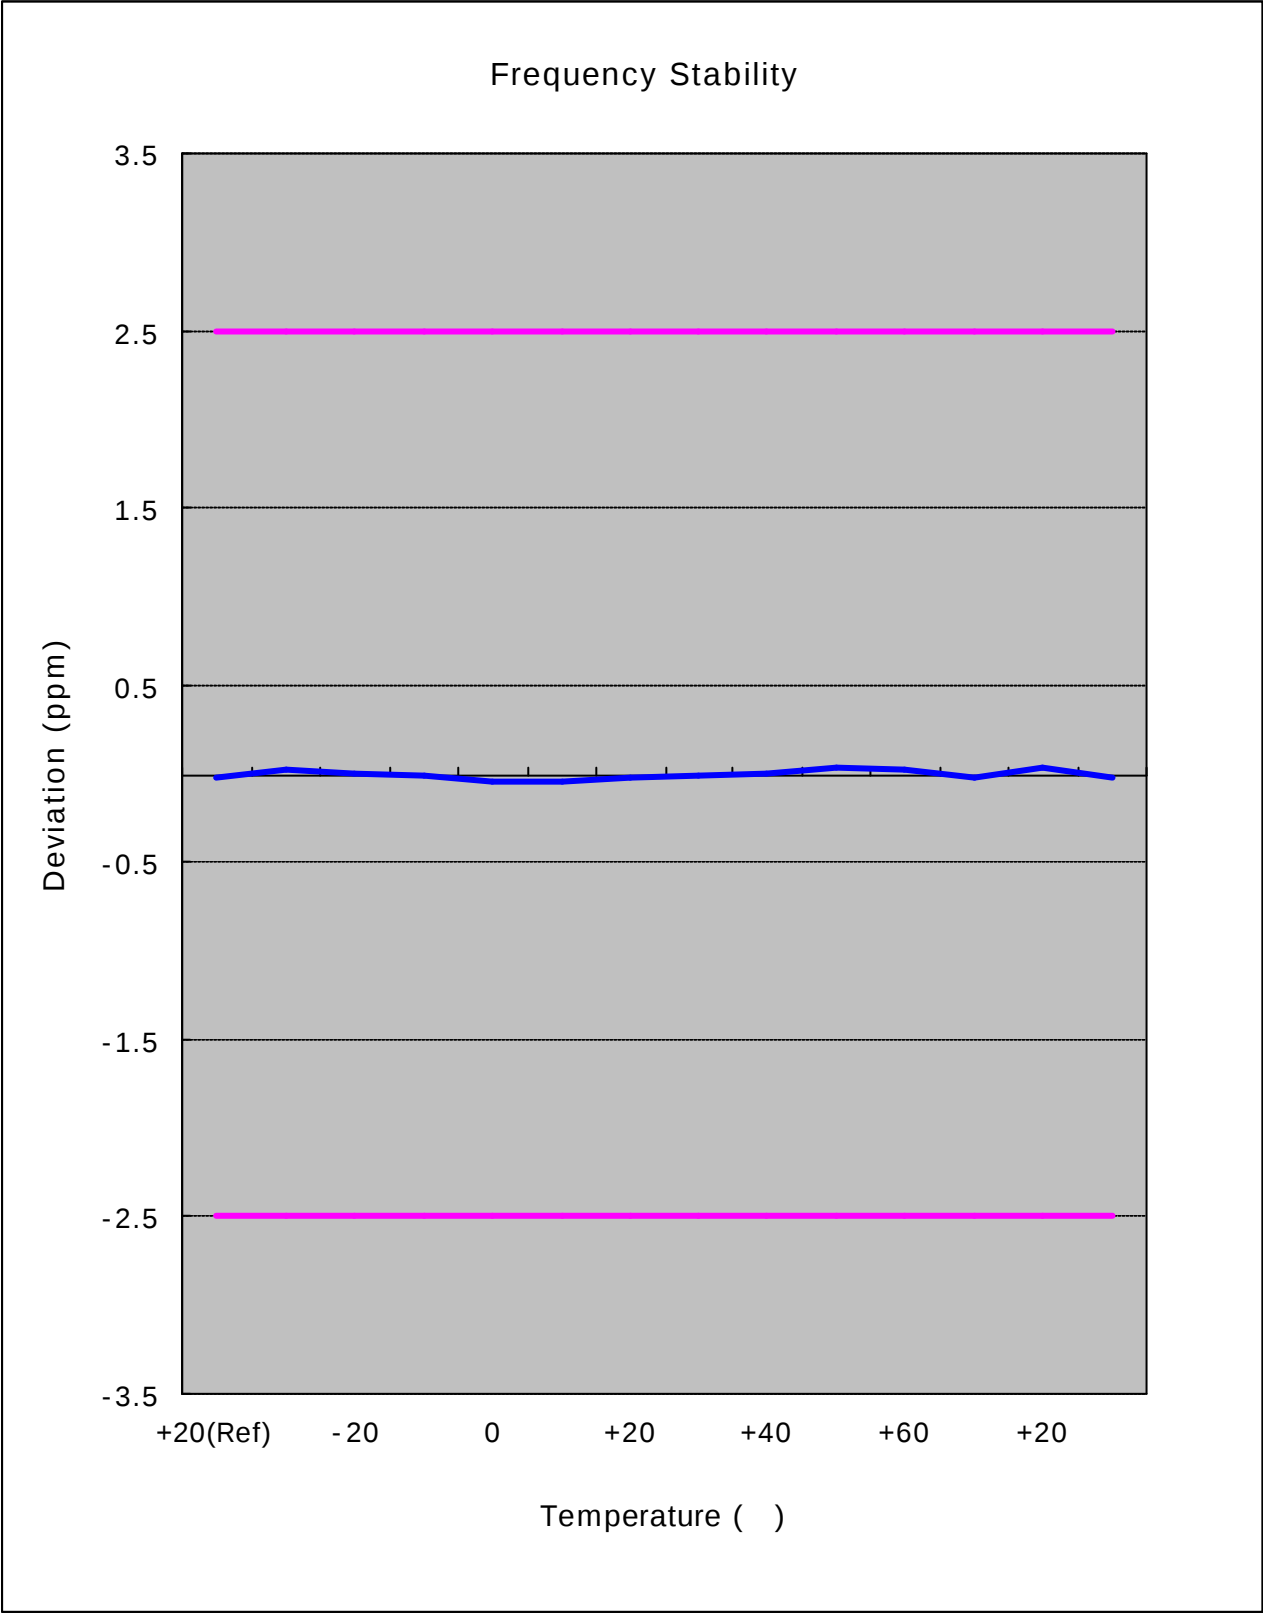

Zoom IN

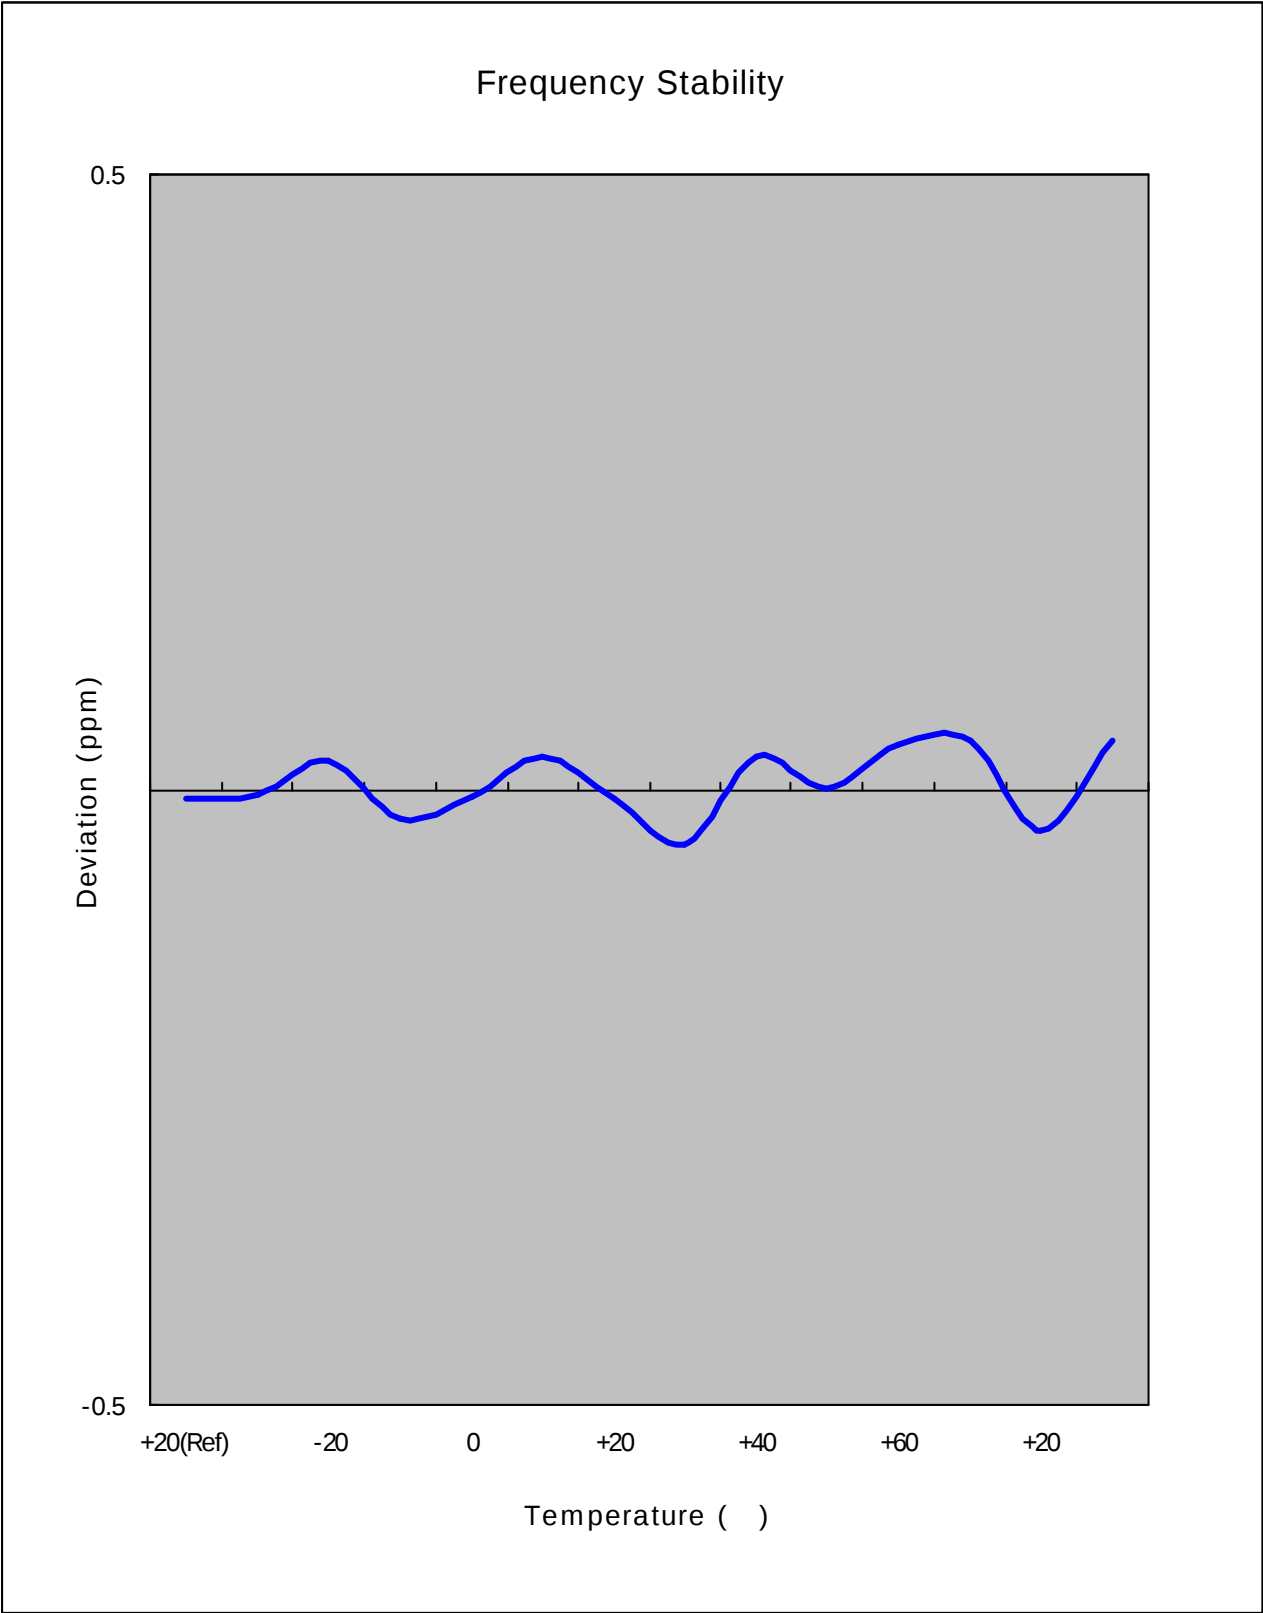

6.7.3 GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-36.20	1,879,999,964	-0.000002	-0.019
100%		-30	28.60	1,880,000,029	0.000002	0.015
100%		-20	-29.20	1,879,999,971	-0.000002	-0.016
100%		-10	-31.10	1,879,999,969	-0.000002	-0.017
100%		0	-10.80	1,879,999,989	-0.000001	-0.006
100%		+10	-11.10	1,879,999,989	-0.000001	-0.006
100%		+20	-36.20	1,879,999,964	-0.000002	-0.019
100%		+30	-20.20	1,879,999,980	-0.000001	-0.011
100%		+40	-11.10	1,879,999,989	-0.000001	-0.006
100%		+50	12.90	1,880,000,013	0.000001	0.007
100%		+60	-34.30	1,879,999,966	-0.000002	-0.018
85%	3.35	+20	-9.50	1,879,999,991	-0.000001	-0.005
115%	4.26	+20	-34.00	1,879,999,966	-0.000002	-0.018
Batt.Endpoint	3.35	+20	-9.50	1,879,999,991	-0.000001	-0.005


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.7.4 GSM1900 Frequency Stability Graph

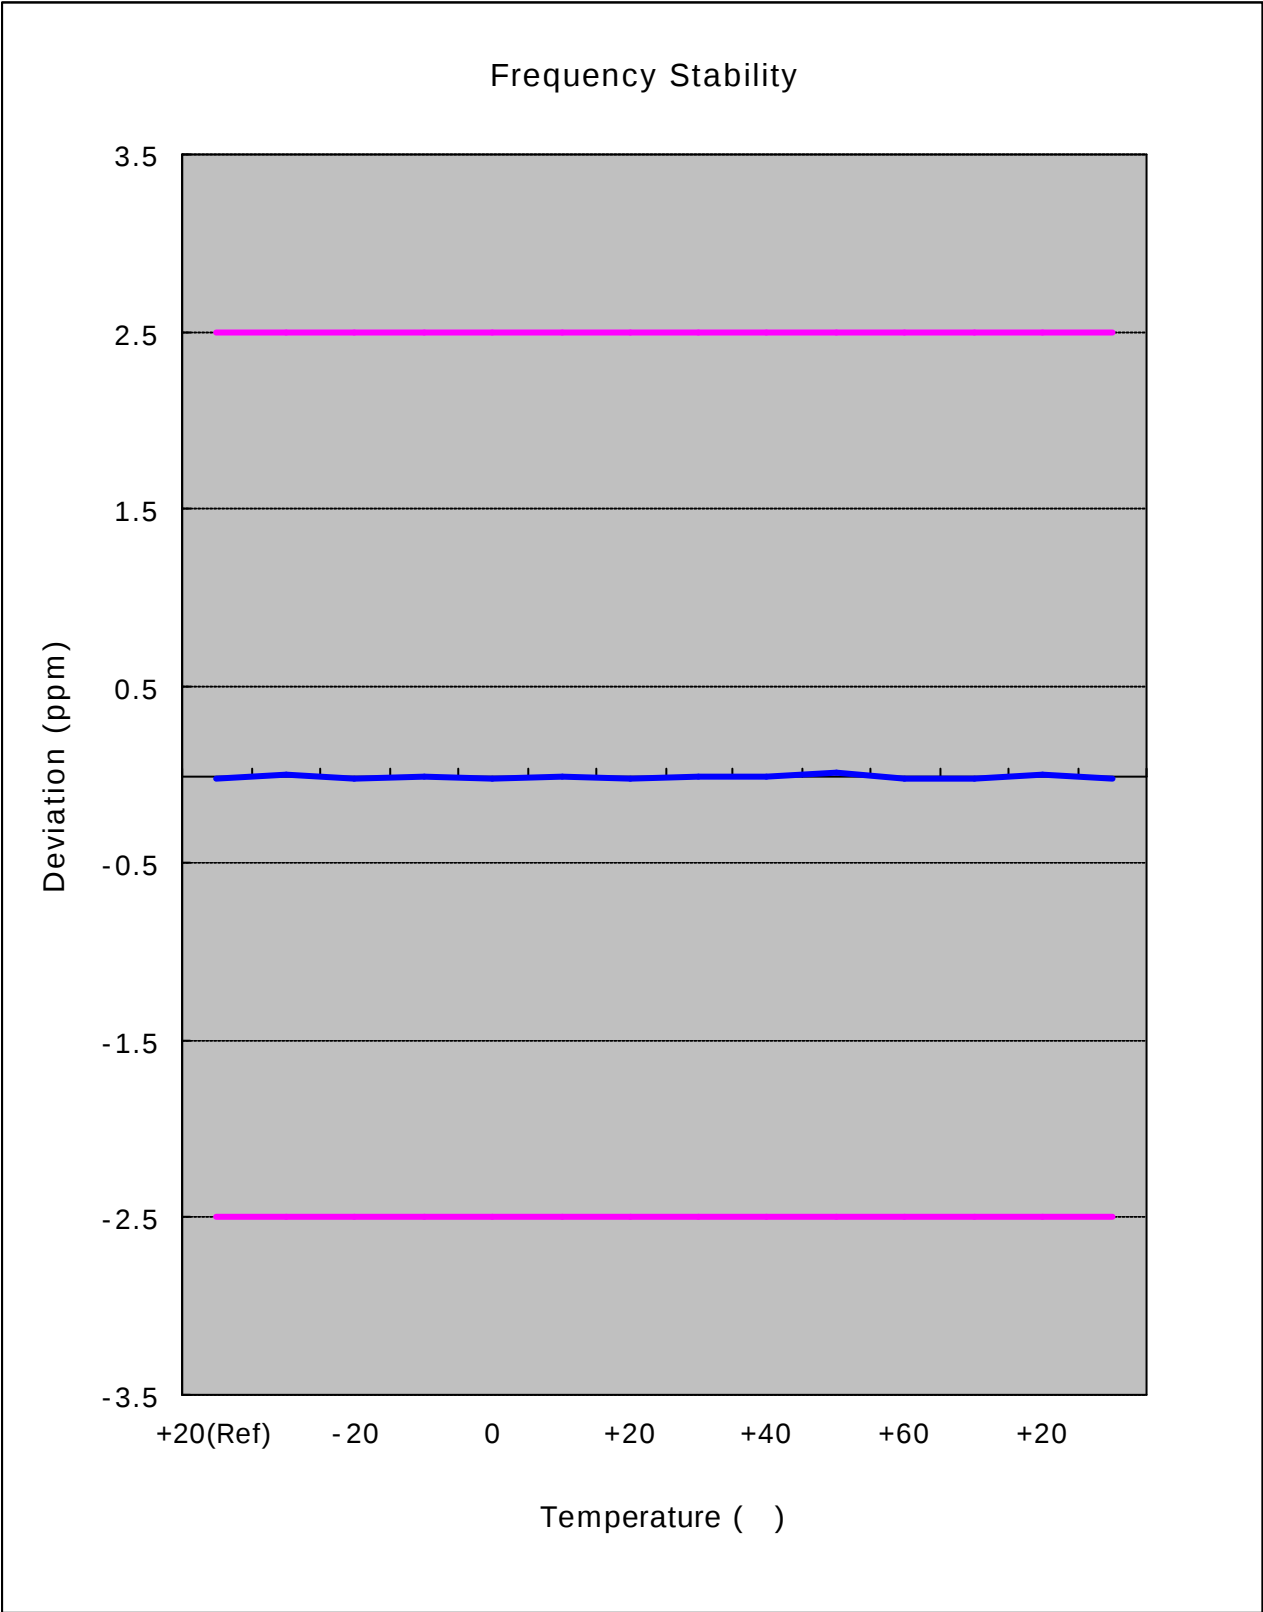

Zoom IN

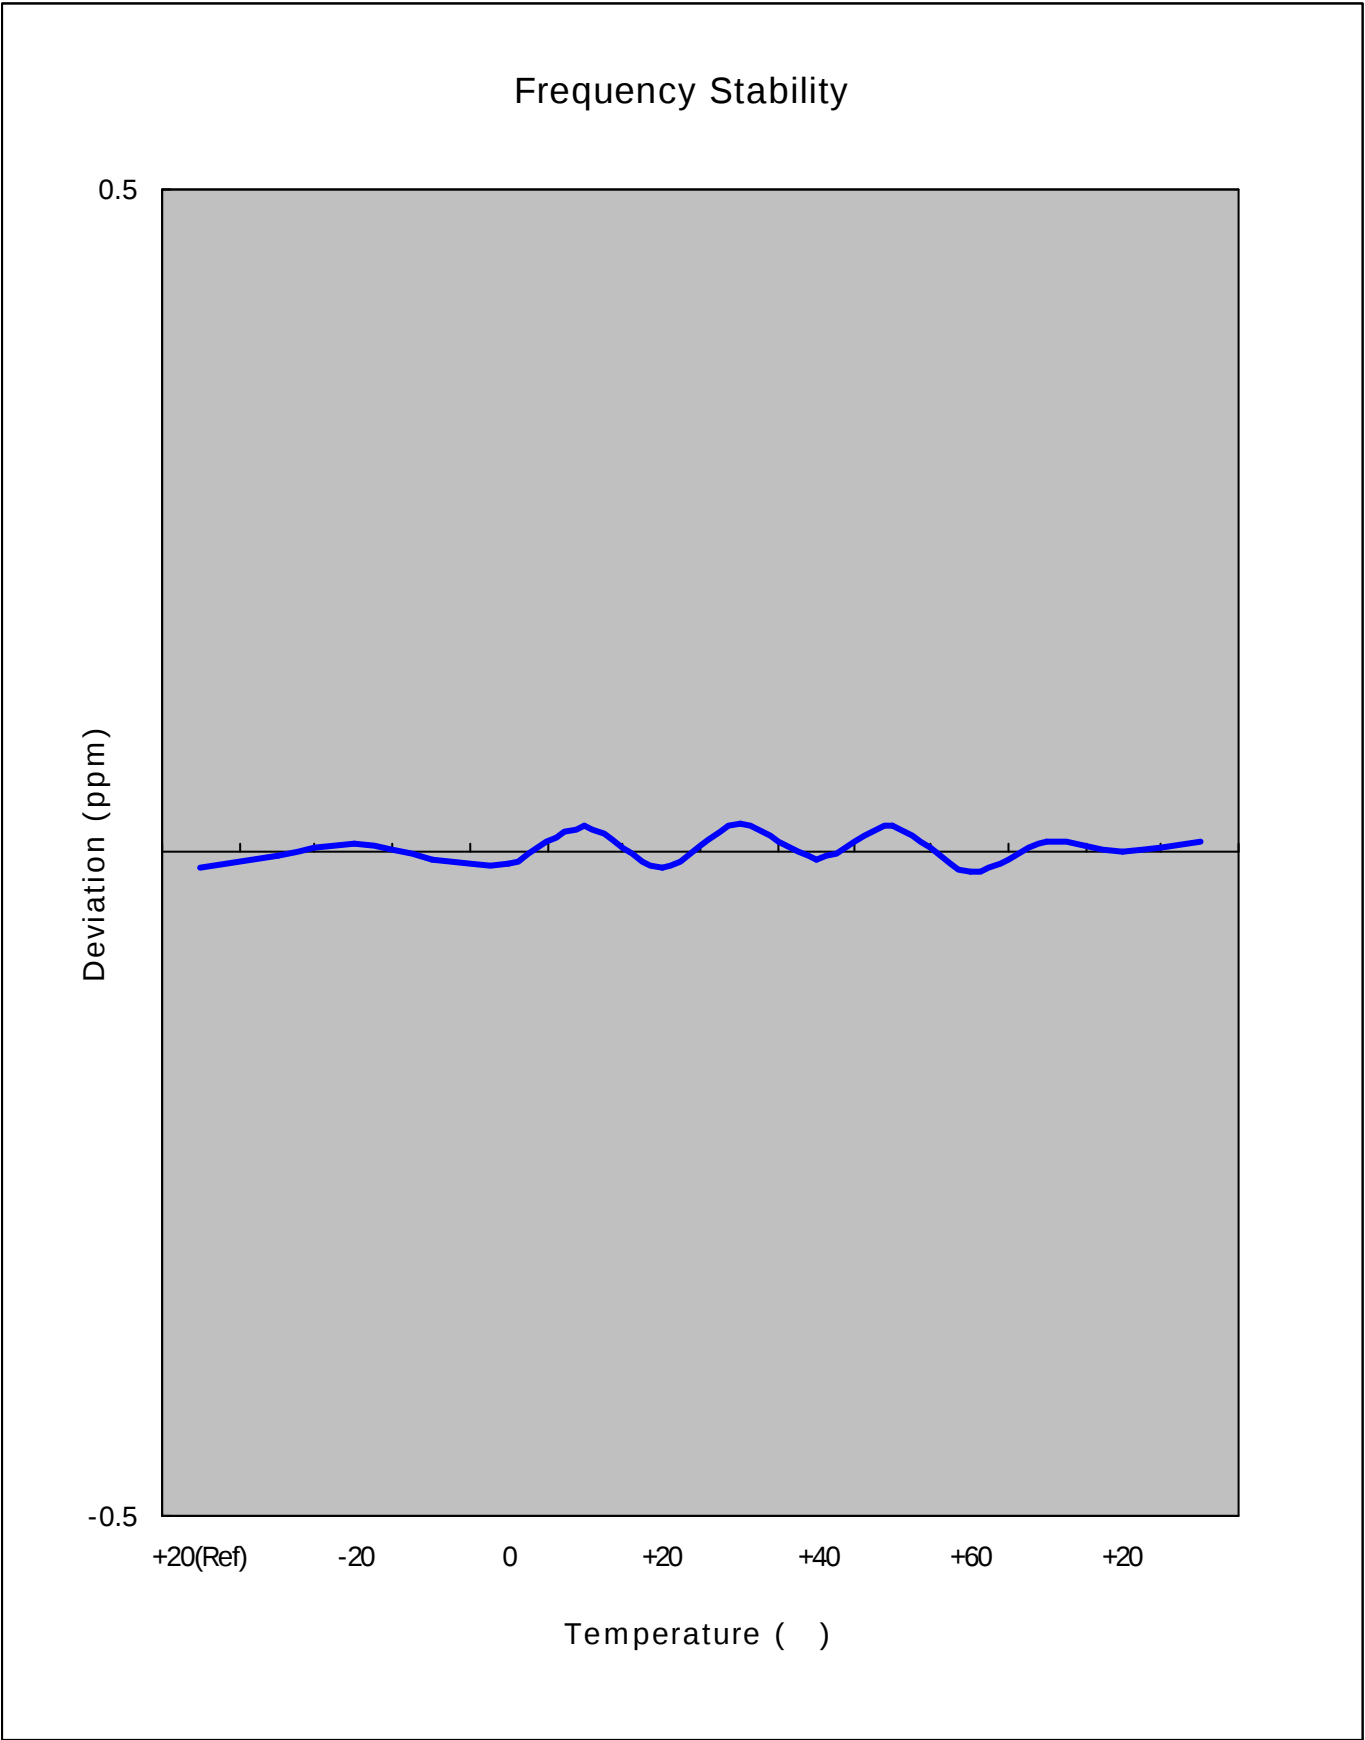



7. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM Phone.

FCC ID : A3LGTE1086L complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS


GSM850



Agilent

R T


Freq/Channel

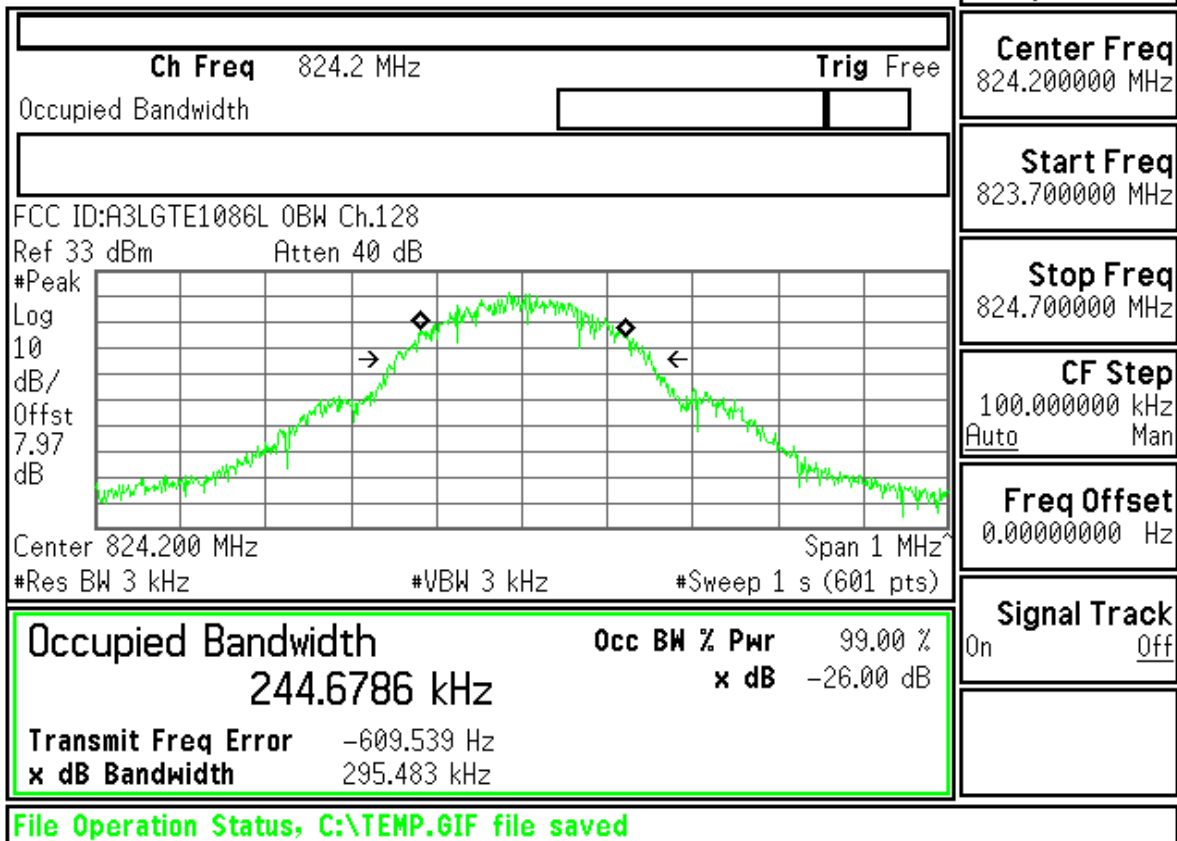


Agilent

R T

Freq/Channel

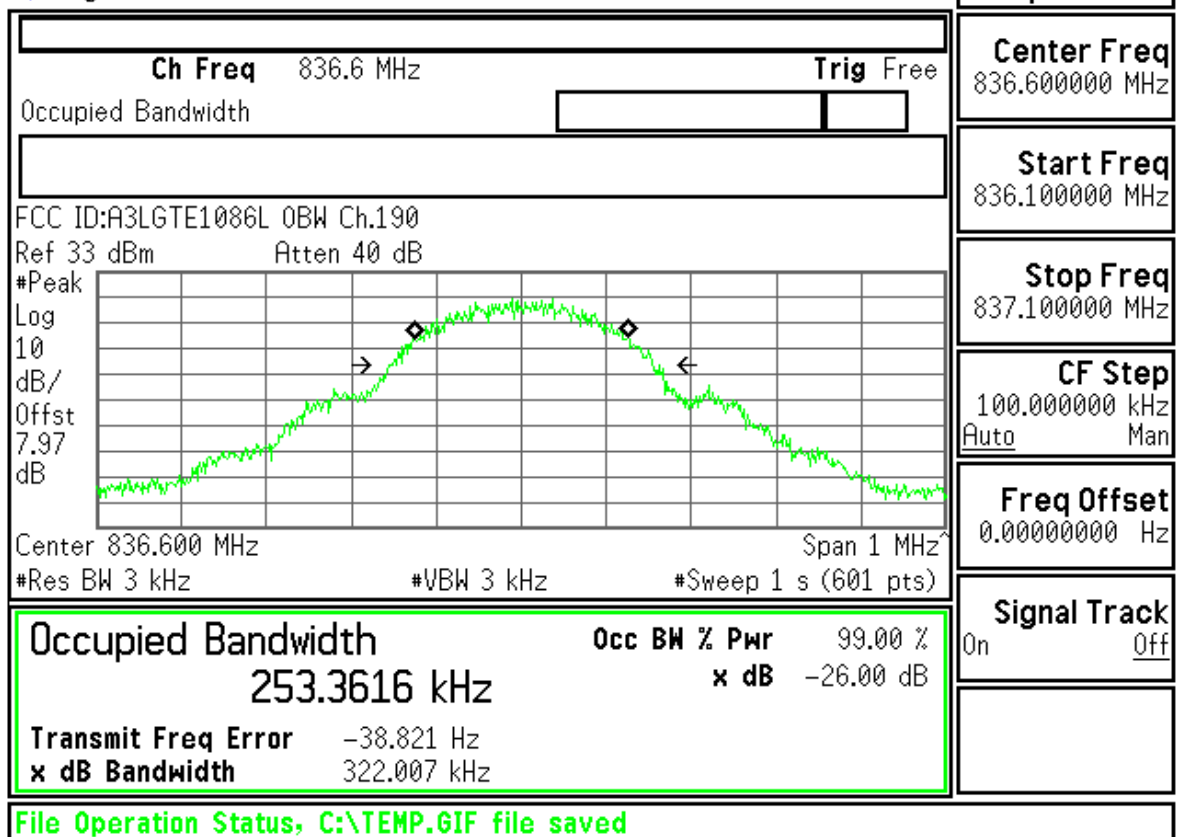


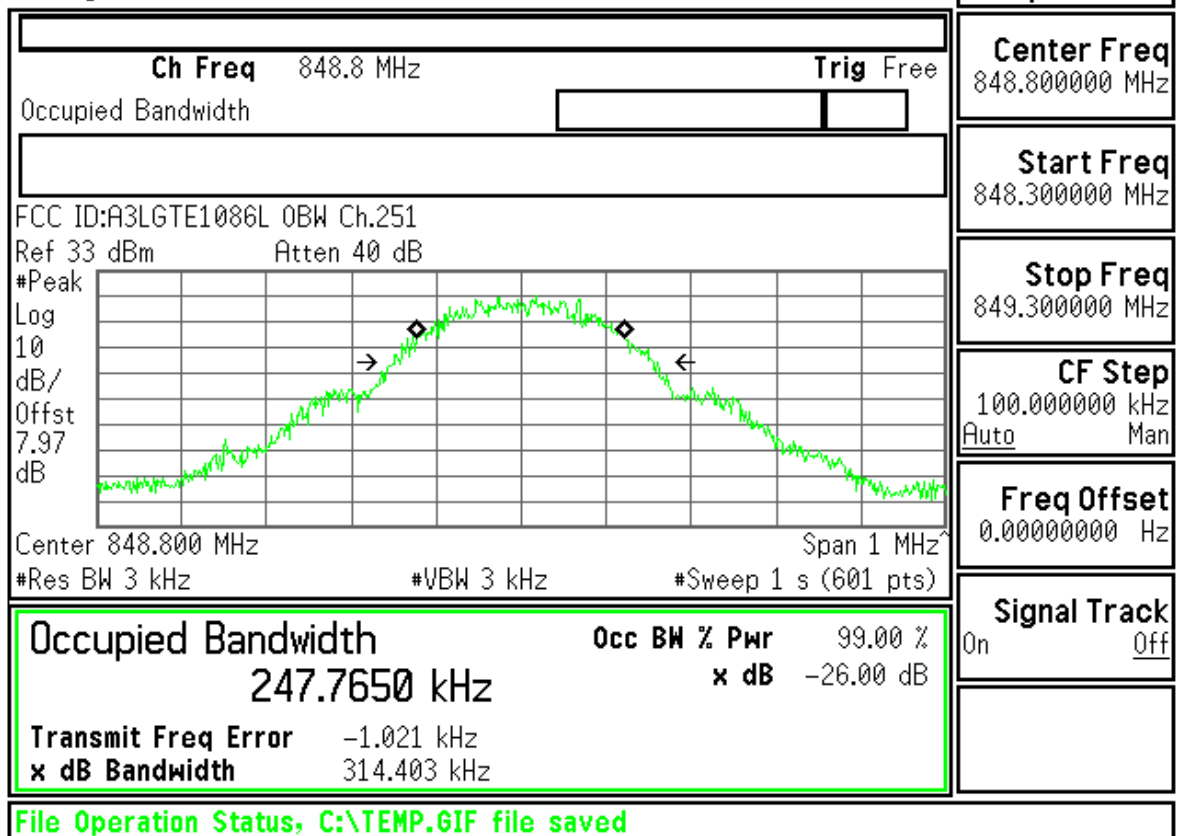




Measurement/Instrument Screen																														
Control		Transmit Power						TCH Parms																						
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>31.81</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>31.81</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	31.81	----	----	----	Estimated Carrier Power	31.81	----	----	----	Downlink Traffic Power ▾							
	Burst 1							Burst 2	Burst 3	Burst 4																				
Burst Power	31.81							----	----	----																				
Estimated Carrier Power	31.81							----	----	----																				
Traffic Band																														
GS1850																														
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.37</td> <td>1.65</td> <td>-4.51</td> </tr> <tr> <td>Maximum</td> <td>4.40</td> <td>1.84</td> <td>7.64</td> </tr> <tr> <td>Average</td> <td>3.80</td> <td>1.75</td> <td>2.09</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.37	1.65	-4.51	Maximum	4.40	1.84	7.64	Average	3.80	1.75	2.09	Pass/Fail	Pass	Pass	Pass	Traffic Channel		
									Peak Phase °	RMS Phase °	Frequency Hz																			
								Minimum	3.37	1.65	-4.51																			
								Maximum	4.40	1.84	7.64																			
Average	3.80	1.75	2.09																											
Pass/Fail	Pass	Pass	Pass																											
128																														
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.37</td> <td>1.65</td> <td>-4.51</td> </tr> <tr> <td>Maximum</td> <td>4.40</td> <td>1.84</td> <td>7.64</td> </tr> <tr> <td>Average</td> <td>3.80</td> <td>1.75</td> <td>2.09</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.37	1.65	-4.51	Maximum	4.40	1.84	7.64	Average	3.80	1.75	2.09	Pass/Fail	Pass	Pass	Pass	MS TX Level		
									Peak Phase °	RMS Phase °	Frequency Hz																			
								Minimum	3.37	1.65	-4.51																			
								Maximum	4.40	1.84	7.64																			
Average	3.80	1.75	2.09																											
Pass/Fail	Pass	Pass	Pass																											
5																														
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.37</td> <td>1.65</td> <td>-4.51</td> </tr> <tr> <td>Maximum</td> <td>4.40</td> <td>1.84</td> <td>7.64</td> </tr> <tr> <td>Average</td> <td>3.80</td> <td>1.75</td> <td>2.09</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.37	1.65	-4.51	Maximum	4.40	1.84	7.64	Average	3.80	1.75	2.09	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾		
									Peak Phase °	RMS Phase °	Frequency Hz																			
								Minimum	3.37	1.65	-4.51																			
								Maximum	4.40	1.84	7.64																			
Average	3.80	1.75	2.09																											
Pass/Fail	Pass	Pass	Pass																											
Return																														
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.37</td> <td>1.65</td> <td>-4.51</td> </tr> <tr> <td>Maximum</td> <td>4.40</td> <td>1.84</td> <td>7.64</td> </tr> <tr> <td>Average</td> <td>3.80</td> <td>1.75</td> <td>2.09</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.37	1.65	-4.51	Maximum	4.40	1.84	7.64	Average	3.80	1.75	2.09	Pass/Fail	Pass	Pass	Pass	1 of 2		
									Peak Phase °	RMS Phase °	Frequency Hz																			
								Minimum	3.37	1.65	-4.51																			
								Maximum	4.40	1.84	7.64																			
Average	3.80	1.75	2.09																											
Pass/Fail	Pass	Pass	Pass																											
1 of 2																														


Measurement/Instrument Screen																														
Control		Transmit Power						TCH Parms																						
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>31.95</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>31.95</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	31.95	----	----	----	Estimated Carrier Power	31.95	----	----	----	Downlink Traffic Power ▾							
	Burst 1							Burst 2	Burst 3	Burst 4																				
Burst Power	31.95							----	----	----																				
Estimated Carrier Power	31.95							----	----	----																				
Traffic Band																														
GS1850																														
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.18</td> <td>1.53</td> <td>-3.36</td> </tr> <tr> <td>Maximum</td> <td>4.73</td> <td>1.85</td> <td>14.86</td> </tr> <tr> <td>Average</td> <td>3.82</td> <td>1.68</td> <td>5.90</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.18	1.53	-3.36	Maximum	4.73	1.85	14.86	Average	3.82	1.68	5.90	Pass/Fail	Pass	Pass	Pass	Traffic Channel		
									Peak Phase °	RMS Phase °	Frequency Hz																			
								Minimum	3.18	1.53	-3.36																			
								Maximum	4.73	1.85	14.86																			
Average	3.82	1.68	5.90																											
Pass/Fail	Pass	Pass	Pass																											
190																														
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.18</td> <td>1.53</td> <td>-3.36</td> </tr> <tr> <td>Maximum</td> <td>4.73</td> <td>1.85</td> <td>14.86</td> </tr> <tr> <td>Average</td> <td>3.82</td> <td>1.68</td> <td>5.90</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.18	1.53	-3.36	Maximum	4.73	1.85	14.86	Average	3.82	1.68	5.90	Pass/Fail	Pass	Pass	Pass	MS TX Level		
									Peak Phase °	RMS Phase °	Frequency Hz																			
								Minimum	3.18	1.53	-3.36																			
								Maximum	4.73	1.85	14.86																			
Average	3.82	1.68	5.90																											
Pass/Fail	Pass	Pass	Pass																											
5																														
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.18</td> <td>1.53</td> <td>-3.36</td> </tr> <tr> <td>Maximum</td> <td>4.73</td> <td>1.85</td> <td>14.86</td> </tr> <tr> <td>Average</td> <td>3.82</td> <td>1.68</td> <td>5.90</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.18	1.53	-3.36	Maximum	4.73	1.85	14.86	Average	3.82	1.68	5.90	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾		
									Peak Phase °	RMS Phase °	Frequency Hz																			
								Minimum	3.18	1.53	-3.36																			
								Maximum	4.73	1.85	14.86																			
Average	3.82	1.68	5.90																											
Pass/Fail	Pass	Pass	Pass																											
Return																														
1 of 2		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.18</td> <td>1.53</td> <td>-3.36</td> </tr> <tr> <td>Maximum</td> <td>4.73</td> <td>1.85</td> <td>14.86</td> </tr> <tr> <td>Average</td> <td>3.82</td> <td>1.68</td> <td>5.90</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.18	1.53	-3.36	Maximum	4.73	1.85	14.86	Average	3.82	1.68	5.90	Pass/Fail	Pass	Pass	Pass	1 of 2		
									Peak Phase °	RMS Phase °	Frequency Hz																			
								Minimum	3.18	1.53	-3.36																			
								Maximum	4.73	1.85	14.86																			
Average	3.82	1.68	5.90																											
Pass/Fail	Pass	Pass	Pass																											
1 of 2																														



Measurement/Instrument Screen																													
Control		Transmit Power						TCH Parms																					
Transmit Power Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>32.07</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>32.07</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	32.07	----	----	----	Estimated Carrier Power	32.07	----	----	----	Downlink Traffic Power ▾						
			Burst 1	Burst 2	Burst 3	Burst 4																							
		Burst Power	32.07	----	----	----																							
		Estimated Carrier Power	32.07	----	----	----																							
Traffic Band																													
		Single						GS1850																					
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.31</td> <td>1.49</td> <td>0.69</td> </tr> <tr> <td>Maximum</td> <td>4.75</td> <td>1.79</td> <td>12.76</td> </tr> <tr> <td>Average</td> <td>3.79</td> <td>1.64</td> <td>7.08</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.31	1.49	0.69	Maximum	4.75	1.79	12.76	Average	3.79	1.64	7.08	Pass/Fail	Pass	Pass	Pass	Traffic Channel	
			Peak Phase °	RMS Phase °	Frequency Hz																								
		Minimum	3.31	1.49	0.69																								
		Maximum	4.75	1.79	12.76																								
Average	3.79	1.64	7.08																										
Pass/Fail	Pass	Pass	Pass																										
		50 / 50						251																					
		Single						MS TX Level																					
		Active Cell Connected						5																					
		Sys Type: GSM						Channel Mode Setup ▾																					
								Return																					
1 of 2		IntRef Offset R T						1 of 2																					



Measurement/Instrument Screen																													
Control		Power vs Time Graph						TCH Parms																					
Power vs Time Setup								Downlink Traffic Power ▾																					
Change View								Traffic Band																					
								GS1850																					
								Traffic Channel																					
		Continuous						128																					
		<table border="1"> <thead> <tr> <th>Burst</th> <th>TX Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>31.79</td> <td>GSM</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>						Burst	TX Power (dBm)	Modulation	Mask	1	31.79	GSM	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	MS TX Level	
Burst	TX Power (dBm)	Modulation	Mask																										
1	31.79	GSM	ETSI																										
2	----	----	----																										
3	----	----	----																										
4	----	----	----																										
		Active Cell Connected						5																					
		Sys Type: GSM						Channel Mode Setup ▾																					
								Return																					
1 of 2		IntRef Offset R T						1 of 2																					

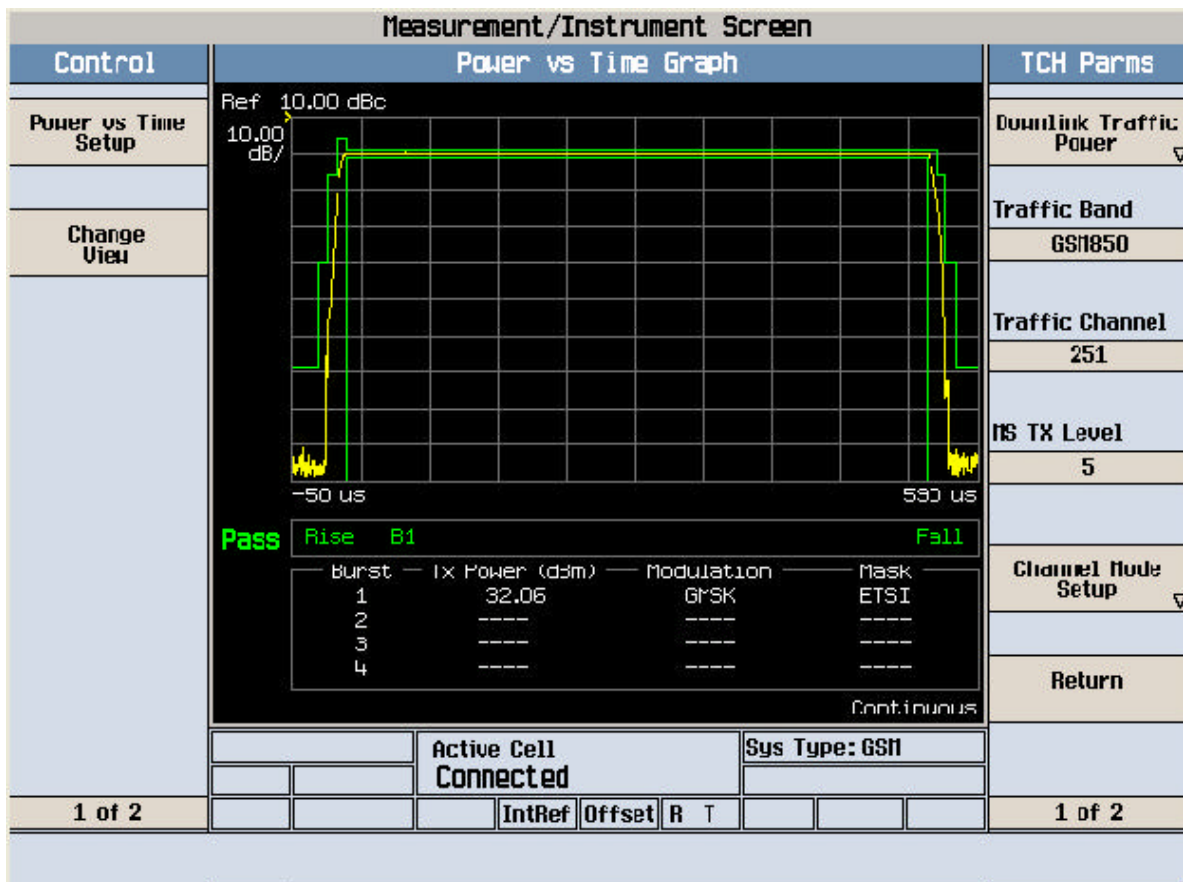
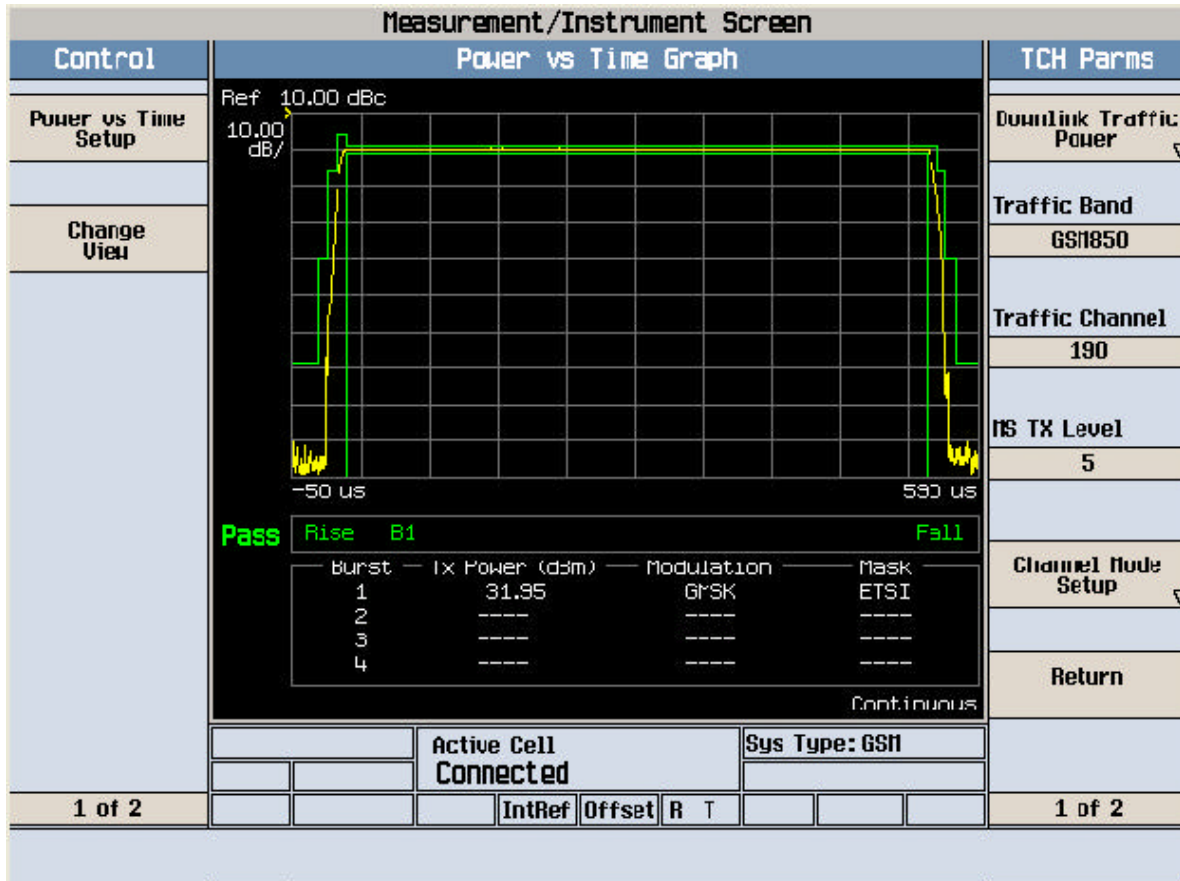


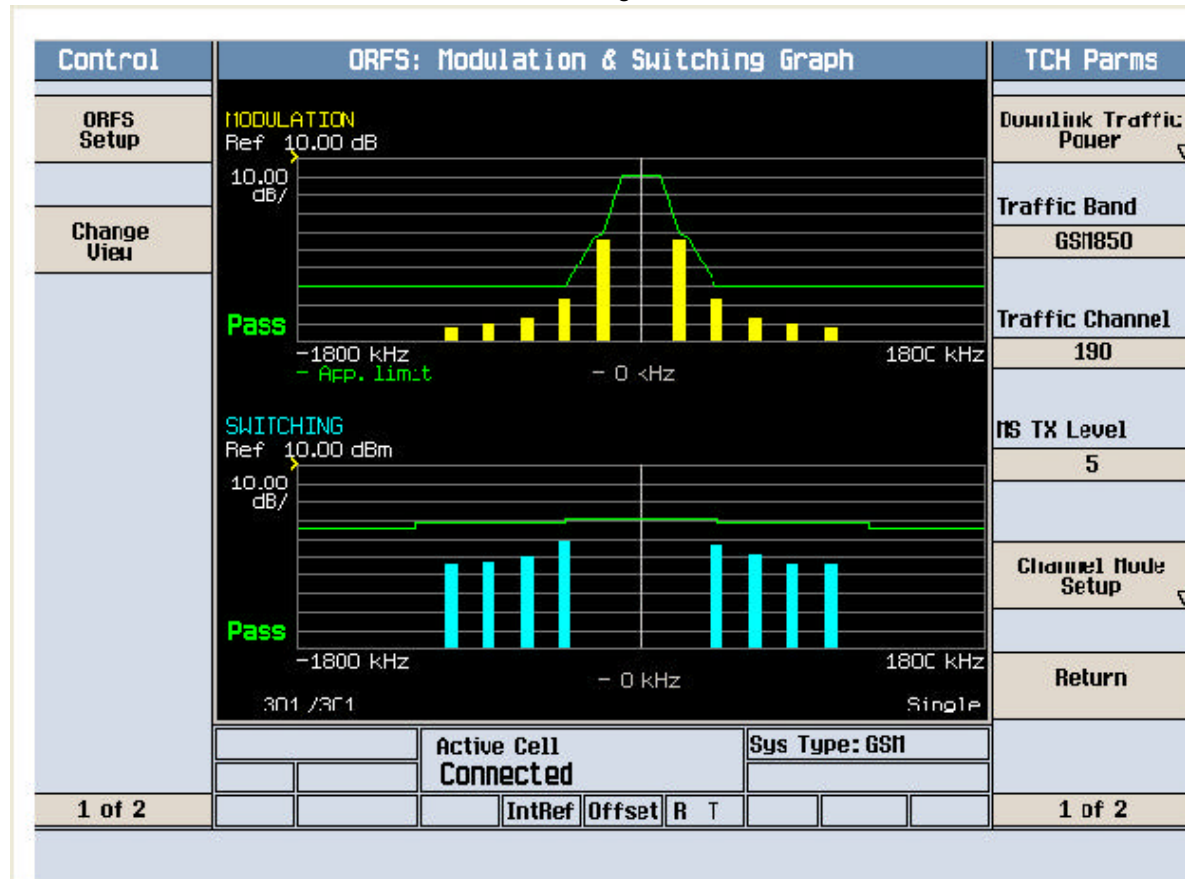
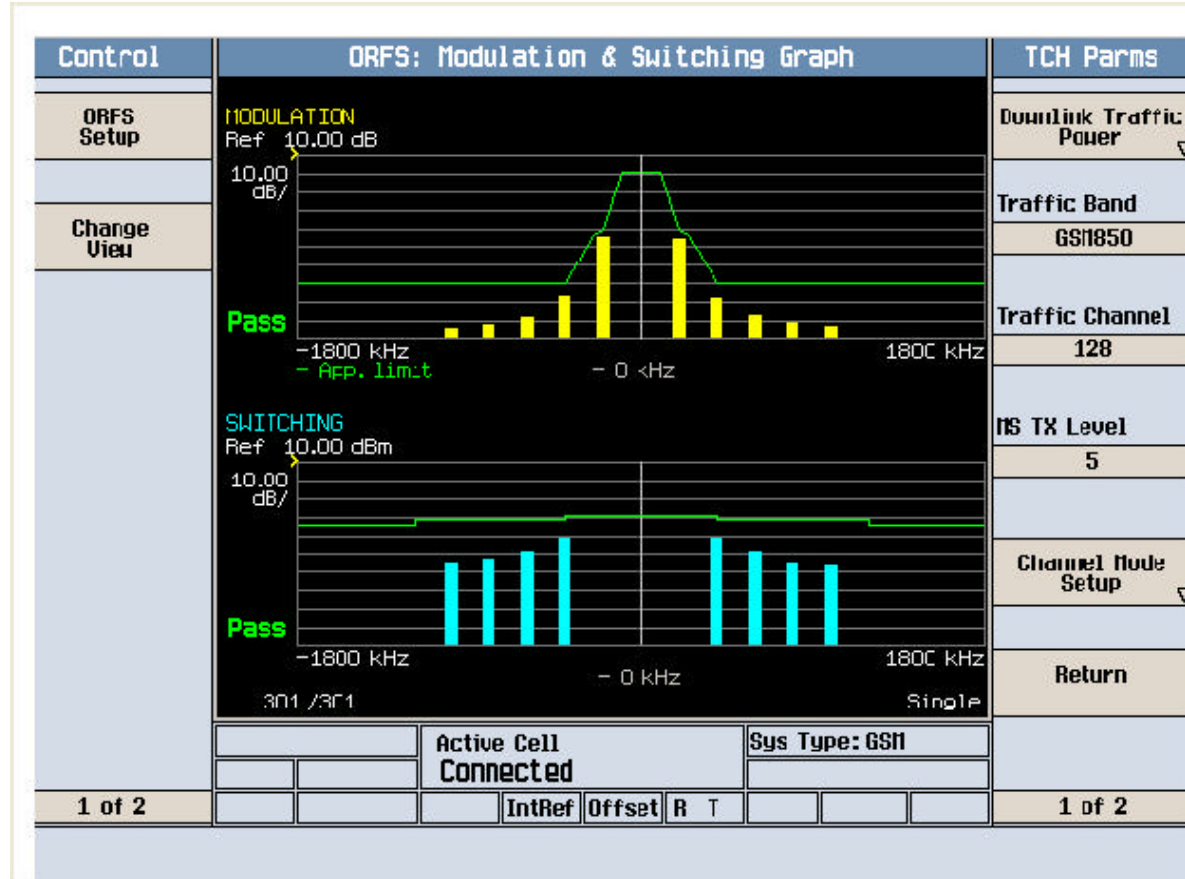



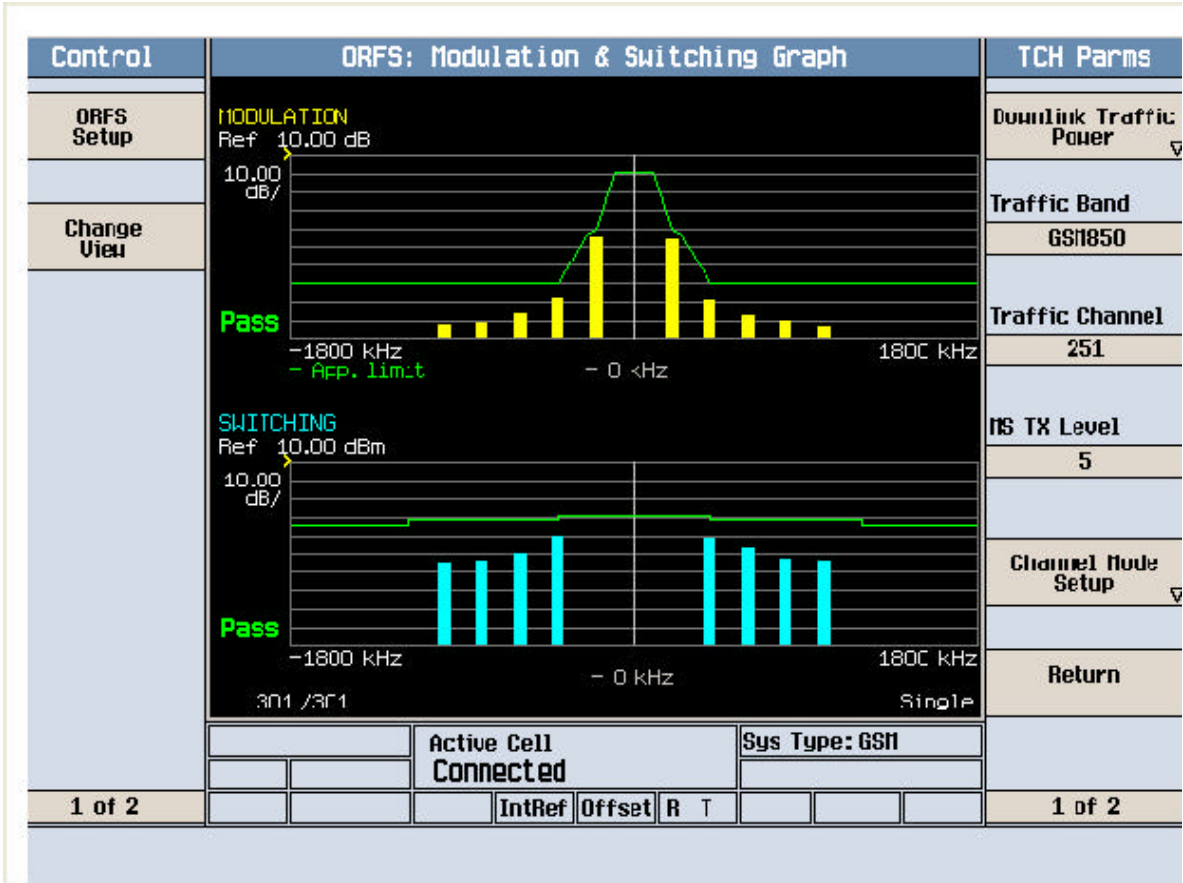


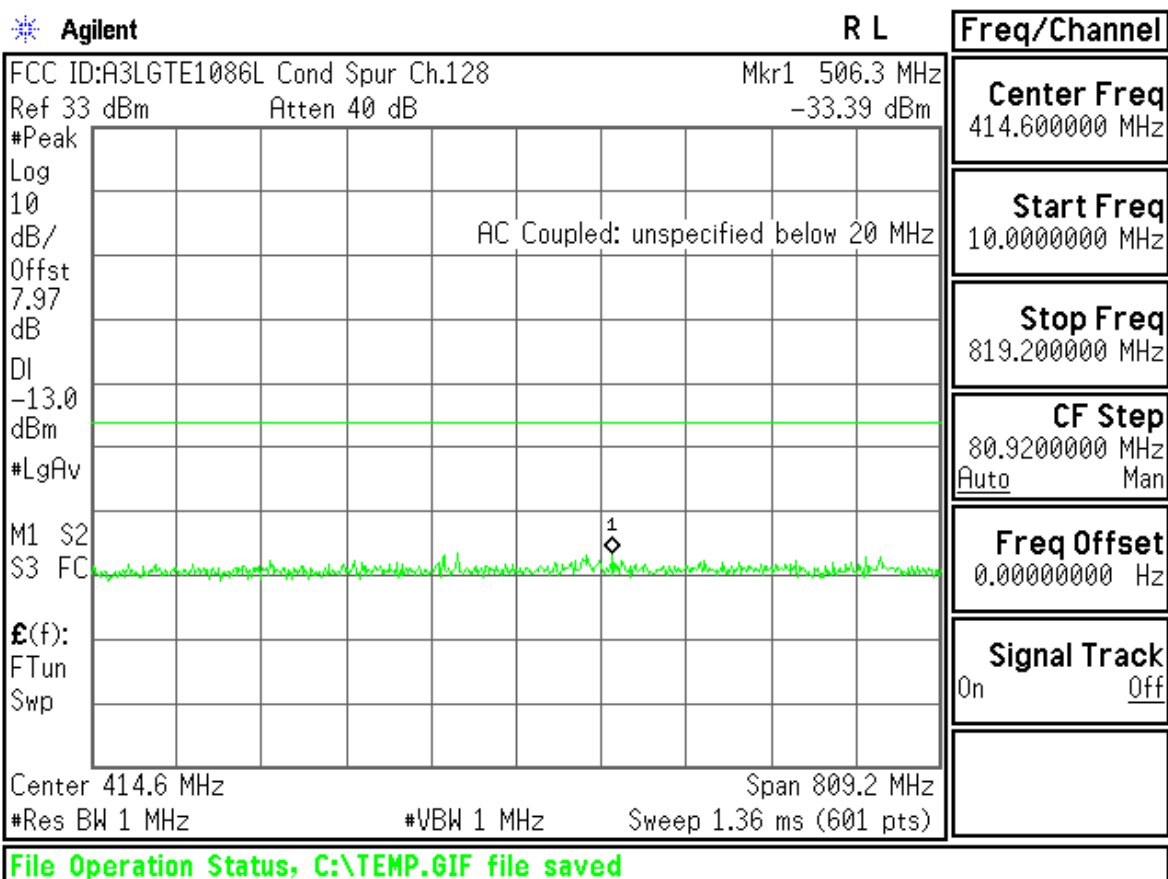
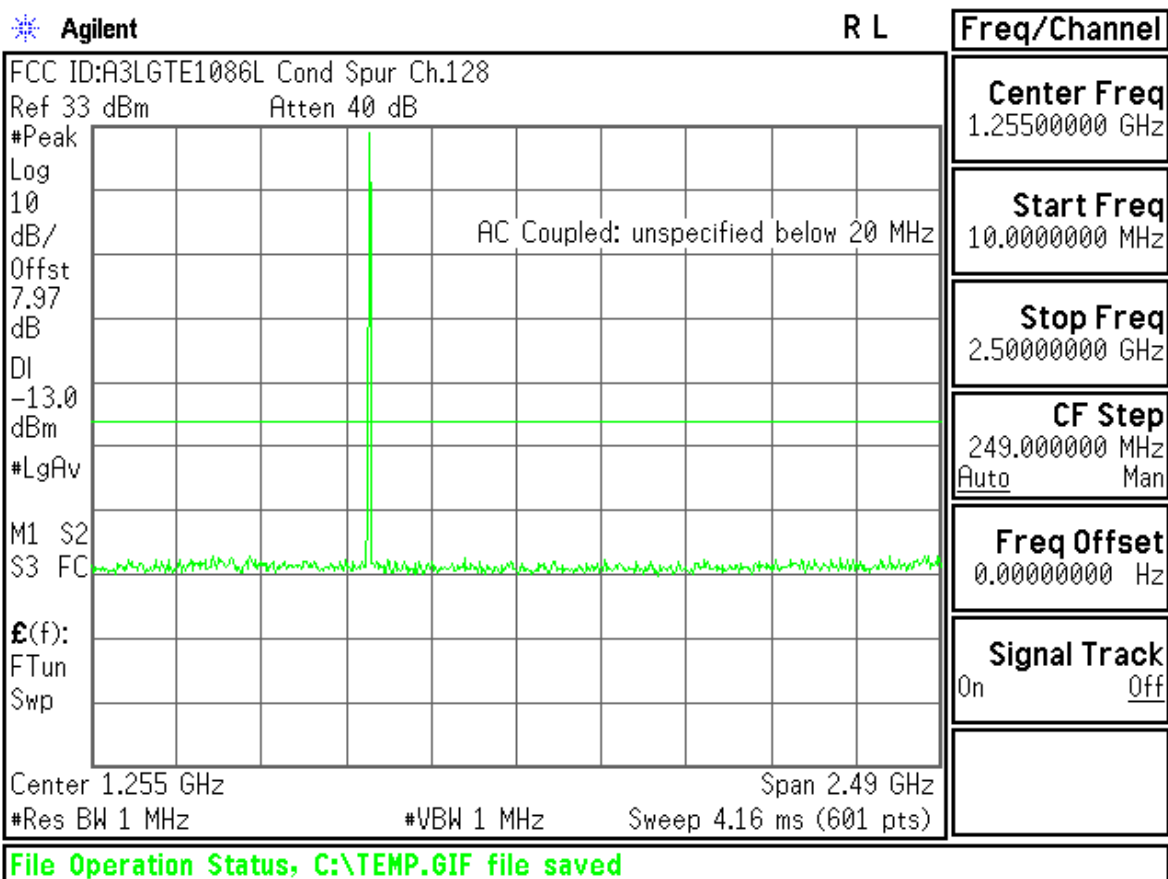


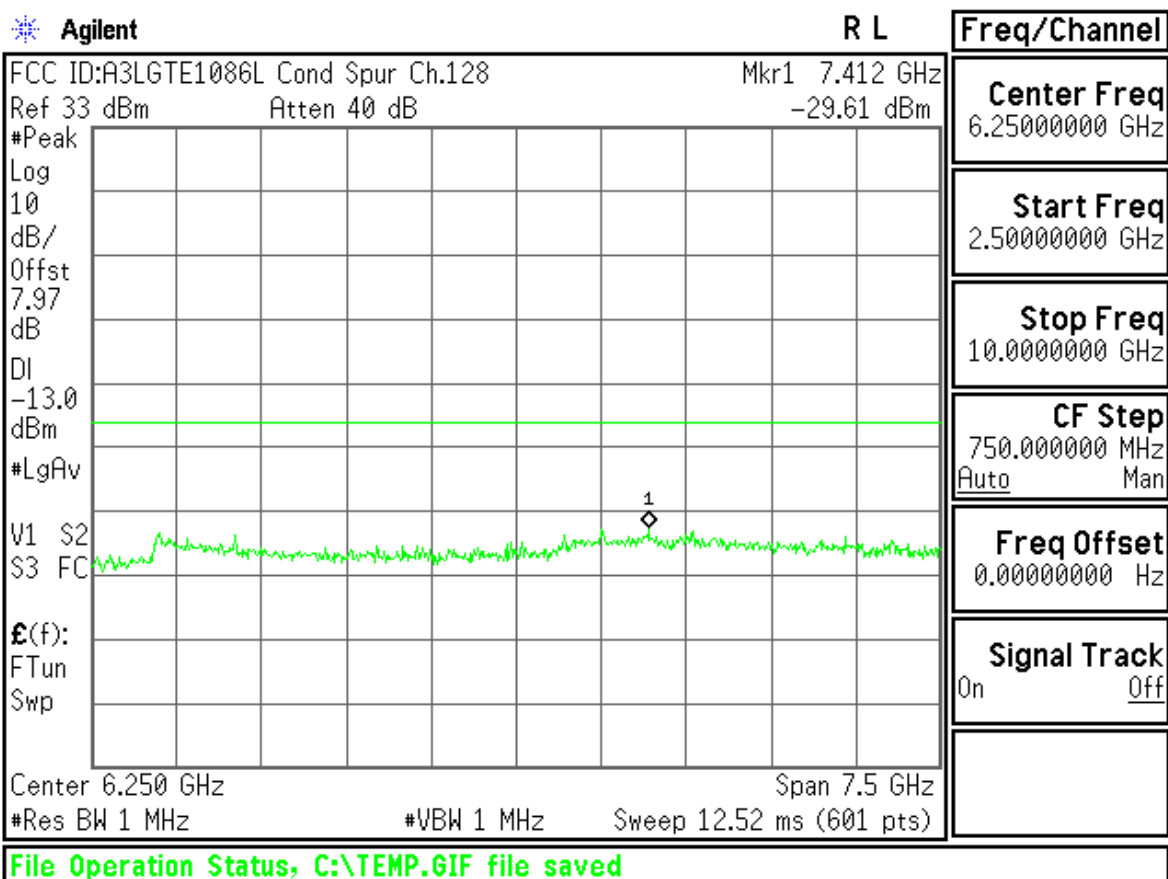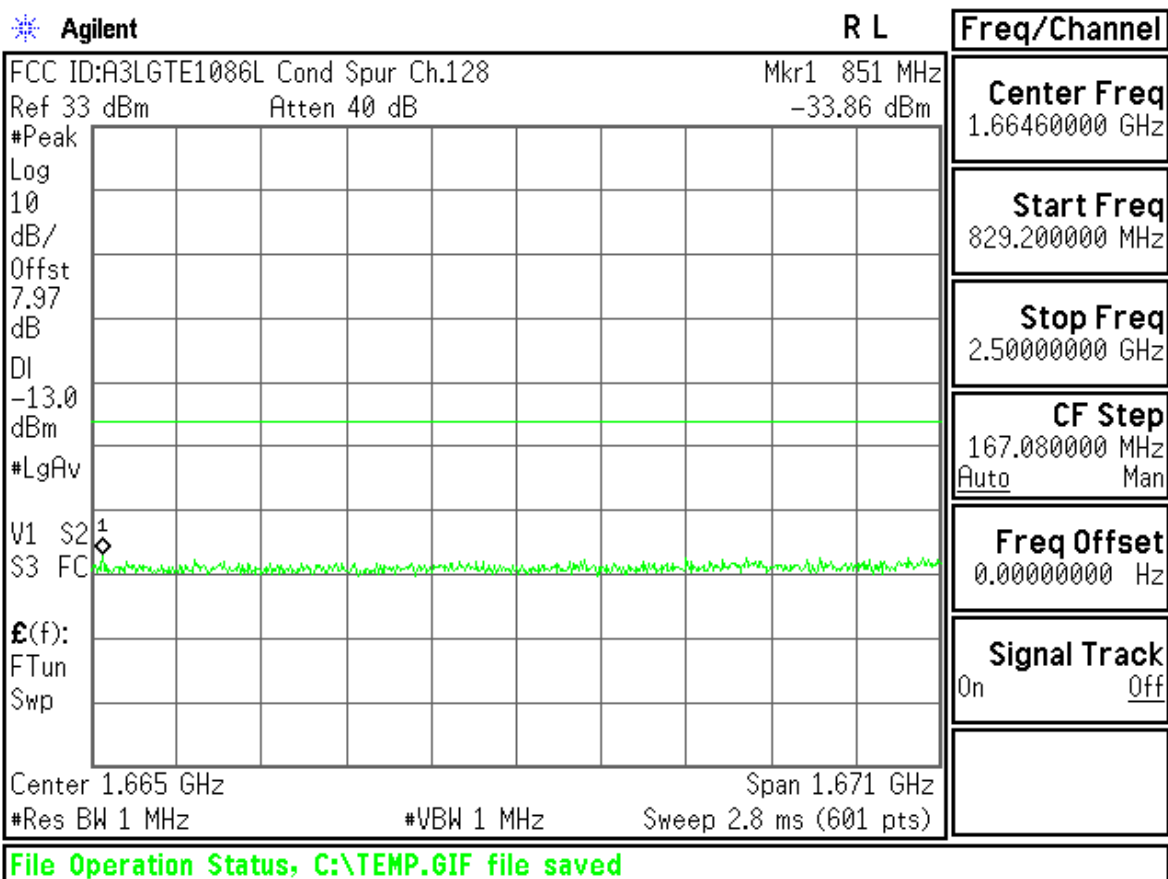

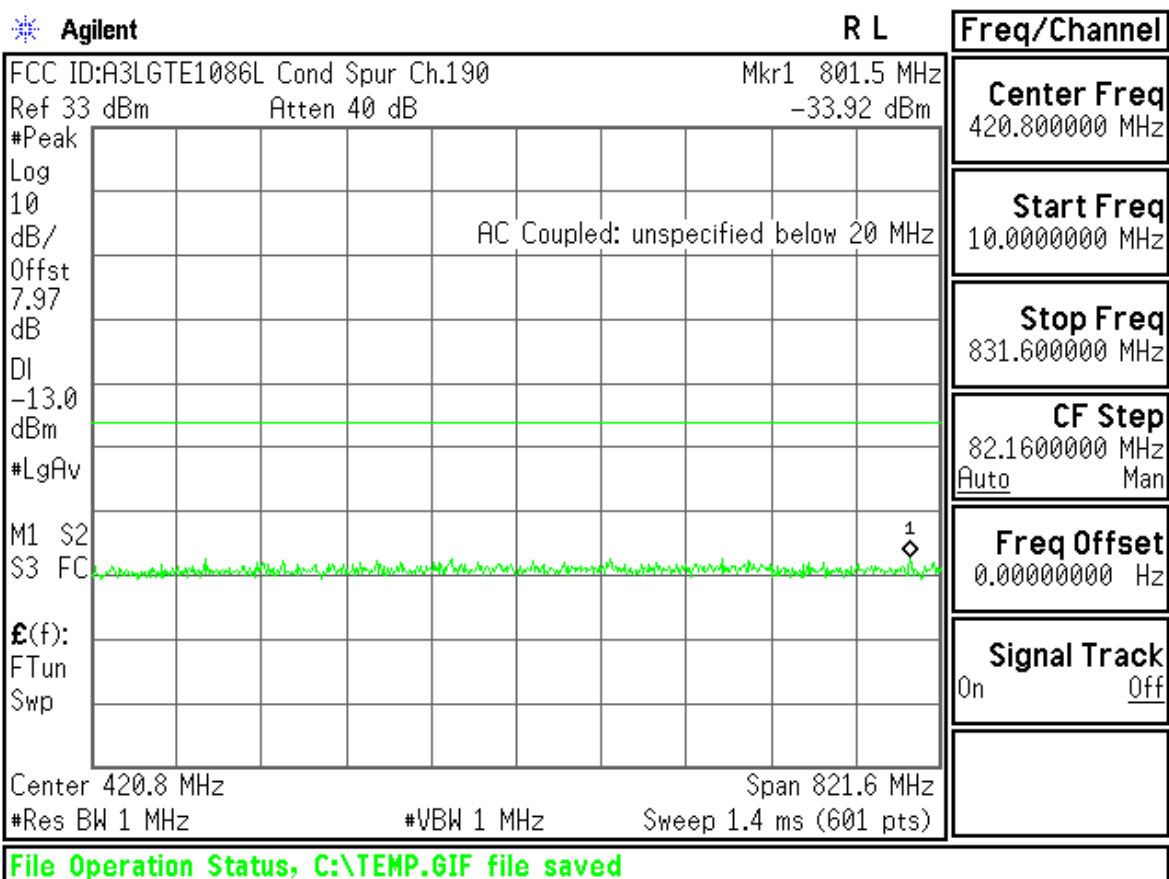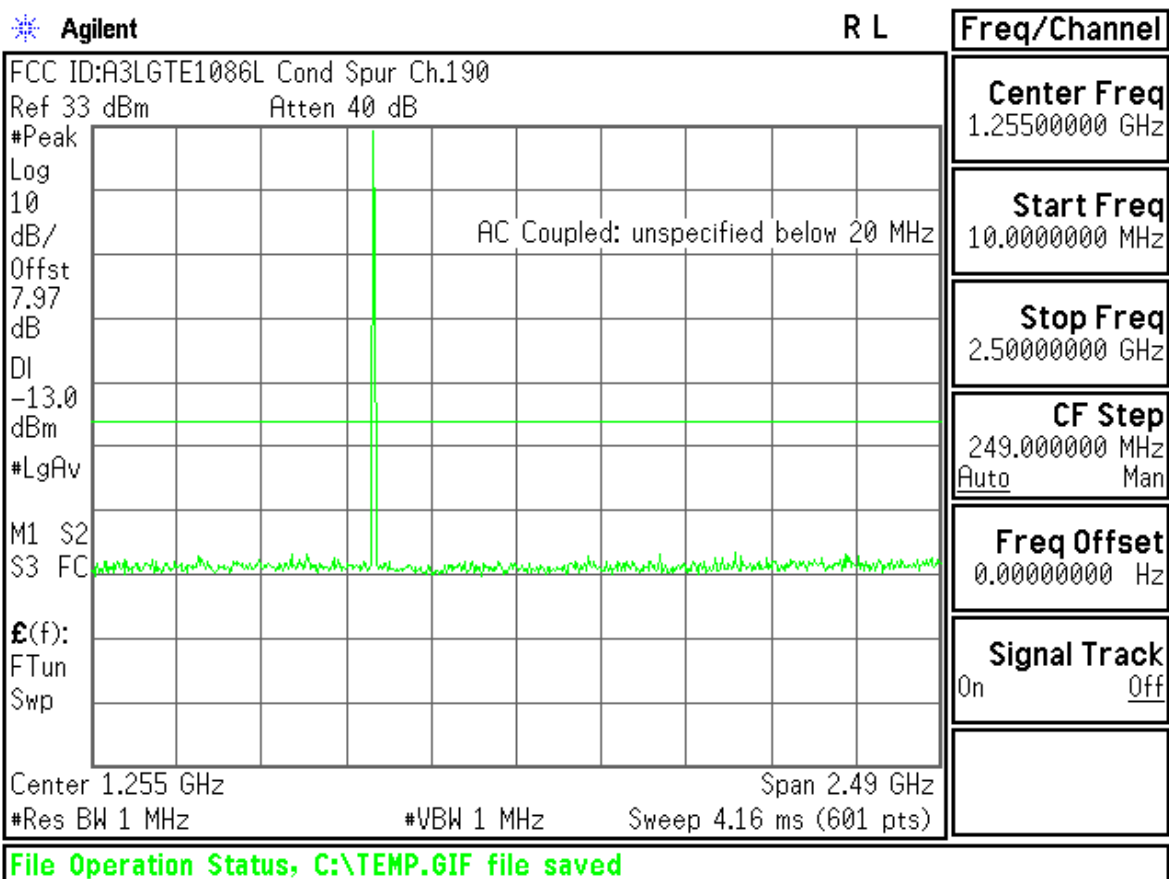

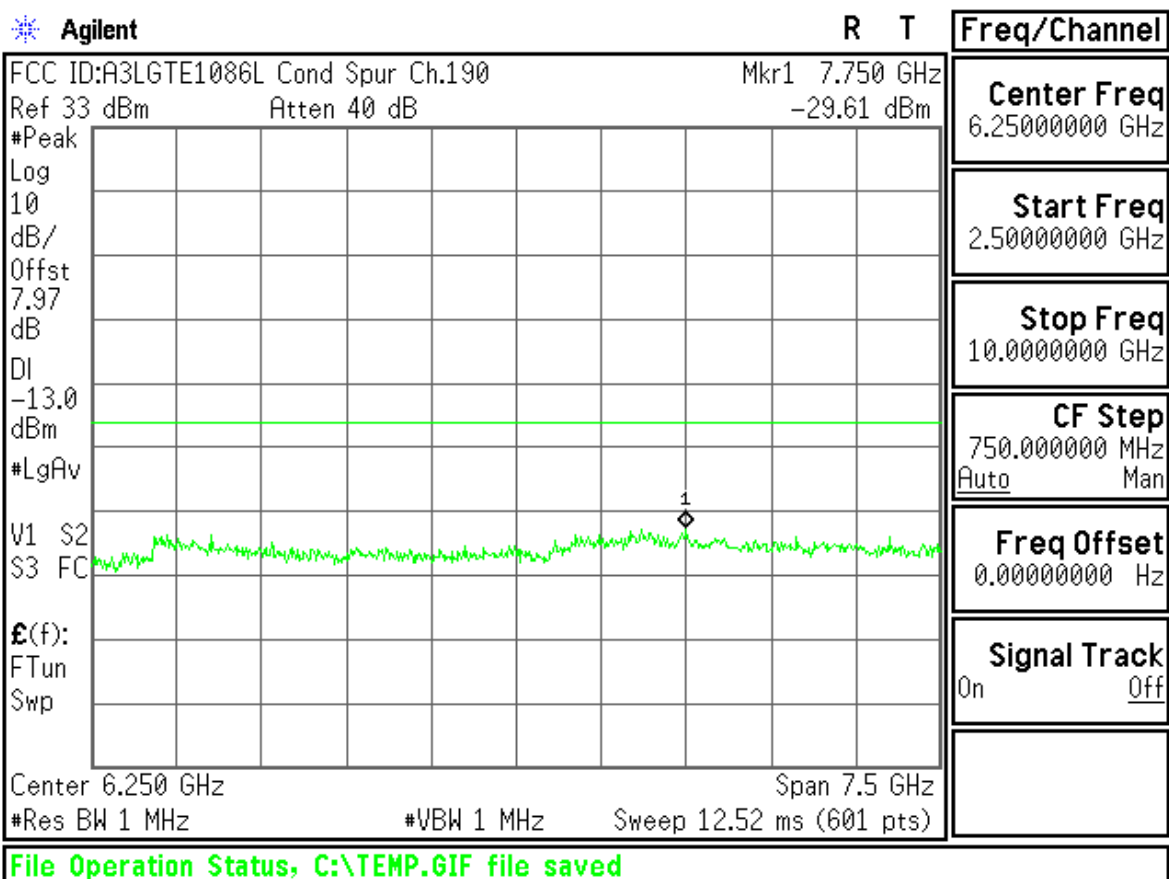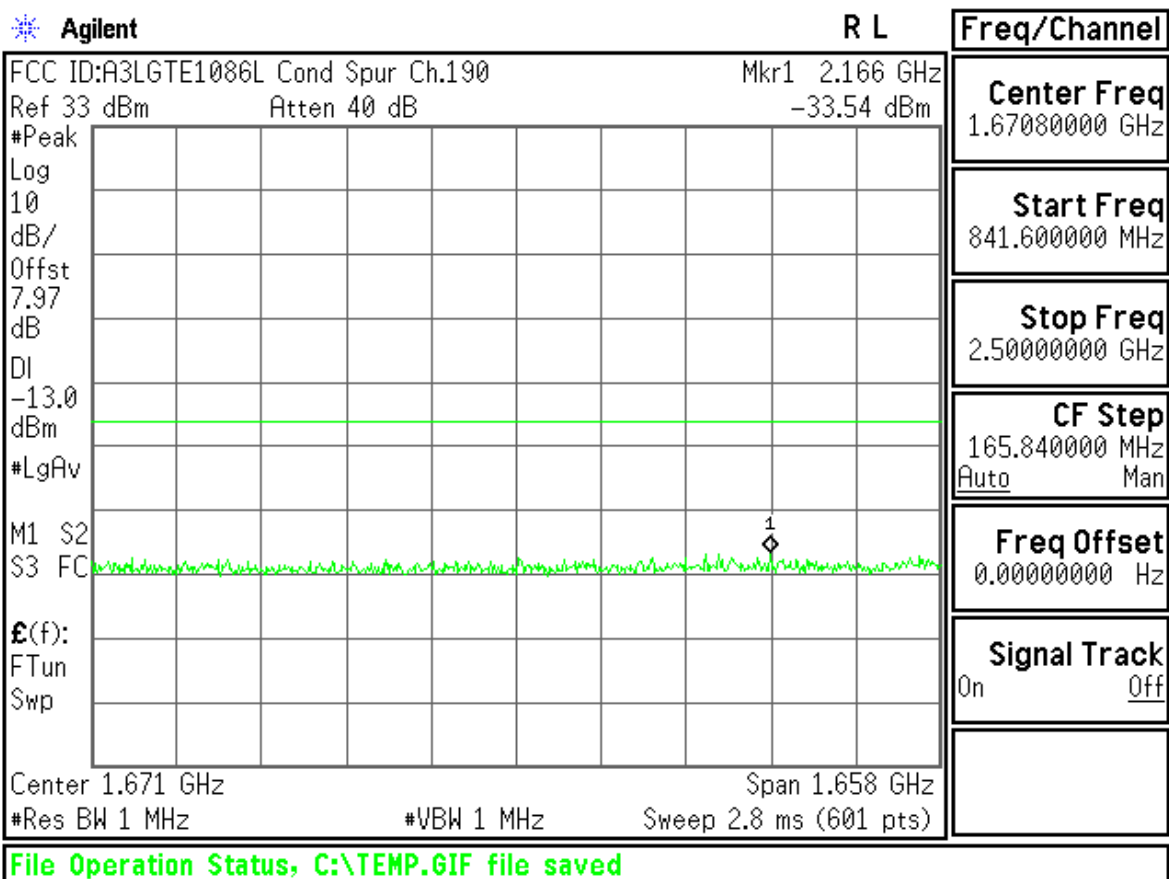

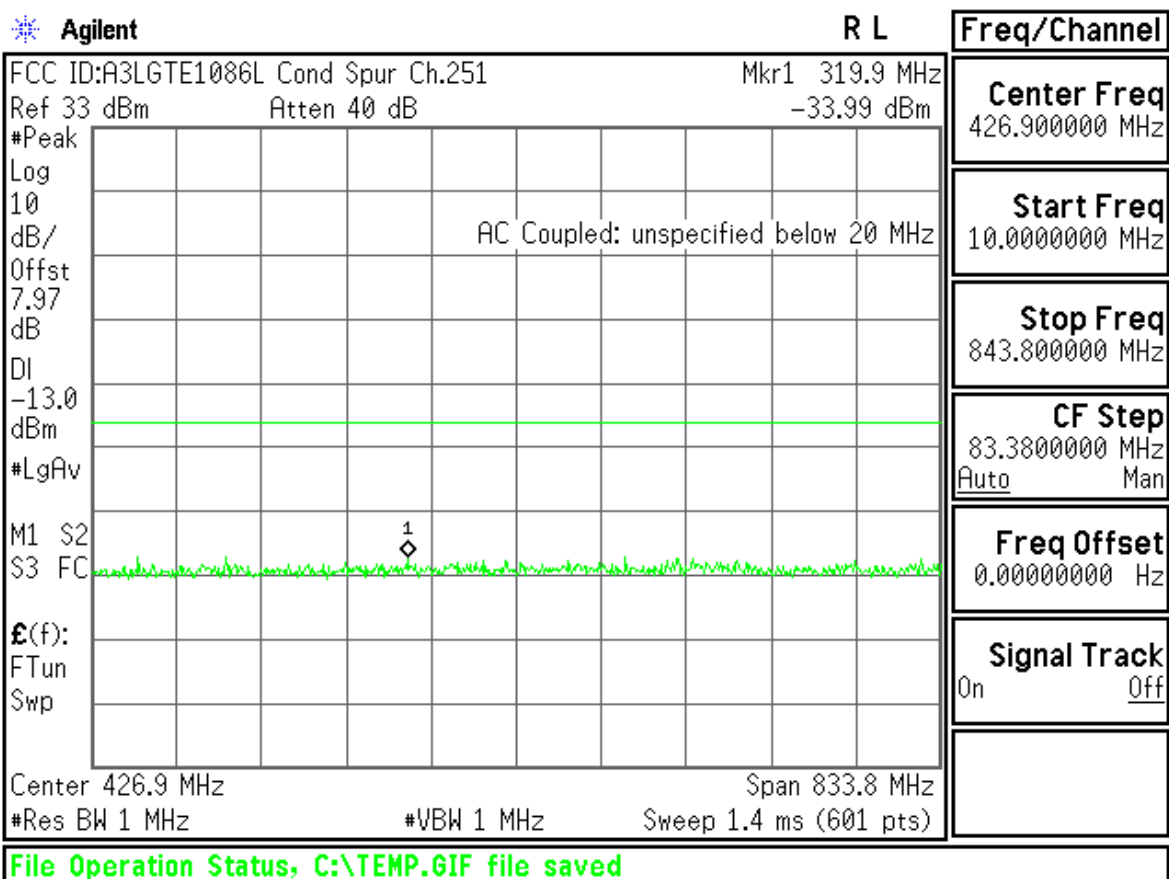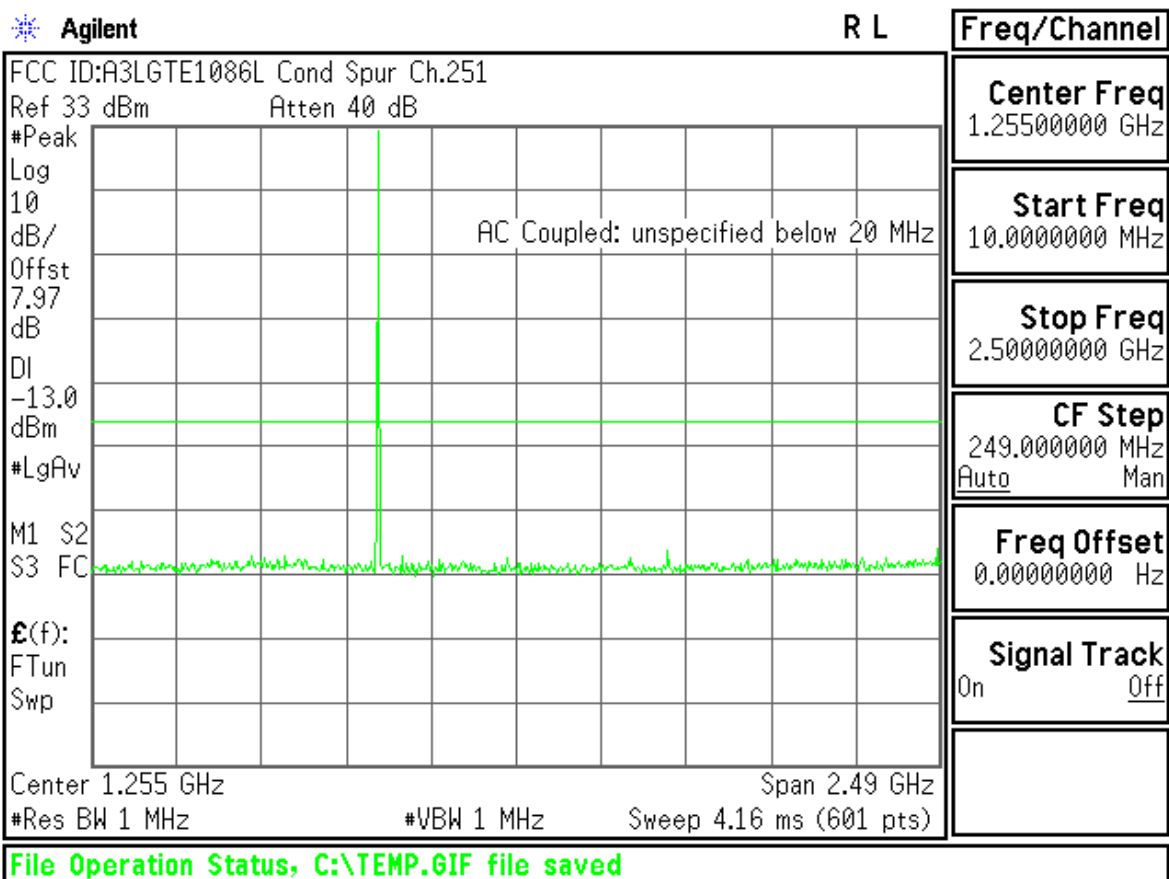

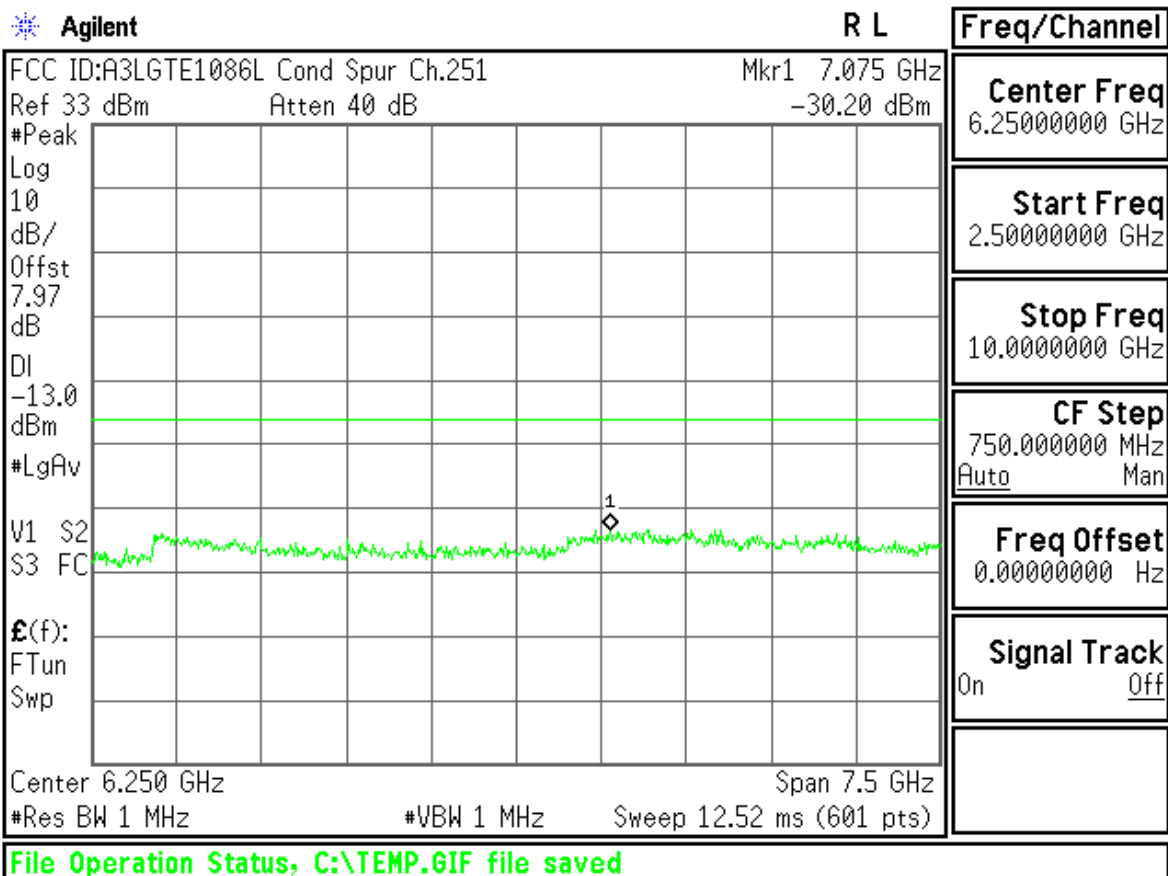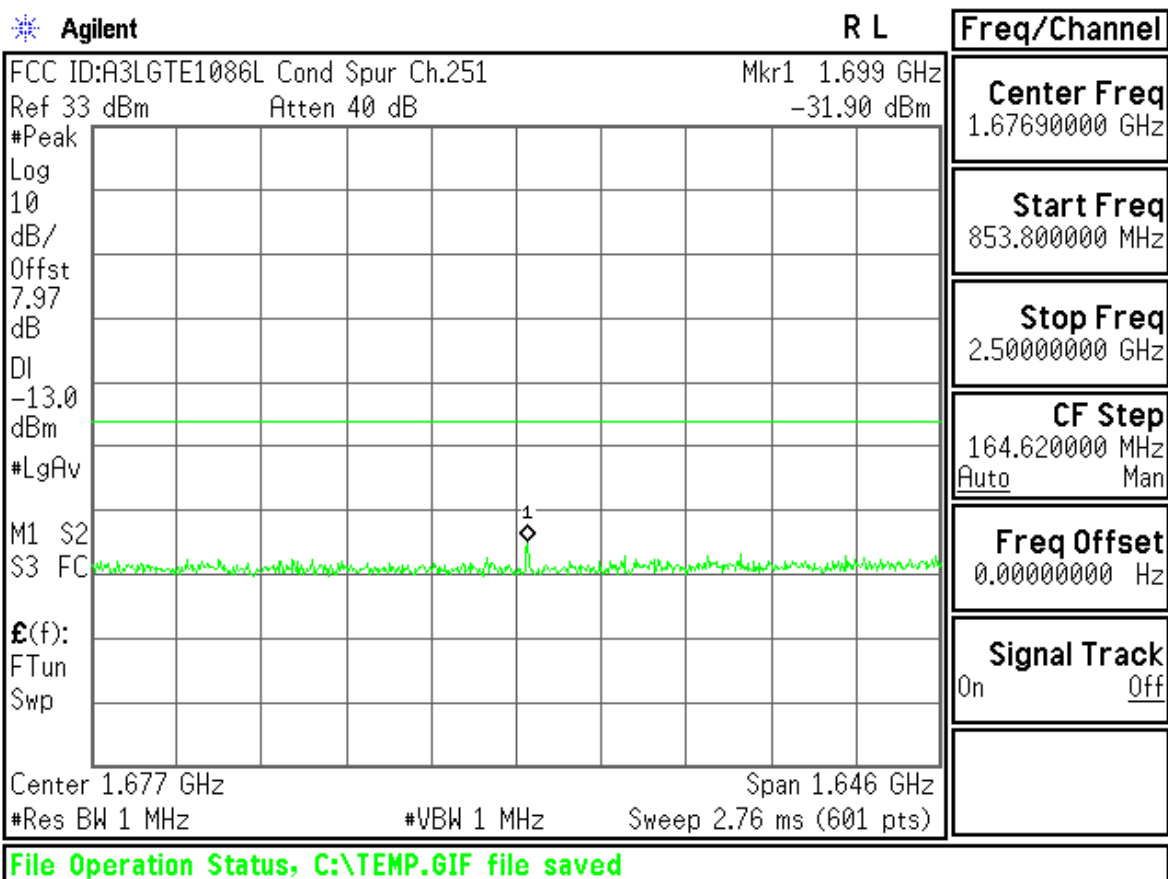

Agilent

R L

Freq/Channel

FCC ID:A3LGTE1086L Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

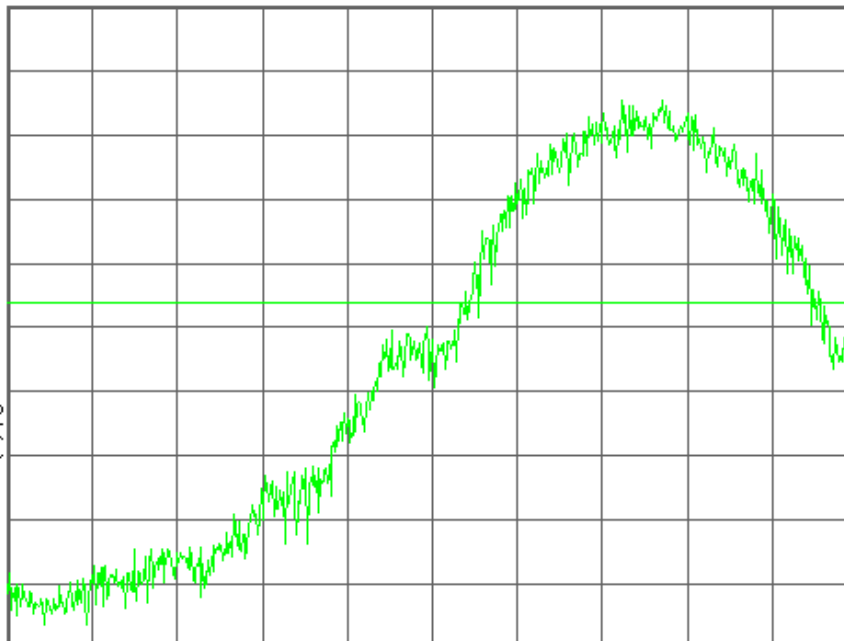

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
824.000000 MHz

Start Freq
823.595000 MHz

Stop Freq
824.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGTE1086L Band Edge Ch.128

Mkr1 823.997 3 MHz

Ref 33 dBm

Atten 40 dB

-15.40 dBm

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

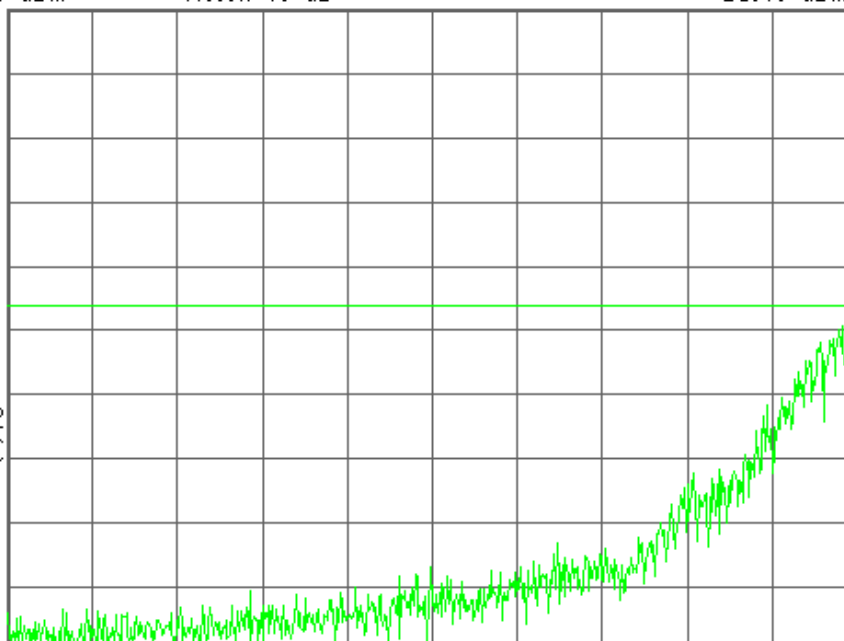

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
823.595000 MHz

Start Freq
823.190000 MHz



Stop Freq
824.000000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

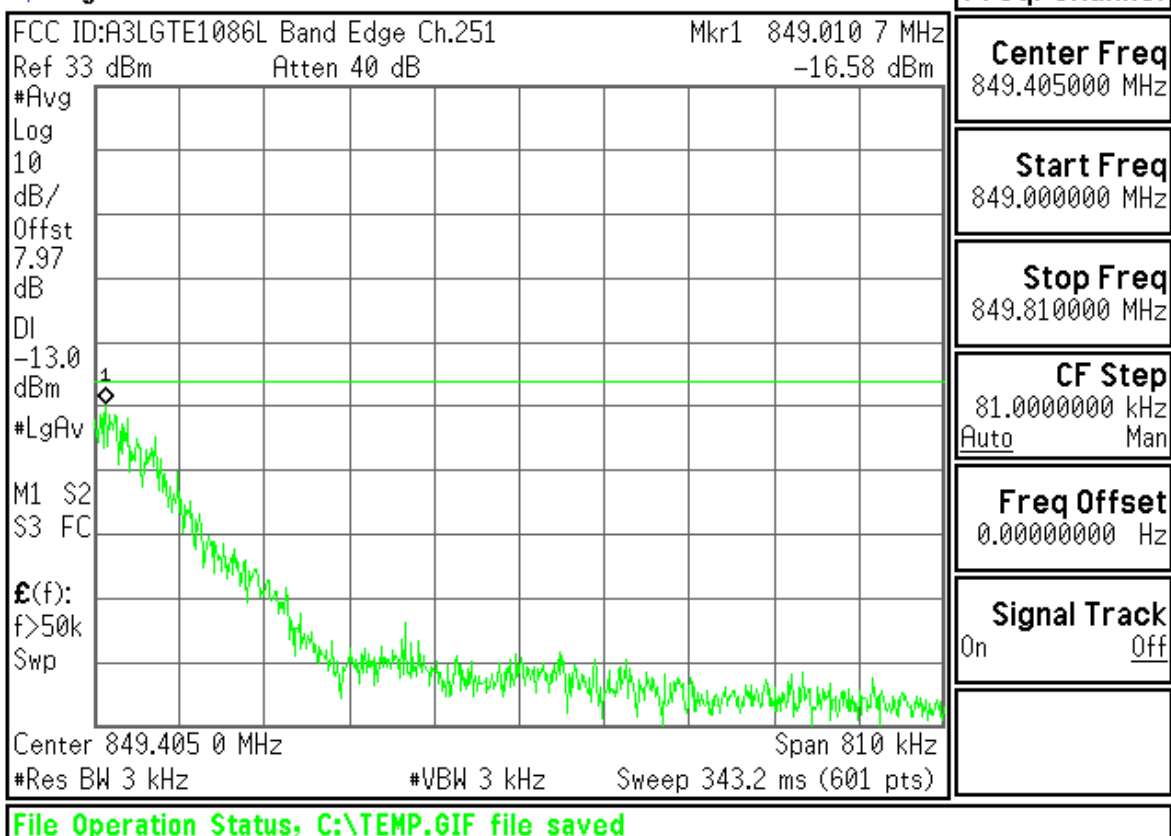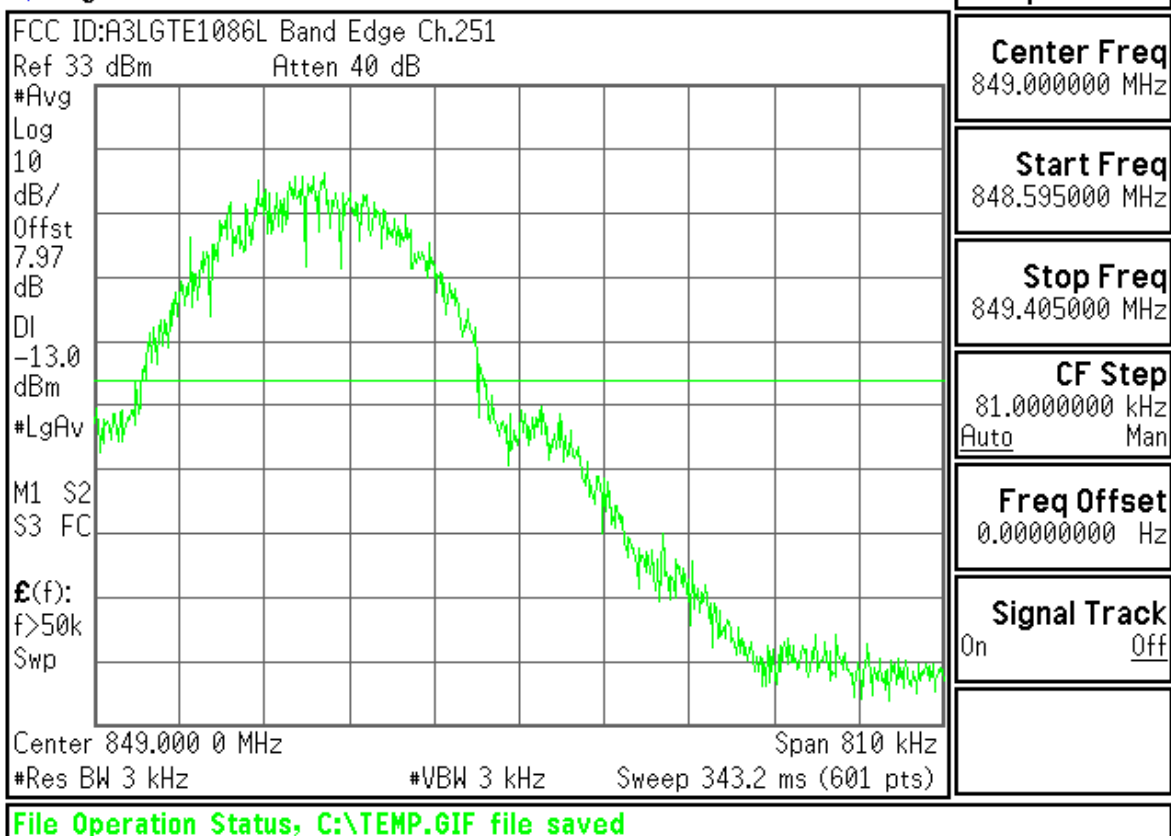

GSM1900

 Agilent


R T

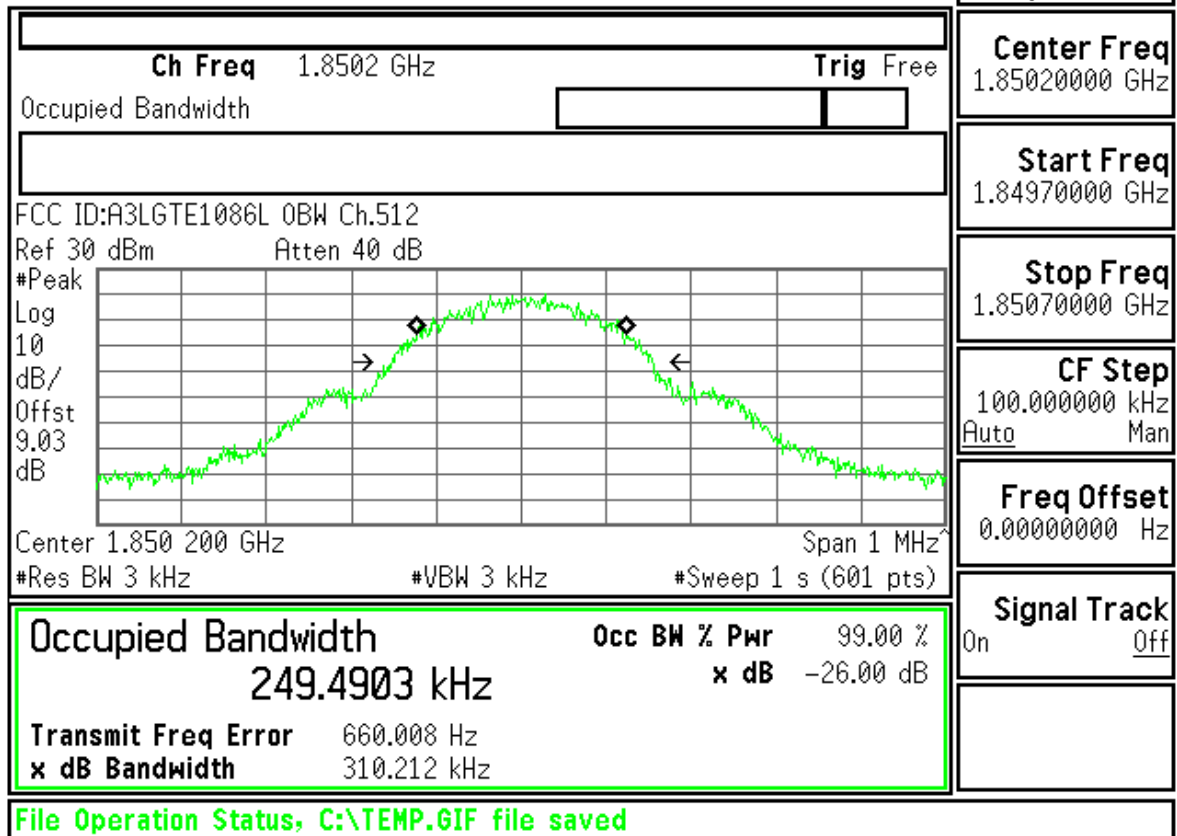


Freq/Channel
Center Freq 1.85020000 GHz
Start Freq 1.84970000 GHz
Stop Freq 1.85070000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

 Agilent

R T

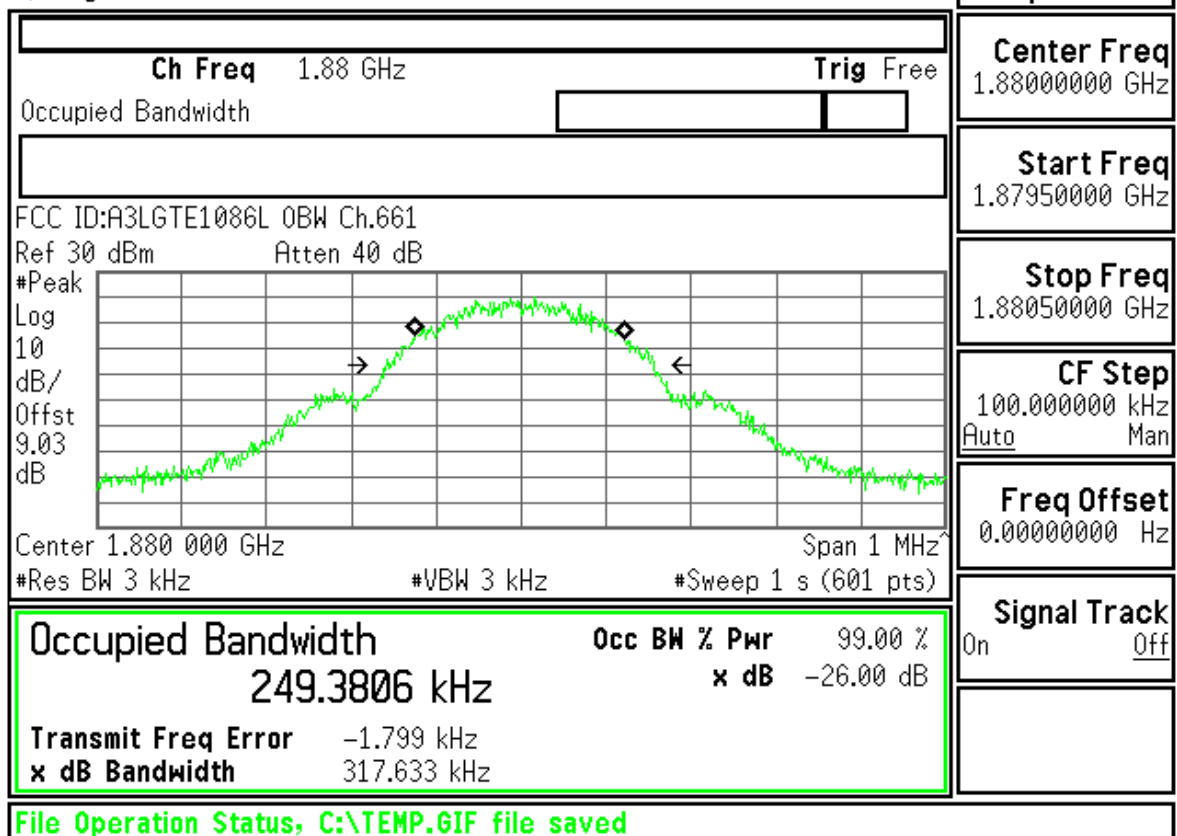

Freq/Channel
Center Freq 1.88000000 GHz
Start Freq 1.87950000 GHz
Stop Freq 1.88050000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


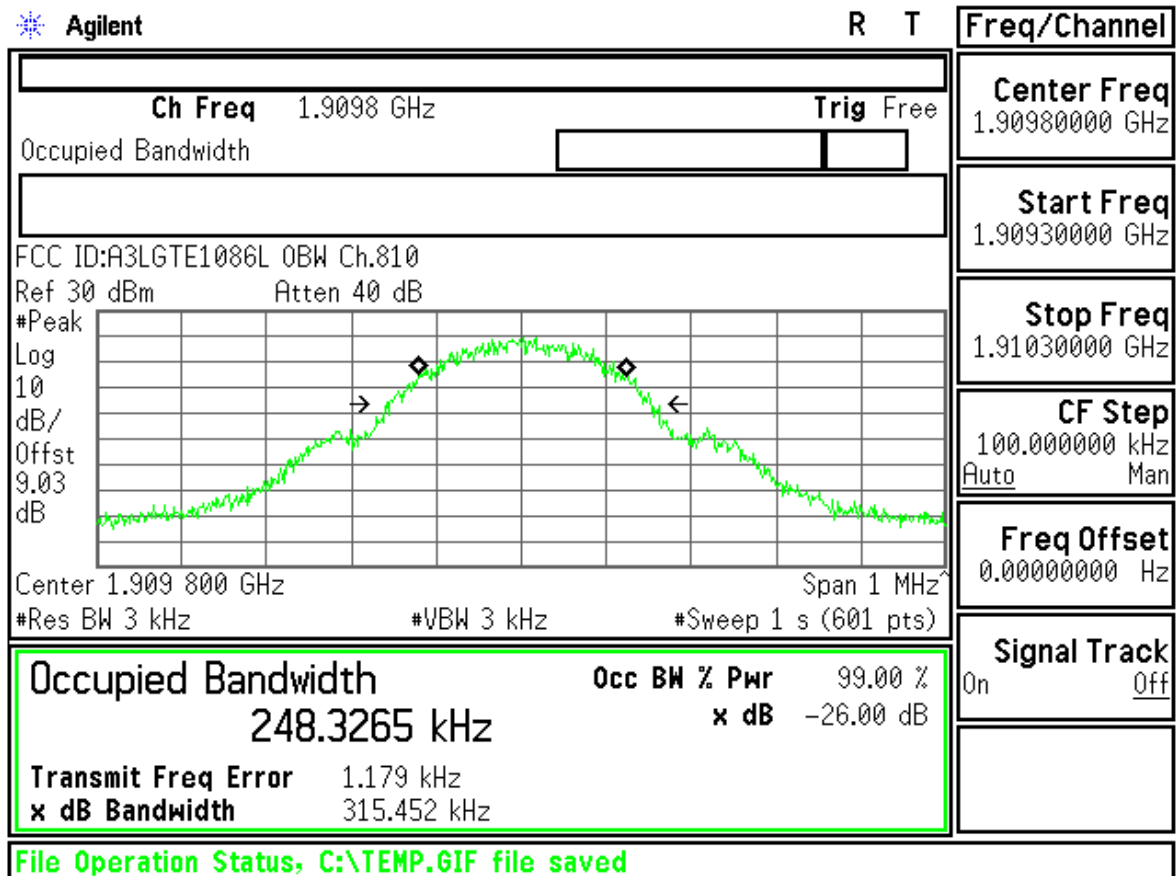




FCC ID : A3LGTE1086L Transmit Power 512CH



Measurement/Instrument Screen																																																														
Control		Transmit Power								TCH Parms																																																				
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.09</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.09</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.09	----	----	----	Estimated Carrier Power	29.09	----	----	----	Downlink Traffic Power ▾																																					
											Burst 1	Burst 2	Burst 3	Burst 4																																																
										Burst Power	29.09	----	----	----																																																
										Estimated Carrier Power	29.09	----	----	----																																																
Traffic Band																																																														
Snap Window Positions		<table><tr><th colspan="5">Phase & Frequency Error</th></tr><tr><th></th><th>Peak Phase °</th><th>RMS Phase °</th><th>Frequency Hz</th></tr><tr><td>Minimum</td><td>3.92</td><td>1.52</td><td>-56.79</td></tr><tr><td>Maximum</td><td>7.25</td><td>2.03</td><td>-12.41</td></tr><tr><td>Average</td><td>5.08</td><td>1.77</td><td>-35.92</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>								Phase & Frequency Error						Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.92	1.52	-56.79	Maximum	7.25	2.03	-12.41	Average	5.08	1.77	-35.92	Pass/Fail	Pass	Pass	Pass	Traffic Channel																											
										Phase & Frequency Error																																																				
											Peak Phase °	RMS Phase °	Frequency Hz																																																	
										Minimum	3.92	1.52	-56.79																																																	
Maximum	7.25	2.03	-12.41																																																											
Average	5.08	1.77	-35.92																																																											
Pass/Fail	Pass	Pass	Pass																																																											
512																																																														
1 of 2		<table><tr><td colspan="2"></td><td colspan="3">Active Cell Connected</td><td colspan="3">Sys Type: GSM</td></tr><tr><td></td><td></td><td colspan="3"></td><td colspan="3"></td></tr><tr><td></td><td></td><td>IntRef</td><td>Offset</td><td>R T</td><td></td><td></td><td></td></tr><tr><td colspan="8">Single</td><td colspan="3">MS TX Level</td></tr><tr><td colspan="3">0</td></tr><tr><td colspan="3">Channel Mode Setup ▾</td></tr><tr><td colspan="3">Return</td></tr><tr><td colspan="3"></td></tr><tr><td colspan="3"></td></tr></table>										Active Cell Connected			Sys Type: GSM													IntRef	Offset	R T				Single								MS TX Level			0			Channel Mode Setup ▾			Return									Channel Mode Setup ▾		
												Active Cell Connected			Sys Type: GSM																																															
												IntRef	Offset	R T																																																
Single								MS TX Level																																																						
0																																																														
Channel Mode Setup ▾																																																														
Return																																																														



Measurement/Instrument Screen																																
Control	Transmit Power							TCH Parms																								
Transmit Power Setup ▾	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.16</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.16</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.16	----	----	----	Estimated Carrier Power	29.16	----	----	----	Downlink Traffic Power ▾									
									Burst 1	Burst 2	Burst 3	Burst 4																				
								Burst Power	29.16	----	----	----																				
								Estimated Carrier Power	29.16	----	----	----																				
Traffic Band																																
PCS																																
Swap Window Positions	Single <table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.94</td> <td>1.52</td> <td>-19.93</td> </tr> <tr> <td>Maximum</td> <td>6.05</td> <td>1.90</td> <td>3.60</td> </tr> <tr> <td>Average</td> <td>5.11</td> <td>1.76</td> <td>-8.95</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table> 50 / 50 Single							Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.94	1.52	-19.93	Maximum	6.05	1.90	3.60	Average	5.11	1.76	-8.95	Pass/Fail	Pass	Pass	Pass	Traffic Channel 661
								Phase & Frequency Error																								
									Peak Phase °	RMS Phase °	Frequency Hz																					
								Minimum	3.94	1.52	-19.93																					
Maximum	6.05	1.90	3.60																													
Average	5.11	1.76	-8.95																													
Pass/Fail	Pass	Pass	Pass																													
1 of 2	Active Cell Connected Sys Type: GSM							MS TX Level 0																								
								Channel Mode Setup ▾																								
								Return																								
								1 of 2																								



Measurement/Instrument Screen																																
Control	Transmit Power							TCH Parms																								
Transmit Power Setup ▾	<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>28.91</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>28.91</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	28.91	----	----	----	Estimated Carrier Power	28.91	----	----	----	Downlink Traffic Power ▾									
									Burst 1	Burst 2	Burst 3	Burst 4																				
								Burst Power	28.91	----	----	----																				
								Estimated Carrier Power	28.91	----	----	----																				
Traffic Band																																
PCS																																
Swap Window Positions	Single <table border="1"> <thead> <tr> <th colspan="4">Phase & Frequency Error</th> </tr> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.94</td> <td>1.53</td> <td>-9.03</td> </tr> <tr> <td>Maximum</td> <td>7.31</td> <td>1.90</td> <td>12.56</td> </tr> <tr> <td>Average</td> <td>5.21</td> <td>1.74</td> <td>-1.42</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table> 50 / 50 Single							Phase & Frequency Error					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.94	1.53	-9.03	Maximum	7.31	1.90	12.56	Average	5.21	1.74	-1.42	Pass/Fail	Pass	Pass	Pass	Traffic Channel 810
								Phase & Frequency Error																								
									Peak Phase °	RMS Phase °	Frequency Hz																					
								Minimum	3.94	1.53	-9.03																					
Maximum	7.31	1.90	12.56																													
Average	5.21	1.74	-1.42																													
Pass/Fail	Pass	Pass	Pass																													
1 of 2	Active Cell Connected Sys Type: GSM							MS TX Level 0																								
								Channel Mode Setup ▾																								
								Return																								
								1 of 2																								

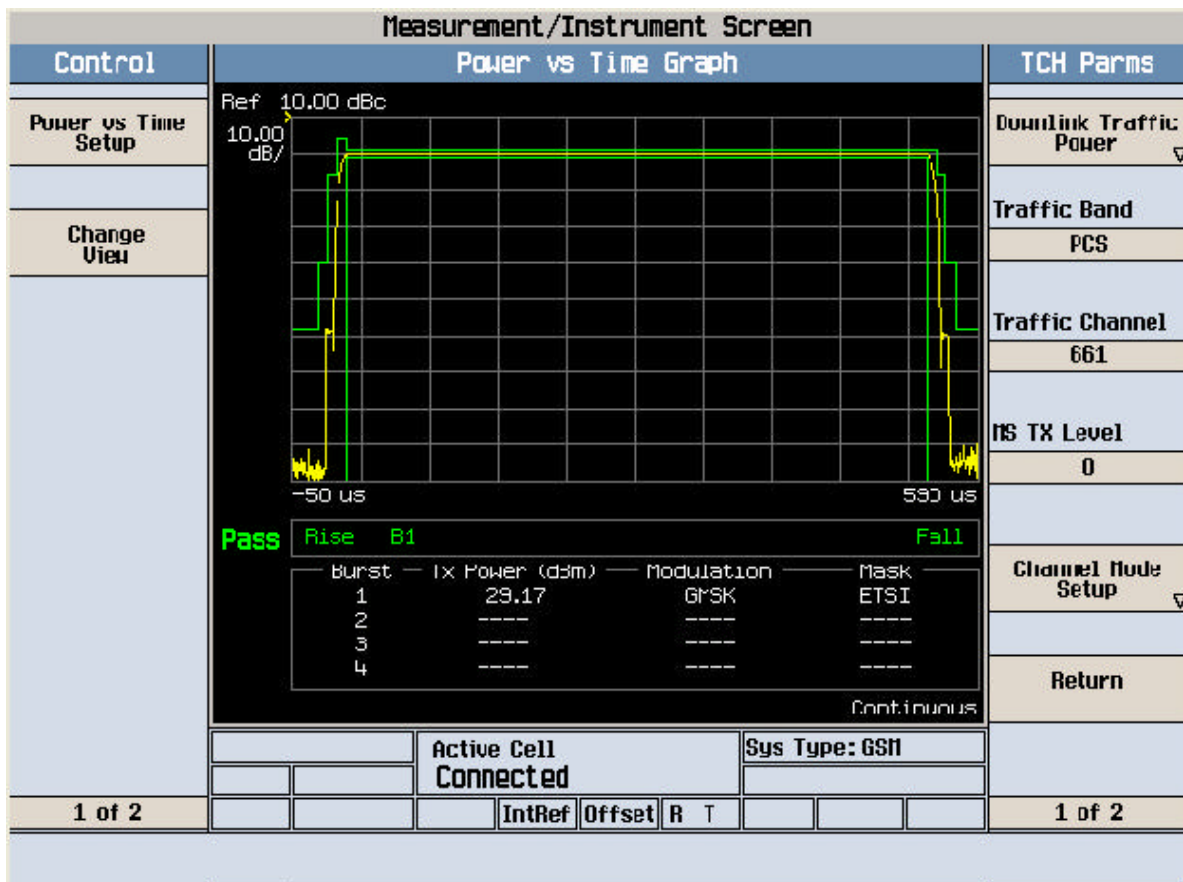
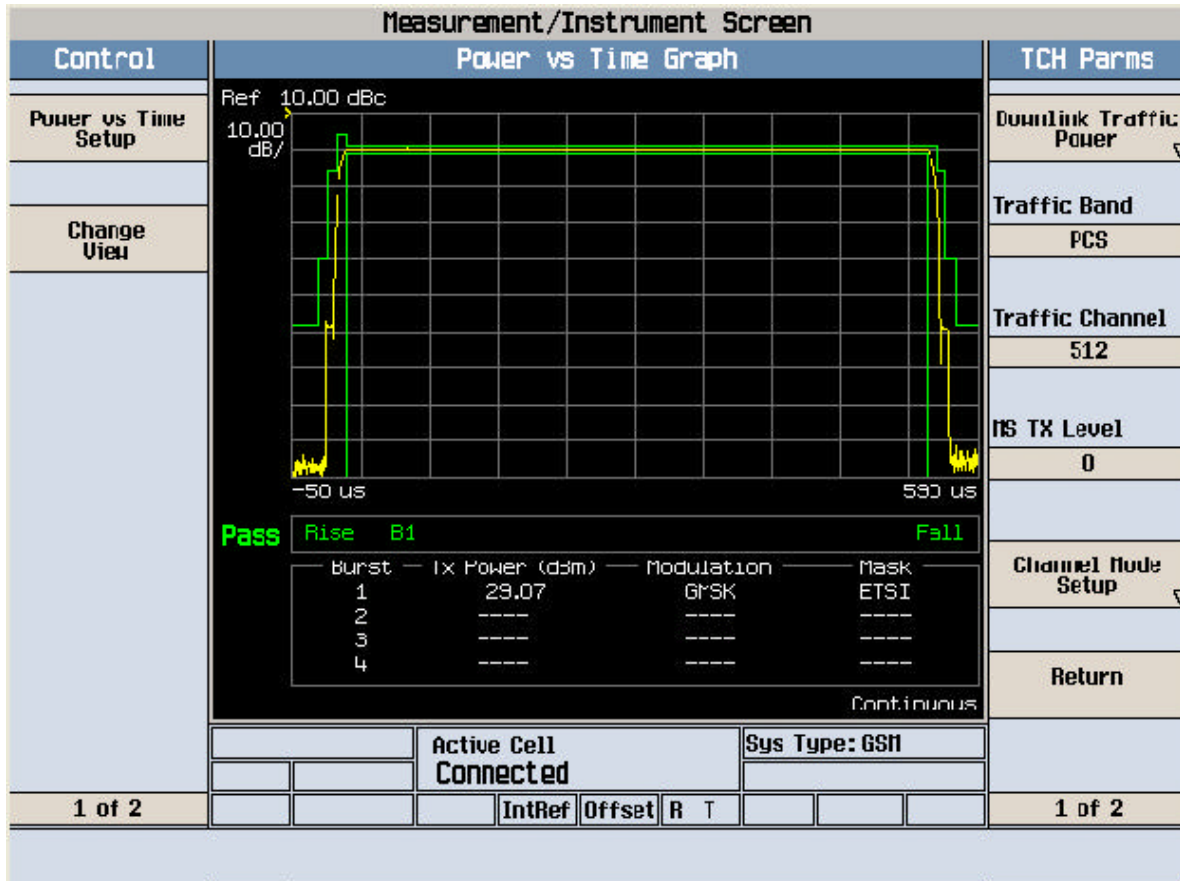


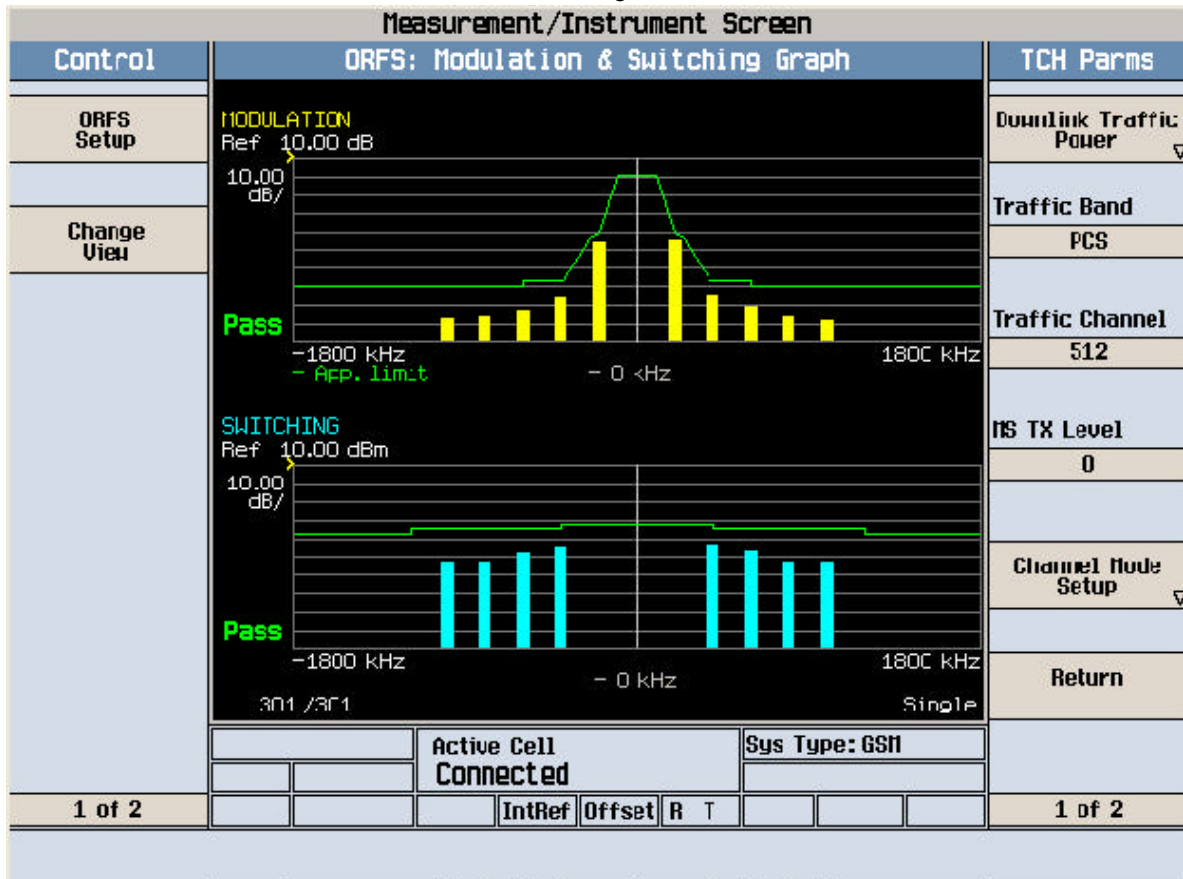
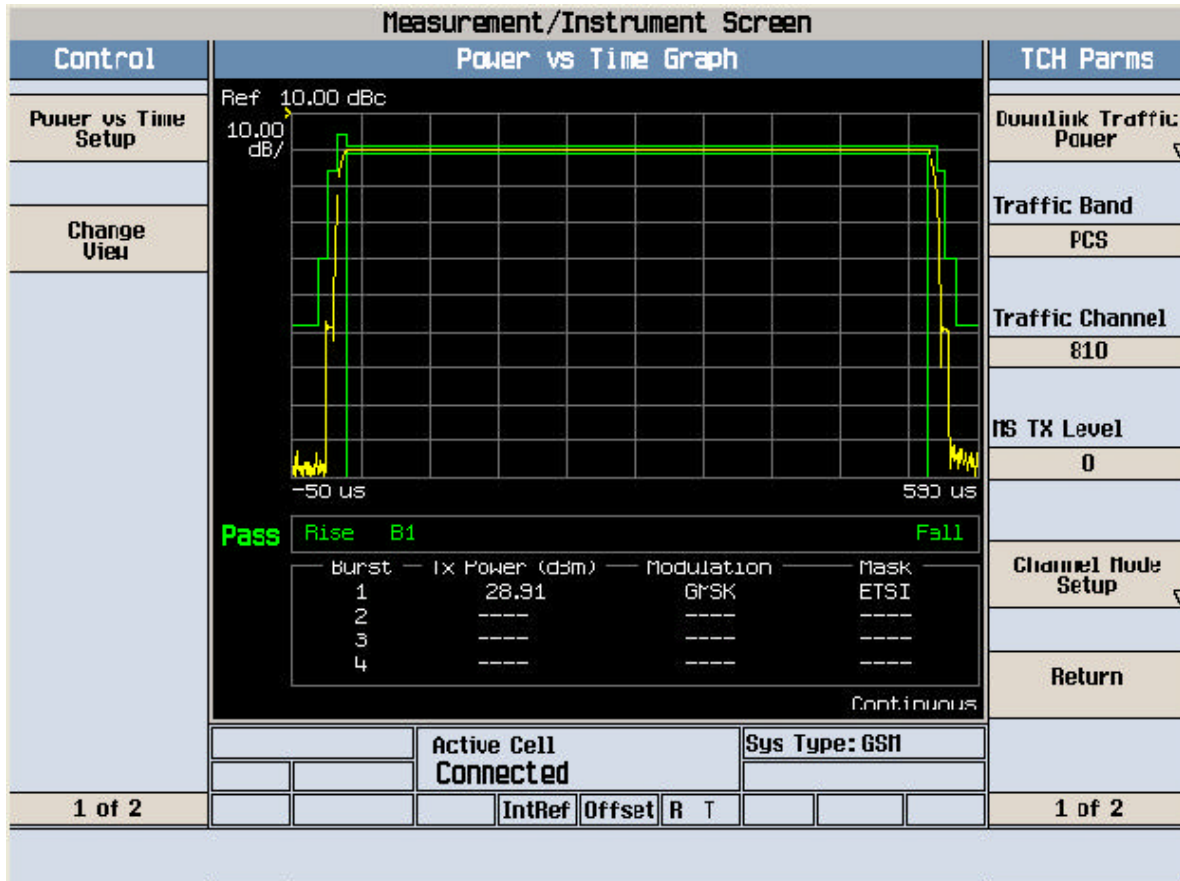


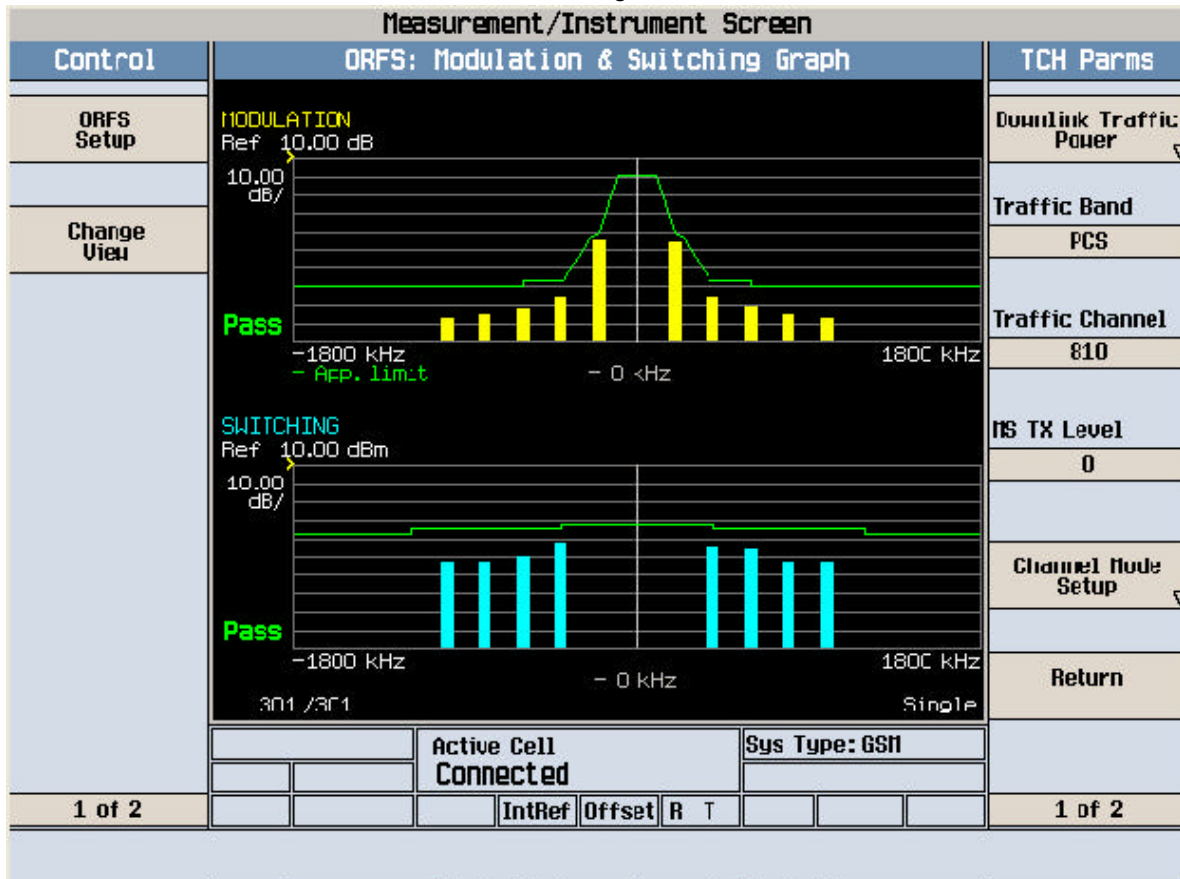
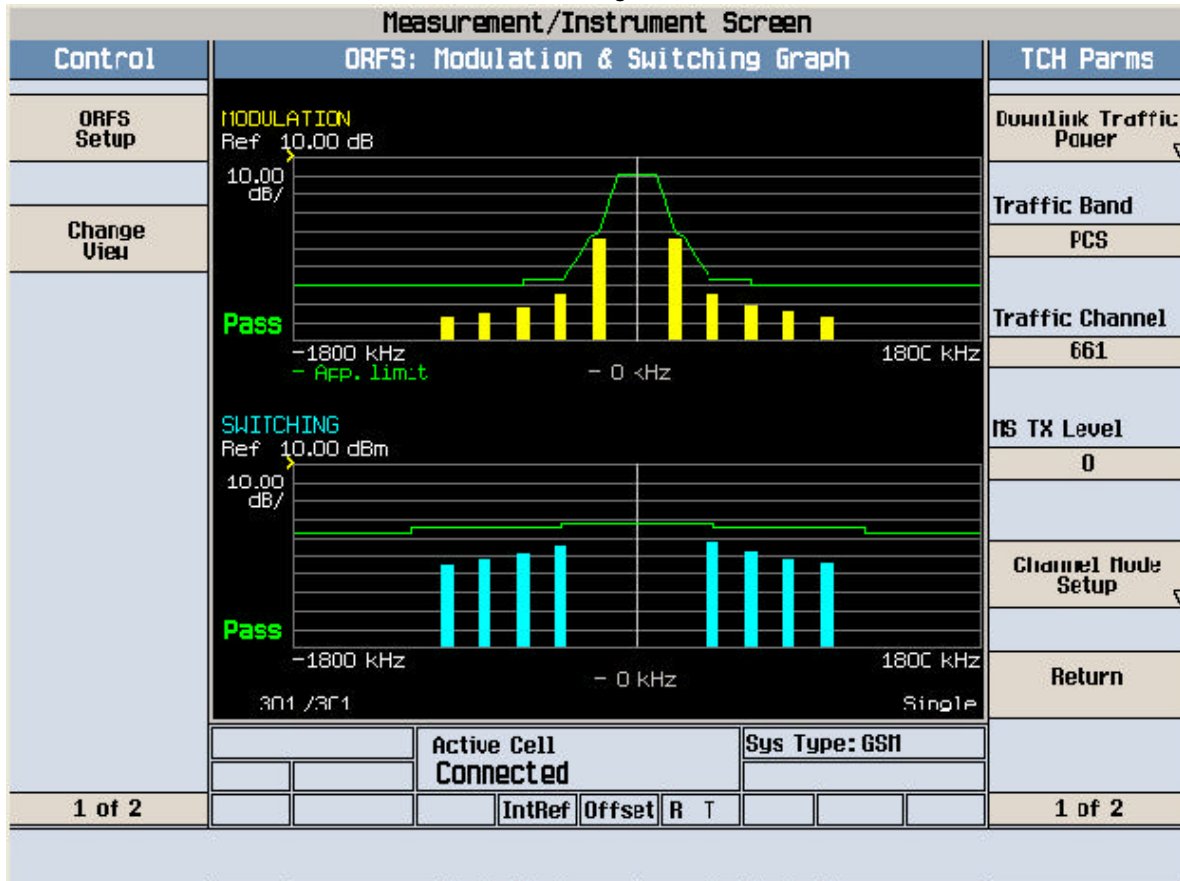


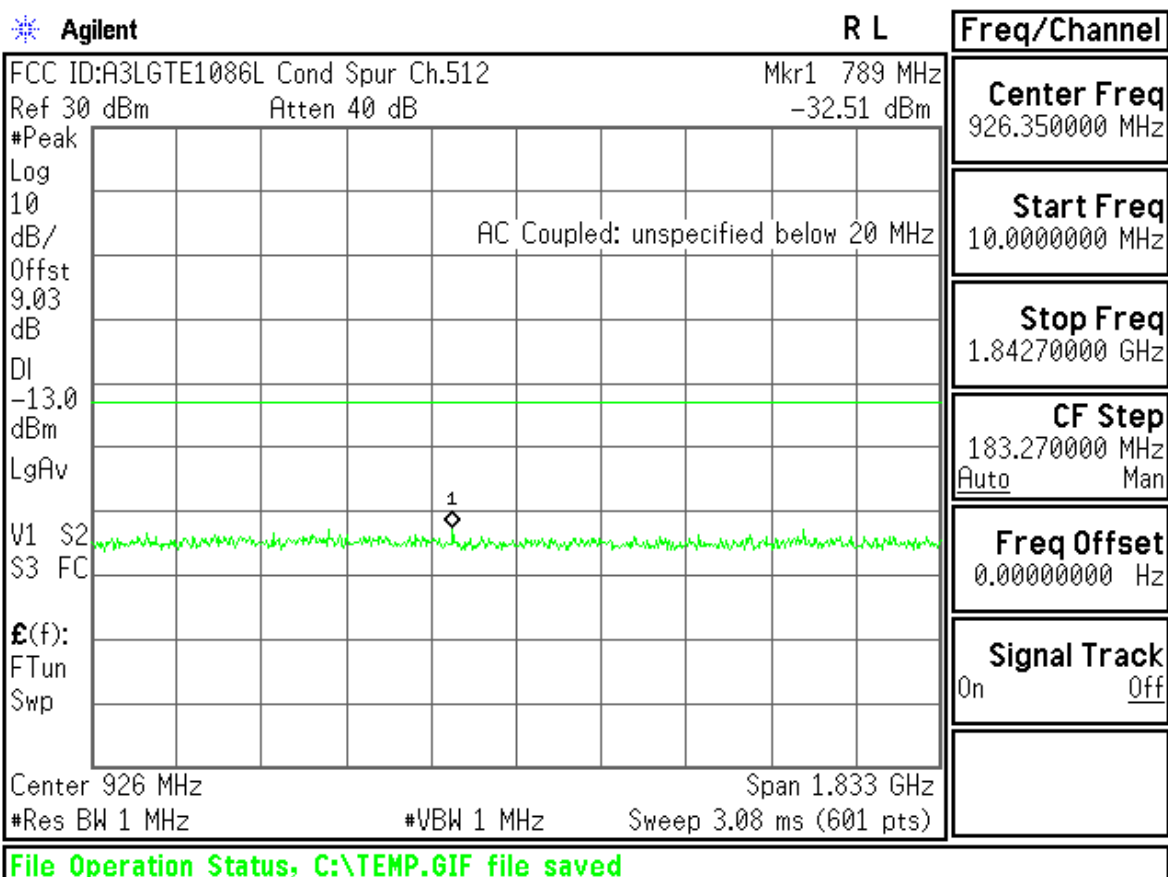
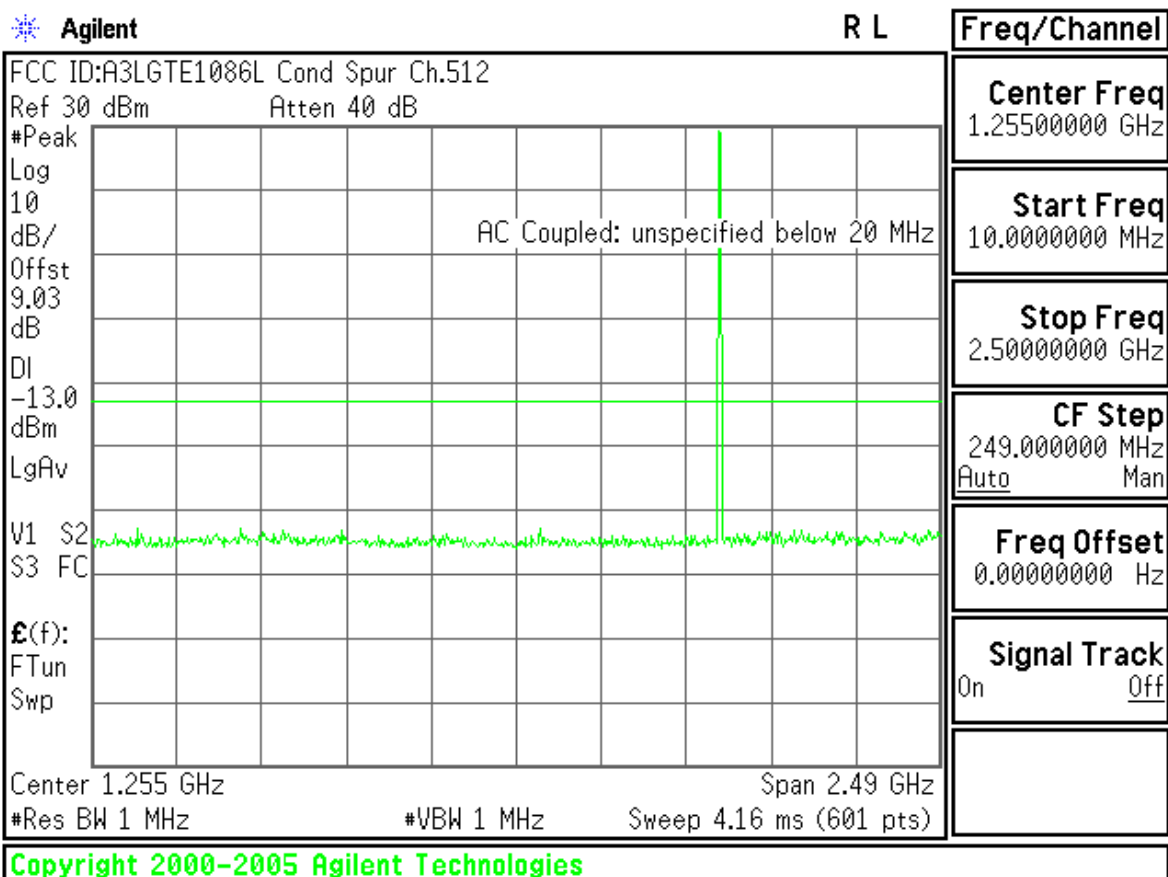


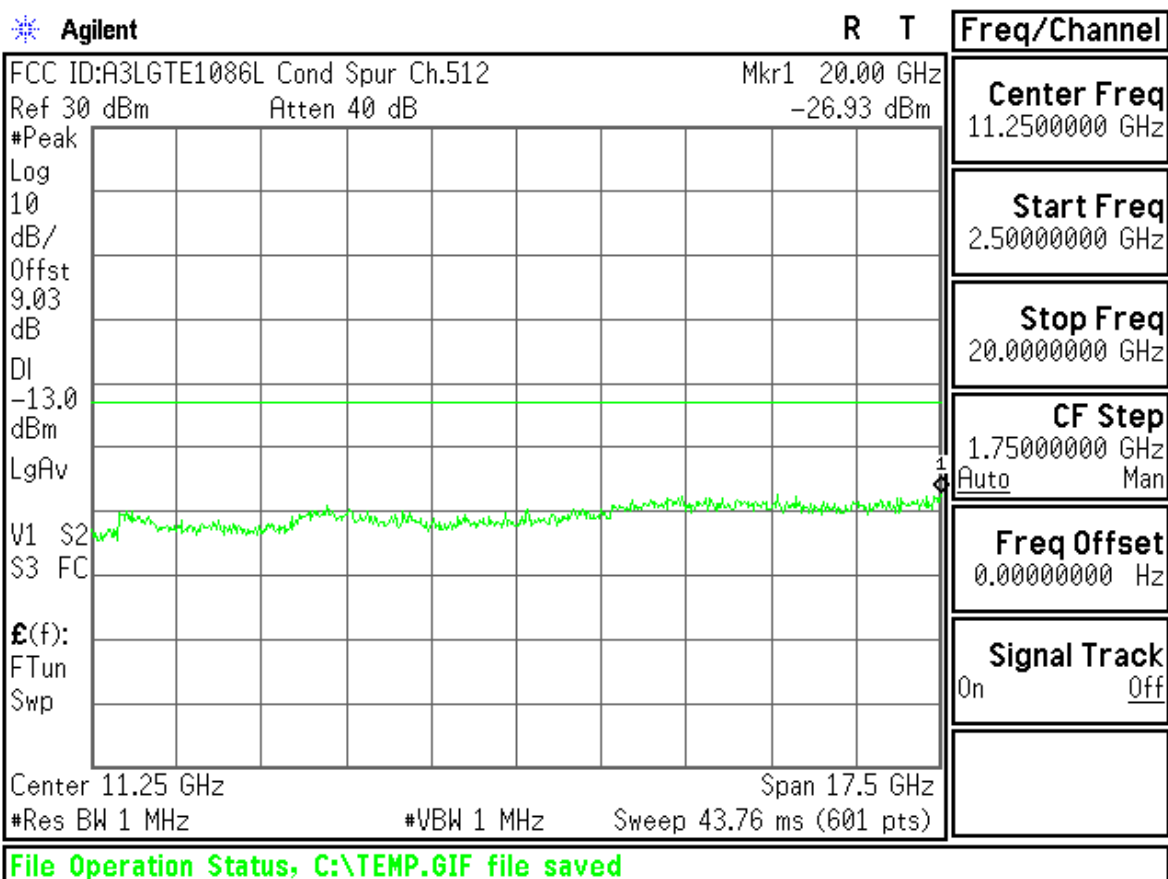
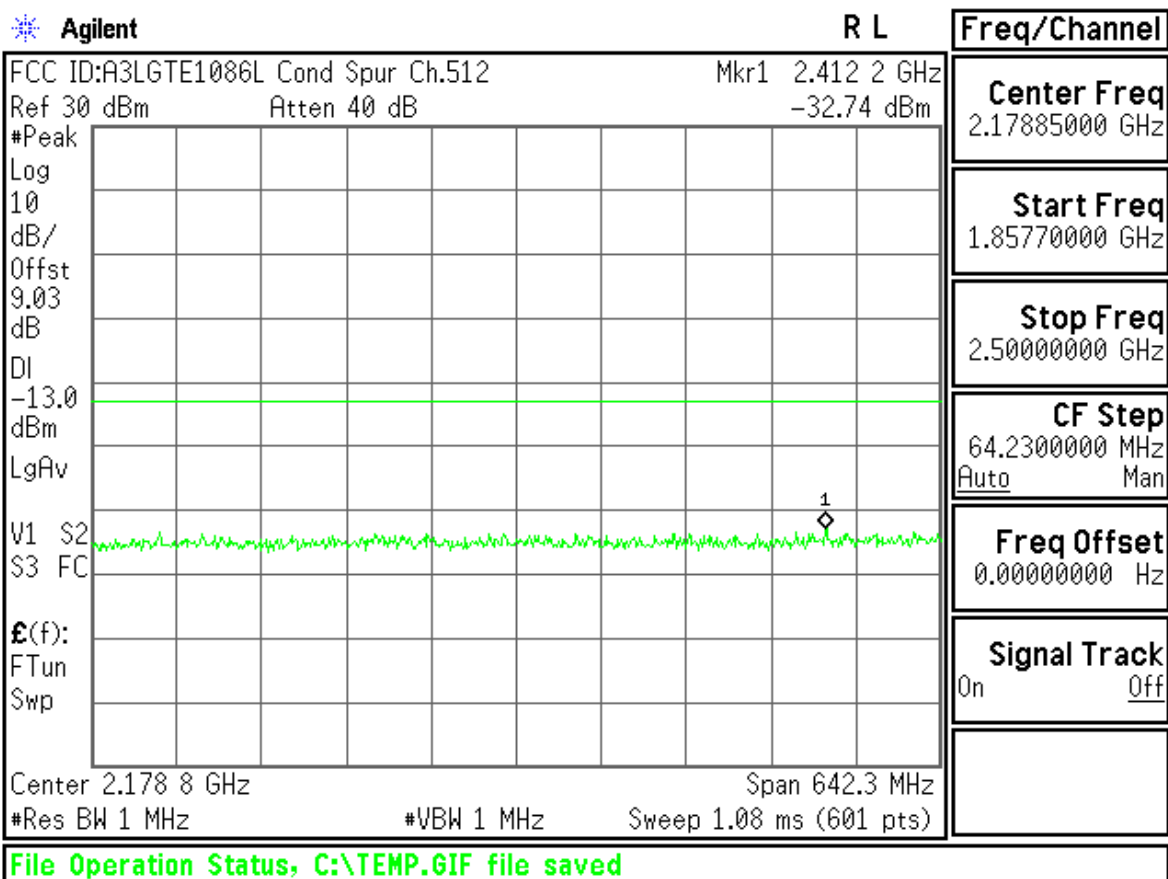


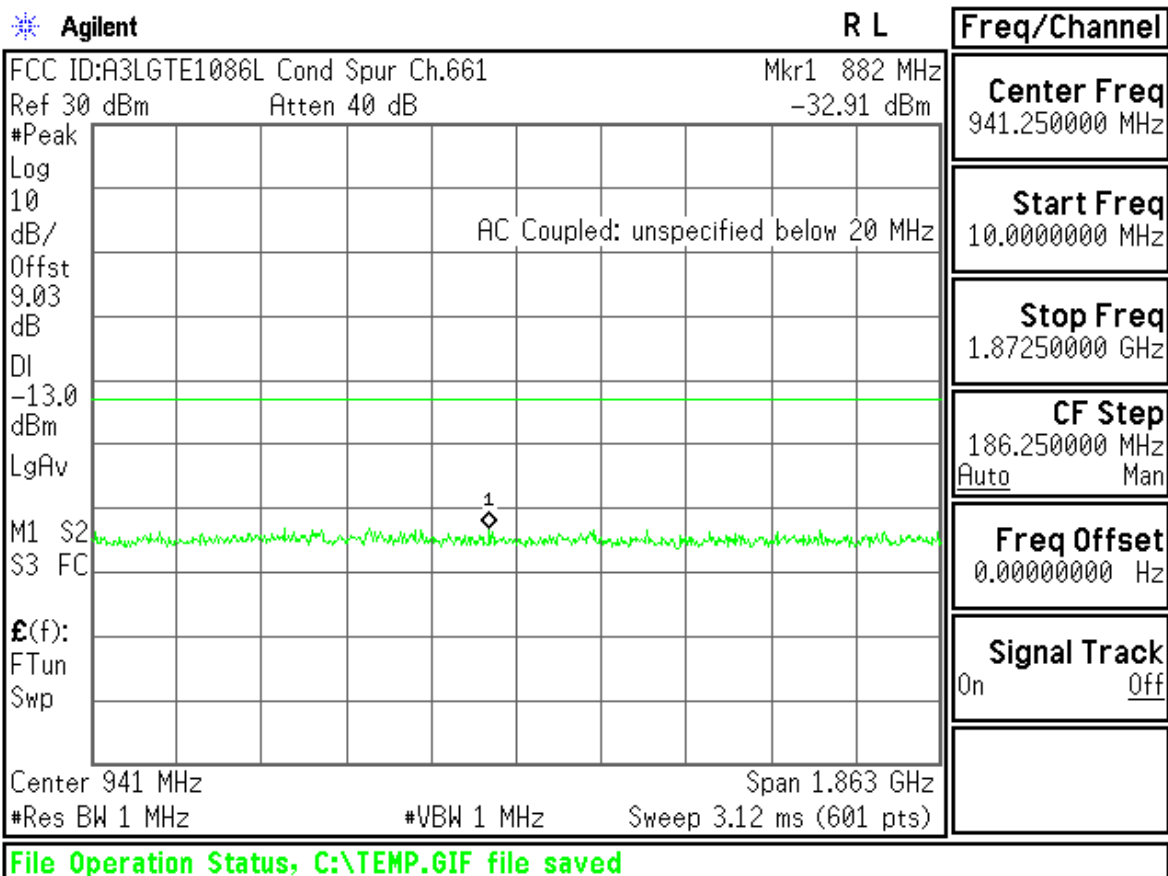
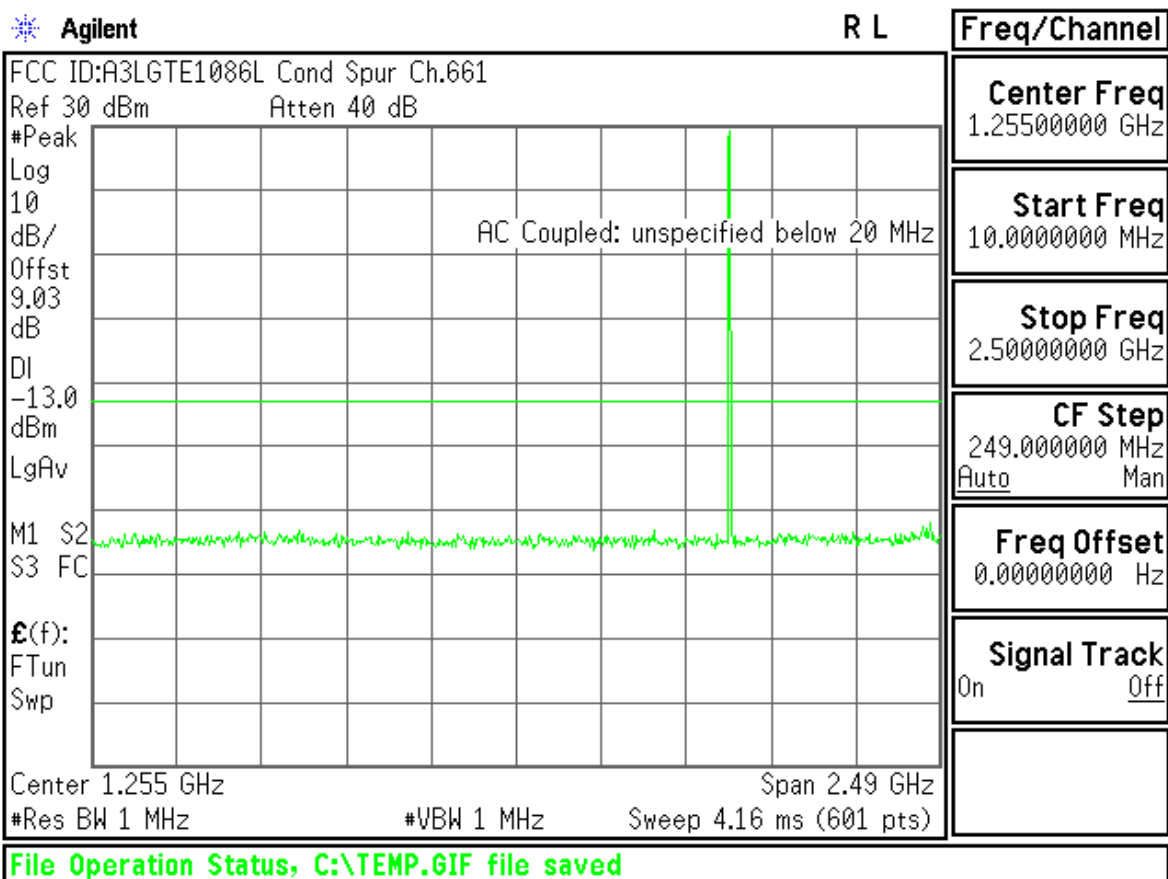


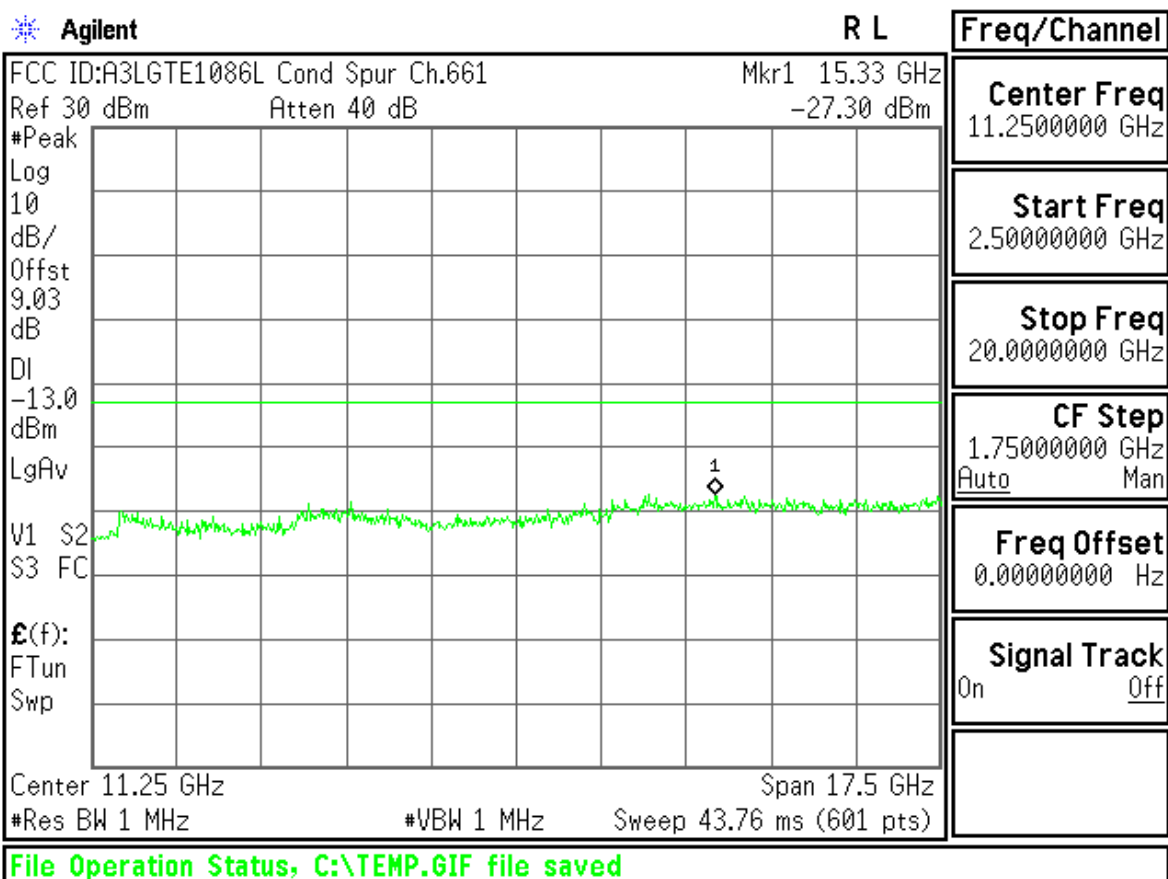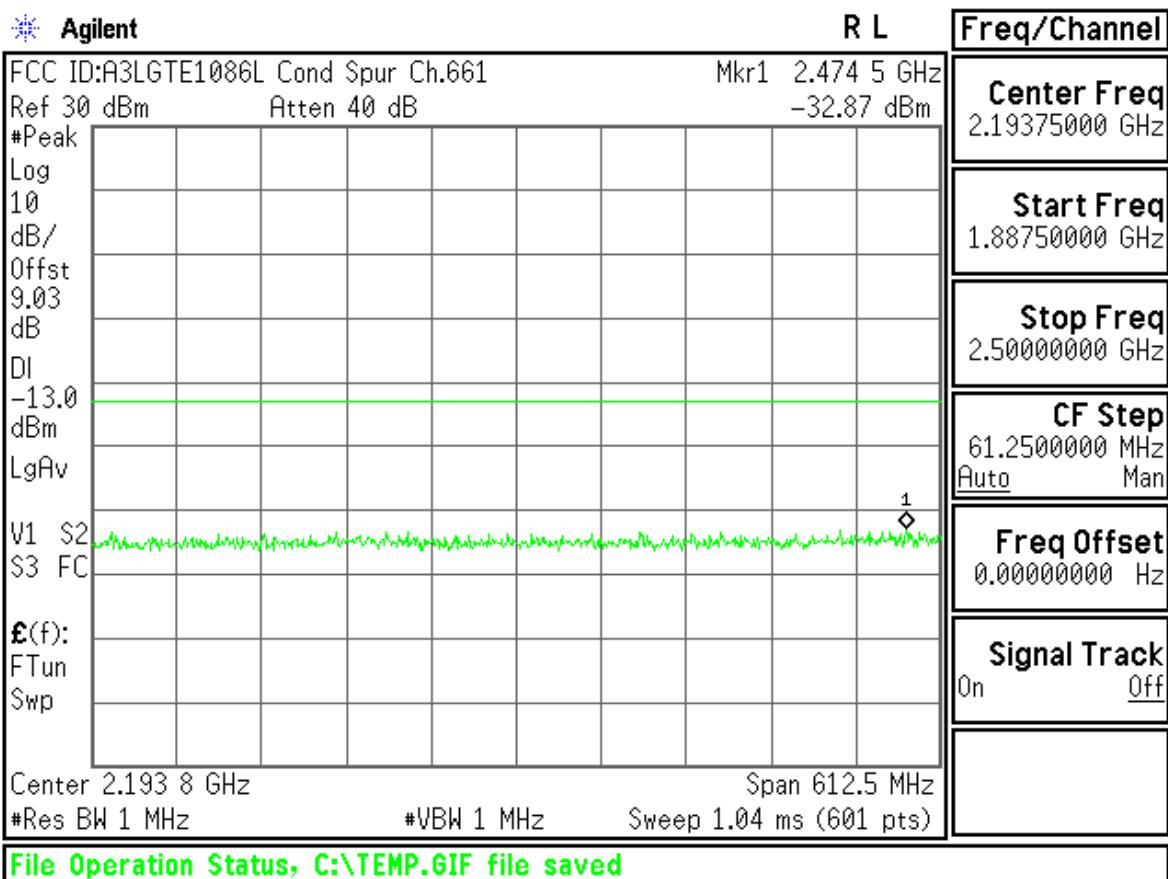


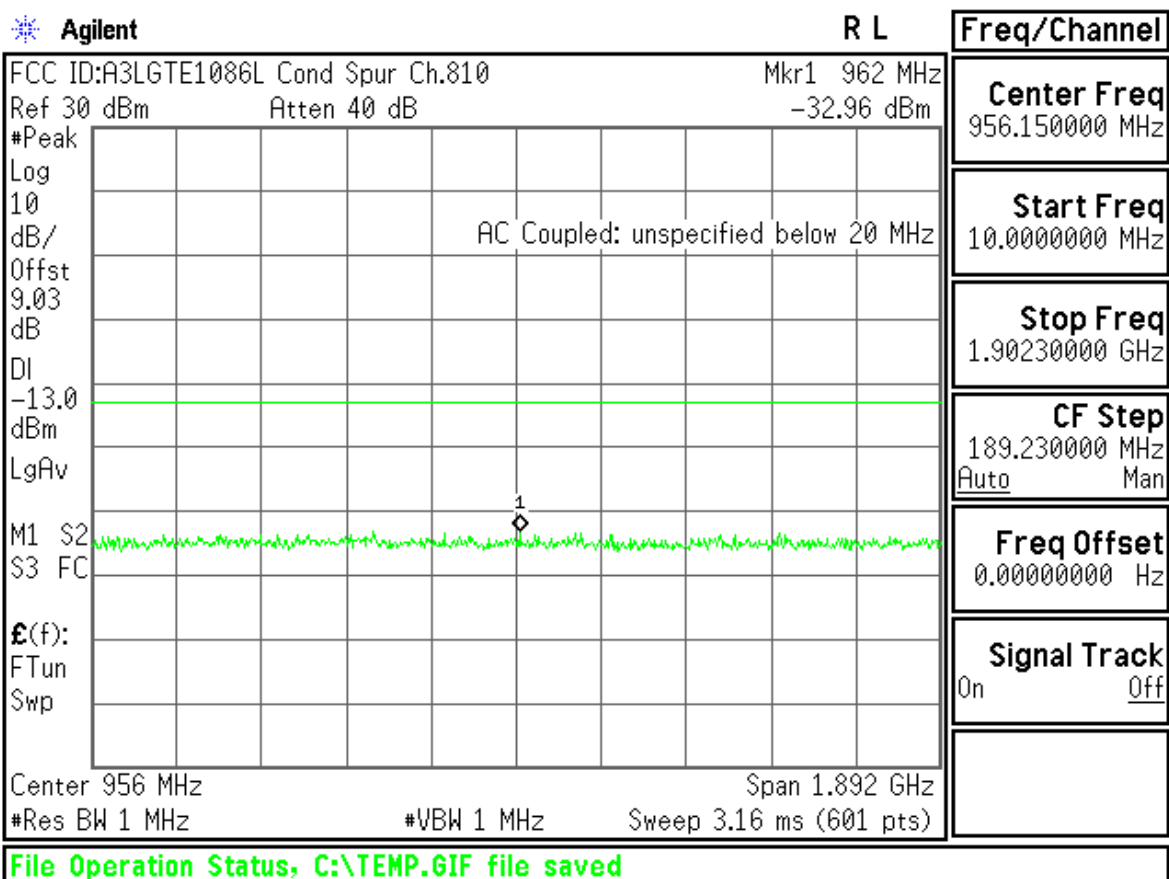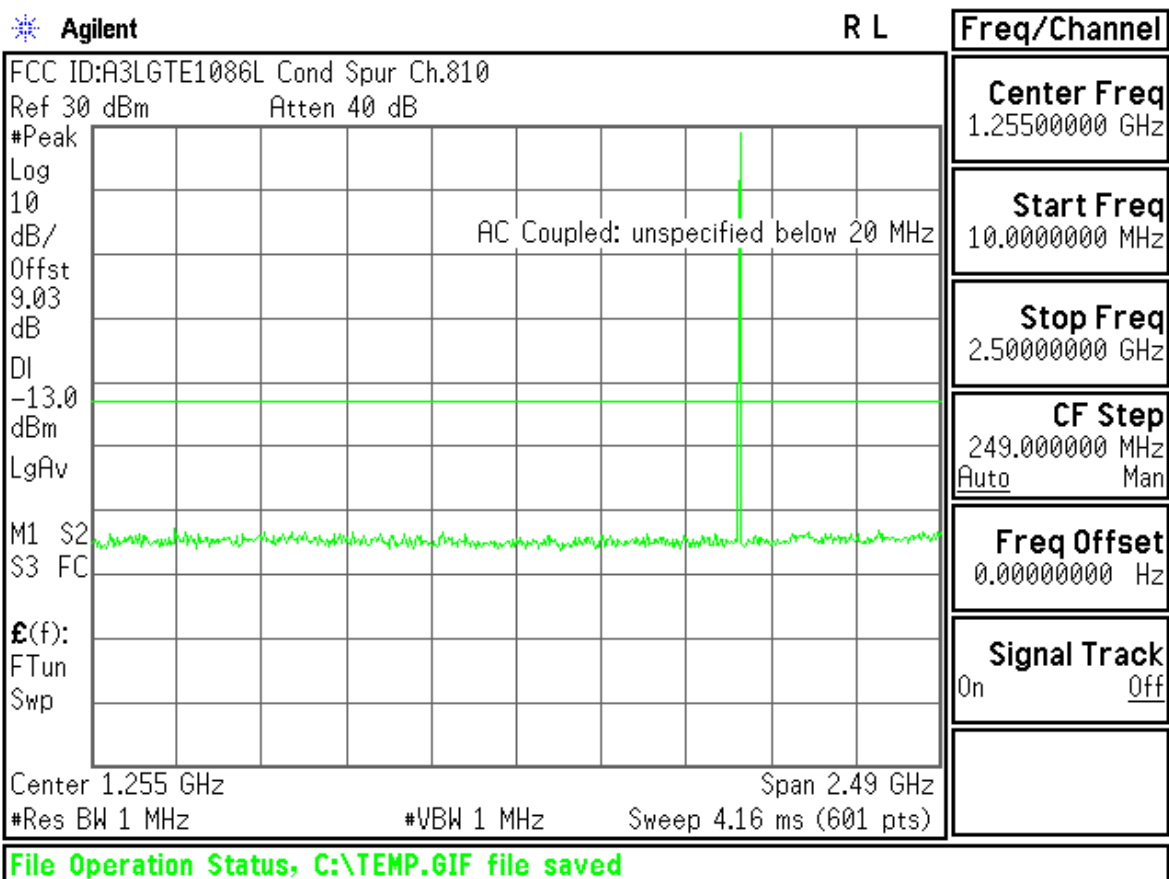

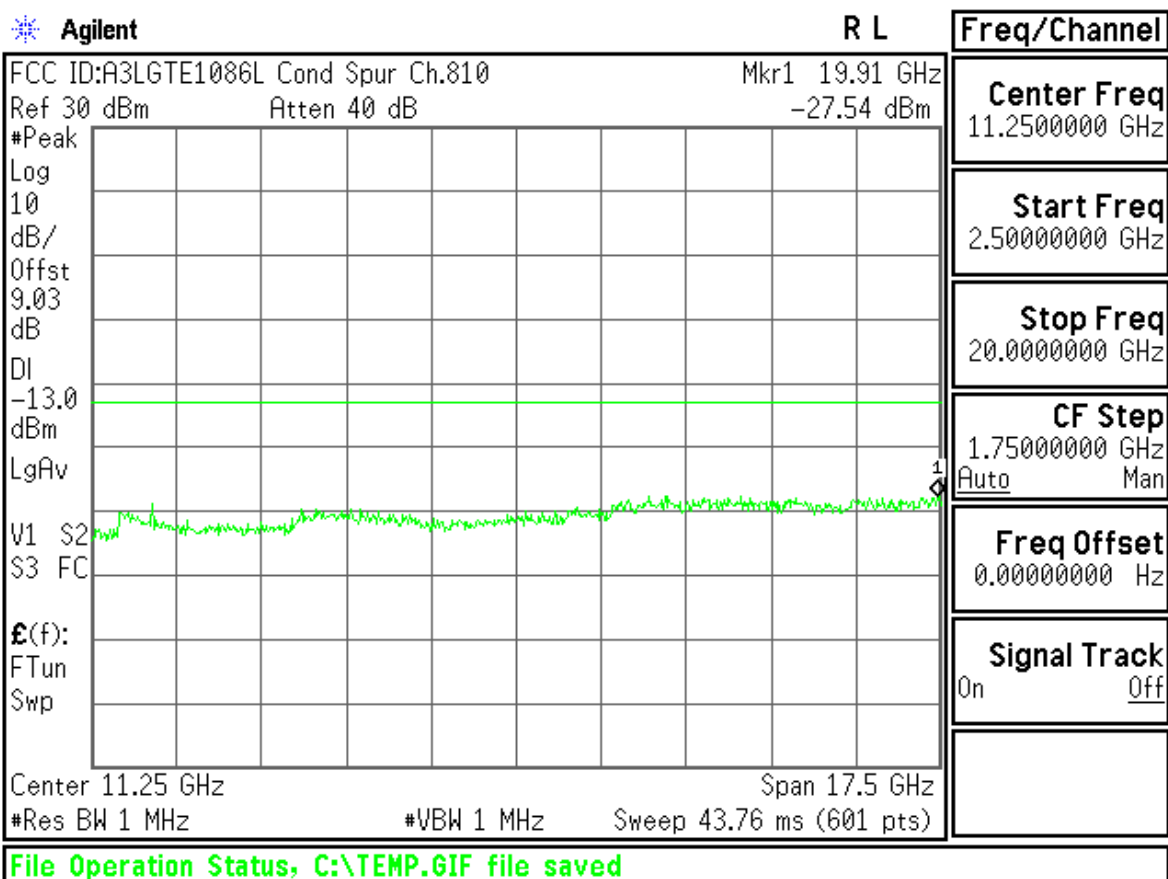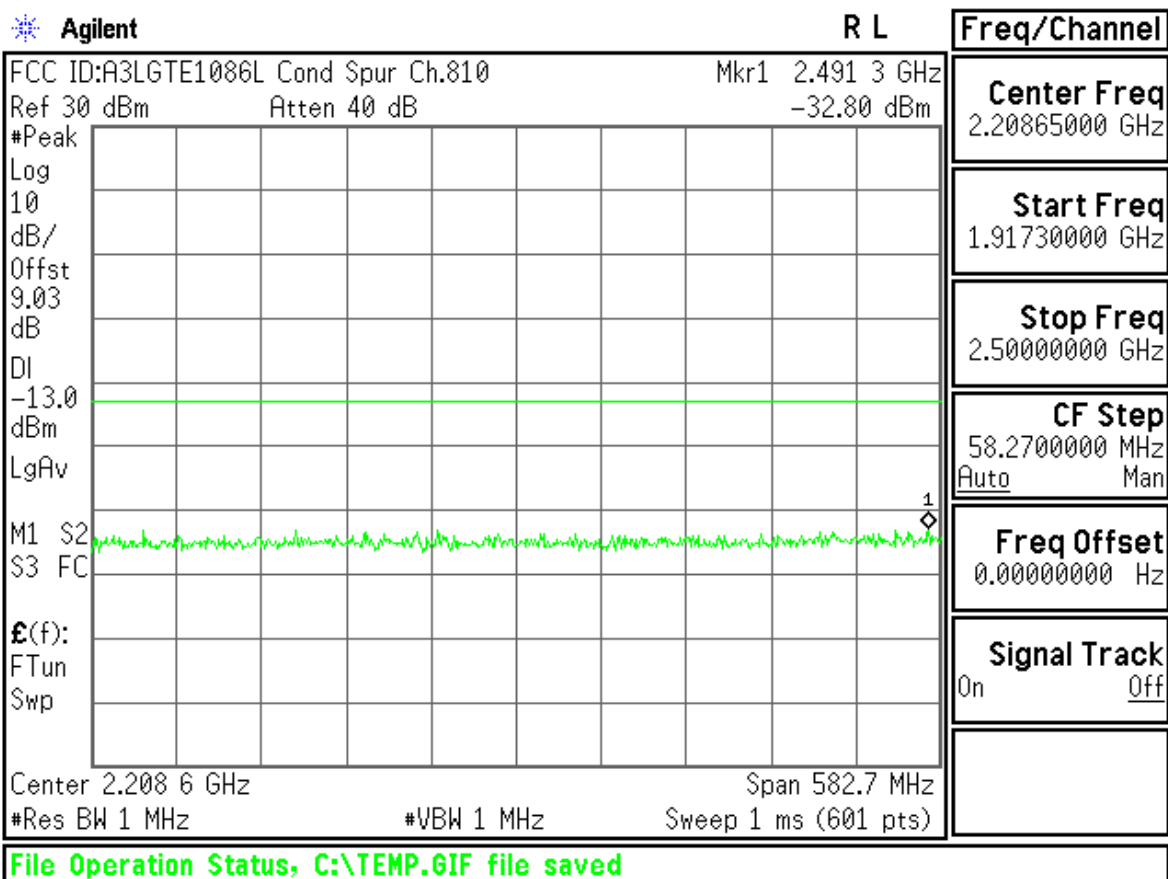

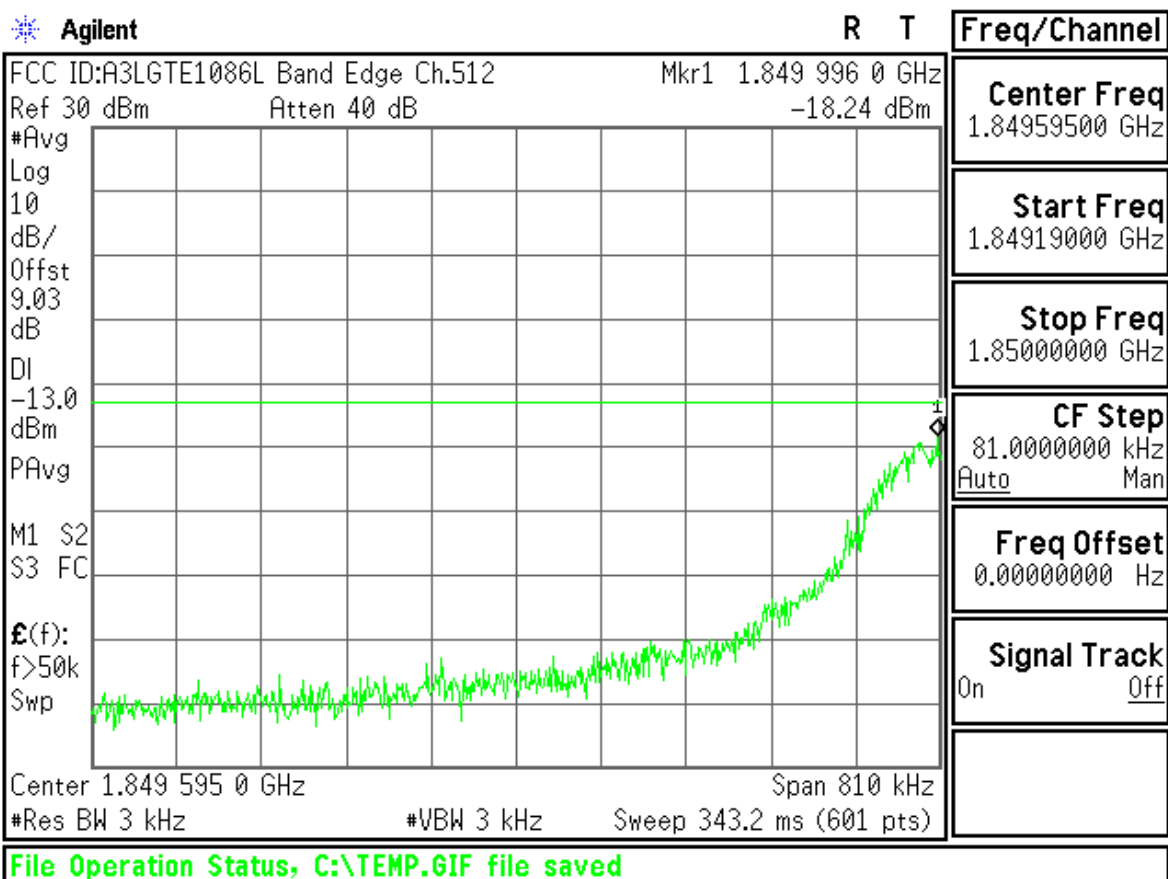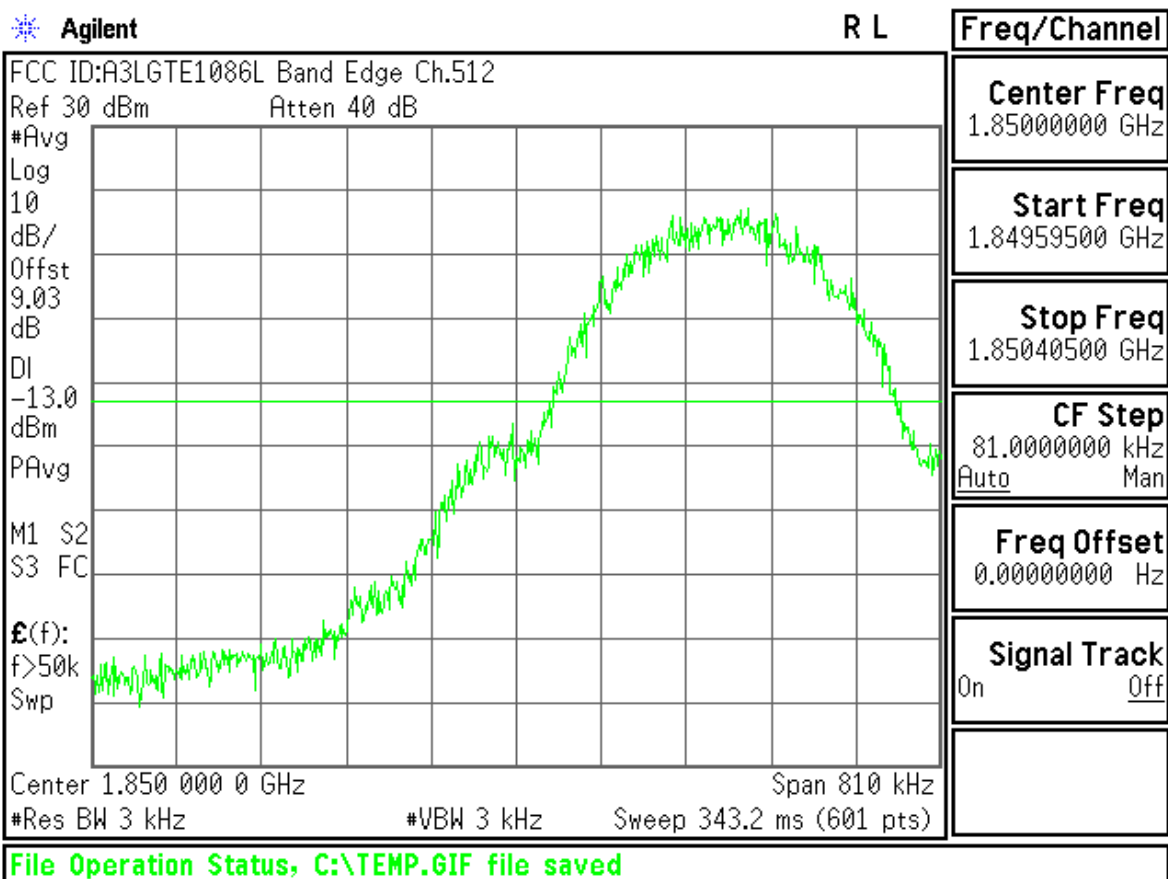

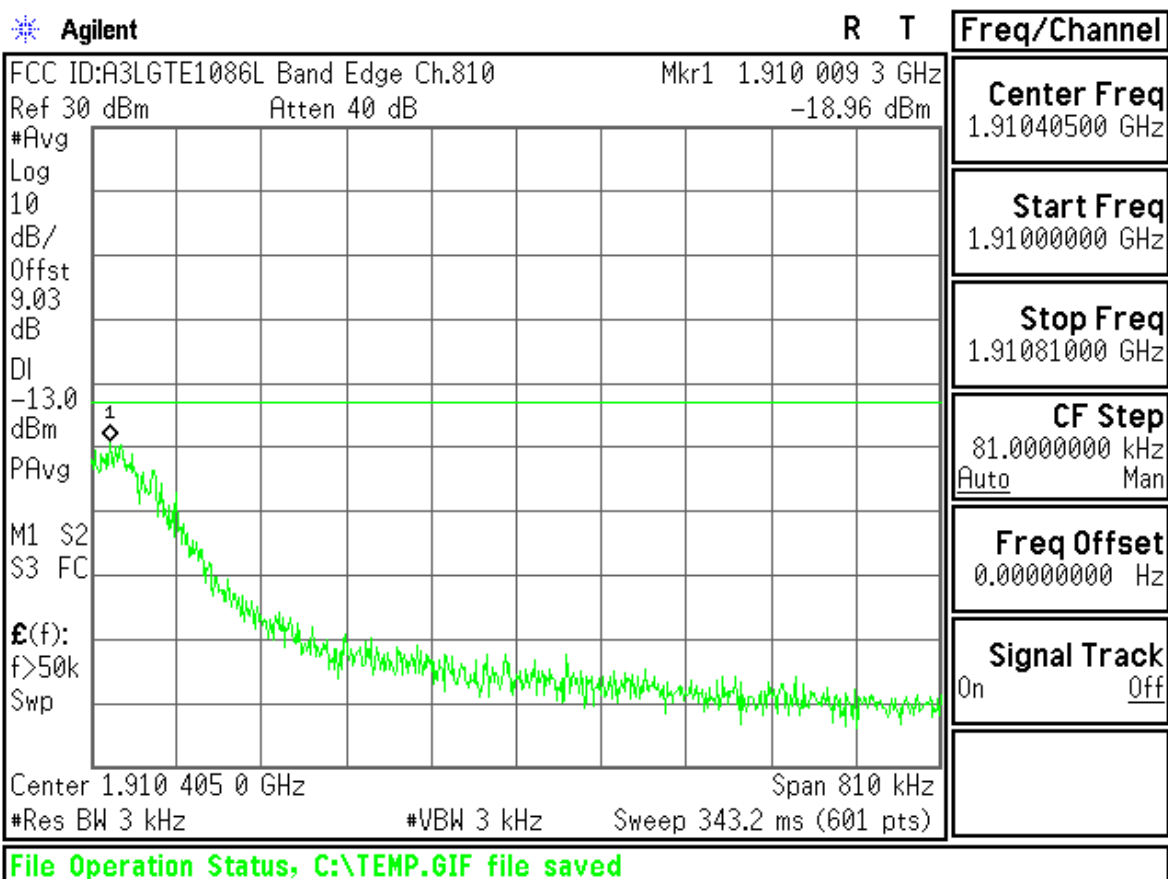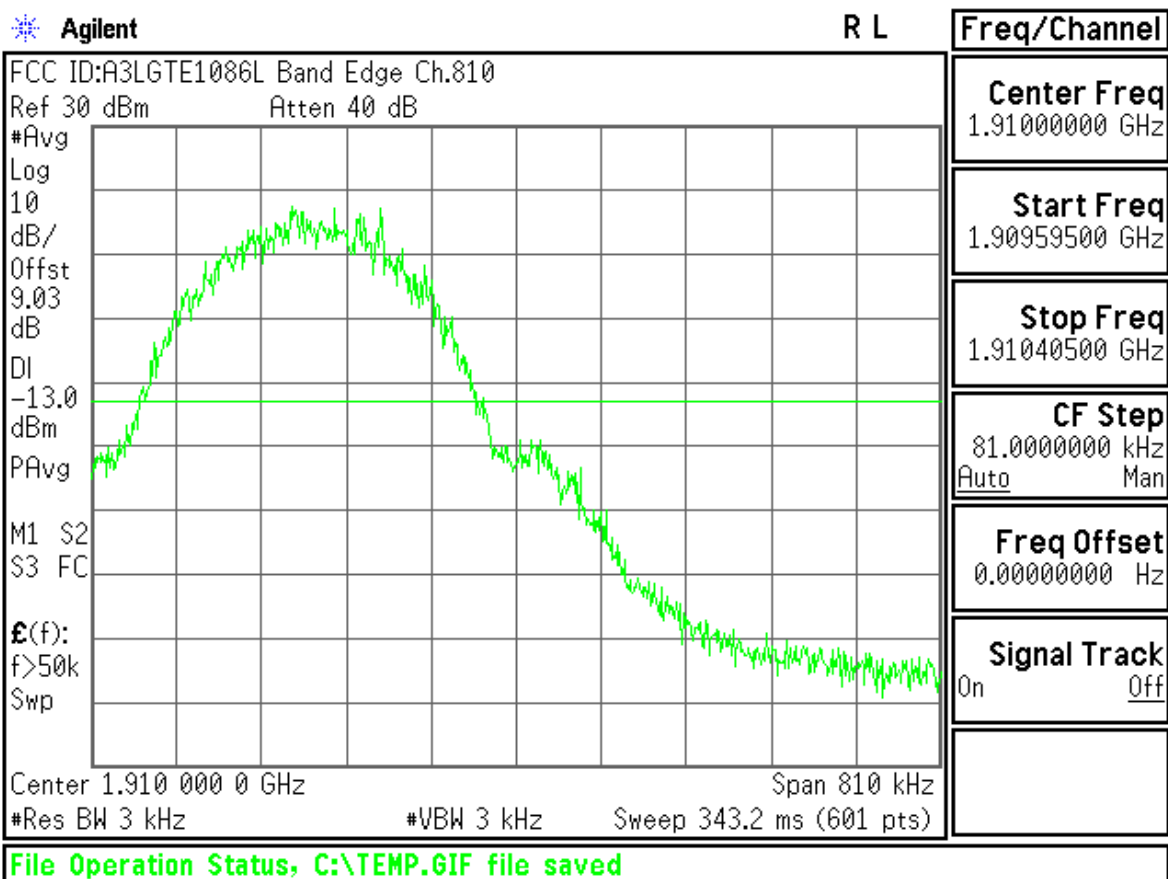

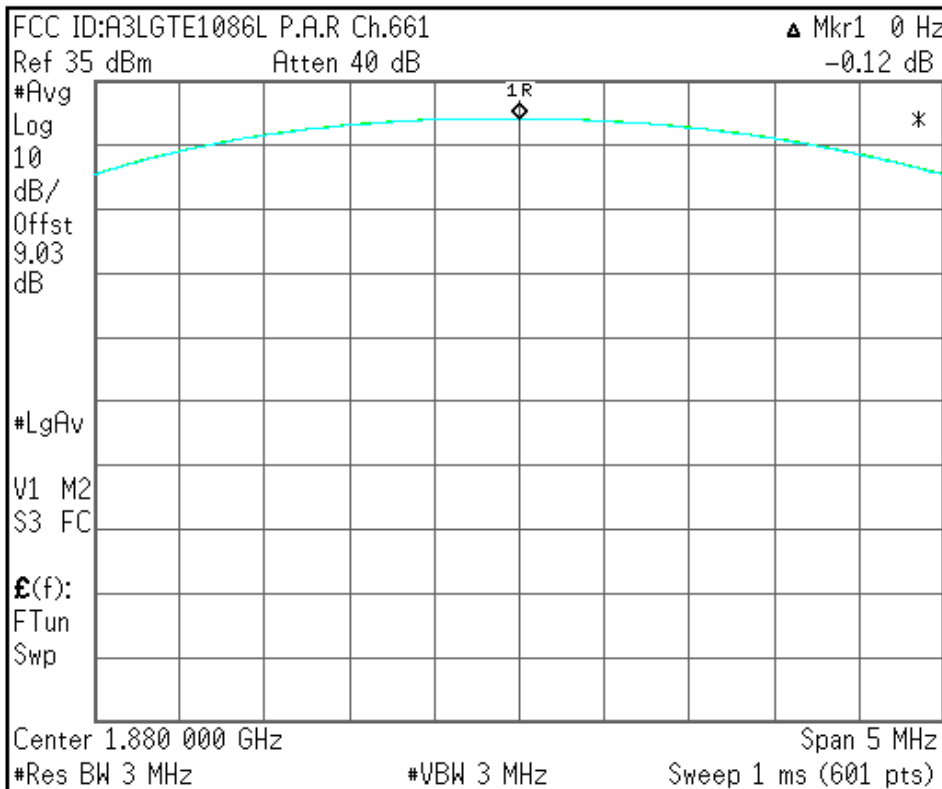

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved