



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-S5350
FCC ID(Requested) : A3LGTS5350
Report No : FG-336-R1
Job No : FG-336
Date issued : December 08, 2009

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

JH HAN – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION.....	4
2.1. General.....	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission.....	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal.....	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation.....	13
6. TEST DATA.....	14
6.1. Conducted Output Power	14
6.2. Effective Radiated Power (E.R.P.)	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.).....	16
6.4. GSM850 Radiated Spurious & Harmonic measurement.....	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement.....	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table	20
6.8. Frequency Stability	21
6.8.1. GSM850 Frequency Stability Table	21
6.8.2. GSM850 Frequency Stability Graph.....	22
6.8.3. GSM1900 Frequency Stability Table	24
6.8.4. GSM1900 Frequency Stability Graph.....	25
7. CONCLUSION.....	27
8. TEST PLOTS.....	28

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTS5350
- Model : GT-S5350
- Quantity : Quantity production is planned
- Emission Designators : 250KGXW(GSM850), 246KG7W(GSM850 EDGE)
247KGXW(GSM1900), 246KG7W(GSM1900 EDGE)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.385 W ERP GSM850 (25.85 dBm)
0.733 W EIRP GSM1900 (28.65 dBm)
0.164 W ERP GSM850 EDGE(22.16dBm)
0.474 W EIRP GSM1900 EDGE(26.76dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/EDGE/GPRS Phone with Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : November 25-26, 2009
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FG-336-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

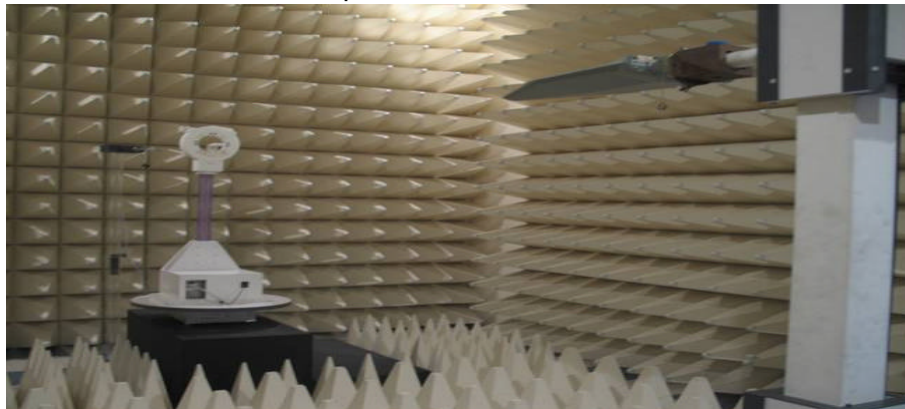


Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2010-10-20
	E4440A(3Hz~26.5GHz)	MY46187454	2010-03-06
	E4440A(3Hz~26.5GHz)	MY41000236	2010-04-14
Network Analyzer	8753E	JP38160590	2010-06-19
Pre-Amplifier	8449B	3008A00691	2009-12-15
Communication test set	8960	MY47510060	2010-03-06
	8960	GB42230535	2009-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2011-09-24
	HF906	360306/011	2010-06-13
	BBHA9120	9120D-637	2011-09-24
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	UHA 9105	9105-2413	2010-06-13
Power Supply	E3640A	MY40003594	2010-06-19
	E3640A	MY40003595	2010-06-19
	E3632A	MY40022438	2010-03-06
Divider	11636B	51946	Not Required
	11636B	56913	Not Required
	11636B	56918	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2010-11-11
	SH-241	92000548	2010-11-11
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

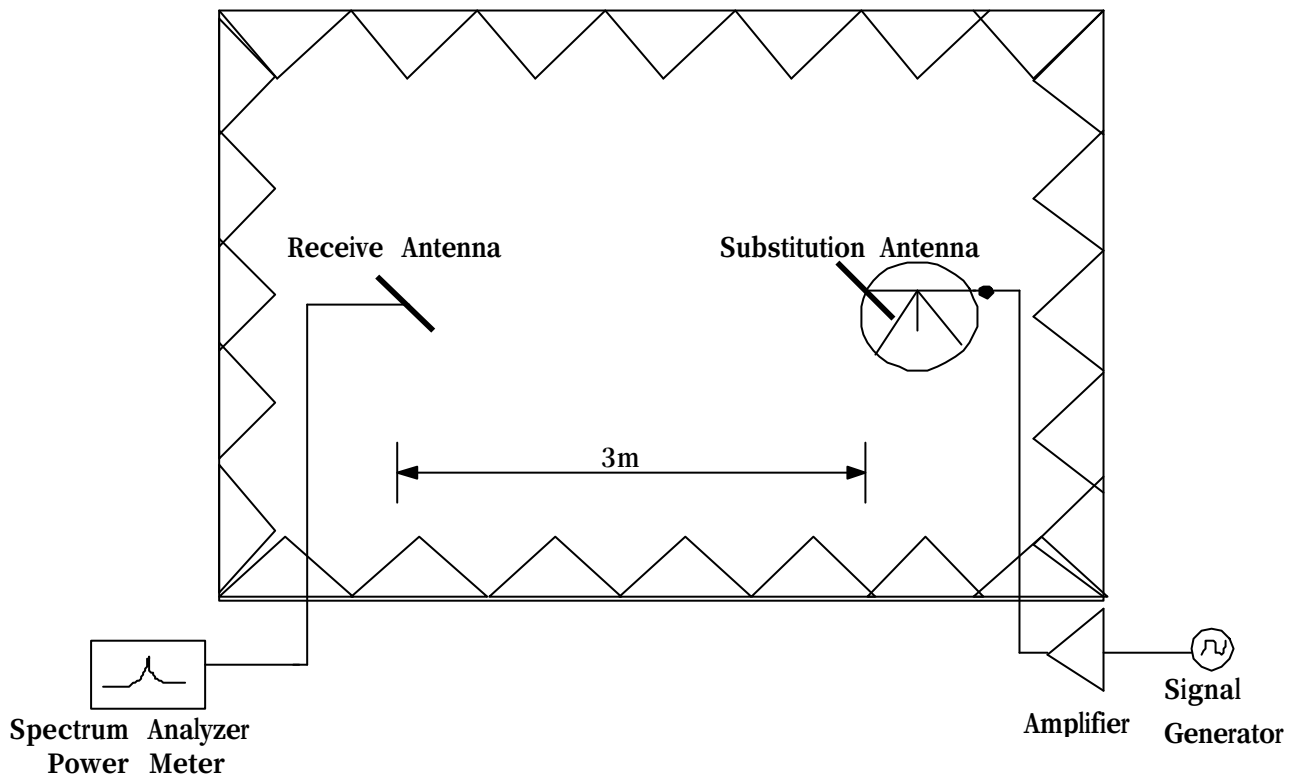


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

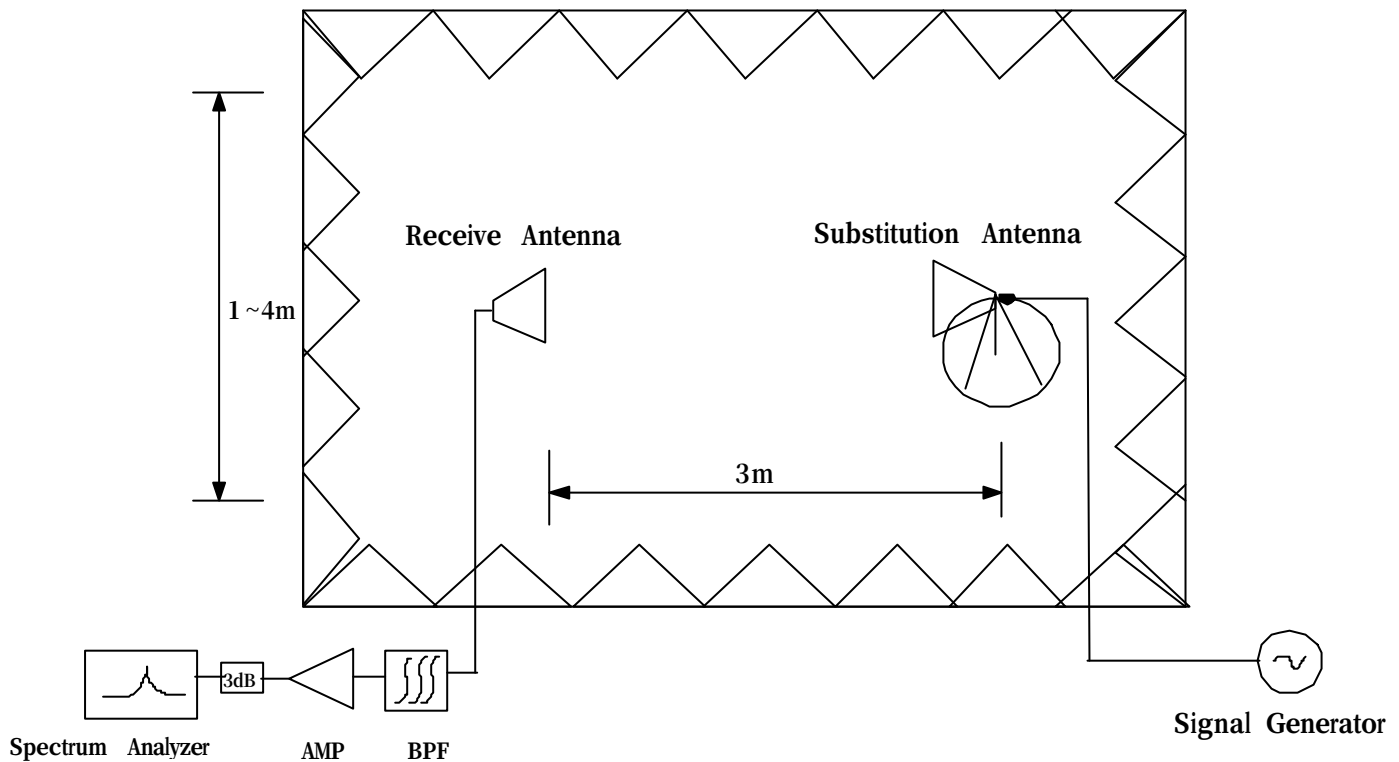


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.385 \text{ W}) = 38.85 \text{ dB}$$

$$25.85 \text{ dBm} - 38.85 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30 °C to +60 °C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25 °C to 27 °C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30 °C without any power applied.
3. After the overnight "soak" at -30 °C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30 °C up to +60 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/EDGE/GPRS Phone with Bluetooth. FCC ID: A3LGTS5350. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of “0” in the PCS BAND and “5” in the Cellular Band. The GSM conducted power is reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	29.47	29.6	29.36	25.66	24.44
	661	29.58	29.6	29.6	25.88	24.64
	810	29.58	29.78	29.49	25.78	24.54
Cellular	128	33	33	32.18	28.86	27.61
	190	33.02	32.99	32.2	28.9	27.64
	251	33.11	33	32.21	28.9	27.65

Table 6-1 GSM Conducted Output Powers

6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	23.00	H	-13.43	-0.67	-12.76
		V	-13.70	-0.67	-13.03
836.60	24.00	H	-13.94	-0.73	-13.21
		V	-13.44	-0.73	-12.71
848.80	26.00	H	-14.67	-0.79	-13.88
		V	-13.35	-0.79	-12.56

■Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-13.13	H	284/90	22.63	0.183	Standard
836.60	-13.43	H	287/90	23.78	0.239	Standard
848.80	-14.03	H	289/90	25.85	0.385	Standard

■EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
848.80	-17.73	H	289/90	22.16	0.164	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-9.75	9.70	-19.45
		V	-9.38	9.70	-19.08
1880.00	28.00	H	-11.11	9.70	-20.81
		V	-11.11	9.70	-20.81
1909.80	27.00	H	-12.11	9.70	-21.81
		V	-11.80	9.70	-21.50

■Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.80	H	114/180	28.65	0.733	Standard
1880.00	-20.38	V	318/100	28.43	0.697	Standard
1909.80	-21.76	H	272/180	27.05	0.507	Standard

■EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-21.68	H	114/180	26.76	0.474	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 25.85 dBm = 0.385 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 38.85 \text{ dBc}$

■Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-57.57	V	71.46
	3	2472.60	-55.33	V	64.87
	4	3296.80	-66.51	H	72.25
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-61.28	H	73.68
	3	2509.80	-51.63	V	60.98
	4	3346.40	-66.75	H	72.28
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-62.63	V	75.87
	3	2546.40	-49.58	V	57.63
	4	3395.20	-66.73	H	72.55
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 28.65 dBm = 0.733 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 41.65 \text{ dBc}$

■Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-60.62	H	65.33
	3	5550.60	-62.99	H	61.96
	4	7400.80	-66.34	H	60.66
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-61.78	H	66.35
	3	5640.00	-66.54	V	65.11
	4	7520.00	-67.82	H	62.35
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-61.84	H	65.47
	3	5729.40	-67.65	V	65.81
	4	7639.20	-67.49	V	61.70
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 11. 26

Test Engineer : JH HAN

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with -13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+2.15 - (-13 +⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
128	2	1648.40	-9.02	9.50	-13.50	-27.24	-27.10	-58.36	-57.57	72.11	71.46
	3	2472.60	-11.41	10.70	-12.30	-31.70	-31.45	-57.23	-55.33	66.52	64.87
	4	3296.80	-13.59	12.30	-11.70	-34.96	-35.43	-66.51	-66.69	72.54	72.25
	5	4121.00	-15.15	12.50	-10.30	-38.60	-38.90	-	-	-	-
	6	4945.20	-16.71	12.70	-9.00	-40.65	-40.69	-	-	-	-
	7	5769.40	-18.17	12.90	-7.70	-43.29	-43.30	-	-	-	-
190	2	1673.20	-9.07	9.50	-13.40	-27.74	-28.63	-61.28	-61.32	74.53	73.68
	3	2509.80	-11.43	10.70	-12.30	-31.69	-31.64	-52.68	-51.63	61.98	60.98
	4	3346.40	-13.78	12.30	-11.50	-35.46	-35.60	-66.75	-66.92	72.28	72.31
	5	4183.00	-15.26	12.50	-10.20	-38.67	-39.11	-	-	-	-
	6	5019.60	-16.94	12.70	-8.80	-41.28	-41.32	-	-	-	-
	7	5856.20	-18.23	12.90	-7.70	-43.94	-43.84	-	-	-	-
251	2	1697.60	-9.08	9.50	-13.40	-27.95	-27.75	-63.49	-62.63	76.53	75.87
	3	2546.40	-11.41	10.70	-12.30	-31.58	-32.94	-50.50	-49.58	59.91	57.63
	4	3395.20	-13.82	12.30	-11.50	-35.17	-35.46	-66.73	-67.68	72.55	73.21
	5	4244.00	-15.38	12.50	-10.10	-38.81	-39.07	-	-	-	-
	6	5092.80	-17.06	12.70	-8.60	-41.51	-41.42	-	-	-	-
	7	5941.60	-18.41	12.90	-7.50	-43.83	-43.32	-	-	-	-

6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2009. 11. 26

Test Engineer : JH HAN

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with -13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : H dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
512	2	3700.40	-14.91	12.40	-10.50	-36.94	-36.57	-60.62	-64.94	65.33	70.02
	3	5550.60	-17.69	12.90	-8.20	-42.68	-42.80	-62.99	-66.60	61.96	65.45
	4	7400.80	-20.43	10.50	-3.10	-47.33	-46.96	-66.34	-67.69	60.66	62.38
	5	9251.00	-23.63	11.20	-0.60	-51.79	-50.45	-	-	-	-
	6	11101.20	-26.86	11.60	2.30	-54.95	-55.26	-	-	-	-
	7	12951.40	-28.80	12.90	2.90	-58.88	-58.56	-	-	-	-
661	2	3760.00	-15.19	12.40	-10.20	-37.08	-37.05	-61.78	-65.11	66.35	69.71
	3	5640.00	-17.78	12.90	-8.10	-42.73	-43.08	-67.39	-66.54	66.31	65.11
	4	7520.00	-20.67	10.60	-2.90	-47.12	-46.95	-67.82	-68.19	62.35	62.89
	5	9400.00	-23.23	11.60	-1.40	-51.75	-52.22	-	-	-	-
	6	11280.00	-26.34	12.10	1.20	-55.98	-56.30	-	-	-	-
	7	13160.00	-28.12	12.80	2.30	-59.32	-58.91	-	-	-	-
810	2	3819.60	-14.23	12.40	-11.20	-38.02	-38.68	-61.84	-62.59	65.47	65.56
	3	5729.40	-18.11	13.00	-7.90	-43.48	-43.49	-67.75	-67.65	65.92	65.81
	4	7639.20	-21.16	11.20	-3.00	-47.29	-47.44	-67.80	-67.49	62.16	61.70
	5	9549.00	-23.54	11.70	-1.20	-52.60	-52.08	-	-	-	-
	6	11458.80	-26.84	11.70	2.10	-56.26	-56.23	-	-	-	-
	7	13368.60	-28.23	12.30	2.90	-60.44	-59.84	-	-	-	-

6.8. Frequency Stability

6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-0.80	836,599,999	0.000000	-0.001
100%		-30	32.60	836,600,033	0.000004	0.039
100%		-20	-14.00	836,599,986	-0.000002	-0.017
100%		-10	-21.90	836,599,978	-0.000003	-0.026
100%		0	-6.40	836,599,994	-0.000001	-0.008
100%		+10	-4.10	836,599,996	0.000000	-0.005
100%		+20	-0.80	836,599,999	0.000000	-0.001
100%		+30	29.00	836,600,029	0.000003	0.035
100%		+40	20.60	836,600,021	0.000002	0.025
100%		+50	27.20	836,600,027	0.000003	0.033
100%		+60	24.30	836,600,024	0.000003	0.029
85%	3.35	+20	-14.30	836,599,986	-0.000002	-0.017
115%	4.26	+20	-22.90	836,599,977	-0.000003	-0.027
Batt.Endpoint	3.35	+20	-14.30	836,599,986	-0.000002	-0.017


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.2. GSM850 Frequency Stability Graph

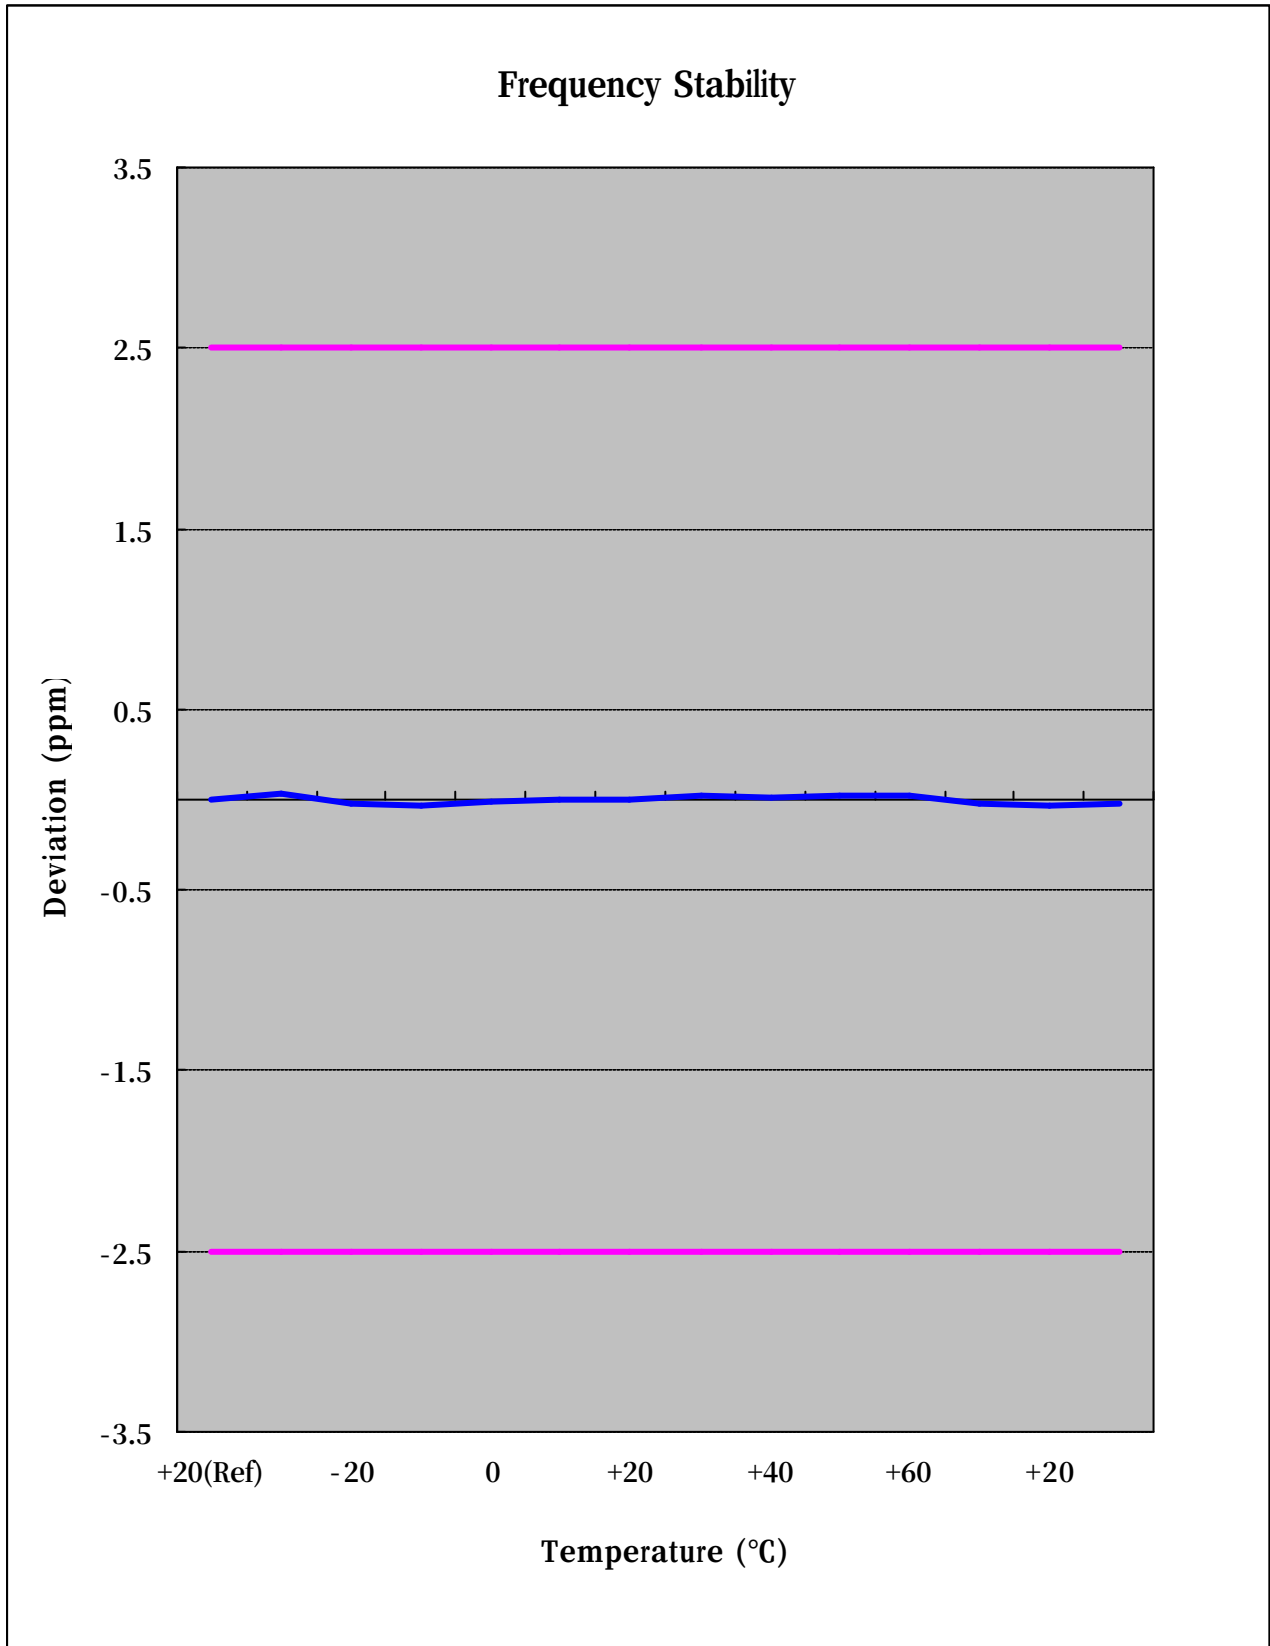

Zoom IN

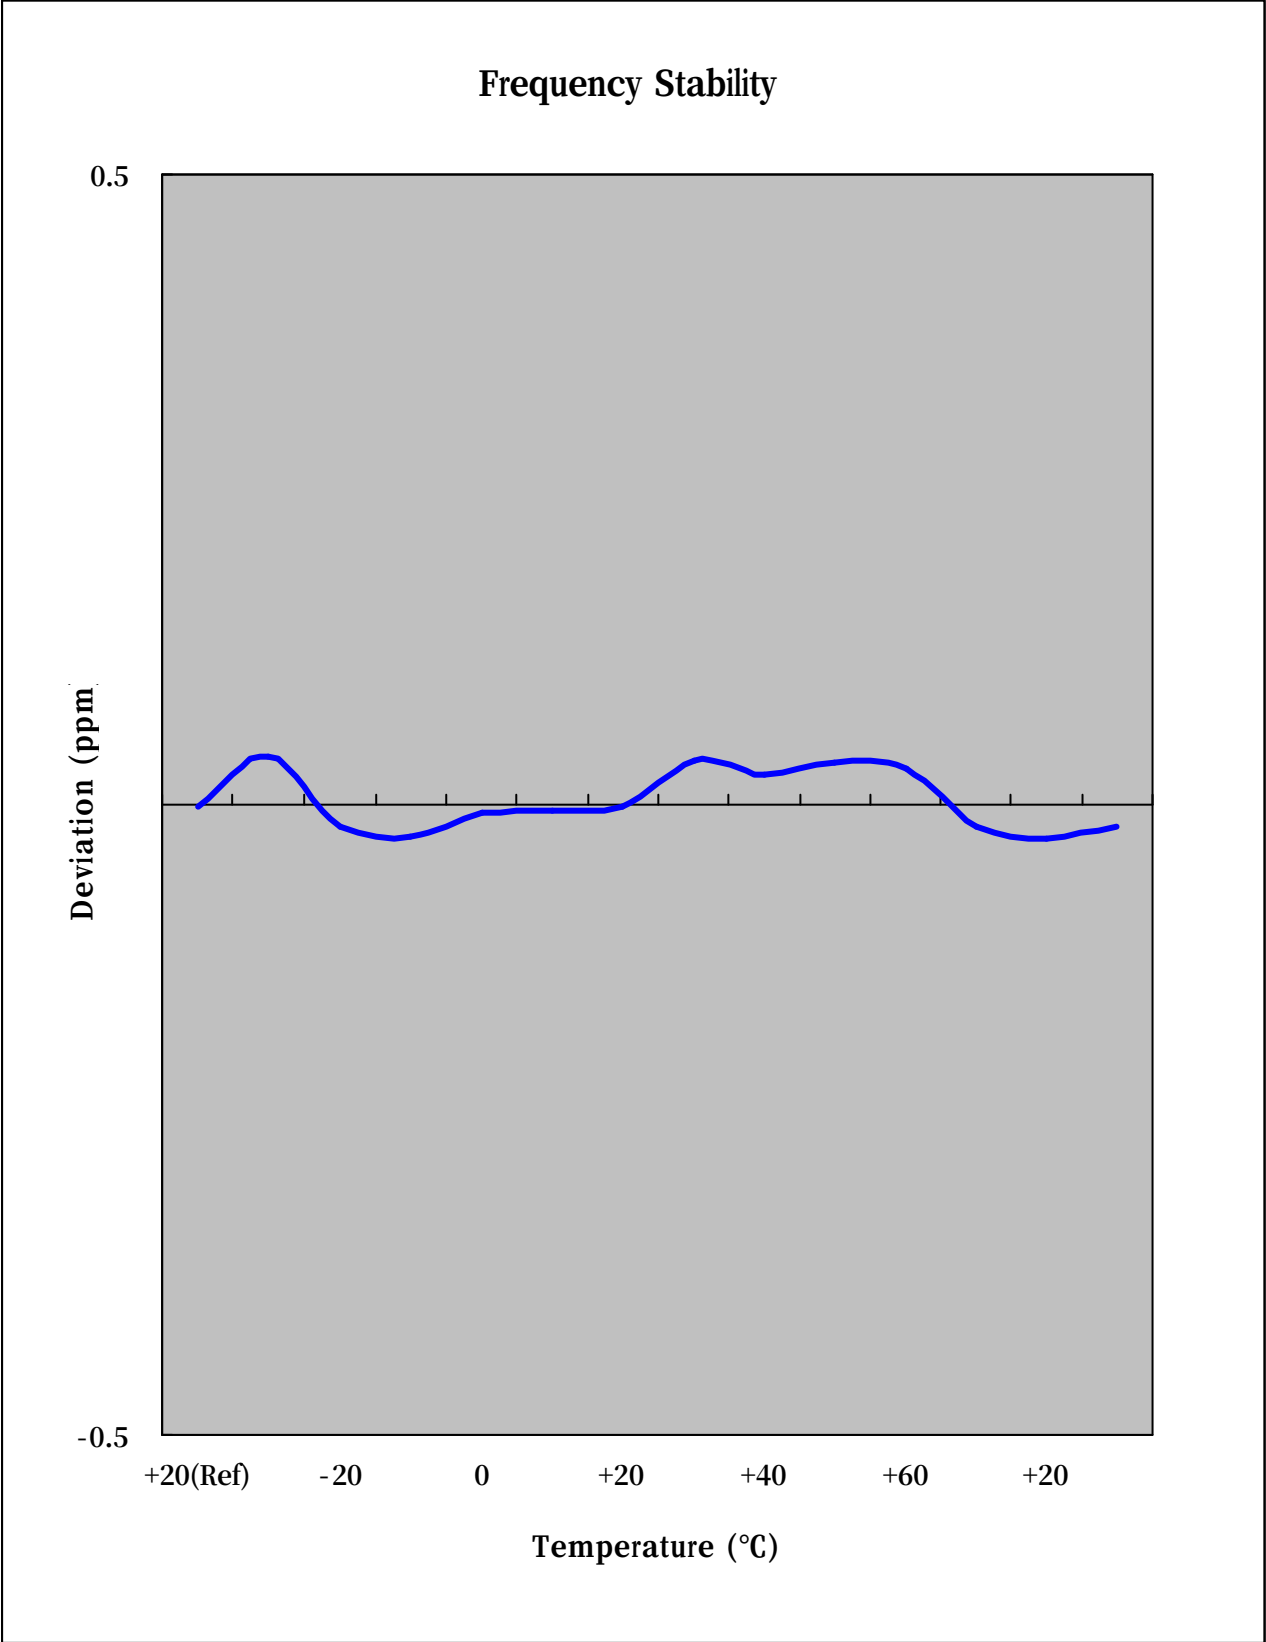

GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-22.60	1,879,999,977	-0.000001	-0.012
100%		-30	15.60	1,880,000,016	0.000001	0.008
100%		-20	8.50	1,880,000,009	0.000000	0.005
100%		-10	5.80	1,880,000,006	0.000000	0.003
100%		0	21.80	1,880,000,022	0.000001	0.012
100%		+10	-14.70	1,879,999,985	-0.000001	-0.008
100%		+20	-22.60	1,879,999,977	-0.000001	-0.012
100%		+30	38.60	1,880,000,039	0.000002	0.021
100%		+40	-33.50	1,879,999,967	-0.000002	-0.018
100%		+50	-21.90	1,879,999,978	-0.000001	-0.012
100%		+60	31.60	1,880,000,032	0.000002	0.017
85%	3.35	+20	-0.10	1,880,000,000	0.000000	0.000
115%	4.26	+20	23.20	1,880,000,023	0.000001	0.012
Batt.Endpoint	3.35	+20	-0.10	1,880,000,000	0.000000	0.000


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.3. GSM1900 Frequency Stability Graph

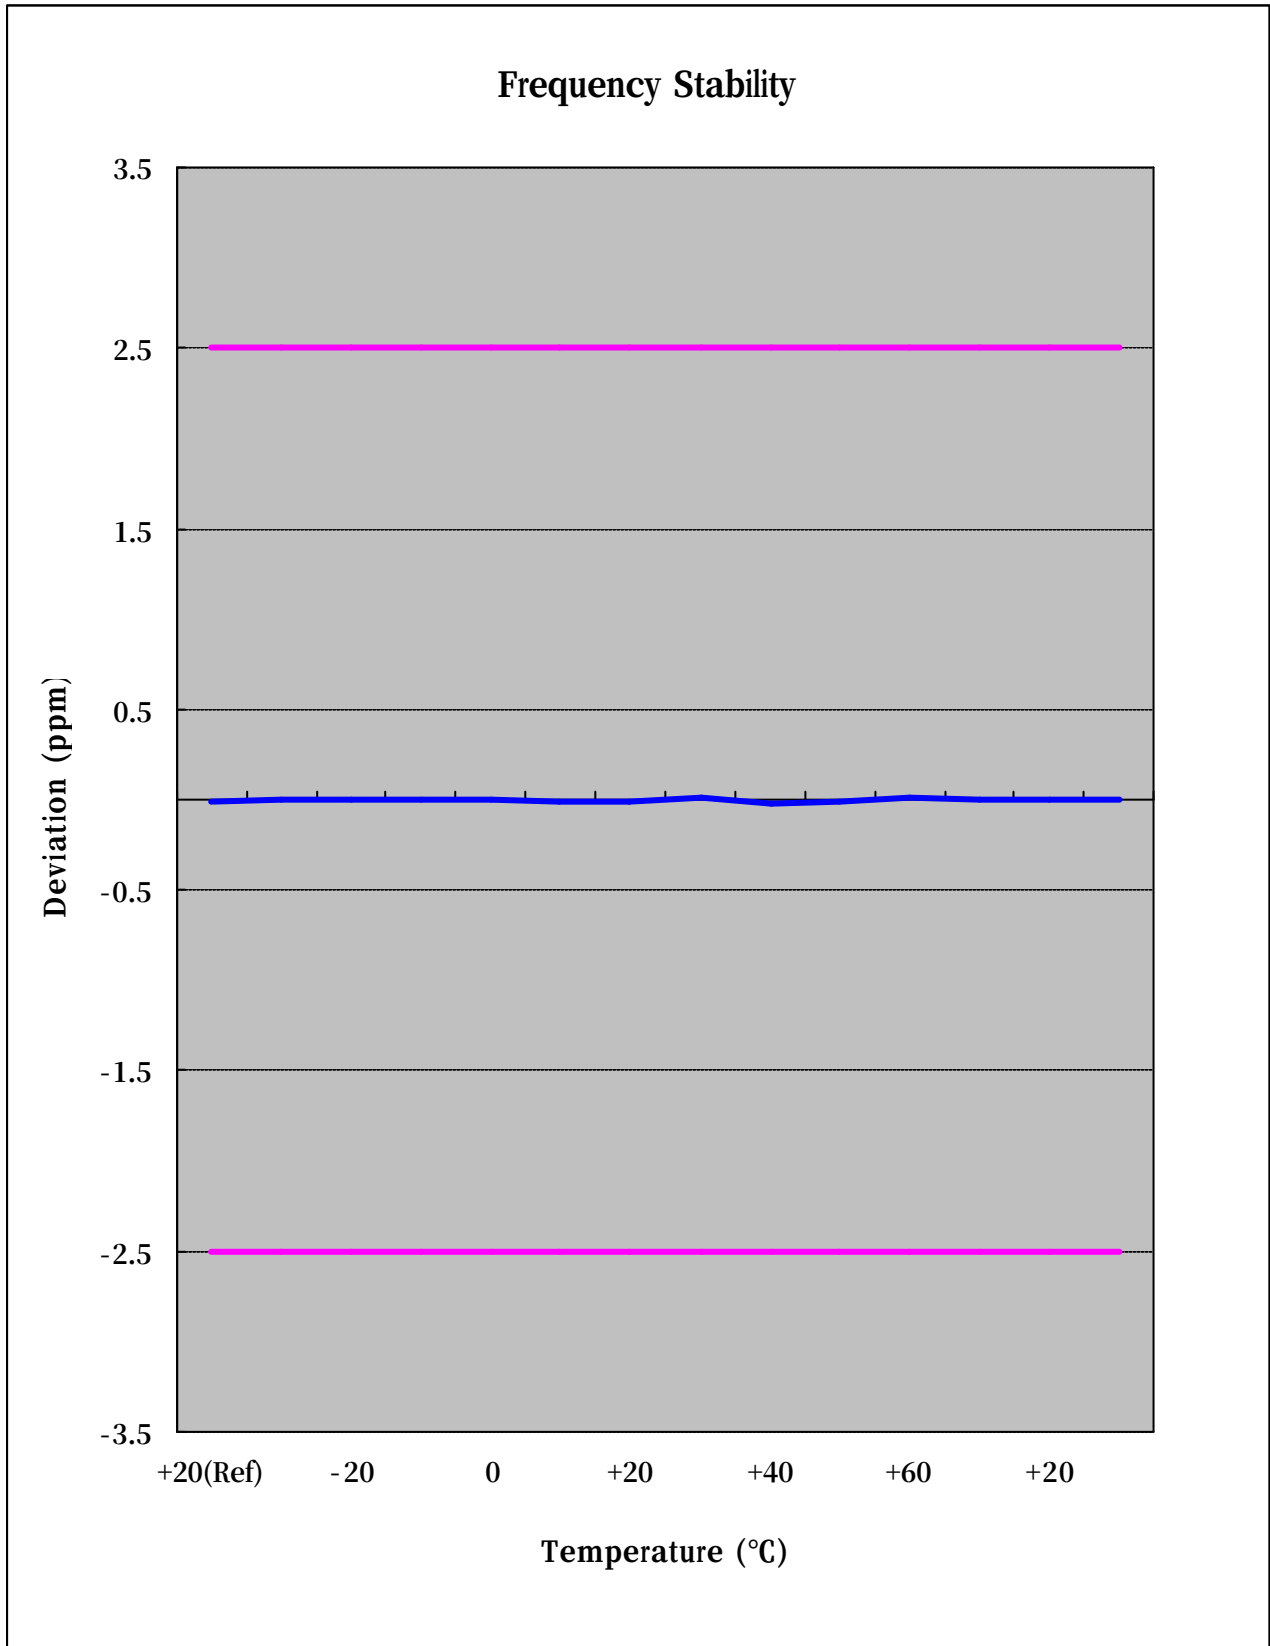

Zoom IN

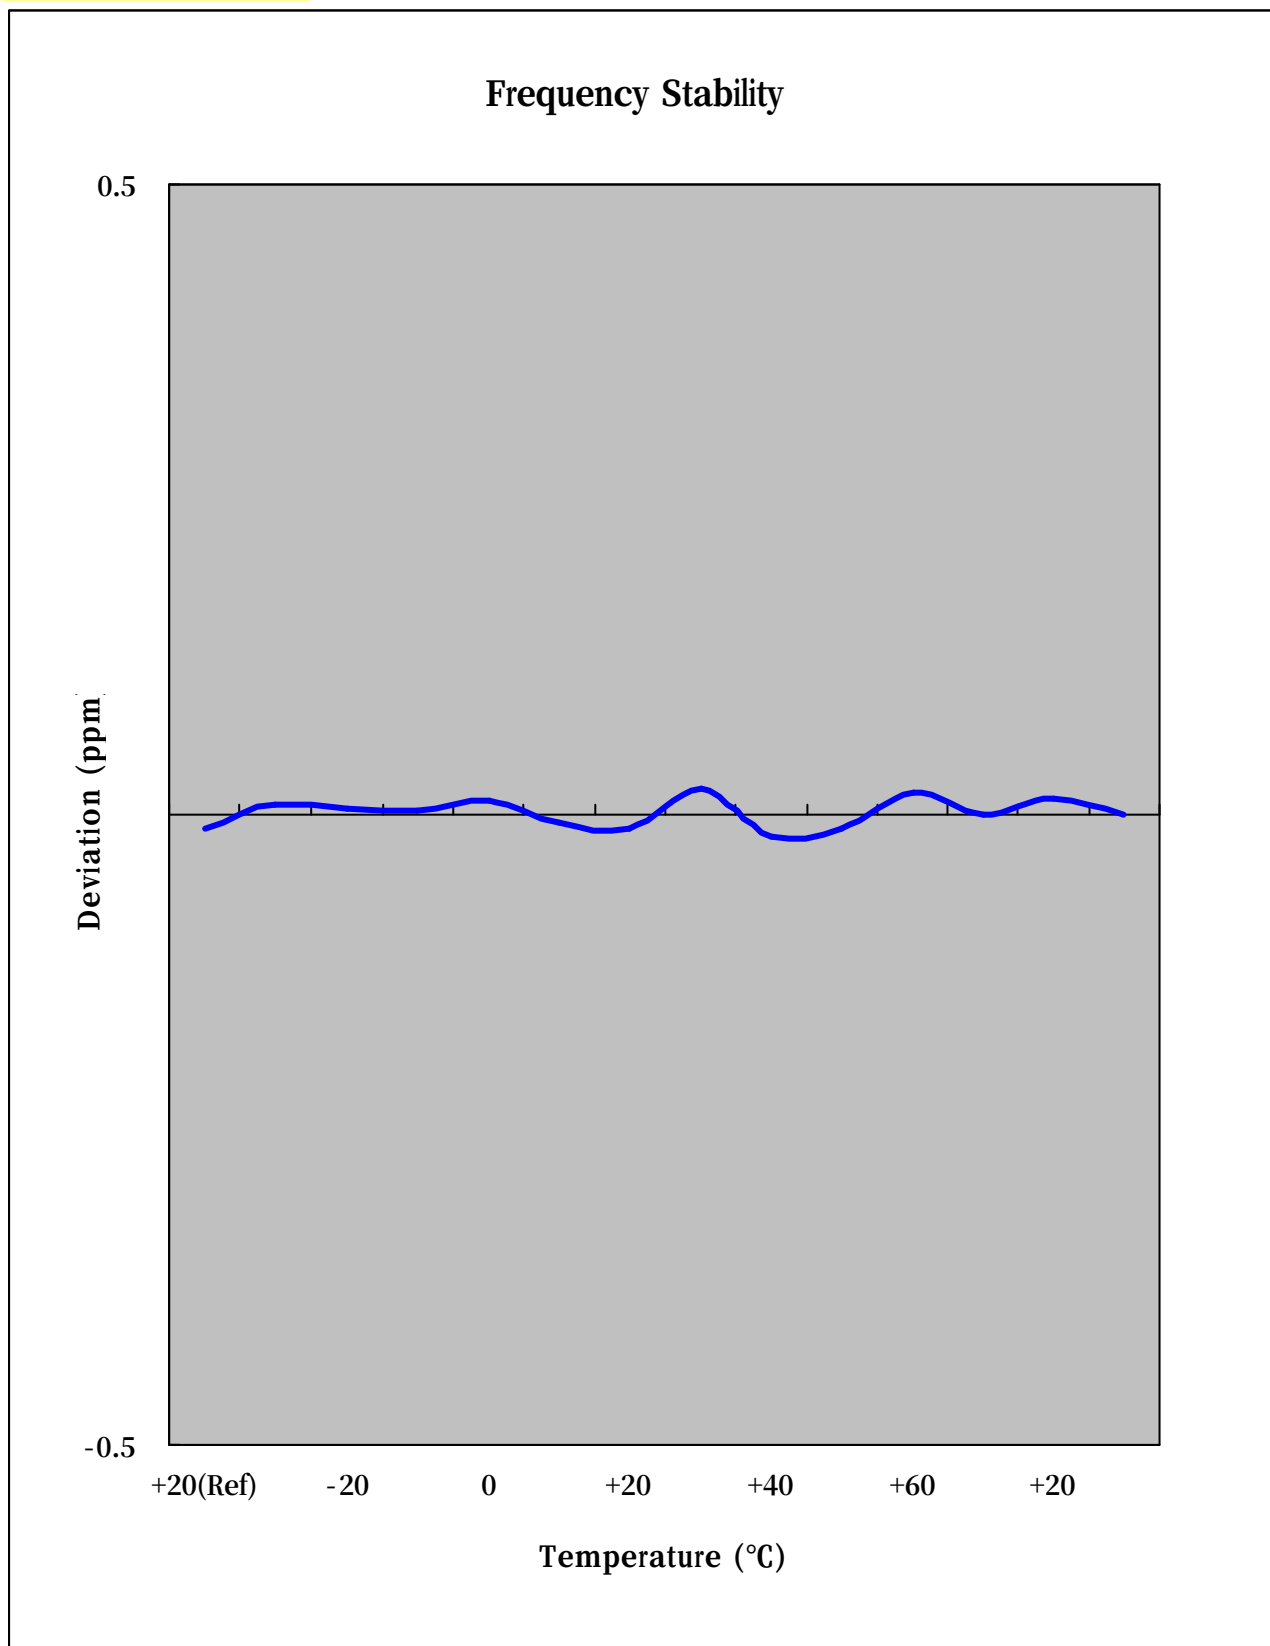



7. CONCLUSION


The data collected shows that the SAMSUNG 850/1900 GSM/EDGE/GPRS Phone with Bluetooth. FCC ID : A3LGTS5350 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS

GSM850


Agilent


R T

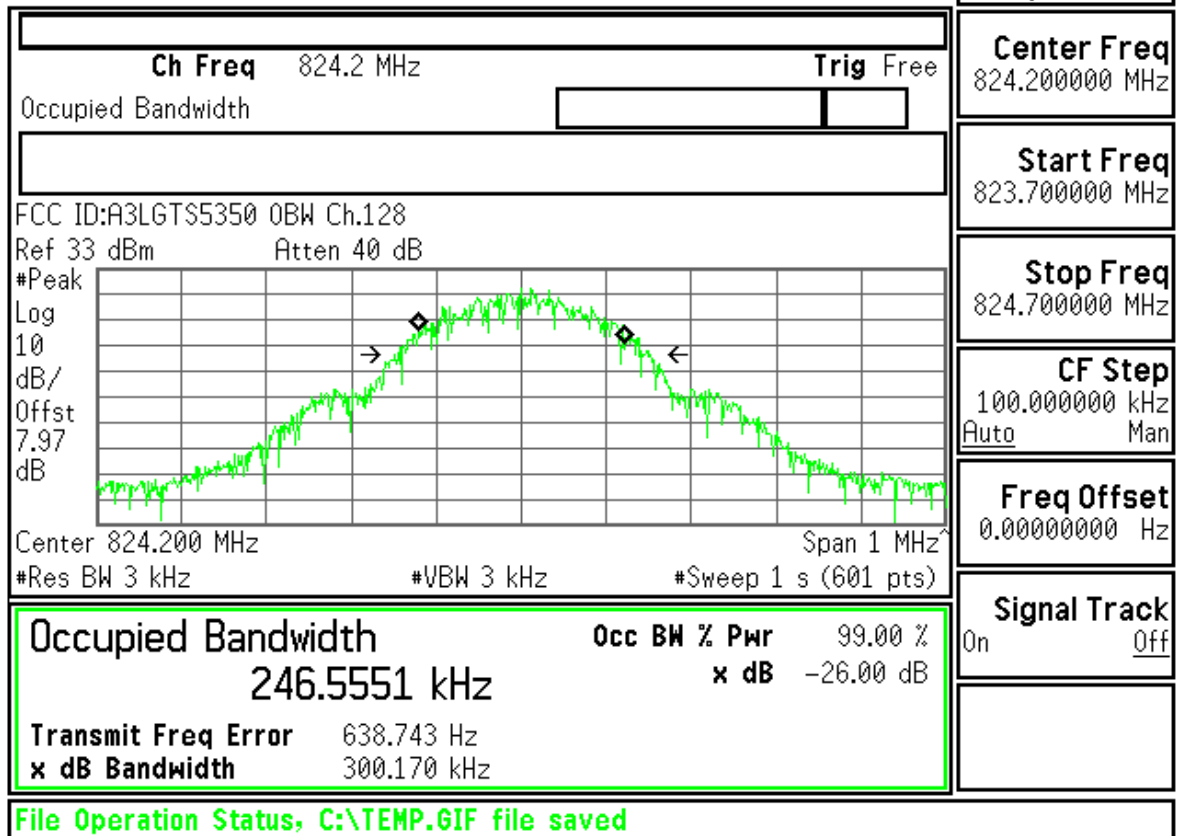

Agilent

R T

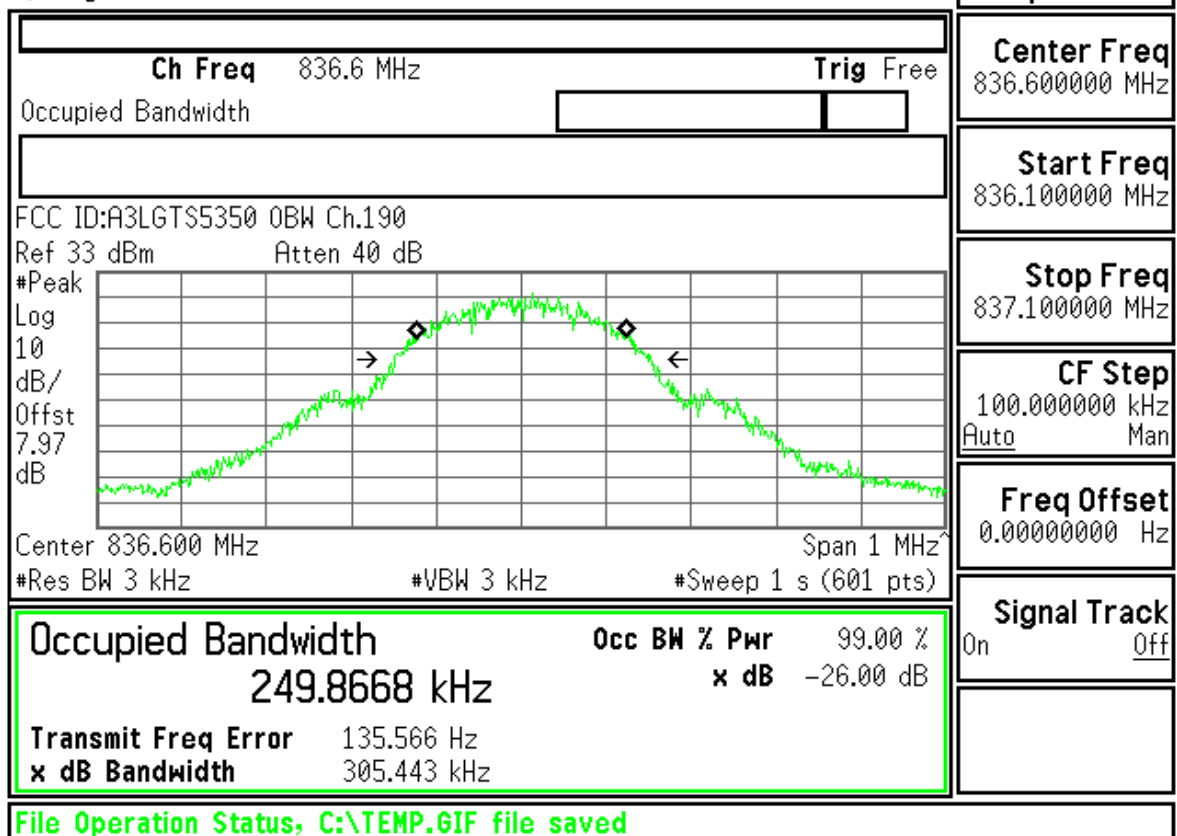

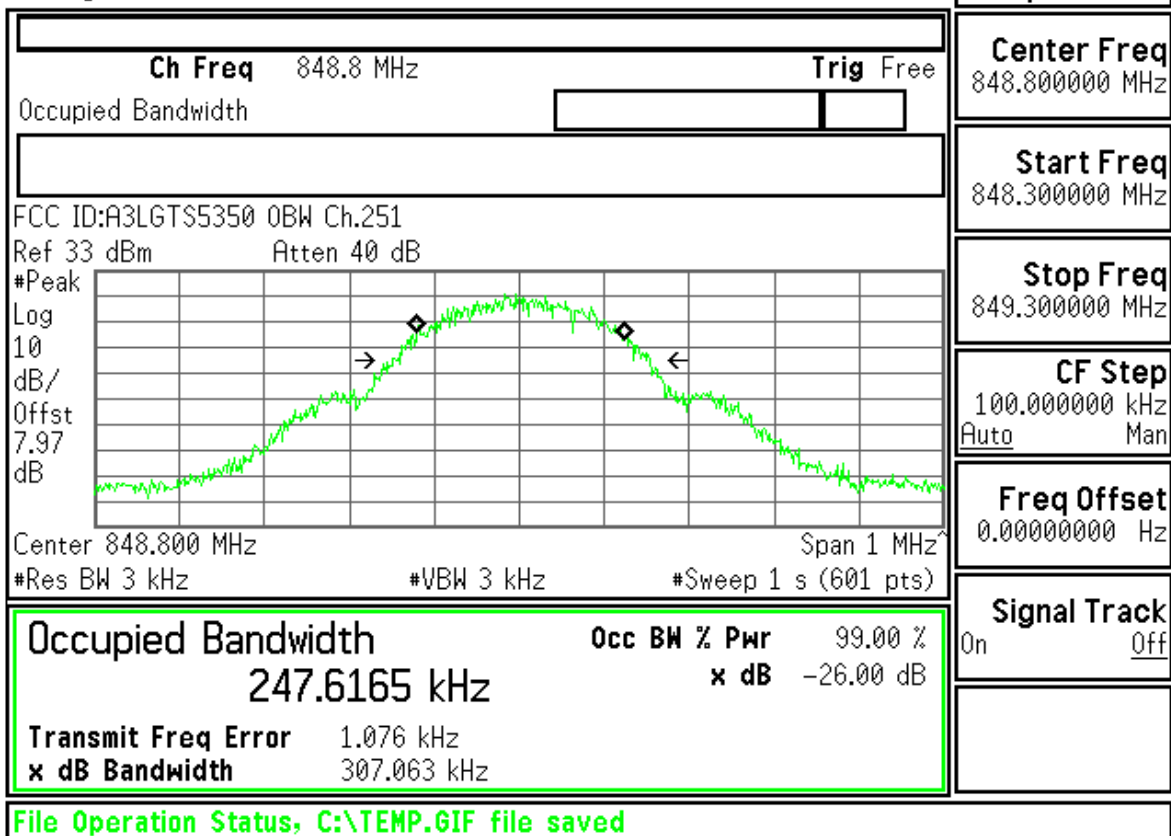

FCC ID : A3LGTS5350 Transmit Power 128CH

Measurement/Instrument Screen																									
Control		Transmit Power							TCH Parms																
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>33.00</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>33.00</td><td>----</td><td>----</td><td>----</td></tr></table>								Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	33.00	----	----	----	Estimated Carrier Power	33.00	----	----	----	Downlink Traffic Power ▾	
	Burst 1								Burst 2	Burst 3	Burst 4														
Burst Power	33.00								----	----	----														
Estimated Carrier Power	33.00								----	----	----														
Swap Window Positions		Traffic Band																							
		GS1850																							
		Traffic Channel																							
		128																							
		MS TX Level																							
									5																
									Channel Mode Setup ▾																
									Return																
		50 / 50							Single																
		Active Cell Connected					Sys Type: GSM																		
1 of 2					IntRef	Offset	R	T			1 of 2														

FCC ID : A3LGTS5350 Transmit Power 190CH

Measurement/Instrument Screen																																
Control		Transmit Power									TCH Parms																					
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>33.02</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>33.02</td><td>----</td><td>----</td><td>----</td></tr></table>										Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	33.02	----	----	----	Estimated Carrier Power	33.02	----	----	----	Downlink Traffic Power ▾						
												Burst 1	Burst 2	Burst 3	Burst 4																	
											Burst Power	33.02	----	----	----																	
		Estimated Carrier Power	33.02	----	----	----																										
		Traffic Band																														
GSM850																																
Single									Traffic Channel																							
									190																							
Swap Window Positions		Phase & Frequency Error									MS TX Level																					
		<table><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td>Frequency Hz</td></tr><tr><td>Minimum</td><td>2.45</td><td>0.54</td><td>-21.31</td></tr><tr><td>Maximum</td><td>4.05</td><td>0.73</td><td>-12.71</td></tr><tr><td>Average</td><td>3.45</td><td>0.61</td><td>-16.25</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td>Pass</td></tr></table>										Peak Phase °	RMS Phase °	Frequency Hz	Minimum	2.45	0.54	-21.31	Maximum	4.05	0.73	-12.71	Average	3.45	0.61	-16.25	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup ▾	
												Peak Phase °	RMS Phase °	Frequency Hz																		
											Minimum	2.45	0.54	-21.31																		
											Maximum	4.05	0.73	-12.71																		
Average	3.45	0.61	-16.25																													
Pass/Fail	Pass	Pass	Pass																													
50 / 50									Return																							
Single																																
1 of 2					Active Cell Connected			Sys Type: GSM			1 of 2																					
				IntRef		Offset		R T																								


FCC ID : A3LGTS5350 Transmit Power 251CH

Measurement/Instrument Screen																													
Control		Transmit Power						TCH Parms																					
Transmit Power Setup		<table border="1"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>33.11</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>33.11</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>							Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	33.11	----	----	----	Estimated Carrier Power	33.11	----	----	----	Downlink Traffic Power						
			Burst 1	Burst 2	Burst 3	Burst 4																							
		Burst Power	33.11	----	----	----																							
		Estimated Carrier Power	33.11	----	----	----																							
Traffic Band																													
		Single						GS1850																					
								Traffic Channel																					
								251																					
								MS TX Level																					
								5																					
Swap Window Positions		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>3.14</td> <td>0.51</td> <td>-25.23</td> </tr> <tr> <td>Maximum</td> <td>4.98</td> <td>0.72</td> <td>-16.85</td> </tr> <tr> <td>Average</td> <td>4.04</td> <td>0.61</td> <td>-21.44</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	3.14	0.51	-25.23	Maximum	4.98	0.72	-16.85	Average	4.04	0.61	-21.44	Pass/Fail	Pass	Pass	Pass	Channel Mode Setup	
	Peak Phase °	RMS Phase °	Frequency Hz																										
Minimum	3.14	0.51	-25.23																										
Maximum	4.98	0.72	-16.85																										
Average	4.04	0.61	-21.44																										
Pass/Fail	Pass	Pass	Pass																										
		50 / 50						Return																					
		Single																											
		Active Cell Connected				Sys Type: GSM																							
1 of 2		IntRef Offset R T						1 of 2																					


FCC ID : A3LGTS5350 GSMK Power vs Time 128CH

Measurement/Instrument Screen																													
Control		Power vs Time Graph						TCH Parms																					
Power vs Time Setup								Downlink Traffic Power																					
								Traffic Band																					
Change View		<table border="1"> <thead> <tr> <th>Burst</th> <th>TX Power (dBm)</th> <th>Modulation</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>33.02</td> <td>GSMK</td> <td>ETSI</td> </tr> <tr> <td>2</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>3</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>4</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table>						Burst	TX Power (dBm)	Modulation	Mask	1	33.02	GSMK	ETSI	2	----	----	----	3	----	----	----	4	----	----	----	GS1850	
								Burst	TX Power (dBm)	Modulation	Mask																		
1	33.02	GSMK	ETSI																										
2	----	----	----																										
3	----	----	----																										
4	----	----	----																										
		Continuous						Traffic Channel																					
								128																					
								MS TX Level																					
								5																					
								Channel Mode Setup																					
								Return																					
		Active Cell Connected				Sys Type: GSM																							
1 of 2		IntRef Offset R T						1 of 2																					


FCC ID : A3LGTS5350 GMSK Power vs Time 190CH

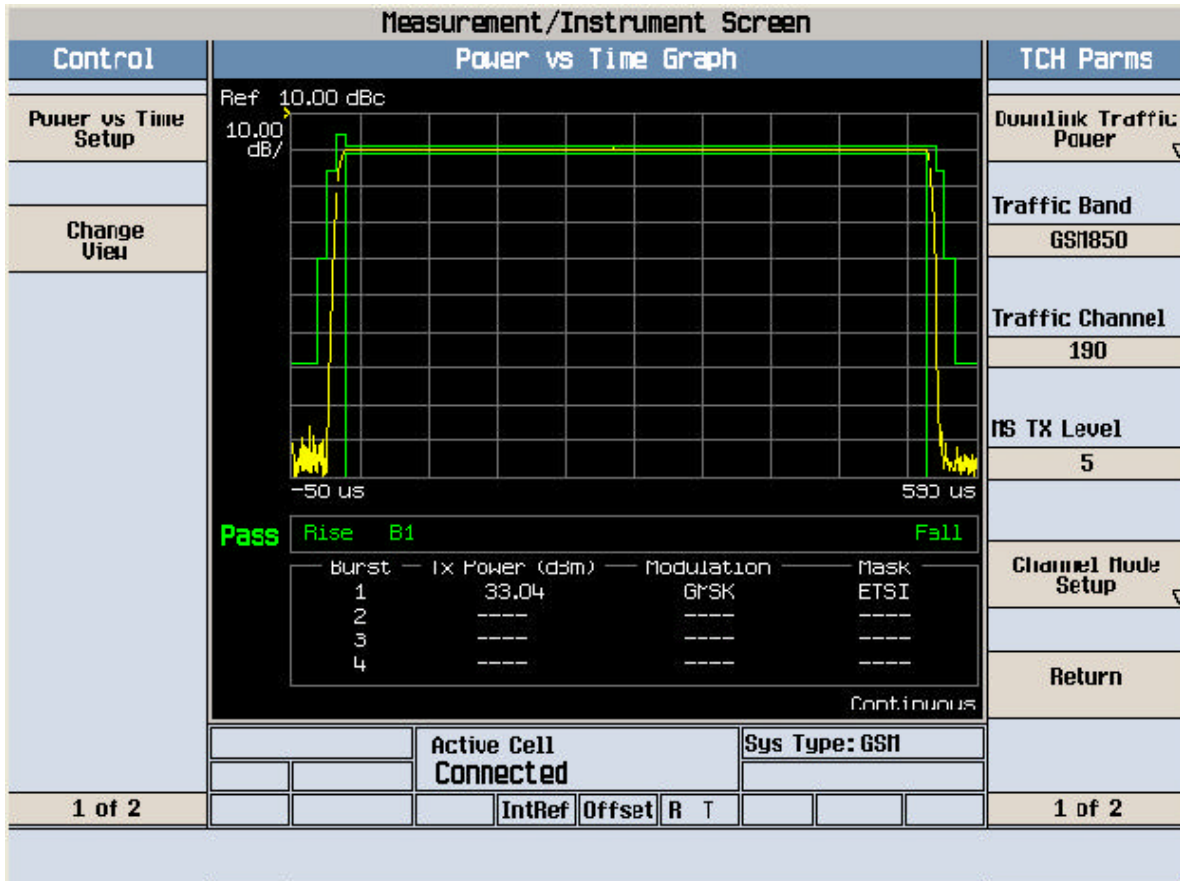


FCC ID : A3LGTS5350 GMSK Power vs Time 251CH

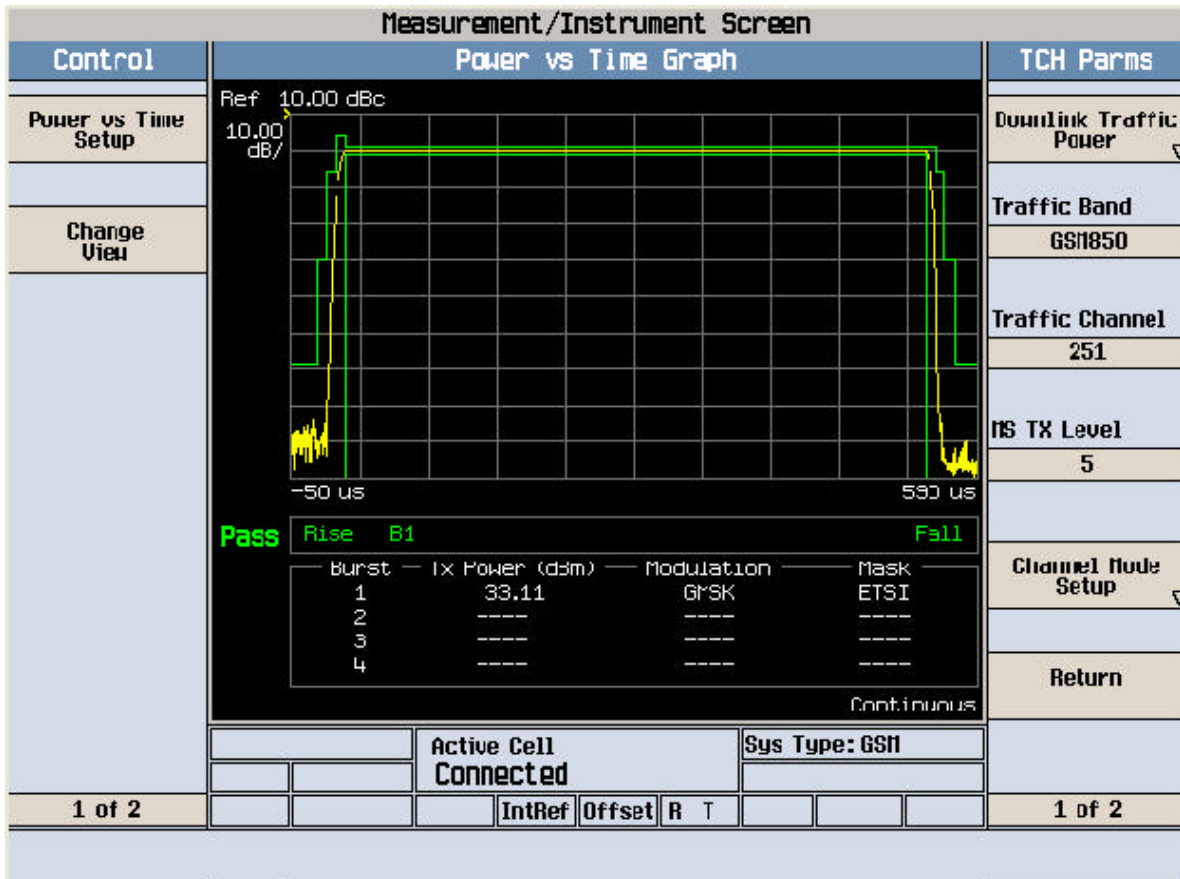




FCC ID : A3LGTS5350 Modulation & Switching 128CH


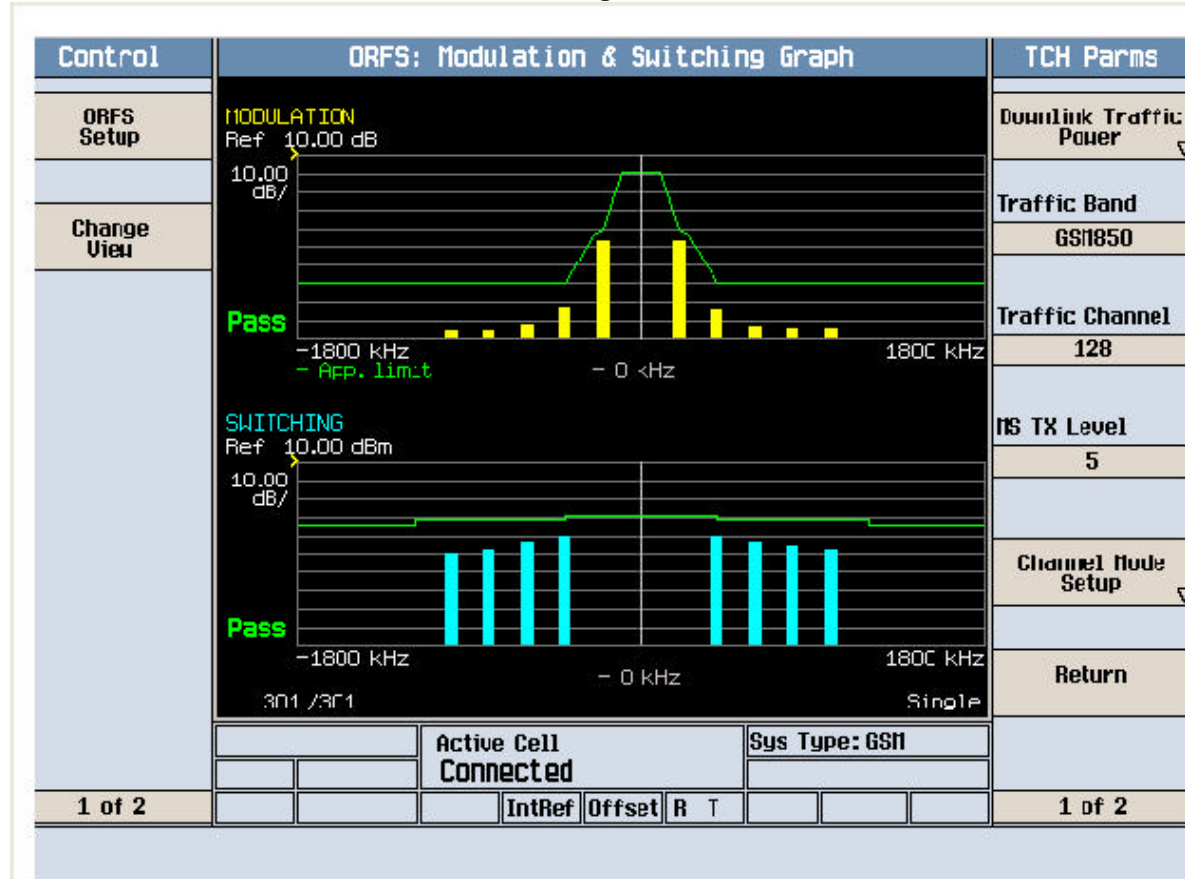




FCC ID : A3LGTS5350 Modulation & Switching 190CH


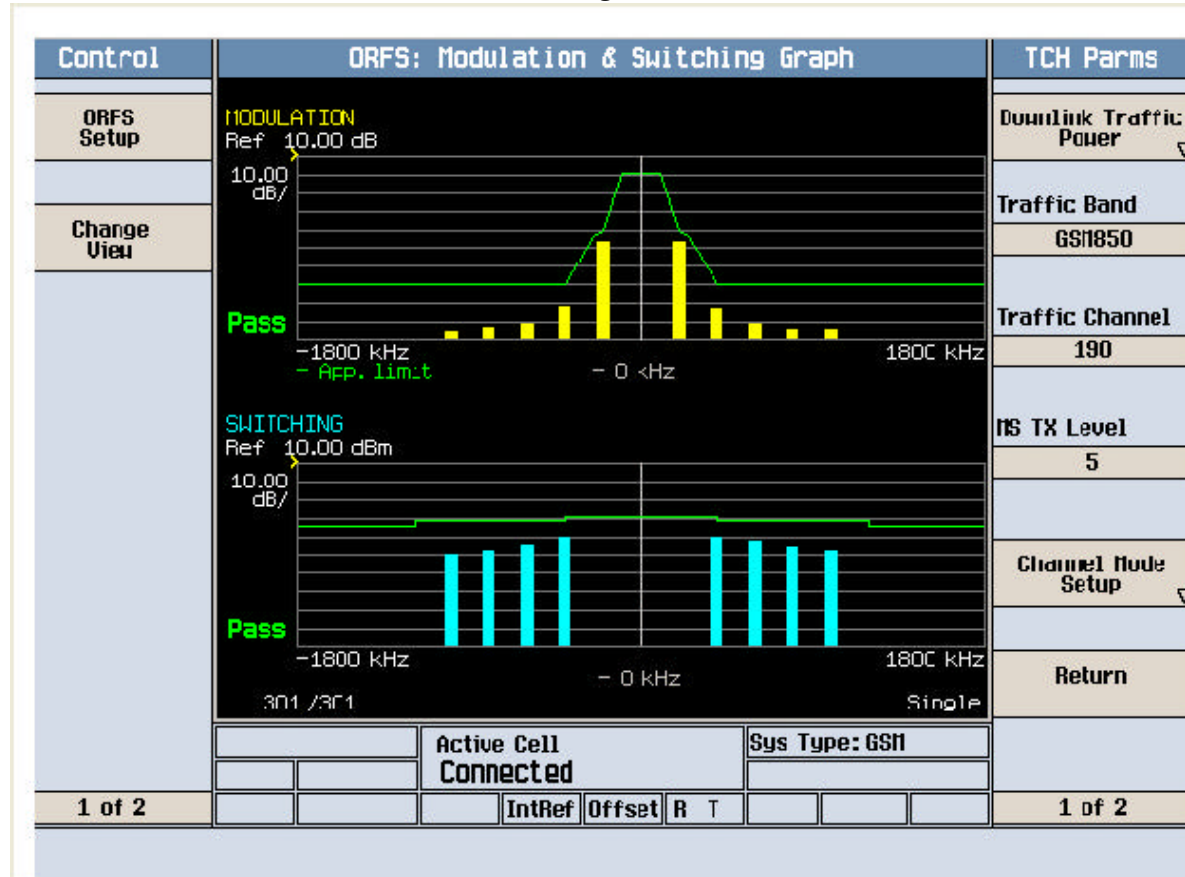



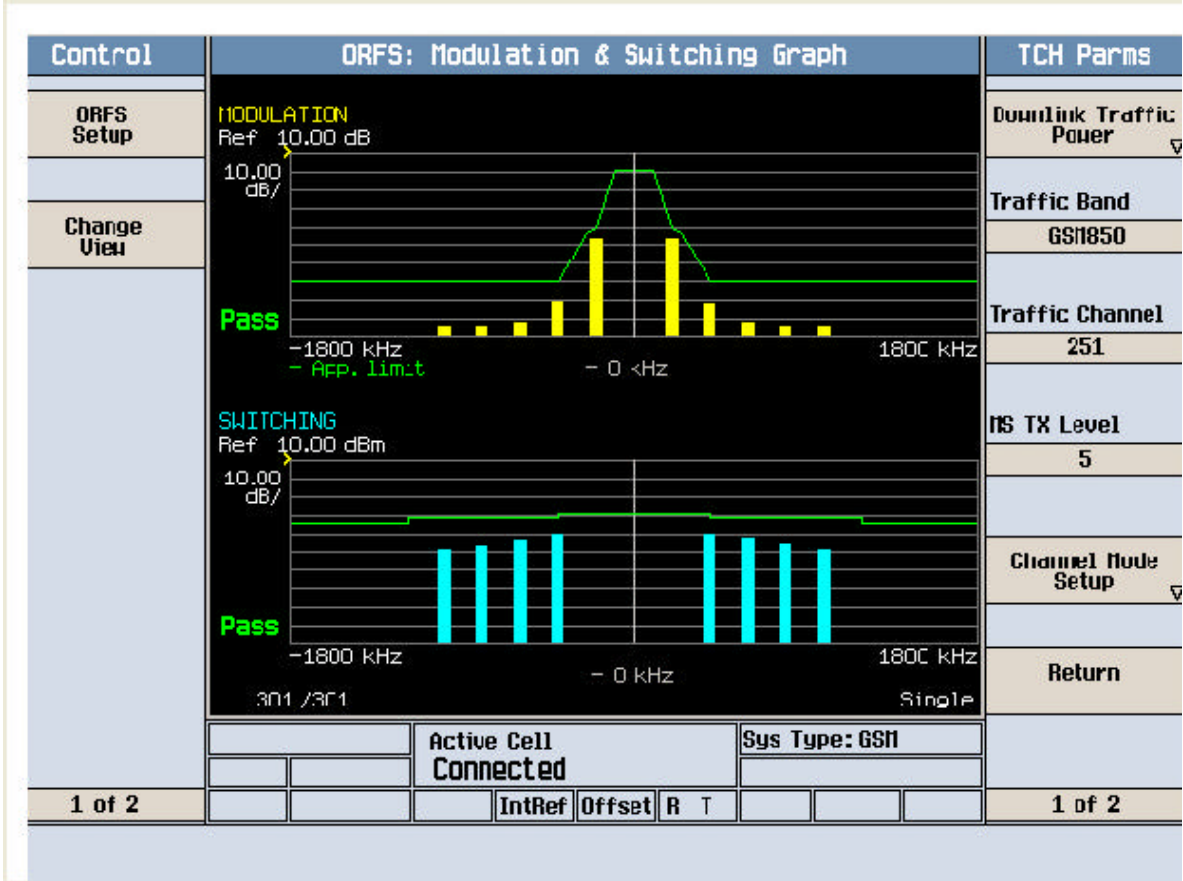


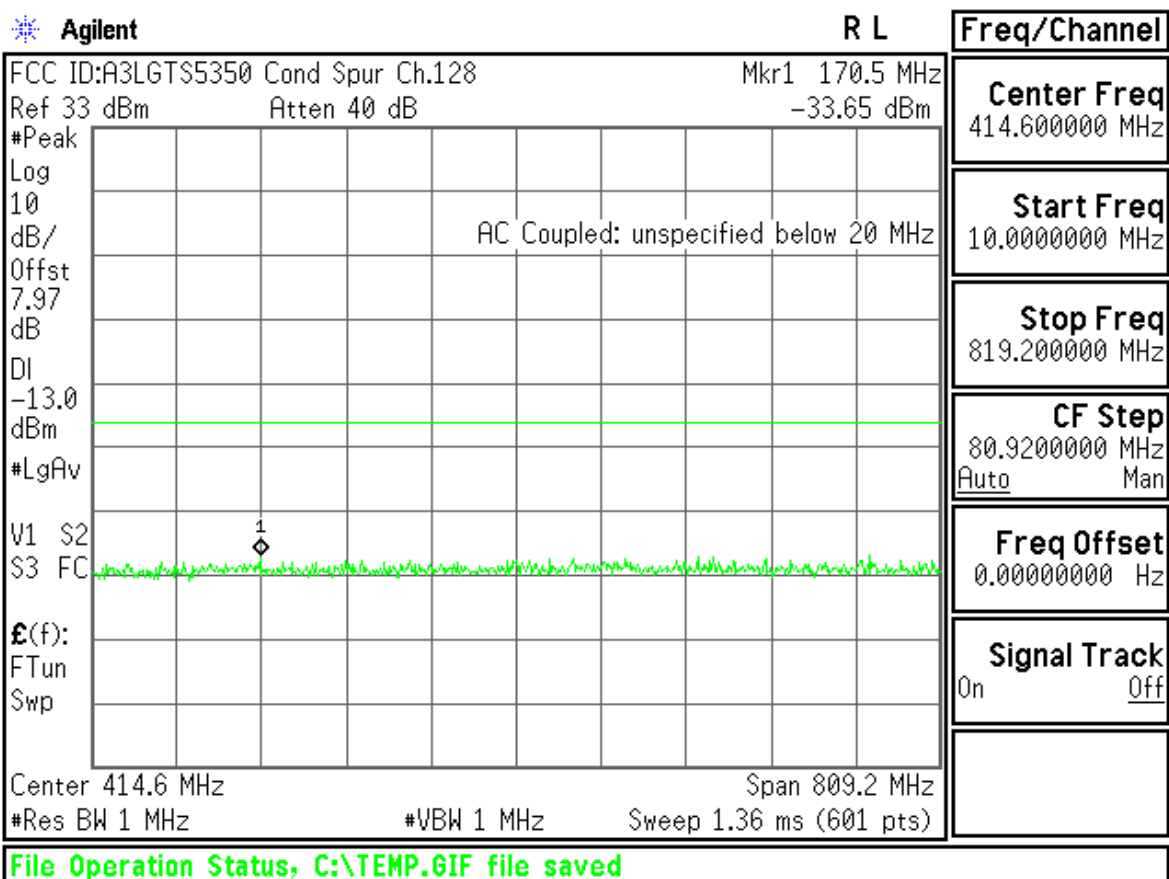
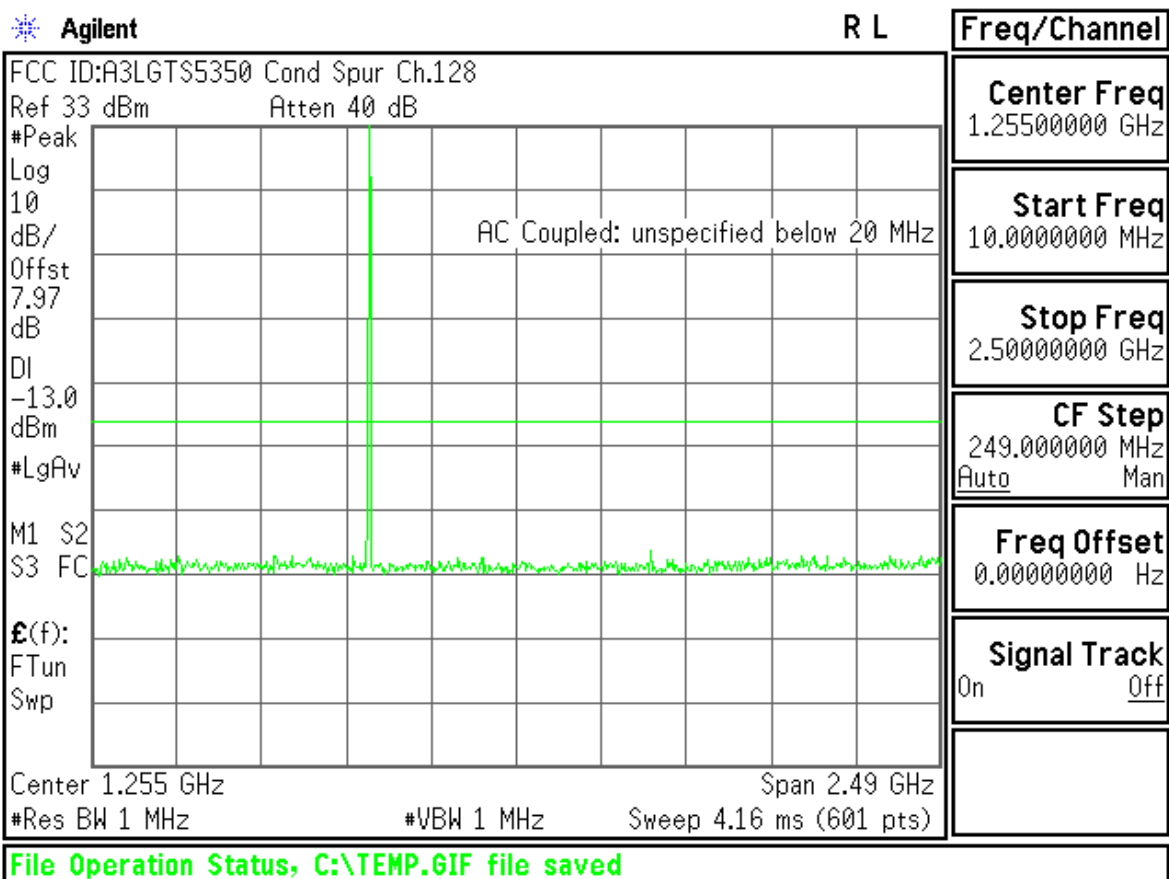


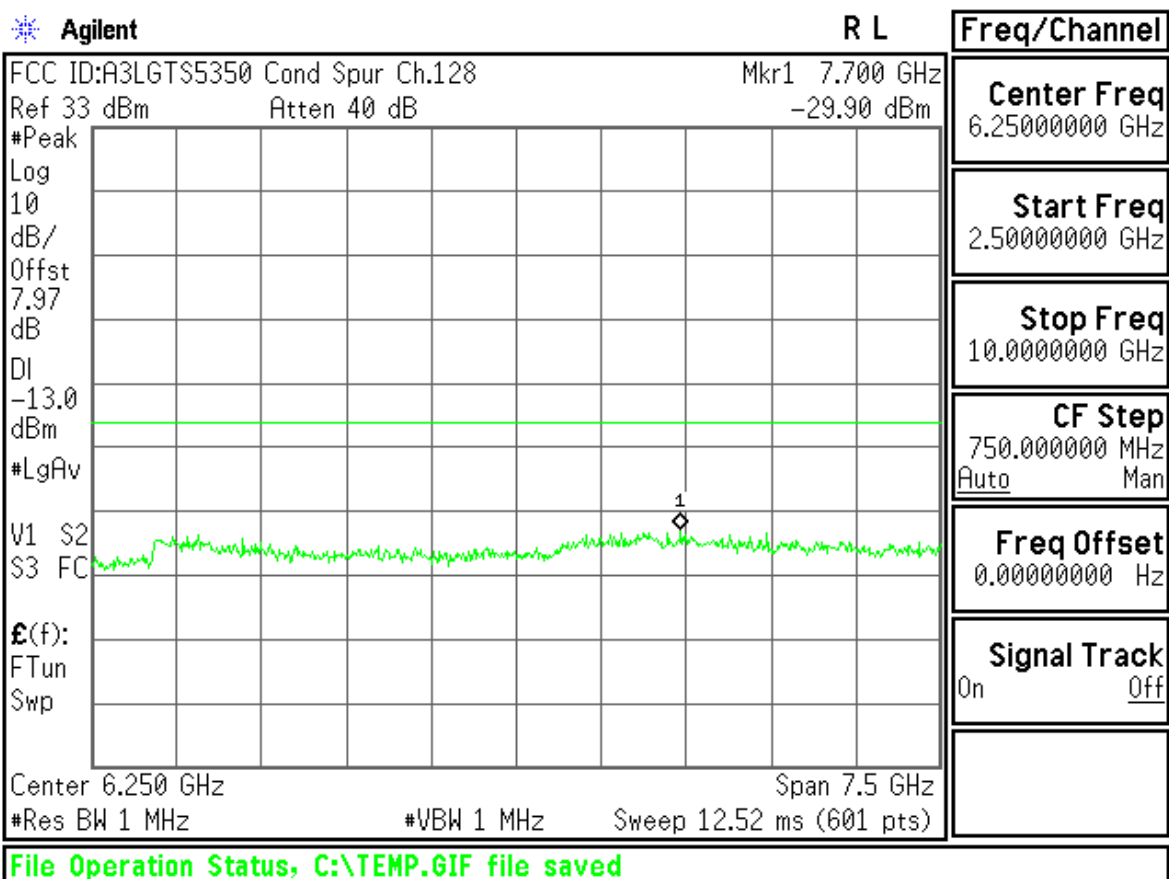
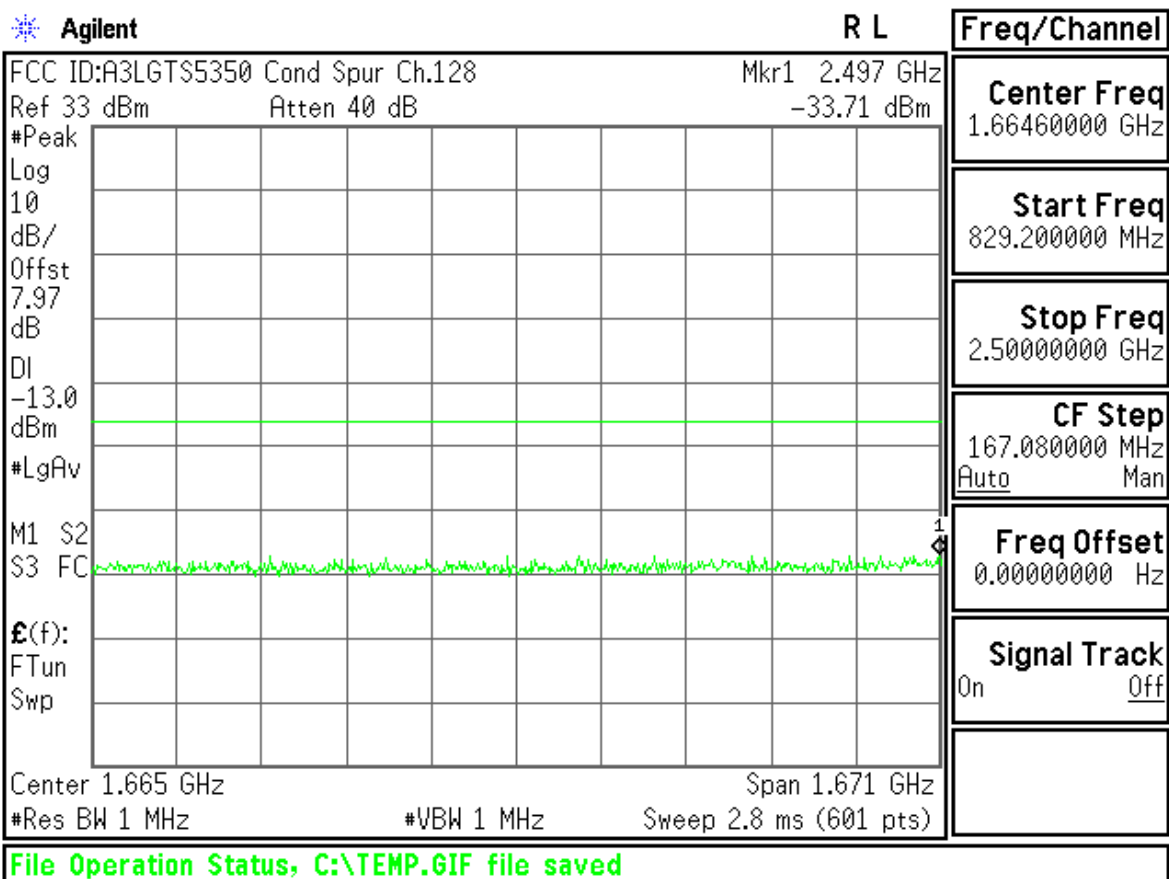


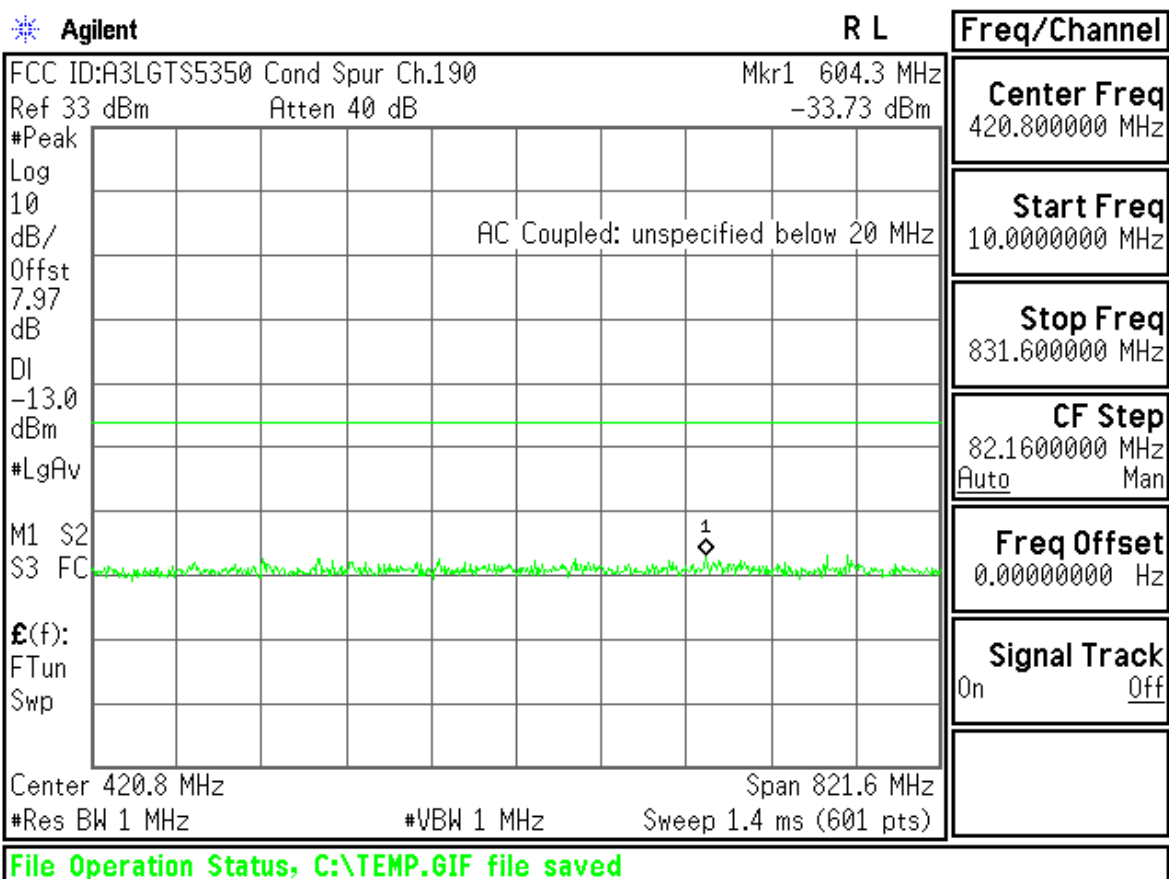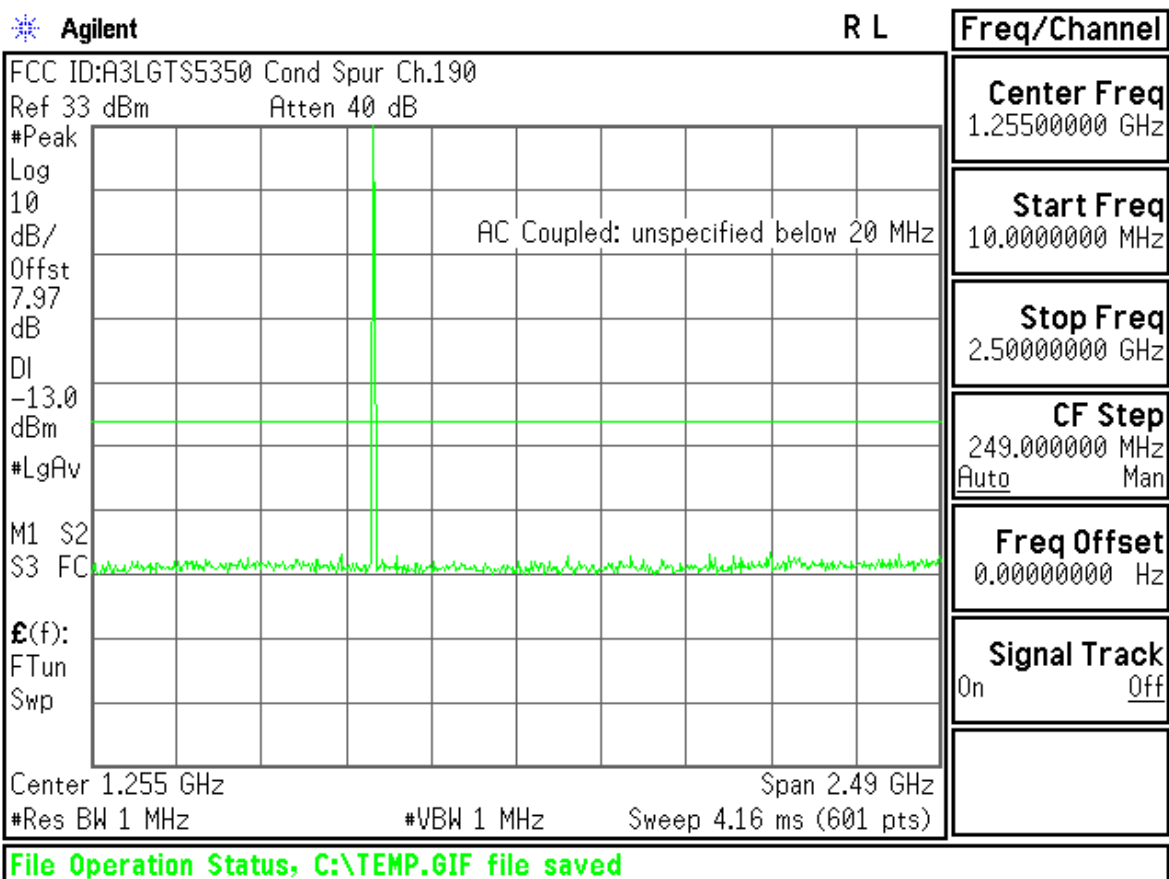

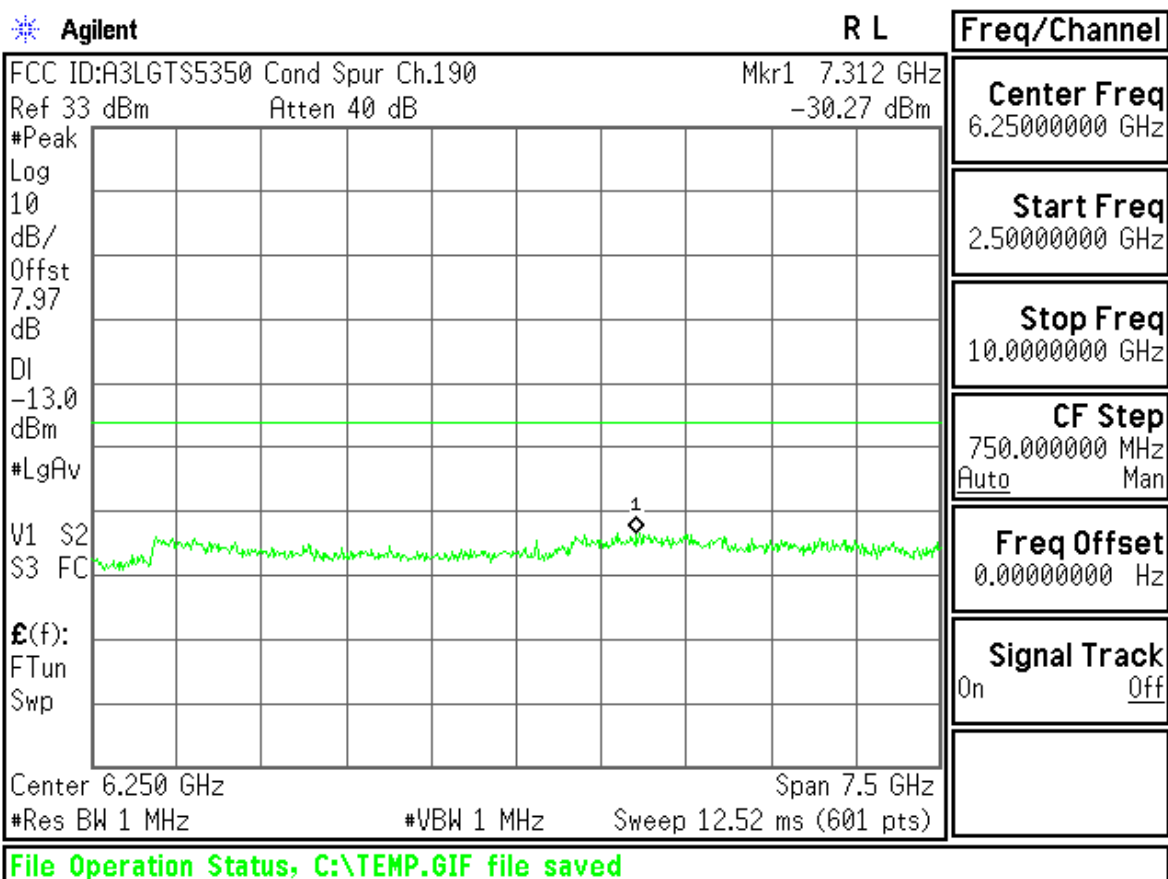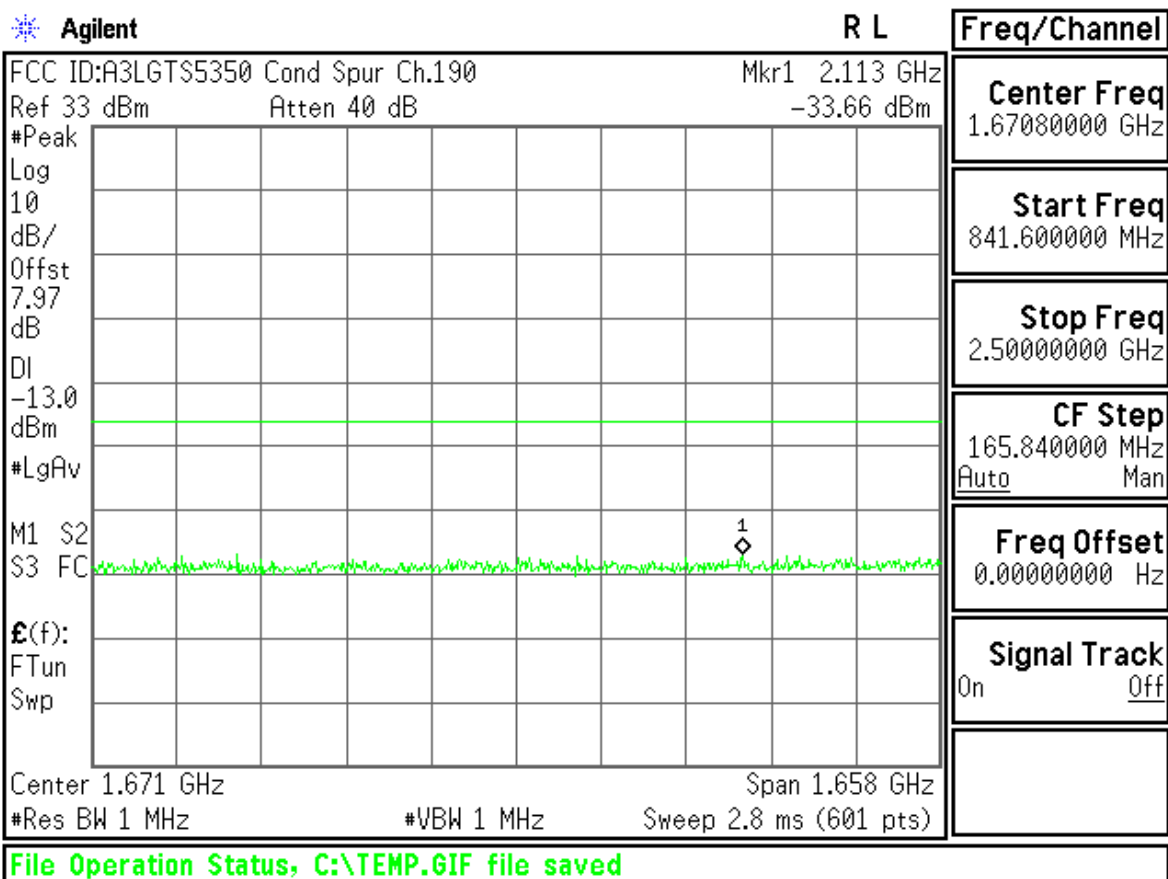

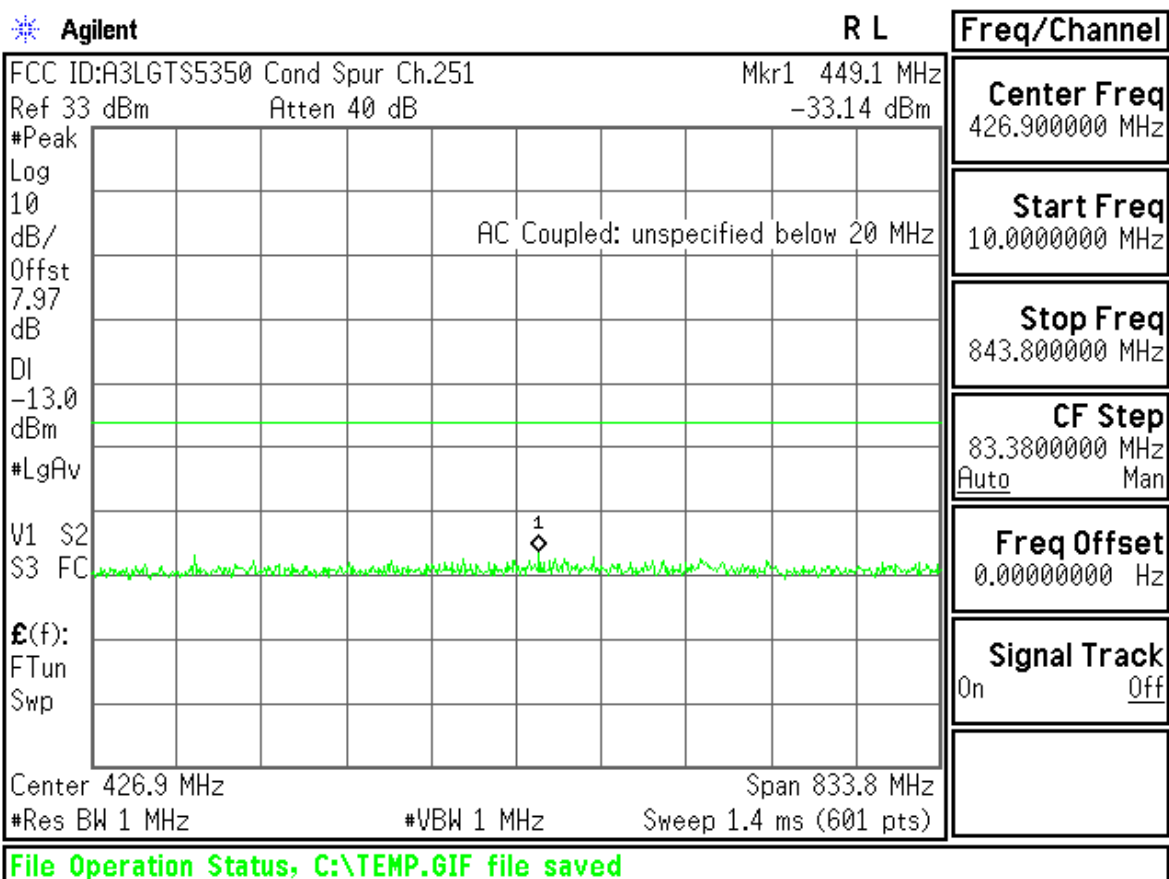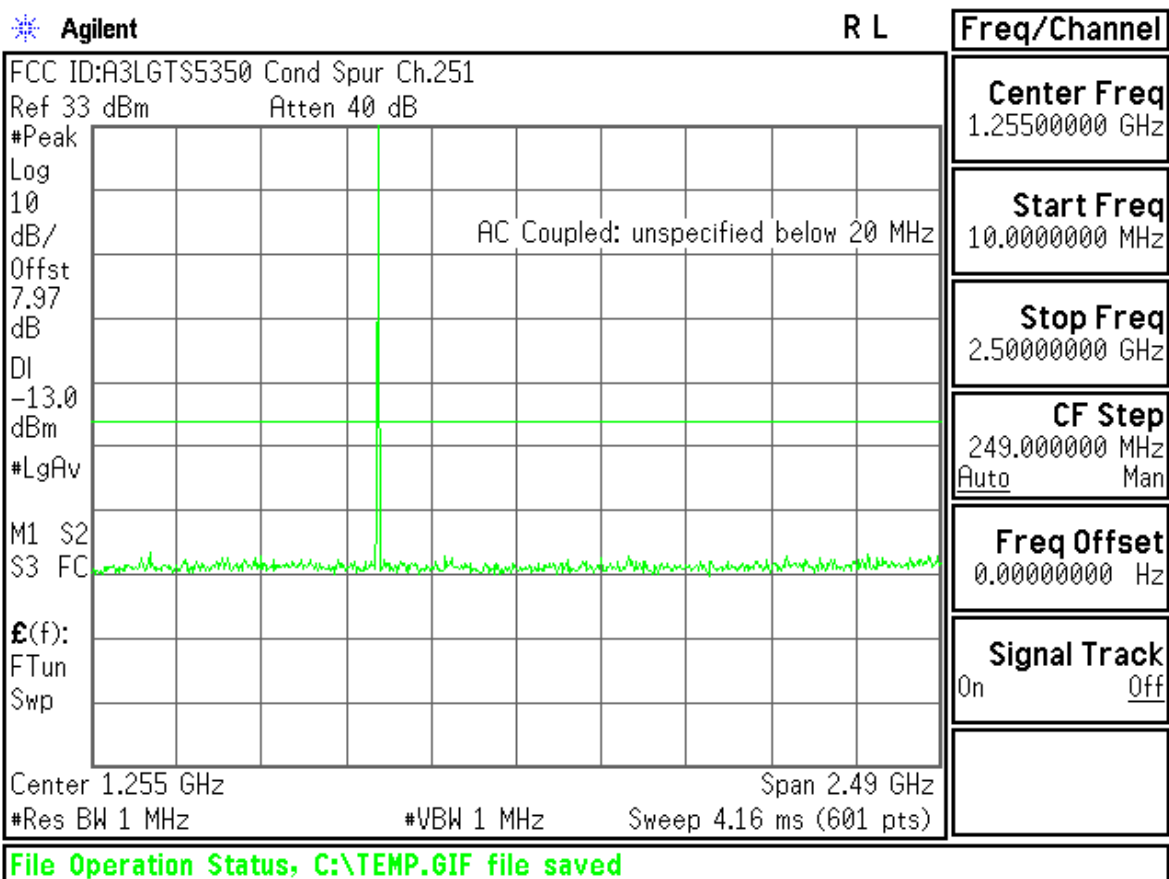

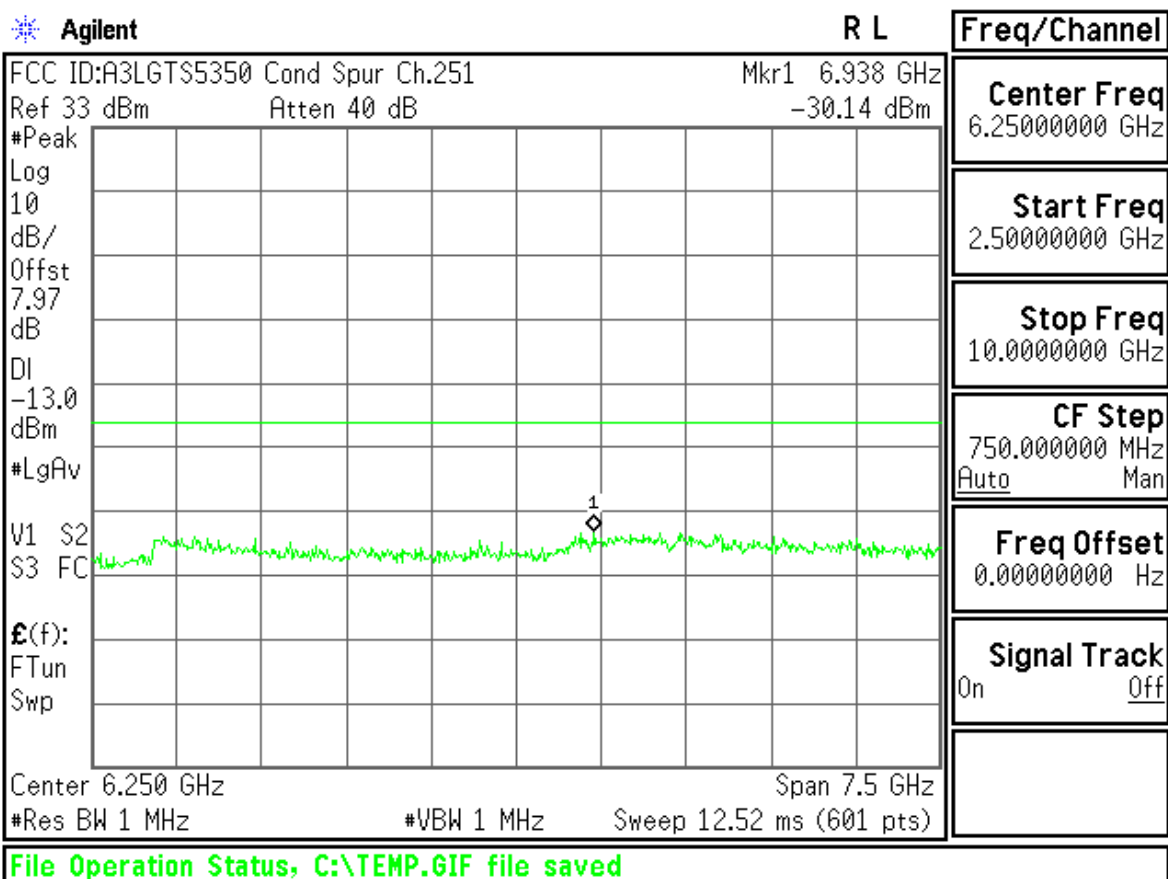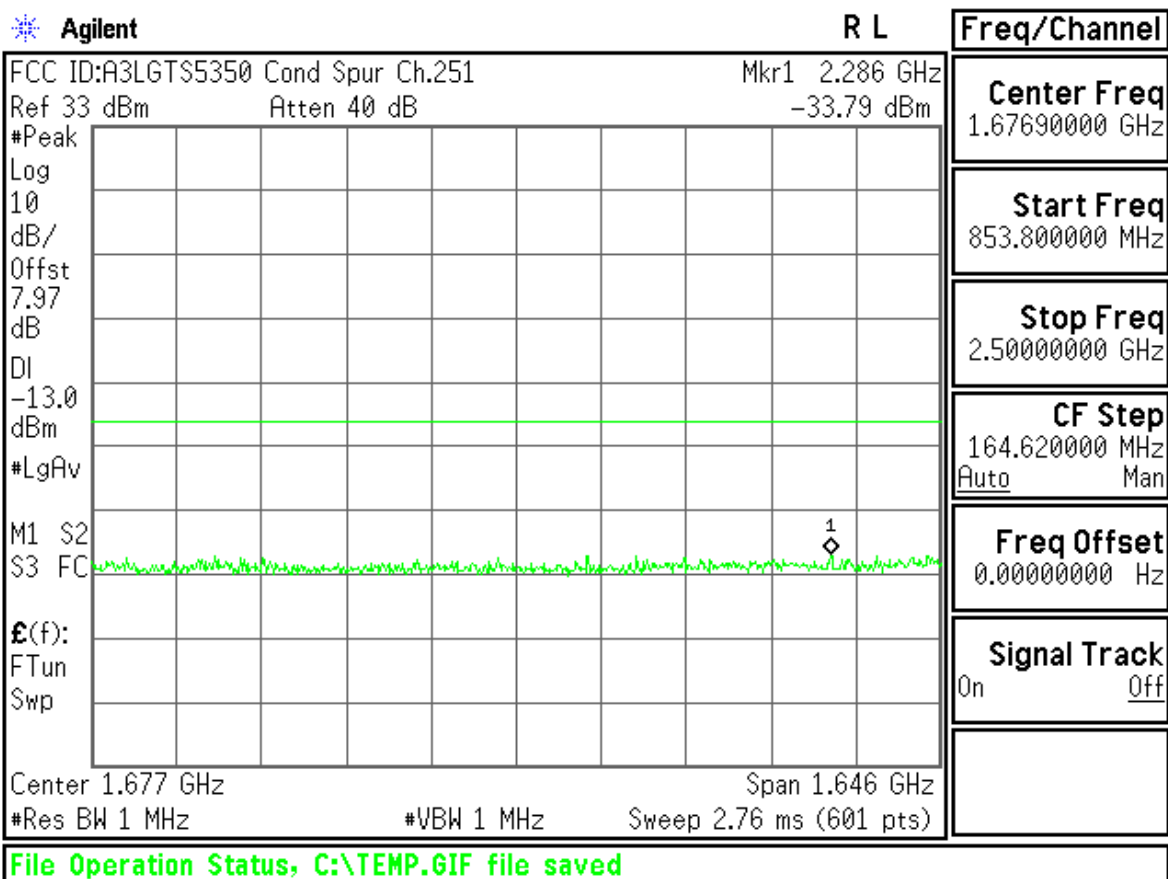

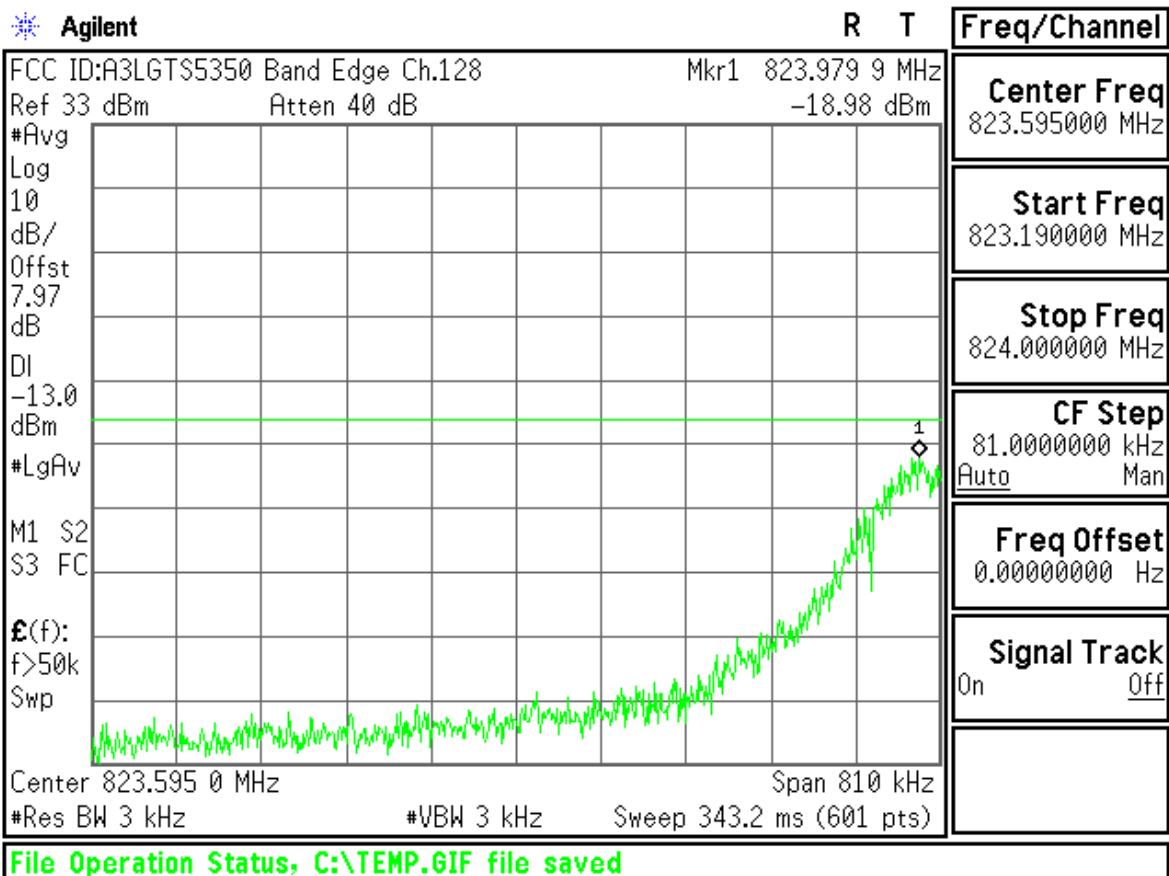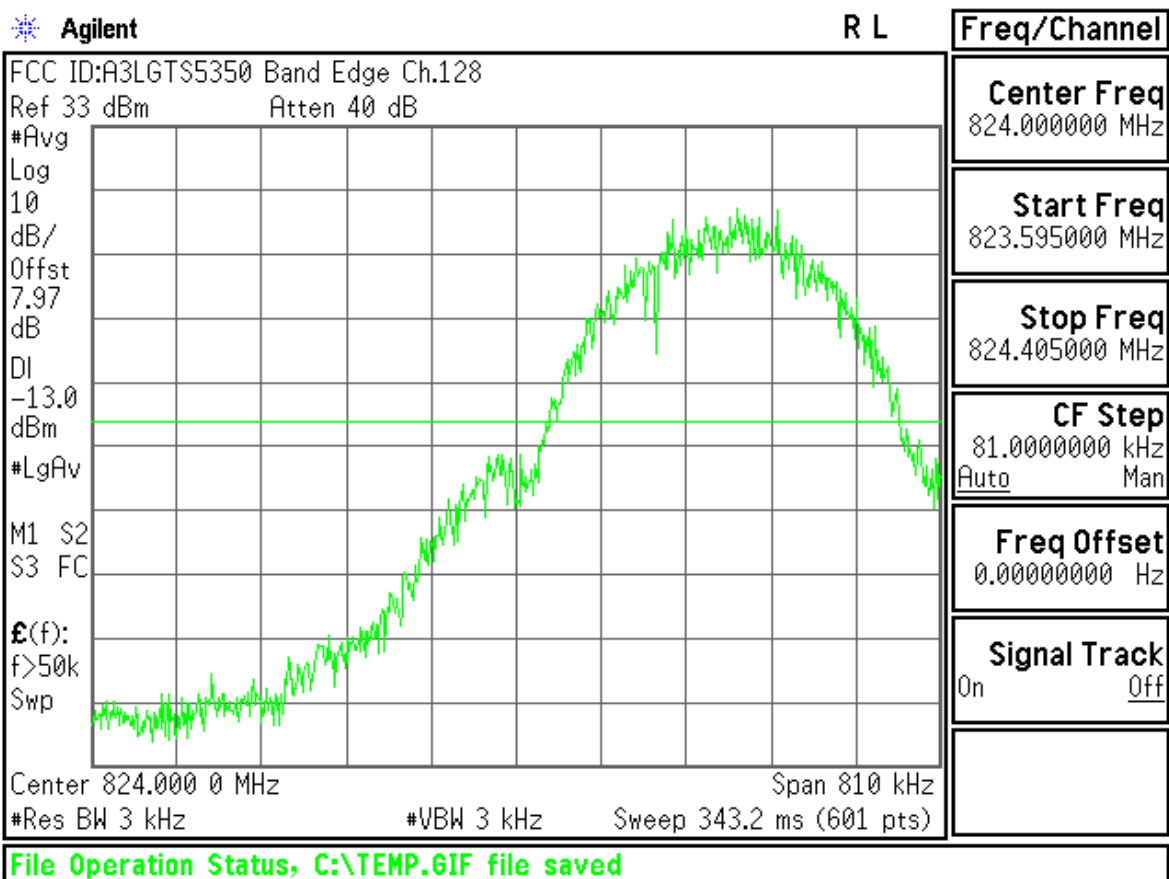

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5350 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

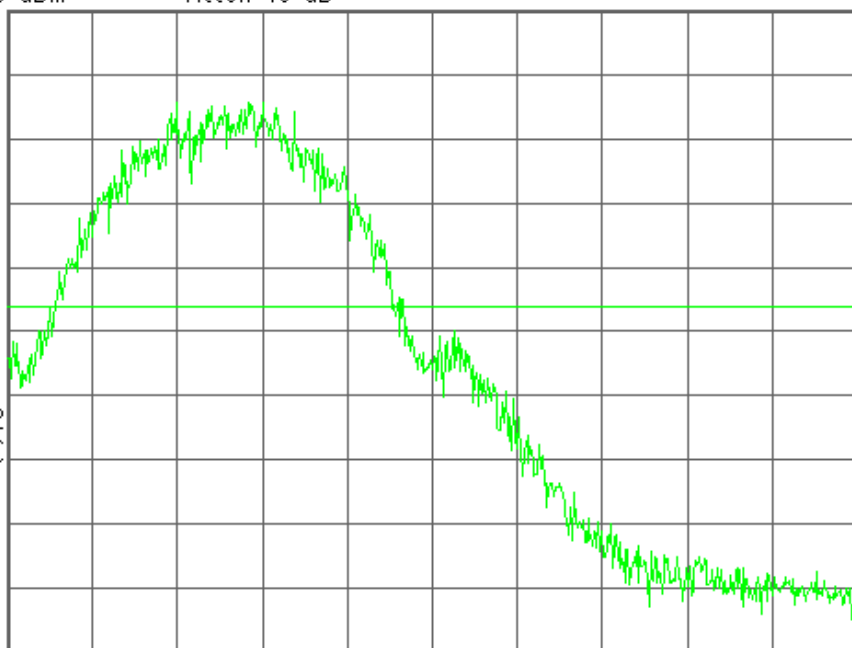

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5350 Band Edge Ch.251

Mkr1 849.010 7 MHz

Ref 33 dBm

Atten 40 dB

-17.54 dBm

#Avg

Log

10

dB/

Offst

7.97

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

£(f):

f>50k

Swp

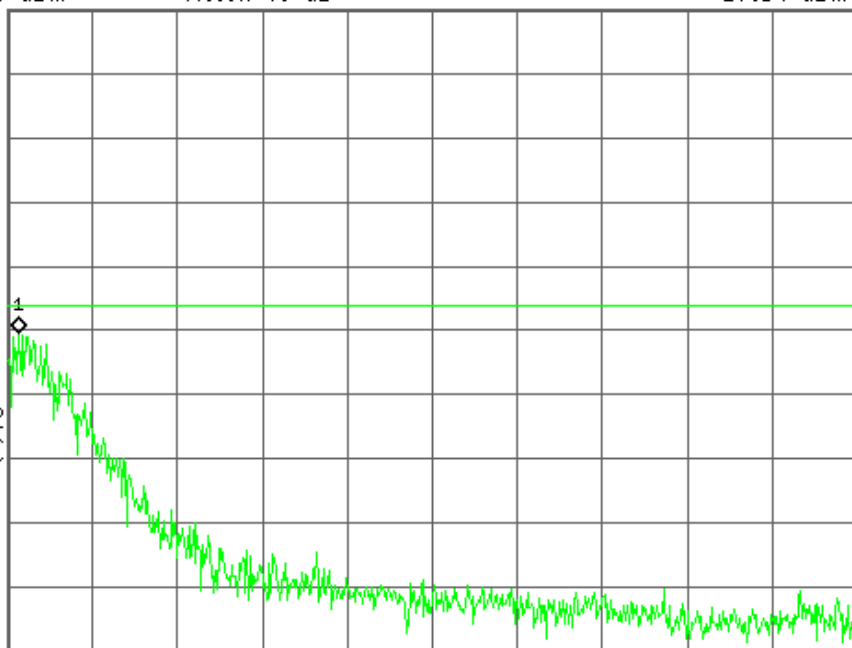

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

GSM1900

Agilent


R T

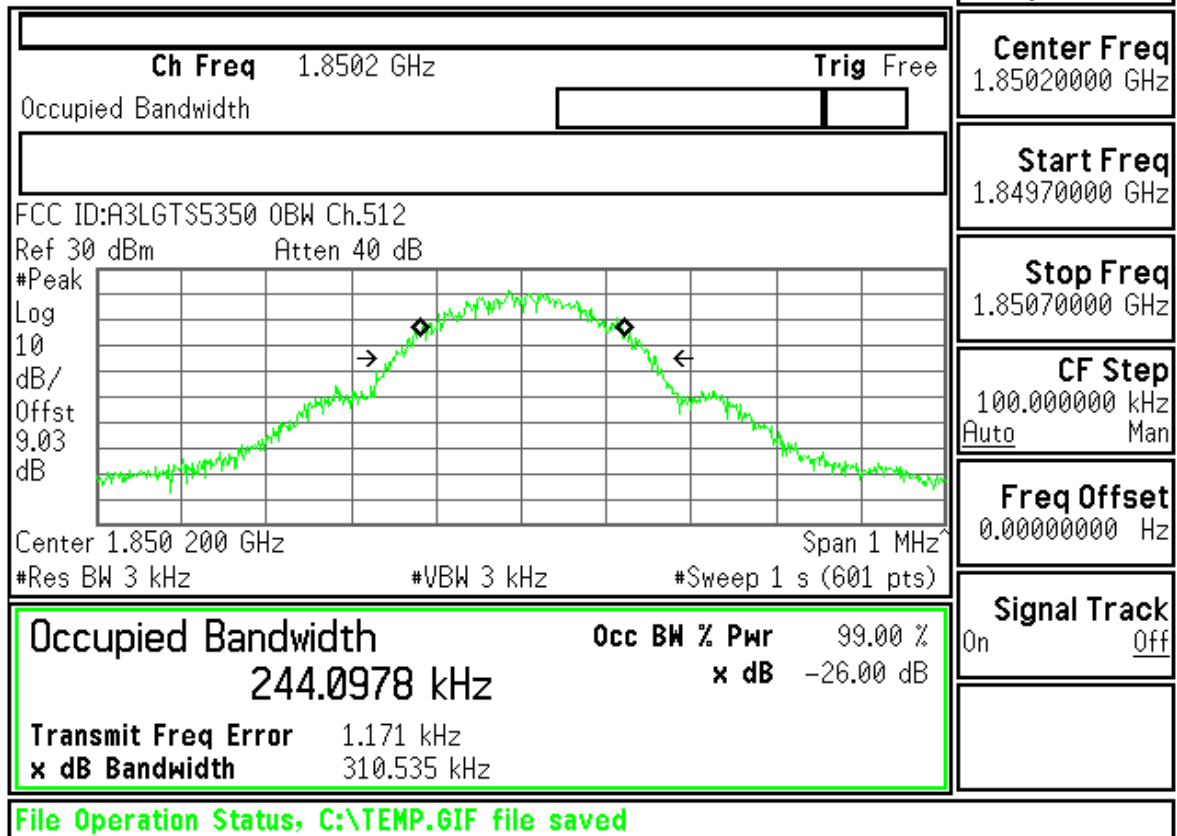


Freq/Channel
Center Freq 1.85020000 GHz
Start Freq 1.84970000 GHz
Stop Freq 1.85070000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Agilent

R T

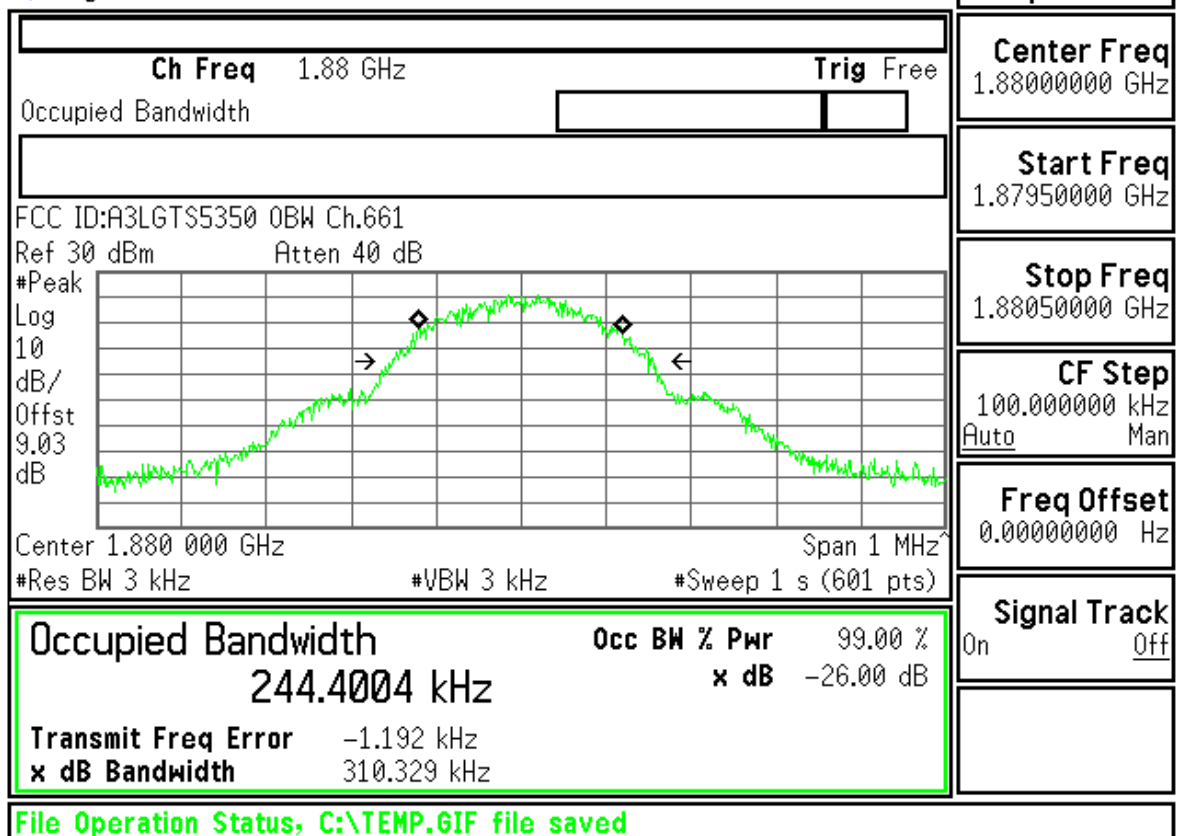

Freq/Channel
Center Freq 1.88000000 GHz
Start Freq 1.87950000 GHz
Stop Freq 1.88050000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

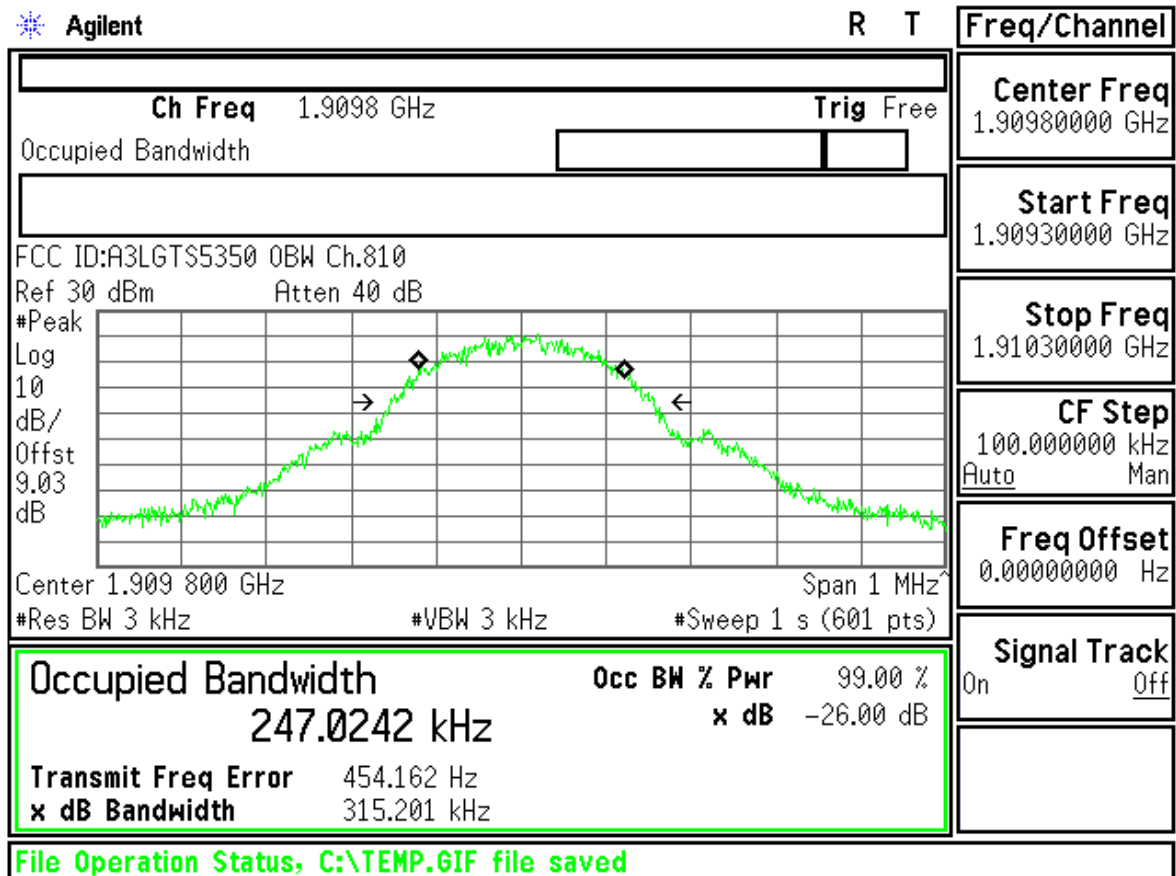

FCC ID : A3LGTS5350 Transmit Power 512CH

Measurement/Instrument Screen																																										
Control		Transmit Power								TCH Parms																																
Transmit Power Setup ▾		<table><tr><td></td><td>Burst 1</td><td>Burst 2</td><td>Burst 3</td><td>Burst 4</td></tr><tr><td>Burst Power</td><td>29.47</td><td>----</td><td>----</td><td>----</td></tr><tr><td>Estimated Carrier Power</td><td>29.47</td><td>----</td><td>----</td><td>----</td></tr></table>									Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.47	----	----	----	Estimated Carrier Power	29.47	----	----	----	Downlink Traffic Power ▾																	
											Burst 1	Burst 2	Burst 3	Burst 4																												
										Burst Power	29.47	----	----	----																												
										Estimated Carrier Power	29.47	----	----	----																												
										Traffic Band																																
PCS																																										
Swap Window Positions		<table><tr><th colspan="5">Phase & Frequency Error</th></tr><tr><td></td><td>Peak Phase °</td><td>RMS Phase °</td><td colspan="2">Frequency Hz</td></tr><tr><td>Minimum</td><td>3.87</td><td>1.13</td><td colspan="2">-23.85</td></tr><tr><td>Maximum</td><td>9.03</td><td>1.60</td><td colspan="2">-0.93</td></tr><tr><td>Average</td><td>6.56</td><td>1.32</td><td colspan="2">-12.47</td></tr><tr><td>Pass/Fail</td><td>Pass</td><td>Pass</td><td colspan="2">Pass</td></tr></table>								Phase & Frequency Error						Peak Phase °	RMS Phase °	Frequency Hz		Minimum	3.87	1.13	-23.85		Maximum	9.03	1.60	-0.93		Average	6.56	1.32	-12.47		Pass/Fail	Pass	Pass	Pass		Traffic Channel		
										Phase & Frequency Error																																
											Peak Phase °	RMS Phase °	Frequency Hz																													
										Minimum	3.87	1.13	-23.85																													
										Maximum	9.03	1.60	-0.93																													
Average	6.56	1.32	-12.47																																							
Pass/Fail	Pass	Pass	Pass																																							
512																																										
MS TX Level																																										
0																																										
1 of 2		<table><tr><td colspan="2"></td><td colspan="4">Active Cell Connected</td><td colspan="2">Sys Type: GSM</td></tr><tr><td></td><td></td><td colspan="4"></td><td colspan="2"></td></tr><tr><td></td><td></td><td>IntRef</td><td>Offset</td><td>R</td><td>T</td><td></td><td></td><td></td></tr></table>										Active Cell Connected				Sys Type: GSM												IntRef	Offset	R	T				Channel Mode Setup ▾							
												Active Cell Connected				Sys Type: GSM																										
												IntRef	Offset	R	T																											
										Return																																
1 of 2																																										

Measurement/Instrument Screen										
Control		Transmit Power						TCH Parms		
Transmit Power Setup ▾								Downlink Traffic Power ▾		
								Traffic Band		
								PCS		
								Traffic Channel		
Swap Window Positions								661		
								MS TX Level		
								0		
								Channel Mode Setup ▾		
								Return		
1 of 2								1 of 2		

Phase & Frequency Error			
	Peak Phase °	RMS Phase °	Frequency Hz
Minimum	4.98	1.22	-51.02
Maximum	10.87	1.78	-19.92
Average	7.84	1.47	-35.00
Pass/Fail	Pass	Pass	Pass

50 / 50 Single

		Active Cell Connected		Sys Type: GSM	


Measurement/Instrument Screen										
Control		Transmit Power						TCH Parms		
Transmit Power Setup ▾								Downlink Traffic Power ▾		
								Traffic Band		
								PCS		
								Traffic Channel		
Swap Window Positions								810		
								MS TX Level		
								0		
								Channel Mode Setup ▾		
								Return		
1 of 2								1 of 2		

Phase & Frequency Error			
	Peak Phase °	RMS Phase °	Frequency Hz
Minimum	3.98	1.12	-45.23
Maximum	11.11	1.66	-20.34
Average	7.43	1.43	-33.40
Pass/Fail	Pass	Pass	Pass


50 / 50 Single

		Active Cell Connected		Sys Type: GSM	


FCC ID : A3LGTS5350 GMSK Power vs Time 512CH

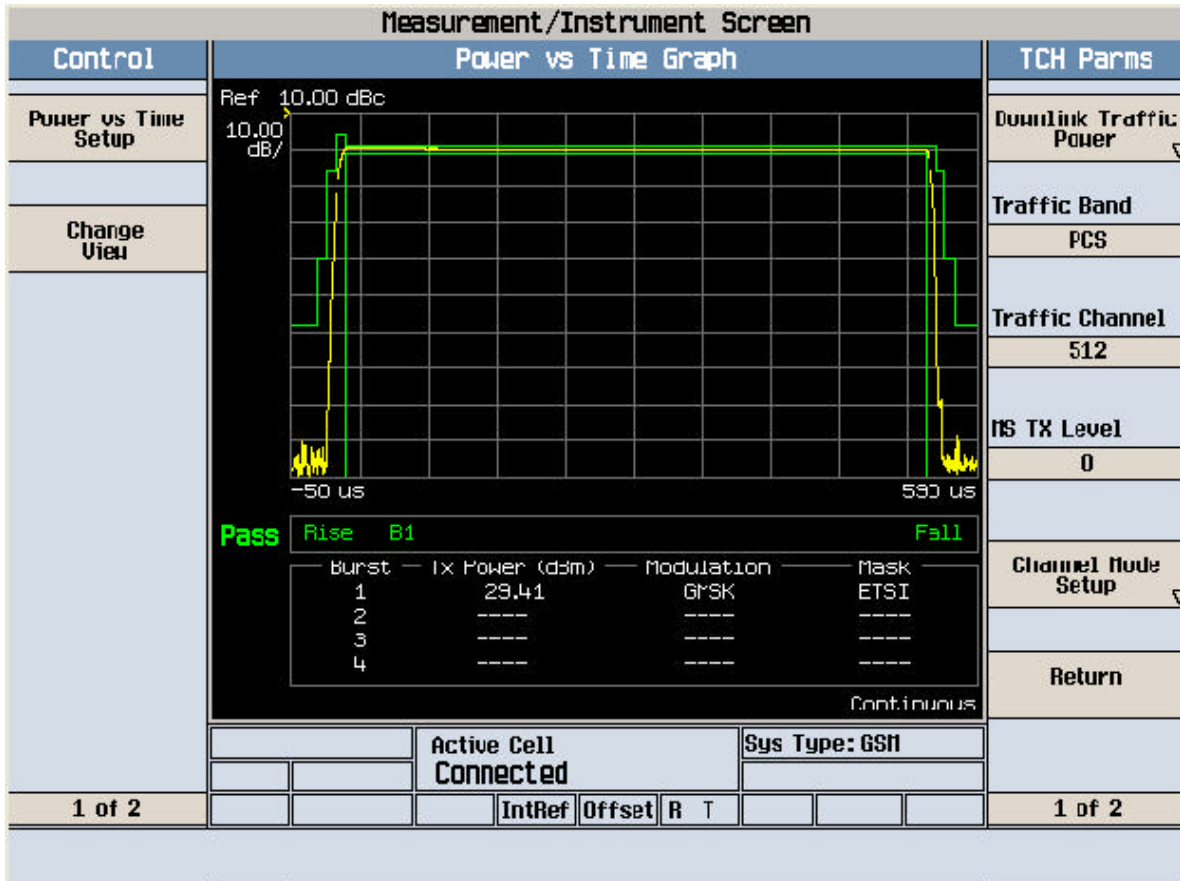


FCC ID : A3LGTS5350 GMSK Power vs Time 661CH

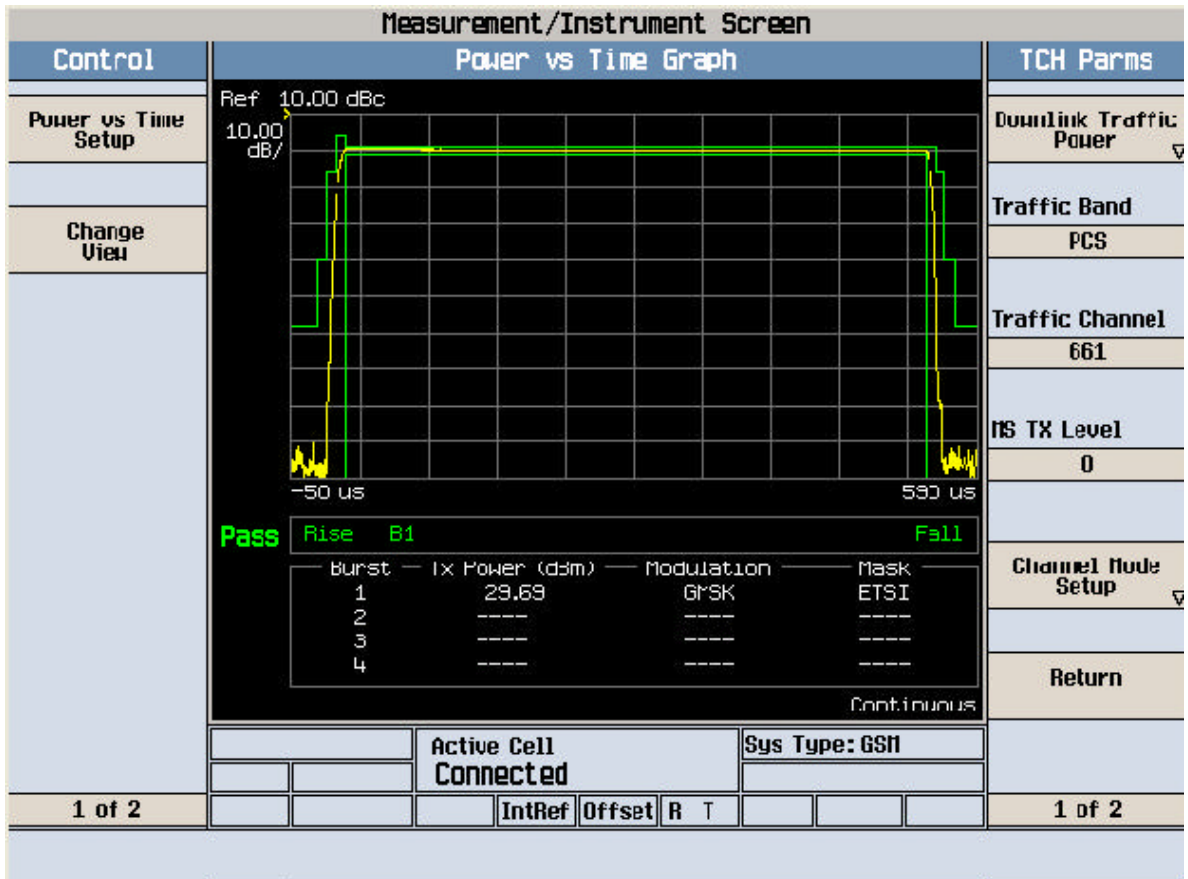


FCC ID : A3LGTS5350 GMSK Power vs Time 810CH

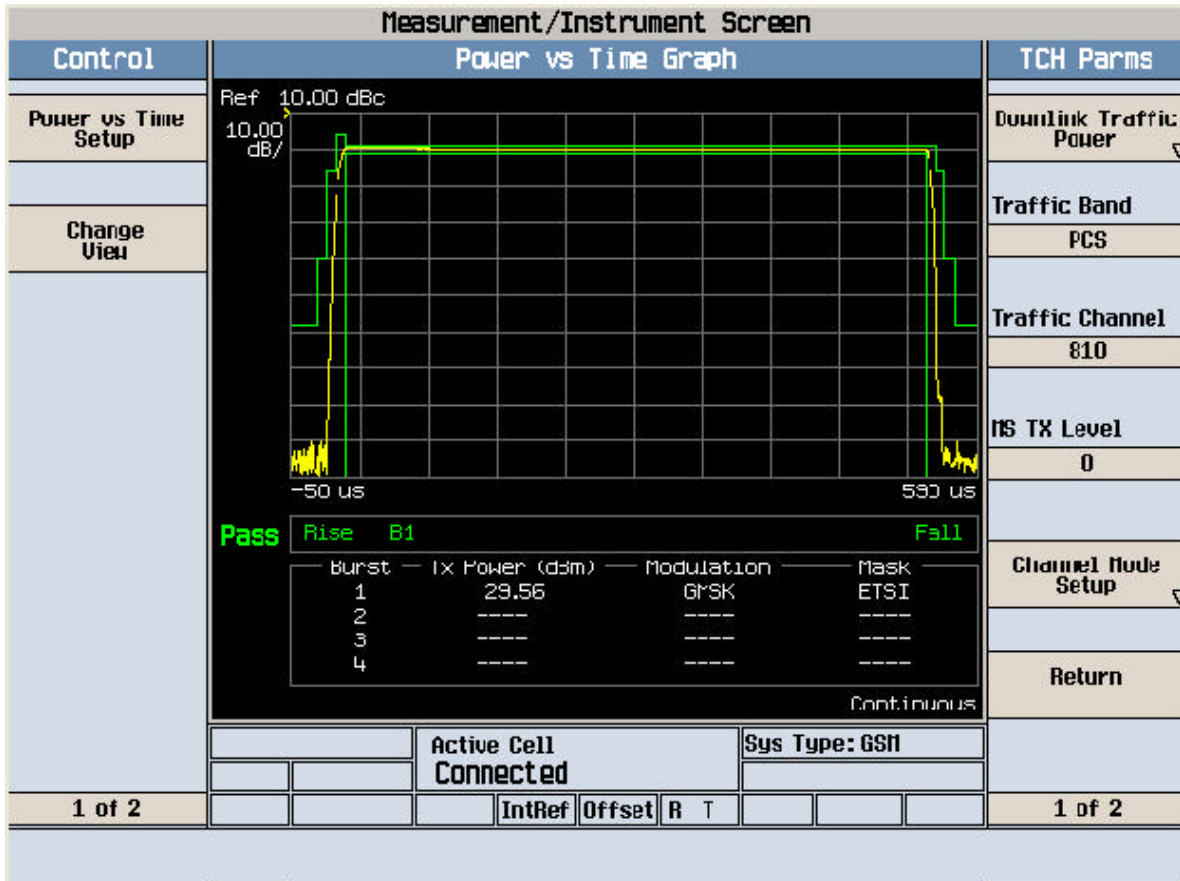


FCC ID : A3LGTS5350 Modulation & Switching 512CH


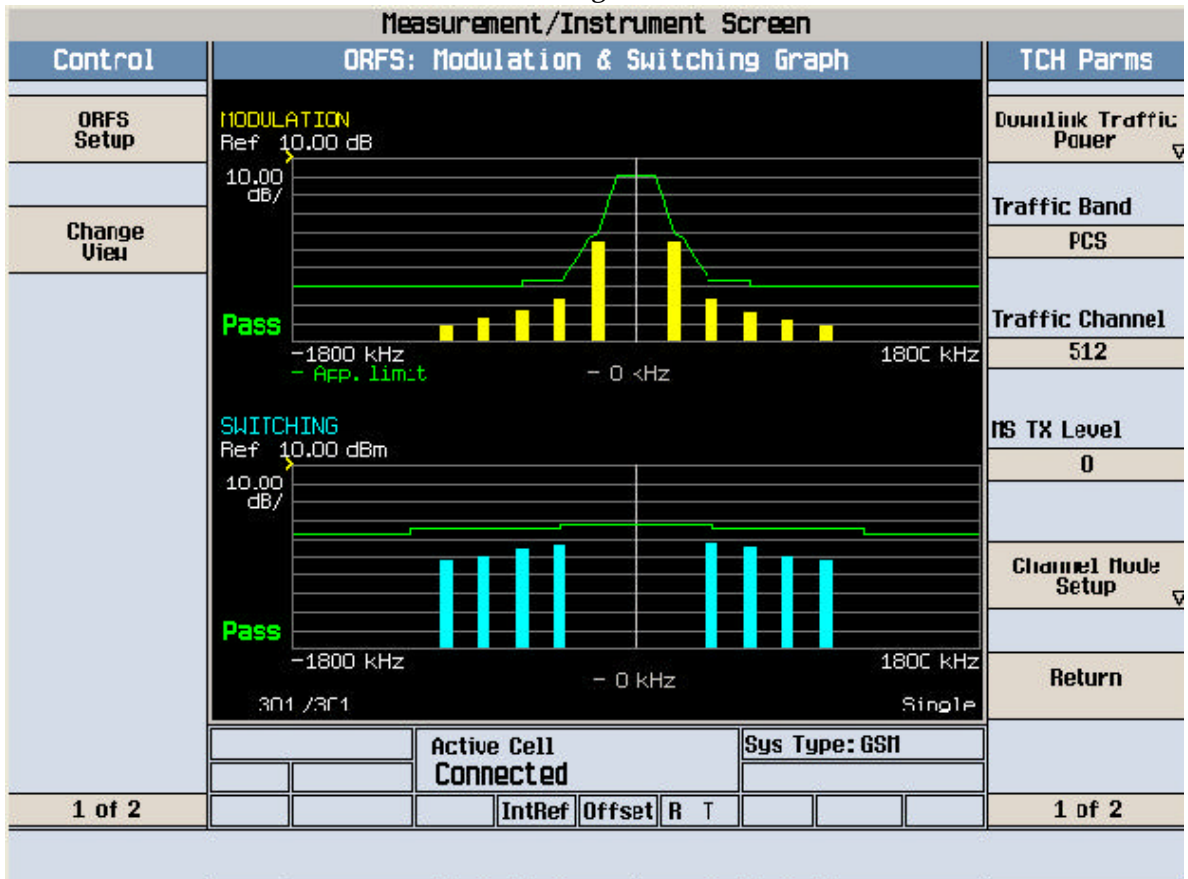




FCC ID : A3LGTS5350 Modulation & Switching 661CH


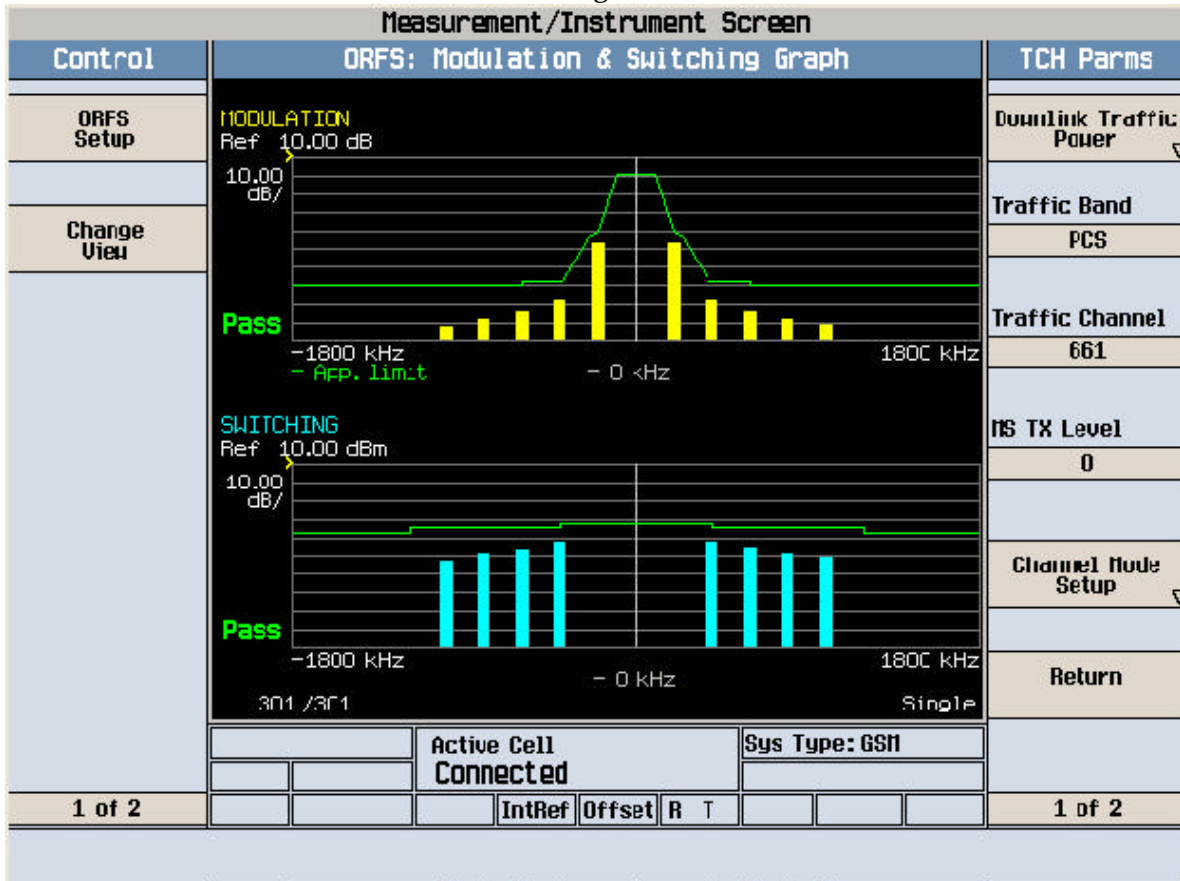




FCC ID : A3LGTS5350 Modulation & Switching 810CH


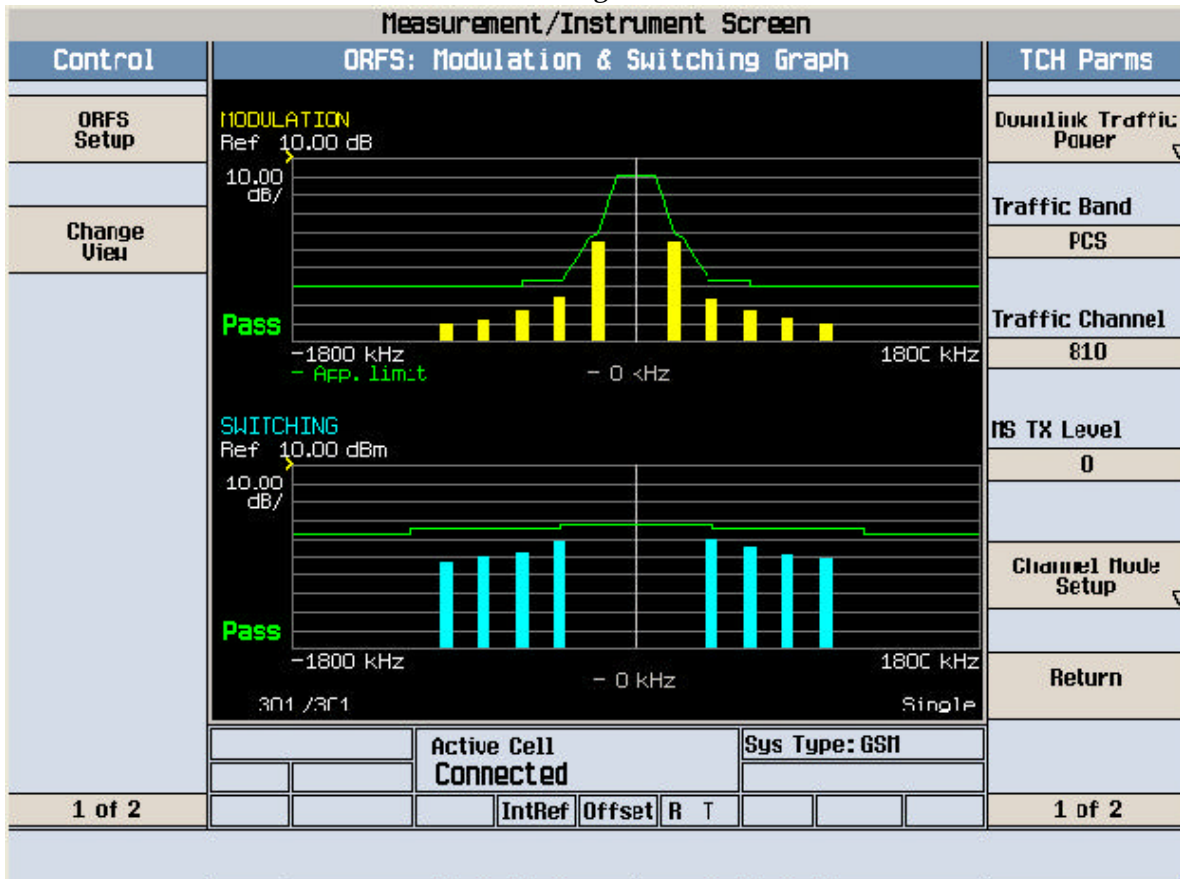


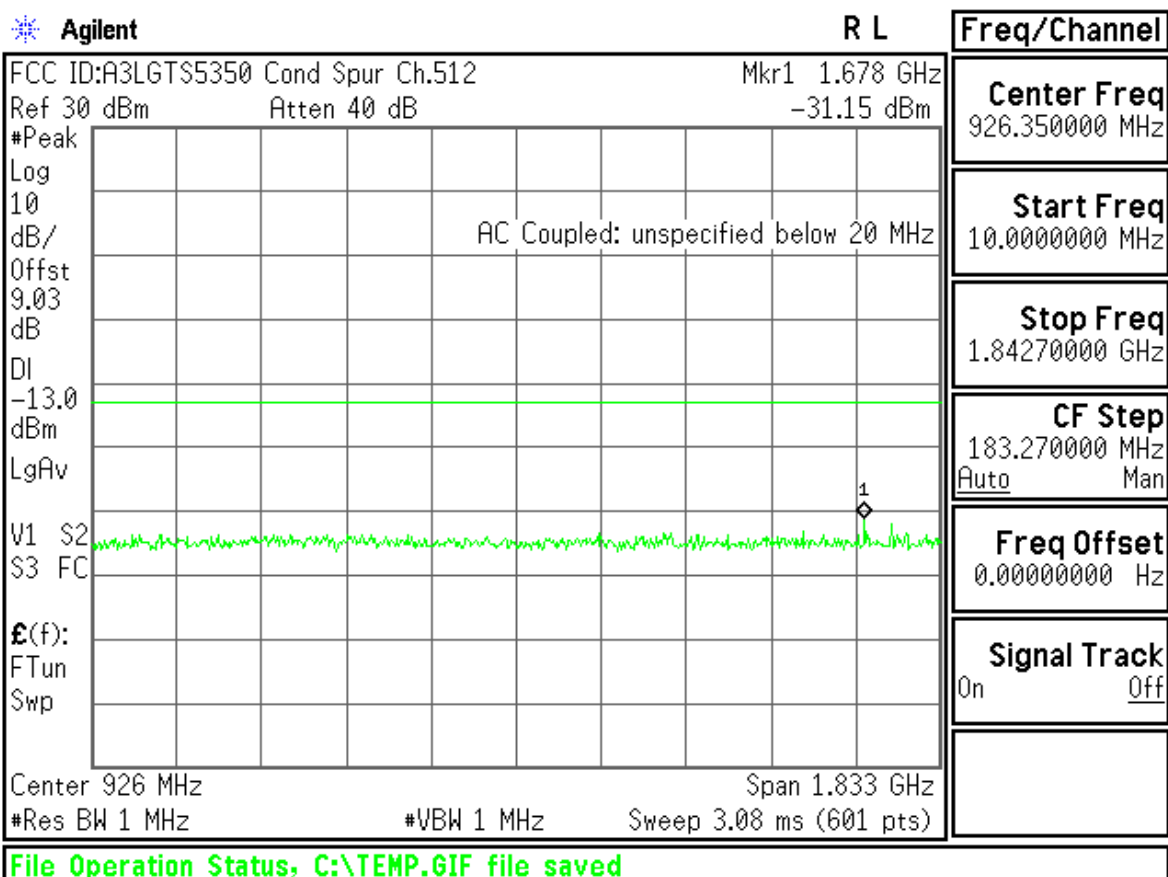
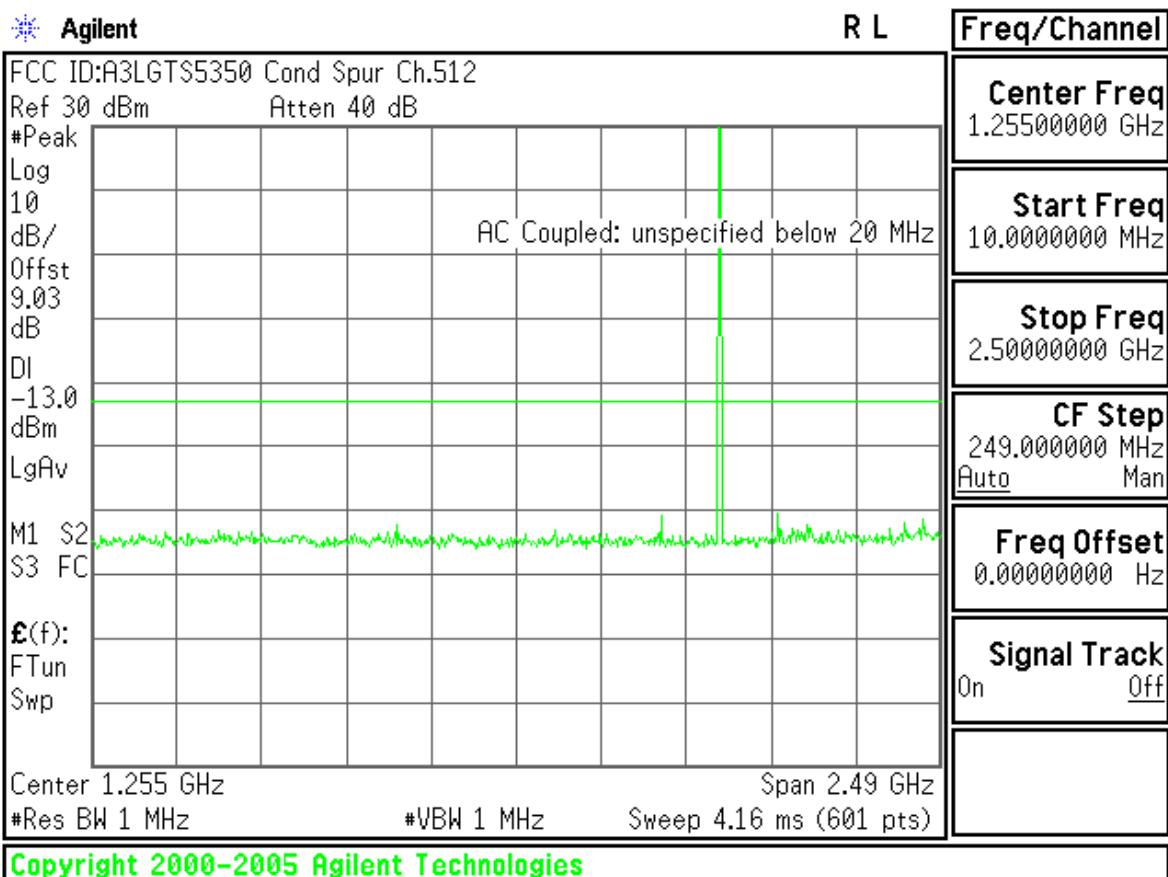


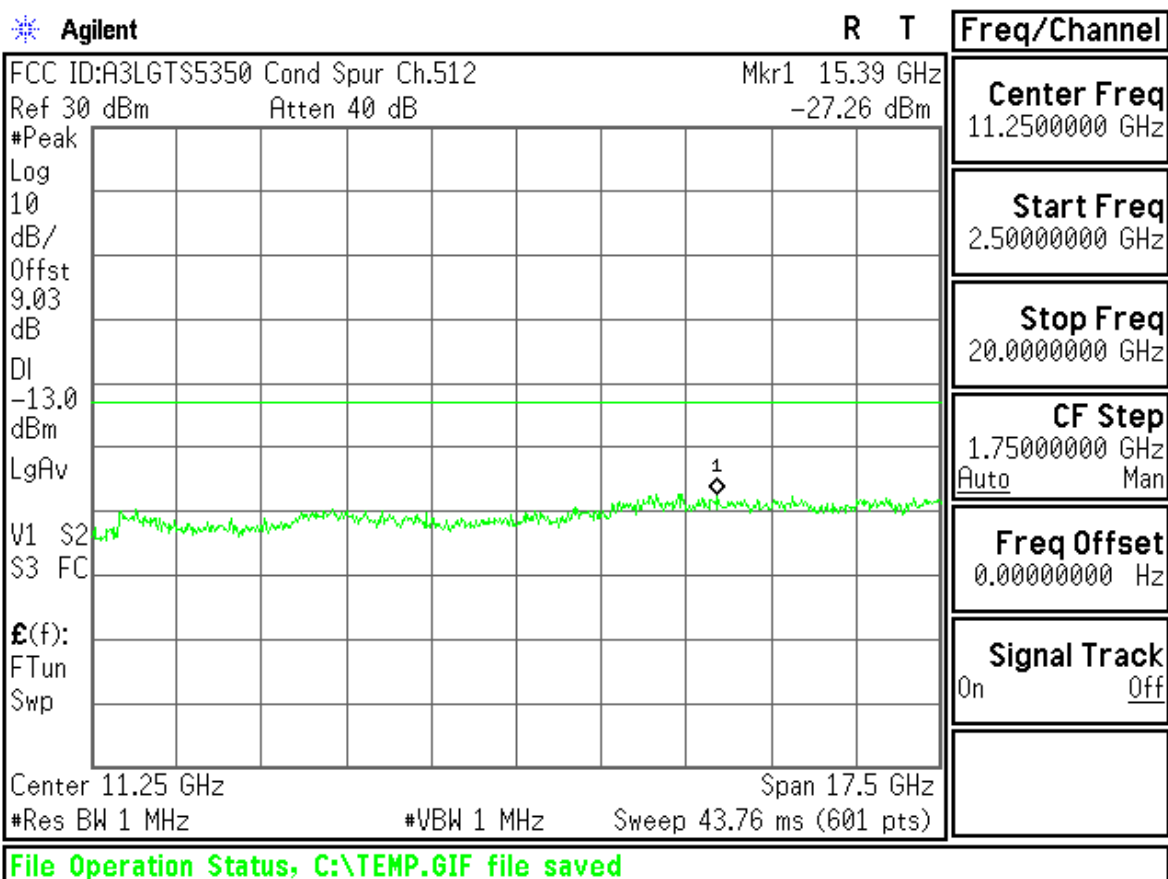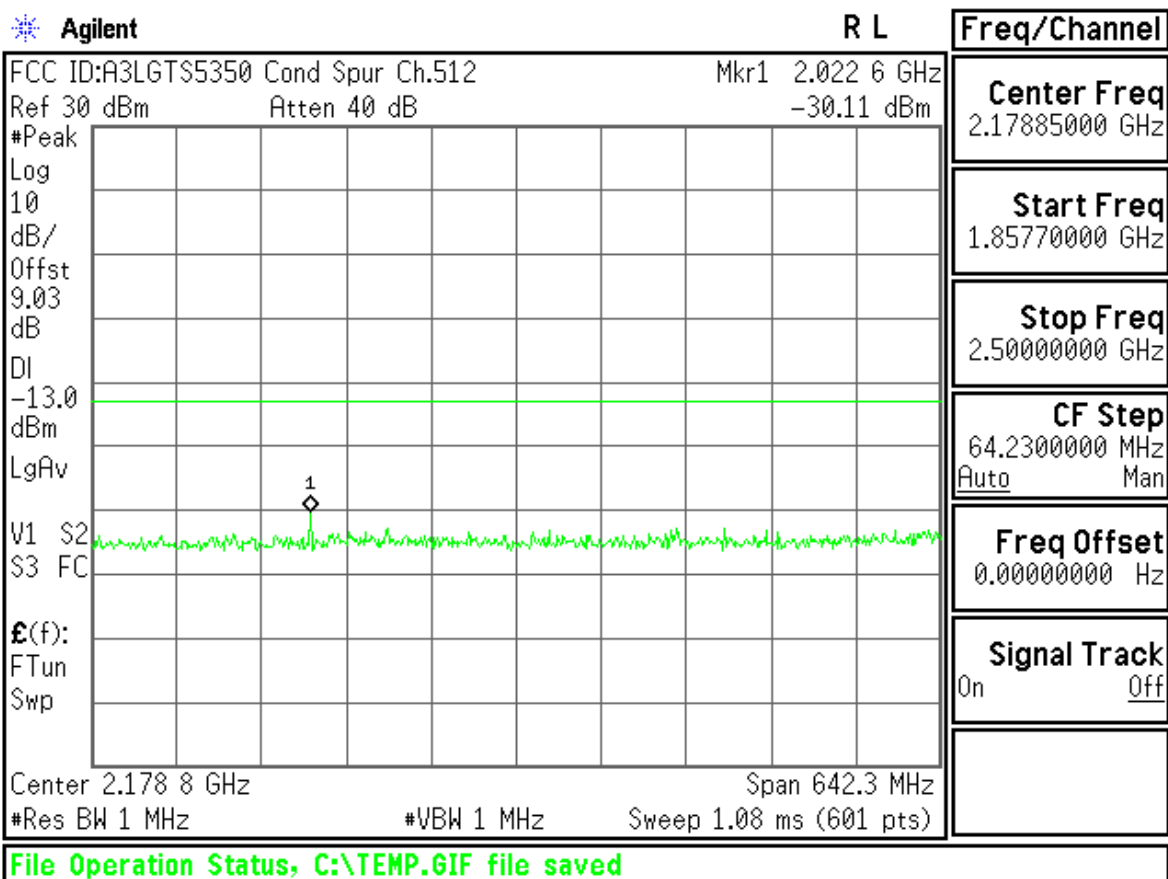

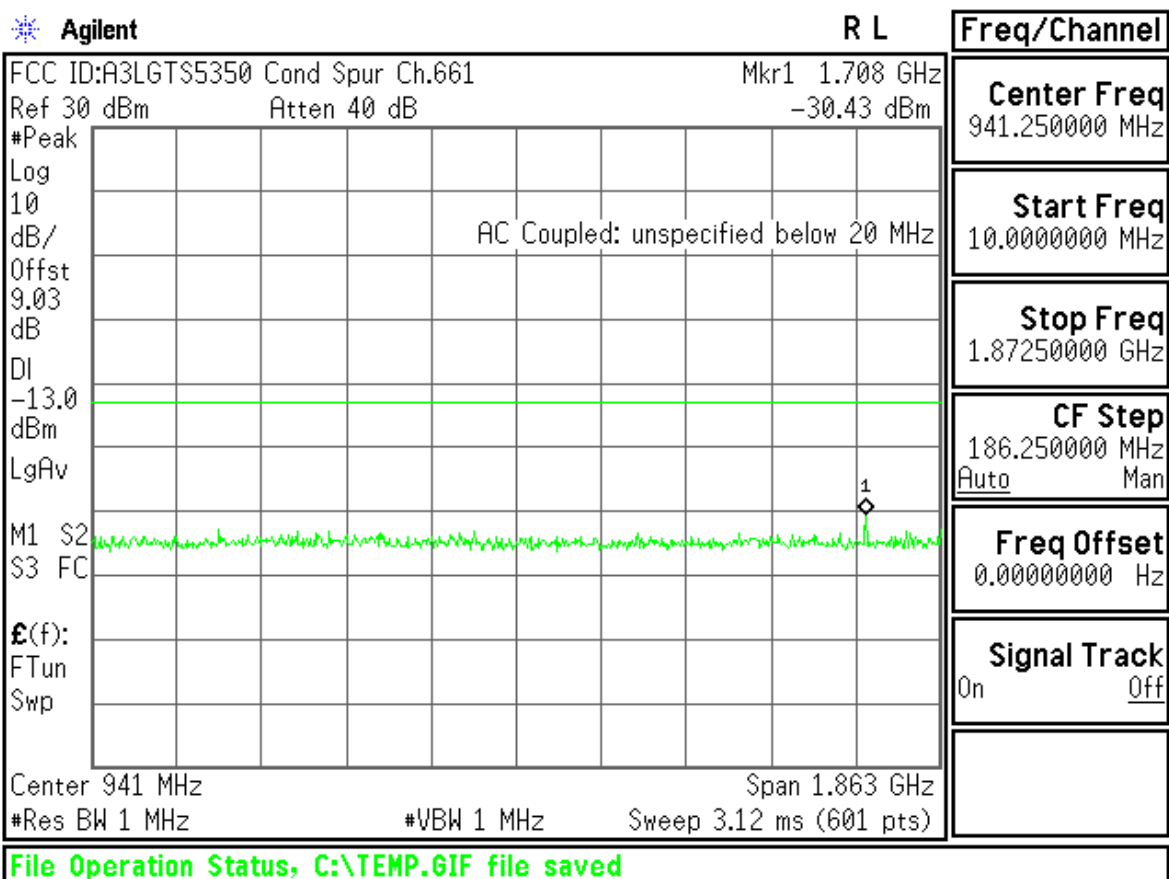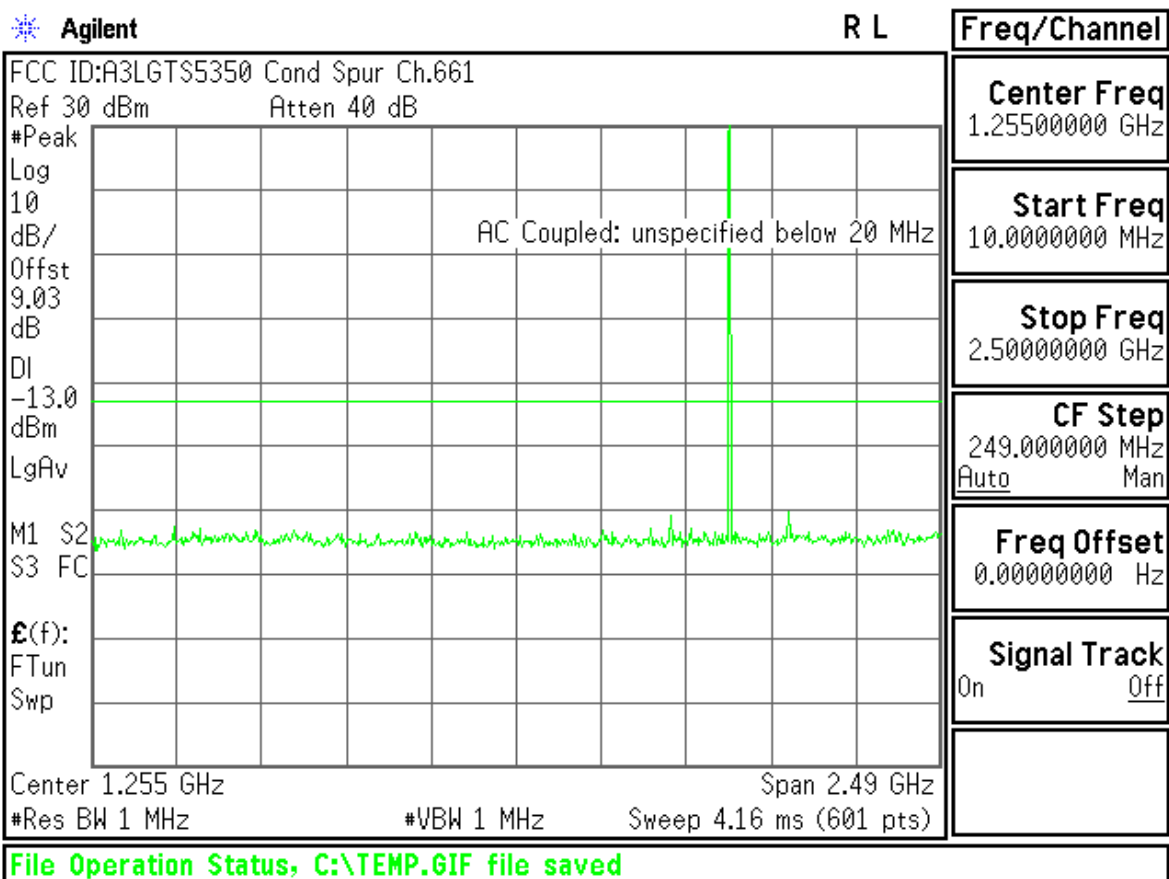

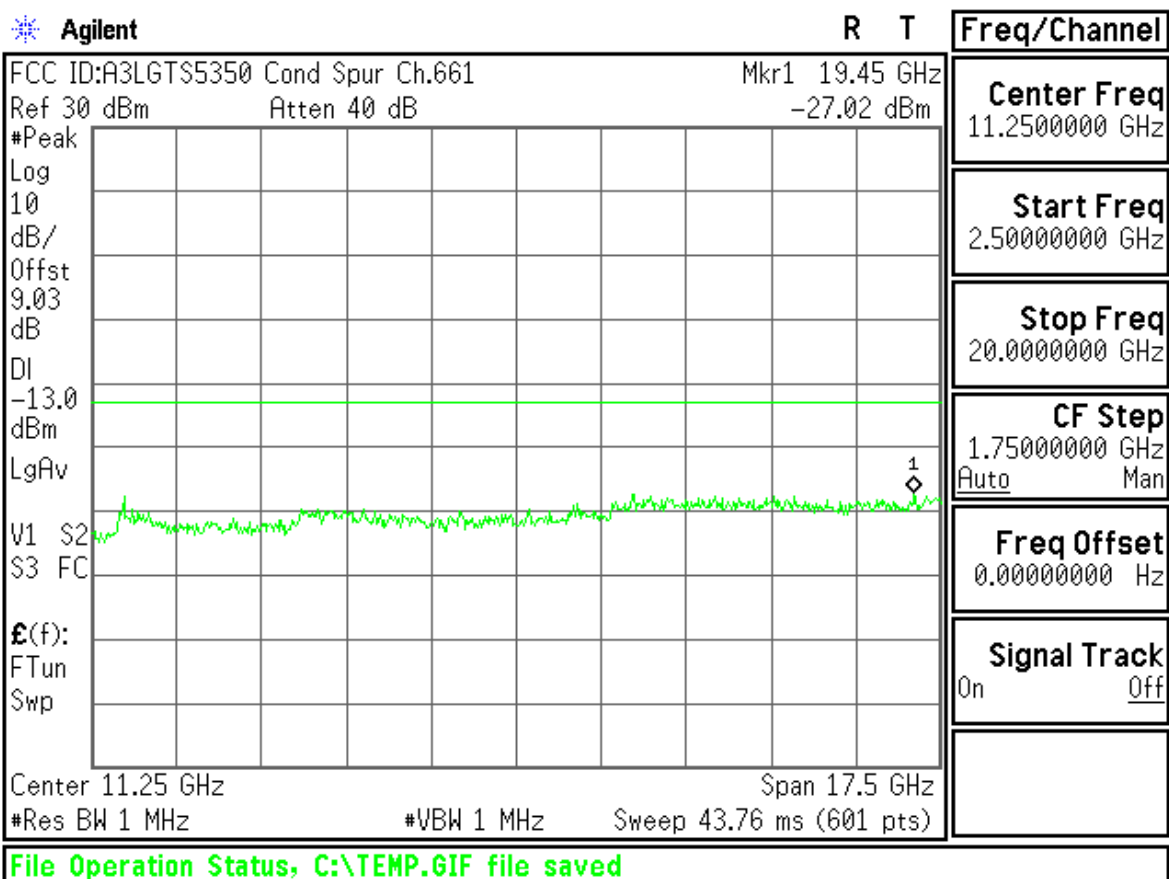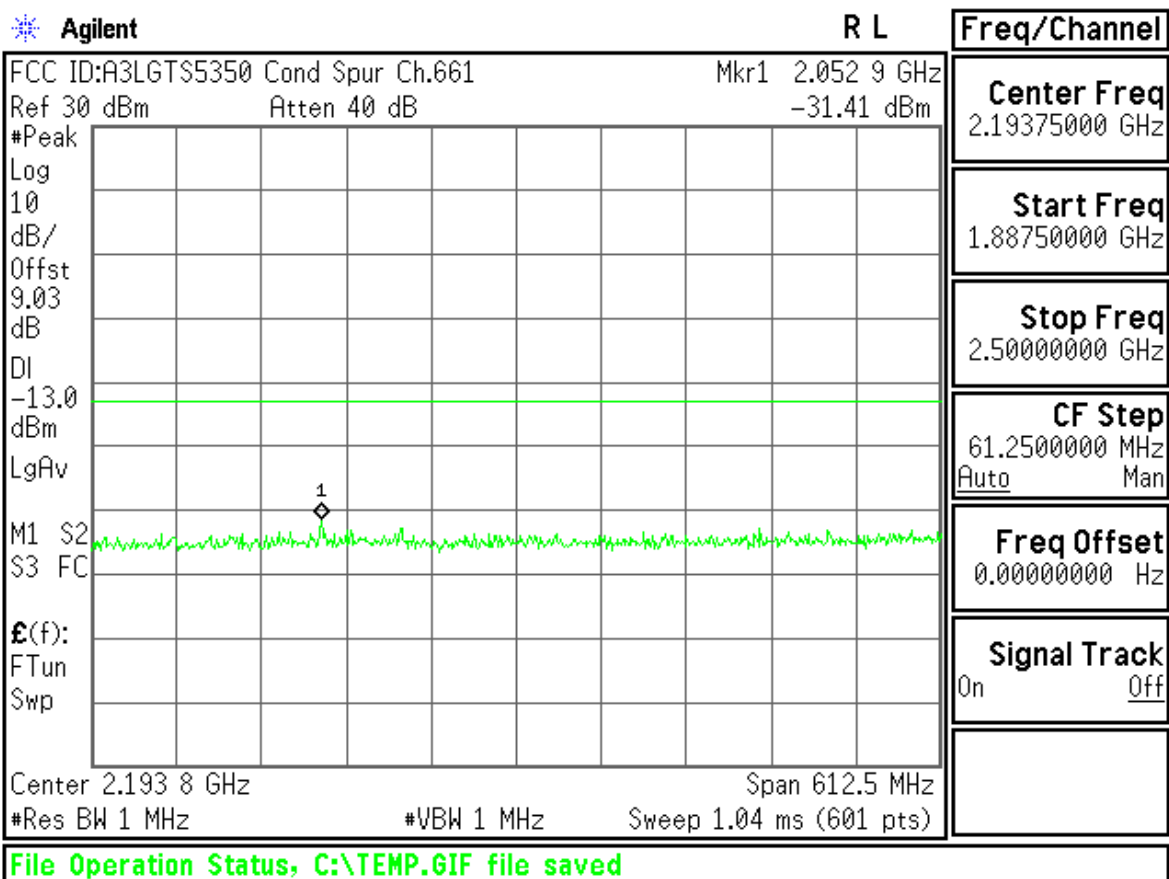

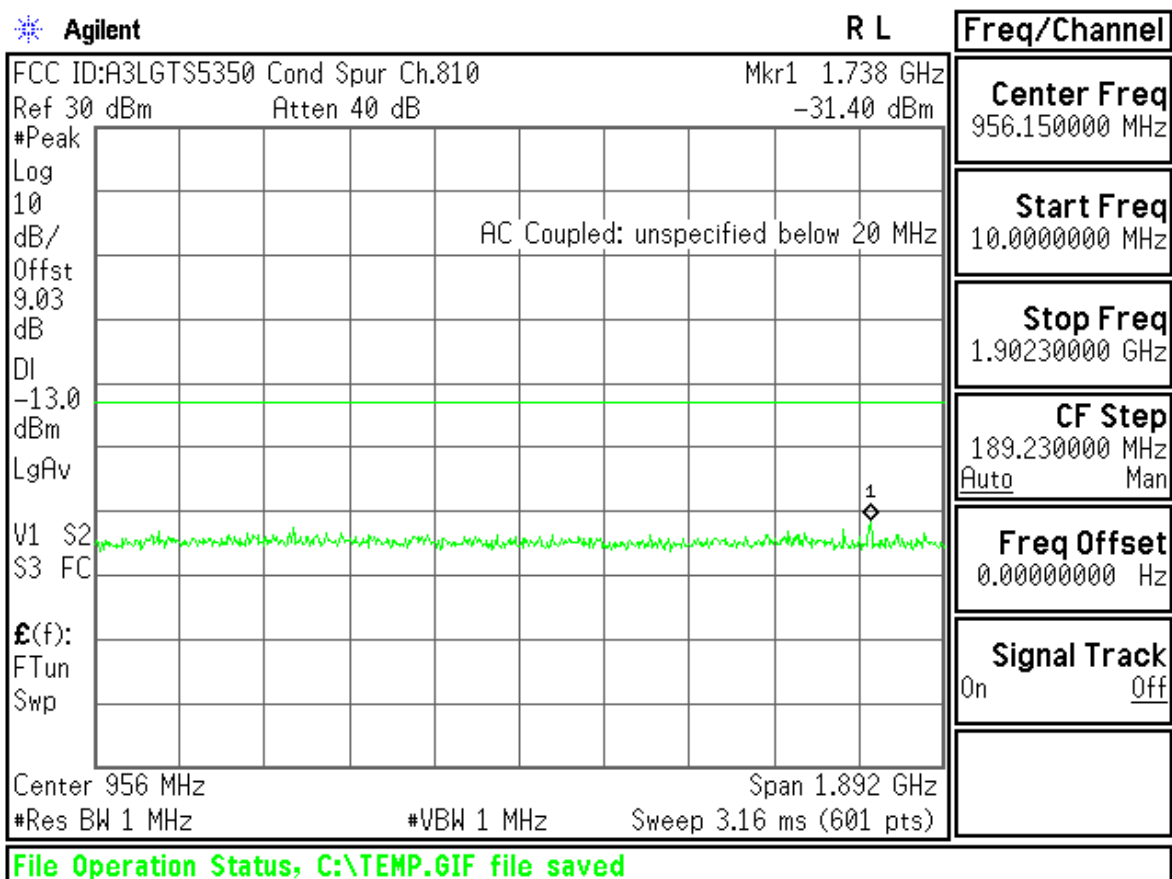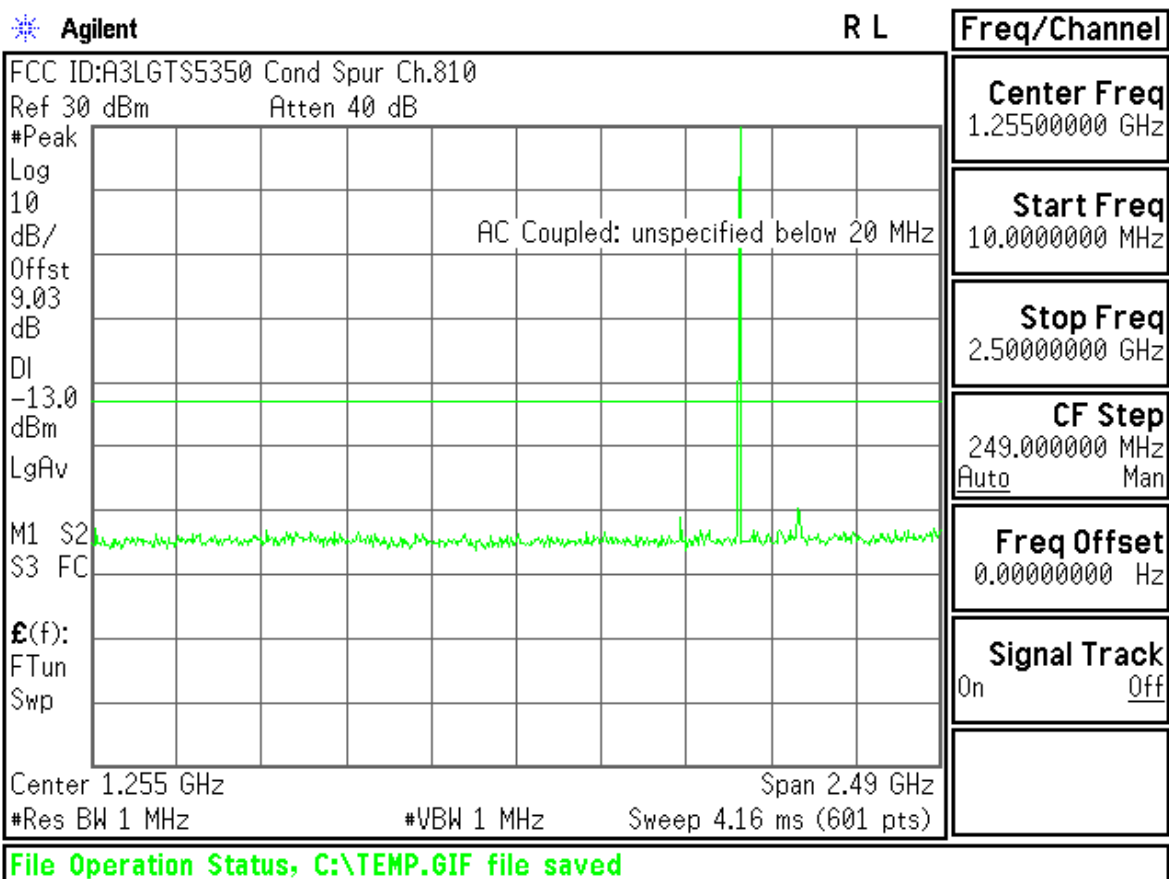

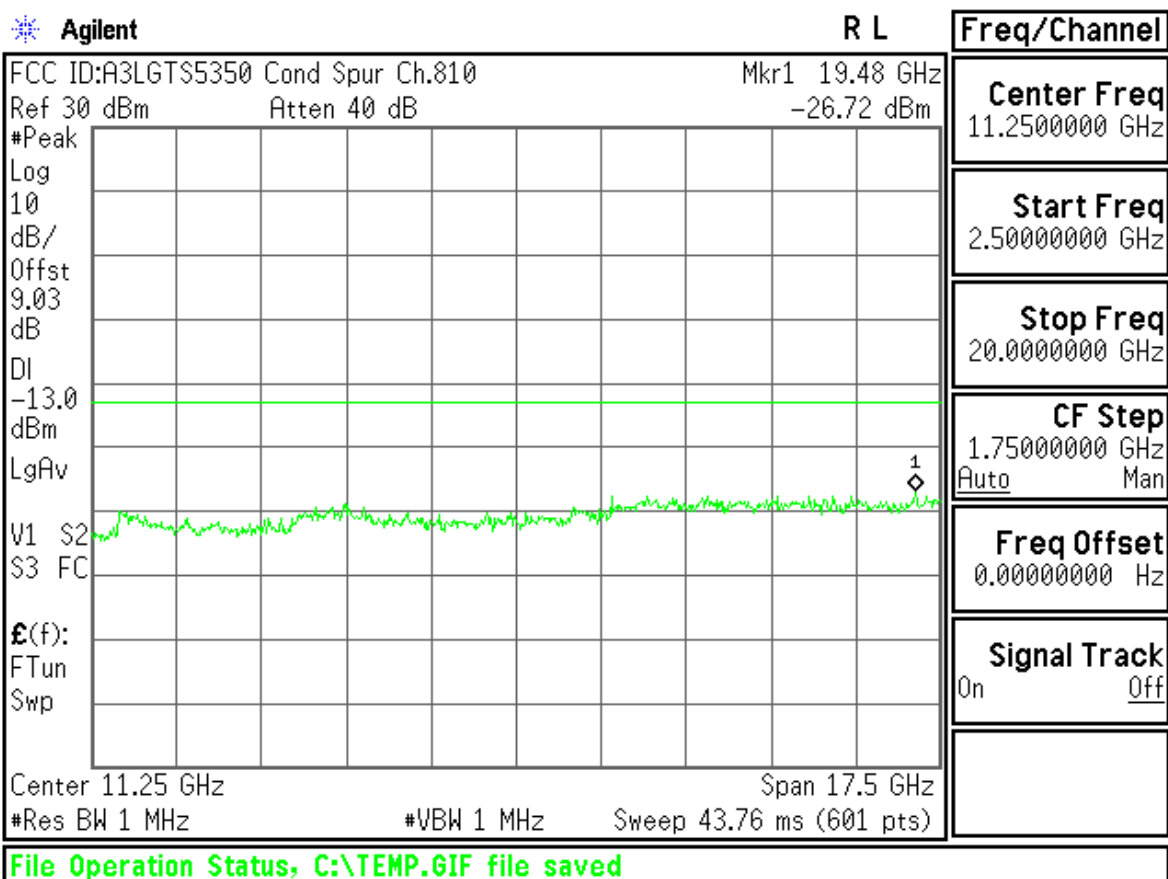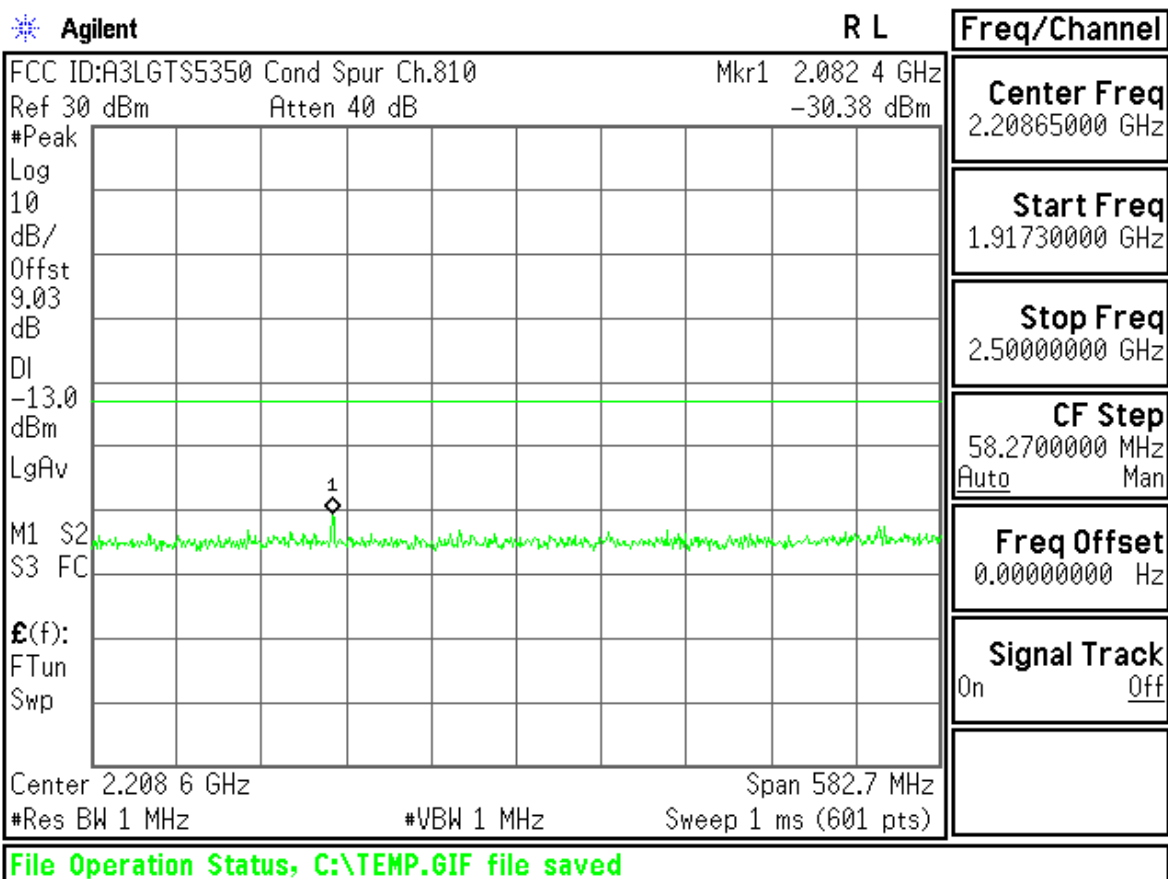

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5350 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

9.03

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

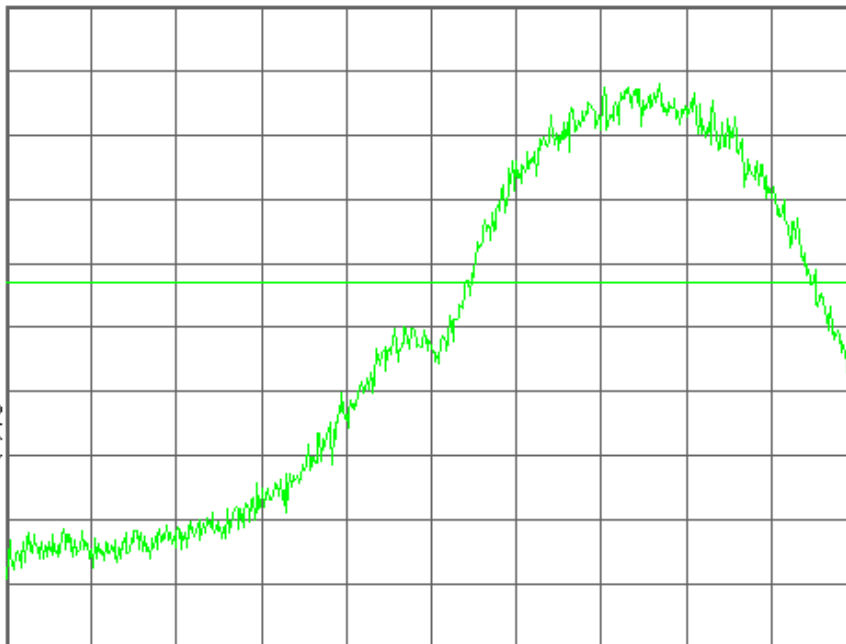

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5350 Band Edge Ch.512

Mkr1 1.849 981 3 GHz

Ref 30 dBm

Atten 40 dB

-19.14 dBm

#Avg

Log

10

dB/

Offst

9.03

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

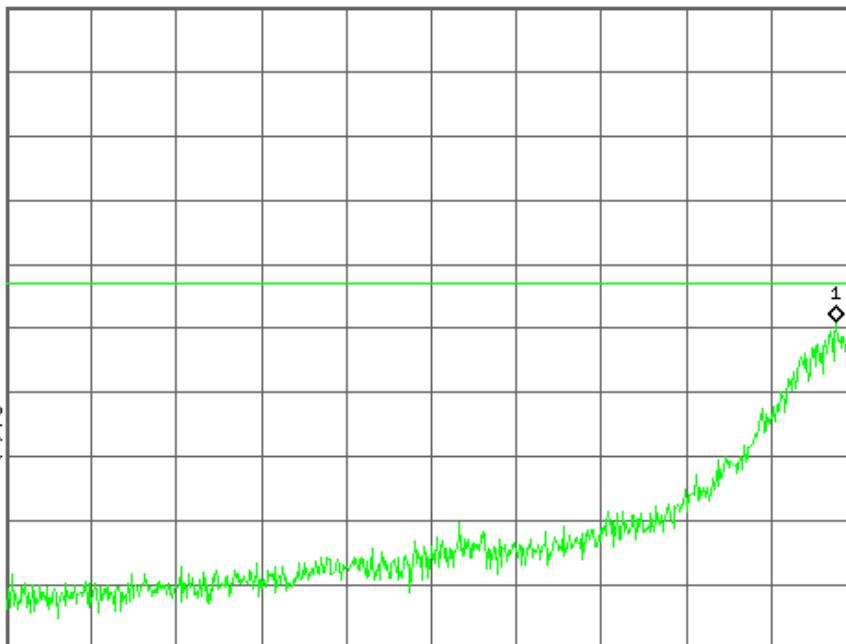

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$5350 Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

9.03

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

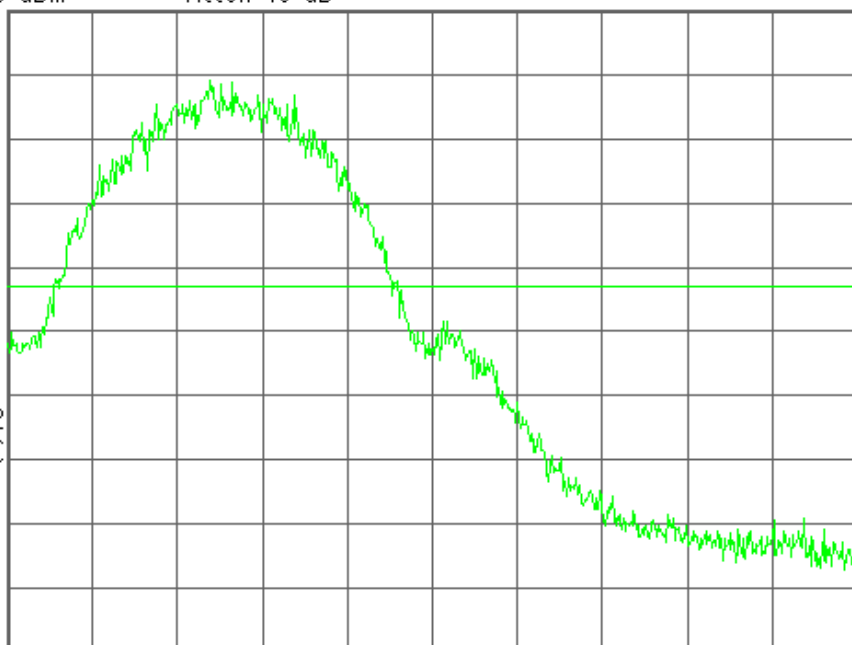

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$5350 Band Edge Ch.810

Mkr1 1.910 020 4 GHz

Ref 30 dBm

Atten 40 dB

-18.79 dBm

#Avg

Log

10

dB/

Offst

9.03

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

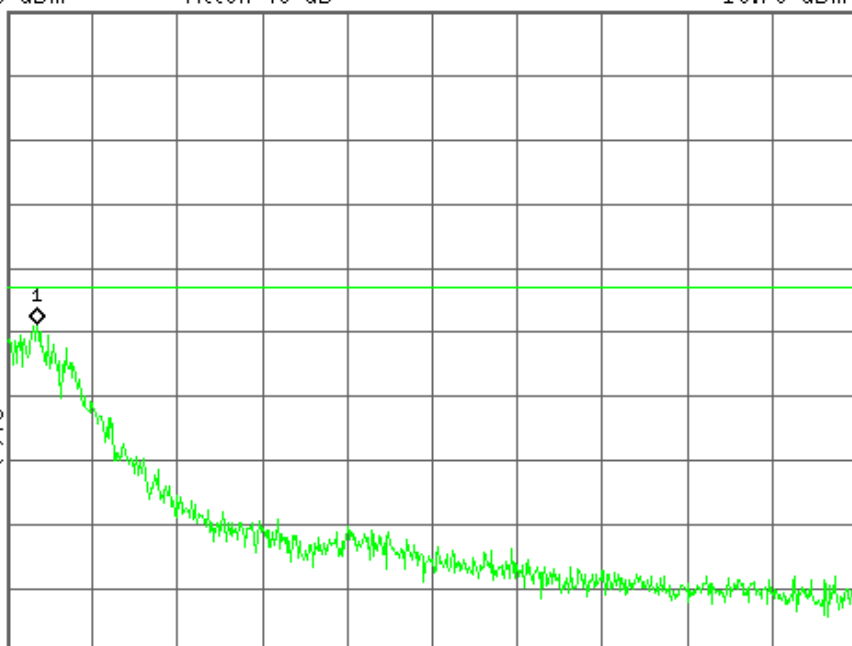

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz


Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

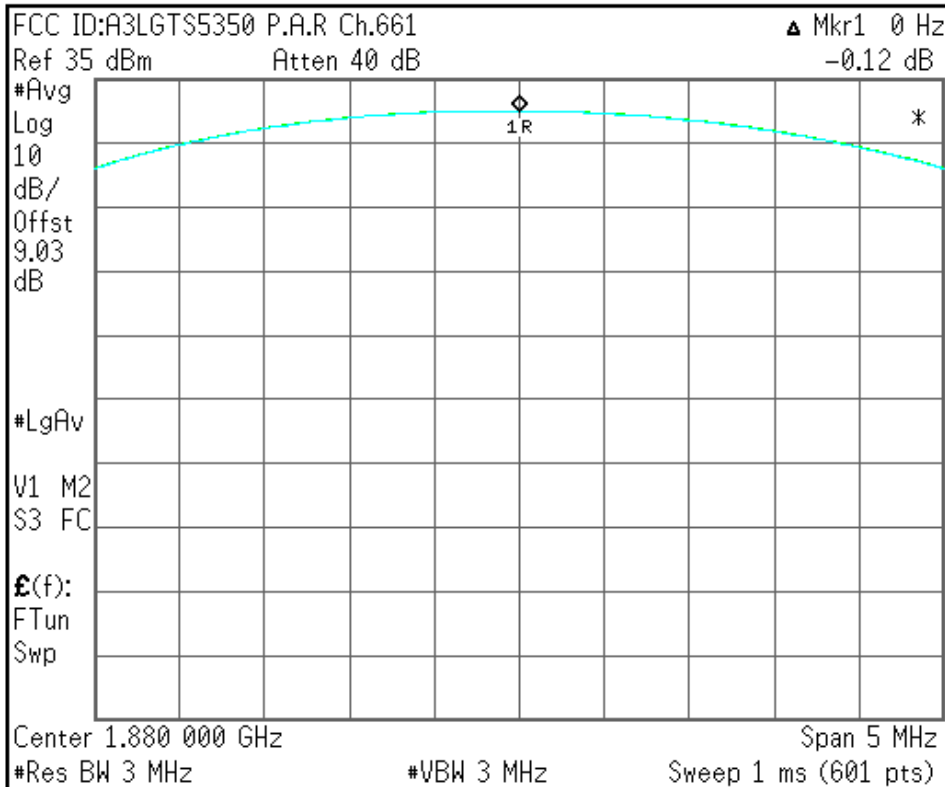

Center Freq
 1.88000000 GHz

Start Freq
 1.87750000 GHz

Stop Freq
 1.88250000 GHz

CF Step
 500.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

EDGE850

 Agilent

R T

Freq/Channel

Ch Freq 824.2 MHz Trig Free

Occupied Bandwidth

Center Freq
824.200000 MHz

Start Freq
823.700000 MHz

Stop Freq
824.700000 MHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGT55350 0BW Ch.128 EDGE

Ref 27 dBm Atten 30 dB

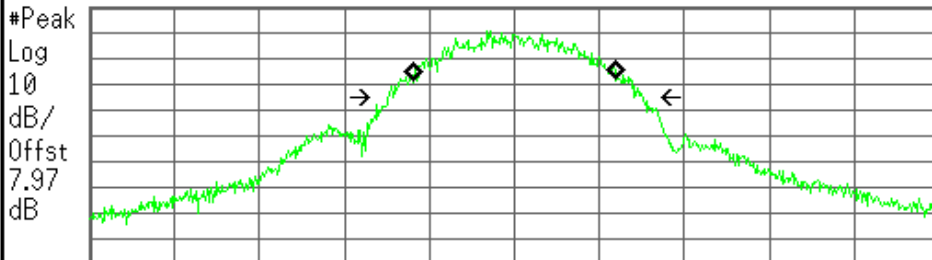

Center 824.200 MHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz

#Sweep 1 s (601 pts)

Occupied Bandwidth
243.2220 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 677.862 Hz
x dB Bandwidth 303.258 kHz

File Operation Status, C:\TEMP.GIF file saved

 Agilent

R T

Freq/Channel

Ch Freq 836.6 MHz Trig Free

Occupied Bandwidth

Center Freq
836.600000 MHz

Start Freq
836.100000 MHz

Stop Freq
837.100000 MHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGT55350 0BW Ch.190 EDGE

Ref 27 dBm Atten 30 dB

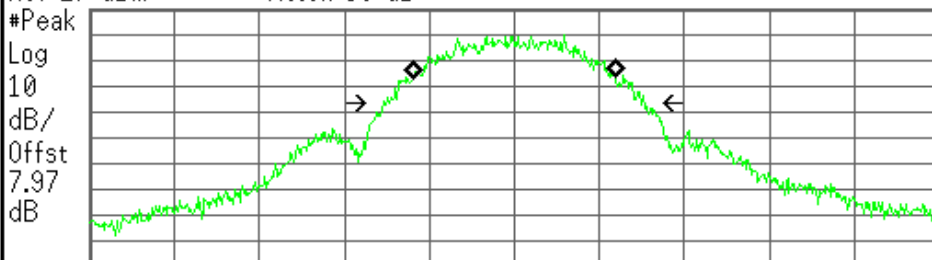

Center 836.600 MHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz


#Sweep 1 s (601 pts)

Occupied Bandwidth
242.3145 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -840.961 Hz
x dB Bandwidth 309.881 kHz

File Operation Status, C:\TEMP.GIF file saved


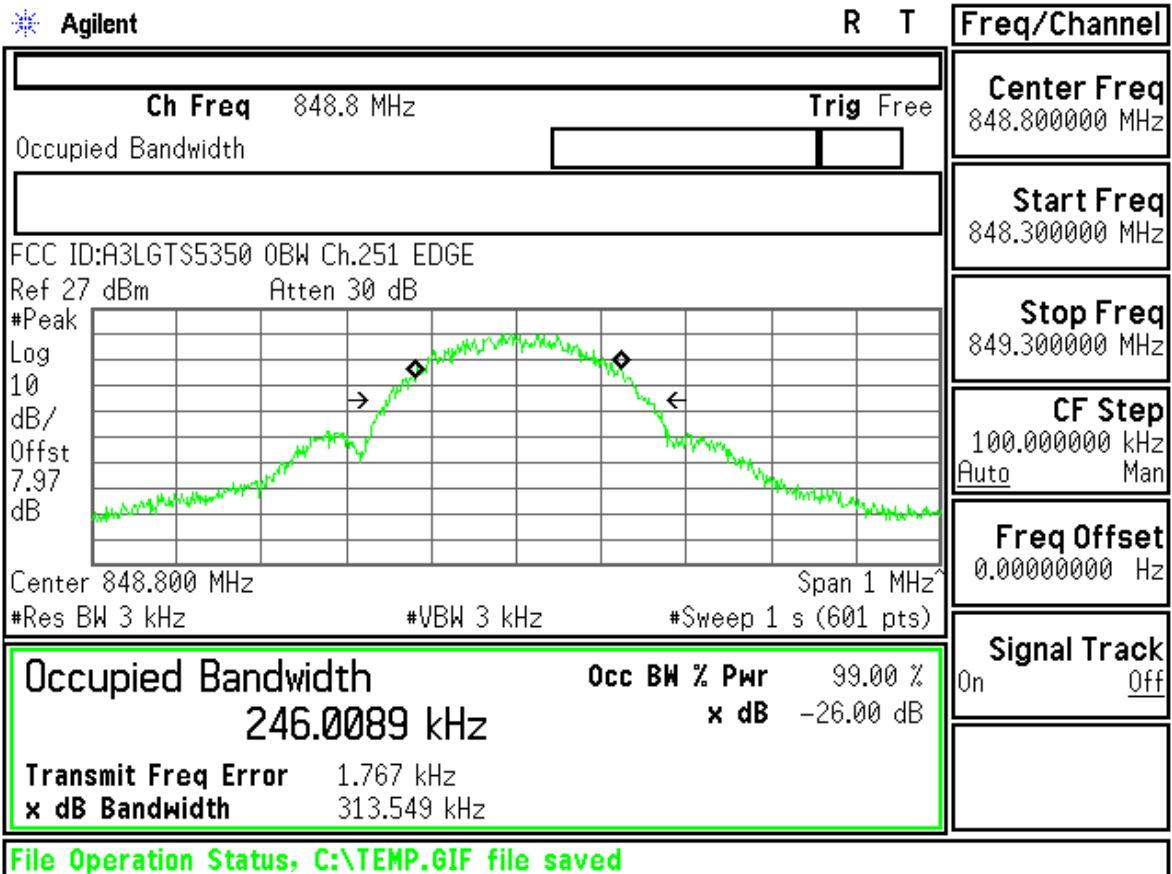




FCC ID : A3LGTS5350 Transmit Power 128CH EDGE

Control	EGPRS Transmit Power								PDCH Params			
EGPRS Transmit Power Setup ▾	EPK Burst Power				EPK Est Carrier Power				DownLink Traffic Power ▾			
	Minimum		Maximum		Minimum		Maximum		Traffic Band			
	24.91 dBm		26.20 dBm		25.61 dBm		25.63 dBm		GSM850			
	Average		Std Dev		Average		Std Dev		Traffic Channel			
	25.60 dBm		0.21 dBm		25.62 dBm		0.00 dBm		128			
	200 /200				Single							
									HS TX Level ▾			
											Modulation Coding Scheme ▾	
											Return	
		Active Cell Transferring				Sys Type: EGPRS						
1 of 2					IntRef	Offset	R	T	1 of 2			

Control	EGPRS Transmit Power								PD TCH Parms			
EGPRS Transmit Power Setup ▾	EP SK Burst Power				EP SK Est Carrier Power				Downlink Traffic Power ▾			
	Minimum		Maximum		Minimum		Maximum		Traffic Band			
	25.02 dBm		26.16 dBm		25.70 dBm		25.72 dBm		GS1850			
	Average		Std Dev		Average		Std Dev		Traffic Channel			
	25.66 dBm		0.21 dBm		25.71 dBm		0.00 dBm		190			
	200 / 200				Single							
									NS TX Level ▾			
									Modulation Coding Scheme ▾			
									Return			
			Active Cell Transferring				Sys Type: EGPRS					
1 of 2				IntRef	Offset	R	T				1 of 2	

Control	EGPRS Transmit Power										PDTCH Parms	
EGPRS Transmit Power Setup ▾	EP SK Burst Power					EP SK Est Carrier Power					Downlink Traffic Power ▾	
	Minimum		Maximum			Minimum		Maximum			Traffic Band	
	24.98 dBm		26.26 dBm			25.75 dBm		25.78 dBm			GS1850	
	Average		Std Dev			Average		Std Dev			Traffic Channel	
	25.70 dBm		0.22 dBm			25.76 dBm		0.01 dBm			251	
	200 / 200										Single	

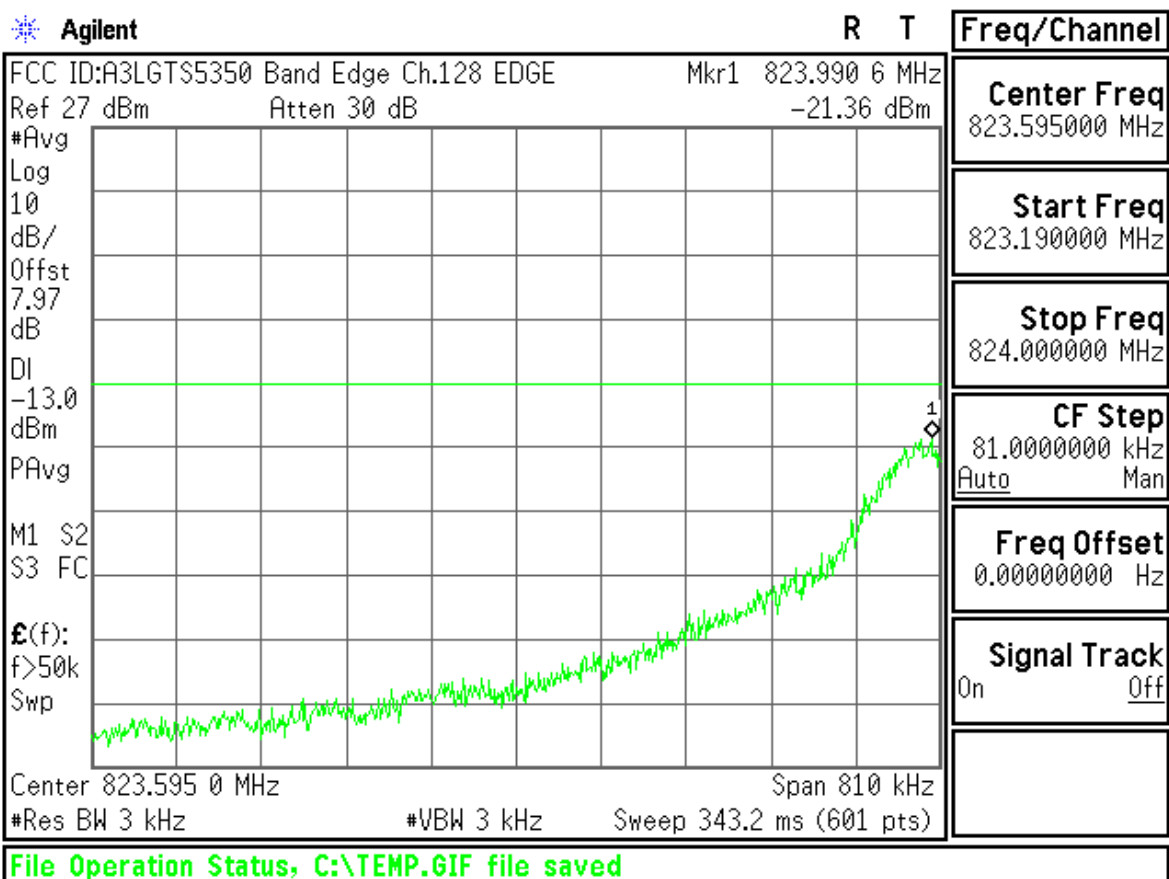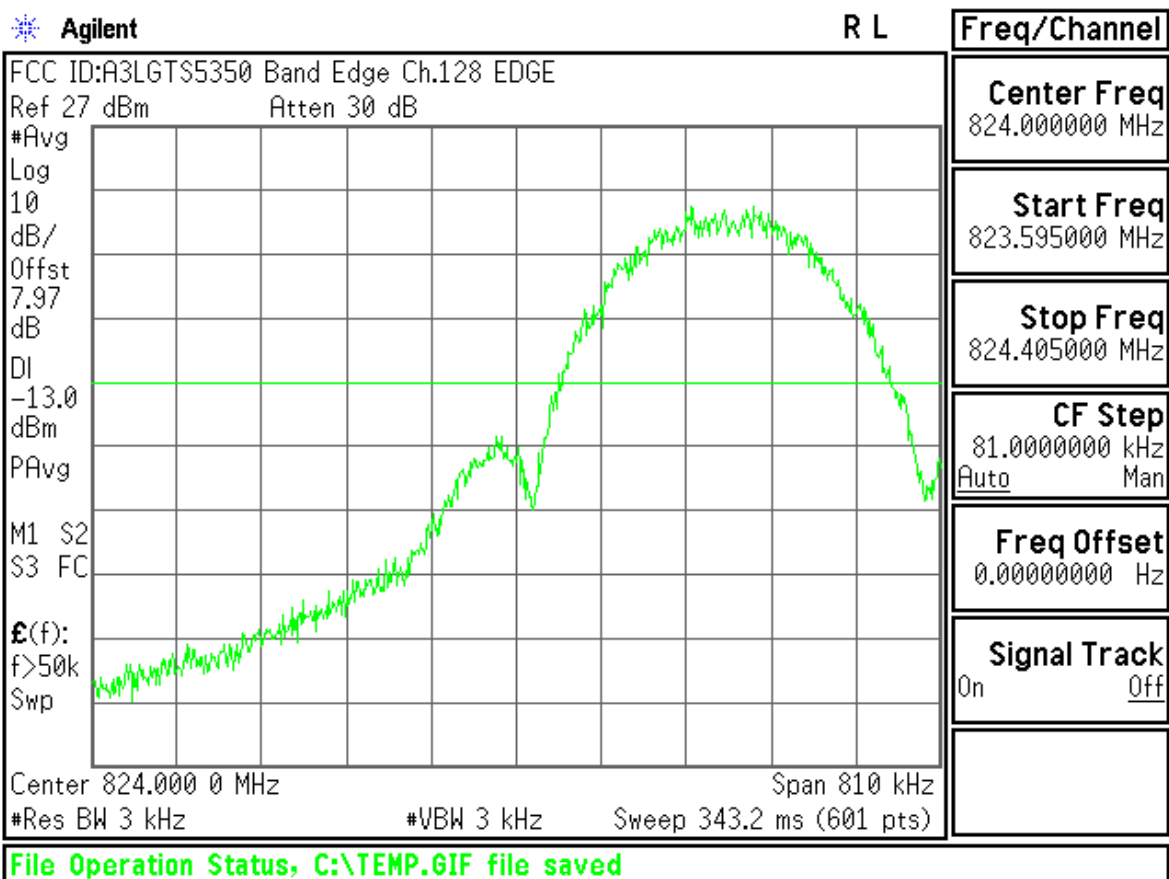

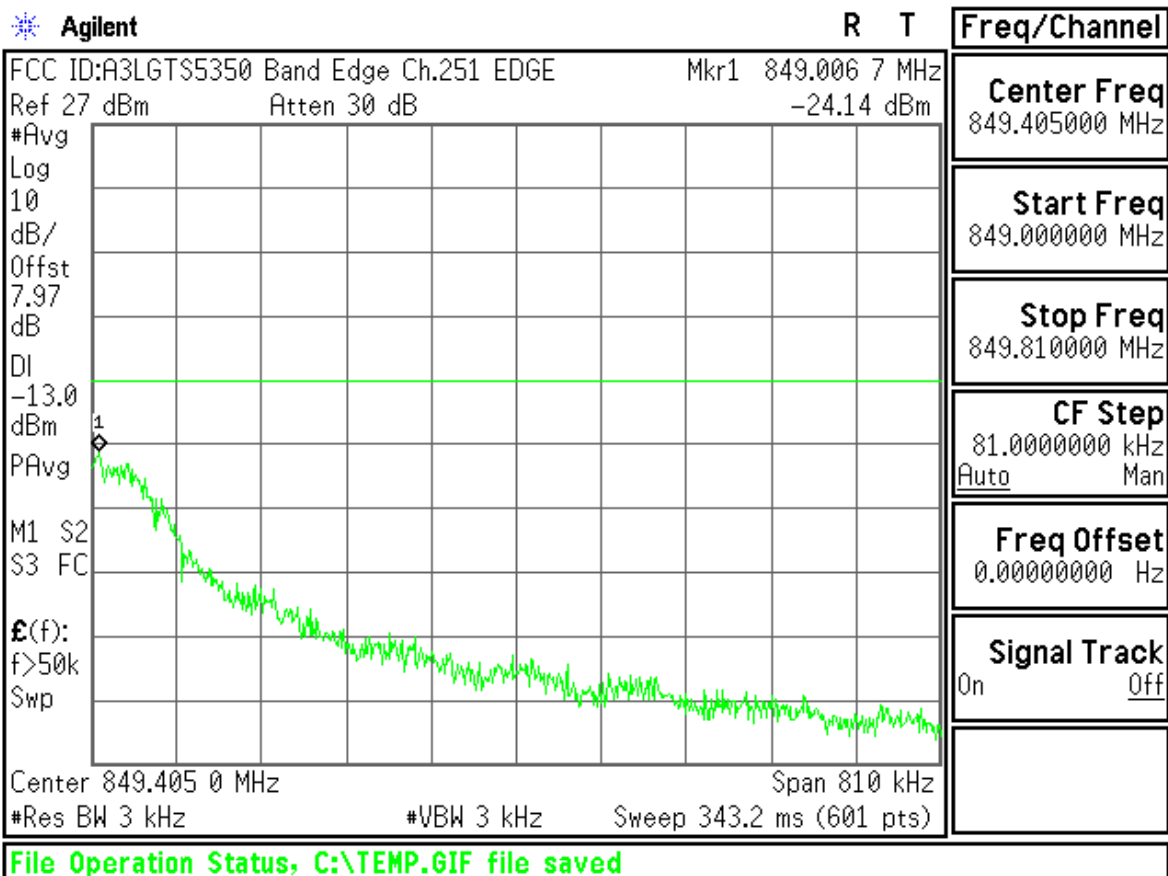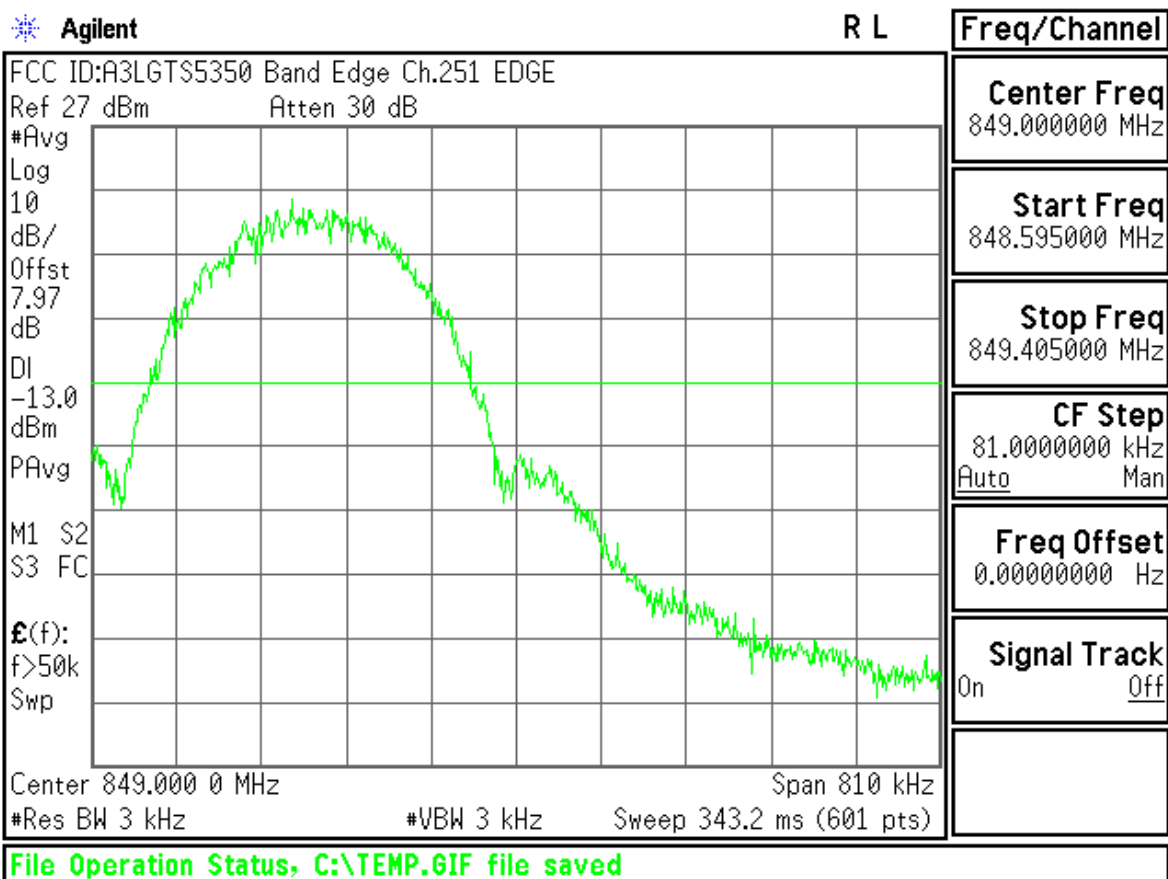

EDGE1900

 Agilent

R T

Freq/Channel

Ch Freq 1.8502 GHz Trig Free

Occupied Bandwidth

Center Freq
1.85020000 GHz

Start Freq
1.84970000 GHz

Stop Freq
1.85070000 GHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGT55350 0BW Ch.512 EDGE

Ref 26 dBm Atten 30 dB

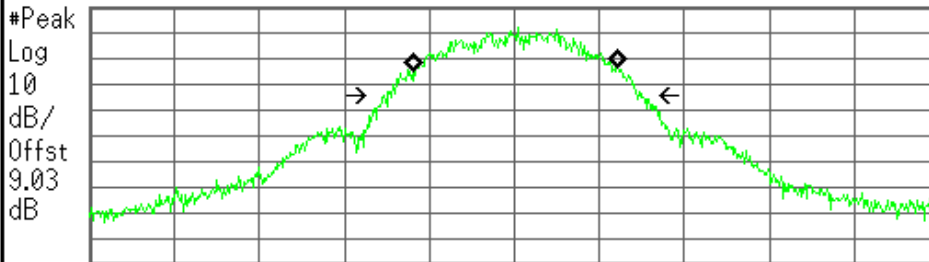

Center 1.850 200 GHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz

#Sweep 1 s (601 pts)

Occupied Bandwidth
245.7290 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 1.028 kHz
x dB Bandwidth 305.718 kHz

File Operation Status, C:\TEMP.GIF file saved

 Agilent

R T

Freq/Channel

Ch Freq 1.88 GHz Trig Free

Occupied Bandwidth

Center Freq
1.88000000 GHz

Start Freq
1.87950000 GHz

Stop Freq
1.88050000 GHz


CF Step
100.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

FCC ID:A3LGT55350 0BW Ch.661 EDGE

Ref 26 dBm Atten 30 dB

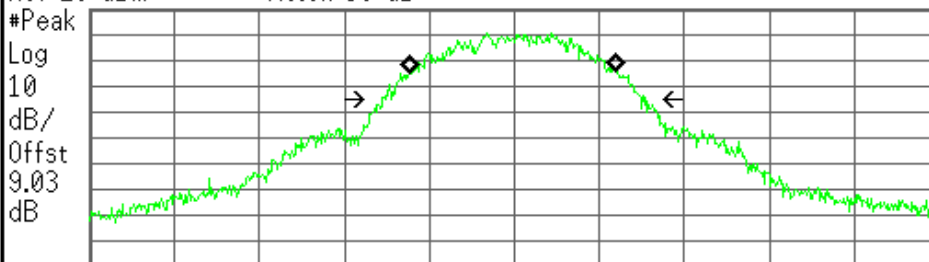

Center 1.880 000 GHz

Span 1 MHz

#Res BW 3 kHz

#VBW 3 kHz


#Sweep 1 s (601 pts)

Occupied Bandwidth
246.4815 kHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -1.051 kHz
x dB Bandwidth 312.586 kHz

File Operation Status, C:\TEMP.GIF file saved


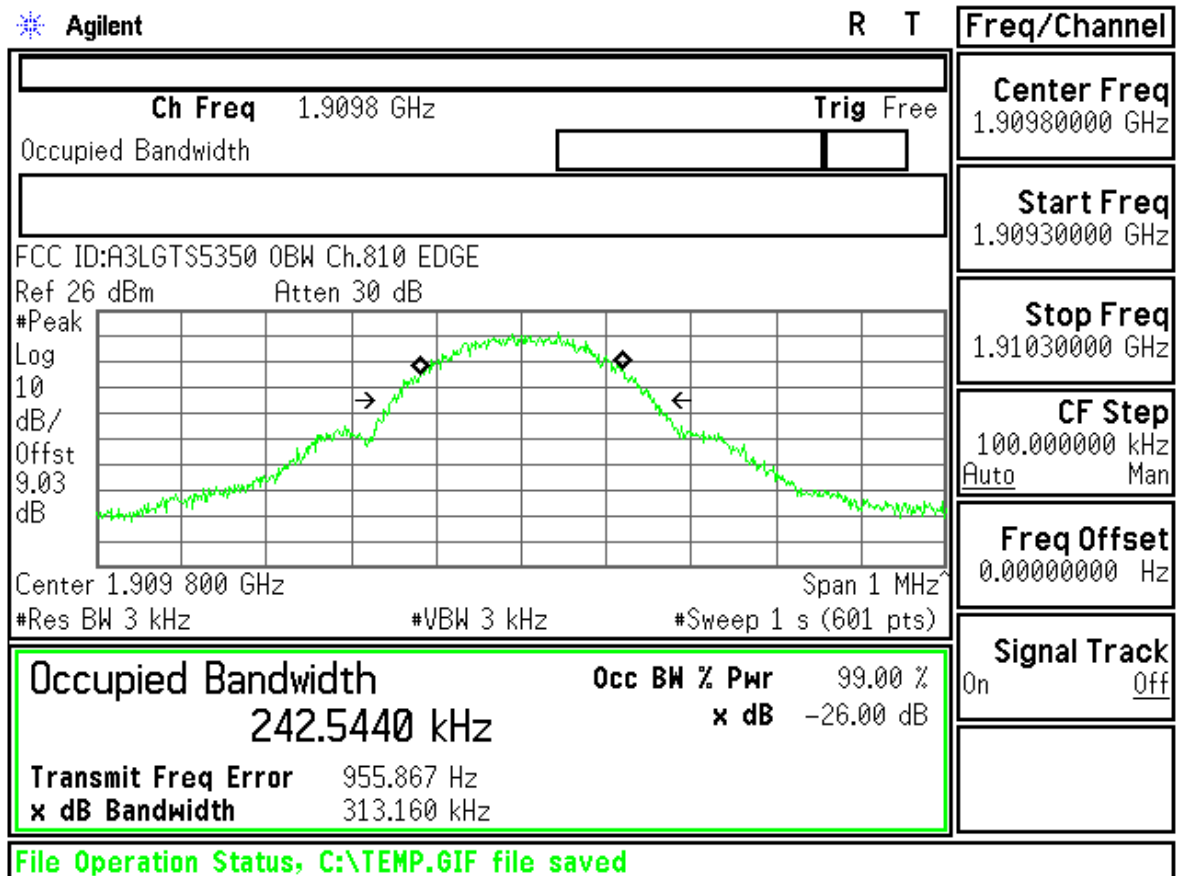




FCC ID : A3LGTS5350 Transmit Power 512CH EDGE

Measurement/Instrument Screen															
Control		EGPRS Transmit Power							PDCH Params						
EGPRS Transmit Power Setup ▾		EPSS Burst Power			EPSS Est Carrier Power				Downlink Traffic Power ▾						
		Minimum		Maximum		Minimum		Maximum		Traffic Band					
		24.83 dBm		26.19 dBm		25.74 dBm		25.77 dBm		PCS					
		Average		Std Dev		Average		Std Dev		Traffic Channel					
		25.69 dBm		0.22 dBm		25.76 dBm		0.00 dBm		512					
		200 /200						Single							
											HS TX Level ▾				
											Modulation Coding Scheme ▾				
											Return				
					Active Cell Transferring			Sys Type: EGPRS							
1 of 2								IntRef	Offset	R	T			1 of 2	

FCC ID : A3LGTS5350 Transmit Power 661CH EDGE

Measurement/Instrument Screen												
Control		EGPRS Transmit Power								PDCH Parms		
EGPRS Transmit Power Setup ▾		EPSK Burst Power				EPSK Est Carrier Power				Downlink Traffic Power ▾		
		Minimum		Maximum		Minimum		Maximum		Traffic Band		
		25.30 dBm		26.65 dBm		26.03 dBm		26.07 dBm		PCS		
		Average		Std Dev		Average		Std Dev		Traffic Channel		
		25.99 dBm		0.22 dBm		26.05 dBm		0.01 dBm		661		
		200 / 200								Single		

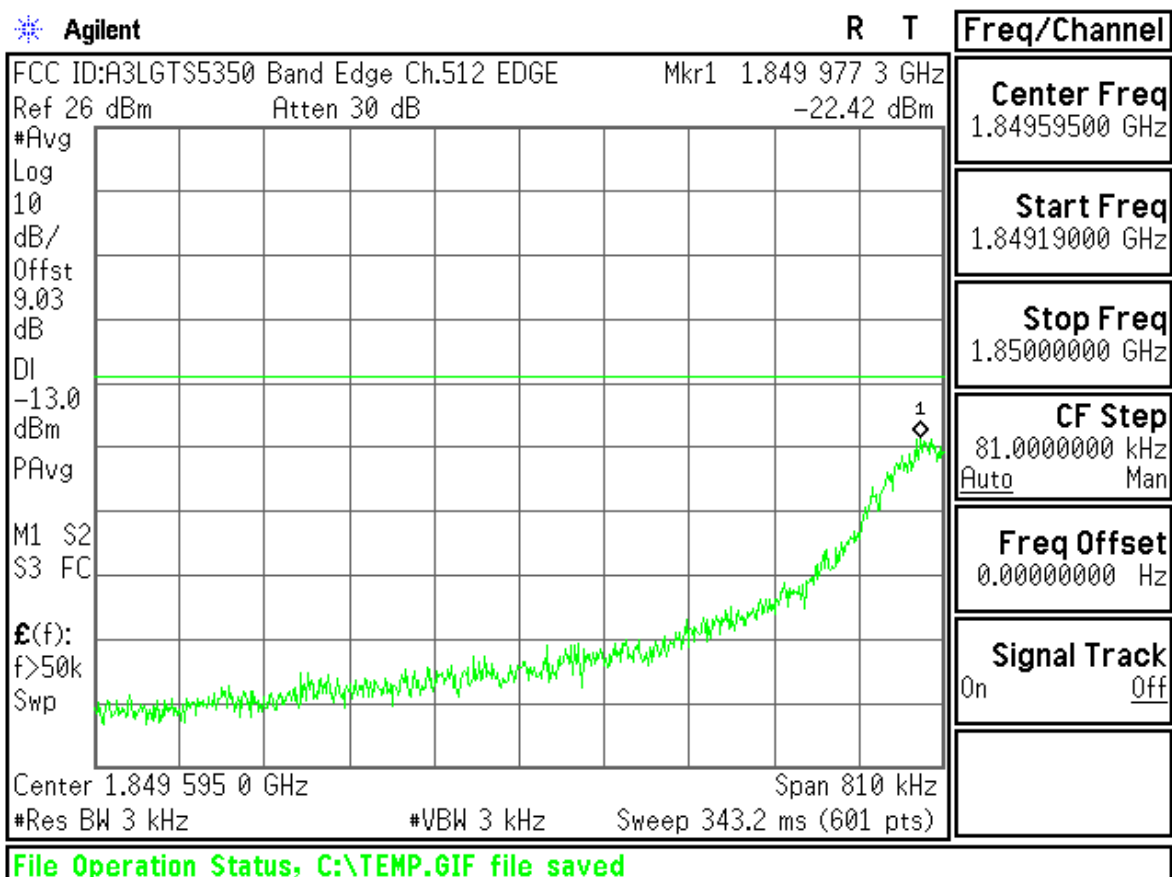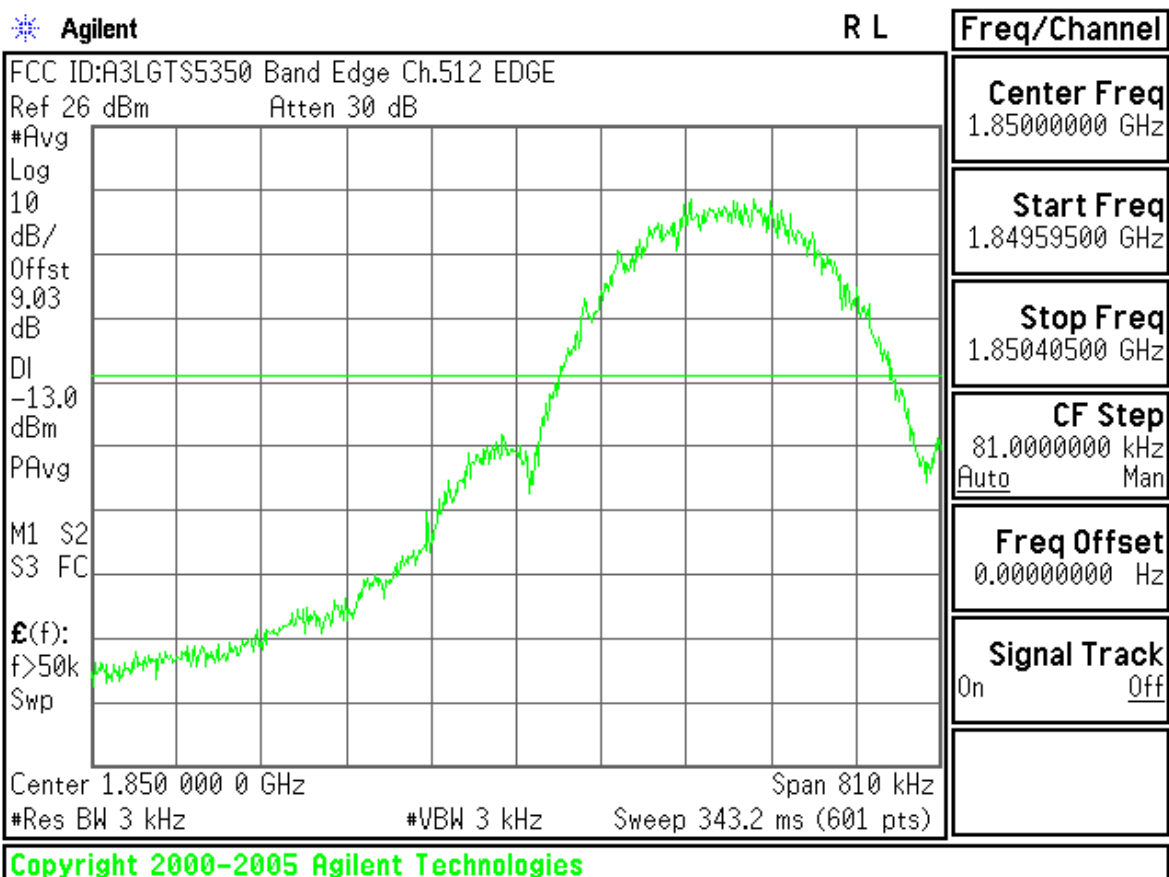

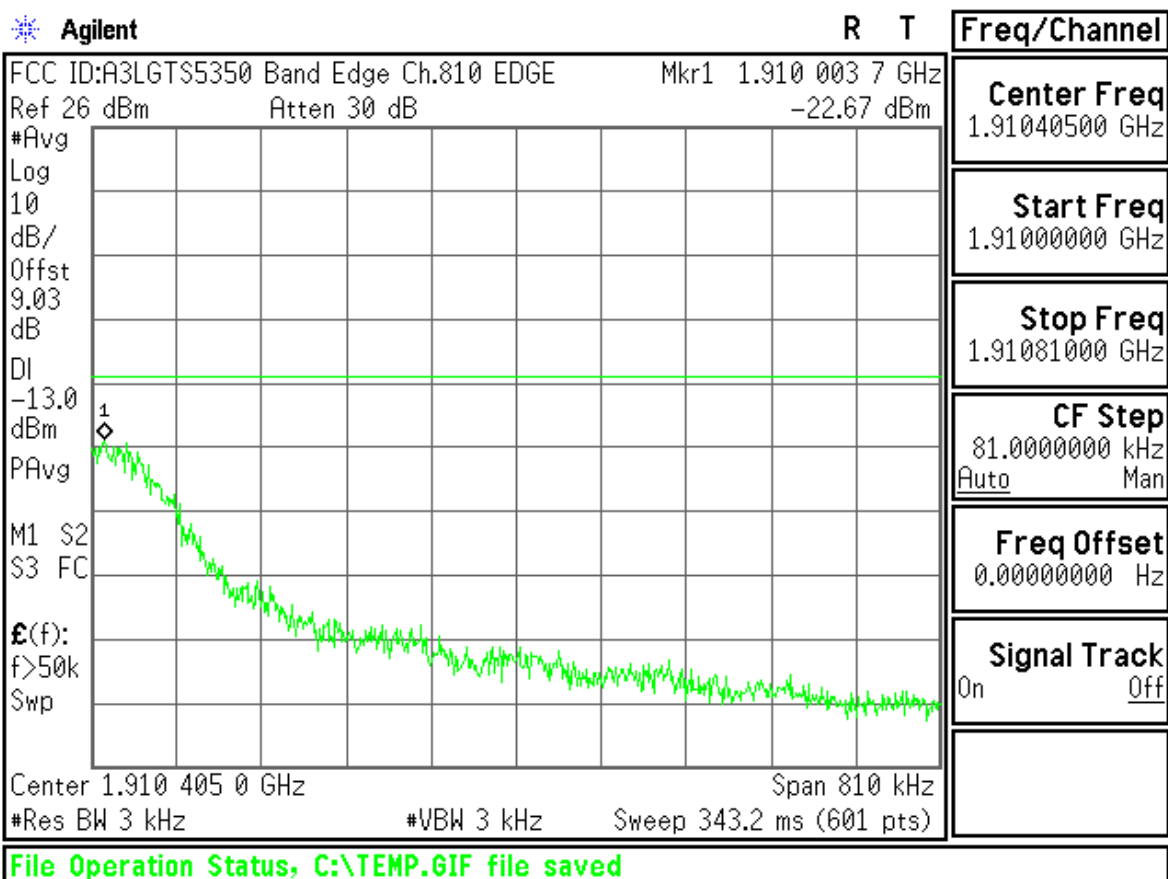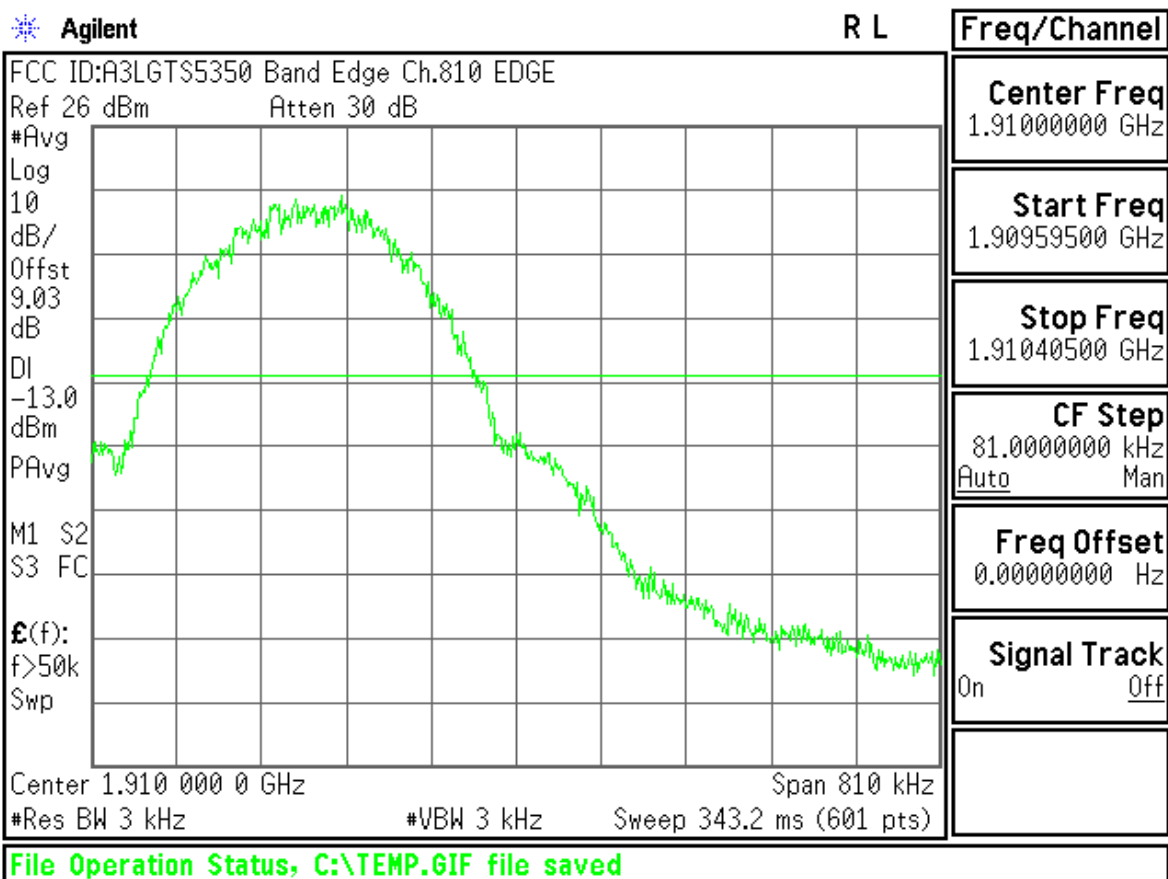

Agilent

R L

Freq/Channel

FCC ID:A3LGT55350 P.A.R Ch.661 EDGE

▲ Mkr1 0 Hz

Ref 35 dBm

Atten 40 dB

0.00 dB

#Avg

Log

10

dB/

Offst

9.03

dB

#LgAv


V1 V2

S3 FC

£(f):

FTun

Swp

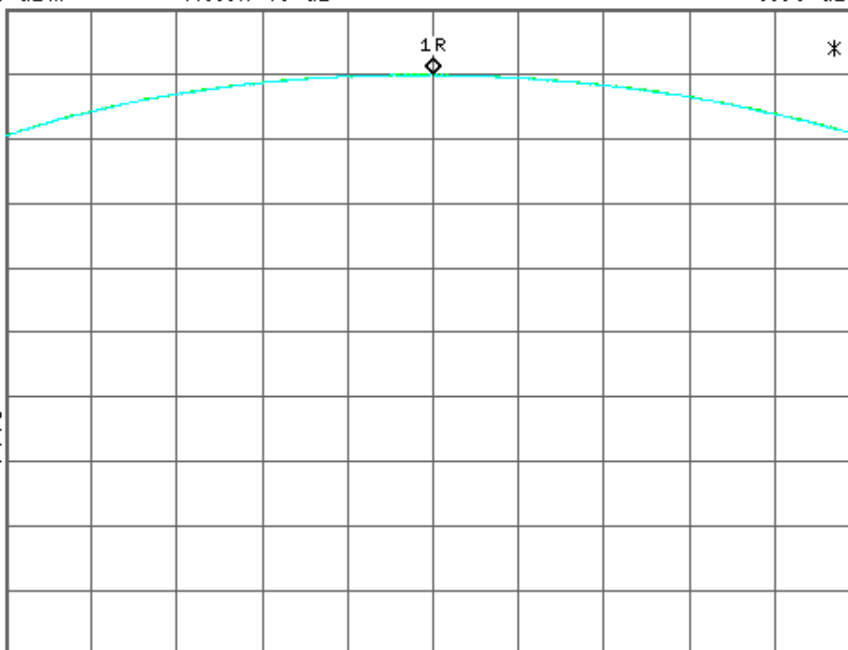

Center 1.880 000 GHz

Span 5 MHz

#Res BW 3 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved