



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 & 24 SUBPART CERTIFICATION REPORT

Model Tested : GT-S7230
Additional Model : GT-S7230E
FCC ID (Requested) : A3LGTS7230
Report No : FH-164-R1
Job No : FH-164
Date issued : August 5, 2010

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,
Part22, Part24.

Prepared By

KJ KWON – Test Engineer

Authorized By

WT JANG – Technical Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Peak-Average Ratio	9
5.4. Occupied Bandwidth	10
5.5. Spurious and Harmonic Emission at Antenna Terminal	10
5.5.1. Occupied Bandwidth Emission Limits	10
5.5.2. Conducted Spurious Emission	12
5.6. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Conducted Output Power	14
6.2. Effective Radiated Power (E.R.P.)	15
6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)	16
6.4. GSM850 Radiated Spurious & Harmonic measurement	17
6.5. GSM1900 Radiated Spurious & Harmonic measurement	18
6.6. GSM850 Radiated Spurious & Harmonic Conversion Table	19
6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table	20
6.8. Frequency Stability	21
6.8.1. GSM850 Frequency Stability Table	21
6.8.2. GSM850 Frequency Stability Graph	22
6.8.3. GSM1900 Frequency Stability Table	24
6.8.4. GSM1900 Frequency Stability Graph	25
7. CONCLUSION	27
8. TEST PLOTS	28

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID : A3LGTS7230
- Model : GT-S7230
- Additional Model : GT-S7230E
- Quantity : Quantity production is planned
- Emission Designators : 245KGXW(GSM850)
245KGXW(GSM1900)
- Tx Freq. Range : 824.2 - 848.8MHz (GSM850)
1850.2MHz - 1909.8MHz (GSM1900)
- Rx Freq. Range : 869.2 - 893.8 MHz (GSM850)
1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.527 W ERP GSM850 (27.22 dBm)
0.798 W EIRP GSM1900 (29.02 dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : 850/1900 GSM/GPRS Phone with Bluetooth, EDGE Rx
Only and WLAN
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §22(H), §2.
- Dates of Test : July 21-22, 2010
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FH-164-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2010-10-20
	E4440A(3Hz~26.5GHz)	MY46187454	2011-03-08
	E4440A(3Hz~26.5GHz)	MY41000236	2011-04-13
Network Analyzer	8753E	JP38160590	2011-06-18
Pre-Amplifier	8449B	3008A00691	2010-12-15
Communication test set	8960	MY47510060	2011-03-08
	8960	GB42230535	2010-12-18
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2011-09-23
Dipole Antenna	UHA 9105	9105-2412	2011-10-06
	3121C-DB4	9007-587	2011-04-15
Receive Antenna	HL040	353255/019	2011-10-26
Power Supply	E3640A	MY40003594	2011-06-17
	E3640A	MY40003595	2011-05-17
	E3632A	MY40022438	2011-03-05
Divider	11636B	51946	2011-06-25
	11636B	51942	2011-07-09
	11636B	56918	2011-08-31
High Pass Filter	WHK/3.0/18G-10SS	492	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2010-11-11
	SH-241	92000548	2010-11-11
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

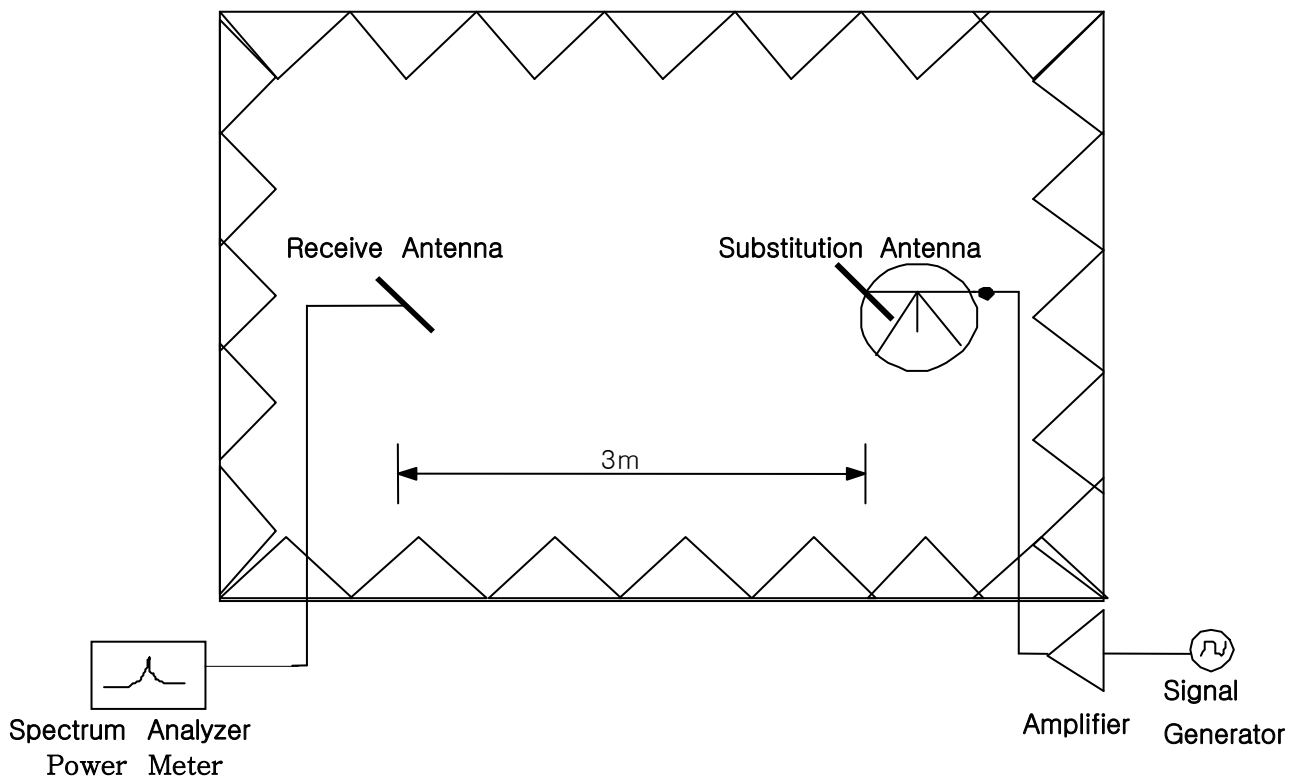


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

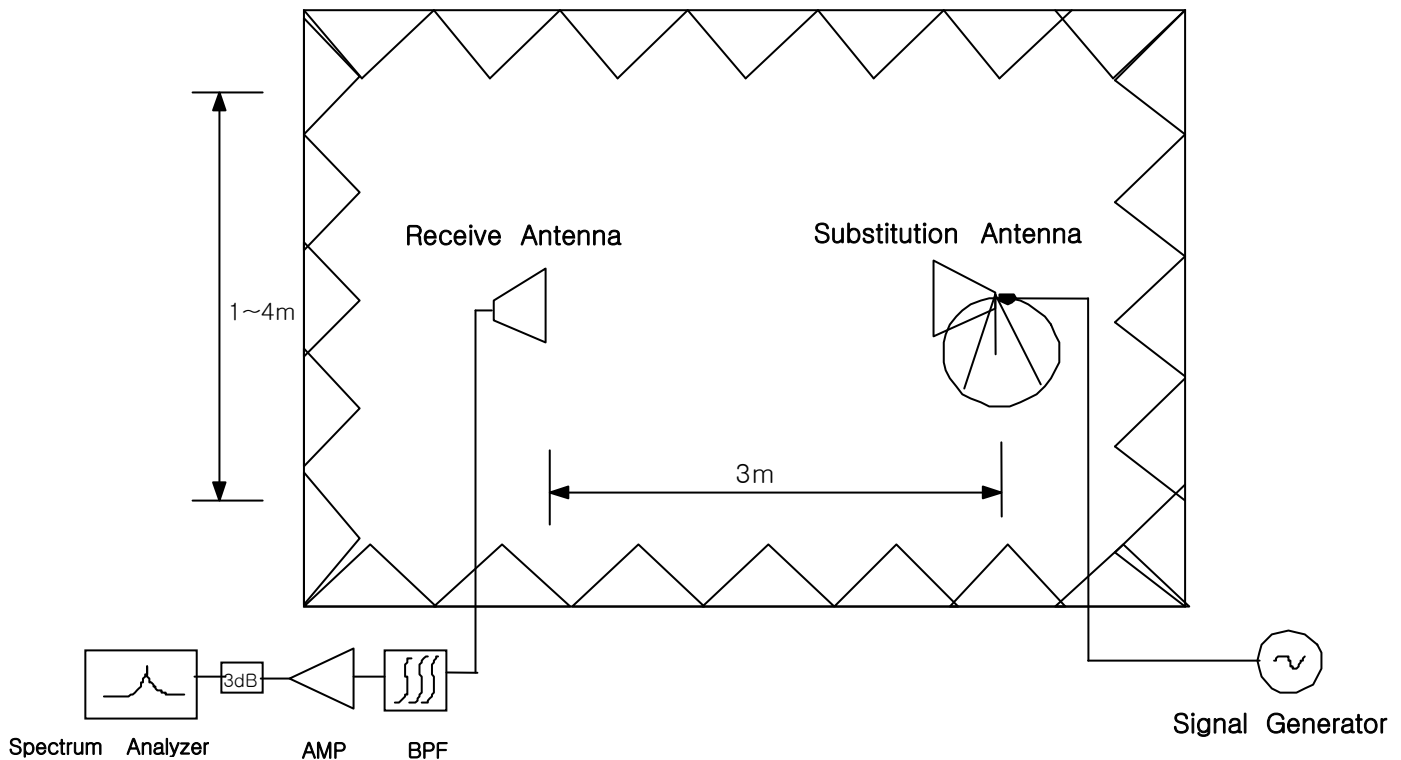


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

5.4. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.5. Spurious and Harmonic Emission at Antenna Terminal

5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.5.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log (0.527 \text{ W}) = 40.22 \text{ dB}$$

$$27.22 \text{ dBm} - 40.22 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (Usually 14~16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Conducted Output Power

A base station simulator was used to establish communication with the Samsung 850/1900 GSM/GPRS Phone with Bluetooth, EDGE Rx Only and WLAN FCC ID: A3LGTS7230. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of “0” in the PCS BAND and “5” in the Cellular Band. The GSM conducted powers are reported below, respectively.

BAND	Channel	RF Conducted Power Table				
		Voice	GPRS Data			
			1 Tx Slot	2 Tx Slot	3 Tx Slot	4 Tx Slot
PCS	512	29.81	29.84	29.83	26.3	24.24
	661	29.57	29.54	29.53	26.06	24.02
	810	29.51	29.48	29.5	26.01	23.98
Cellular	128	32.80	32.77	32.79	29.19	27.15
	190	32.66	32.62	32.65	29.05	27.01
	251	32.49	32.44	32.48	28.87	26.84

Table 6-1 GSM Conducted Output Powers

6.2. Effective Radiated Power (E.R.P.)

Supply Voltage : 3.7VDC

Modulation : GSM850

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBd)	Ref level (dBm)
824.20	27.00	H	-9.50	-0.67	-8.83
		V	-10.35	-0.67	-9.68
836.60	27.00	H	-9.99	-0.73	-9.26
		V	-10.28	-0.73	-9.55
848.80	27.00	H	-12.18	-0.79	-11.39
		V	-11.36	-0.79	-10.57

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	ERP (dBm)	ERP (W)	Battery
824.20	-8.61	H	282/55	27.22	0.527	Standard
836.60	-9.05	H	96/180	27.21	0.526	Standard
848.80	-11.46	H	263/0	26.93	0.493	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-10.32	9.60	-19.92
		V	-9.91	9.60	-19.51
1880.00	29.00	H	-9.95	9.60	-19.55
		V	-10.32	9.60	-19.92
1909.80	28.00	H	-11.49	9.60	-21.09
		V	-11.17	9.60	-20.77

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.61	V	319/80	28.90	0.776	Standard
1880.00	-19.90	V	320/80	29.02	0.798	Standard
1909.80	-20.51	V	331/90	28.26	0.670	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.4. GSM850 Radiated Spurious & Harmonic measurement

Operating Frequency : 824.20 MHz(Low), 836.60MHz(Middle), 848.80MHz(High)

Measured Output Power : 27.22 dBm = 0.527 W

Modulation Signal : GSM850

Limit : $43 + 10\log_{10}(P) = 40.22 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
128	2	1648.40	-52.65	V	67.76
	3	2472.60	-52.31	H	62.17
	4	3296.80	-63.00	V	69.75
	5	4121.00	-	-	-
	6	4945.20	-	-	-
	7	5769.40	-	-	-
190	2	1673.20	-47.01	H	61.26
	3	2509.80	-46.91	V	57.02
	4	3346.40	-55.38	H	61.46
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
251	2	1697.60	-47.50	H	60.66
	3	2546.40	-47.15	H	56.85
	4	3395.20	-52.20	H	58.25
	5	4244.00	-	-	-
	6	5092.80	-	-	-
	7	5941.60	-	-	-

NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.5. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 29.02 dBm = 0.798 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 42.02$ dBc

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-58.64	H	63.24
	3	5550.60	-55.52	V	55.03
	4	7400.80	-62.86	V	57.41
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-61.16	H	65.25
	3	5640.00	-53.85	V	53.14
	4	7520.00	-57.73	H	52.56
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-62.99	V	66.97
	3	5729.40	-51.35	V	50.48
	4	7639.20	-53.78	H	48.38
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

NOTE :

1. “-” Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported.

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.6. GSM850 Radiated Spurious & Harmonic Conversion Table

Date : July 22, 2010

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.15 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
128	2	1648.40	-9.34	9.50	-13.20	-27.60	-27.25	-53.95	-52.65	68.71	67.76
	3	2472.60	-11.66	10.70	-12.00	-32.50	-32.00	-52.31	-54.06	62.17	64.42
	4	3296.80	-13.53	12.30	-11.80	-36.01	-35.61	-65.00	-63.00	71.35	69.75
	5	4121.00	-15.09	12.50	-10.40	-38.76	-38.44	-	-	-	-
	6	4945.20	-16.89	12.70	-8.80	-41.87	-40.99	-	-	-	-
	7	5769.40	-18.42	12.90	-7.50	-43.37	-43.42	-	-	-	-
190	2	1673.20	-9.39	9.50	-13.10	-28.11	-28.27	-47.01	-49.79	61.26	63.88
	3	2509.80	-11.68	10.70	-12.00	-32.67	-32.25	-51.69	-46.91	61.38	57.02
	4	3346.40	-13.62	12.30	-11.70	-36.28	-36.70	-55.38	-57.65	61.46	63.31
	5	4183.00	-15.33	12.50	-10.20	-38.60	-38.48	-	-	-	-
	6	5019.60	-17.17	12.70	-8.50	-42.15	-41.72	-	-	-	-
	7	5856.20	-18.51	12.90	-7.40	-44.68	-44.47	-	-	-	-
251	2	1697.60	-9.42	9.50	-13.10	-29.20	-28.39	-47.50	-47.97	60.66	61.94
	3	2546.40	-11.69	10.70	-12.00	-32.66	-32.59	-47.15	-52.62	56.85	62.39
	4	3395.20	-13.58	12.30	-11.70	-36.31	-35.95	-52.20	-52.42	58.25	58.83
	5	4244.00	-15.43	12.50	-10.10	-39.14	-39.12	-	-	-	-
	6	5092.80	-17.20	12.70	-8.50	-42.76	-42.76	-	-	-	-
	7	5941.60	-18.66	12.90	-7.20	-44.34	-44.02	-	-	-	-

6.7. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : July 22, 2010

Test Engineer : KJ KWON

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = EIRP - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Tested EUT Level : H dBm	⑤Tested EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
512	2	3700.40	-14.27	12.40	-11.10	-37.42	-37.29	-58.64	-59.79	63.24	64.52
	3	5550.60	-17.89	12.90	-8.00	-42.43	-42.51	-59.33	-55.52	58.92	55.03
	4	7400.80	-20.68	10.50	-2.80	-47.70	-47.31	-63.09	-62.86	57.41	57.57
	5	9251.00	-24.00	11.20	-0.20	-51.55	-50.34	-	-	-	-
	6	11101.20	-27.10	11.60	2.50	-55.14	-55.44	-	-	-	-
	7	12951.40	-29.17	12.90	3.30	-58.61	-58.58	-	-	-	-
661	2	3760.00	-14.42	12.40	-11.00	-37.93	-37.89	-61.16	-62.83	65.25	66.96
	3	5640.00	-18.03	12.90	-7.90	-42.58	-42.73	-57.84	-53.85	57.28	53.14
	4	7520.00	-20.87	10.60	-2.70	-47.19	-47.22	-57.73	-58.56	52.56	53.36
	5	9400.00	-23.58	11.60	-1.00	-51.70	-51.98	-	-	-	-
	6	11280.00	-26.58	12.10	1.50	-55.95	-56.35	-	-	-	-
	7	13160.00	-28.58	12.80	2.80	-58.92	-59.14	-	-	-	-
810	2	3819.60	-14.46	12.40	-10.90	-38.24	-38.04	-63.53	-62.99	67.31	66.97
	3	5729.40	-18.26	13.00	-7.70	-43.05	-42.89	-52.21	-51.35	51.18	50.48
	4	7639.20	-21.26	11.20	-2.90	-47.42	-47.53	-53.78	-54.77	48.38	49.26
	5	9549.00	-23.84	11.70	-0.90	-52.67	-51.88	-	-	-	-
	6	11458.80	-27.12	11.70	2.40	-56.20	-55.97	-	-	-	-
	7	13368.60	-28.83	12.30	3.50	-60.16	-59.86	-	-	-	-

6.8. Frequency Stability

6.8.1. GSM850 Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 190

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-30.00	836,599,970	-0.000004	-0.036
100%		-30	0.70	836,600,001	0.000000	0.001
100%		-20	-10.50	836,599,990	-0.000001	-0.013
100%		-10	28.70	836,600,029	0.000003	0.034
100%		0	-37.60	836,599,962	-0.000004	-0.045
100%		+10	-25.30	836,599,975	-0.000003	-0.030
100%		+20	-30.00	836,599,970	-0.000004	-0.036
100%		+30	-7.20	836,599,993	-0.000001	-0.009
100%		+40	33.60	836,600,034	0.000004	0.040
100%		+50	2.00	836,600,002	0.000000	0.002
100%		+60	-5.30	836,599,995	-0.000001	-0.006
85%	3.35	+20	25.20	836,600,025	0.000003	0.030
115%	4.26	+20	-32.30	836,599,968	-0.000004	-0.039
Batt.Endpoint	3.35	+20	25.20	836,600,025	0.000003	0.030


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.2. GSM850 Frequency Stability Graph

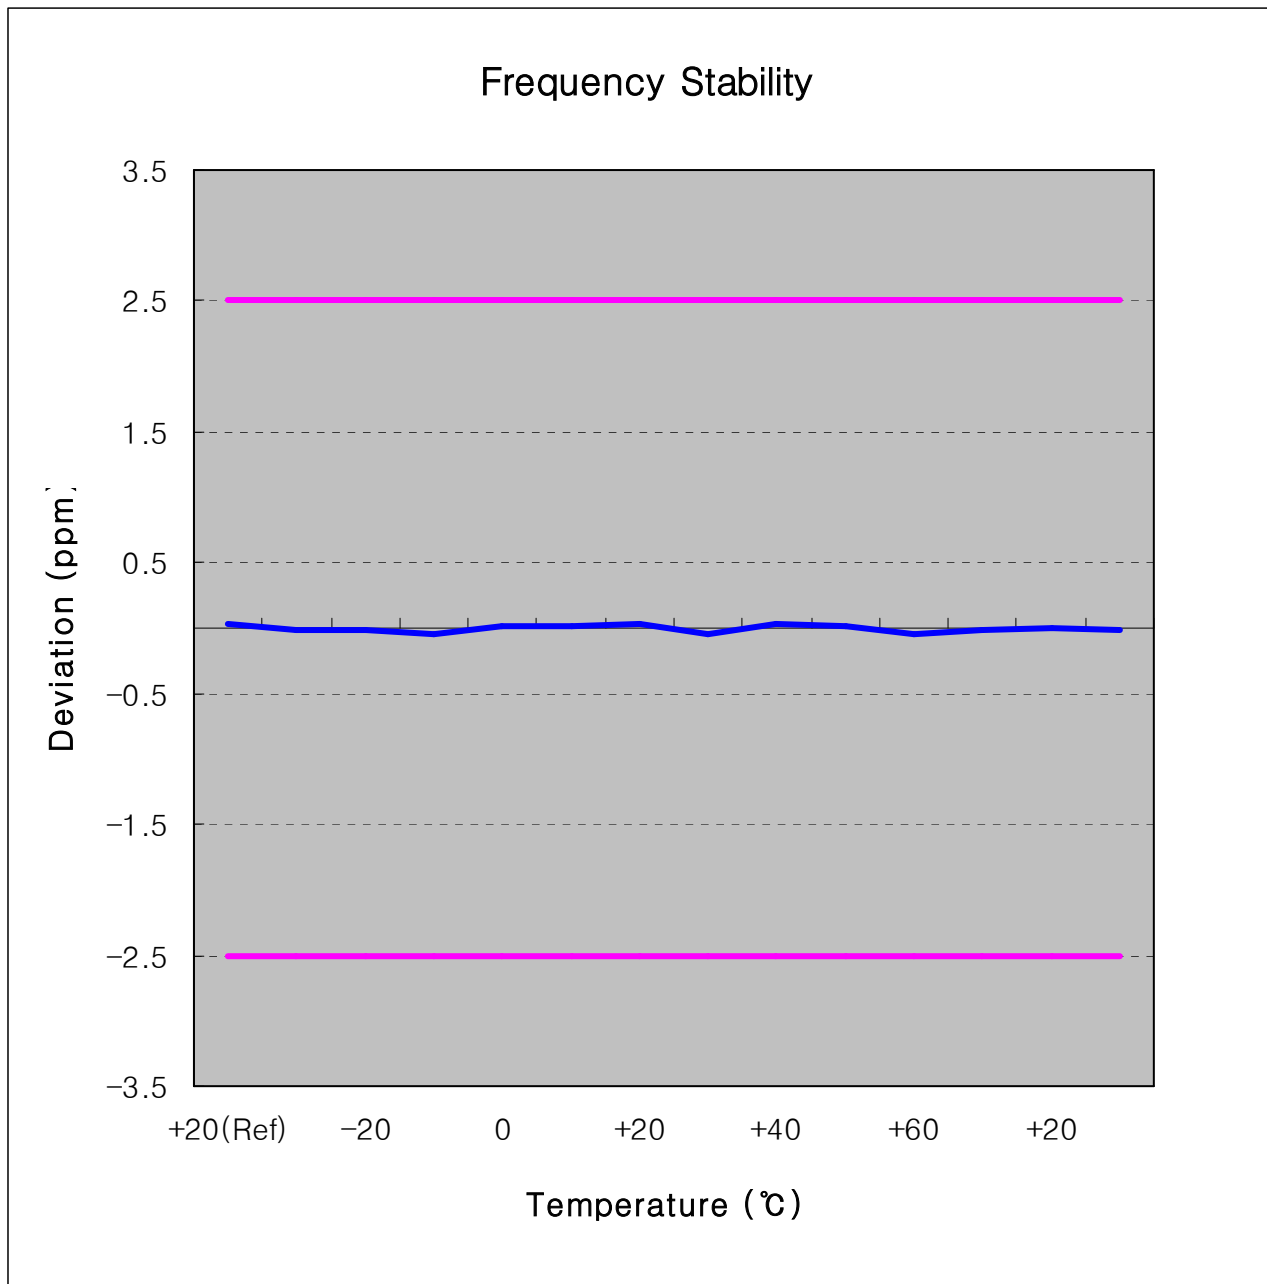

Zoom IN

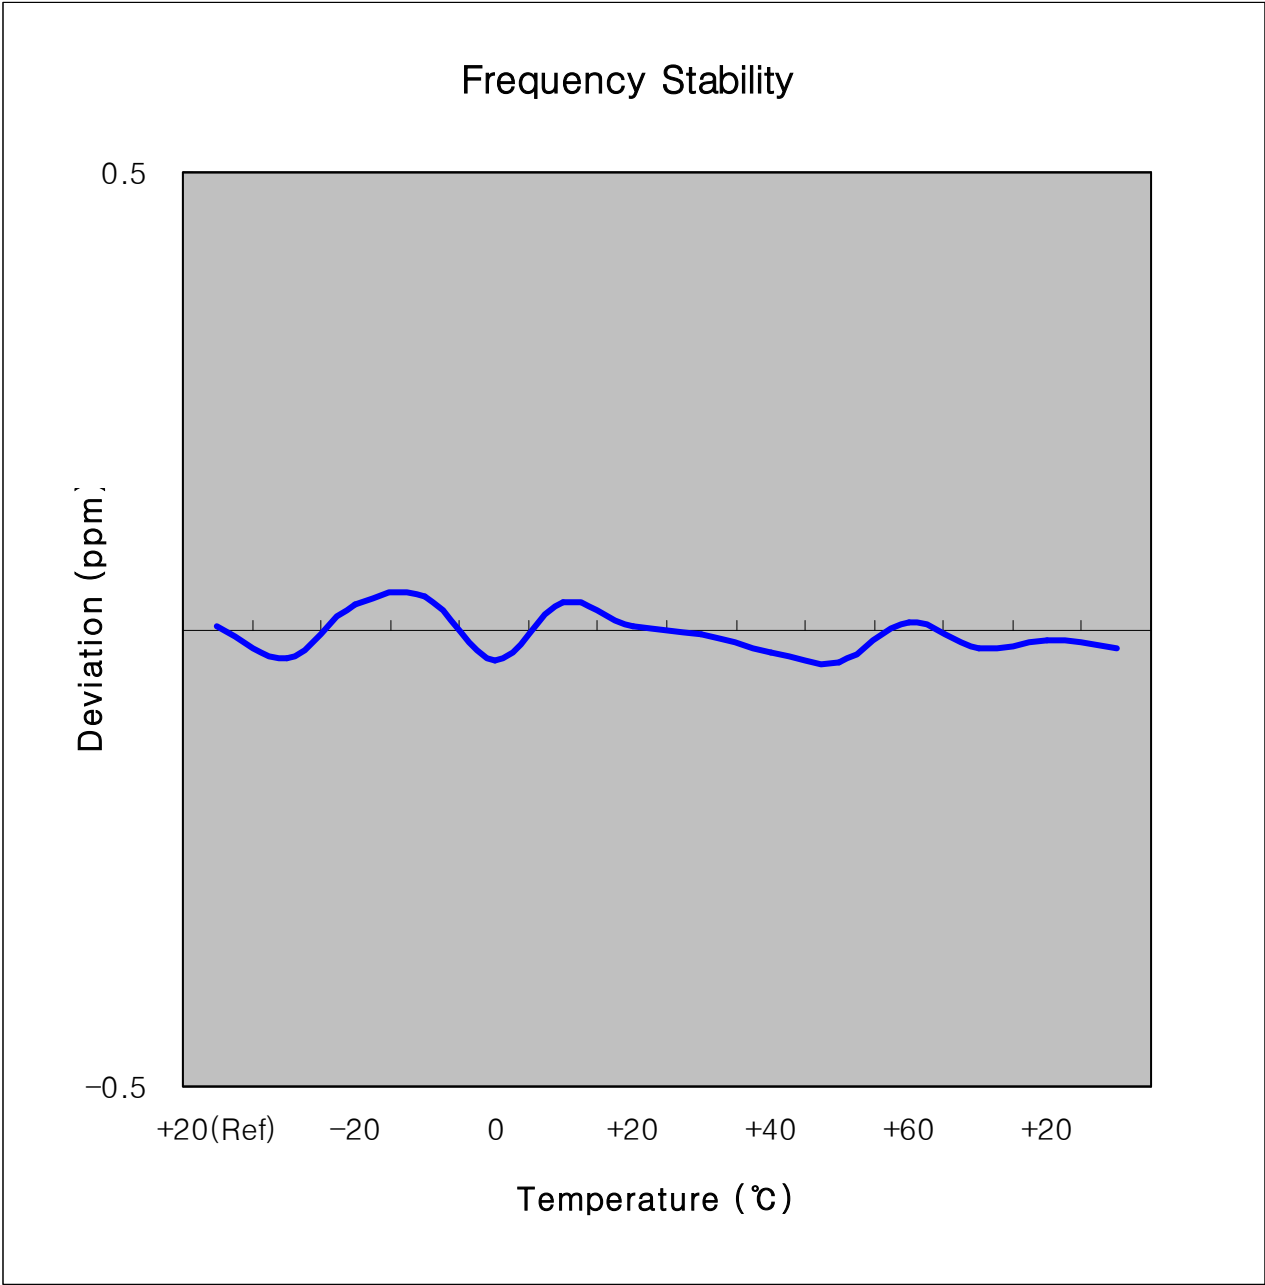

6.8.3. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-30.10	1,879,999,970	-0.000002	-0.016
100%		-30	33.00	1,880,000,033	0.000002	0.018
100%		-20	28.30	1,880,000,028	0.000002	0.015
100%		-10	-29.70	1,879,999,970	-0.000002	-0.016
100%		0	-3.00	1,879,999,997	0.000000	-0.002
100%		+10	37.00	1,880,000,037	0.000002	0.020
100%		+20	-30.10	1,879,999,970	-0.000002	-0.016
100%		+30	30.10	1,880,000,030	0.000002	0.016
100%		+40	-22.80	1,879,999,977	-0.000001	-0.012
100%		+50	-34.60	1,879,999,965	-0.000002	-0.018
100%		+60	31.10	1,880,000,031	0.000002	0.017
85%	3.35	+20	-29.00	1,879,999,971	-0.000002	-0.015
115%	4.26	+20	31.60	1,880,000,032	0.000002	0.017
Batt.Endpoint	3.35	+20	-29.00	1,879,999,971	-0.000002	-0.015


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.8.4. GSM1900 Frequency Stability Graph

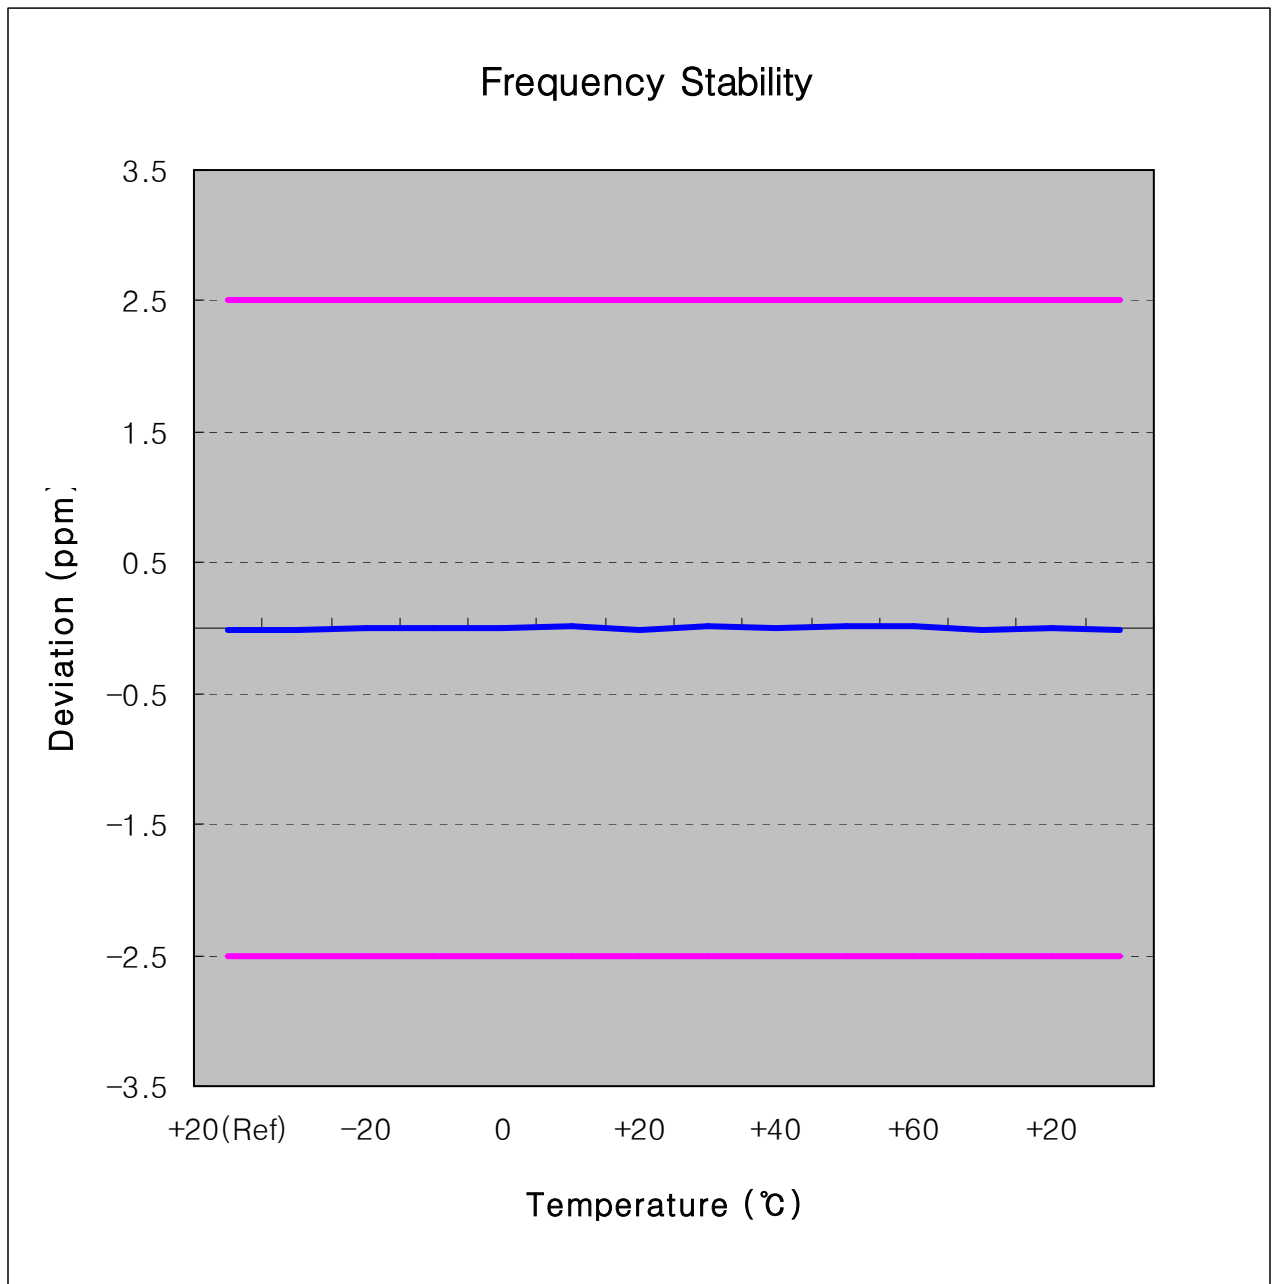

Zoom IN

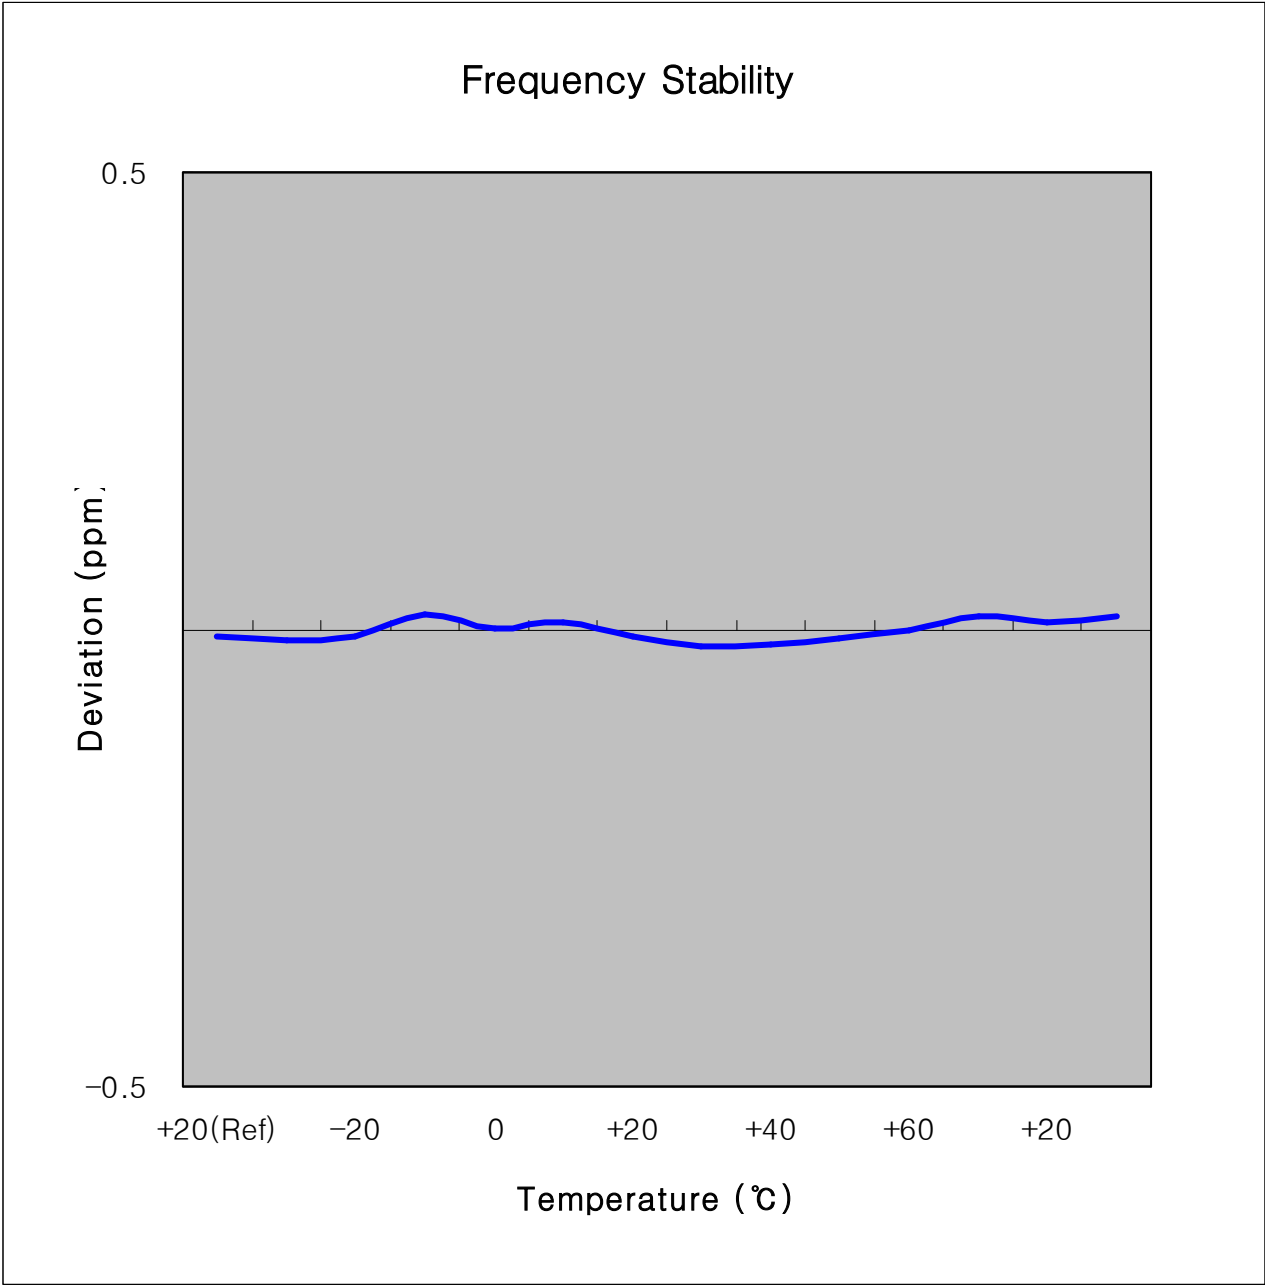



7. CONCLUSION


The data collected shows that the SAMSUNG 850/1900 GSM/GPRS Phone with Bluetooth, EDGE Rx Only and WLAN FCC ID : A3LGTS7230 complies with all the requirements of Parts 2,22,24 of the FCC Rules.

8. TEST PLOTS




Agilent


R T

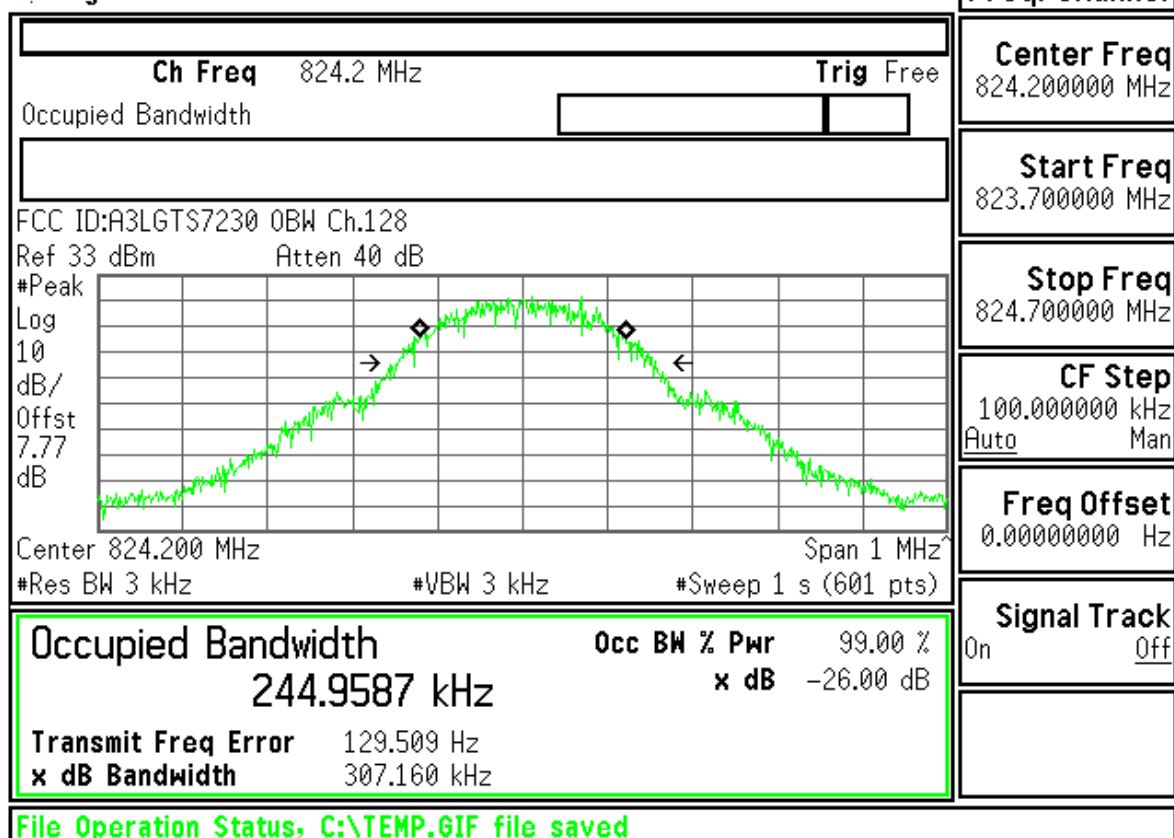

Agilent

R T

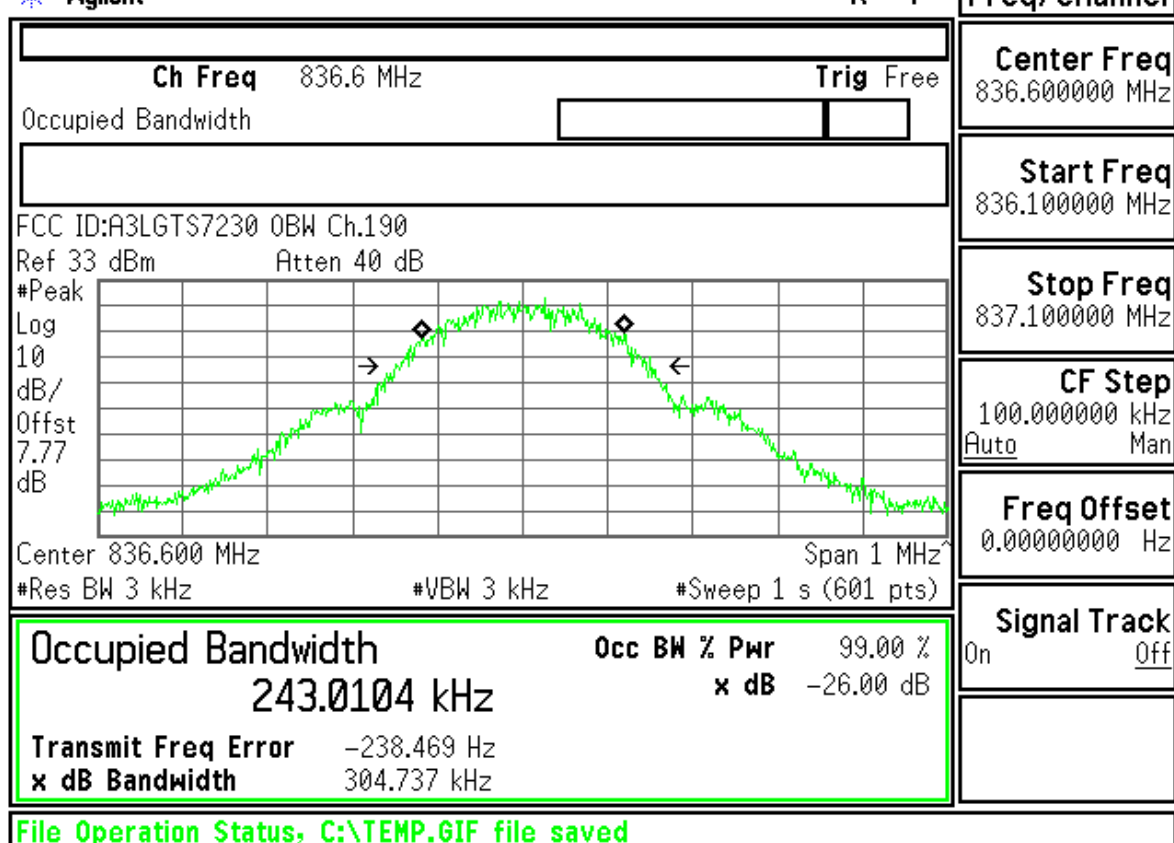

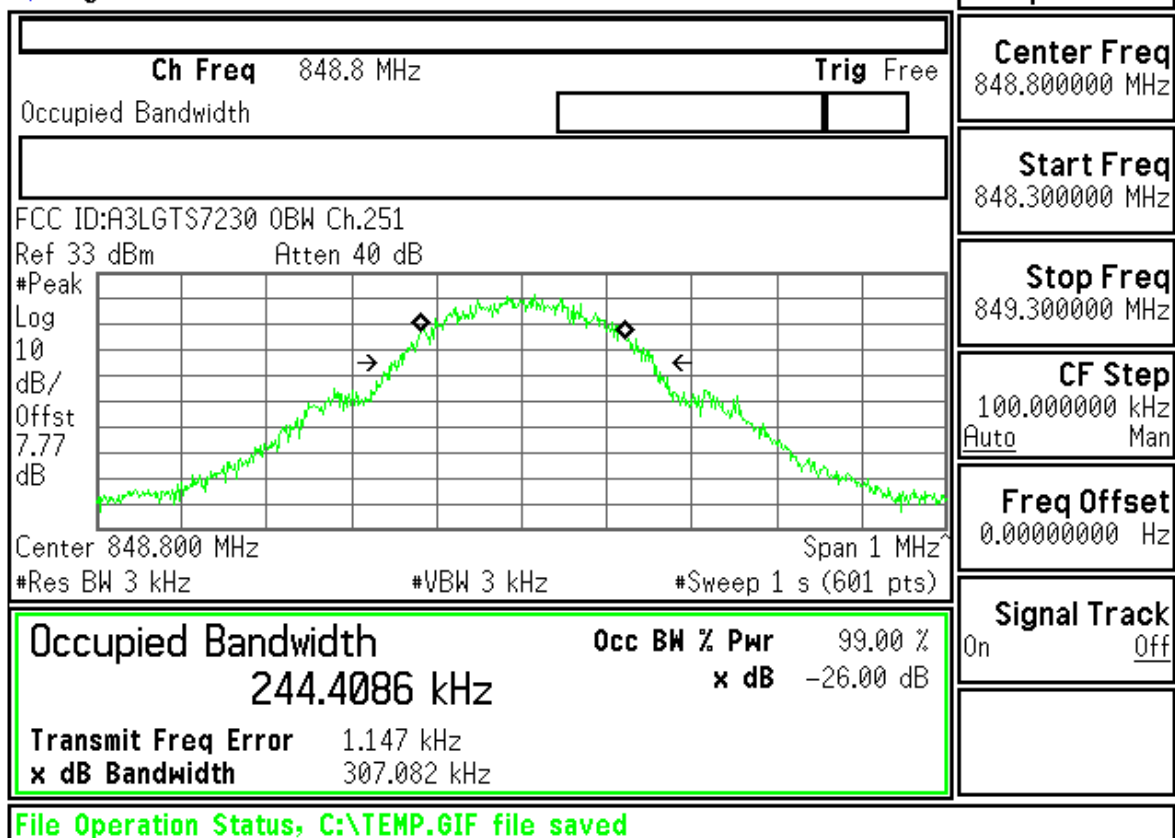

Center Freq
848.800000 MHz

Start Freq
848.300000 MHz

Stop Freq
849.300000 MHz



CF Step
100.000000 kHz
Auto Man



Freq Offset
0.00000000 Hz



Signal Track
On Off


Measurement/Instrument Screen										
Control		Transmit Power							TCH Parms	
Transmit Power Setup ▾									Downlink Traffic Power ▾	
				Burst 1	Burst 2	Burst 3	Burst 4	Traffic Band GSM850		
		Burst Power	32.80	----	----	----				
		Estimated Carrier Power	32.80	----	----	----				
Swap Window Positions		Single							Traffic Channel 128	
		Phase & Frequency Error								
			Peak Phase °	RMS Phase °	Frequency Hz					
		Minimum	1.34	0.46	5.97					
		Maximum	2.26	0.86	16.53			MS TX Level 5		
		Average	1.75	0.56	9.40					
		Pass/Fail	Pass	Pass	Pass					
		50 / 50 Single								
1 of 2		Active Cell Connected					Sys Type: GSM		Channel Mode Setup ▾	Return
					IntRef	Offset	R T			
										1 of 2

Measurement/Instrument Screen										
Control		Transmit Power							TCH Parms	
Transmit Power Setup ▾									Downlink Traffic Power ▾	
				Burst 1	Burst 2	Burst 3	Burst 4	Traffic Band GSM850		
		Burst Power	32.66	----	----	----				
		Estimated Carrier Power	32.66	----	----	----				
Swap Window Positions		Single							Traffic Channel 190	
		Phase & Frequency Error								
			Peak Phase °	RMS Phase °	Frequency Hz					
		Minimum	1.37	0.51	0.41					
		Maximum	1.99	0.79	7.57			MS TX Level 5		
		Average	1.65	0.61	4.33					
		Pass/Fail	Pass	Pass	Pass					
		50 / 50 Single								
1 of 2		Active Cell Connected					Sys Type: GSM		Channel Mode Setup ▾	Return
					IntRef	Offset	R T			
										1 of 2

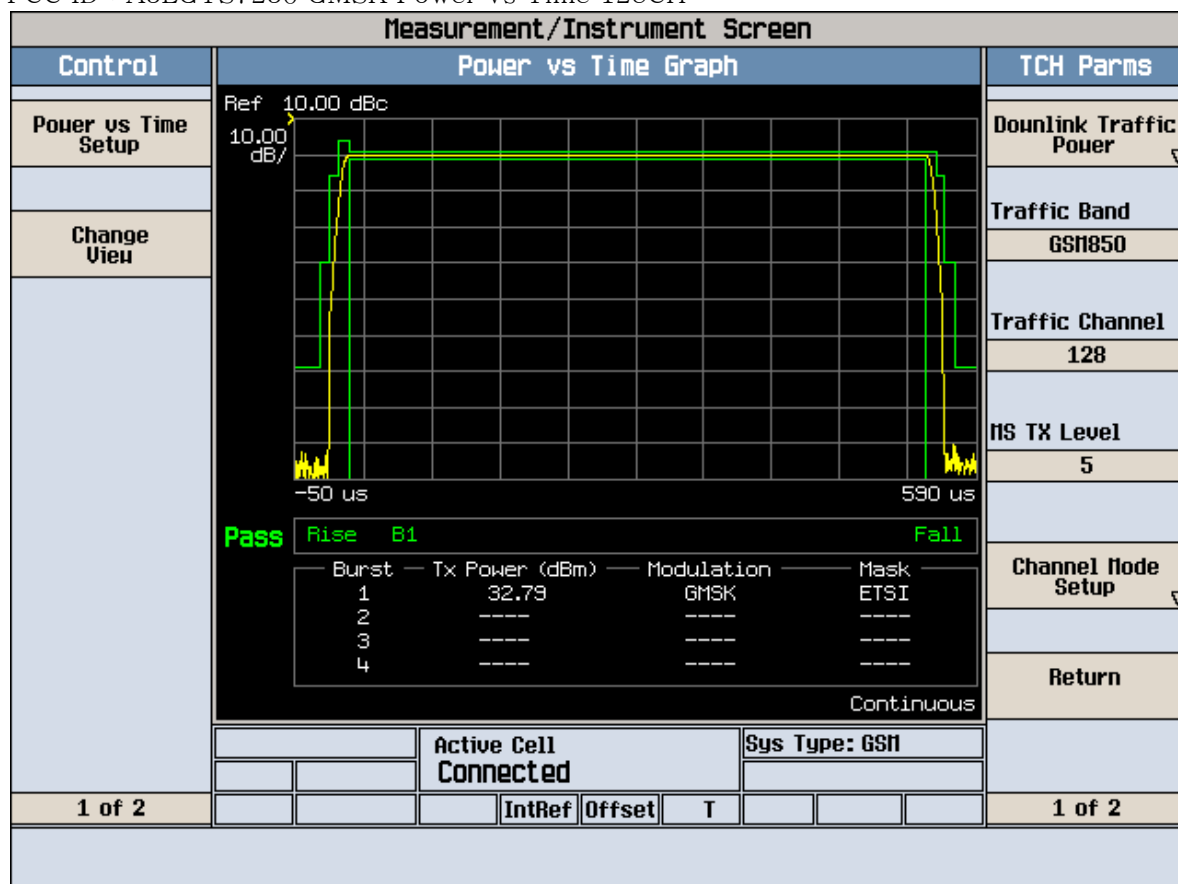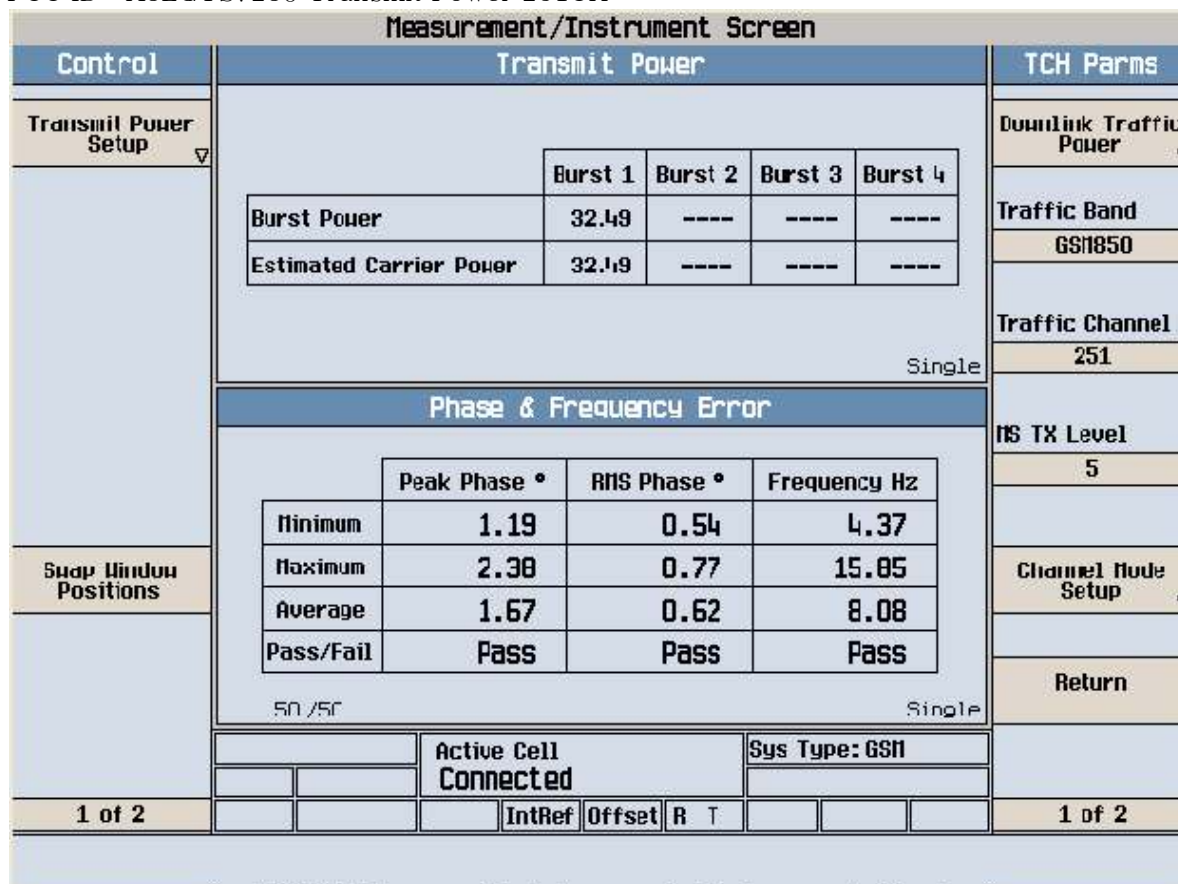

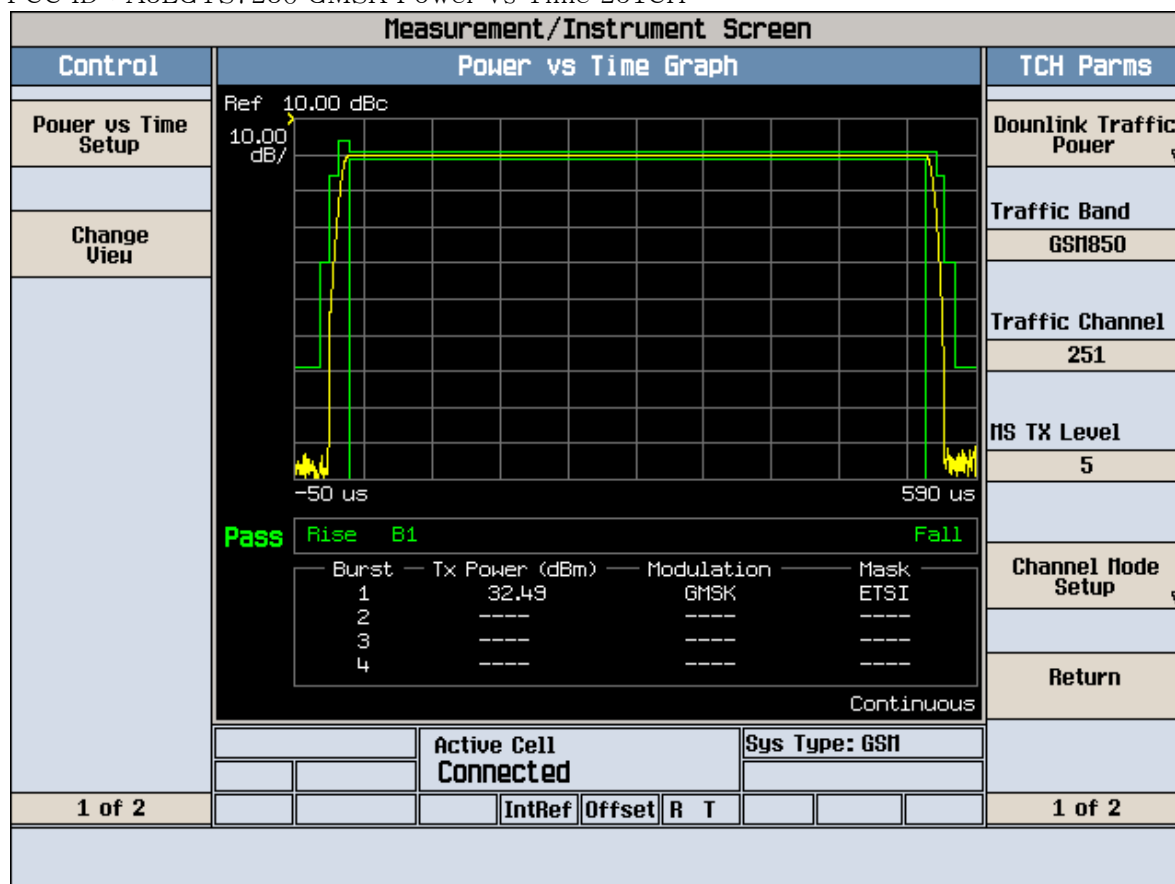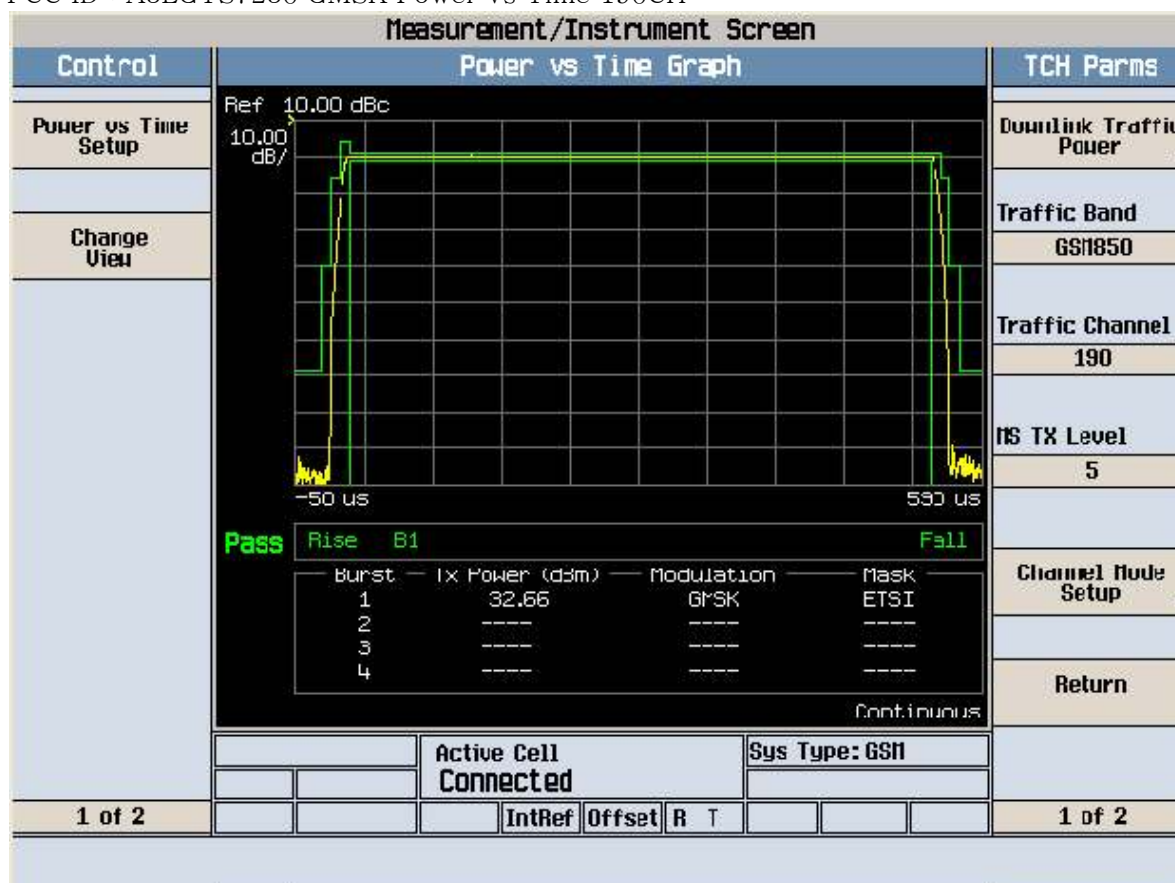

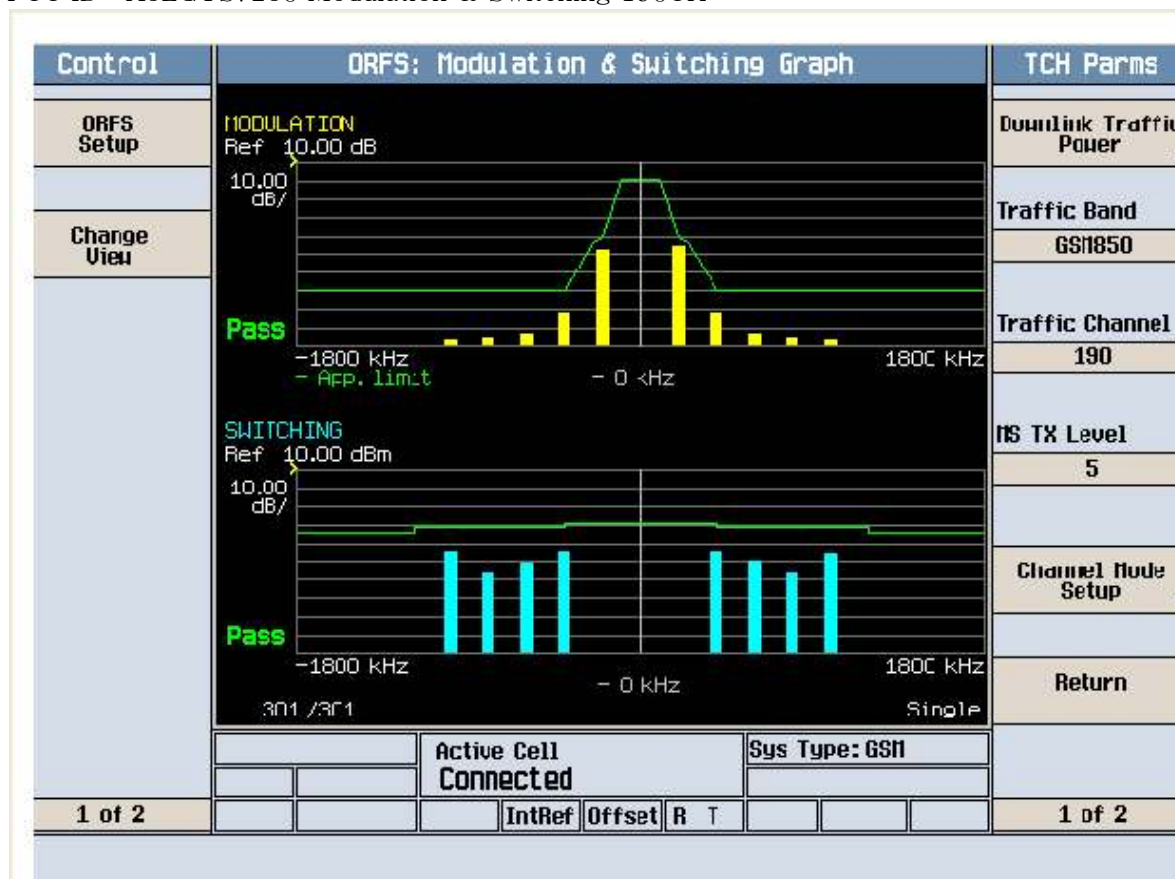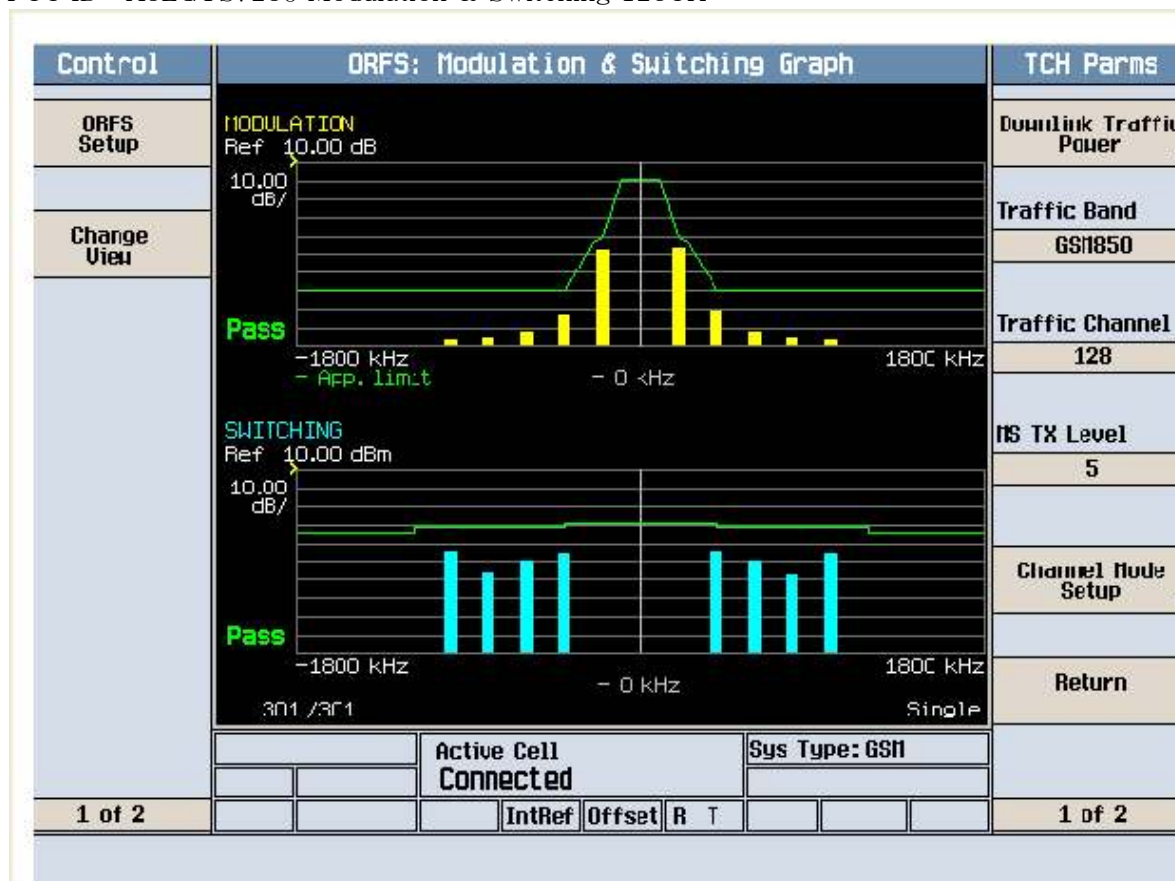


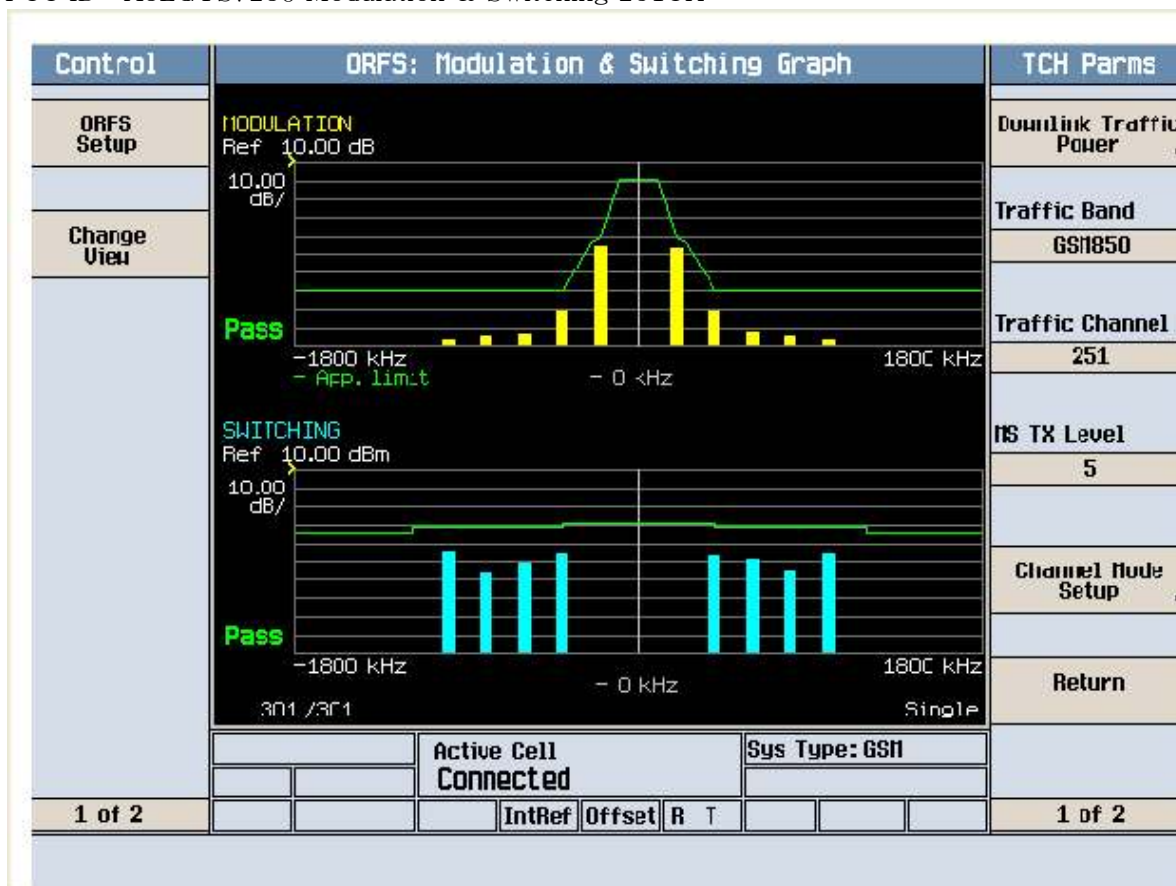

Agilent

R L


Freq/Channel

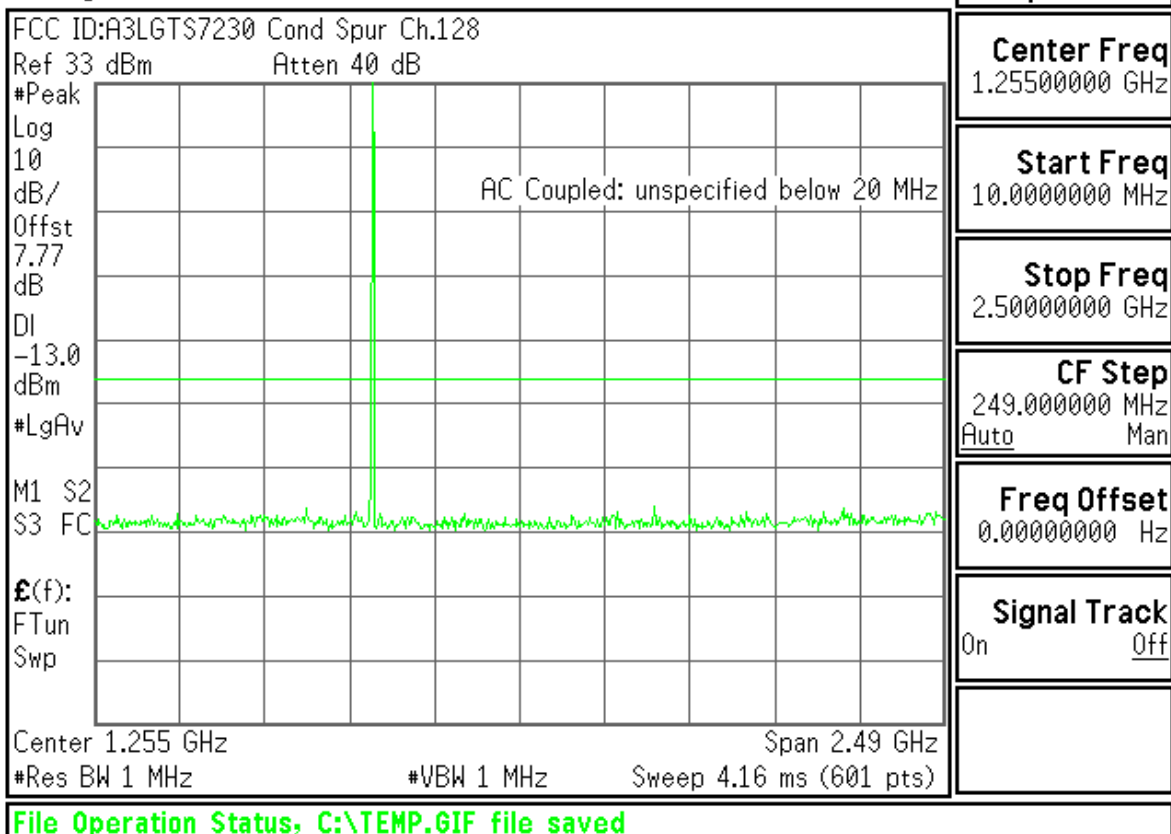

Agilent

R L


Freq/Channel

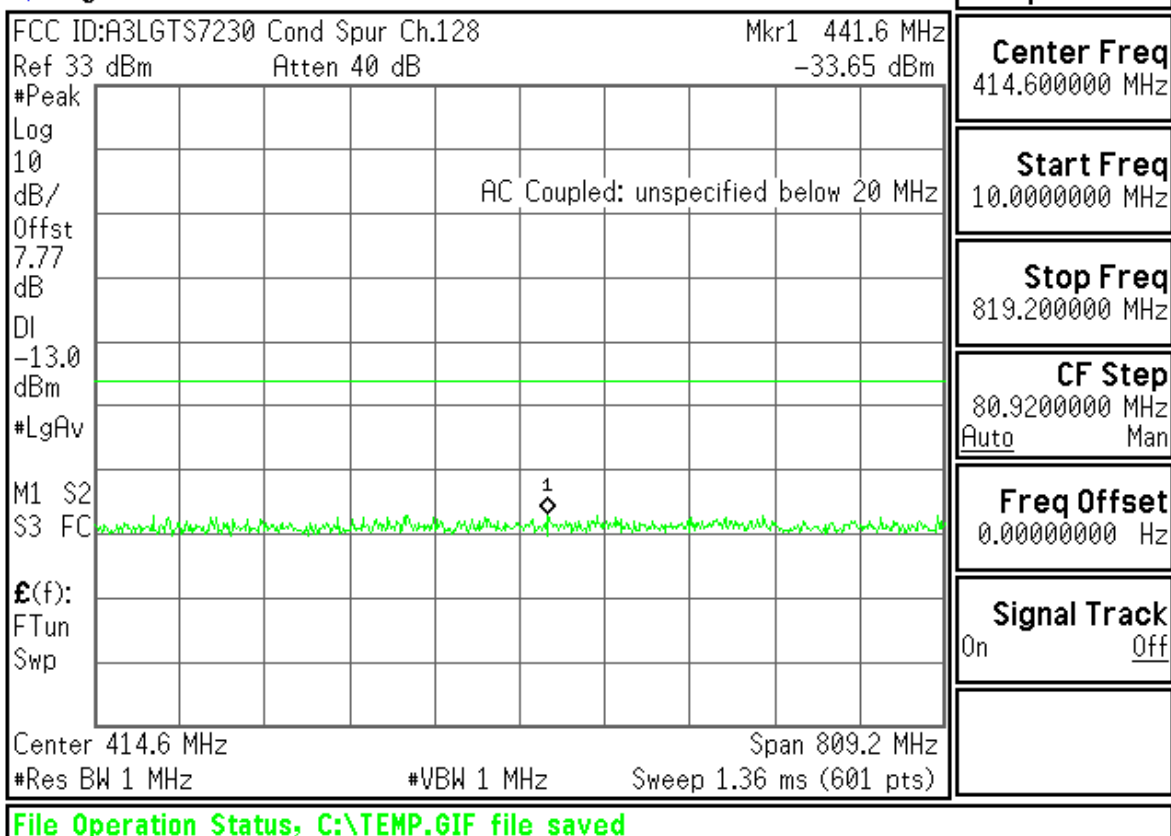

Agilent

R L

Freq/Channel

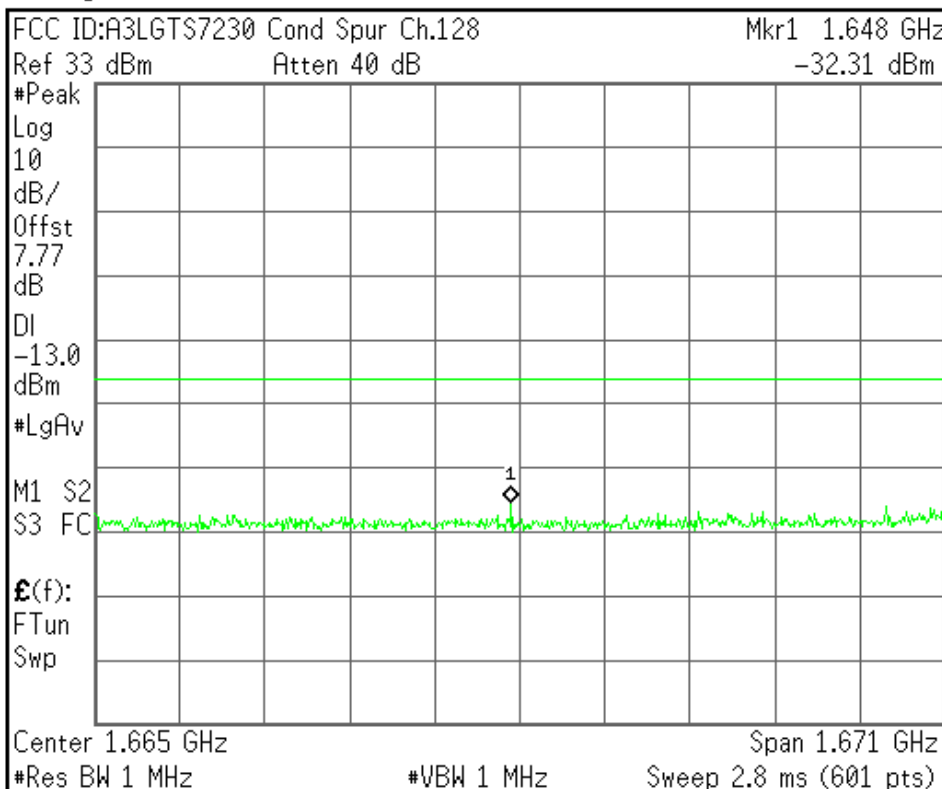

Center Freq
 1.66460000 GHz

Start Freq
 829.200000 MHz

Stop Freq
 2.50000000 GHz

CF Step
 167.080000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

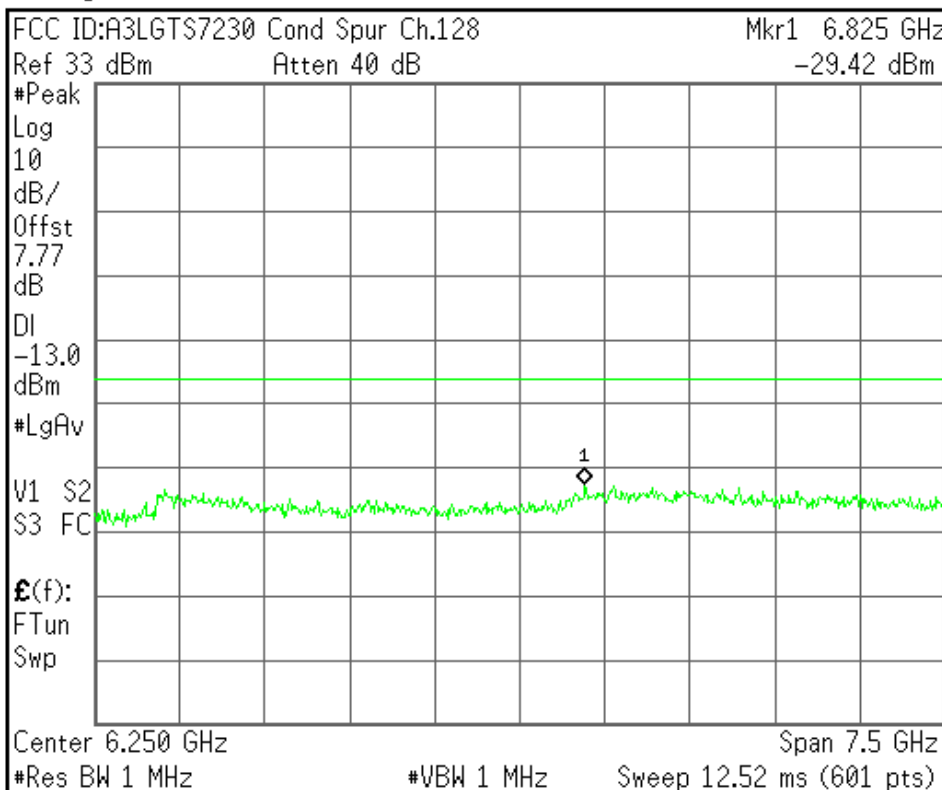

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz

Stop Freq
 10.00000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Cond Spur Ch.190

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Cond Spur Ch.190

Mkr1 367.4 MHz

Ref 33 dBm

Atten 40 dB

-33.73 dBm

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
420.800000 MHz

Start Freq
10.0000000 MHz

Stop Freq
831.600000 MHz

CF Step
82.1600000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 420.8 MHz

Span 821.6 MHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 1.4 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

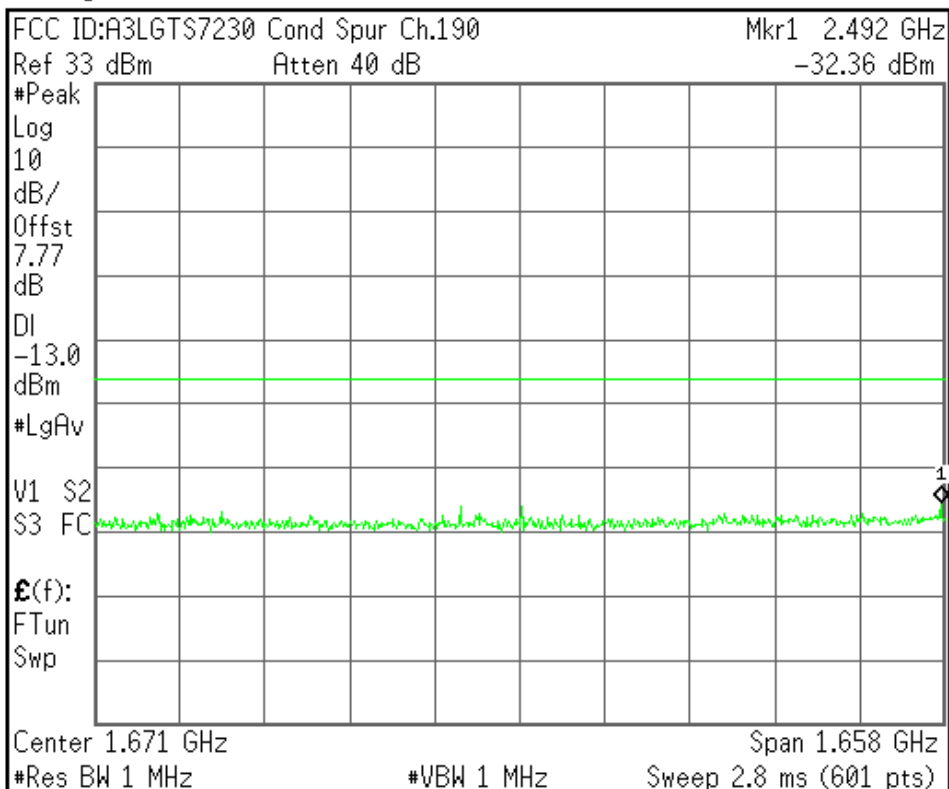

Center Freq
 1.67080000 GHz

Start Freq
 841.600000 MHz

Stop Freq
 2.50000000 GHz

CF Step
 165.840000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

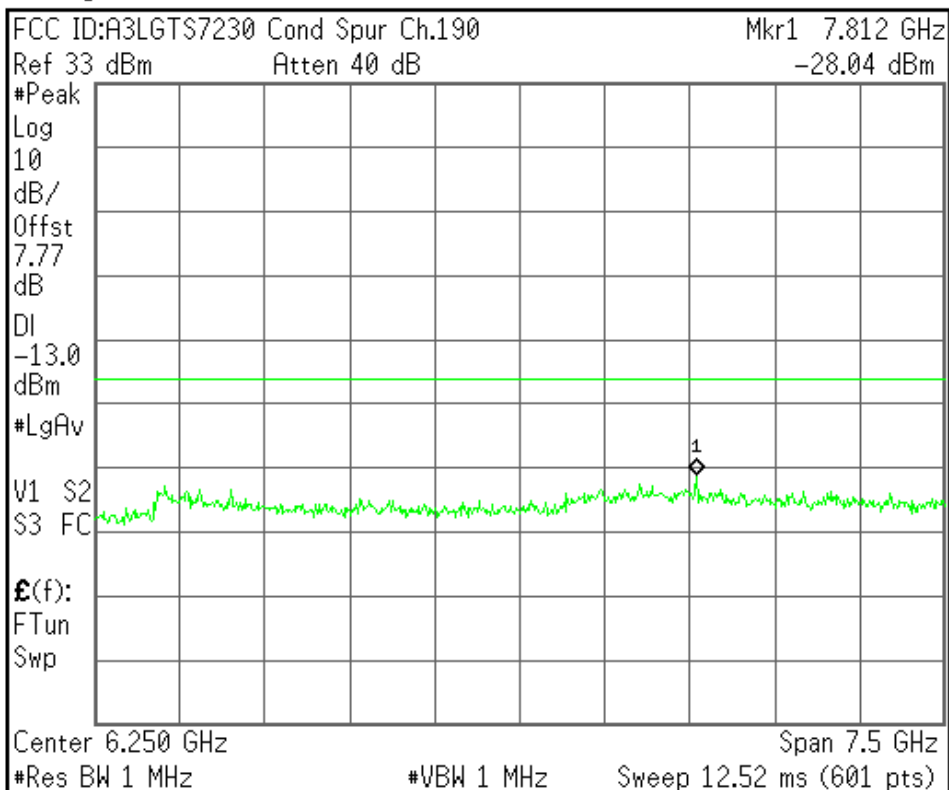

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz

Stop Freq
 10.00000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Cond Spur Ch.251

Ref 33 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Cond Spur Ch.251

Mkr1 279.6 MHz

Ref 33 dBm

Atten 40 dB

-33.90 dBm

#Peak

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv

V1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
426.900000 MHz

Start Freq
10.0000000 MHz

Stop Freq
843.800000 MHz

CF Step
83.3800000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 426.9 MHz

Span 833.8 MHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 1.4 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

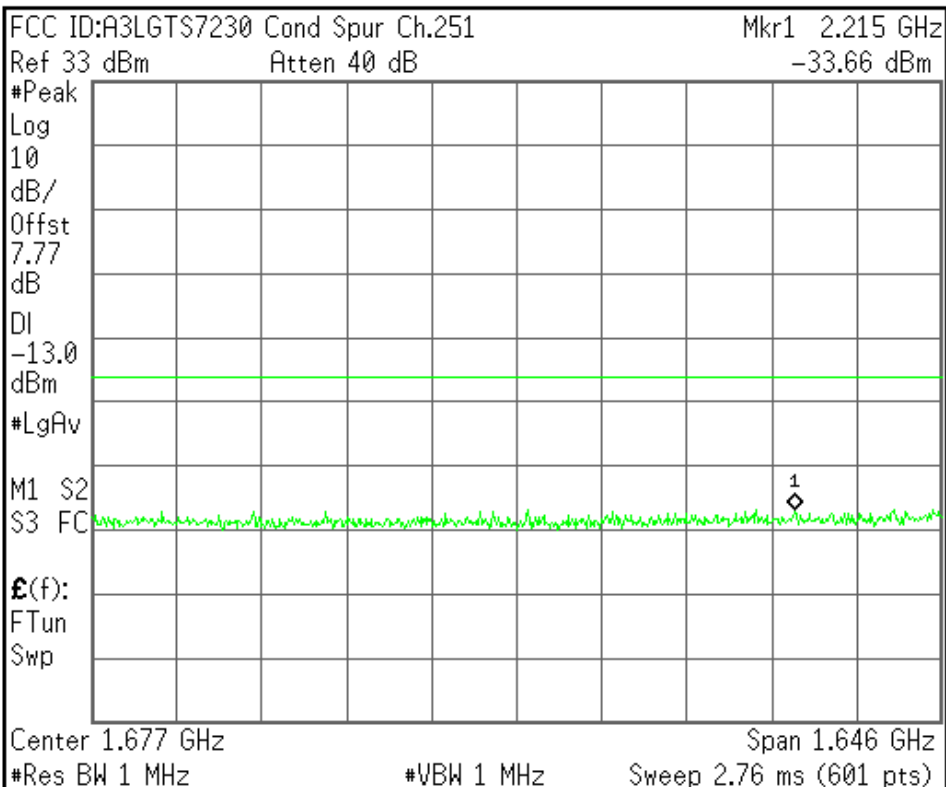

Center Freq
 1.67690000 GHz

Start Freq
 853.800000 MHz

Stop Freq
 2.50000000 GHz

CF Step
 164.620000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

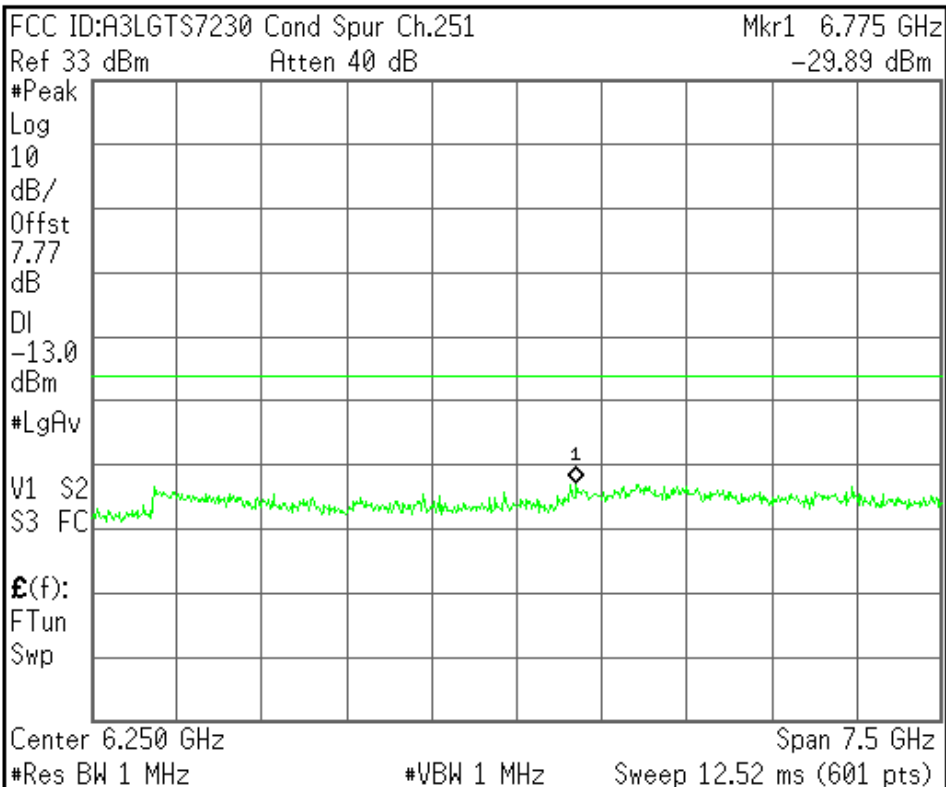

Center Freq
 6.25000000 GHz

Start Freq
 2.50000000 GHz

Stop Freq
 10.00000000 GHz

CF Step
 750.000000 MHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$7230 Band Edge Ch.128

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

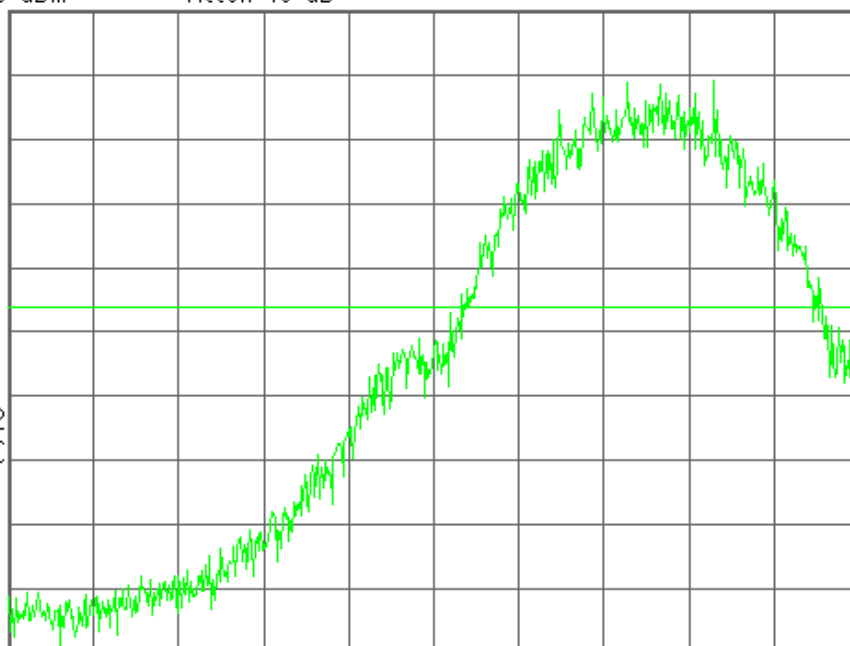

Center 824.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

824.000000 MHz

Start Freq

823.595000 MHz

Stop Freq

824.405000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$7230 Band Edge Ch.128

Mkr1 823.998 7 MHz

Ref 33 dBm

Atten 40 dB

-16.61 dBm

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

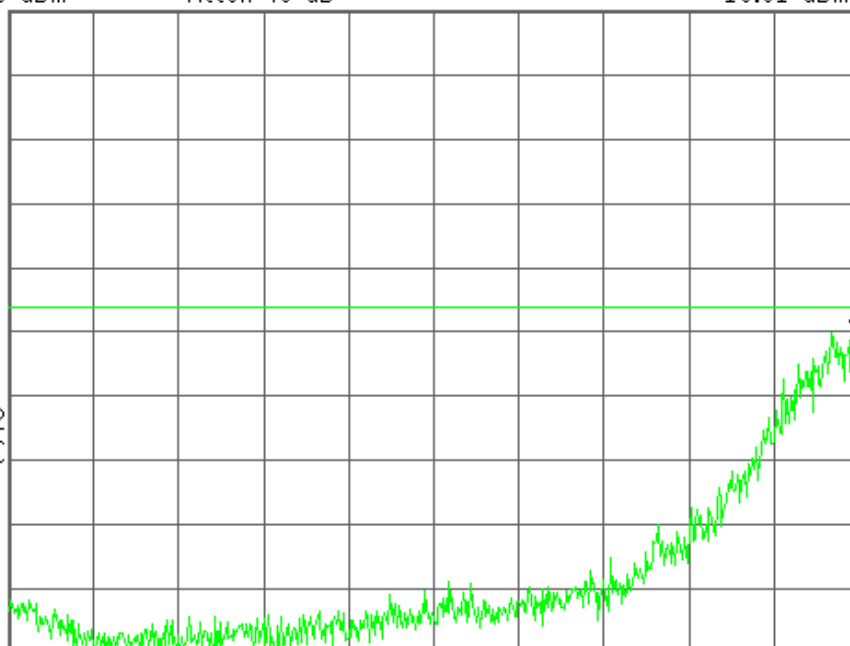

Center 823.595 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq

823.595000 MHz

Start Freq

823.190000 MHz

Stop Freq

824.000000 MHz

CF Step

81.0000000 kHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$7230 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

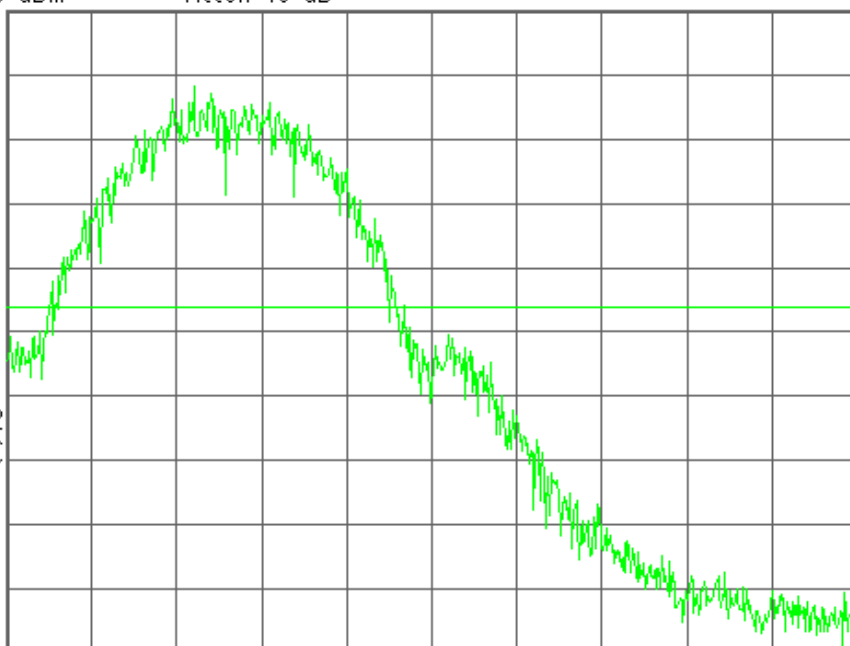

Center 849.000 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.000000 MHz

Start Freq
848.595000 MHz

Stop Freq
849.405000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$7230 Band Edge Ch.251

Ref 33 dBm

Atten 40 dB

Mkr1 849.000 0 MHz

-16.29 dBm

#Avg

Log

10

dB/

Offst

7.77

dB

DI

-13.0

dBm

#LgAv


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

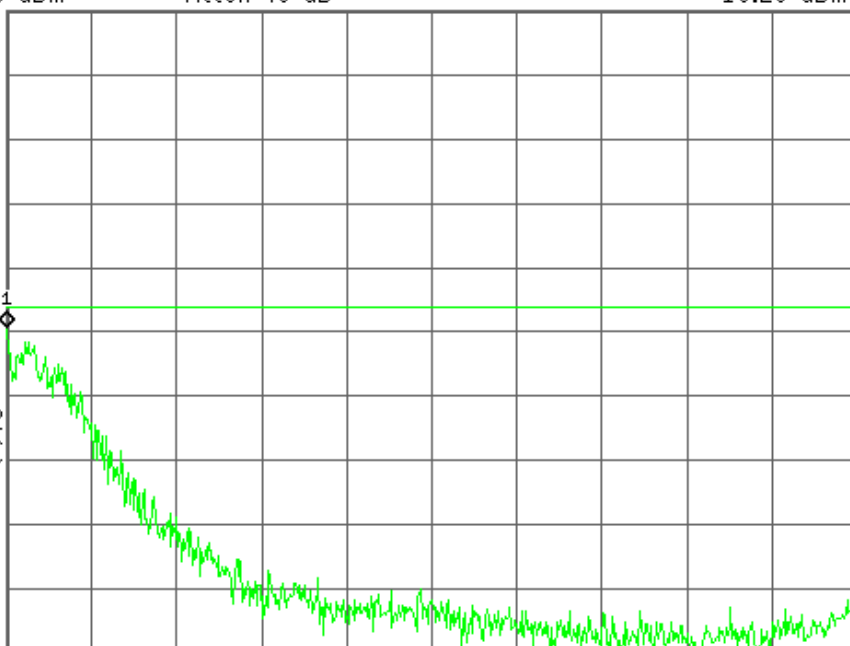

Center 849.405 0 MHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
849.405000 MHz

Start Freq
849.000000 MHz

Stop Freq
849.810000 MHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved



Agilent

R T

Freq/Channel

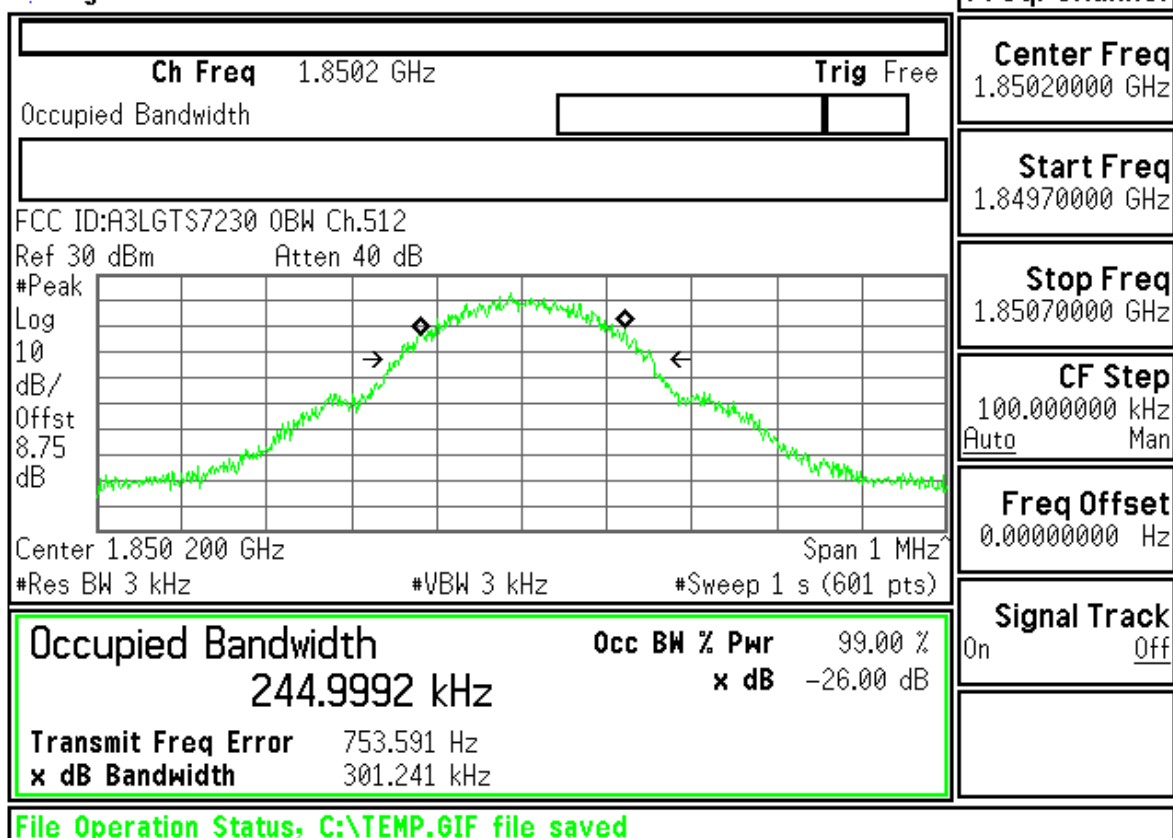
Center Freq
 1.85020000 GHz

Start Freq
 1.84970000 GHz

Stop Freq
 1.85070000 GHz

CF Step
 100.000000 kHz
 Auto Man


Freq Offset
 0.00000000 Hz

Signal Track
 On Off


Agilent

R T

Freq/Channel

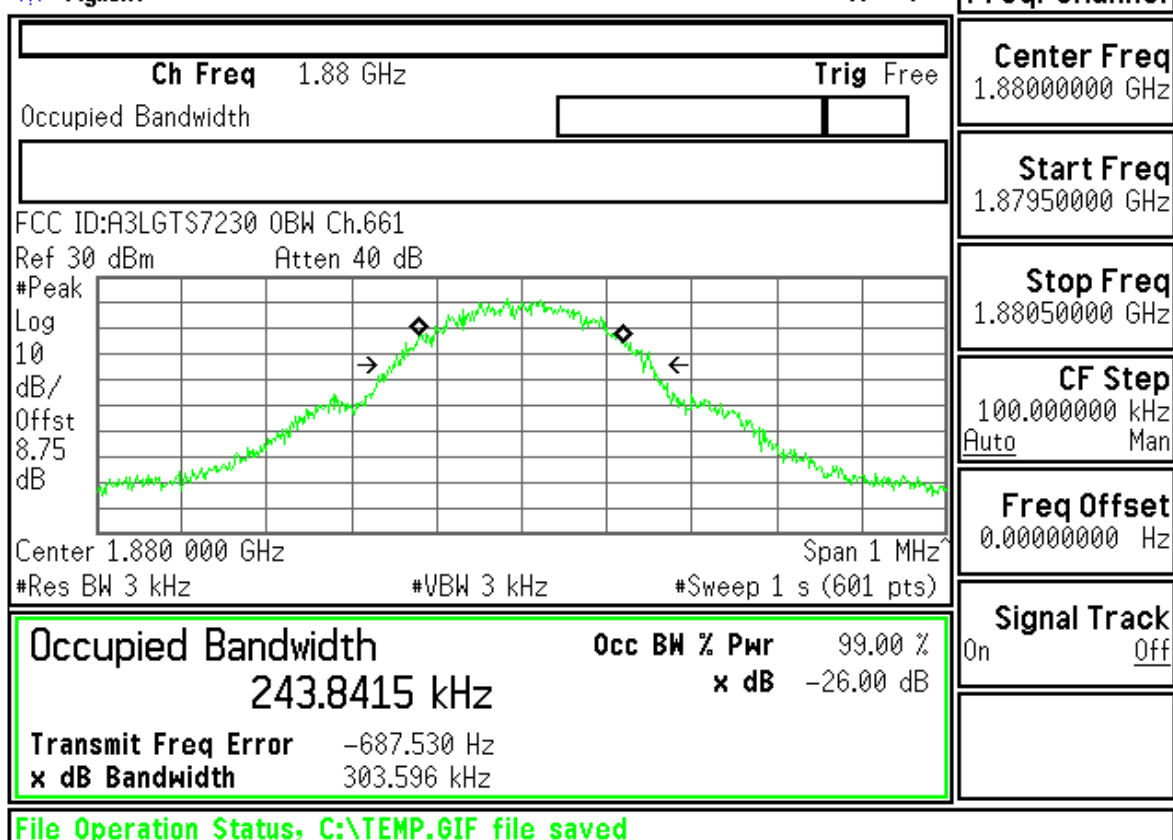
Center Freq
 1.88000000 GHz


Start Freq
 1.87950000 GHz

Stop Freq
 1.88050000 GHz

CF Step
 100.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off


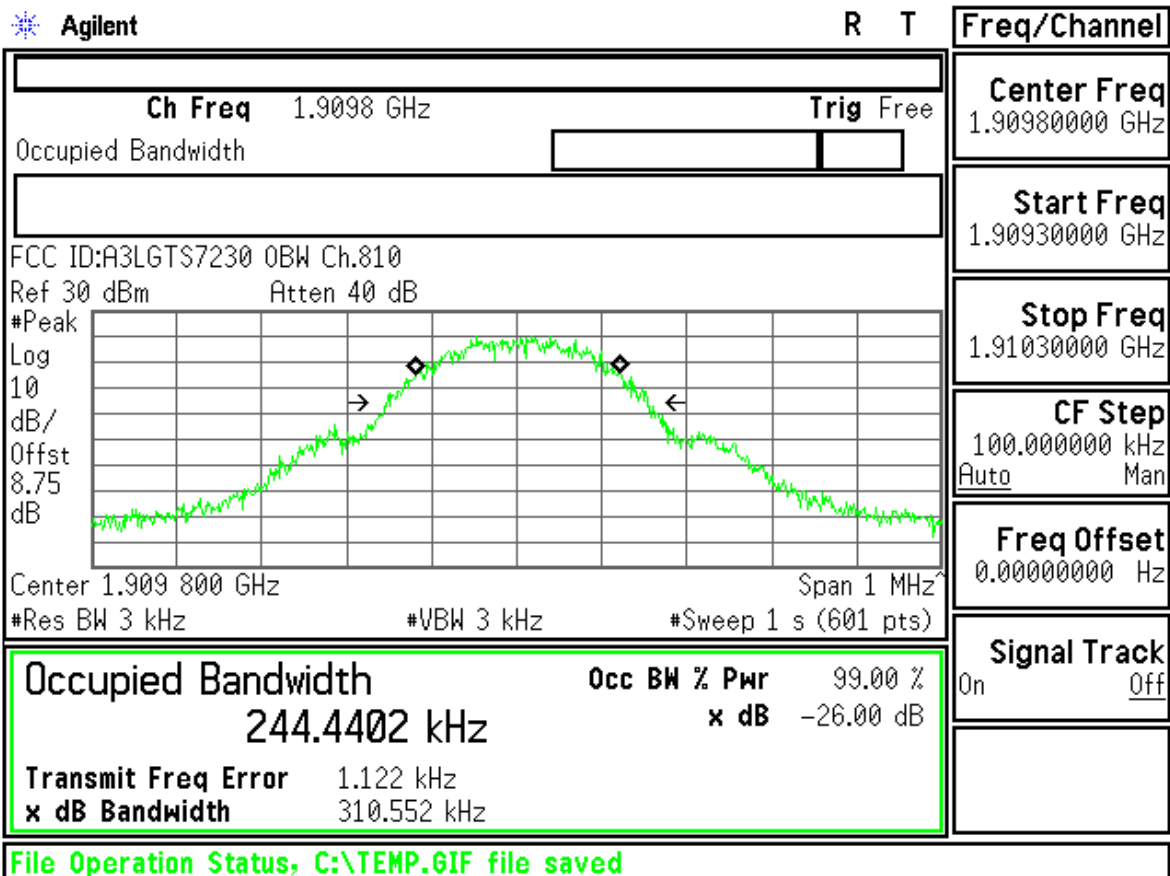




FCC ID : A3LGTS7230 Transmit Power 512CH



Measurement/Instrument Screen									
Control	Transmit Power						TCH Parms		
Transmit Power Setup							Downlink Traffic Power		
		Burst 1	Burst 2	Burst 3	Burst 4		Traffic Band		
	Burst Power	29.81	----	----	----		PCS		
	Estimated Carrier Power	29.81	----	----	----		Traffic Channel		
						Single	512		
	Phase & Frequency Error						MS TX Level		
		Peak Phase °	RMS Phase °	Frequency Hz			0		
	Minimum	1.94	0.67	4.26					
	Maximum	3.18	0.96	18.16			Channel Mode Setup		
	Average	2.51	0.80	10.97					
	Pass/Fail	Pass	Pass	Pass			Return		
						50 / 50 Single			
		Active Cell Connected			Sys Type: GSM				
1 of 2		IntRef	Offset	R T			1 of 2		

Measurement/Instrument Screen										
Control		Transmit Power						TCH Parms		
Transmit Power Setup ▾						Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power ▾
		Burst Power				29.57	----	----	----	Traffic Band
		Estimated Carrier Power				29.57	----	----	----	PCS
										Traffic Channel
Swap Window Positions						Single				661
		Phase & Frequency Error						MS TX Level		
				Peak Phase °	RMS Phase °	Frequency Hz		0		
		Minimum	1.66	0.65	19.64		Channel Mode Setup ▾			
				3.22	0.89	41.69		Return		
				2.37	0.78	24.85				
				Pass	Pass	Pass				
				50 / 50	Single					
1 of 2				Active Cell Connected		Sys Type: GSM		1 of 2		
				IntRef	Offset	R T				

Measurement/Instrument Screen										
Control		Transmit Power						TCH Parms		
Transmit Power Setup ▾						Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power ▾
		Burst Power				29.51	----	----	----	Traffic Band
		Estimated Carrier Power				29.51	----	----	----	PCS
										Traffic Channel
Swap Window Positions						Single				810
		Phase & Frequency Error						MS TX Level		
				Peak Phase °	RMS Phase °	Frequency Hz		0		
		Minimum	1.94	0.69	-15.66		Channel Mode Setup ▾			
				3.09	0.96	1.47		Return		
				2.46	0.81	-7.64				
				Pass	Pass	Pass				
				50 / 50	Single					
1 of 2				Active Cell Connected		Sys Type: GSM		1 of 2		
				IntRef	Offset	R T				

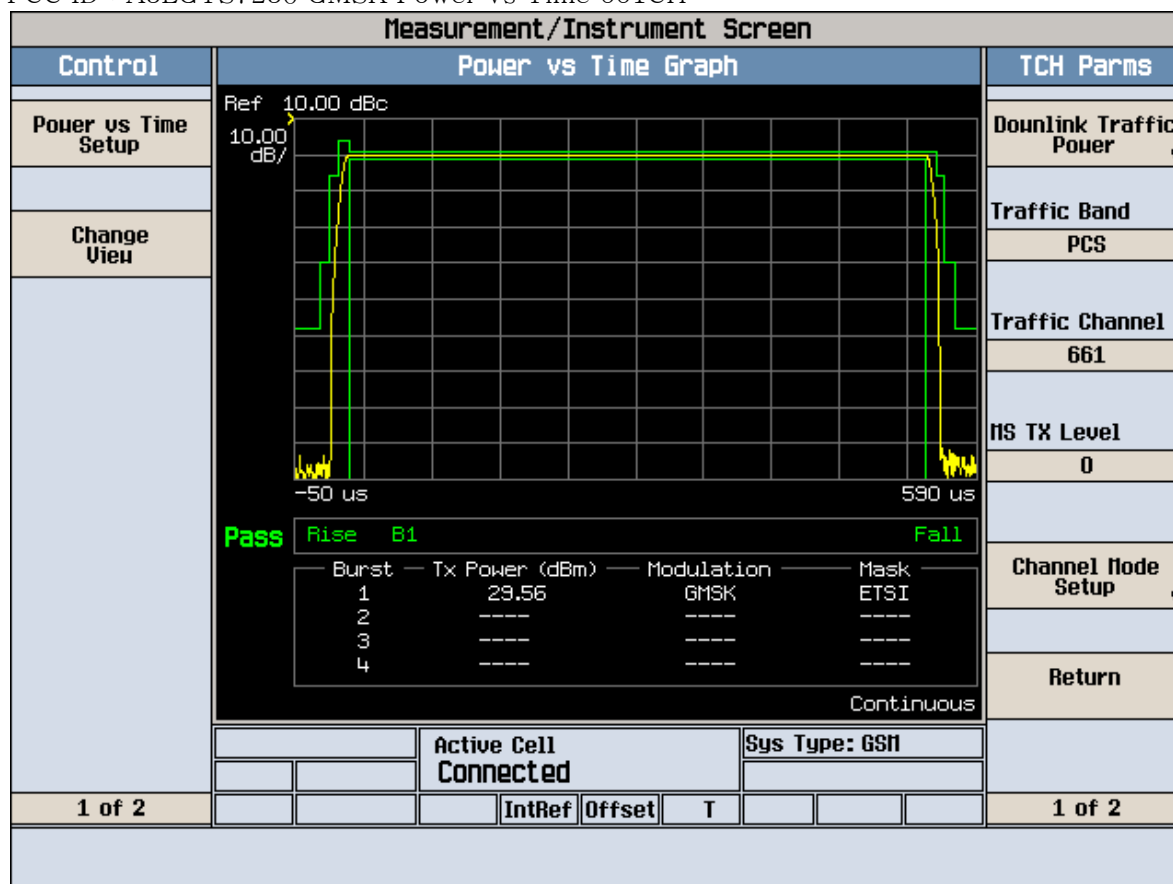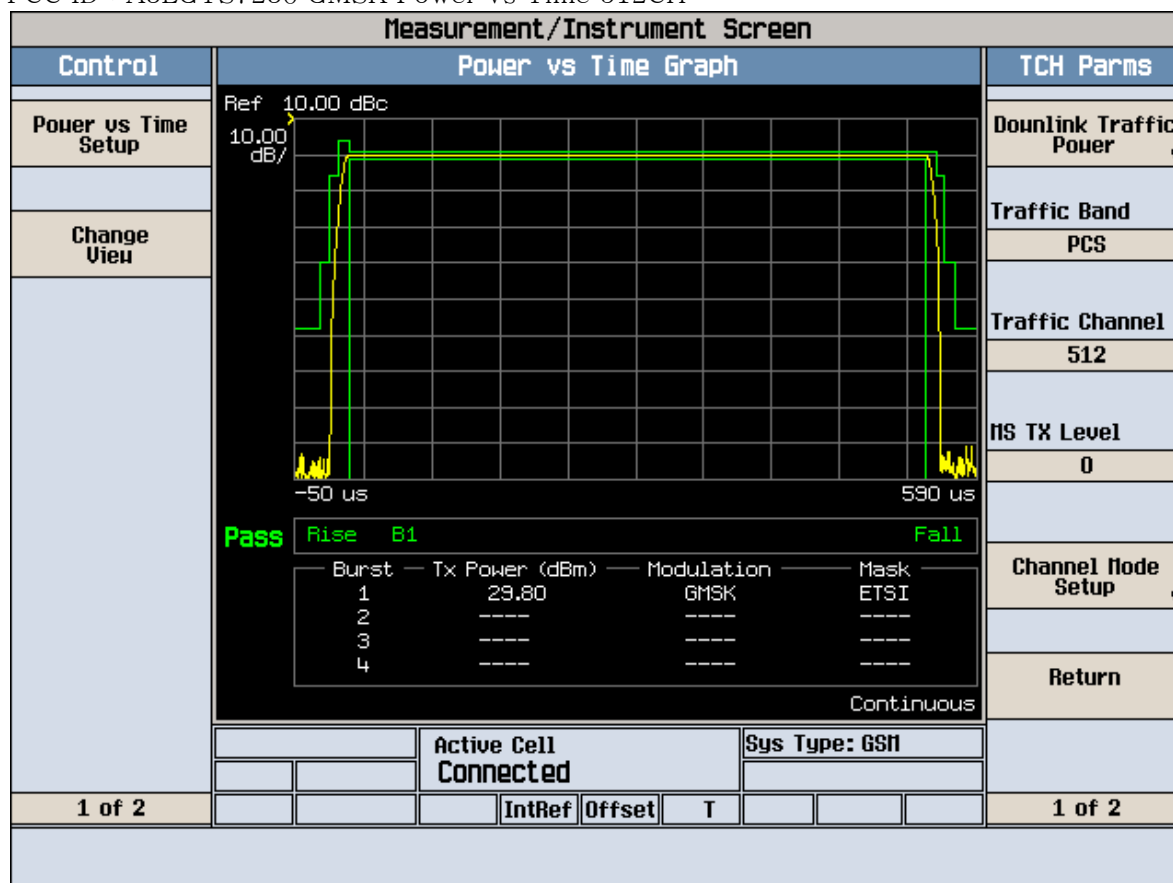

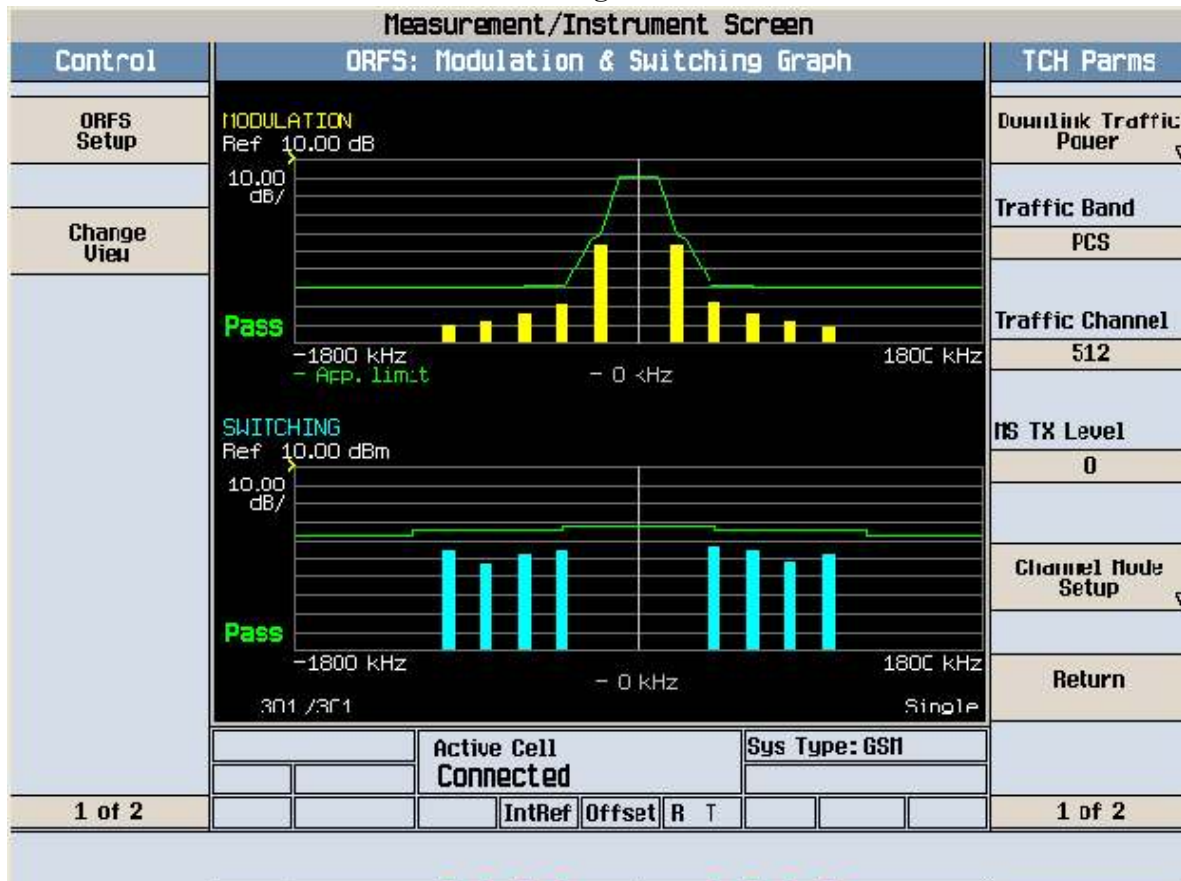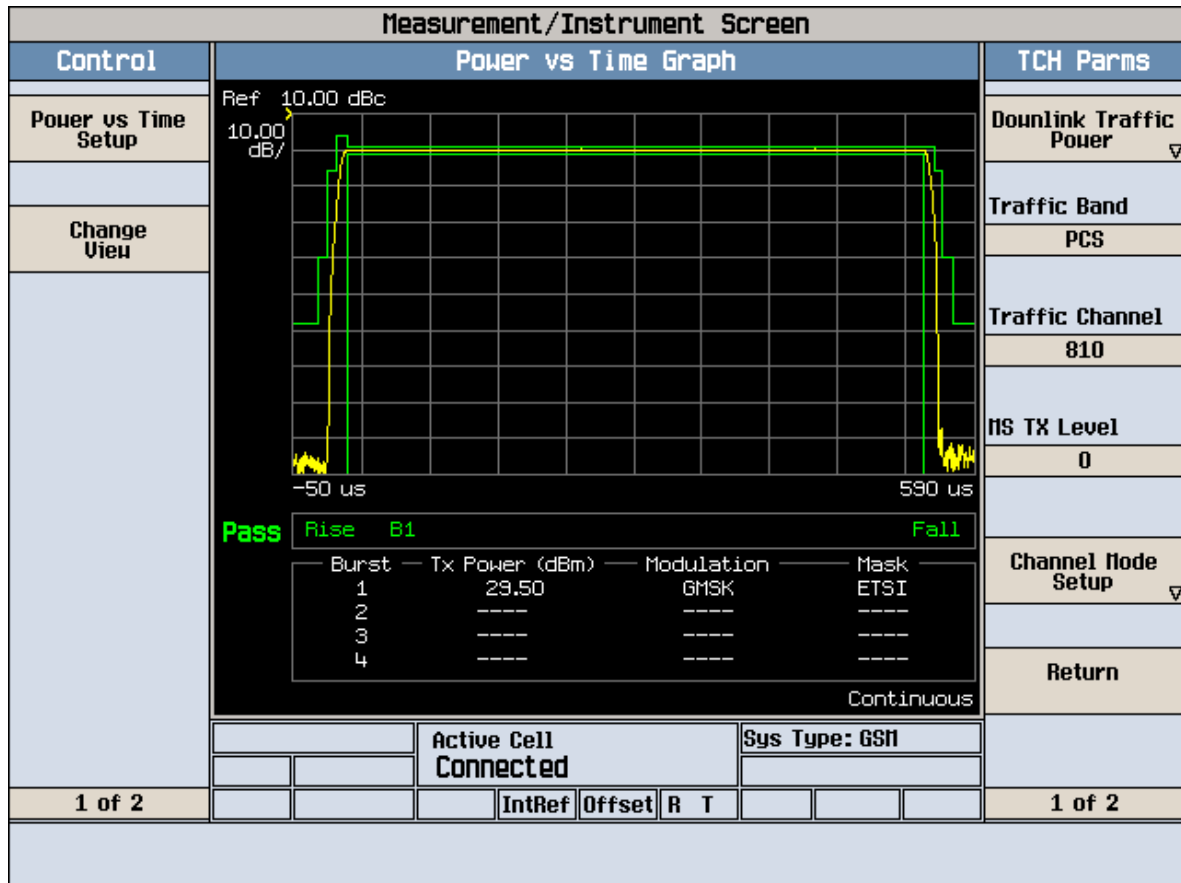

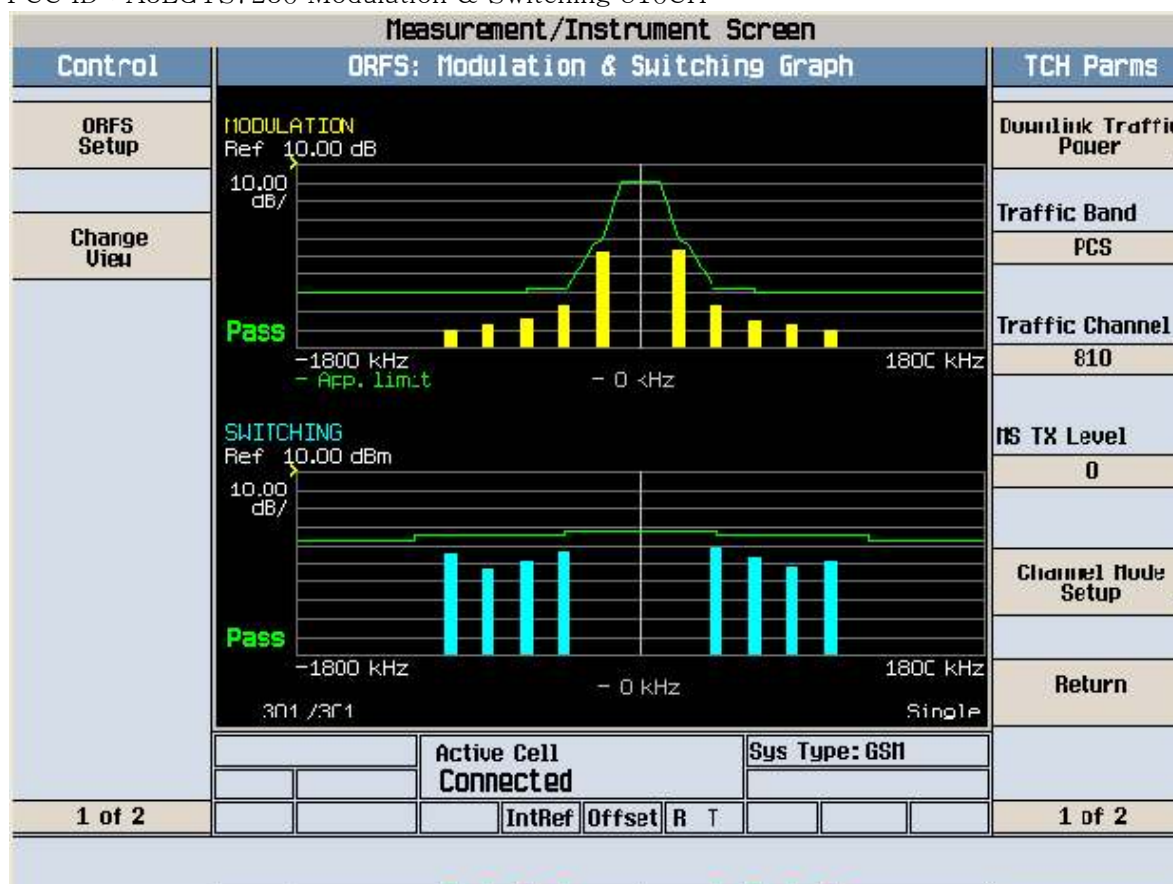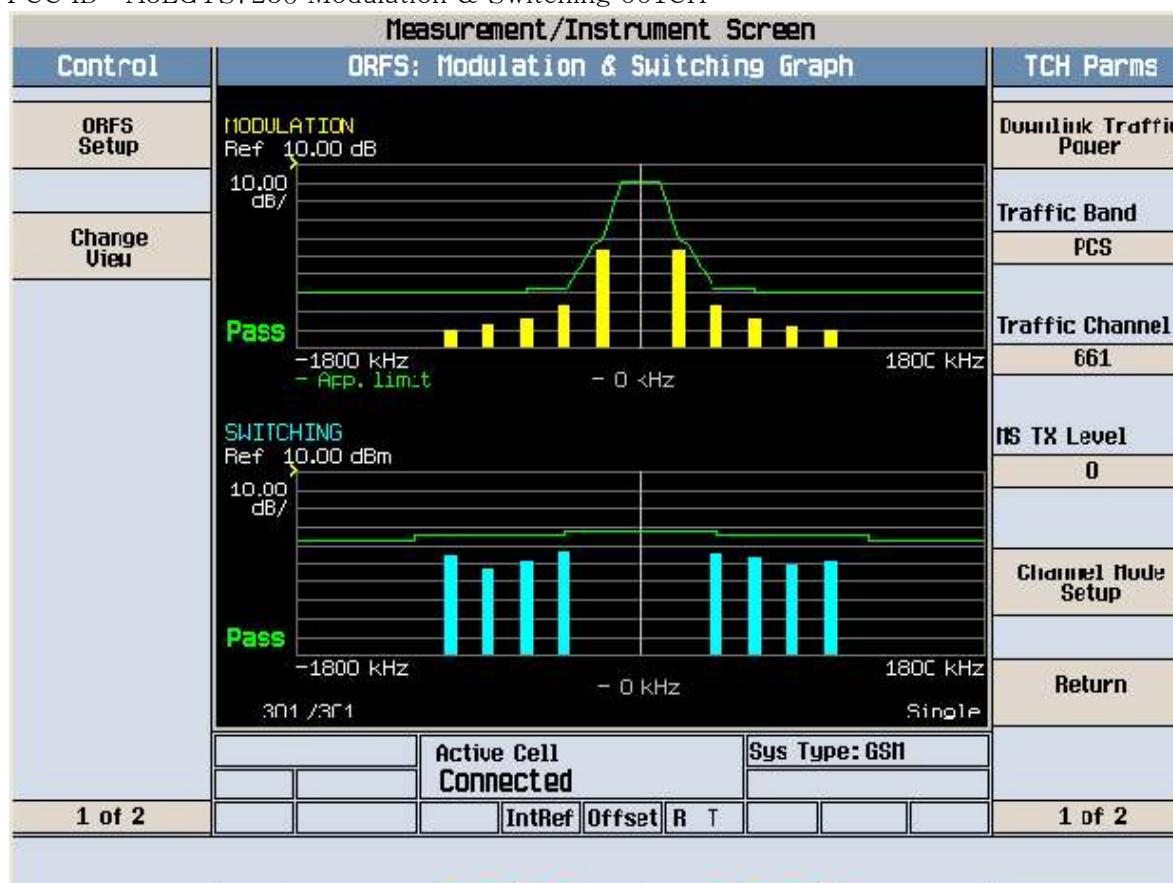

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$7230 Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Copyright 2000-2005 Agilent Technologies

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$7230 Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

Mkr1 511 MHz

-32.17 dBm

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
926.350000 MHz

Start Freq
10.0000000 MHz

Stop Freq
1.84270000 GHz

CF Step
183.270000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 926 MHz

Span 1.833 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.08 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

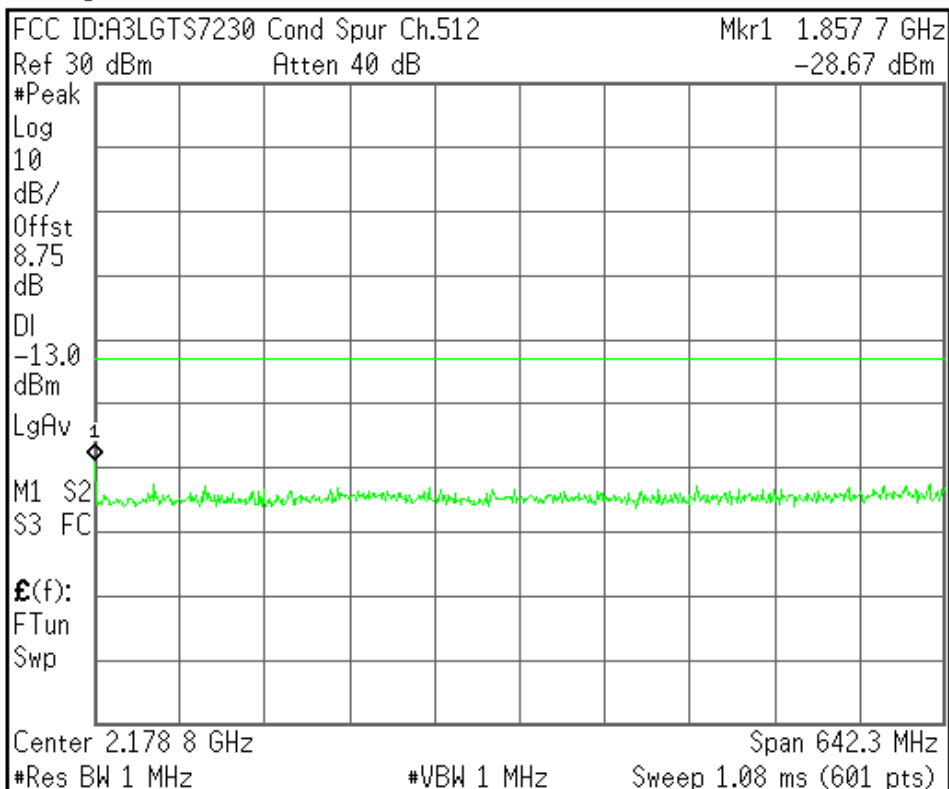

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz

CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

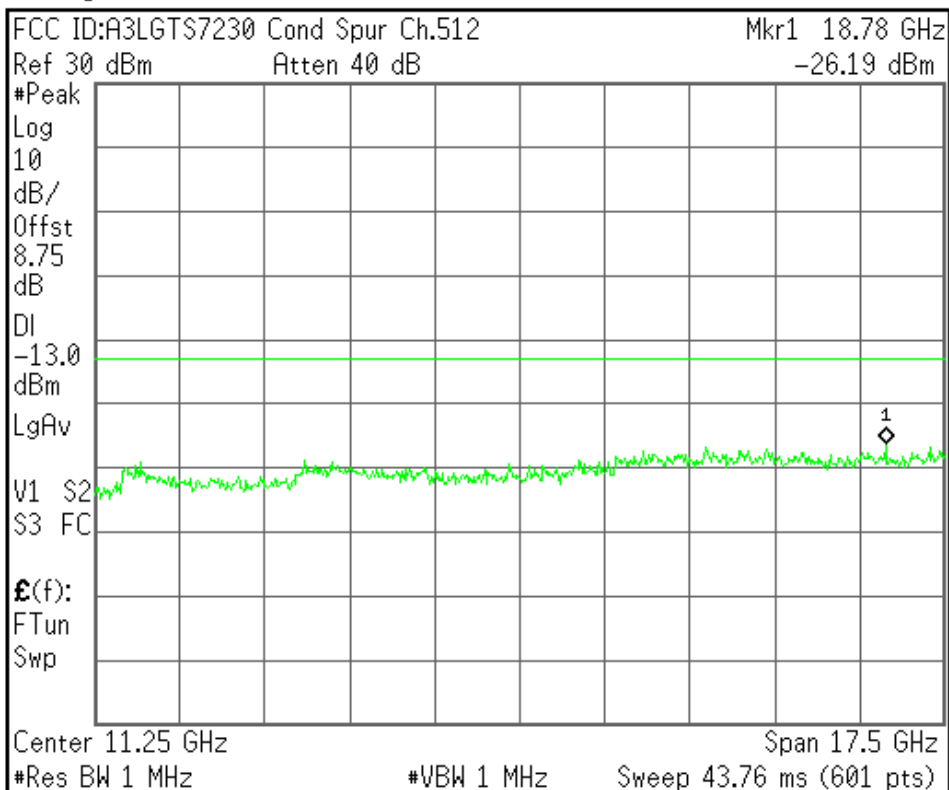

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Cond Spur Ch.661

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
1.25500000 GHz

Start Freq
10.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
249.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Cond Spur Ch.661

Mkr1 1.872 GHz

Ref 30 dBm

Atten 40 dB

-30.18 dBm

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq
941.250000 MHz

Start Freq
10.0000000 MHz

Stop Freq
1.87250000 GHz

CF Step
186.250000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Center 941 MHz

Span 1.863 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.12 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

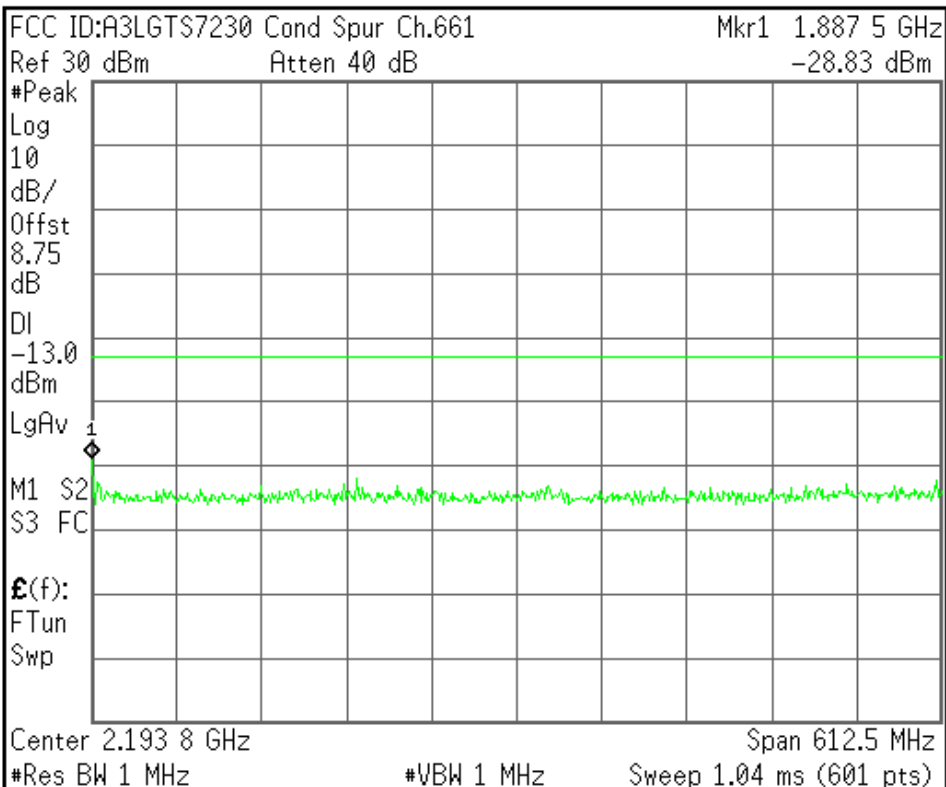

Center Freq
2.19375000 GHz

Start Freq
1.88750000 GHz

Stop Freq
2.50000000 GHz

CF Step
61.2500000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

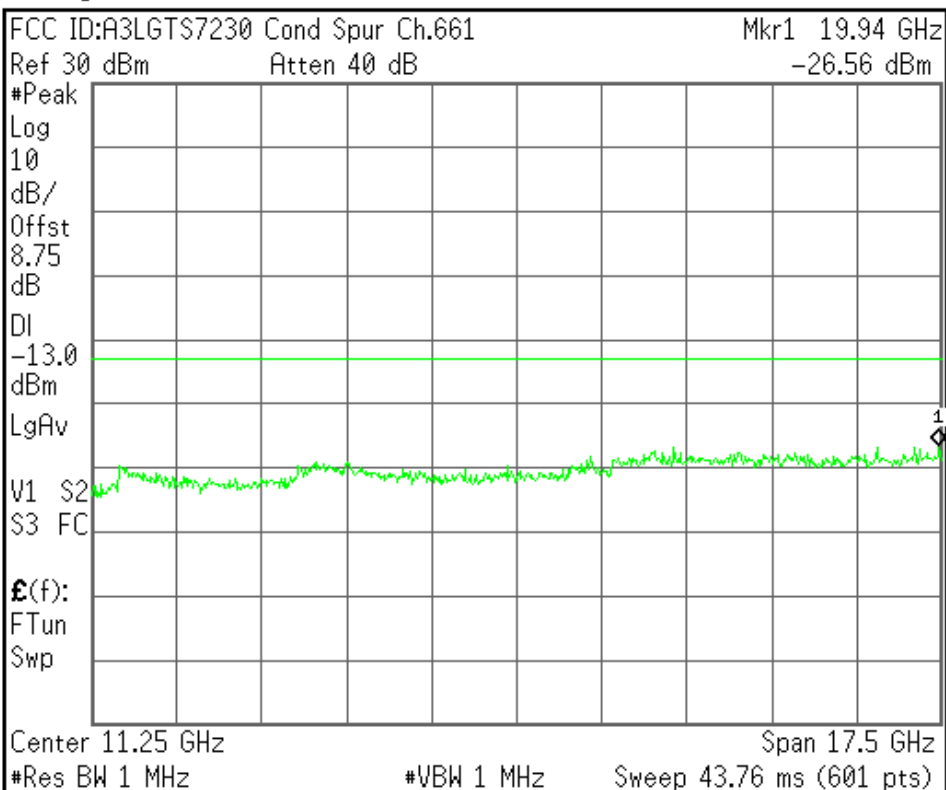

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Cond Spur Ch.810

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

1.25500000 GHz

Start Freq

10.0000000 MHz

Stop Freq

2.50000000 GHz

CF Step

249.000000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Cond Spur Ch.810

Mkr1 1.902 GHz

Ref 30 dBm

Atten 40 dB

-30.21 dBm

#Peak

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

£(f):

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center Freq

956.150000 MHz

Start Freq

10.0000000 MHz

Stop Freq

1.90230000 GHz

CF Step

189.230000 MHz

Auto

Man

Freq Offset

0.00000000 Hz

Signal Track

On

Off

Center 956 MHz

Span 1.892 GHz

#Res BW 1 MHz

#VBW 1 MHz


Sweep 3.16 ms (601 pts)

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

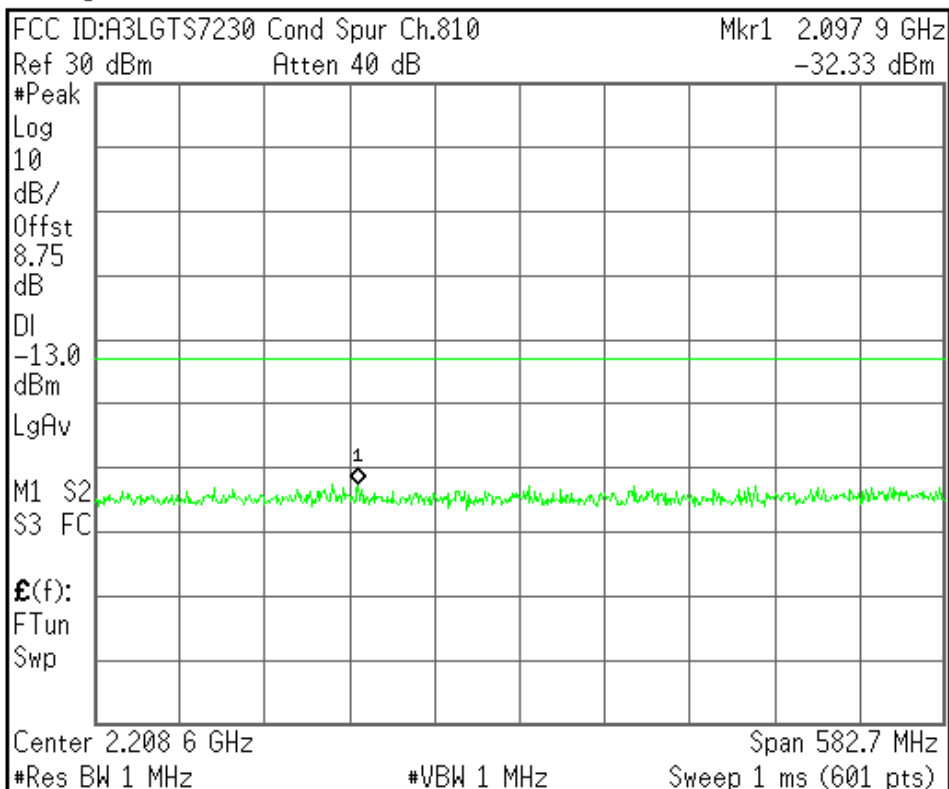

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

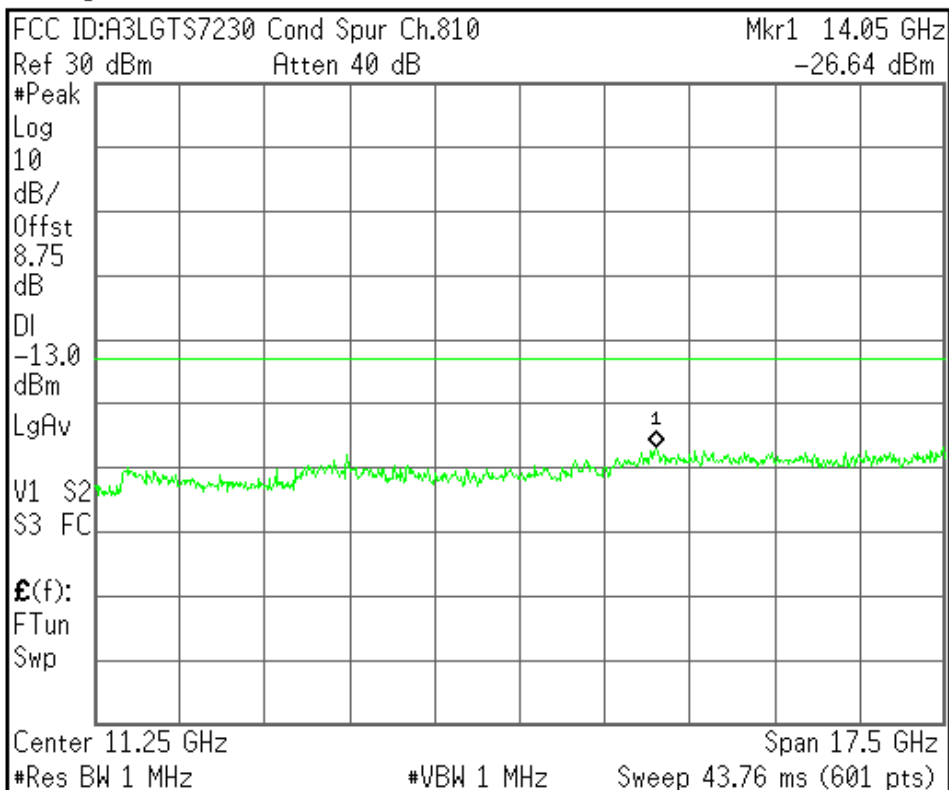

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

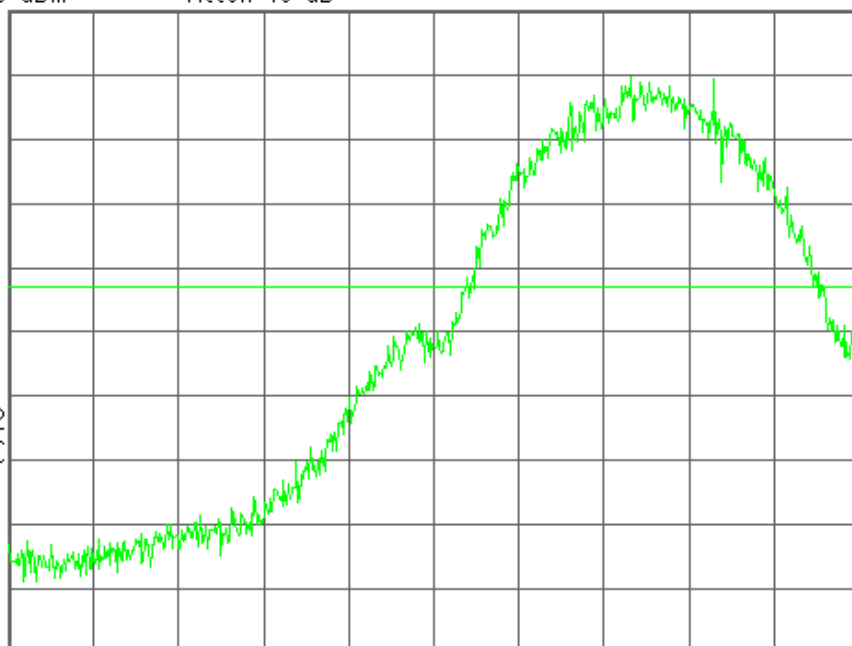

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT57230 Band Edge Ch.512

Mkr1 1.849 982 6 GHz

Ref 30 dBm

Atten 40 dB

-19.30 dBm

#Avg

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

£(f):

f>50k

Swp

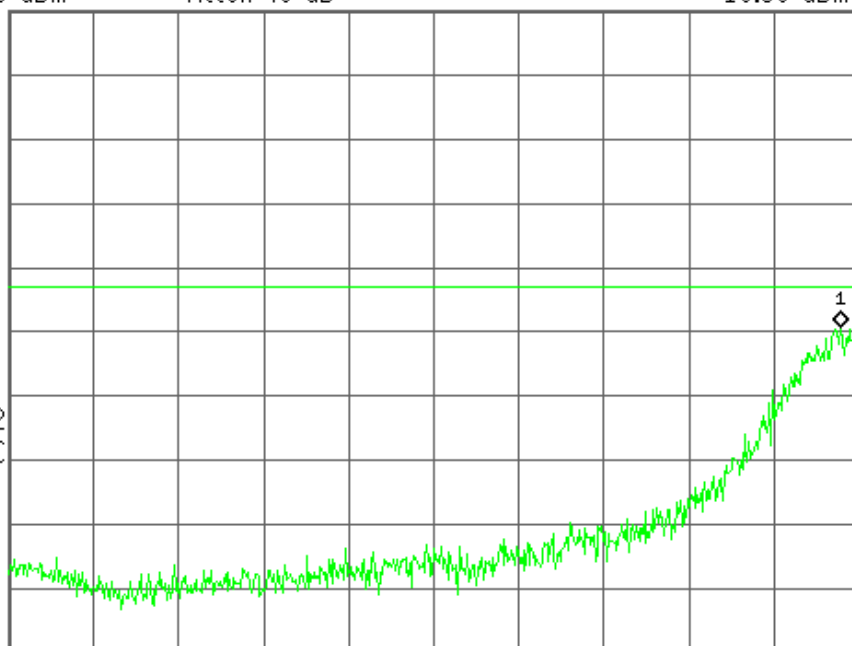

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LGT\$7230 Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

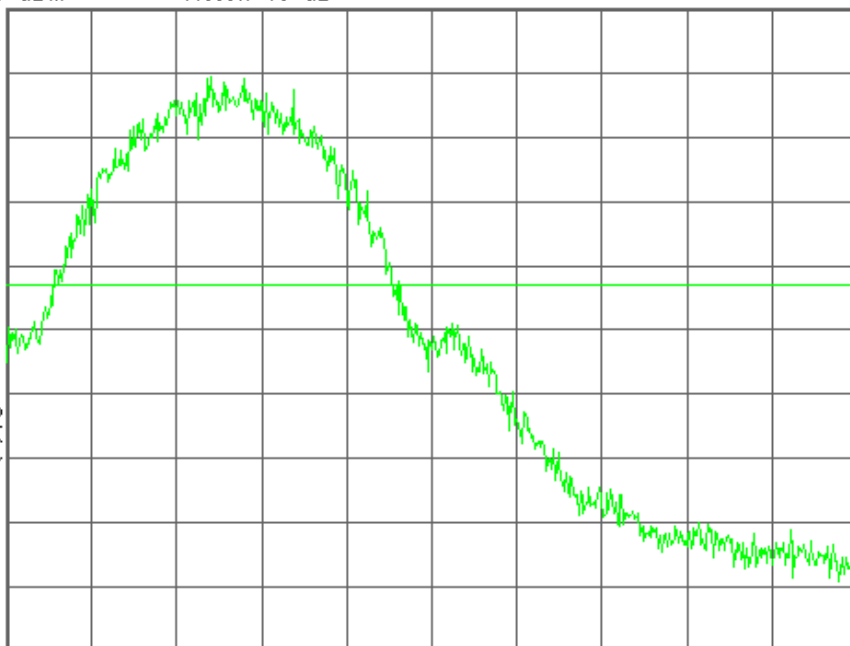

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT\$7230 Band Edge Ch.810

Mkr1 1.910 021 8 GHz

Ref 30 dBm

Atten 40 dB

-17.61 dBm

#Avg

Log

10

dB/

Offst

8.75

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

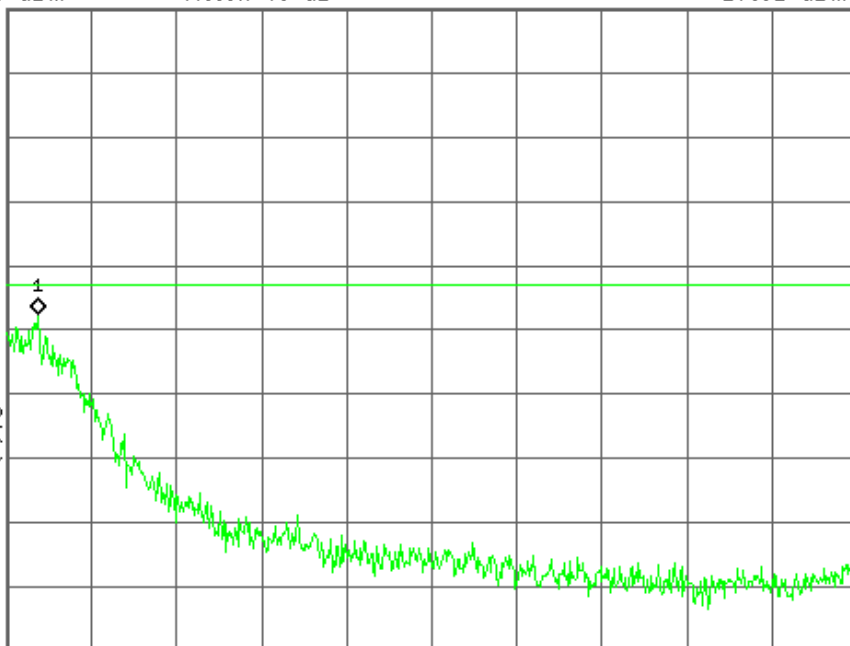

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

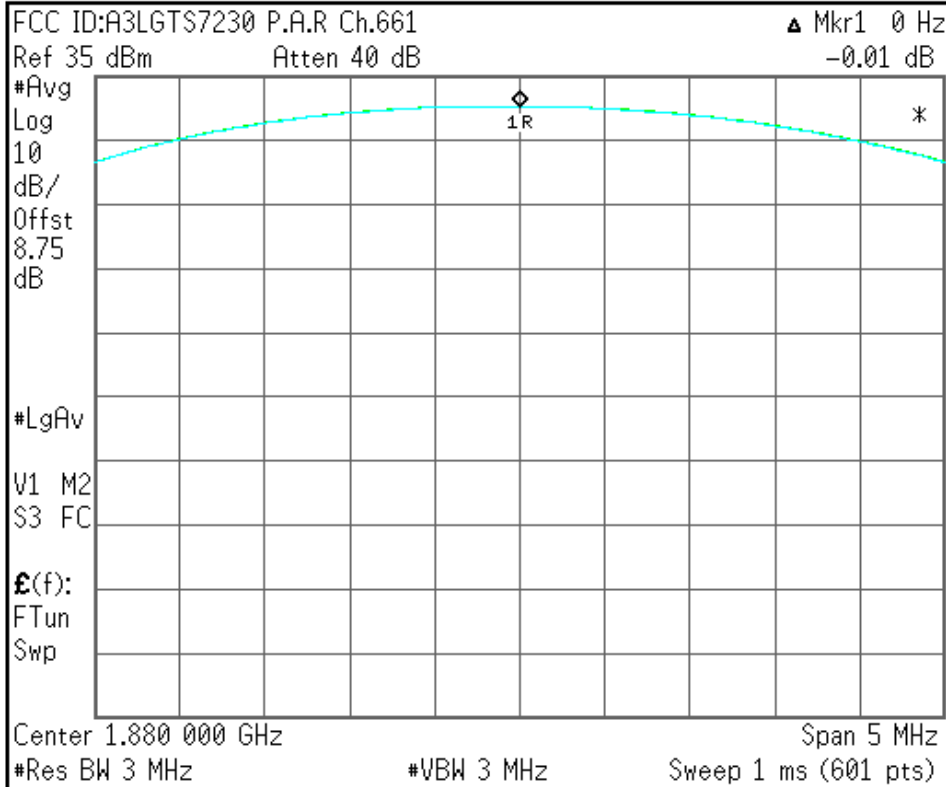

Center Freq
1.88000000 GHz

Start Freq
1.87750000 GHz

Stop Freq
1.88250000 GHz

CF Step
500.000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved