

Test Report

FCC ID: 2AOSUMF500

Date of issue: Feb. 19, 2020

Report number: MTi19122708-1E1

Sample description: Wireless Charging Stand

Model(s): MF500, MF400, MF510, MF520, MF600, MF700, MF800, MF900

Applicant: Shenzhen Kaixinghui Technology Co., Ltd.

Address: 206, 2nd Floor G Bldg. Hengchangrong xinghui Industrial park,
Huaning Rd., Dalang St. Longhua Dist. Shenzhen, Guangdong, China

Date of test: Jan. 02, 2020 – Jan. 15, 2020

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Table of Contents

1	GENERAL INFORMATION	4
1.1	FEATURE OF EQUIPMENT UNDER TEST (EUT).....	4
1.2	TEST MODE	4
1.3	EUT TEST SETUP	5
1.4	ANCILLARY EQUIPMENT	5
1.5	MEASUREMENT UNCERTAINTY	5
2	SUMMARY OF TEST RESULT	6
2.1	OPERATION CHANNEL LIST	6
2.2	TEST CHANNEL	6
3	TEST FACILITIES AND ACCREDITATIONS	7
3.1	TEST LABORATORY	7
3.2	ENVIRONMENTAL CONDITIONS	7
3.3	MEASUREMENT UNCERTAINTY.....	7
3.4	TEST SOFTWARE	7
4	LIST OF TEST EQUIPMENT	8
5	TEST RESULTS	9
5.1	ANTENNA REQUIREMENT	9
5.1.1	<i>Standard requirement</i>	9
5.1.2	<i>EUT Antenna</i>	9
5.2	CONDUCTED EMISSION	10
5.2.1	<i>Limits</i>	10
5.2.2	<i>Test Procedures</i>	10
5.2.3	<i>Test Setup</i>	10
5.2.4	<i>Test Result</i>	10
5.3	RADIATED EMISSION.....	15
5.3.1	<i>Limits</i>	15
5.3.2	<i>Test Procedures</i>	16
5.3.3	<i>Test Setup</i>	17
5.3.4	<i>Test Result</i>	17
5.4	OCCUPIED BANDWIDTH	22
5.4.1	<i>Test method</i>	22
5.4.2	<i>Test result</i>	22
	PHOTOGRAPHS OF THE TEST SETUP	24
	PHOTOGRAPHS OF THE EUT	26

Test Result Certification

Applicant's name: Shenzhen Kaixinghui Technology Co., Ltd.

Address: 206, 2nd Floor G Bldg. Hengchangrong xinghui Industrial park, Huaning Rd., Dalang St. Longhua Dist. Shenzhen, Guangdong, China

Manufacture's name: Shenzhen Kaixinghui Technology Co., Ltd.

Address: 206, 2nd Floor G Bldg. Hengchangrong xinghui Industrial park, Huaning Rd., Dalang St. Longhua Dist. Shenzhen, Guangdong, China

Product name: Wireless Charging Stand

Trademark: Yootech

Model name: MF500, MF400, MF510, MF520, MF600, MF700, MF800, MF900

Standards: FCC Part 15C

Test procedure: ANSI C63.10-2013

This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


Tested by:



Danny Xu

Jan. 15, 2020

Reviewed by:



Leo Su

Feb. 19, 2020

Approved by:



Tom Xue

Feb. 19, 2020

1 GENERAL INFORMATION

1.1 Feature of equipment under test (EUT)

Product name:	Wireless Charging Stand
Model name:	MF500, MF400, MF510, MF520, MF600, MF700, MF800, MF900
Model difference:	All the model are the same circuit and RF module, except the model No..
Operation frequency:	115–205 kHz
Modulation type:	Load modulation
Antenna type:	Coil Antenna
Power supply:	DC 9V from adapter AC 120V/60Hz
Battery:	N/A
Adapter information:	N/A

1.2 Test mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test mode	Description
Mode 1	TX

Note1: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode for EMI, and its test data was showed.

Note2: EUT is tested under full load and belongs to the worst mode.

1.3 EUT test setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary equipment

Equipment	Model	S/N	Manufacturer
Adapter	/	/	/
AirPods	/	/	APPLE
Mobile phone	S9+	/	SAMSUNG

1.5 Measurement Uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree
Humidity	± 5 %

2 Summary of Test Result

Item	FCC Part No.	Description of Test	Result
1	FCC PART 15.203	Antenna requirement	Pass
2	FCC PART 15.207	Conducted emission	Pass
3	FCC PART 15.209	Radiated emission	Pass
4	FCC Part 15.215	20dB bandwidth	Pass

2.1 Operation channel list

Channel List

Channel		Frequency (kHz)
Low		115
Middle	AirPods	115
	Mobile phone	140
High		205

2.2 Test channel

Channel		Frequency (kHz)
Middle	AirPods	115
Middle	Mobile phone	140

3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %, $U=2 \times U_c(y)$

RF frequency	1×10^{-7}
RF power, conducted	± 1 dB
Conducted emission(150kHz~30MHz)	± 2.5 dB
Radiated emission(30MHz~1GHz)	± 4.2 dB
Radiated emission (above 1GHz)	± 4.3 dB
Temperature	± 1 degree
Humidity	± 5 %

3.4 Test software

Software Name	Manufacturer	Model	Version
RF Test System	Shenzhen JS tonscent co., ltd	JS1120-3	2.5.77.0418

4 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI7	100314	2019/10/09	2020/10/08
MTI-E006	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-872	2019/10/15	2020/10/14
MTI-E014	amplifier	Hewlett-Packard	8447D	3113A06150	2019/10/09	2020/10/08
MTI-E036	Single path vehicle AMN(LISN)	Schwarzbeck	NNBM 8124	01175	2019/10/09	2020/10/08
MTI-E038	Low noise active vertical monopole antenna	Schwarzbeck	VAMP 9243	#565	2019/10/16	2020/10/15
MTI-E039	Biconical antenna	Schwarzbeck	BBA 9106	#164	2019/10/15	2020/10/14
MTI-E041	MXG Vector Signal Generator	Agilent	N5182A	MY49060455	2019/04/16	2020/04/15
MTI-E042	ESG Series Analog signal generator	Agilent	E4421B	GB40051240	2019/05/21	2020/05/20
MTI-E044	Thermometer clock humidity monitor	-	HTC-1	/	2019/04/17	2020/04/16
MTI-E062	Log Periodic Antenna	Schwarzbeck	VUSLP 9111B	#312	2018/04/11	2020/04/10
MTI-E063	Log Periodic Dipole Array Antenna	ETS-LINDGREN	3148B	00224524	2018/04/11	2020/04/10
MTI-E065	Amplifier	EMtrace	RP06A	00117	2019/04/29	2020/04/28
MTI-E071	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2019/10/25	2020/10/24
MTI-E076	EMI Test Receiver	Rohde&schwarz	ESIB26	100273	2019/04/16	2020/04/15
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A01957	2019/04/16	2020/04/15
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027695	2019/04/16	2020/04/15
MTI-E093	Artificial mains network	3ctest	LISN J50	ES3911805	2019/04/16	2020/04/15
MTI-E096	Power amplifier	Space-Dtronics	EWLNA0118G-P40	1852001	2019/04/29	2020/04/28
MTI-E097	Current Probe	SOLAR ELECTRONICS CO.	9207-1	220095-1	2019/04/17	2020/04/16
MTI-E098	Loop Sensor	SOLAR ELECTRONICS CO.	7334-1	220095-2	2019/04/21	2020/04/20
Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).						

5 Test Results

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 EUT Antenna

The EUT antenna is Coil Antenna. It comply with the standard requirement. In case of replacement of broken antenna the same antenna type must be used.

5.2 Conducted emission

5.2.1 Limits

For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.5 -5	56	46
5 -30	60	50

Note: the limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

5.2.2 Test Procedures

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.


Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item – photographs of the test setup.


5.2.3 Test Setup

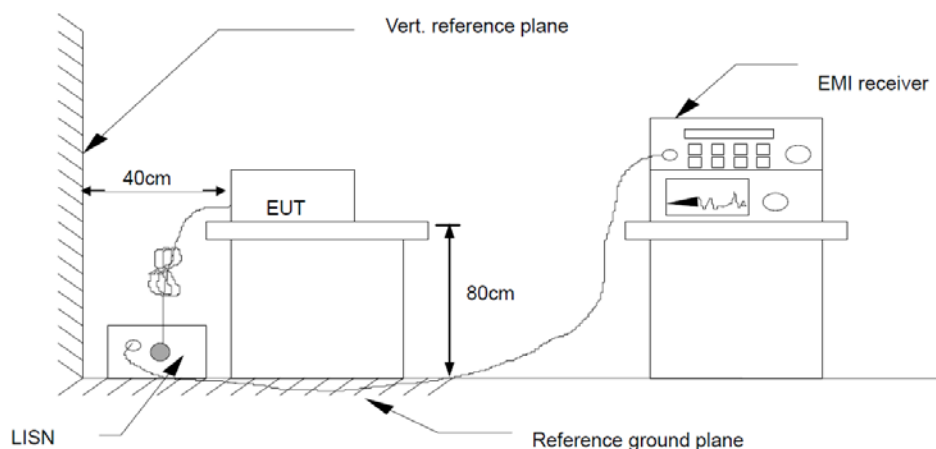

5.2.4 Test Result




EUT:	Wireless Charging Stand	Model Name:	MF500
Pressure:	101kPa	Phase:	L
Test voltage:	DC 9V from adapter AC 120V/60Hz	Test mode:	Mode 1

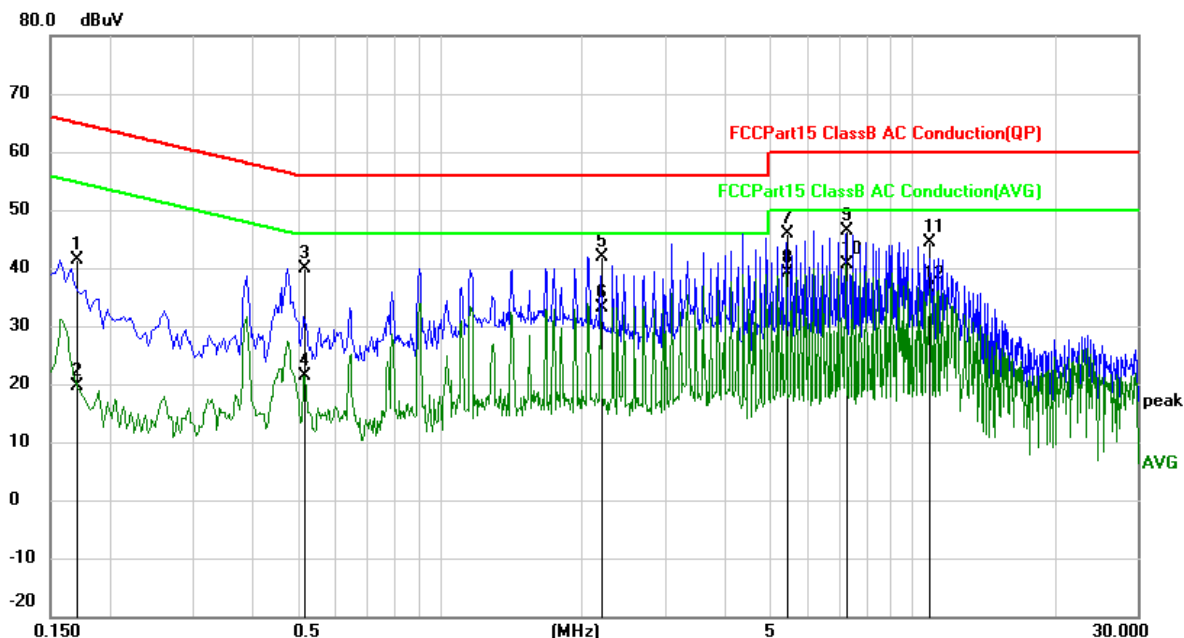

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1712	31.54	9.73	41.27	64.90	-23.63	QP
2		0.1712	9.93	9.73	19.66	54.90	-35.24	AVG
3		0.5180	30.06	9.92	39.98	56.00	-16.02	QP
4		0.5180	11.46	9.92	21.38	46.00	-24.62	AVG
5		2.1940	31.97	10.01	41.98	56.00	-14.02	QP
6		2.1940	23.15	10.01	33.16	46.00	-12.84	AVG
7		5.4300	35.84	10.09	45.93	60.00	-14.07	QP
8		5.4300	29.06	10.09	39.15	50.00	-10.85	AVG
9		7.2380	36.29	10.18	46.47	60.00	-13.53	QP
10	*	7.2380	30.50	10.18	40.68	50.00	-9.32	AVG
11		10.8740	33.96	10.32	44.28	60.00	-15.72	QP
12		10.8740	26.04	10.32	36.36	50.00	-13.64	AVG




EUT:	Wireless Charging Stand	Model Name:	MF500
Pressure:	101kPa	Phase:	N
Test voltage:	DC 9V from adapter AC 120V/60Hz	Test mode:	Mode 1

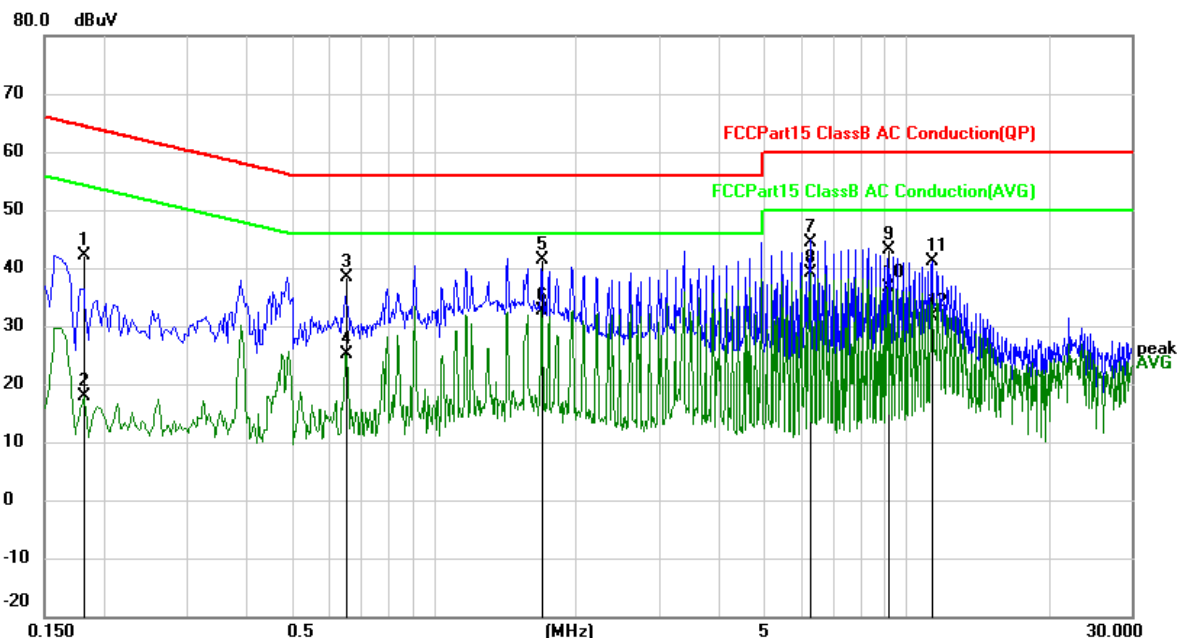

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1819	32.37	9.73	42.10	64.40	-22.30	QP
2		0.1819	8.16	9.73	17.89	54.40	-36.51	AVG
3		0.6540	28.41	9.94	38.35	56.00	-17.65	QP
4		0.6540	15.12	9.94	25.06	46.00	-20.94	AVG
5		1.6900	31.50	10.00	41.50	56.00	-14.50	QP
6		1.6900	22.56	10.00	32.56	46.00	-13.44	AVG
7		6.2540	34.28	10.14	44.42	60.00	-15.58	QP
8	*	6.2540	29.06	10.14	39.20	50.00	-10.80	AVG
9		9.1220	32.97	10.28	43.25	60.00	-16.75	QP
10		9.1220	26.34	10.28	36.62	50.00	-13.38	AVG
11		11.3180	30.74	10.31	41.05	60.00	-18.95	QP
12		11.3180	21.28	10.31	31.59	50.00	-18.41	AVG




EUT:	Wireless Charging Stand	Model Name:	MF500
Pressure:	101kPa	Phase:	L
Test voltage:	DC 9V from adapter AC 240V/60Hz	Test mode:	Mode 1

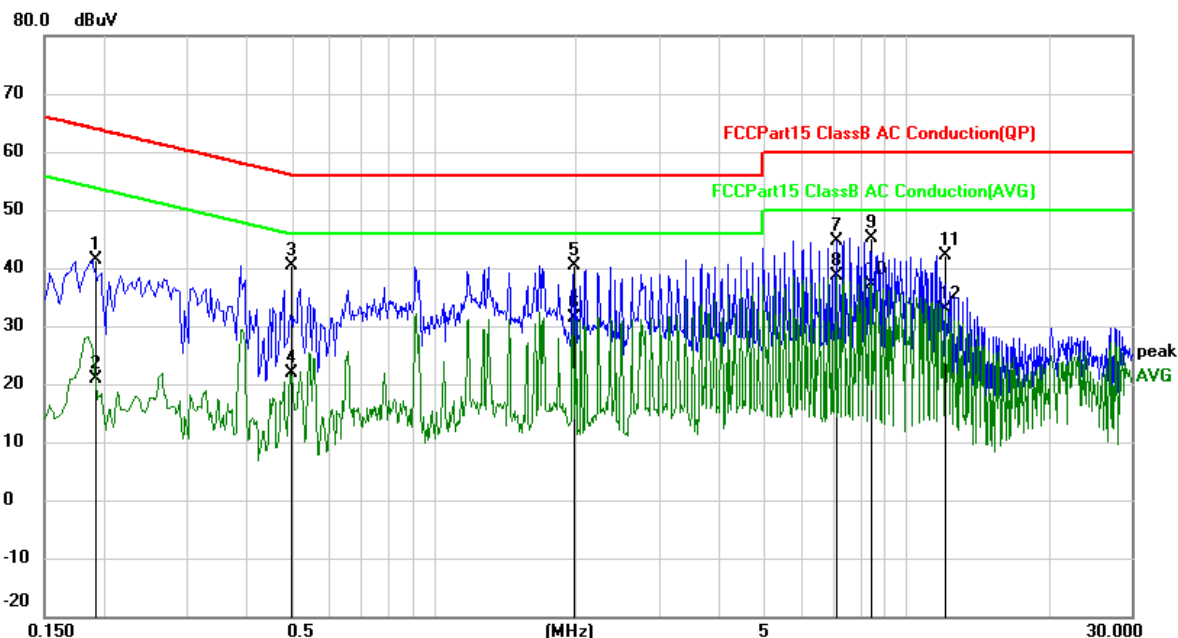

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1924	31.69	9.73	41.42	63.93	-22.51	QP
2		0.1924	11.07	9.73	20.80	53.93	-33.13	AVG
3		0.4980	30.57	9.92	40.49	56.03	-15.54	QP
4		0.4980	11.93	9.92	21.85	46.03	-24.18	AVG
5		1.9740	30.33	10.00	40.33	56.00	-15.67	QP
6		1.9740	21.28	10.00	31.28	46.00	-14.72	AVG
7		7.1180	34.52	10.18	44.70	60.00	-15.30	QP
8	*	7.1180	28.48	10.18	38.66	50.00	-11.34	AVG
9		8.4220	34.98	10.25	45.23	60.00	-14.77	QP
10		8.4220	27.00	10.25	37.25	50.00	-12.75	AVG
11		12.1220	31.82	10.30	42.12	60.00	-17.88	QP
12		12.1220	22.46	10.30	32.76	50.00	-17.24	AVG



EUT:	Wireless Charging Stand	Model Name:	MF500
Pressure:	101kPa	Phase:	N
Test voltage:	DC 9V from adapter AC 240V/60Hz	Test mode:	Mode 1

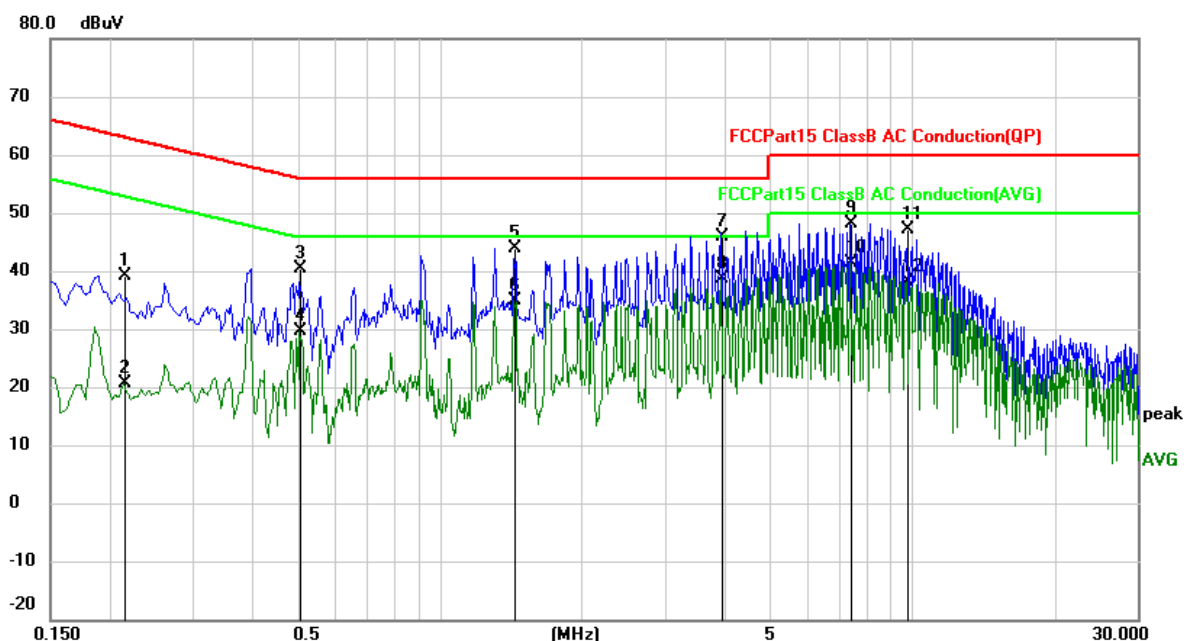

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.2140	29.42	9.73	39.15	63.05	-23.90	QP
2		0.2140	10.83	9.73	20.56	53.05	-32.49	AVG
3		0.5060	30.35	9.92	40.27	56.00	-15.73	QP
4		0.5060	19.61	9.92	29.53	46.00	-16.47	AVG
5		1.4380	33.77	9.99	43.76	56.00	-12.24	QP
6		1.4380	24.84	9.99	34.83	46.00	-11.17	AVG
7		3.9540	35.83	10.05	45.88	56.00	-10.12	QP
8	*	3.9540	28.49	10.05	38.54	46.00	-7.46	AVG
9		7.3820	38.00	10.20	48.20	60.00	-11.80	QP
10		7.3820	31.08	10.20	41.28	50.00	-8.72	AVG
11		9.7540	36.87	10.32	47.19	60.00	-12.81	QP
12		9.7540	27.72	10.32	38.04	50.00	-11.96	AVG

5.3 Radiated emission

5.3.1 Limits

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

The limit for radiated test was performed according to FCC PART 15C.

The tighter limit applies at the band edges.

Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP

Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP
------------------------	----------------------------------


5.3.2 Test Procedures

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
- h. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

5.3.3 Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

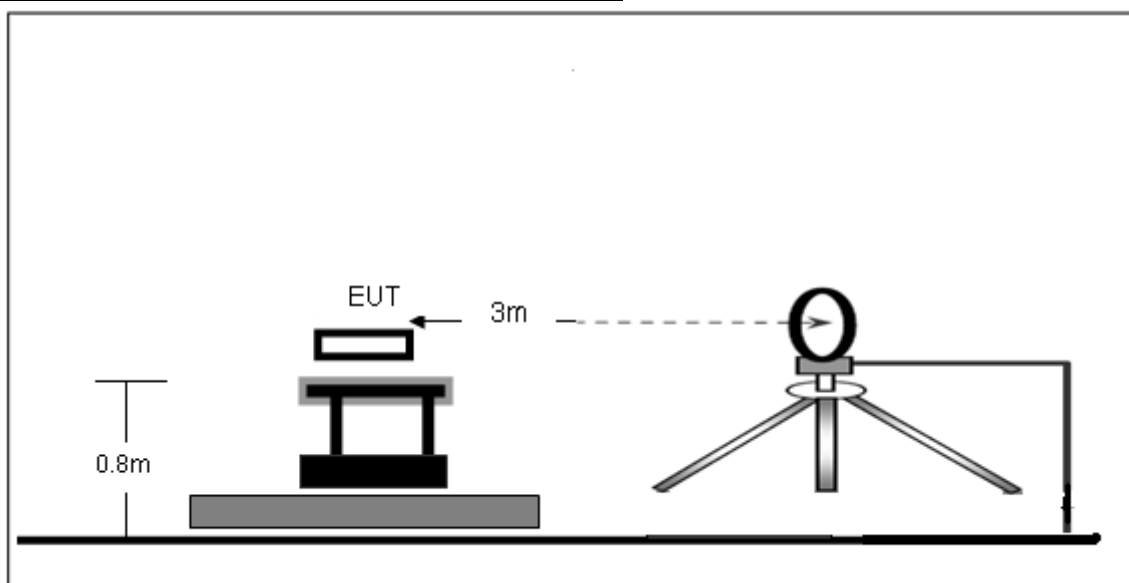

Radiated Emission Test-Up Frequency 30MHz~1GHz

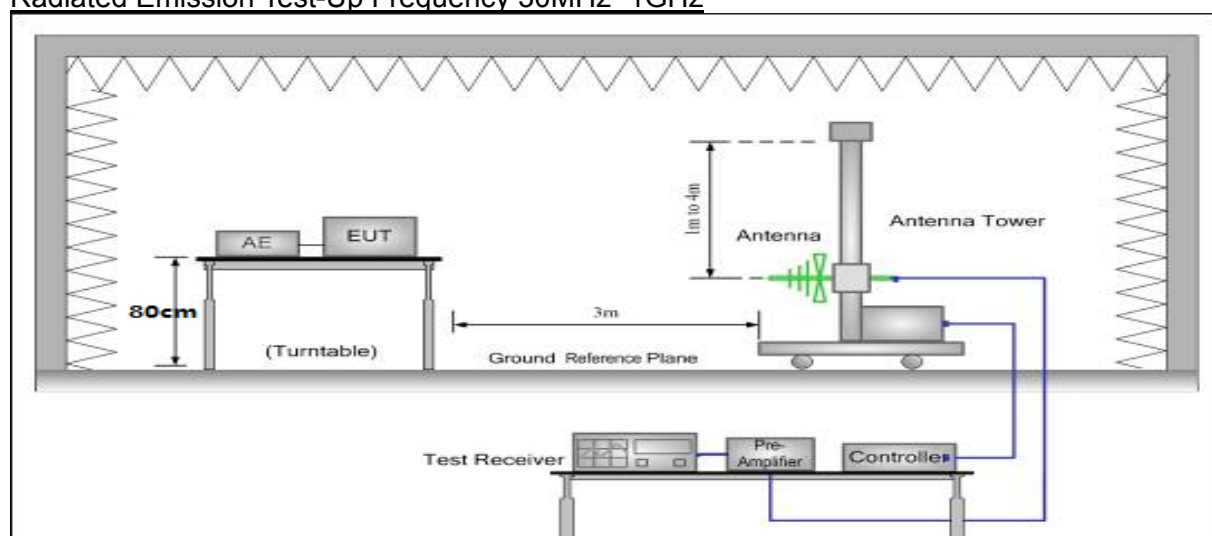


5.3.4 Test Result

Frequency range (9kHz – 30MHz)

Note1: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode 'AirPods 2.5W and Mobile phone 10W simultaneous working', and its test data was showed.


EUT:	Wireless Charging Stand	Model Name:	MF500
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	DC 9V from adapter AC 120V/60Hz		

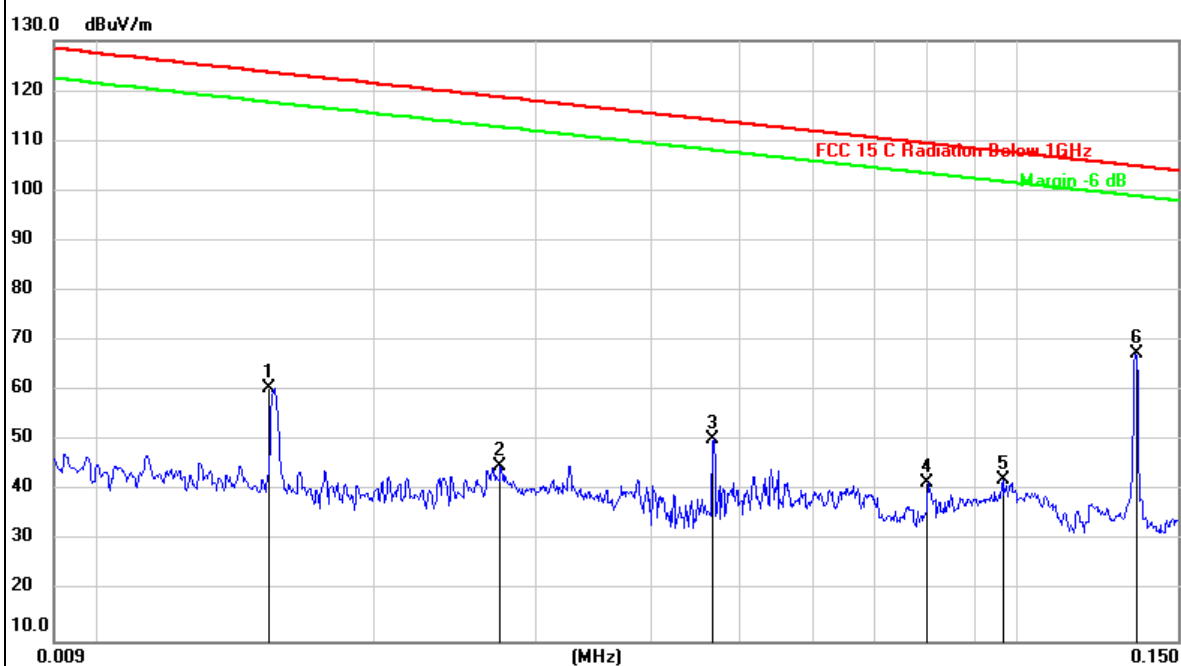

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		0.0154	39.87	20.60	60.47	123.69	-63.22	peak
2		0.0275	24.35	20.60	44.95	118.68	-73.73	peak
3		0.0468	29.49	20.77	50.26	114.09	-63.83	peak
4		0.0801	21.00	20.80	41.80	109.44	-67.64	peak
5		0.0966	21.50	20.83	42.33	107.83	-65.50	peak
6	*	0.1348	47.14	20.30	67.44	104.95	-37.51	peak



EUT:	Wireless Charging Stand	Model Name:	MF500
Pressure:	101kPa	Test mode:	Mode 1
Test voltage:	DC 9V from adapter AC 120V/60Hz		

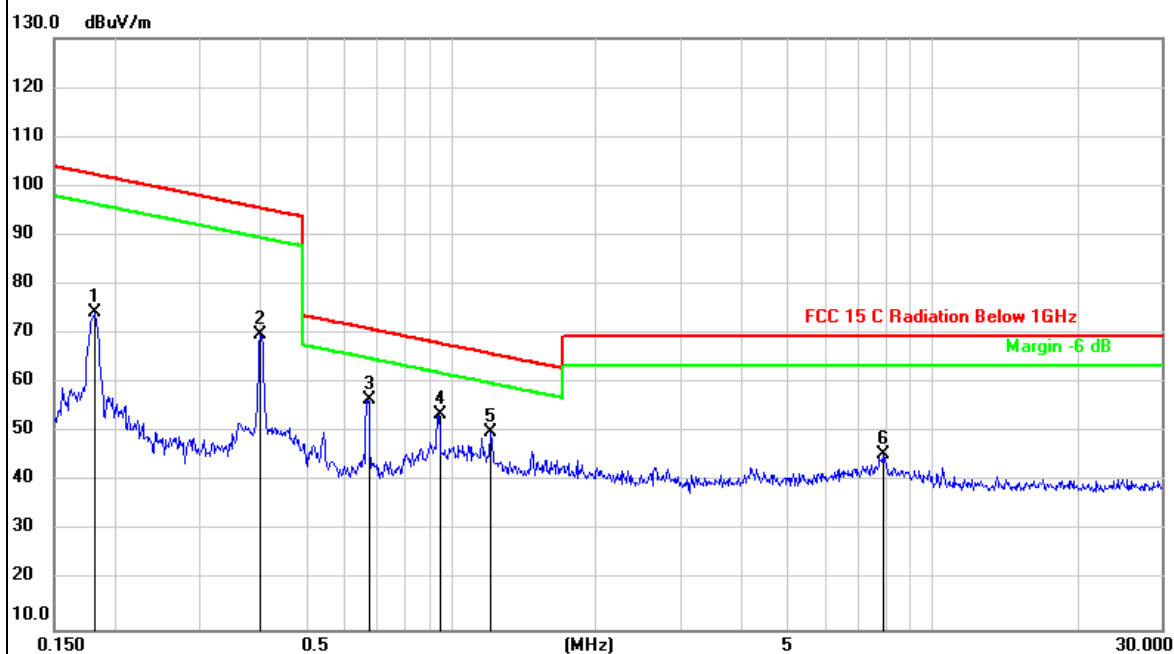


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		0.1814	53.98	20.32	74.30	102.38	-28.08	peak
2		0.4018	49.27	20.47	69.74	95.51	-25.77	peak
3	*	0.6719	36.07	20.64	56.71	71.07	-14.36	peak
4		0.9431	32.86	20.78	53.64	68.13	-14.49	peak
5		1.2097	29.39	20.77	50.16	65.97	-15.81	peak
6		7.8933	24.88	20.56	45.44	69.50	-24.06	peak

Frequency range (30MHz – 1GHz)

Note1: The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode 'AirPods 2.5W and Mobile phone 10W simultaneous working', and its test data was showed.


EUT:	Wireless Charging Stand	Model Name:	MF500
Pressure:	101kPa	Polarization:	Vertical
Test voltage:	DC 9V from adapter AC 120V/60Hz	Test mode:	Mode 1

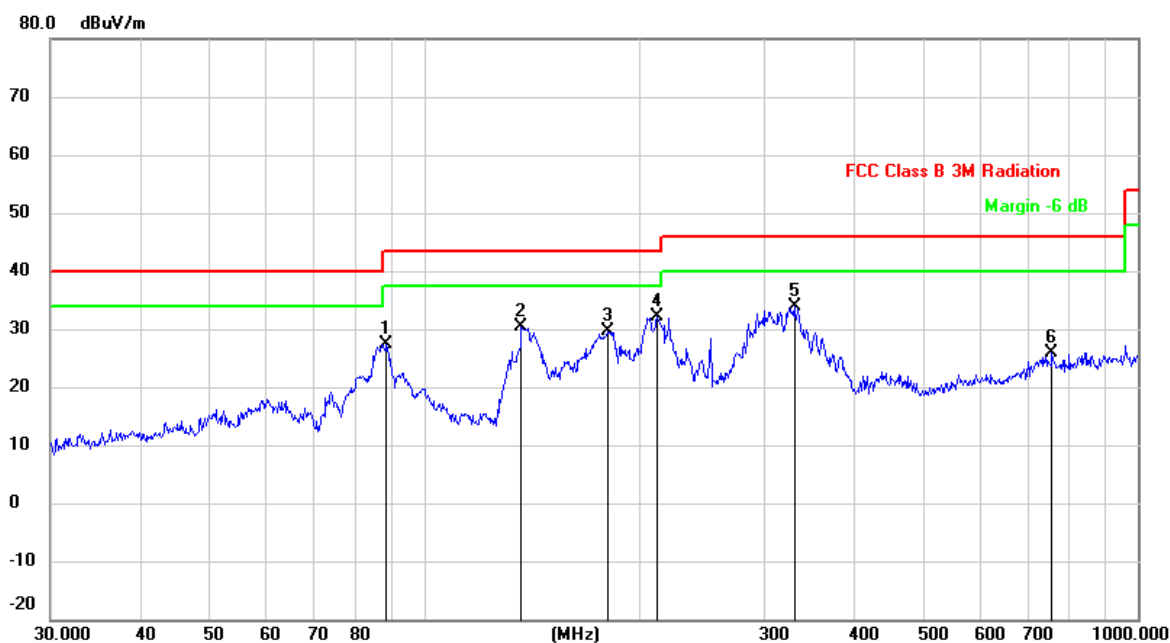

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	
1		88.6524	43.32	-15.86	27.46	43.50	-16.04	QP
2		136.9391	47.01	-16.54	30.47	43.50	-13.03	QP
3		181.2834	44.44	-14.70	29.74	43.50	-13.76	QP
4	*	212.2695	44.81	-12.69	32.12	43.50	-11.38	QP
5		330.1949	43.60	-9.65	33.95	46.00	-12.05	QP
6		758.0408	30.02	-4.08	25.94	46.00	-20.06	QP



EUT:	Wireless Charging Stand	Model Name:	MF500
Pressure:	101kPa	Polarization:	Horizontal
Test voltage:	DC 9V from adapter AC 120V/60Hz	Test mode:	Mode 1

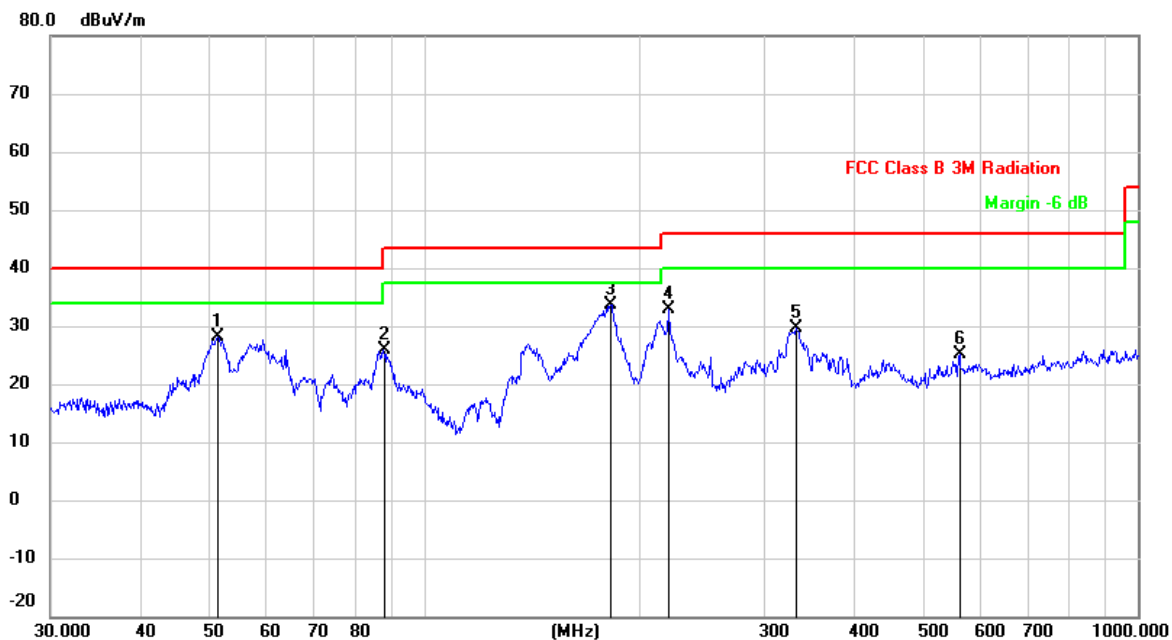

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		51.4807	40.52	-12.47	28.05	40.00	-11.95	QP
2		87.7248	41.89	-16.04	25.85	40.00	-14.15	QP
3	*	182.5592	48.28	-14.53	33.75	43.50	-9.75	QP
4		219.8449	45.49	-12.58	32.91	46.00	-13.09	QP
5		332.5187	39.11	-9.56	29.55	46.00	-16.45	QP
6		562.6624	31.30	-6.05	25.25	46.00	-20.75	QP

5.4 Occupied bandwidth

5.4.1 Test method

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq 1\%$ of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth and 99% occupied bandwidth of the emission.

5.4.2 Test result

	Frequency (kHz)	20dB emission bandwidth (kHz)	99% occupied bandwidth (kHz)
Airpods	115	8.083	7.016
Mobile phone	140	8.252	7.215


Test plots as below:

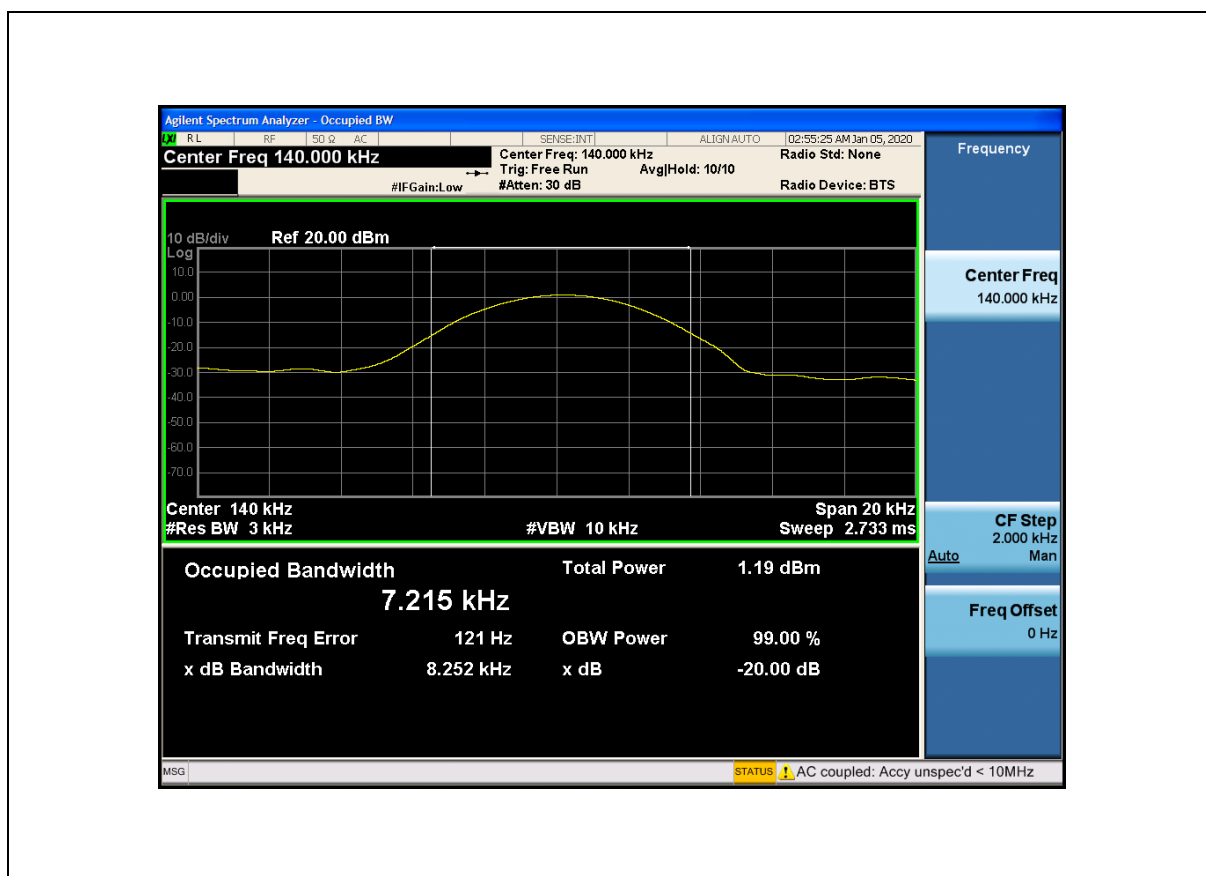

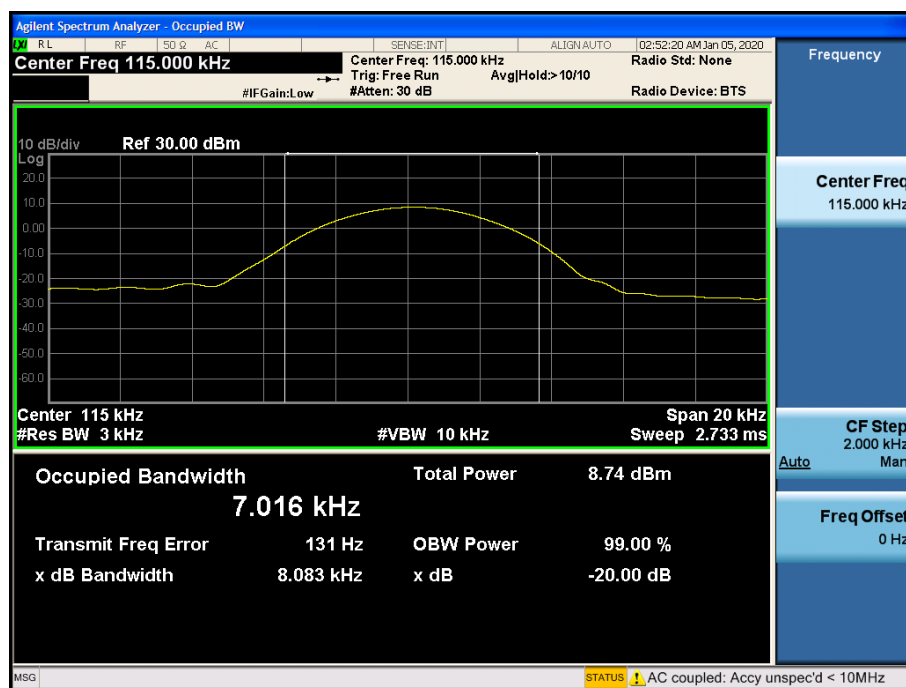

Photographs of the Test Setup

Radiated emission

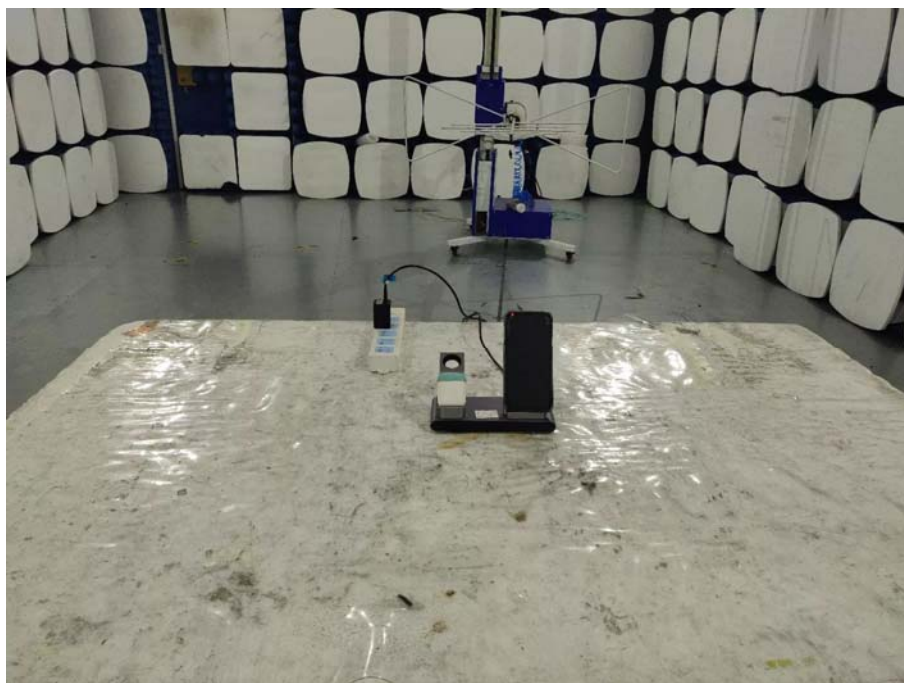

Conducted emission





Photographs of the EUT

See the APPENDIX 1: EUT PHOTOS in the report No.: MTi19122708-1E1-1.

----END OF REPORT----