



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 24 SUBPART CERTIFICATION REPORT

Model Tested : **SGH-F300**
FCC ID(Requested) : **A3LSGHF300**
Report No : **FD-163-R1**
Job No : **FD-163**
Date issued : **Sep 26, 2006**

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2, Part24.

Prepared By

Date

2006.09.26

DS KIM - Test Engineer

Checked By

Date

2006.09.27

WW JANG - Manager

Authorized By

Date

2006.09.27

SH PARK – Senior Manager

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC CERTIFICATION INFORMATION	3
1.1. §2.1033 General Information	3
2. INTRODUCTION	4
2.1. General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST	6
5. DESCRIPTION OF TESTS	7
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power	7
5.2. Radiated Spurious & Harmonic Emission	8
5.3. Occupied Bandwidth	10
5.4. Spurious and Harmonic Emission at Antenna Terminal	10
5.4.1. Occupied Bandwidth Emission Limits	10
5.4.2. Conducted Spurious Emission	12
5.5. Frequency Stability / Temperature Variation	13
6. TEST DATA	14
6.1. Equivalent Isotropic Radiated Power (E.I.R.P.)	14
6.2. GSM1900 Radiated Spurious & Harmonic measurement	15
6.3. GSM1900 Radiated Spurious & Harmonic Conversion Table	16
6.4. Frequency Stability	17
6.4.1. GSM1900 Frequency Stability Table	17
6.4.2. GSM1900 Frequency Stability Graph	18
7. CONCLUSION	20
8. TEST PLOTS	21



MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSGHF300
- Quantity : Quantity production is planned
- Emission Designators : 244KGXW(GSM1900), 238KG7W(GSM1900 EDGE)
- Tx Freq. Range : 1850.2MHz -1909.8MHz (GSM1900)
- Rx Freq. Range : 1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.624 W EIRP GSM1900 (27.95dBm)
0.446 W EIRP GSM1900 EDGE(26.49dBm)
- FCC Classification(s) : Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : Single-Band PCS GSM/EDGE Phone with Bluetooth
- Frequency Tolerance : $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s) : §24(E), §2.
- Dates of Test : Sept 15-16, 2006
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FD-163-R1

2. INTRODUCTION

2.1. General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742. The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. The substitution antenna will replace the EUT antenna at the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The test antenna shall be raised and lowered, if necessary, to ensure that the maximum signal is still being received. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded.

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

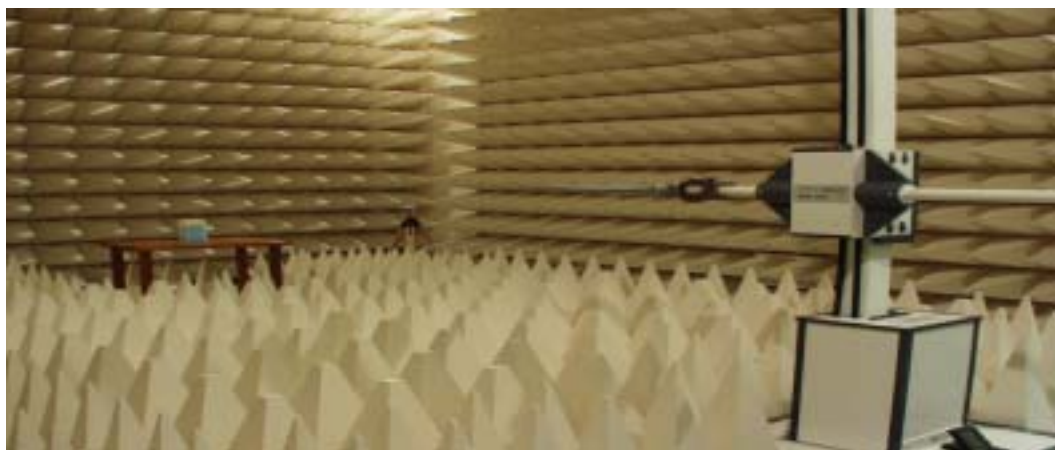


Figure2. Photograph of 3m Fully-Anechoic Chamber



3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2006-09-26
	E4440A(3Hz~26.5GHz)	MY41000236	2007-04-14
	E4440A(3Hz~26.5GHz)	MY41000233	2007-04-05
Signal Generator	SMIQ03B	83824/021	2006-12-07
	SMR20	835197/030	2007-01-10
Network Analyzer	8753E	JP38160590	2007-06-26
Power Meter	E4419B	GB41293846	2007-09-06
Amplifier	5S1G4	304866	2006-10-18
Pre-Amplifier	8449B	3008A00691	2007-01-02
Communication test set	8960	GB42230535	2007-01-02
	8960	GB42360886	2007-07-03
Antenna Master	MA240	240/618	Not Required
Controller	HD100	100/756	Not Required
Environmental Chamber	SH-241	92000548	2006-11-22
	SH-241	92000549	2006-11-22
Horn Antenna	HF906	360306/011	2007-03-31
Communication test set	CMU200	109162	2006-10-18
Dipole Antenna	3121C-DB4	9007-587	2006-12-02
	3121C-DB4	9007-588	2007-05-29
Receive Antenna	HL040	353255/020	2007-04-25
Power Supply	E3640A	MY40003594	2007-06-28
	E3640A	MY40003595	2007-05-19
Divider	11636B	51946	Not Required
	11636B	51942	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required
Power Sensor	E9300B	MY41415557	2007-04-17

5. DESCRIPTION OF TESTS

5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

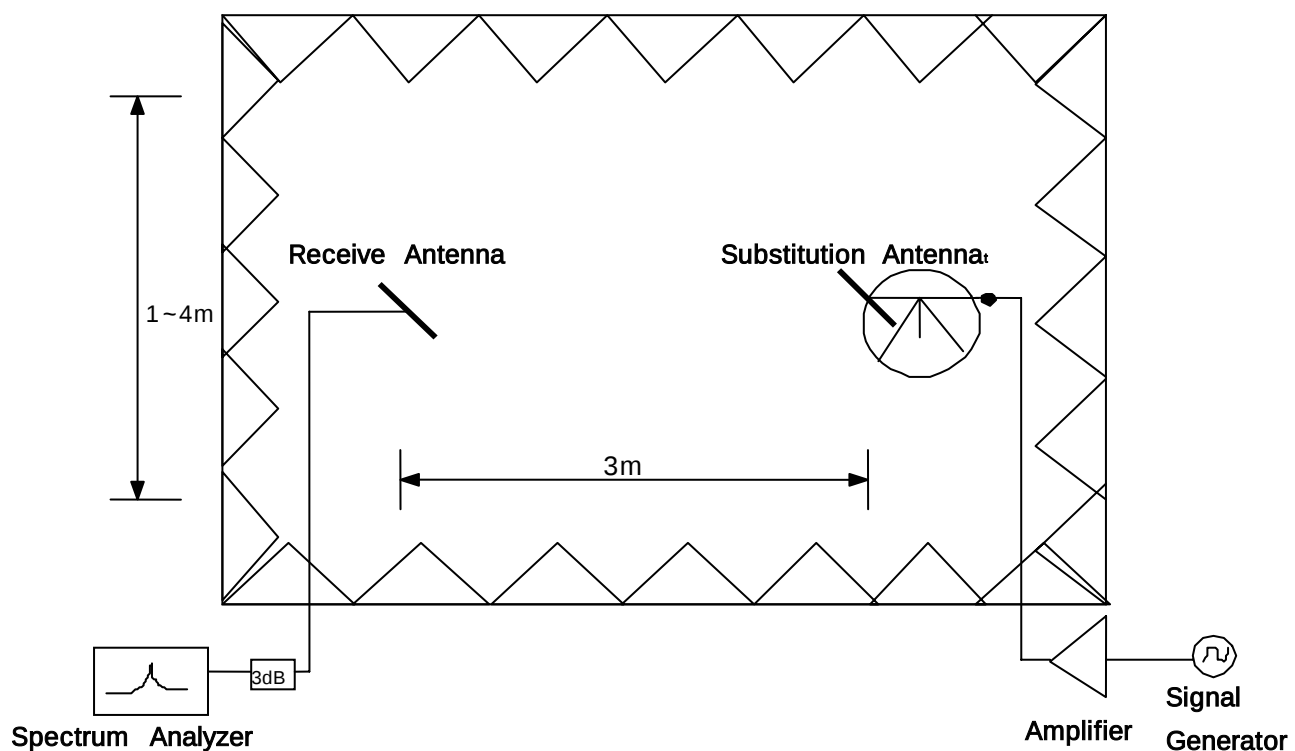


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2. Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001

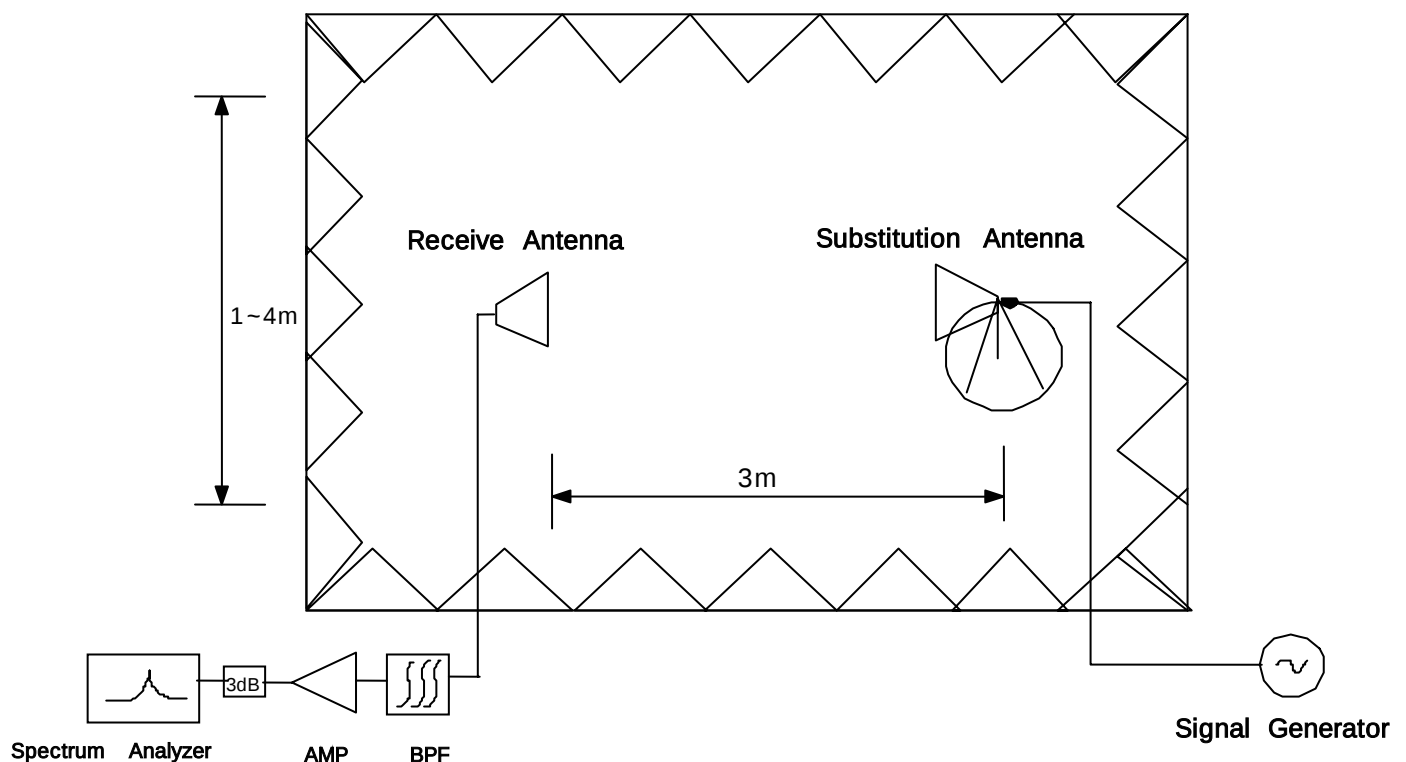


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on a Non-conducted turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 661 , Second Harmonic(3760.00MHz)

The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760.00MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3. Occupied Bandwidth

Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

5.4. Spurious and Harmonic Emission at Antenna Terminal

5.4.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

Table 2. Cellular Service Frequency Blocks

5.4.2. Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log(0.624 \text{ W}) = 40.95 \text{ dB}$$

$$27.95 \text{ dBm} - 40.95 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM : $0.01 * 273\text{KHz} = 2.73\text{KHz}$
A Resolution BW of 3KHz was used for measurement at the band edges.

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.5. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 ($\pm 2.5\text{ppm}$) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

6. TEST DATA

6.1. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

■ Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	27.00	H	-13.05	8.13	-21.18
		V	-13.35	8.13	-21.48
1880.00	27.00	H	-13.14	8.11	-21.25
		V	-13.13	8.11	-21.24
1909.80	27.00	H	-13.10	8.33	-21.43
		V	-13.46	8.33	-21.79

■ Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-20.23	H1	115	27.95	0.624	Standard
1880.00	-20.73	H1	120	27.52	0.565	Standard
1909.80	-21.58	H1	109	26.85	0.484	Standard

■ EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-21.68	H1	115	26.50	0.446	Standard

NOTE : Standard batteries are the only battery options for this phone

Radiated measurements at 3 meters by Substitution Method

6.2. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 27.95 dBm = 0.624 W

Modulation Signal : GSM1900

Limit : $43 + 10\log_{10}(P) = 40.95 \text{ dBc}$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
512	2	3700.40	-54.88	H2	58.33
	3	5550.60	-55.94	V	53.71
	4	7400.80	-66.91	H2	59.64
	5	9251.00	-	-	-
	6	11101.20	-	-	-
	7	12951.40	-	-	-
661	2	3760.00	-56.02	H1	59.47
	3	5640.00	-58.23	H2	55.14
	4	7520.00	-68.79	H2	61.77
	5	9400.00	-	-	-
	6	11280.00	-	-	-
	7	13160.00	-	-	-
810	2	3819.60	-49.6	H1	52.58
	3	5729.40	-56.31	H2	53.14
	4	7639.20	-68.67	H2	62.14
	5	9549.00	-	-	-
	6	11458.80	-	-	-
	7	13368.60	-	-	-

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.3. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2006. 09. 15

Test Engineer : SH ONG

Tx Cable loss
 Tx Horn Ant Gain
 Rx Cable loss + HPF Insertion loss + Attenuator
 Pre-Amp gain
 Air loss
 Tested Level from EUT
 = + + -
 = EIRP -

CH	Har	Frequency (MHz)	Tx CL (dB)	Horn Gain (dB)	Tx Level @ (S/G 10dBm)	Tested Level EUT : H (dBm)	Tested Level EUT : V (dBm)	Amplitude of Emission EUT : H (dBm)	Amplitude of Emission EUT : V (dBm)	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	11.49	9.73	8.24	-54.88	-60.51	-30.38	-35.20	58.33	63.15
	3	5550.60	14.56	11.55	6.99	-56.64	-55.94	-25.80	-25.76	53.75	53.71
	4	7400.80	17.57	11.44	3.87	-66.91	-68.88	-31.69	-35.70	59.64	63.65
	5	9251.00	20.18	12.17	1.99	-	-	-	-	-	-
	6	11101.20	22.70	13.66	0.96	-	-	-	-	-	-
	7	12951.40	24.18	13.27	-0.91	-	-	-	-	-	-
661	2	3760.00	11.75	9.73	7.98	-56.02	-57.22	-31.52	-32.20	59.47	60.15
	3	5640.00	14.59	11.55	6.96	-58.23	-58.43	-27.19	-27.78	55.14	55.73
	4	7520.00	17.96	11.44	3.48	-68.79	-68.51	-33.82	-35.39	61.77	63.34
	5	9400.00	20.29	12.17	1.88	-	-	-	-	-	-
	6	11280.00	22.97	13.66	0.69	-	-	-	-	-	-
	7	13160.00	24.27	13.27	-1.00	-	-	-	-	-	-
810	2	3819.60	11.64	9.73	8.09	-49.60	-53.25	-24.63	-27.70	52.58	55.65
	3	5729.40	14.86	11.55	6.69	-56.31	-59.19	-25.19	-28.40	53.14	56.35
	4	7639.20	18.28	11.44	3.16	-68.67	-69.07	-34.19	-35.66	62.14	63.61
	5	9549.00	20.41	12.17	1.76	-	-	-	-	-	-
	6	11458.80	22.77	13.66	0.89	-	-	-	-	-	-
	7	13368.60	24.39	13.27	-1.12	-	-	-	-	-	-

6.4. Frequency Stability

6.4.1. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	43.23	1,880,000,043	0.000002	0.023
100%		-30	26.24	1,880,000,026	0.000001	0.014
100%		-20	30.18	1,880,000,030	0.000002	0.016
100%		-10	32.42	1,880,000,032	0.000002	0.017
100%		0	24.87	1,880,000,025	0.000001	0.013
100%		+10	-18.21	1,879,999,982	-0.000001	-0.010
100%		+20	43.23	1,880,000,043	0.000002	0.023
100%		+30	34.93	1,880,000,035	0.000002	0.019
100%		+40	32.23	1,880,000,032	0.000002	0.017
100%		+50	29.11	1,880,000,029	0.000002	0.015
100%		+60	21.87	1,880,000,022	0.000001	0.012
85%	3.25	+20	57.62	1,880,000,058	0.000003	0.031
115%	4.26	+20	50.54	1,880,000,051	0.000003	0.027
Batt.Endpoint	3.25	+20	57.62	1,880,000,058	0.000003	0.031


Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.

The EUT is tested down to the battery end point.

6.4.2. GSM1900 Frequency Stability Graph

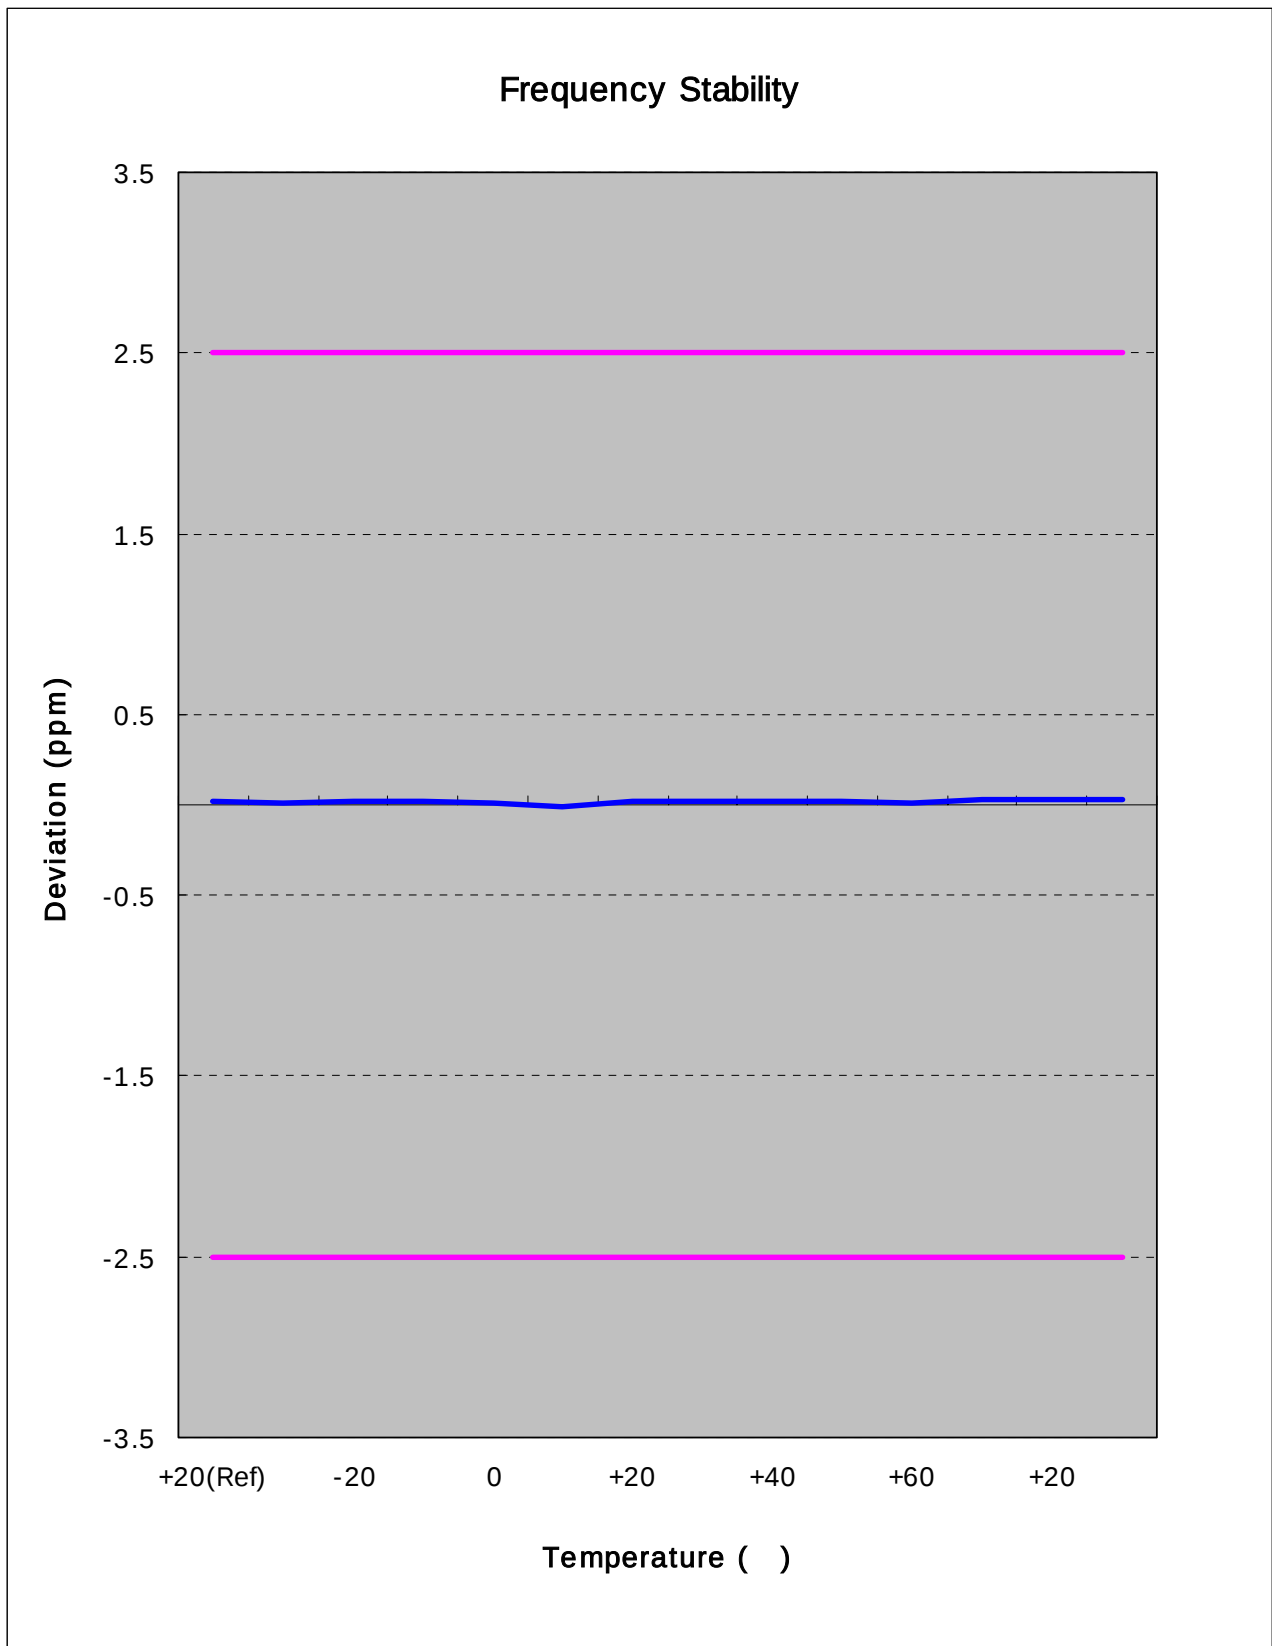

Zoom IN

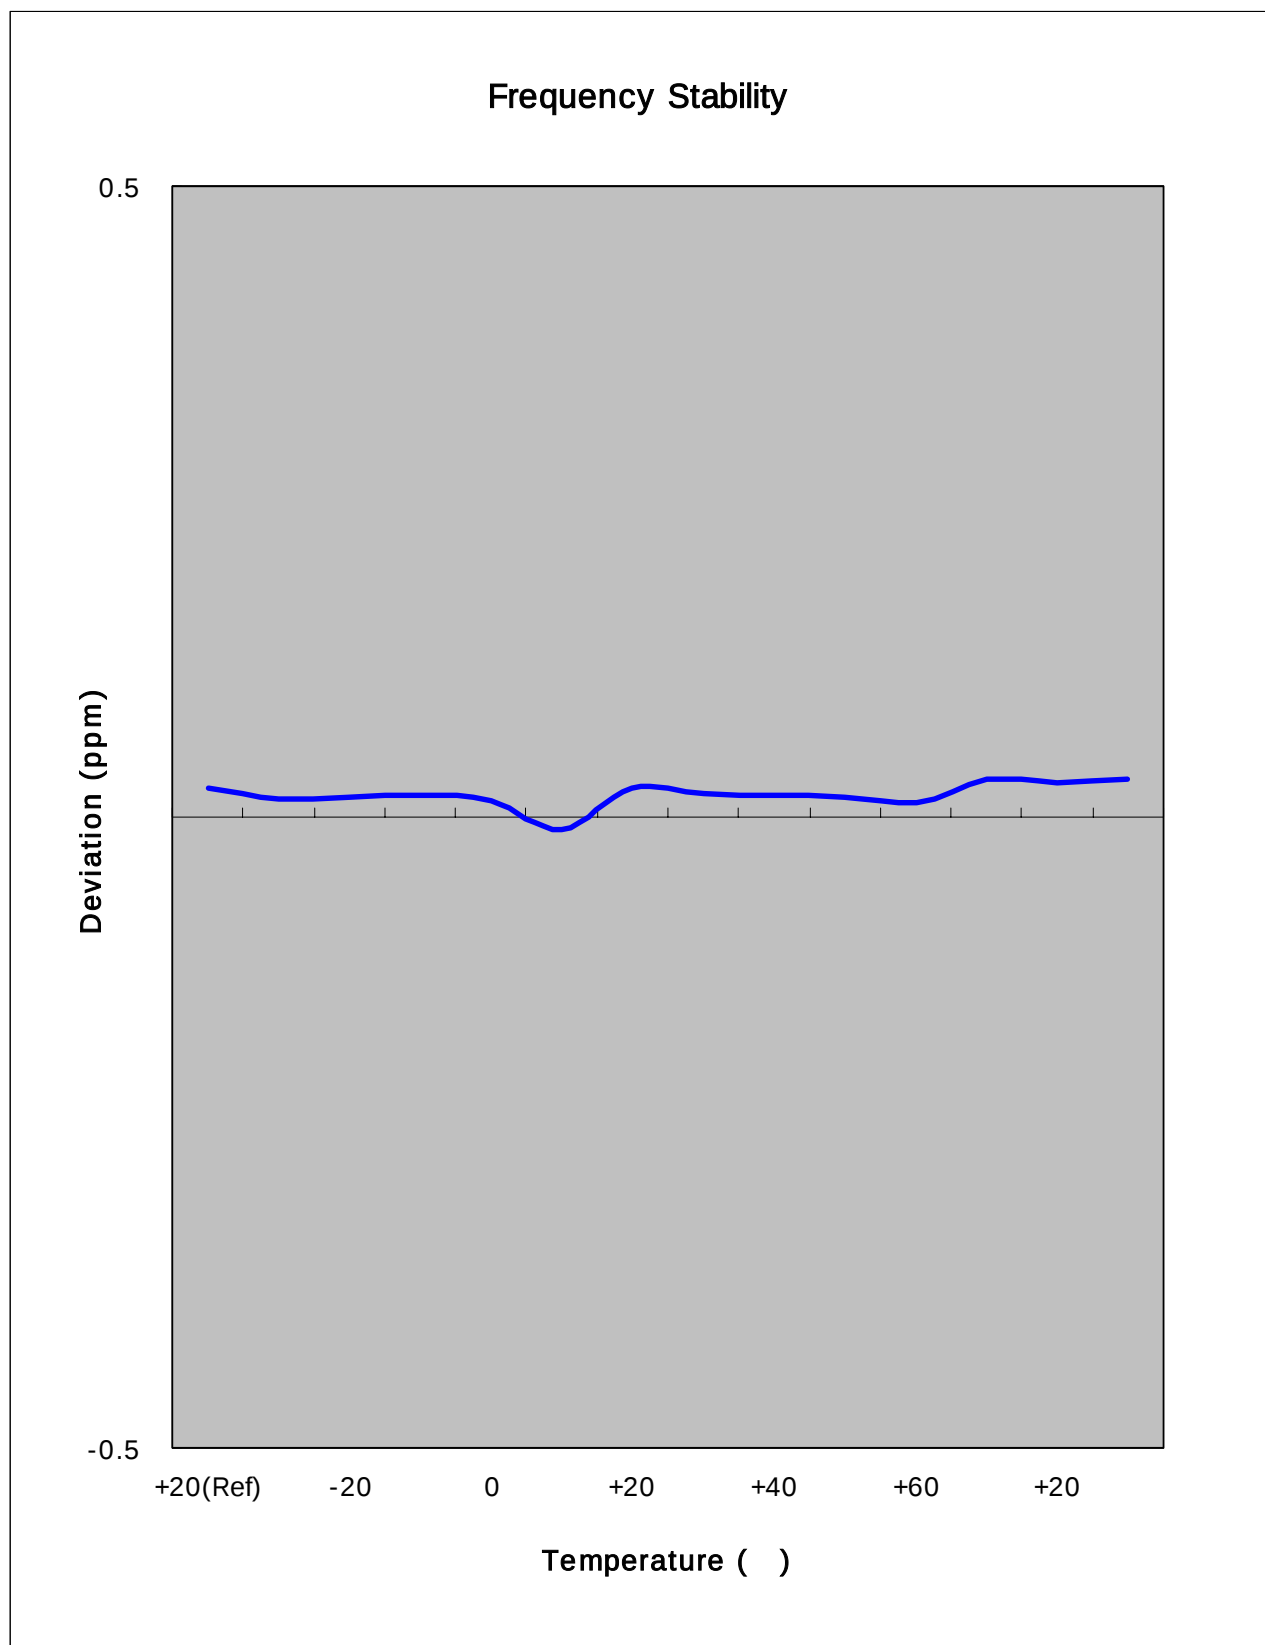



7. CONCLUSION


The data collected shows that the SAMSUNG Single-Band PCS GSM/EDGE Phone with Bluetooth. FCC ID : A3LSGHF300 complies with all the requirements of Parts 2,24 of the FCC Rules.

8. TEST PLOTS

GSM1900




R T

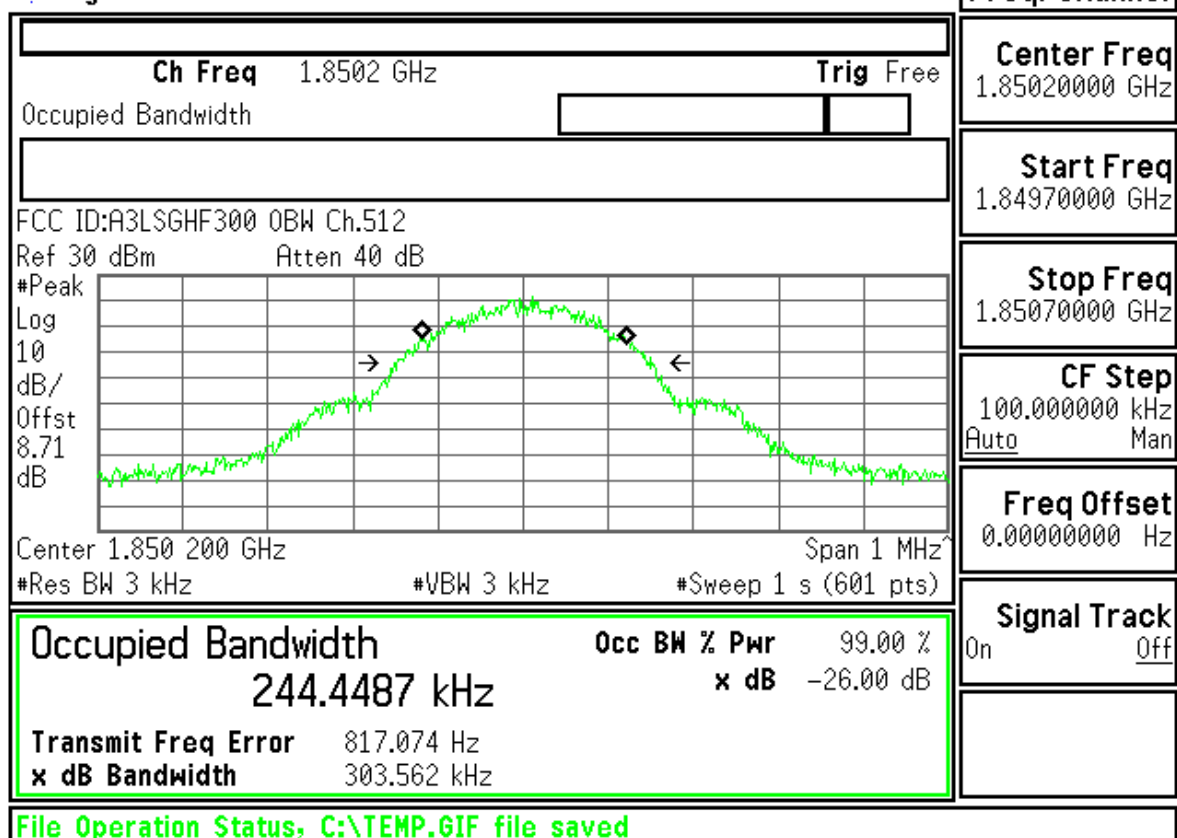


Freq/Channel
Center Freq 1.85020000 GHz
Start Freq 1.84970000 GHz
Stop Freq 1.85070000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off



R T

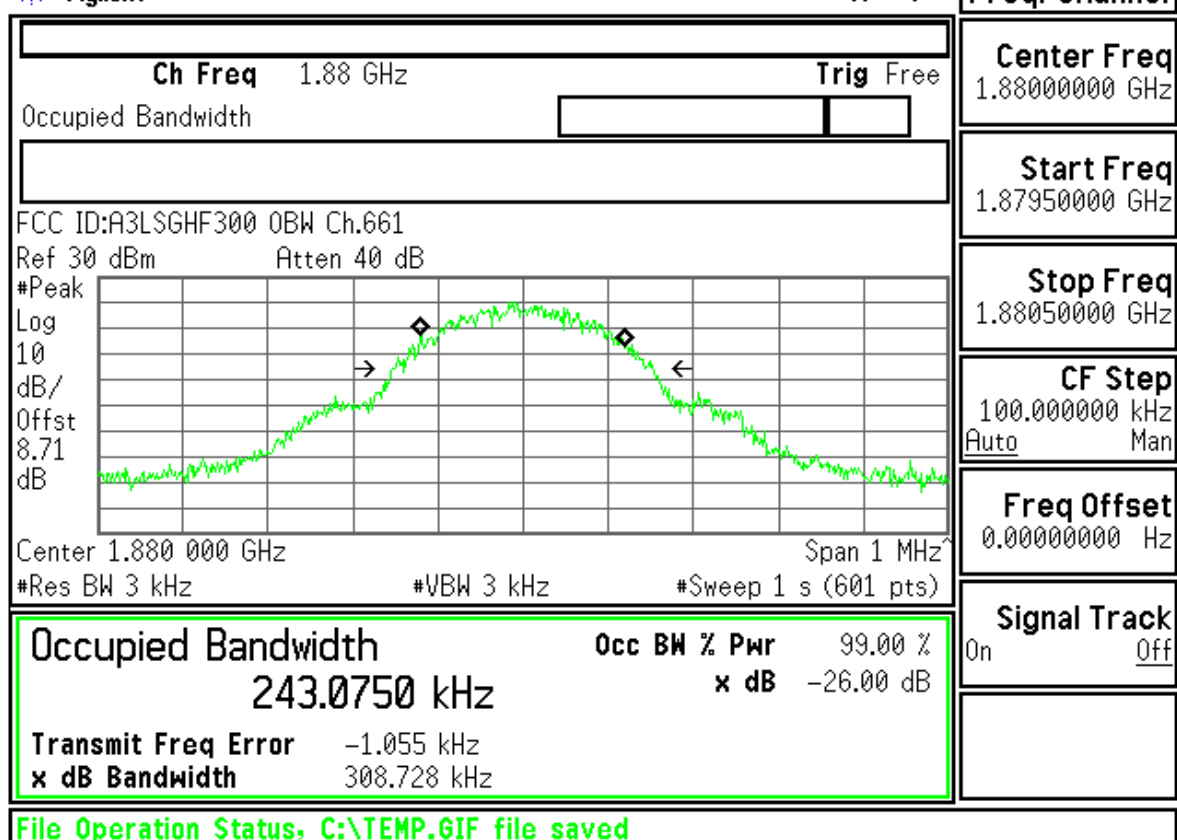

Freq/Channel
Center Freq 1.88000000 GHz
Start Freq 1.87950000 GHz
Stop Freq 1.88050000 GHz
CF Step 100.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


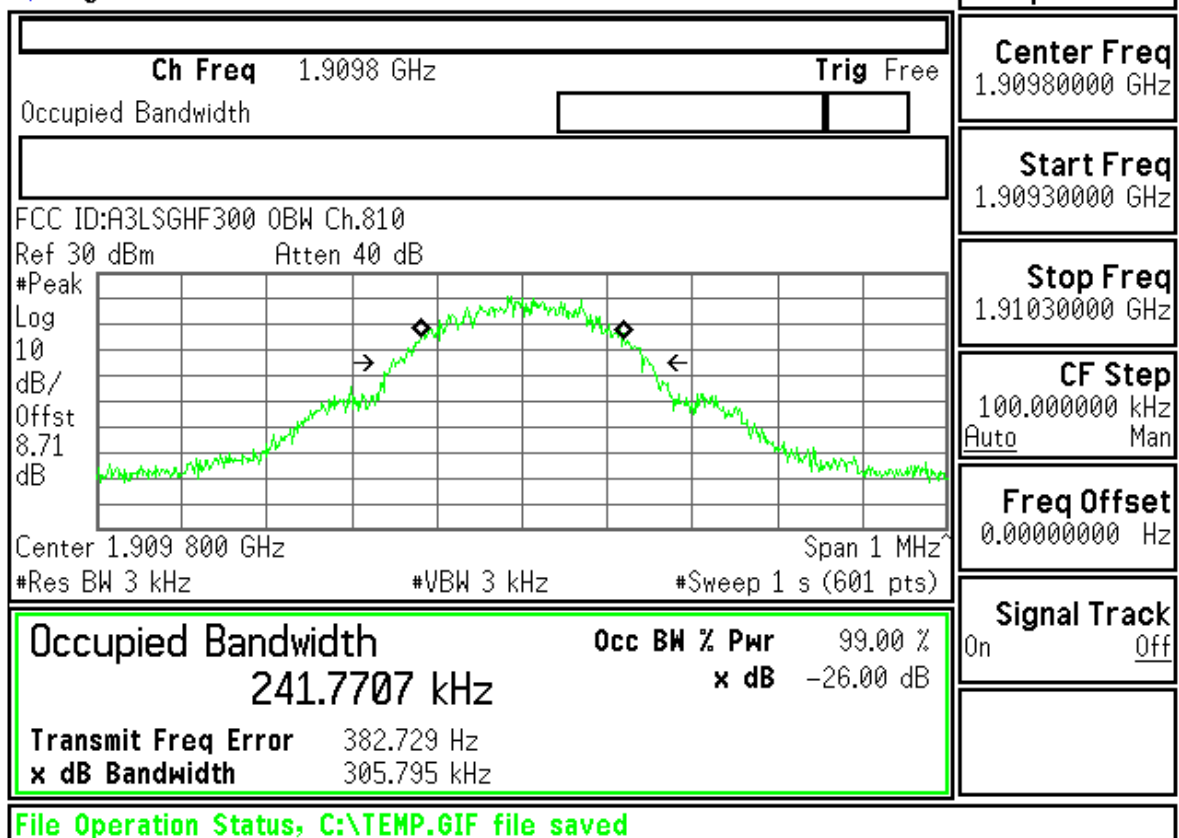




FCC ID : A3LSGHF300 Transmit Power 512CH



Measurement/Instrument Screen																																																				
Control		Phase & Frequency Error									TCH Parms																																									
Phase & Freq. Setup ▾		<table><thead><tr><th></th><th colspan="2">Peak Phase °</th><th colspan="2">RMS Phase °</th><th colspan="3">Frequency Hz</th></tr></thead><tbody><tr><td>Minimum</td><td colspan="2">5.72</td><td colspan="2">1.96</td><td colspan="3">16.62</td></tr><tr><td>Maximum</td><td colspan="2">10.88</td><td colspan="2">2.66</td><td colspan="3">44.22</td></tr><tr><td>Average</td><td colspan="2">7.63</td><td colspan="2">2.28</td><td colspan="3">35.58</td></tr><tr><td>Pass/Fail</td><td colspan="2">Pass</td><td colspan="2">Pass</td><td colspan="3">Pass</td></tr></tbody></table>										Peak Phase °		RMS Phase °		Frequency Hz			Minimum	5.72		1.96		16.62			Maximum	10.88		2.66		44.22			Average	7.63		2.28		35.58			Pass/Fail	Pass		Pass		Pass			Downlink Traffic Power ▾	
	Peak Phase °		RMS Phase °		Frequency Hz																																															
Minimum	5.72		1.96		16.62																																															
Maximum	10.88		2.66		44.22																																															
Average	7.63		2.28		35.58																																															
Pass/Fail	Pass		Pass		Pass																																															
Change View		50 / 50 Single									Traffic Band																																									
Swap Window Positions		GSM/GPRS Transmit Power GMSK Transmit Power 29.44 dBm Single									PCS																																									
											Traffic Channel																																									
											512																																									
											MS TX Level																																									
1 of 2		<table><tr><td colspan="2">☐ Background</td><td colspan="4">Active Cell Connected</td><td colspan="3">Sys Type: GSM</td></tr><tr><td colspan="2"></td><td colspan="4"></td><td colspan="3"></td></tr></table>									☐ Background		Active Cell Connected				Sys Type: GSM												Channel Mode Setup ▾																							
☐ Background		Active Cell Connected				Sys Type: GSM																																														
		<table><tr><td></td><td></td><td></td><td>IntRef</td><td>Offset</td><td>T</td><td></td><td></td><td></td></tr></table>												IntRef	Offset	T				Return																																
			IntRef	Offset	T																																															
											1 of 2																																									



Measurement/Instrument Screen																														
Control		Phase & Frequency Error						TCH Parms																						
Phase & Freq. Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>5.93</td> <td>2.01</td> <td>14.31</td> </tr> <tr> <td>Maximum</td> <td>10.98</td> <td>2.62</td> <td>27.41</td> </tr> <tr> <td>Average</td> <td>7.92</td> <td>2.31</td> <td>20.08</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	5.93	2.01	14.31	Maximum	10.98	2.62	27.41	Average	7.92	2.31	20.08	Pass/Fail	Pass	Pass	Pass	Downlink Traffic Power ▾		
	Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	5.93	2.01	14.31																											
Maximum	10.98	2.62	27.41																											
Average	7.92	2.31	20.08																											
Pass/Fail	Pass	Pass	Pass																											
Change View		50 / 50 Single						Traffic Band PCS																						
Swap Window Positions		GSM/GPRS Transmit Power GMSK Transmit Power 29.40 dBm Single						Traffic Channel 661																						
								HS TX Level 0																						
								Channel Mode Setup ▾																						
1 of 2		Background Active Cell Connected Sys Type: GSM IntRef Offset T						Return 1 of 2																						

Measurement/Instrument Screen																														
Control		Phase & Frequency Error						TCH Parms																						
Phase & Freq. Setup ▾		<table border="1"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>5.86</td> <td>2.10</td> <td>4.97</td> </tr> <tr> <td>Maximum</td> <td>11.21</td> <td>2.61</td> <td>21.03</td> </tr> <tr> <td>Average</td> <td>8.05</td> <td>2.32</td> <td>14.30</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table>							Peak Phase °	RMS Phase °	Frequency Hz	Minimum	5.86	2.10	4.97	Maximum	11.21	2.61	21.03	Average	8.05	2.32	14.30	Pass/Fail	Pass	Pass	Pass	Downlink Traffic Power ▾		
	Peak Phase °	RMS Phase °	Frequency Hz																											
Minimum	5.86	2.10	4.97																											
Maximum	11.21	2.61	21.03																											
Average	8.05	2.32	14.30																											
Pass/Fail	Pass	Pass	Pass																											
Change View		50 / 50 Single						Traffic Band PCS																						
Swap Window Positions		GSM/GPRS Transmit Power GMSK Transmit Power 29.29 dBm Single						Traffic Channel 810																						
								HS TX Level 0																						
								Channel Mode Setup ▾																						
1 of 2		Background Active Cell Connected Sys Type: GSM IntRef Offset T						Return 1 of 2																						

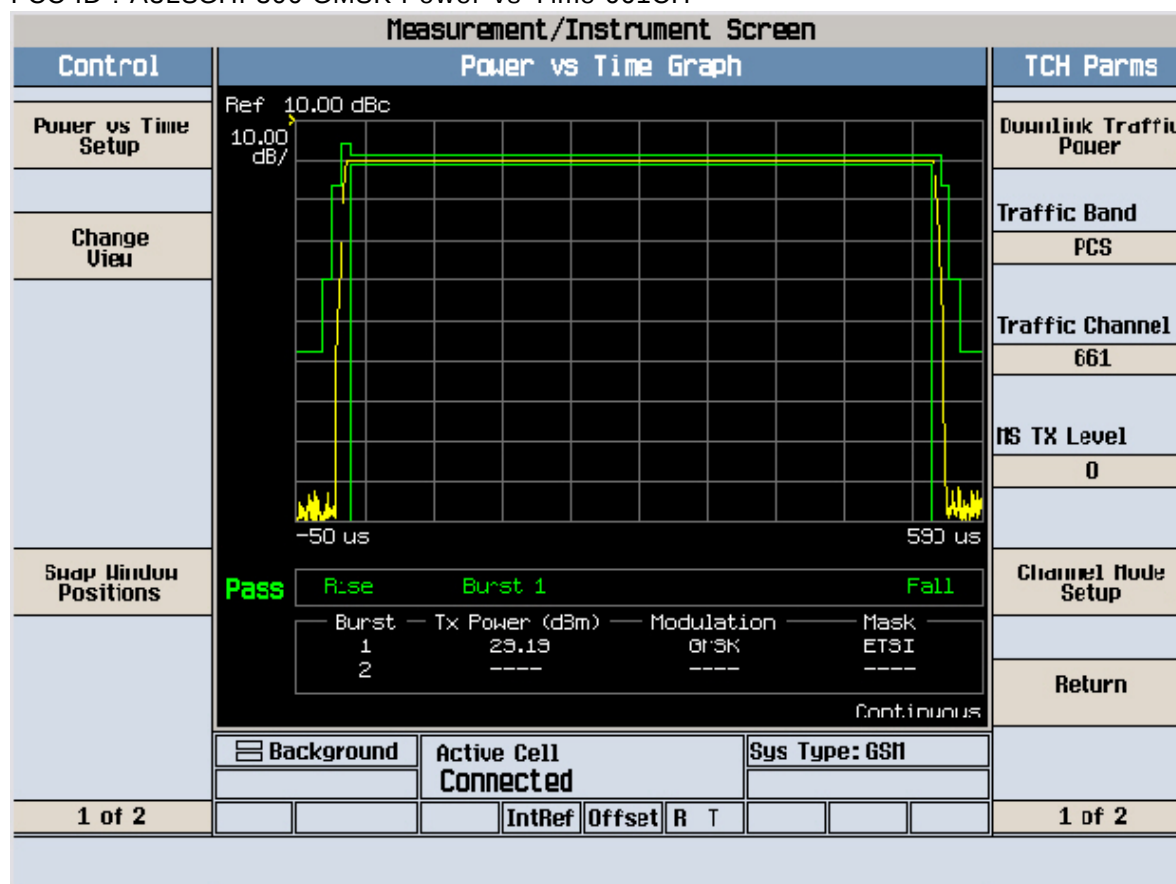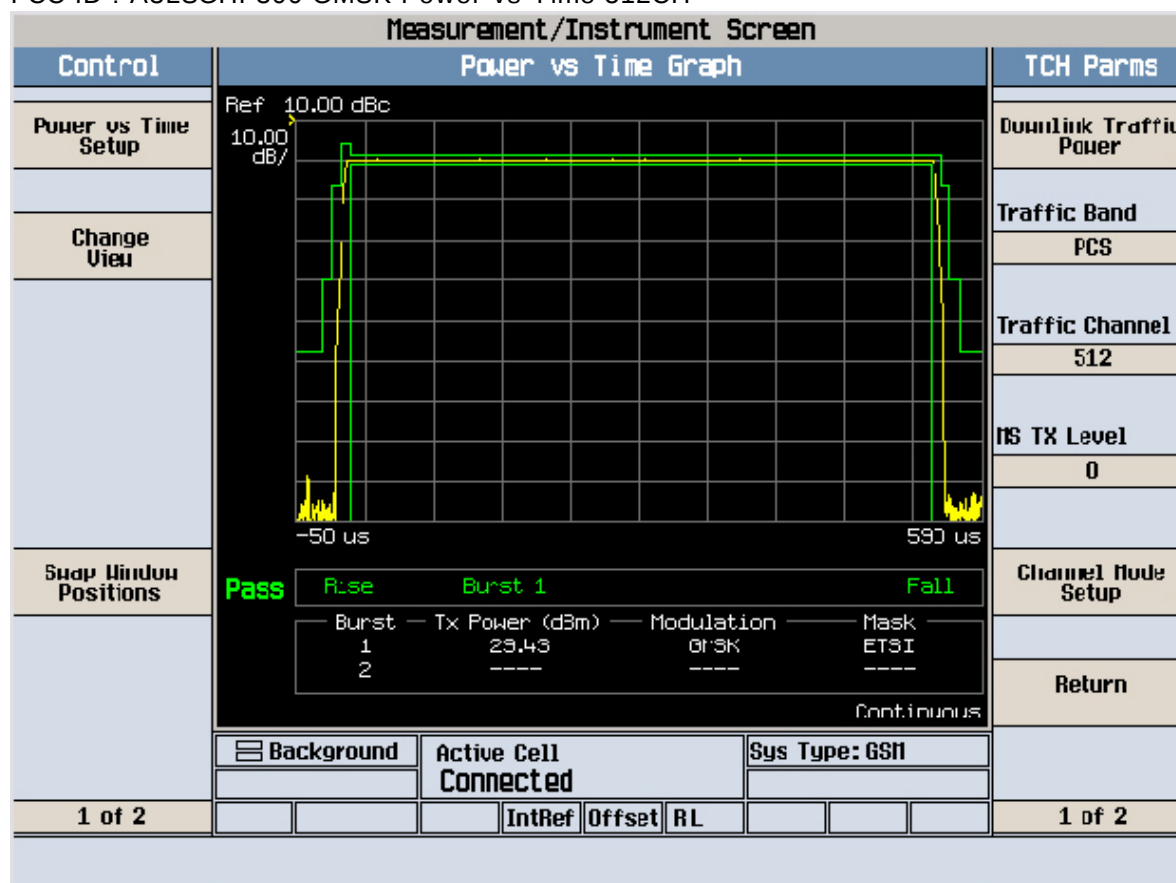

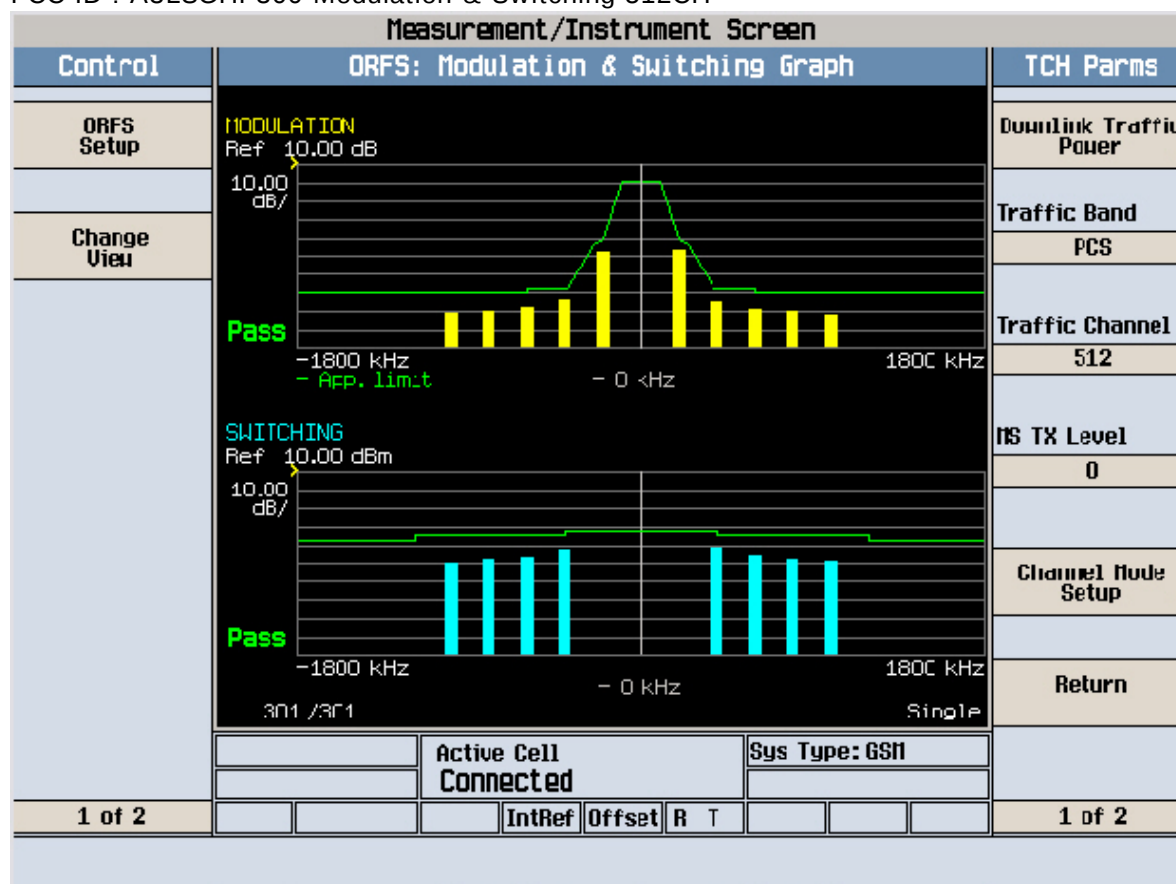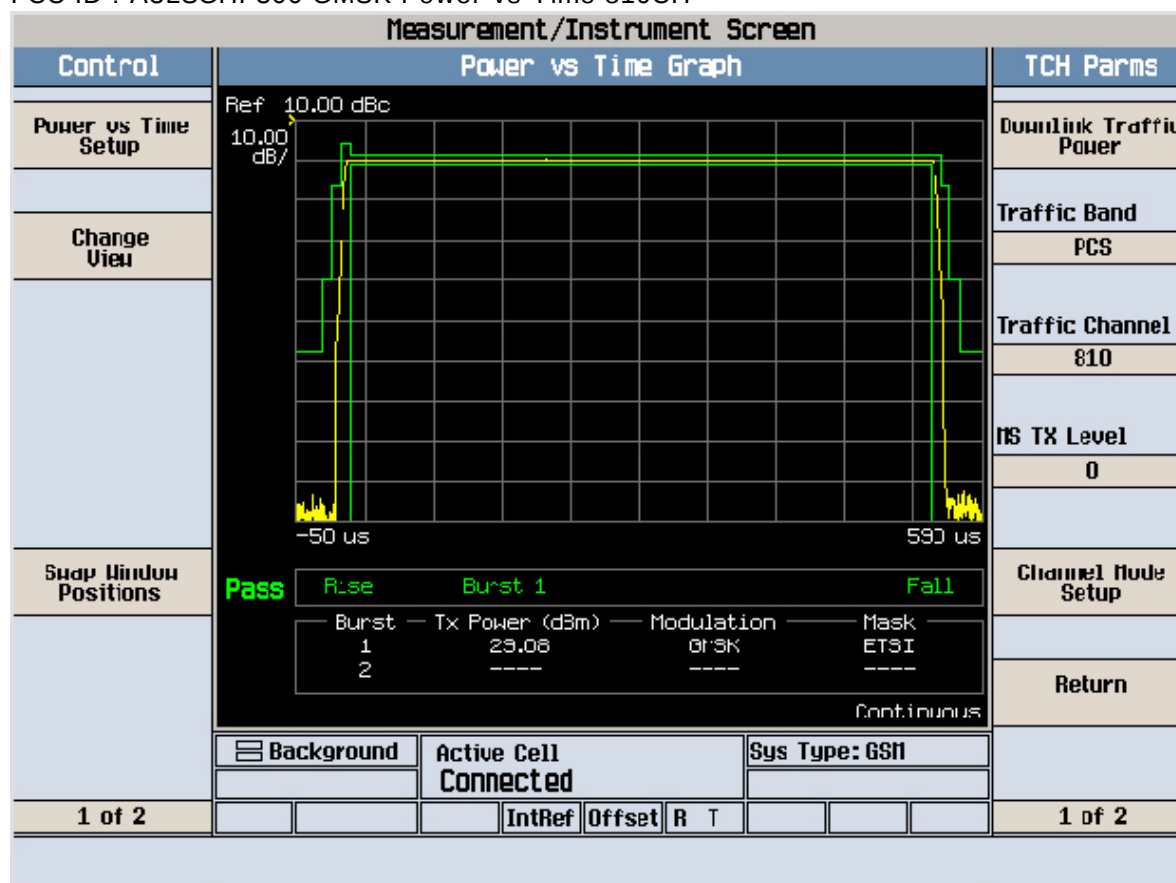

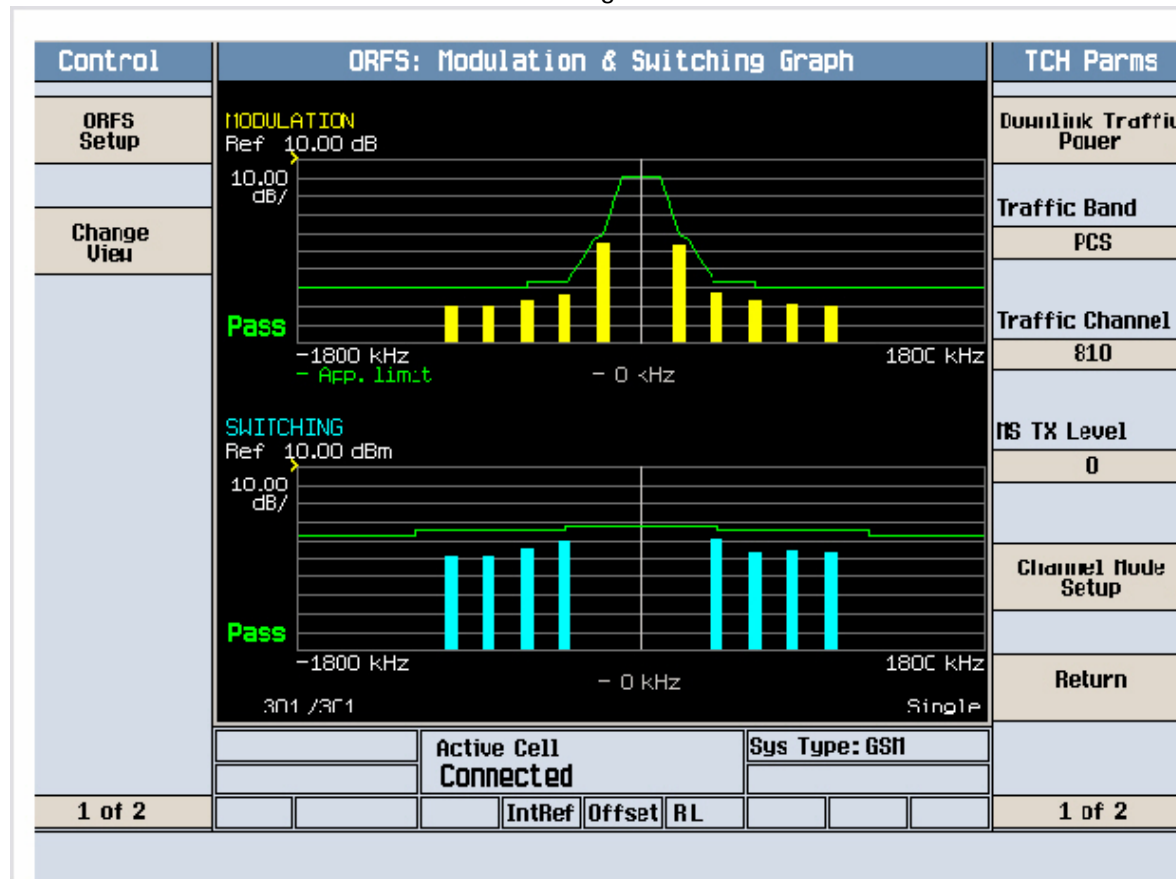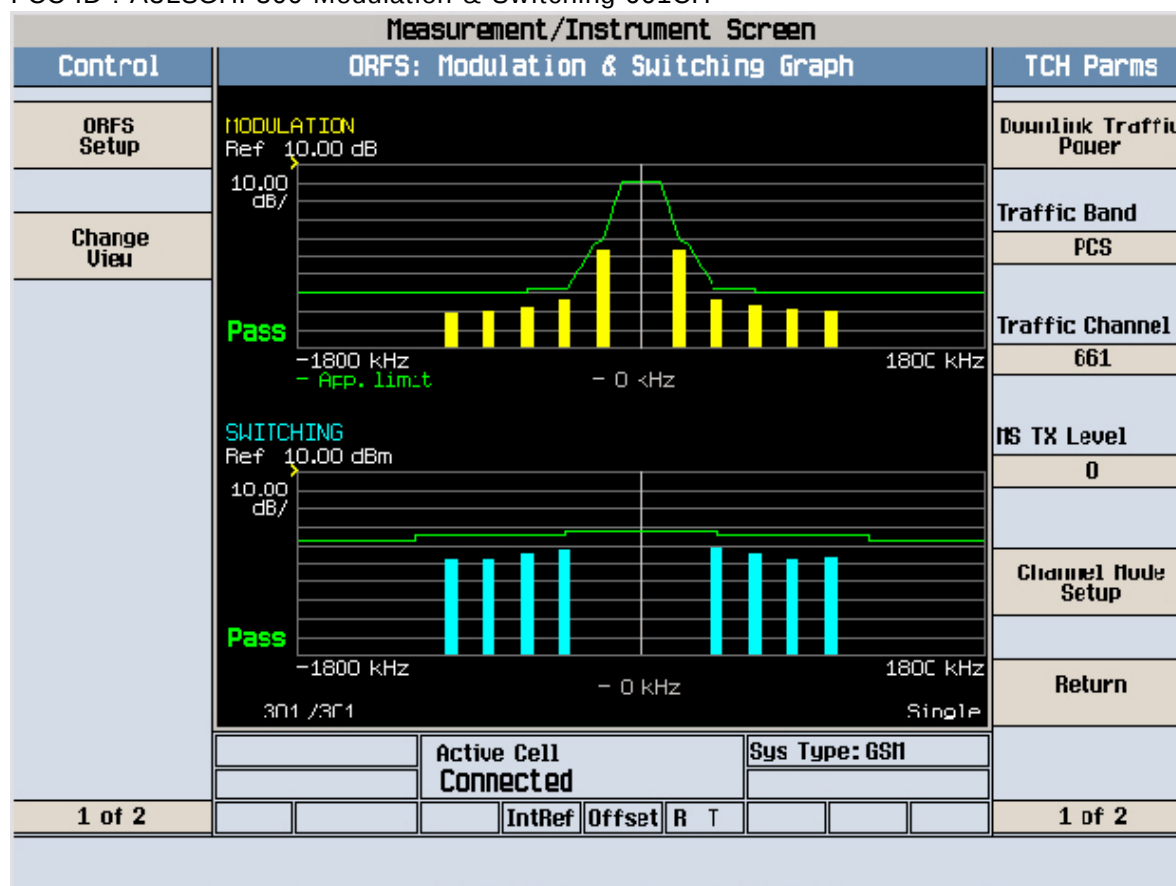


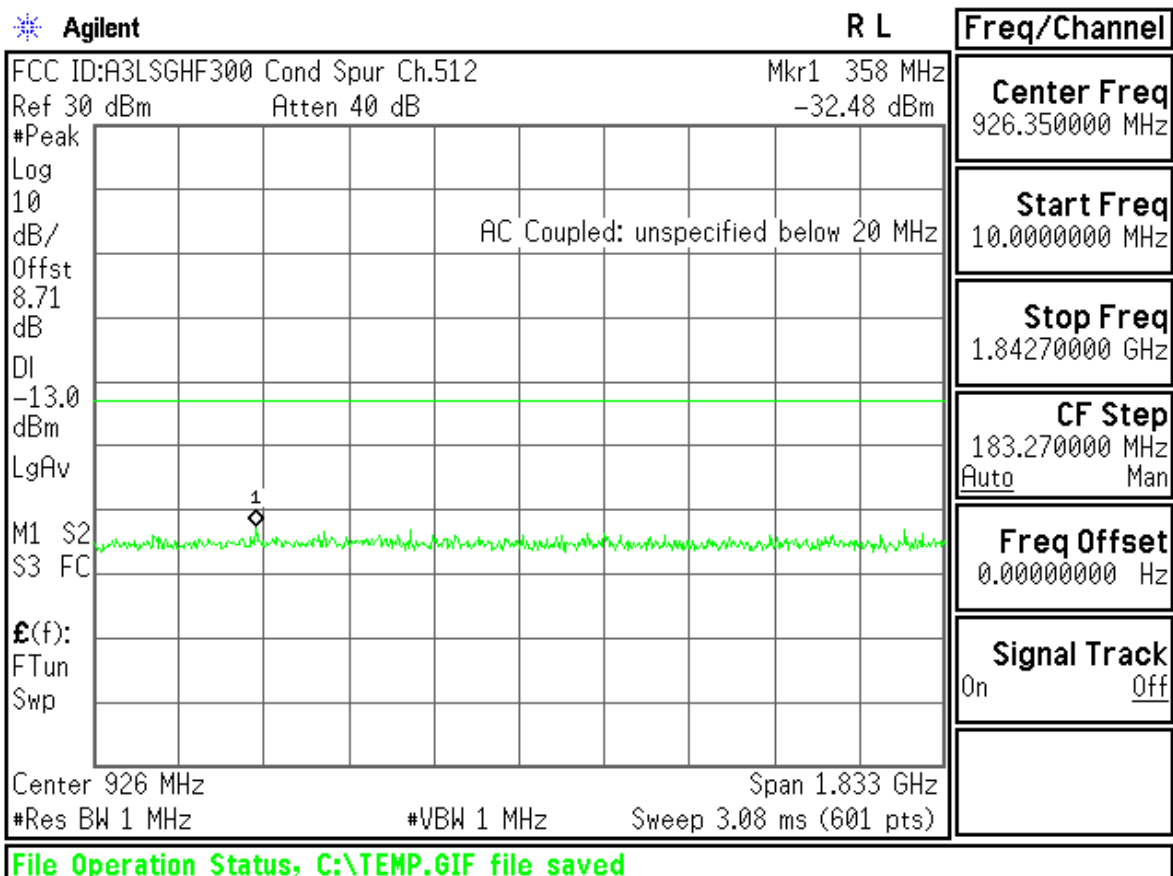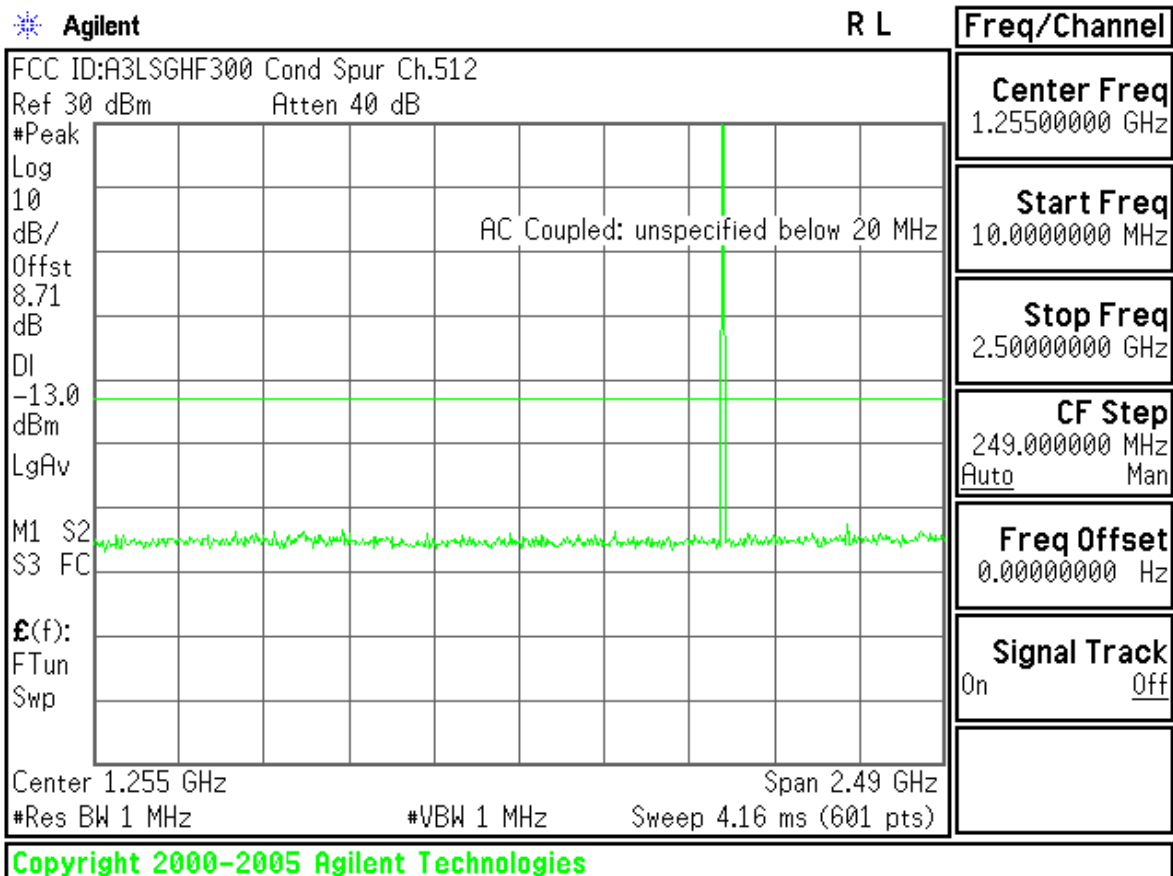

Agilent

R L

Freq/Channel

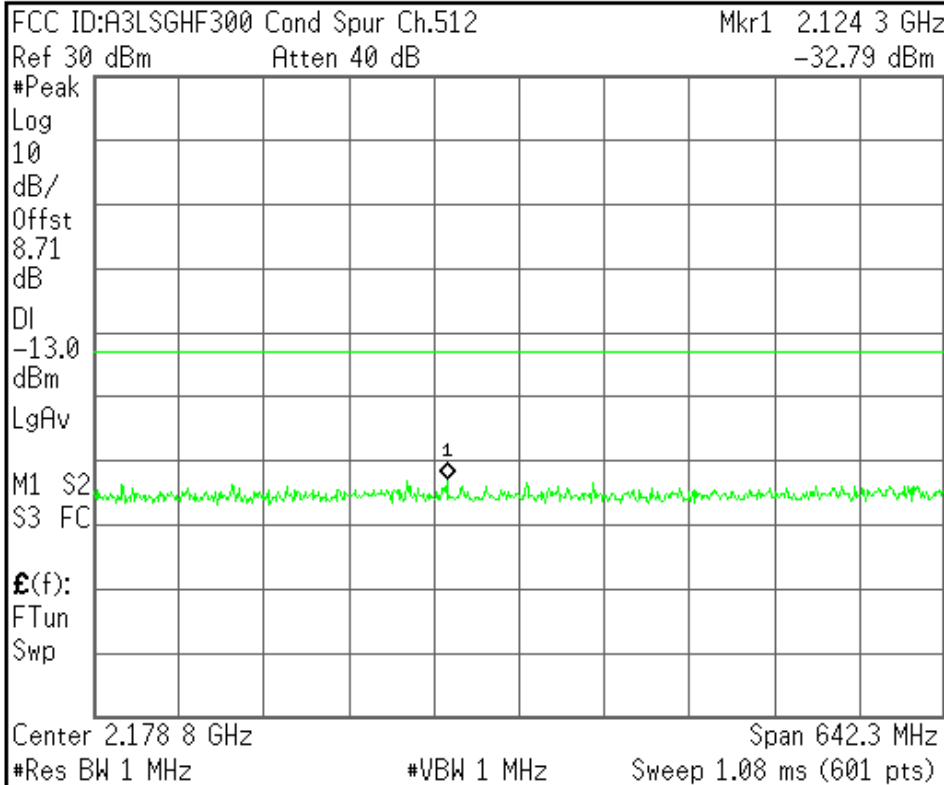

Center Freq
2.17885000 GHz

Start Freq
1.85770000 GHz

Stop Freq
2.50000000 GHz

CF Step
64.2300000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

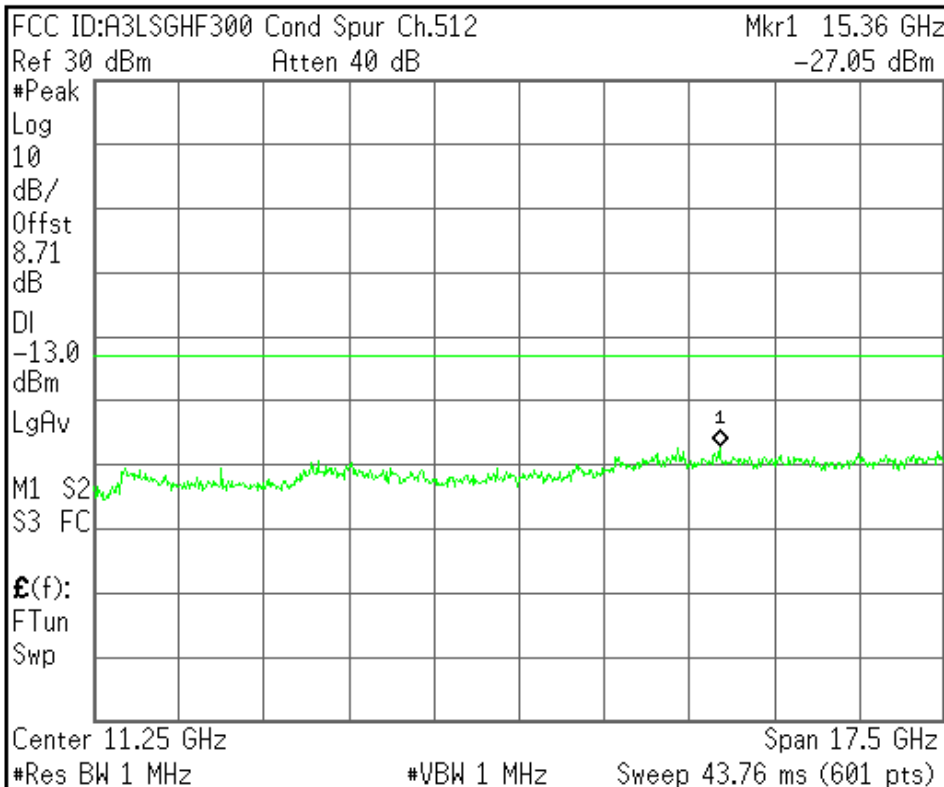

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz



Stop Freq
20.0000000 GHz



CF Step
1.75000000 GHz
Auto Man



Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

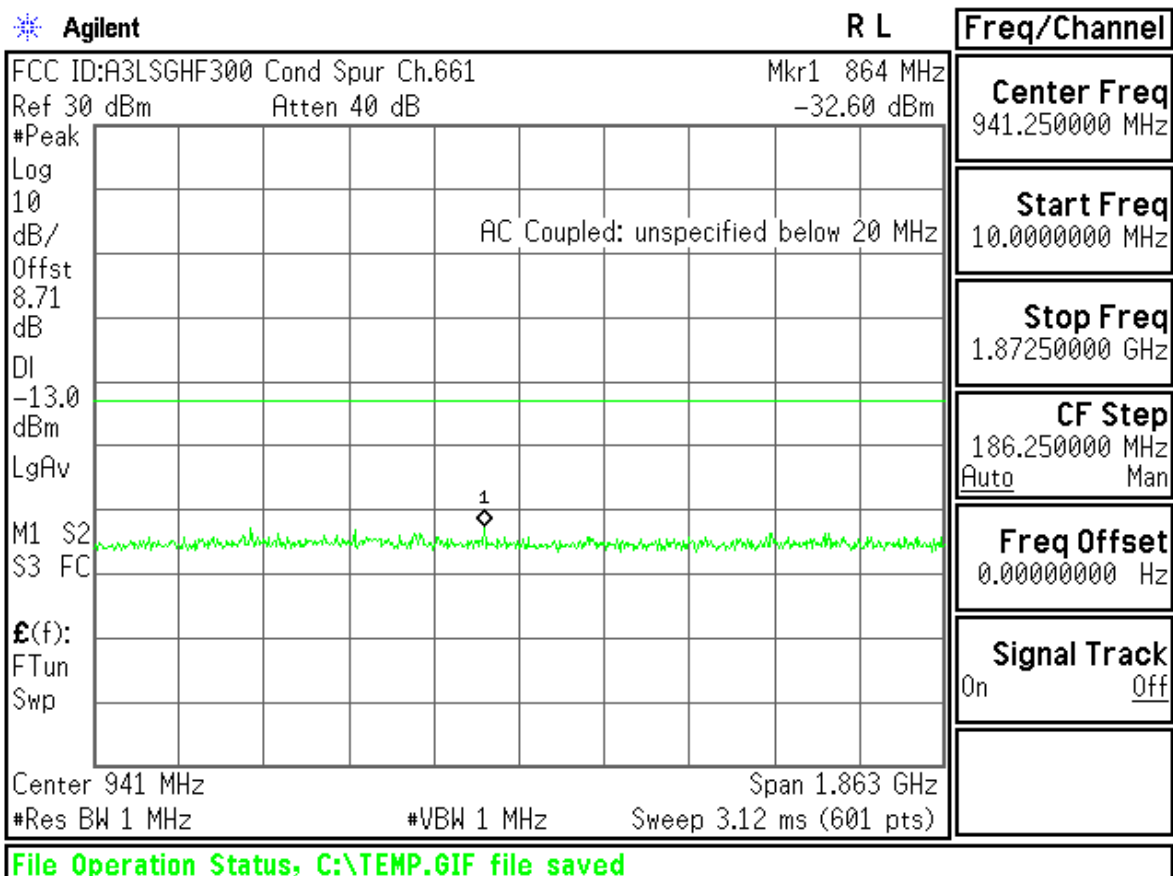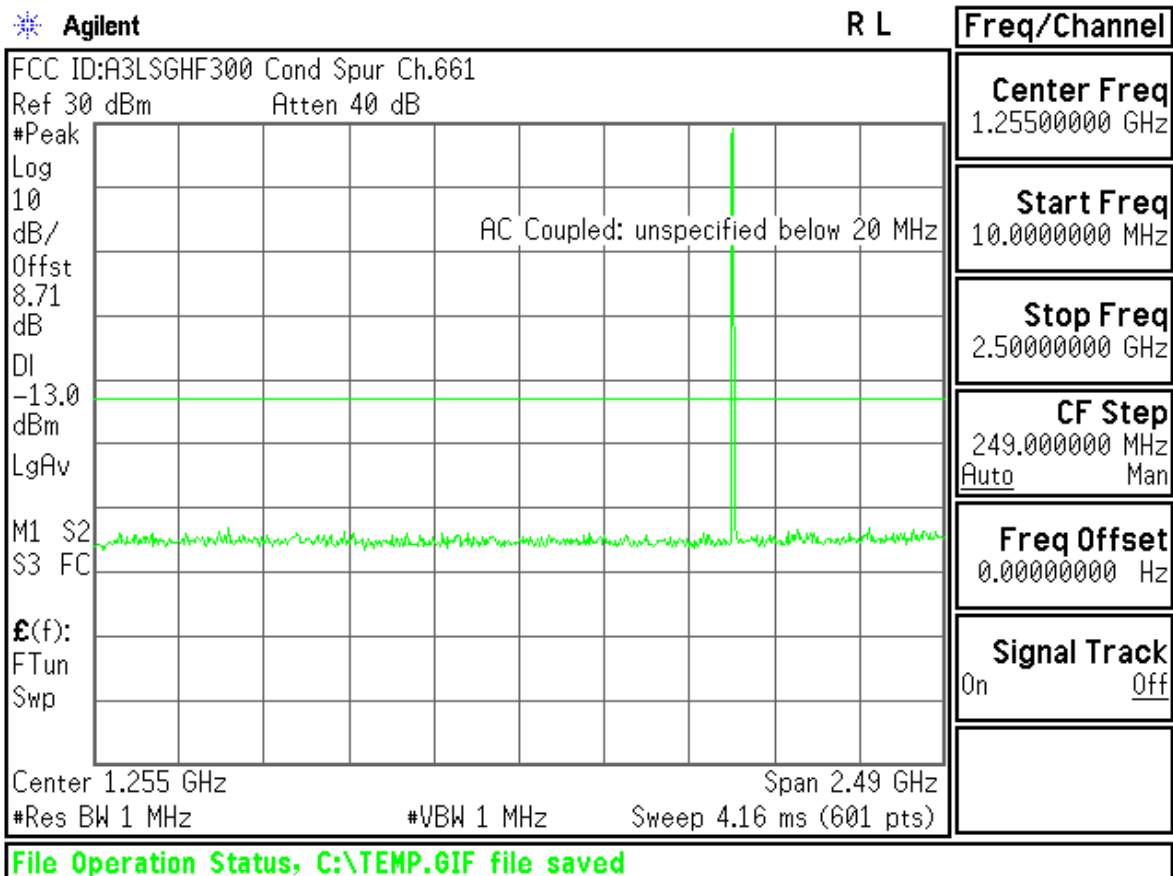

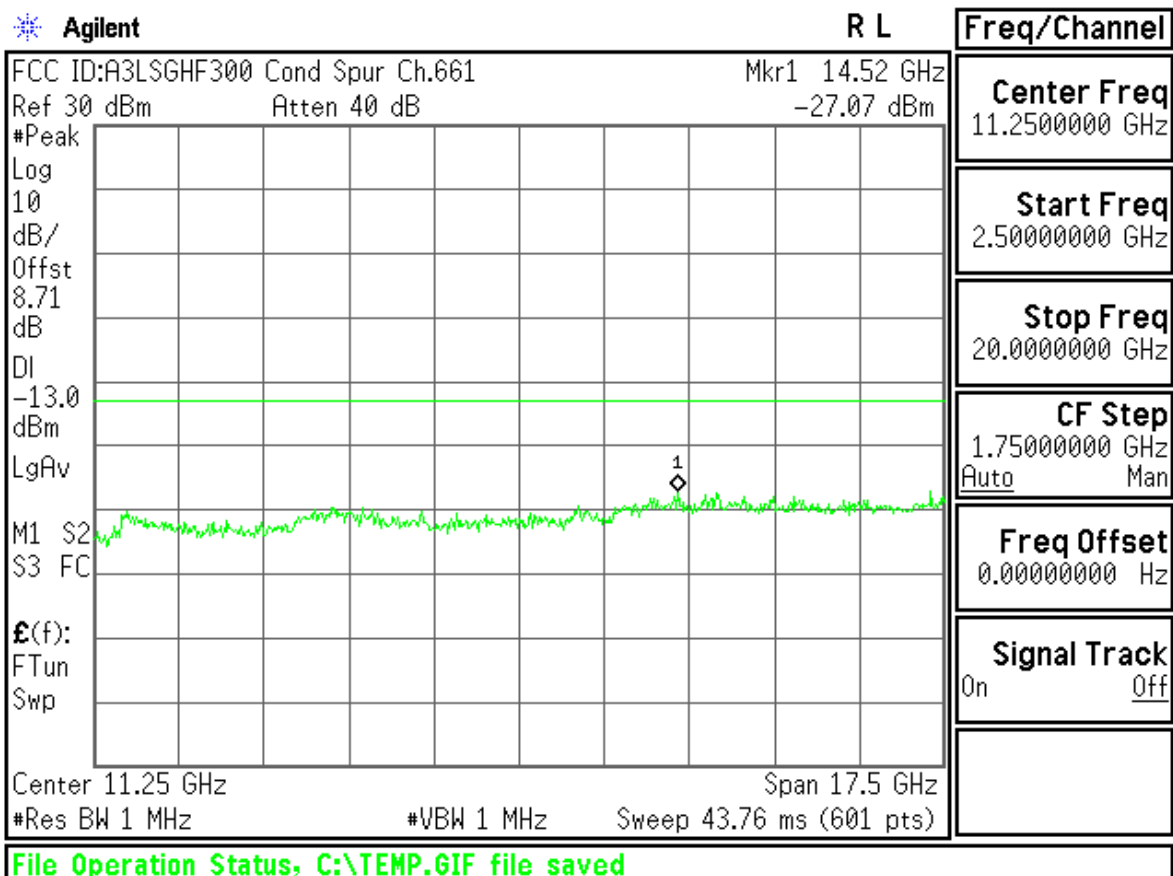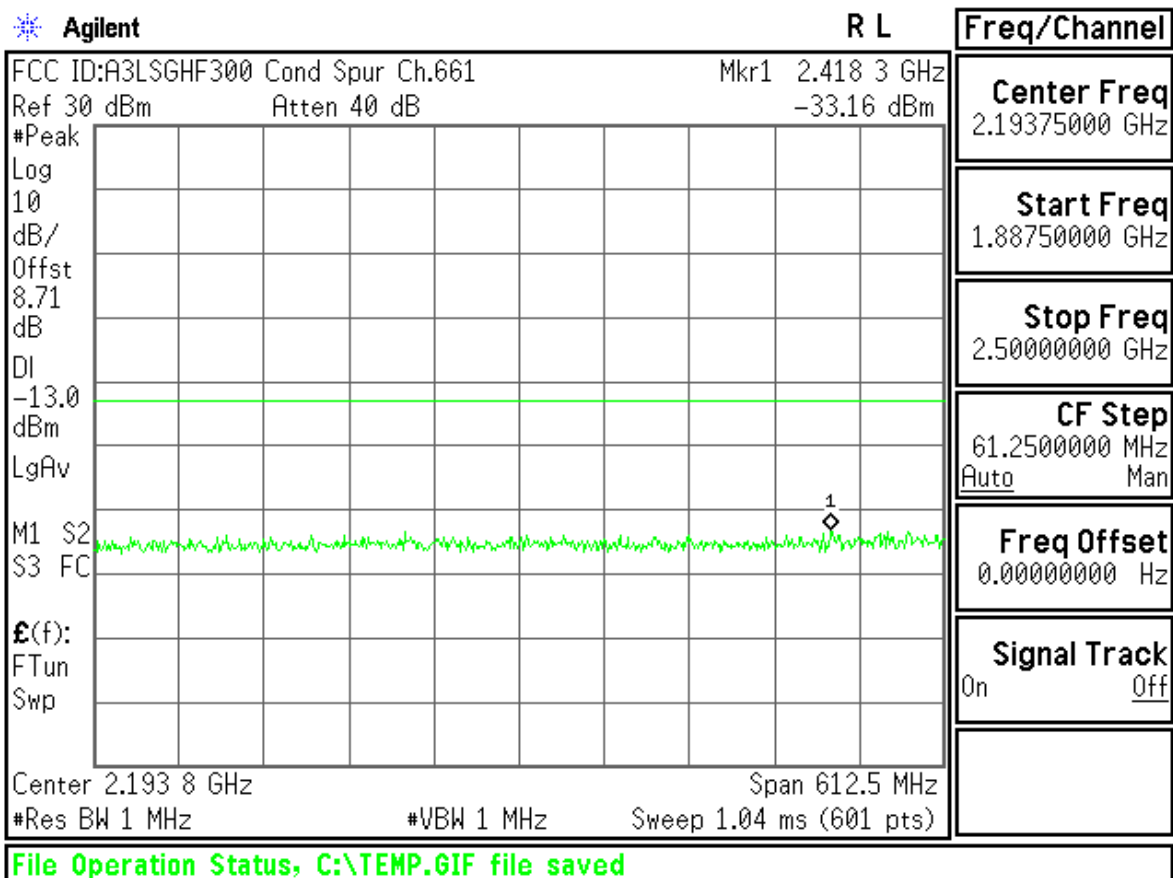


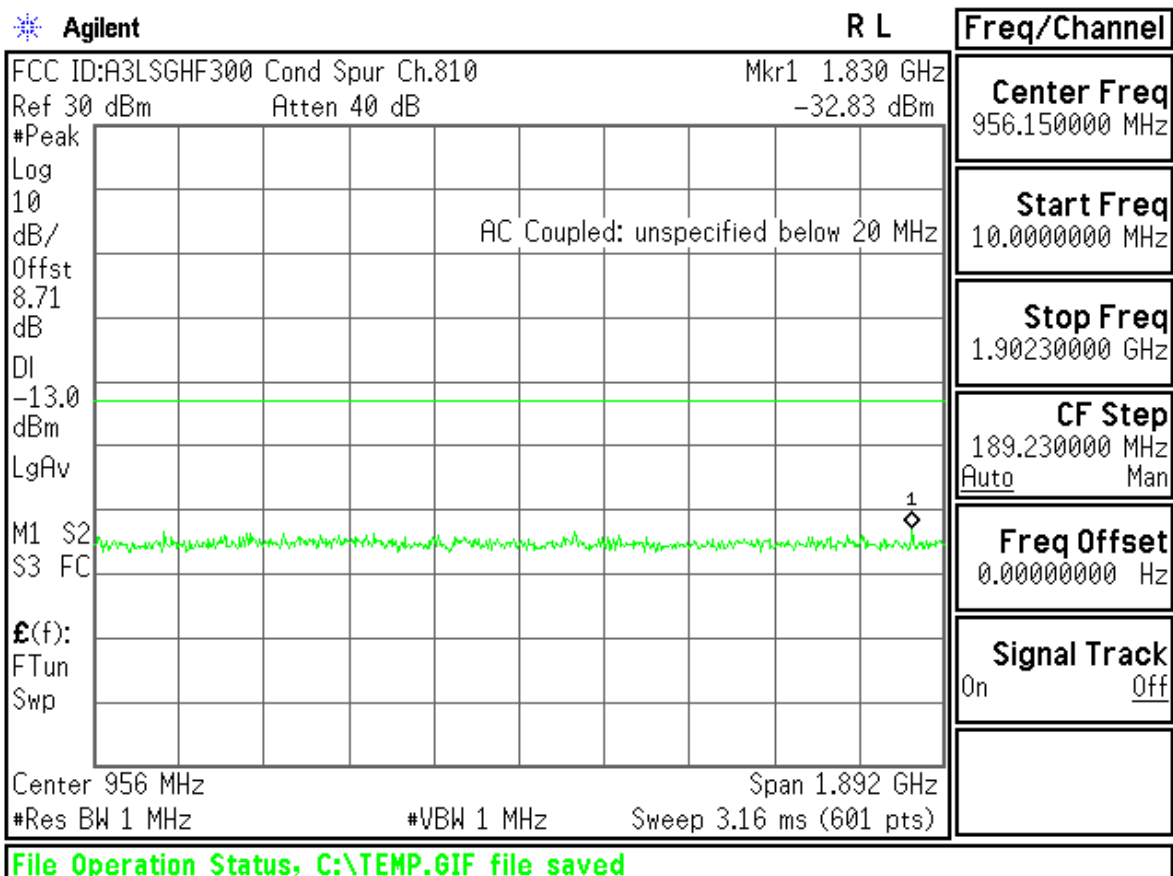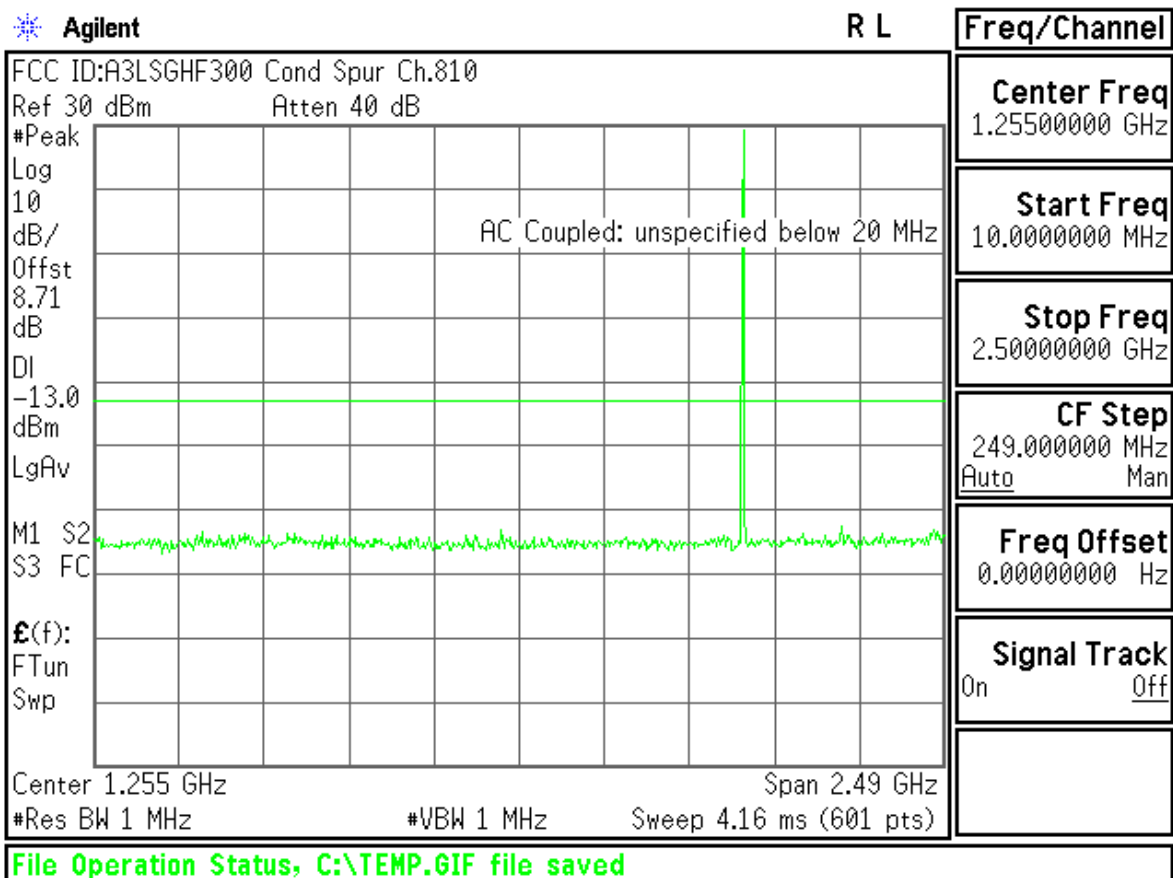

Agilent

R L

Freq/Channel

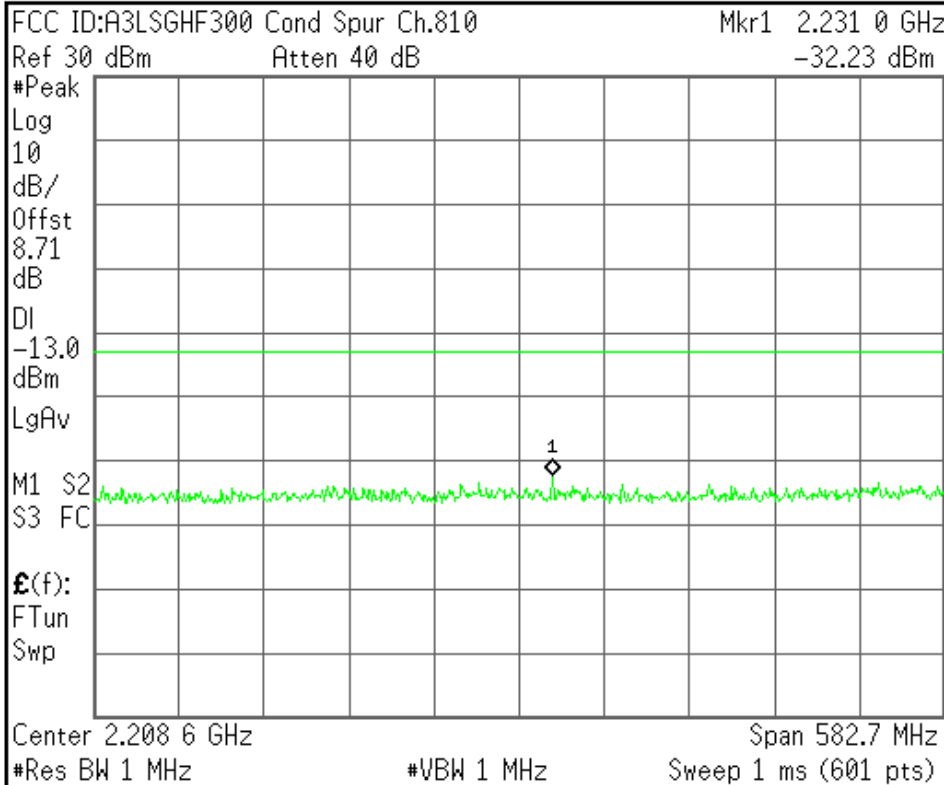

Center Freq
2.20865000 GHz

Start Freq
1.91730000 GHz

Stop Freq
2.50000000 GHz

CF Step
58.2700000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

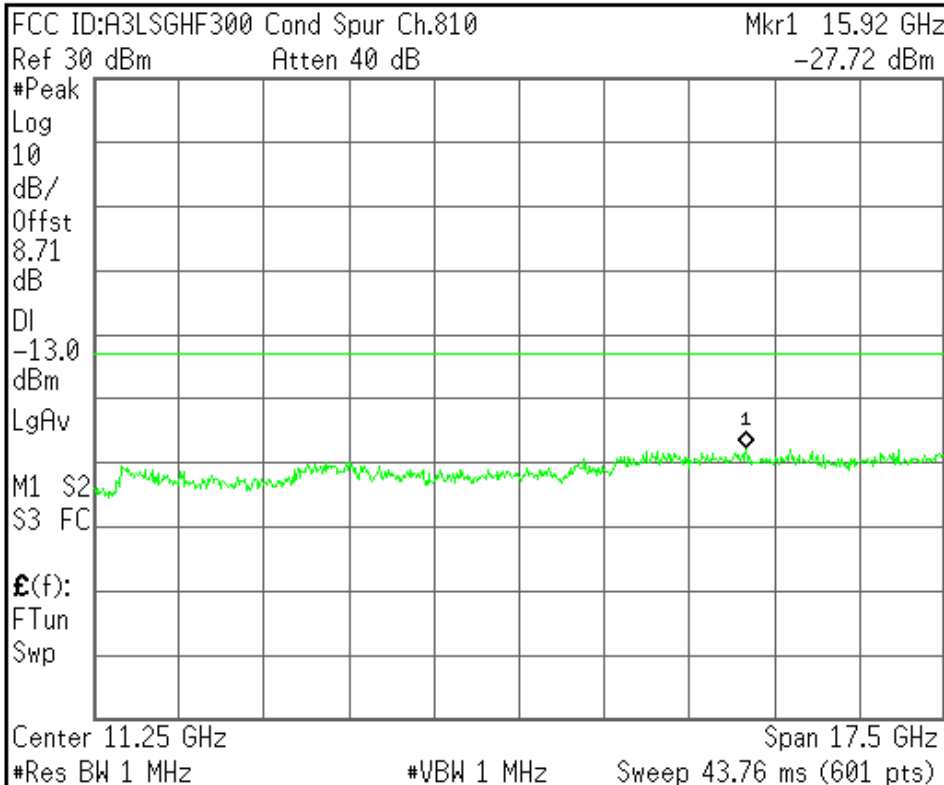

Center Freq
11.2500000 GHz

Start Freq
2.50000000 GHz

Stop Freq
20.0000000 GHz

CF Step
1.75000000 GHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHF300 Band Edge Ch.512

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.71

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

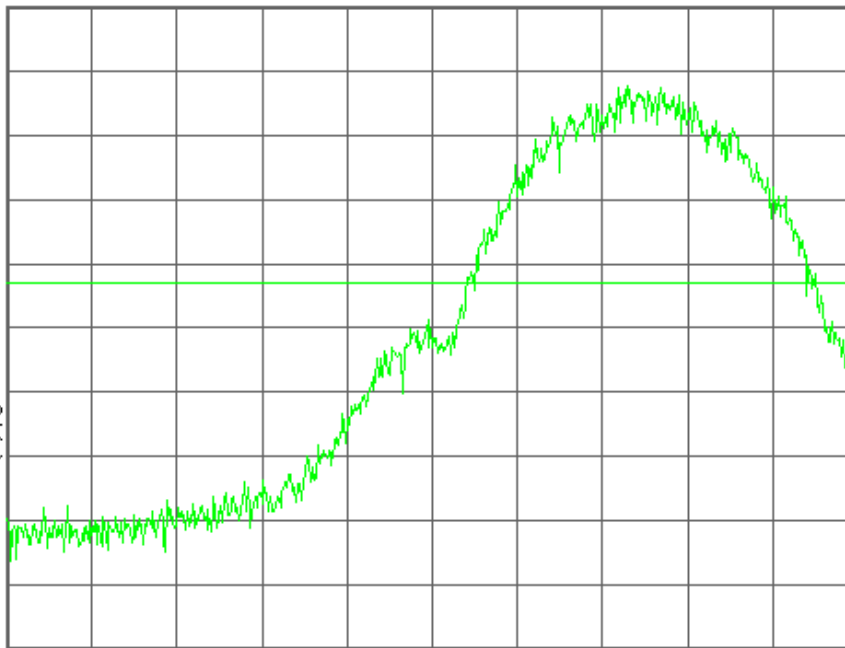

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHF300 Band Edge Ch.512

Mkr1 1.849 996 0 GHz

Ref 30 dBm

Atten 40 dB

-16.55 dBm

#Avg

Log

10

dB/

Offst

8.71

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$E(f)$:

f>50k

Swp

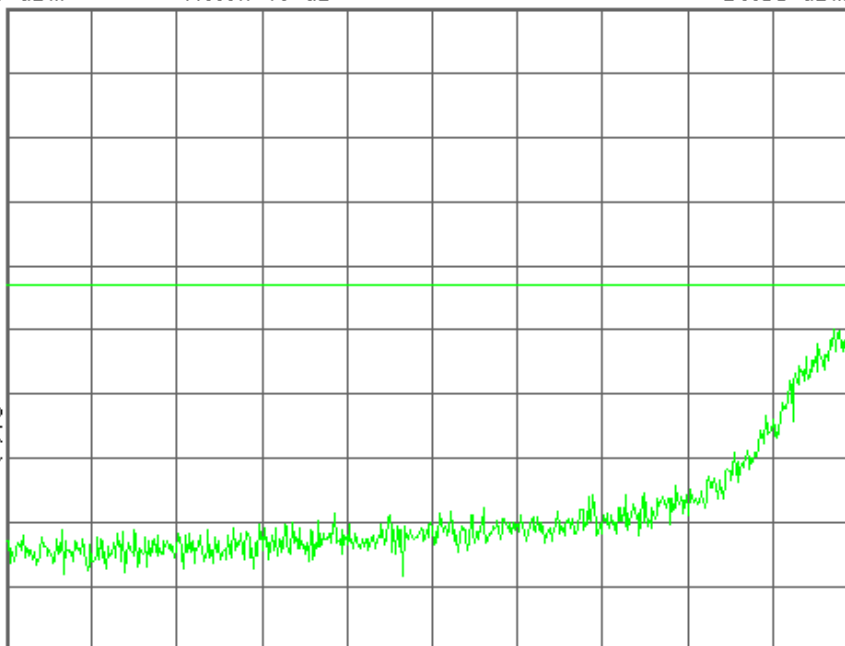

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHF300 Band Edge Ch.810

Ref 30 dBm

Atten 40 dB

#Avg

Log

10

dB/

Offst

8.71

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

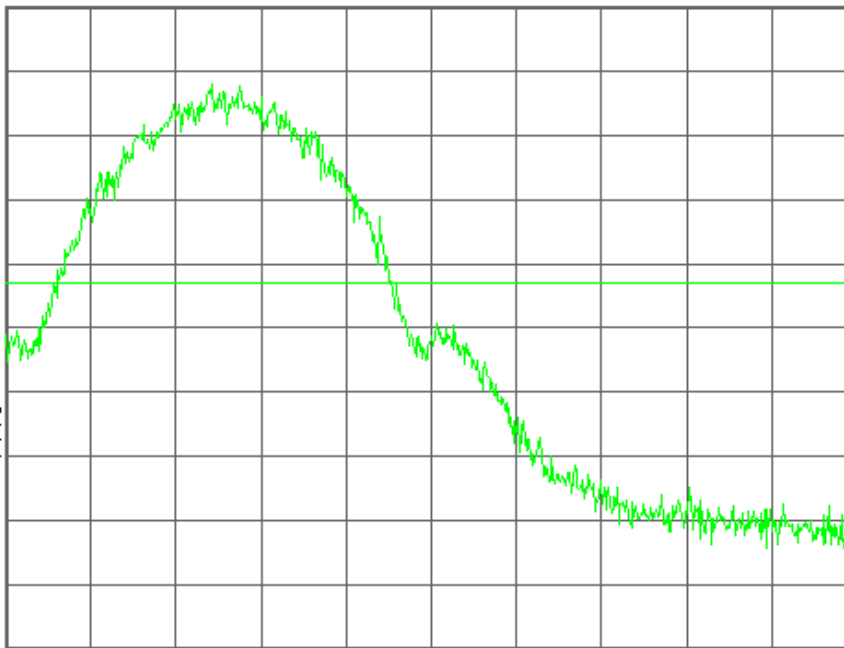

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHF300 Band Edge Ch.810

Mkr1 1.910 023 2 GHz

Ref 30 dBm

Atten 40 dB

-19.38 dBm

#Avg

Log

10

dB/

Offst

8.71

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

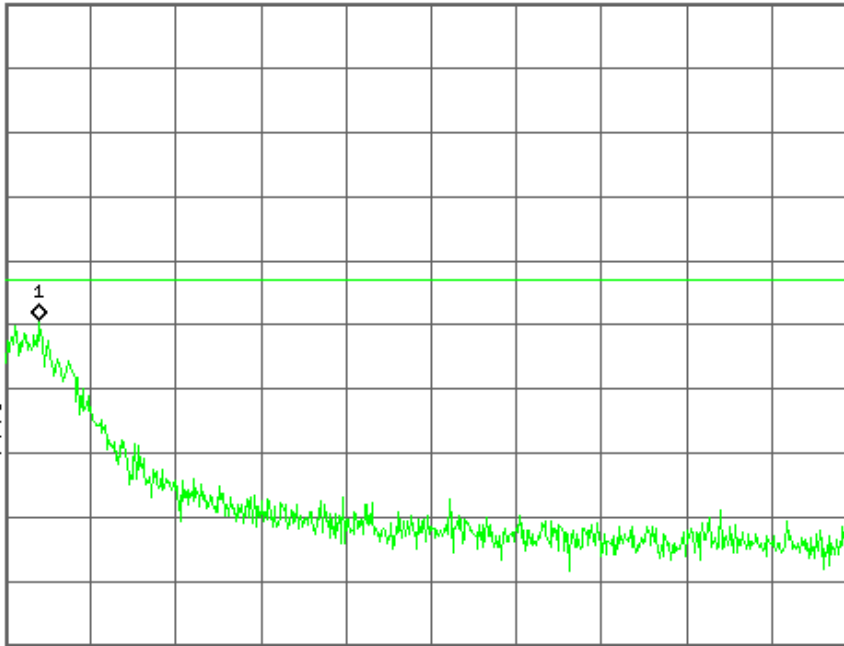

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved


EDGE1900



Agilent

R T


Freq/Channel

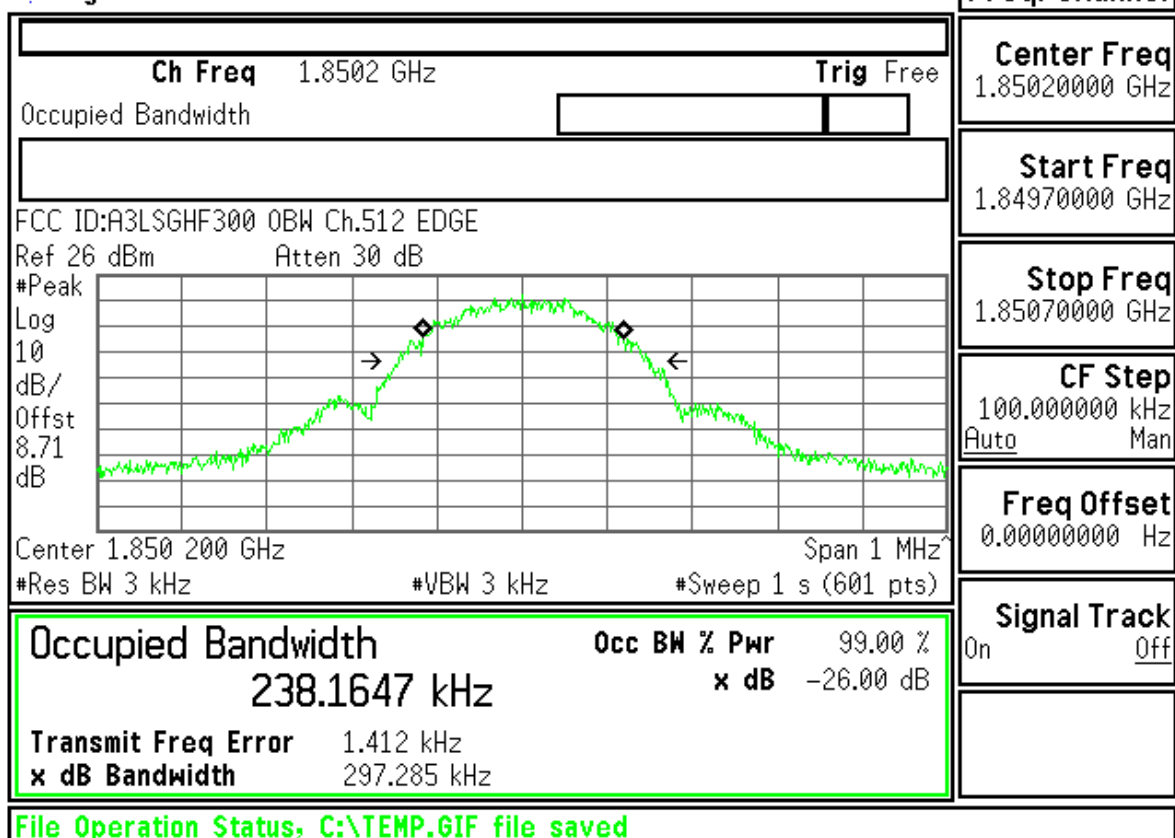
**Center Freq**
1.85020000 GHz**Start Freq**
1.84970000 GHz**Stop Freq**
1.85070000 GHz**CF Step**
100.000000 kHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off

Agilent

R T

Freq/Channel

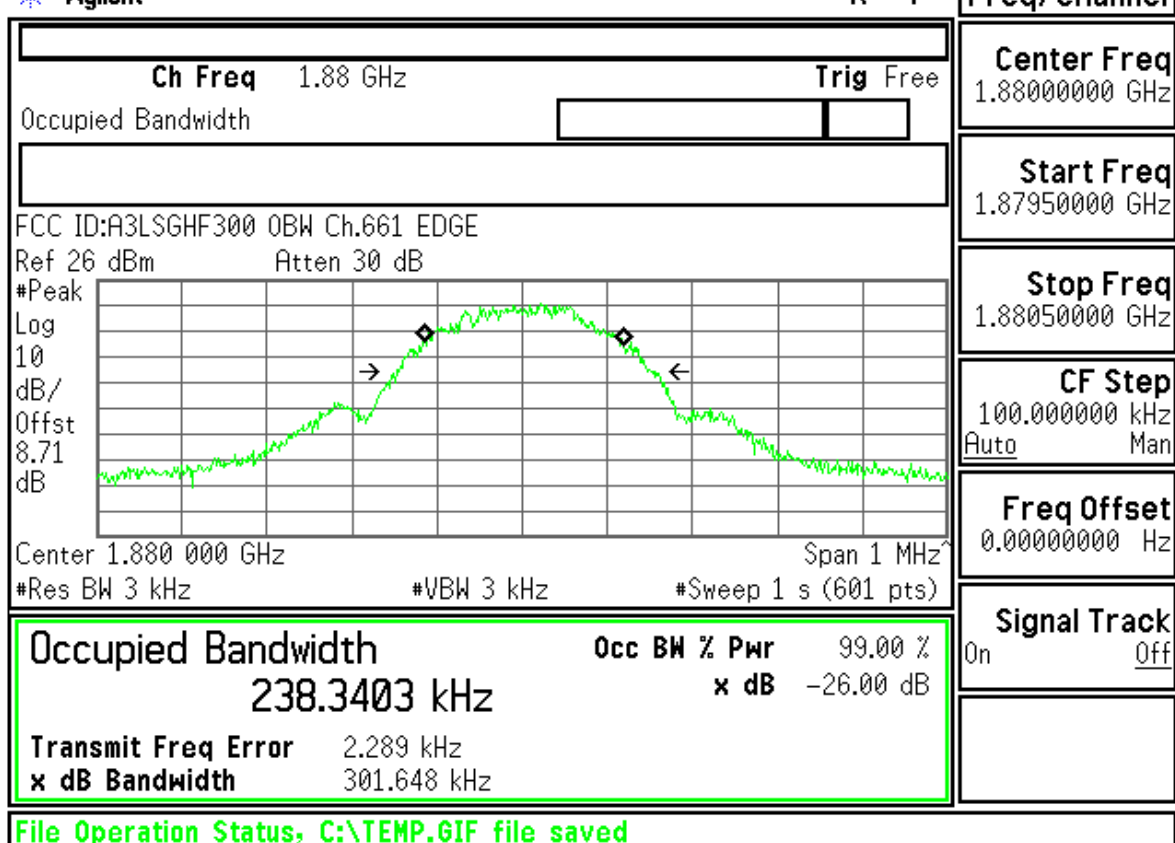**Center Freq**
1.88000000 GHz**Start Freq**
1.87950000 GHz**Stop Freq**
1.88050000 GHz**CF Step**
100.000000 kHz
Auto Man**Freq Offset**
0.00000000 Hz**Signal Track**
On Off

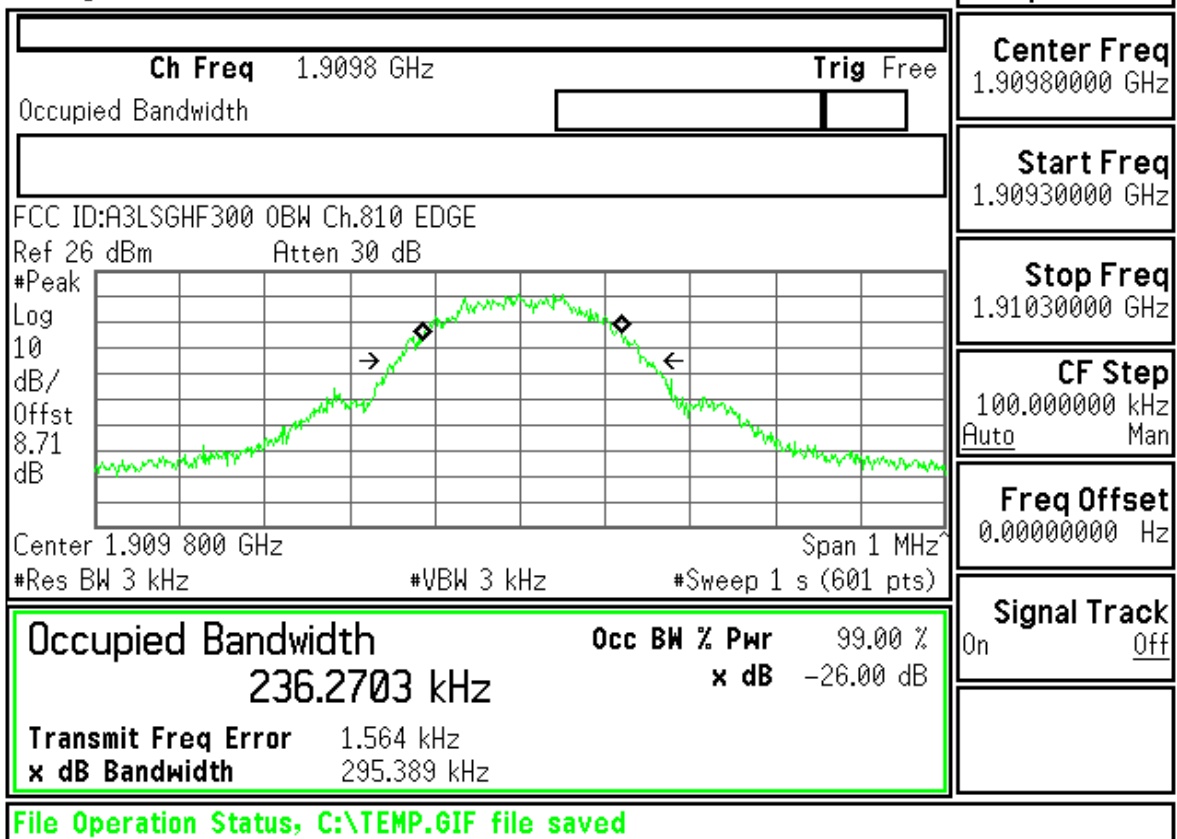

ID : A3LSGHF300 Transmit Power 512CH EDGE

Measurement/Instrument Screen												
Control		EGPRS Transmit Power								PDCH Parms		
EGPRS Transmit Power Setup ▾		EPSK Burst Power 25.48 dBm EPSK Est Carrier Power 25.82 dBm Single								Downlink Traffic Power ▾		
										Traffic Band		
										PCS		
										Traffic Channel		
										512		
										HS TX Level ▾		
										Modulation Coding Scheme ▾		
										Return		
				Active Cell Transferring				Sys Type: EGPRS				
1 of 2					IntRef	Offset	R	T				1 of 2

Measurement/Instrument Screen											
Control		EGPRS Transmit Power						PDCH Params			
EGPRS Transmit Power Setup ▾		EPSK Burst Power 26.05 dBm EPSK Est Carrier Power 25.52 dBm Single						Downlink Traffic Power ▾ Traffic Band PCS Traffic Channel 661 HS TX Level ▾ Modulation Coding Scheme ▾ Return			
1 of 2				Active Cell Transferring		Sys Type: EGPRS				1 of 2	
				IntRef	Offset	R	T				

Measurement/Instrument Screen											
Control		EGPRS Transmit Power						PDCH Params			
EGPRS Transmit Power Setup ▾		EPSK Burst Power 25.07 dBm EPSK Est Carrier Power 25.38 dBm Single						Downlink Traffic Power ▾ Traffic Band PCS Traffic Channel 810 HS TX Level ▾ Modulation Coding Scheme ▾ Return			
1 of 2				Active Cell Transferring		Sys Type: EGPRS				1 of 2	
				IntRef	Offset	R	T				

Agilent

R L

Freq/Channel

FCC ID:A3LSGHF300 Band Edge Ch.512 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

8.71

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

E(f):

f>50k

Swp

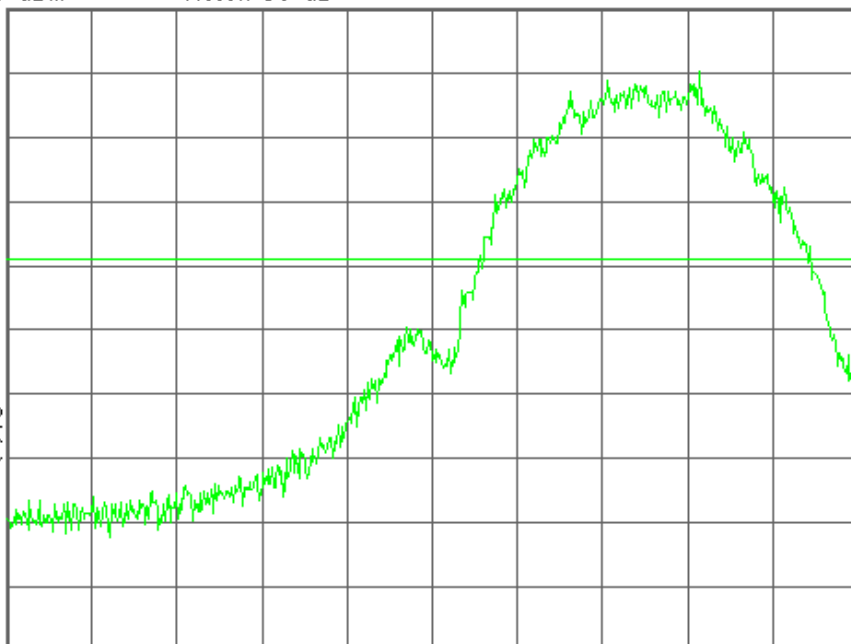

Center 1.850 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.85000000 GHz

Start Freq
1.84959500 GHz

Stop Freq
1.85040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

Copyright 2000-2005 Agilent Technologies

Agilent

R L

Freq/Channel

FCC ID:A3LSGHF300 Band Edge Ch.512 EDGE

Mkr1 1.849 981 3 GHz

Ref 26 dBm

Atten 30 dB

-23.65 dBm

#Avg

Log

10

dB/

Offst

8.71

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

E(f):

f>50k

Swp

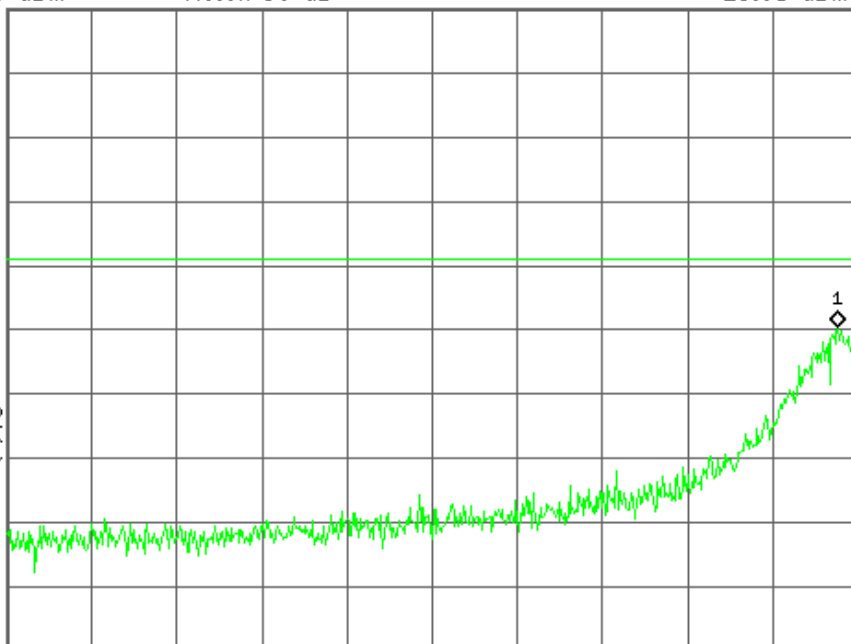

Center 1.849 595 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.84959500 GHz

Start Freq
1.84919000 GHz

Stop Freq
1.85000000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHF300 Band Edge Ch.810 EDGE

Ref 26 dBm

Atten 30 dB

#Avg

Log

10

dB/

Offst

8.71

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

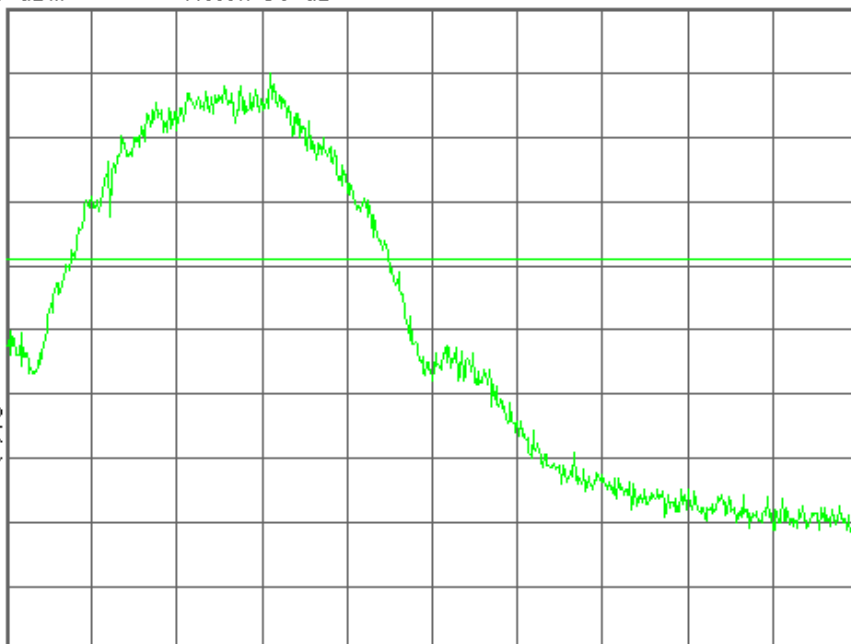

Center 1.910 000 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91000000 GHz

Start Freq
1.90959500 GHz

Stop Freq
1.91040500 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R L

Freq/Channel

FCC ID:A3LSGHF300 Band Edge Ch.810 EDGE

Mkr1 1.910 019 0 GHz

Ref 26 dBm

Atten 30 dB

-26.46 dBm

#Avg

Log

10

dB/

Offst

8.71

dB

DI

-13.0

dBm

PAvg


M1 S2

S3 FC

$\mathcal{E}(f)$:

f>50k

Swp

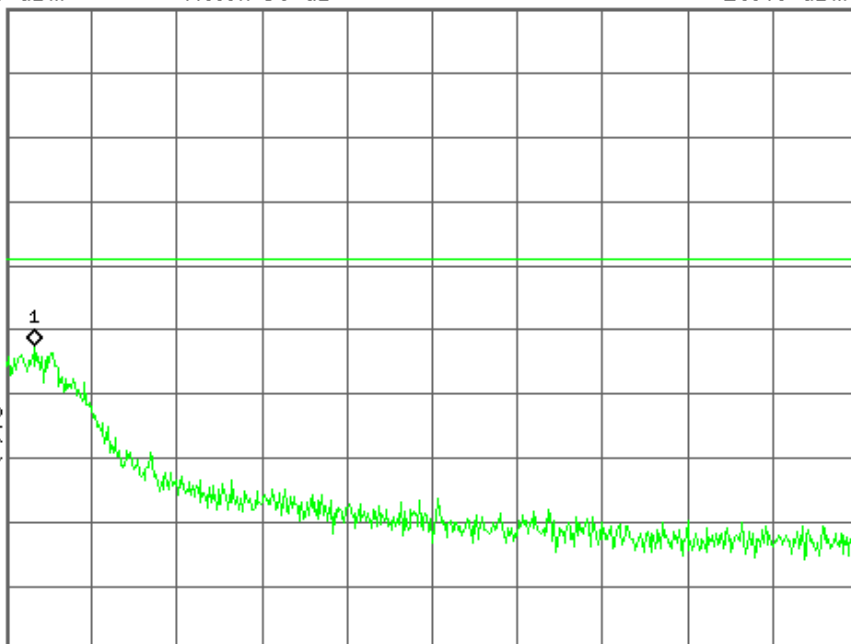

Center 1.910 405 0 GHz

Span 810 kHz

#Res BW 3 kHz

#VBW 3 kHz

Sweep 343.2 ms (601 pts)

Center Freq
1.91040500 GHz

Start Freq
1.91000000 GHz

Stop Freq
1.91081000 GHz

CF Step
81.0000000 kHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved