


⚠ WARNING: May result in serious injury or death. Turn off power at circuit breaker before installing the unit.

Attention: pour éviter un incendie, un choc électrique ou la mort. Coupez l'alimentation au disjoncteur ou au fusible et testez que l'alimentation est coupée avant le câblage

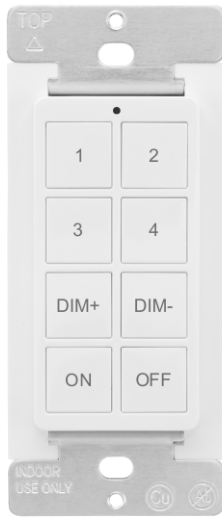

FEATURES

- Compatible with Keilton devices.
- Purpose of control: Operating Control, Electronic Controller Switch.
- B.Construction of control: Independently Mounted for Flush Mounting.
- Network technology for Bluetooth enabled IOS or Android smartphone. Linkable with light groups.
- Manual On/Off/Dim & sences control of any connected load.


SPECIFICATIONS

Voltage	120~277VAC,50/60Hz
Wattage	0.07W
Wire Strip Length	16mm(5/8 in.)
Operating Temperature	0°C-40°C
Pollution Degree	2
Type of Action	Type 1 Action

WIRING


1. Connect the 8-key scene controller as shown in the wiring diagram: Black lead to hot wire, white lead to neutral wire, green lead to ground wire.
2. Check connections to be sure they are tight and no bare conductors are exposed.
3. Put the controller into the outlet box carefully.
4. Use the supplied screws to mount the controller into a standard outlet box.
5. Attach the wall plate.
6. Restore power to the circuit breaker and test the system.

TIPS: This Bluetooth device is compatible with Keilton lighting control system only.

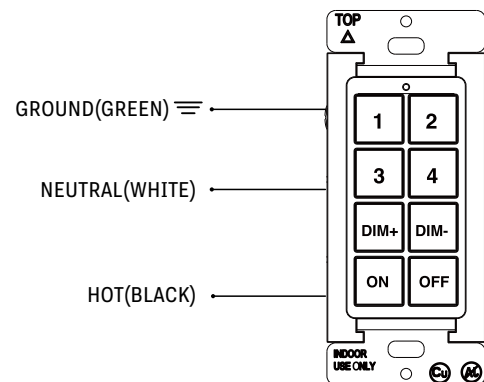

- Wire Strip Length; 16 mm (5/8 in.)
- The device shall install in a standard outlet box.

INSTRUCTIONS

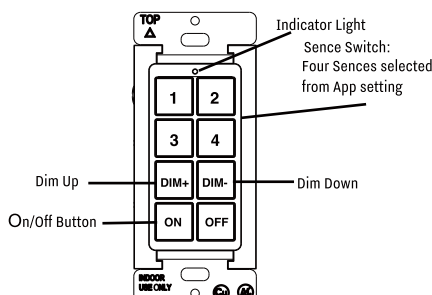

- Follow the instruction to connect Bluetooth Wall Switch to the lights.
- Press button DIM+ and ON together over 3 seconds to enter pairing mode and achieve reset function. This switch can be scanned in next 30 seconds.
- In Keilton App "Switch" page, click to add the switch.
- Select the light/light group to be controlled by this switch.
- Detail operation please refer Keilton APP instruction.

FCC STATEMENT

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.

Scan a QR code below to download the app.



Scan to download the Keilton+autani app instructions



WARRANTY INFORMATION

Our company warrants this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.

Contact: sales@litetrace.com