


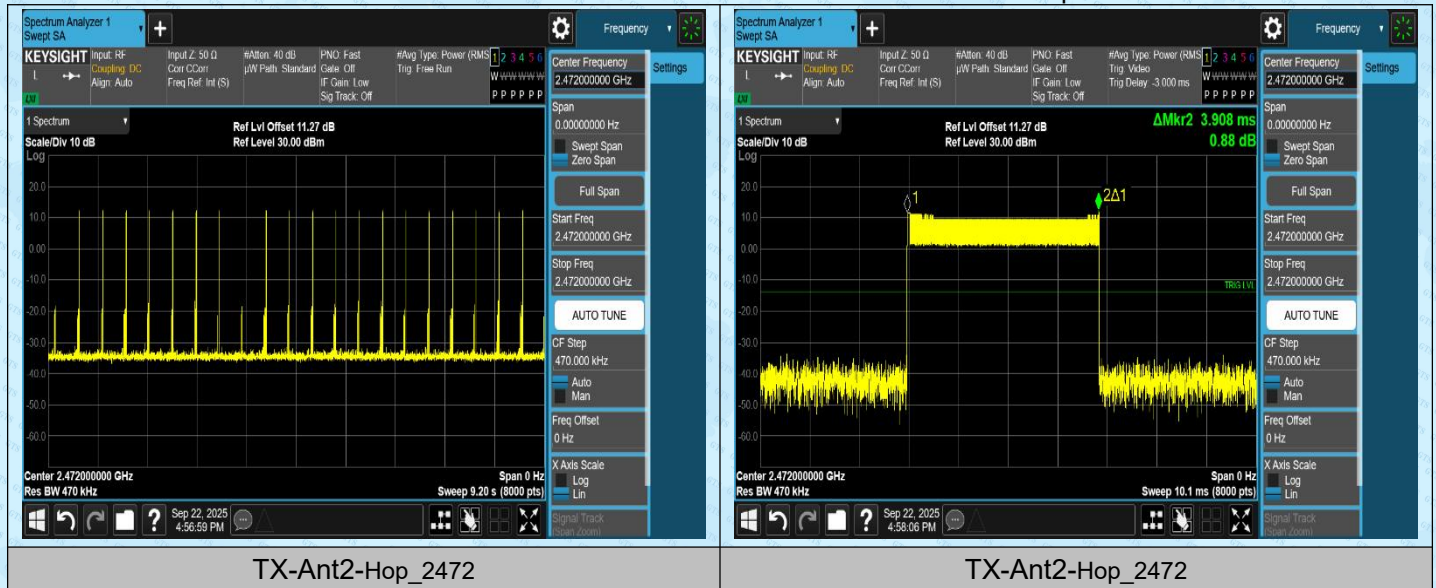


Appendix F: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
TX	Ant1	Hop	23	≥15	PASS
TX	Ant2	Hop	23	≥15	PASS

Test Graphs

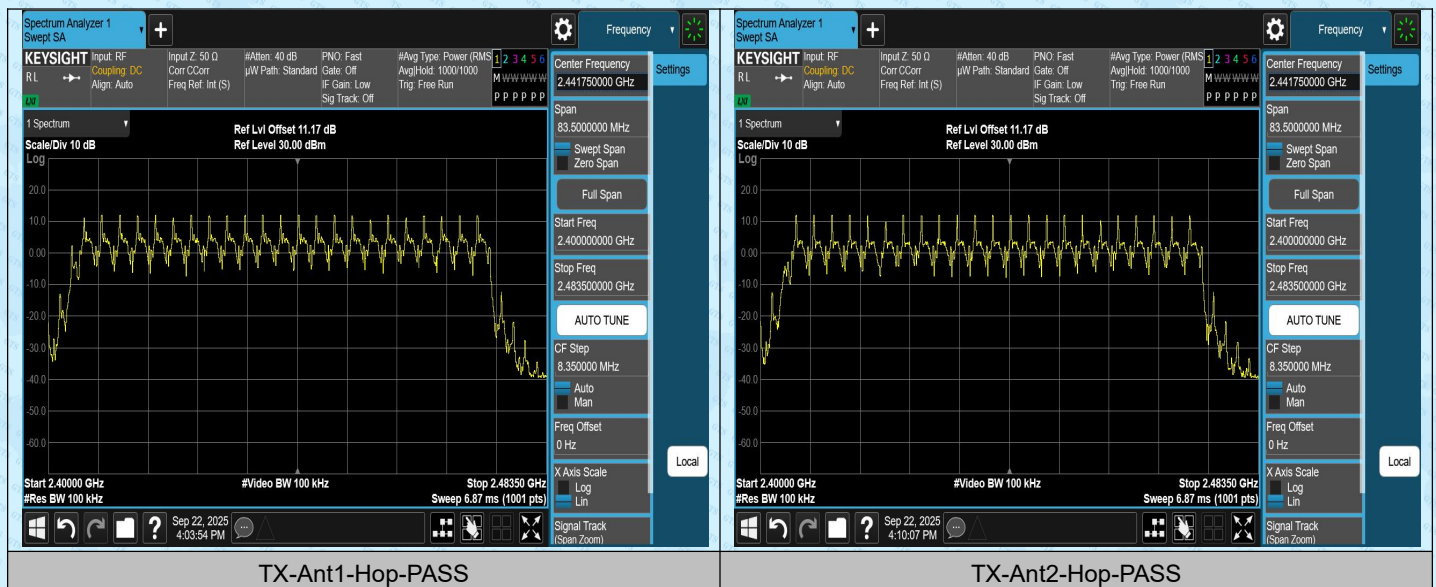


Appendix G: Band edge measurements

Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	Low	2406	11.26	-22.25	≤-8.74	PASS
TX	Ant2	Low	2406	11.33	-29.72	≤-8.67	PASS
TX	Ant1	High	2472	11.71	-40.39	≤-8.29	PASS
TX	Ant2	High	2472	7.57	-45.62	≤-12.43	PASS
TX	Ant1	Low	Hop_2406	3.67	-42.37	≤-16.33	PASS
TX	Ant2	Low	Hop_2406	3.66	-29	≤-16.34	PASS
TX	Ant1	High	Hop_2472	11.45	-47.31	≤-8.55	PASS
TX	Ant2	High	Hop_2472	4.27	-46.11	≤-15.73	PASS

Test Graphs

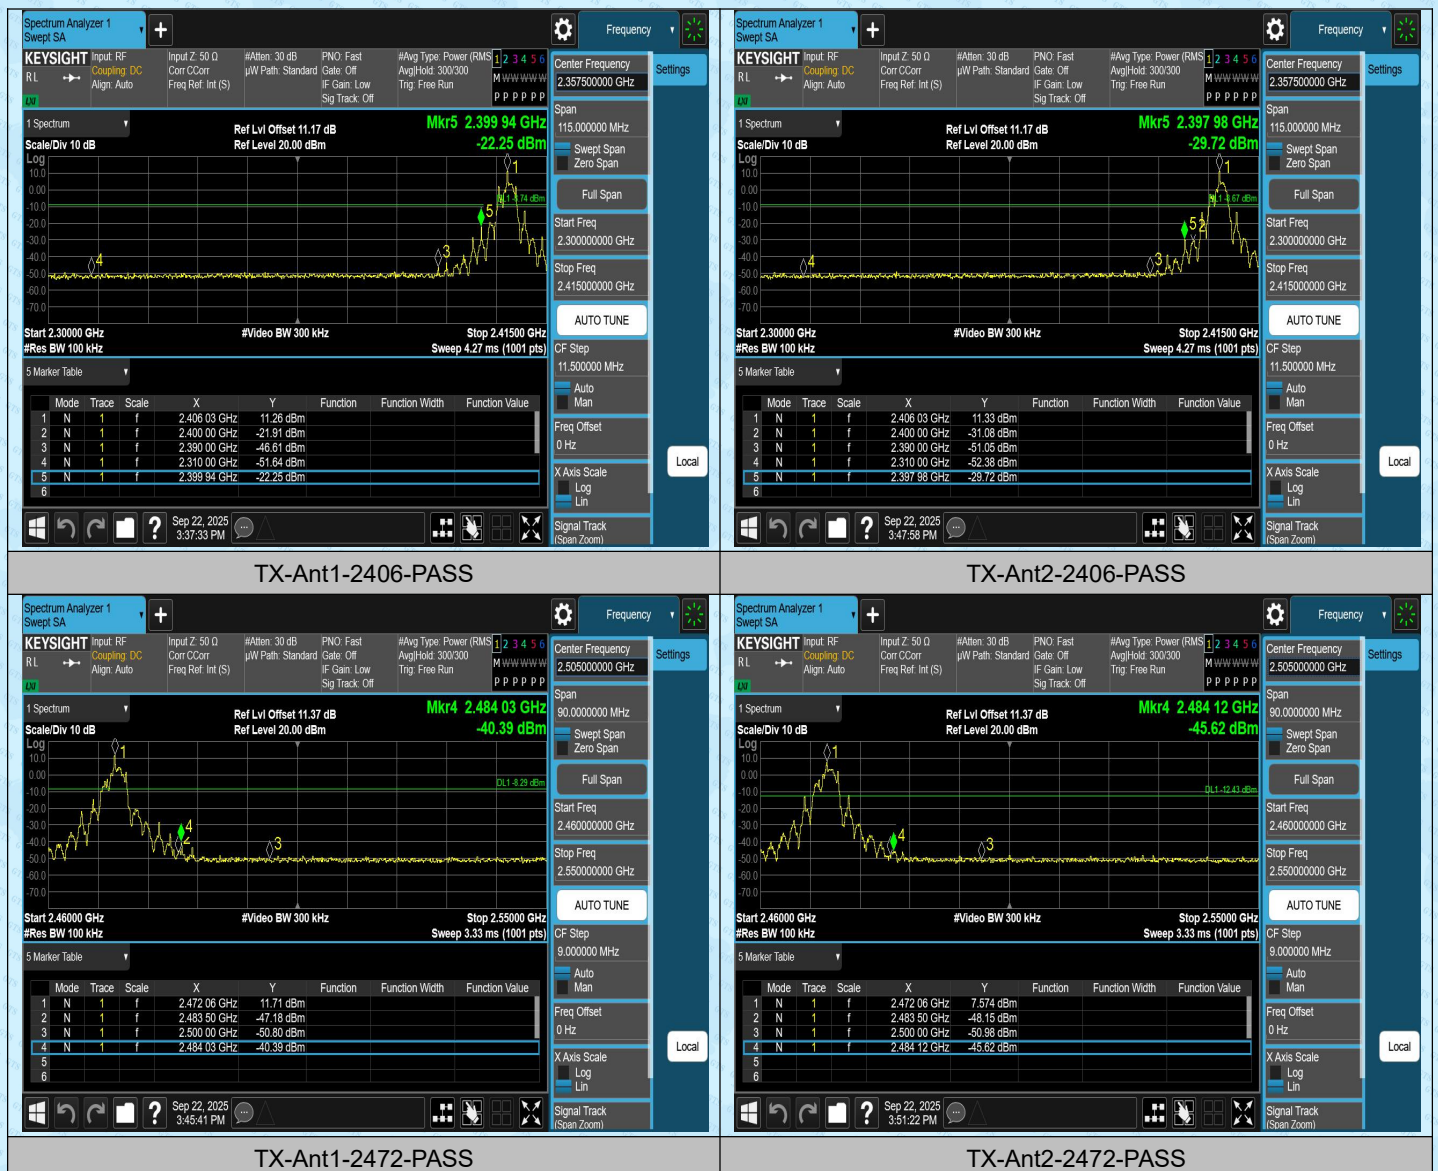




TX-Ant1-Hop_2406-PASS




TX-Ant1-Hop_2472-PASS

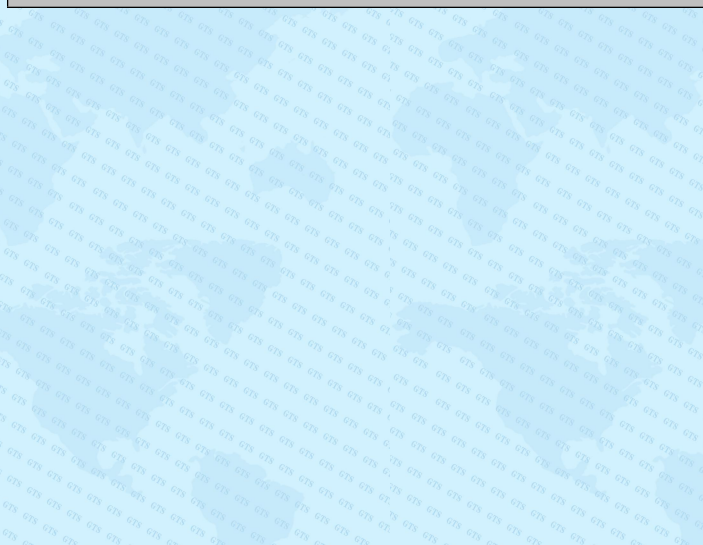

TX-Ant2-Hop_2406-PASS



TX-Ant2-Hop_2472-PASS

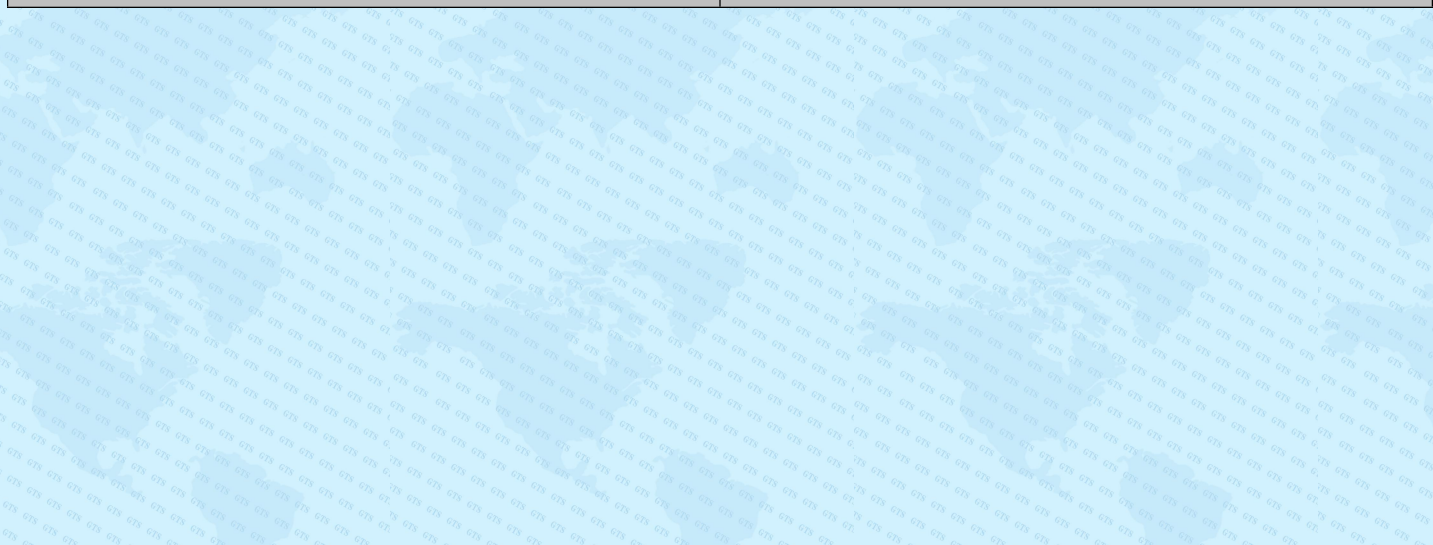


Appendix H: Conducted Spurious Emission

Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
TX	Ant1	2406	0~Reference	12.05	12.05	---	PASS
TX	Ant1	2406	30~1000	12.05	-62.48	≤-7.95	PASS
TX	Ant1	2406	1000~26500	12.05	-41.79	≤-7.95	PASS
TX	Ant2	2406	0~Reference	11.45	11.45	---	PASS
TX	Ant2	2406	30~1000	11.45	-62.48	≤-8.55	PASS
TX	Ant2	2406	1000~26500	11.45	-42.51	≤-8.55	PASS
TX	Ant1	2440	0~Reference	11.76	11.76	---	PASS
TX	Ant1	2440	30~1000	11.76	-62.52	≤-8.24	PASS
TX	Ant1	2440	1000~26500	11.76	-38.45	≤-8.24	PASS
TX	Ant2	2440	0~Reference	11.82	11.82	---	PASS
TX	Ant2	2440	30~1000	11.82	-62.37	≤-8.18	PASS
TX	Ant2	2440	1000~26500	11.82	-42.57	≤-8.18	PASS
TX	Ant1	2472	0~Reference	11.55	11.55	---	PASS
TX	Ant1	2472	30~1000	11.55	-62.19	≤-8.45	PASS
TX	Ant1	2472	1000~26500	11.55	-37.09	≤-8.45	PASS
TX	Ant2	2472	0~Reference	11.83	11.83	---	PASS
TX	Ant2	2472	30~1000	11.83	-62.12	≤-8.17	PASS
TX	Ant2	2472	1000~26500	11.83	-38.27	≤-8.17	PASS

Test Graphs

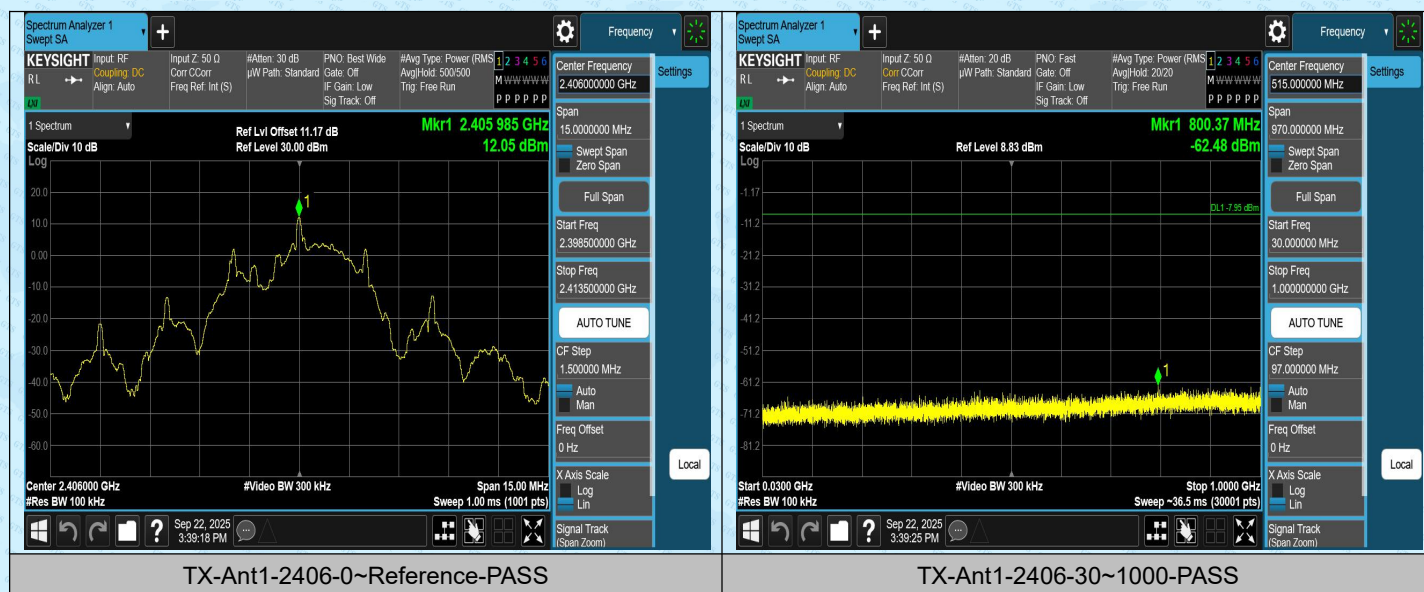




TX-Ant1-2406-1000~26500-PASS



TX-Ant2-2406-0~Reference-PASS

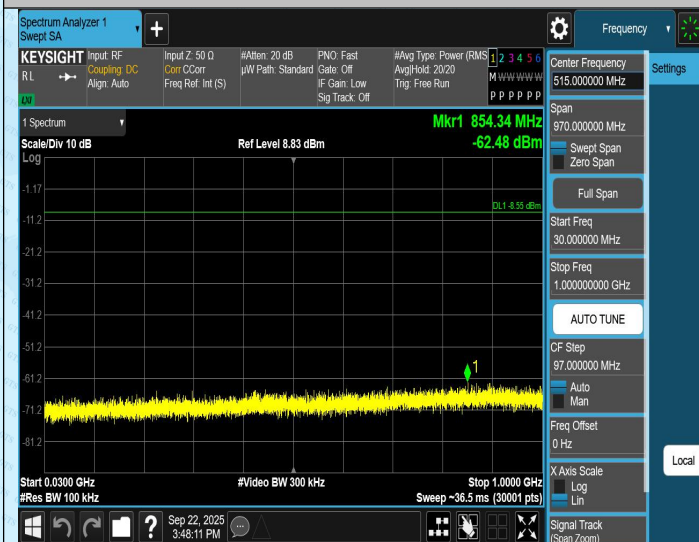


TX-Ant2-2406-30~1000-PASS



TX-Ant2-2406-1000~26500-PASS



TX-Ant1-2440-0~Reference-PASS

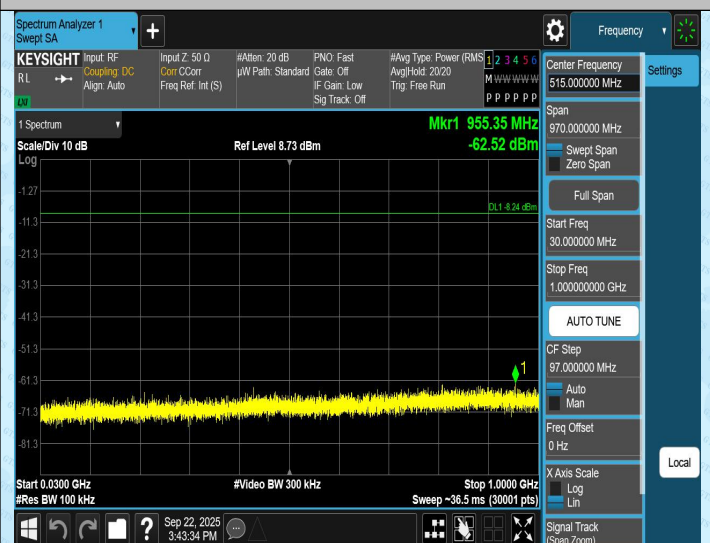


TX-Ant1-2440-30~1000-PASS



TX-Ant1-2440-1000~26500-PASS



TX-Ant2-2440-0~Reference-PASS

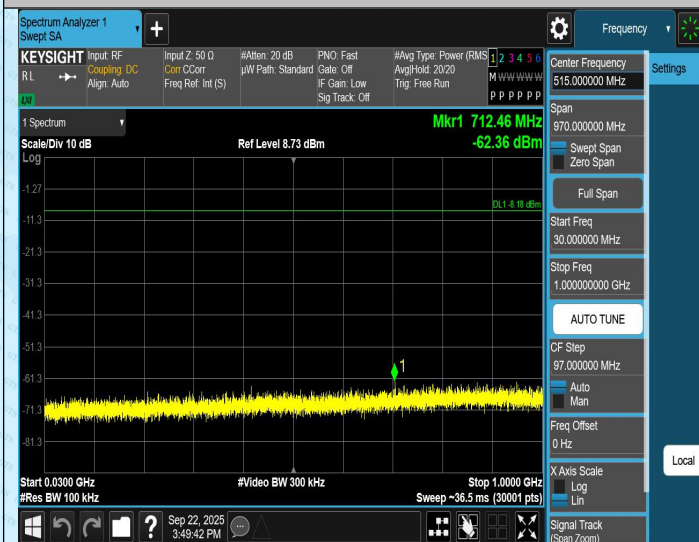


TX-Ant2-2440-30~1000-PASS



TX-Ant2-2440-1000~26500-PASS



TX-Ant1-2472-0~Reference-PASS

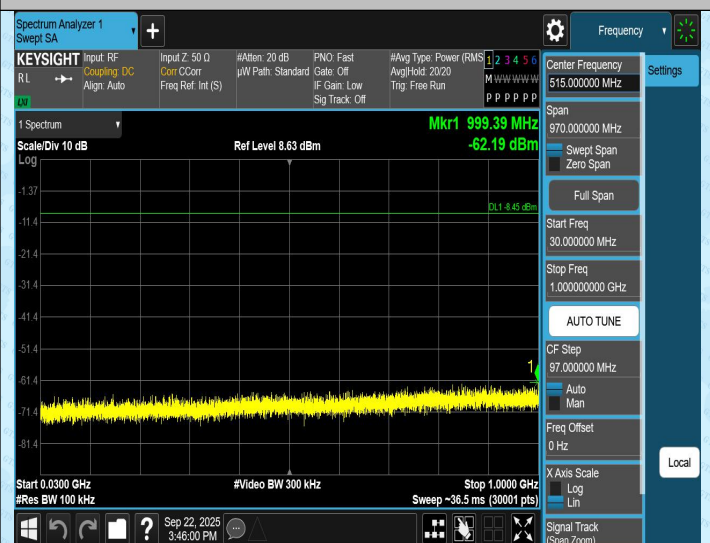


TX-Ant1-2472-30~1000-PASS



TX-Ant1-2472-1000~26500-PASS



TX-Ant2-2472-0~Reference-PASS

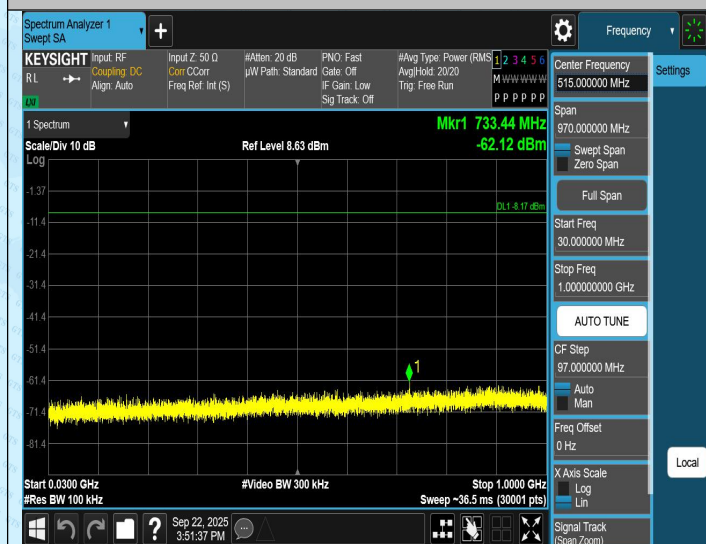

TX-Ant2-2472-30~1000-PASS



TX-Ant2-2472-1000~26500-PASS

Appendix I: Duty Cycle

Test Result

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
TX	Ant1	2406	3.93	18.81	20.89	---	---
TX	Ant2	2406	3.93	18.81	20.89	---	---
TX	Ant1	2440	3.93	18.81	20.89	---	---
TX	Ant2	2440	3.93	18.81	20.89	---	---
TX	Ant1	2472	3.90	18.81	20.73	---	---
TX	Ant2	2472	3.93	18.81	20.89	---	---

Test Graphs





NTNV-TX-Ant1-2472



NTNV-TX-Ant2-2472

---End---