


RF Test Data


Duty Cycle	2
Maximum Peak Conducted Output Power	4
-6dB Bandwidth	5
Occupied Channel Bandwidth	7
Maximum Power Spectral Density Level	9
Band Edge	11
Conducted RF Spurious Emission	13

Duty Cycle


TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2402	0.00	0.00	100
BLE_1M	Ant1	2440	0.00	0.00	100
BLE_1M	Ant1	2480	0.00	0.00	100
BLE_2M	Ant1	2402	0.00	0.00	100
BLE_2M	Ant1	2440	0.00	0.00	100
BLE_2M	Ant1	2480	0.00	0.00	100

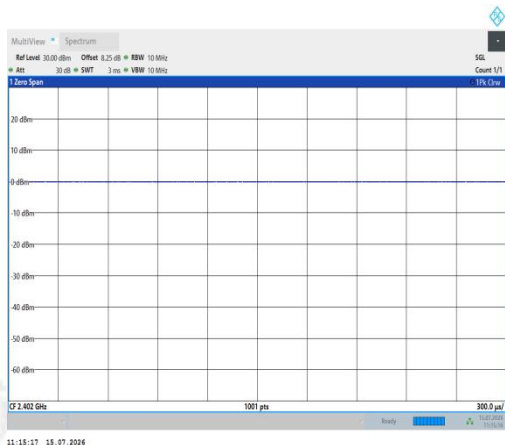


NTNV-BLE_1M-Ant1-2402

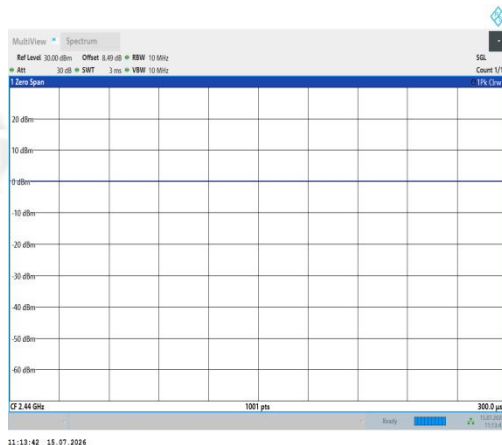


NTNV-BLE_1M-Ant1-2440

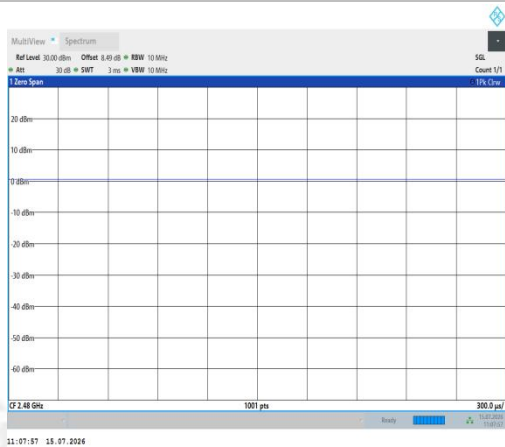


NTNV-BLE_1M-Ant1-2480

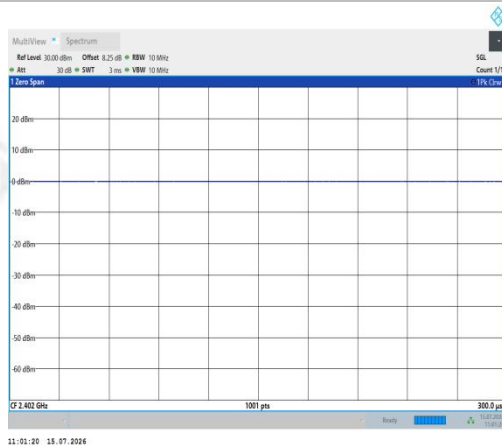

NTNV-BLE_2M-Ant1-2402

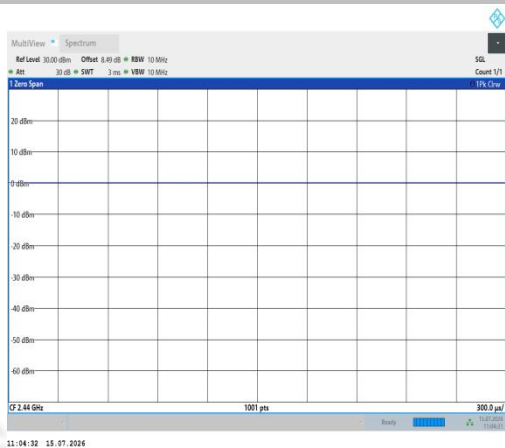

NTNV-BLE_2M-Ant1-2440

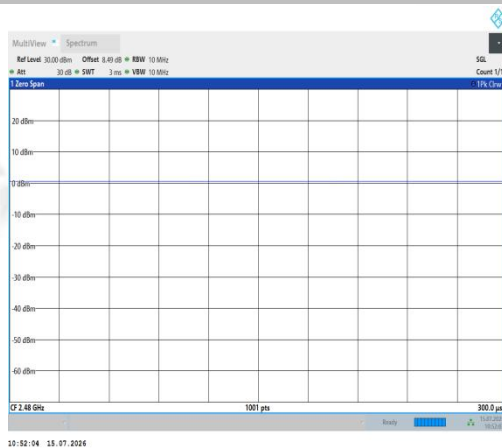


NTNV-BLE_2M-Ant1-2480

Maximum Peak Conducted Output Power

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Peak Power Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.10	≤30.00	PASS
BLE_1M	Ant1	2440	0.30	≤30.00	PASS
BLE_1M	Ant1	2480	0.62	≤30.00	PASS
BLE_2M	Ant1	2402	0.10	≤30.00	PASS
BLE_2M	Ant1	2440	0.31	≤30.00	PASS
BLE_2M	Ant1	2480	0.61	≤30.00	PASS


-6dB Bandwidth

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.85	2401.57	2402.42	0.5	PASS
BLE_1M	Ant1	2440	0.82	2439.58	2440.40	0.5	PASS
BLE_1M	Ant1	2480	0.83	2479.59	2480.42	0.5	PASS
BLE_2M	Ant1	2402	1.53	2401.28	2402.81	0.5	PASS
BLE_2M	Ant1	2440	1.39	2439.31	2440.70	0.5	PASS
BLE_2M	Ant1	2480	1.50	2479.29	2480.79	0.5	PASS

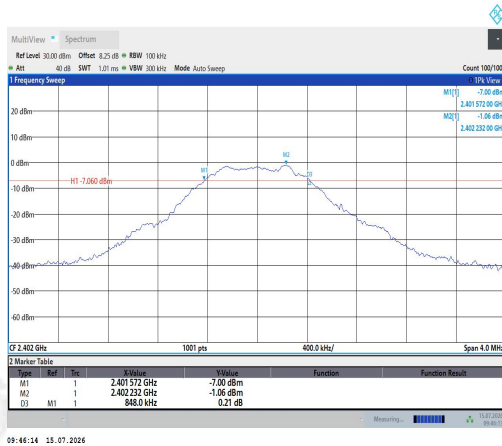


09:46:14 15.07.2026

BLE_1M-Ant1-2402-PASS

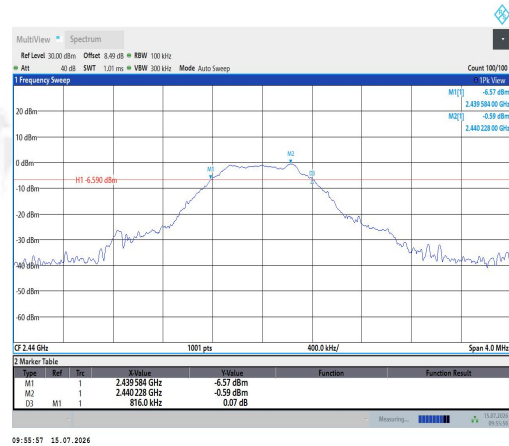


09:55:57 15.07.2026

BLE_1M-Ant1-2440-PASS

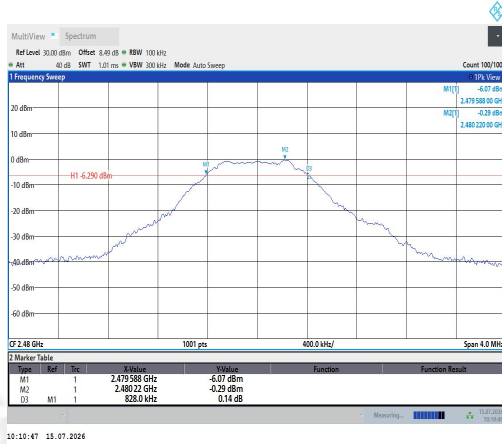


10:10:47 15.07.2026

BLE_1M-Ant1-2480-PASS

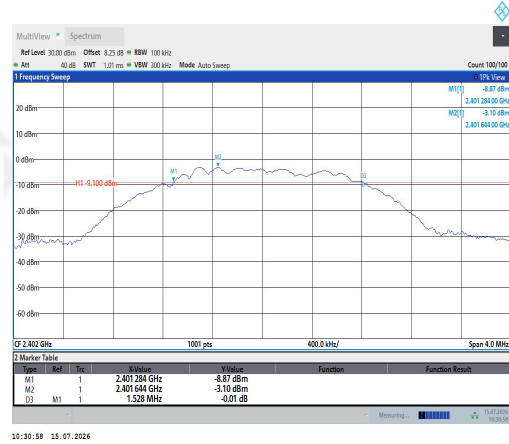


10:30:58 15.07.2026

BLE_2M-Ant1-2402-PASS

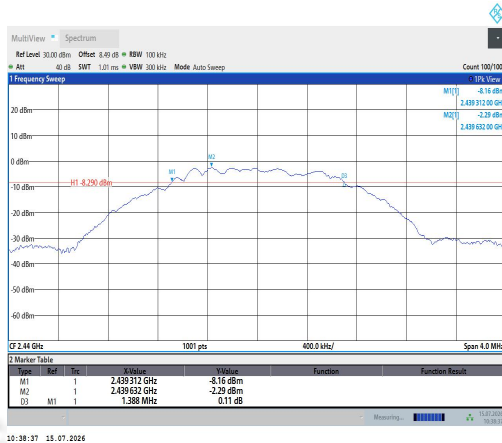

10:38:37 15.07.2026

BLE_2M-Ant1-2440-PASS

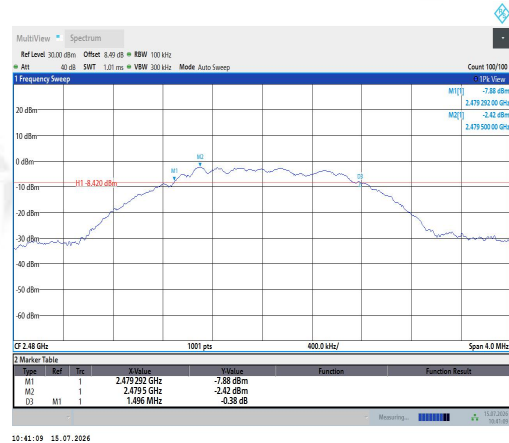


10:41:09 15.07.2026


BLE_2M-Ant1-2480-PASS

Occupied Channel Bandwidth


Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.314	2401.3680	2402.6819	---	---
BLE_1M	Ant1	2440	1.173	2439.4186	2440.5912	---	---
BLE_1M	Ant1	2480	1.228	2479.3994	2480.6273	---	---
BLE_2M	Ant1	2402	2.205	2400.8947	2403.1000	---	---
BLE_2M	Ant1	2440	2.104	2438.9472	2441.0512	---	---
BLE_2M	Ant1	2480	2.17	2478.9123	2481.0826	---	---

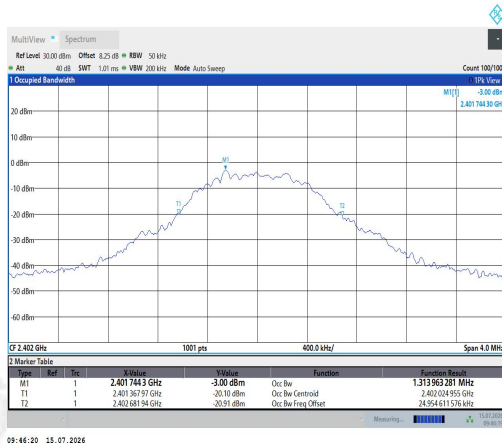


BLE_1M-Ant1-2402

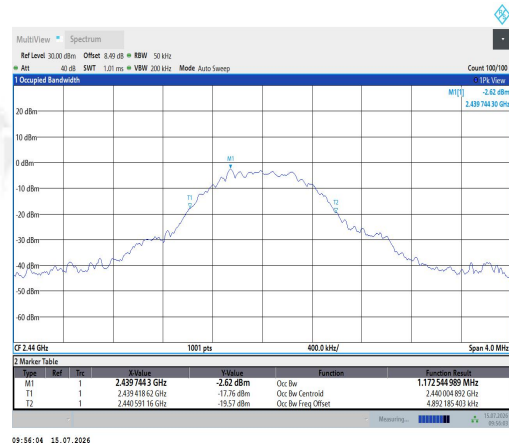


BLE_1M-Ant1-2440

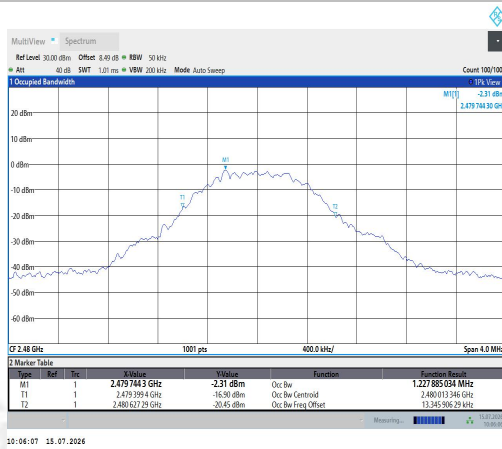


BLE_1M-Ant1-2480

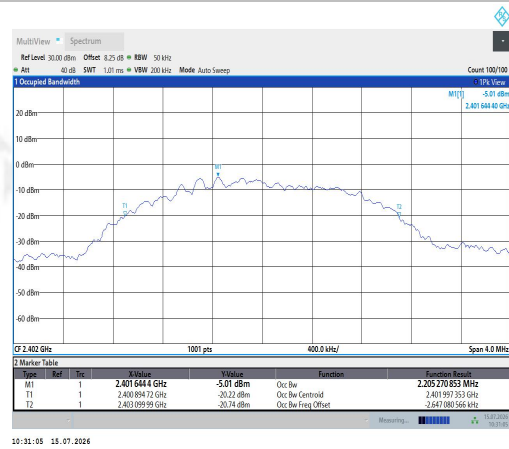

BLE_2M-Ant1-2402

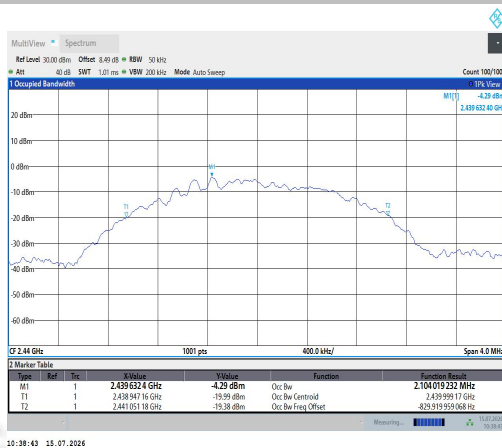


BLE_2M-Ant1-2440

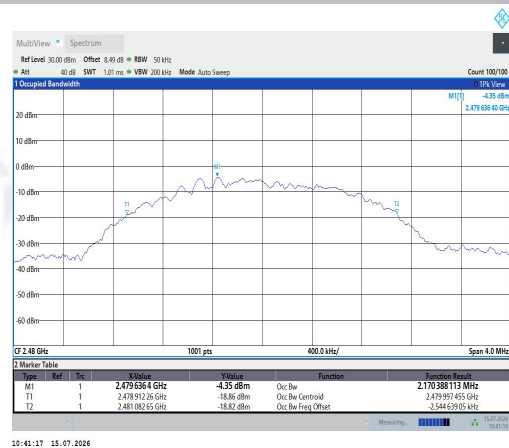


BLE_2M-Ant1-2480

Maximum Power Spectral Density Level


TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-17.24	≤8.00	PASS
BLE_1M	Ant1	2440	-17.02	≤8.00	PASS
BLE_1M	Ant1	2480	-15.42	≤8.00	PASS
BLE_2M	Ant1	2402	-20.39	≤8.00	PASS
BLE_2M	Ant1	2440	-20.47	≤8.00	PASS
BLE_2M	Ant1	2480	-20.22	≤8.00	PASS

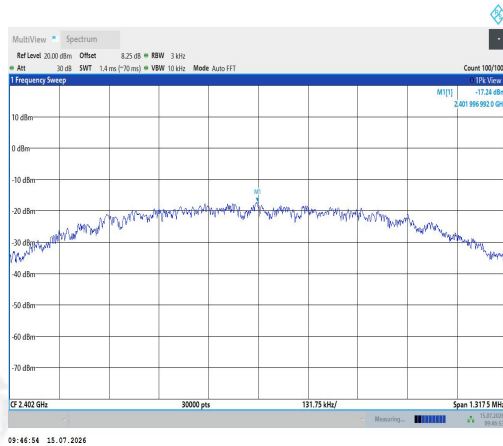


BLE_1M-Ant1-2402-PASS

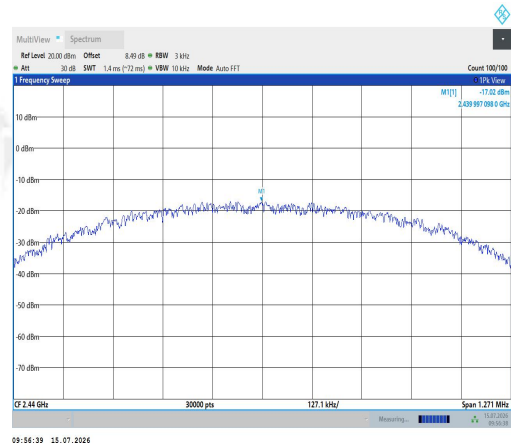


BLE_1M-Ant1-2440-PASS

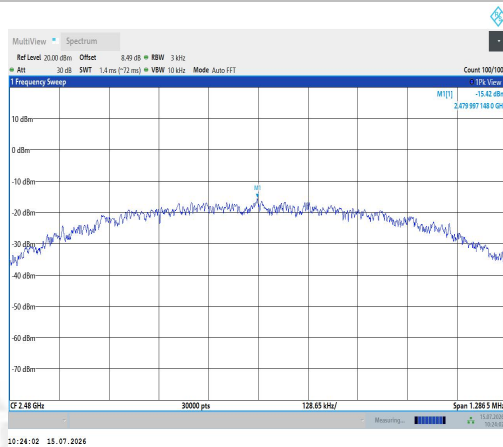


BLE_1M-Ant1-2480-PASS

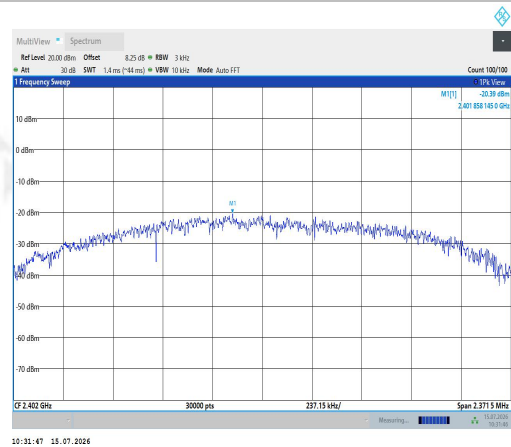

BLE_2M-Ant1-2402-PASS

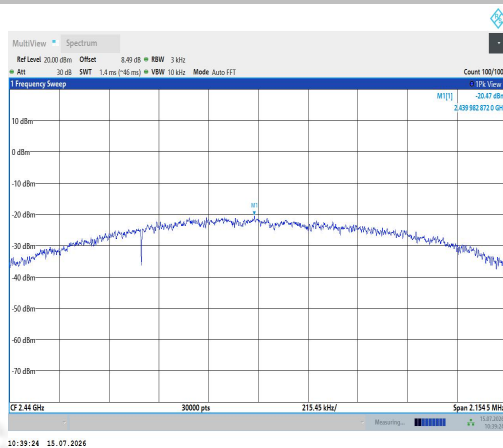


BLE_2M-Ant1-2440-PASS

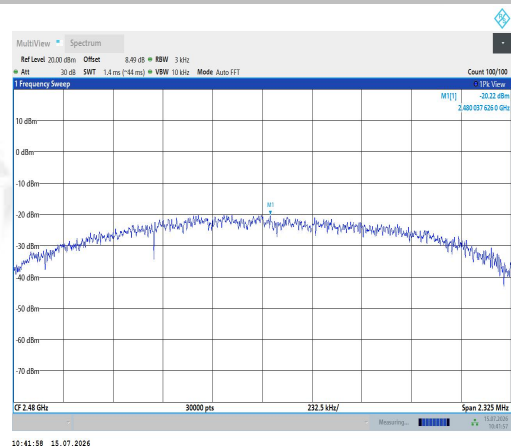


BLE_2M-Ant1-2480-PASS

Band Edge

TestMode	Antenna	ChName	Frequency[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-1.23	-43.14	≤ -21.23	PASS
BLE_1M	Ant1	High	2480	-0.49	-49.71	≤ -20.49	PASS
BLE_2M	Ant1	Low	2402	-3.19	-34.21	≤ -23.19	PASS
BLE_2M	Ant1	High	2480	-2.43	-48.66	≤ -22.43	PASS

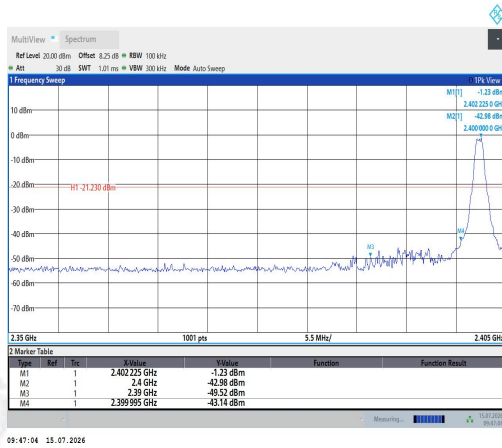


BLE_1M-Ant1-2402-PASS

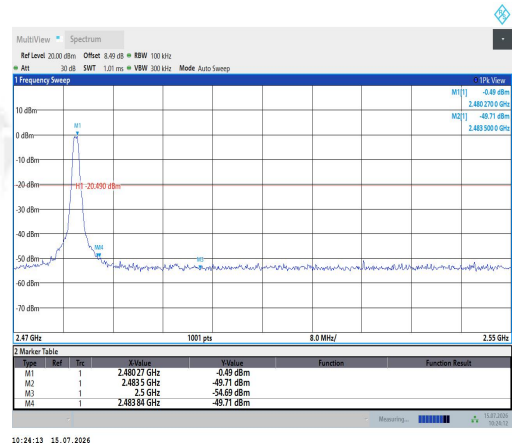

BLE_1M-Ant1-2480-PASS




BLE_2M-Ant1-2402-PASS

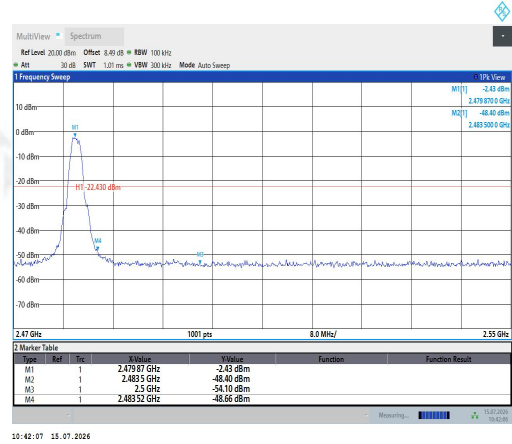


BLE_2M-Ant1-2480-PASS

Conducted RF Spurious Emission


TestMode	Antenna	Frequency[MHz]	Freq Range [Mhz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	-1.02	-1.02	---	PASS
BLE_1M	Ant1	2402	30~1000	-1.02	-62.79	≤-21.02	PASS
BLE_1M	Ant1	2402	1000~26500	-1.02	-37.68	≤-21.02	PASS
BLE_1M	Ant1	2440	0~Reference	-0.56	-0.56	---	PASS
BLE_1M	Ant1	2440	30~1000	-0.56	-62.53	≤-20.56	PASS
BLE_1M	Ant1	2440	1000~26500	-0.56	-36.46	≤-20.56	PASS
BLE_1M	Ant1	2480	0~Reference	-0.29	-0.29	---	PASS
BLE_1M	Ant1	2480	30~1000	-0.29	-62.28	≤-20.29	PASS
BLE_1M	Ant1	2480	1000~26500	-0.29	-35.88	≤-20.29	PASS
BLE_2M	Ant1	2402	0~Reference	-2.86	-2.86	---	PASS
BLE_2M	Ant1	2402	30~1000	-2.86	-62.65	≤-22.86	PASS
BLE_2M	Ant1	2402	1000~26500	-2.86	-39.58	≤-22.86	PASS
BLE_2M	Ant1	2440	0~Reference	-2.36	-2.36	---	PASS
BLE_2M	Ant1	2440	30~1000	-2.36	-62.46	≤-22.36	PASS
BLE_2M	Ant1	2440	1000~26500	-2.36	-39.62	≤-22.36	PASS
BLE_2M	Ant1	2480	0~Reference	-2.45	-2.45	---	PASS
BLE_2M	Ant1	2480	30~1000	-2.45	-62.55	≤-22.45	PASS
BLE_2M	Ant1	2480	1000~26500	-2.45	-36.22	≤-22.45	PASS

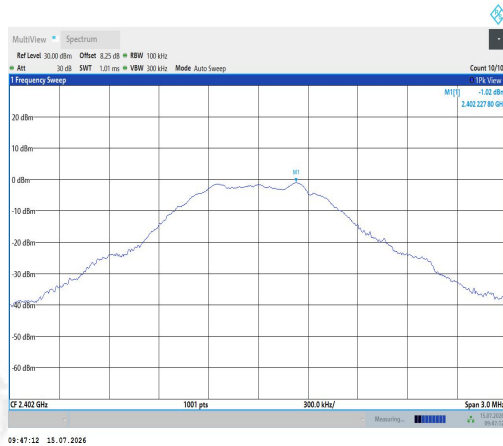


BLE_1M-Ant1-2402-0~Reference-PASS

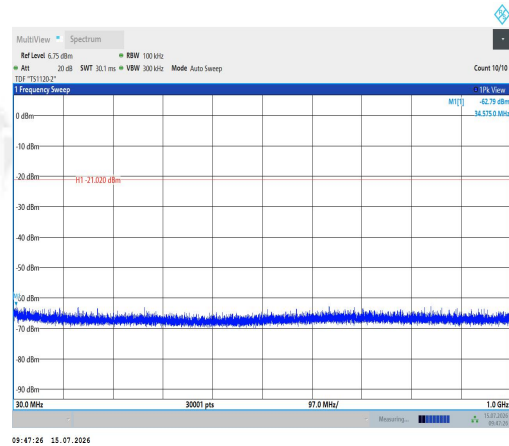


BLE_1M-Ant1-2402-30~1000-PASS

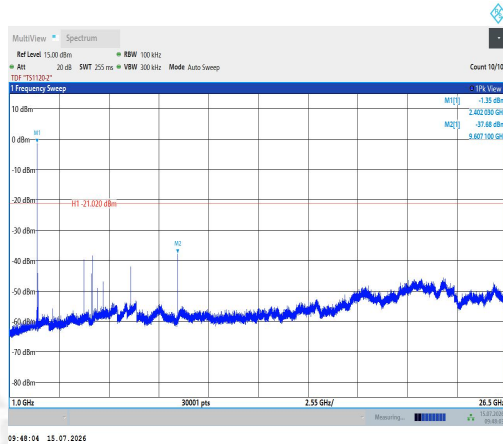


BLE_1M-Ant1-2402-1000~26500-PASS

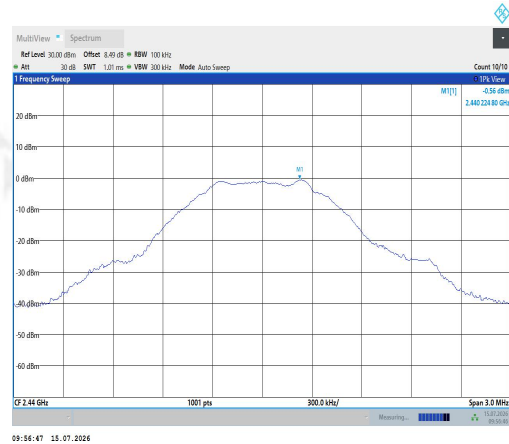


BLE_1M-Ant1-2440-0~Reference-PASS

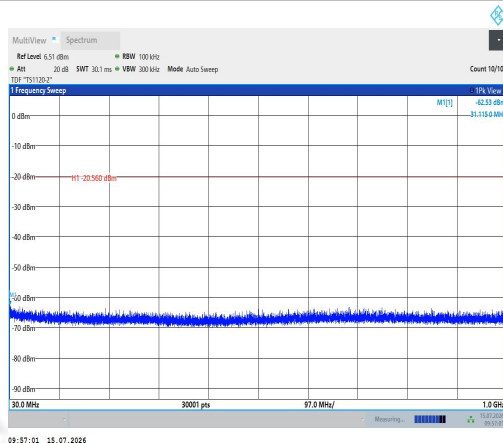


BLE_1M-Ant1-2440-30~1000-PASS

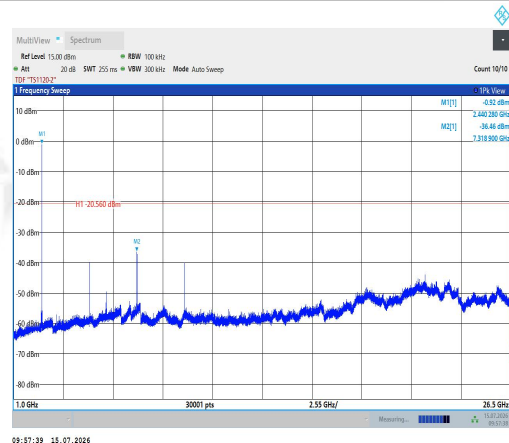


BLE_1M-Ant1-2440-1000~26500-PASS

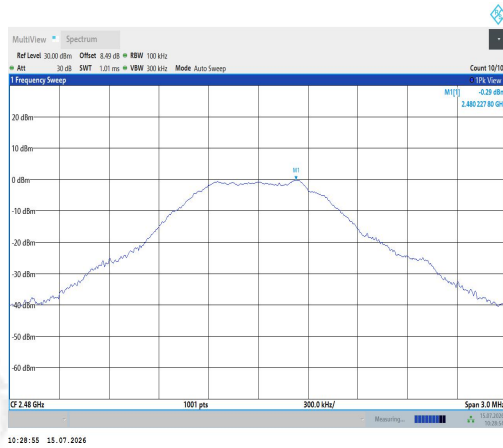


BLE_1M-Ant1-2480-0~Reference-PASS

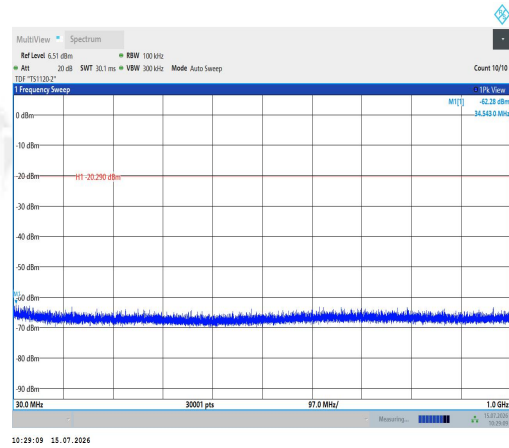


BLE_1M-Ant1-2480-30~1000-PASS

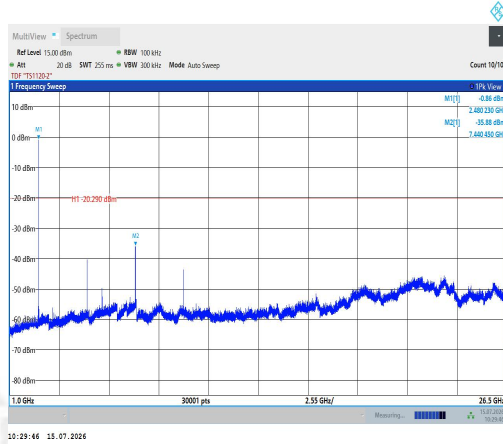


BLE_1M-Ant1-2480-1000~26500-PASS

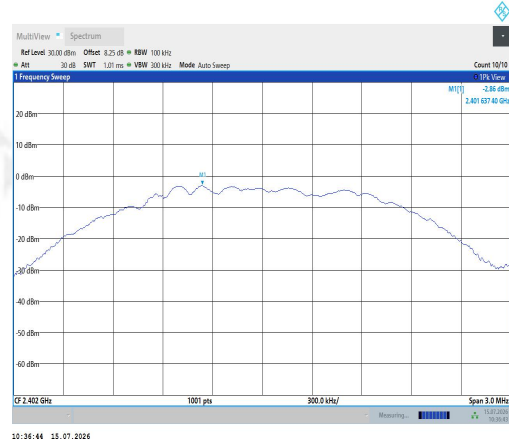


BLE_2M-Ant1-2402-0~Reference-PASS

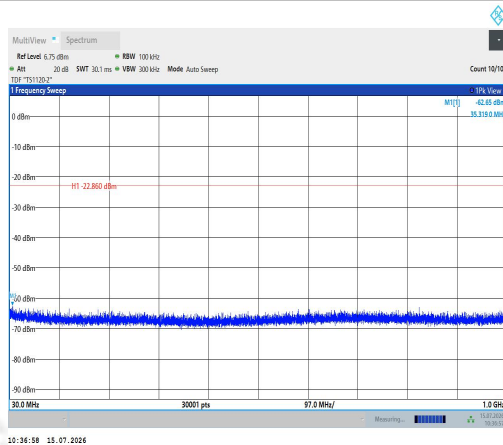


BLE_2M-Ant1-2402-30~1000-PASS

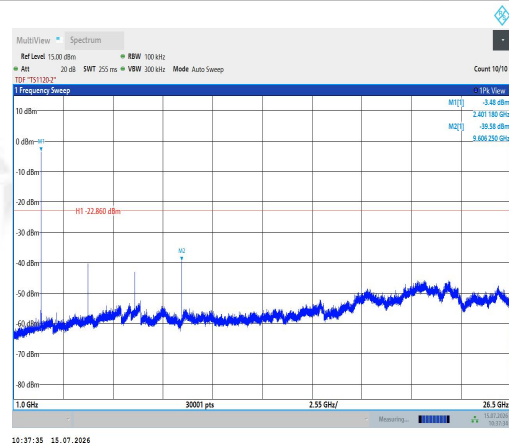


BLE_2M-Ant1-2402-1000~26500-PASS

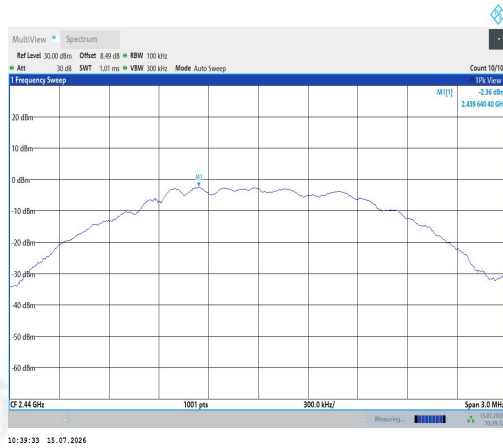


BLE_2M-Ant1-2440-0~Reference-PASS

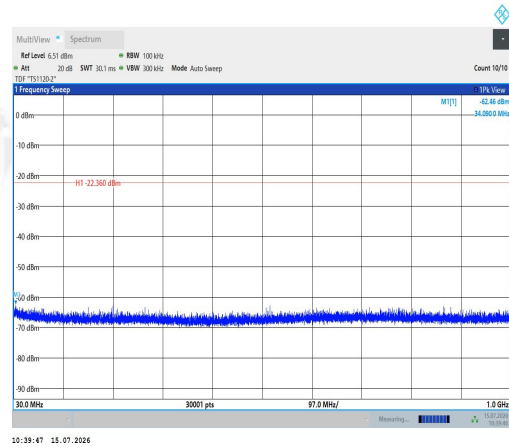


BLE_2M-Ant1-2440-30~1000-PASS

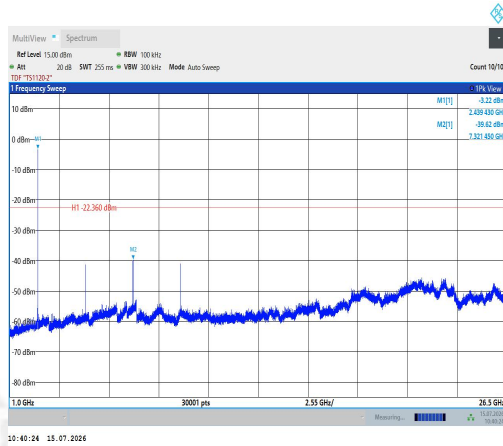


BLE_2M-Ant1-2440-1000~26500-PASS

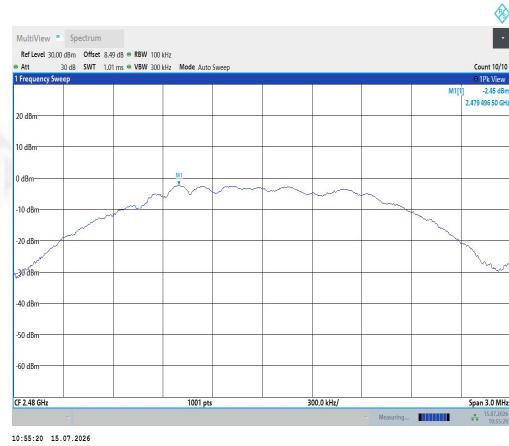

BLE_2M-Ant1-2480-0~Reference-PASS

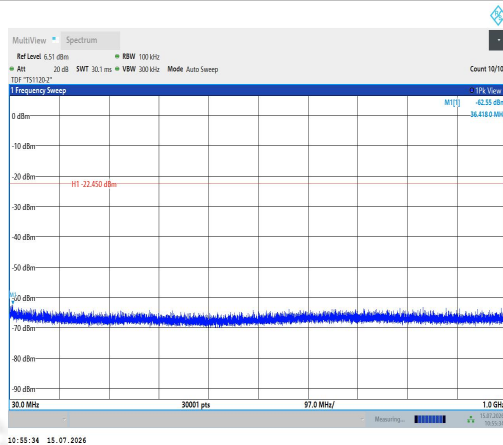

BLE_2M-Ant1-2480-30~1000-PASS

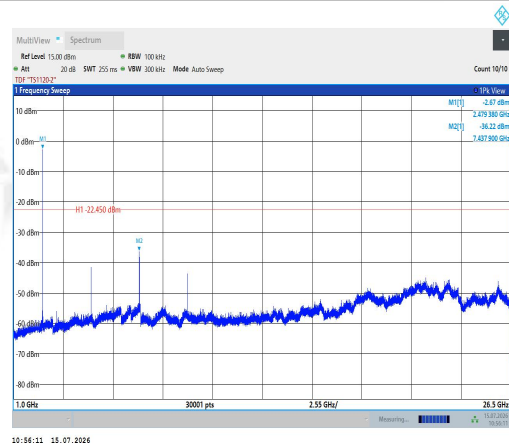

BLE_2M-Ant1-2480-1000~26500-PASS