

Product specification

Quick Reference Date


	Antenna module on the system board	
Frequenc Range	2400 ~ 2500GHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	60.2 %	
Gain (dBi)	-0.48 (Avg Gain XY-plane)	
Maximum Gain(dBi)	1.68(XZ-plane)	
Minimum Power (dBm)	-3.83(XZ-plane)	
Avg. Power (dBm)	-0.48(XY-plane)	
Input Impendence(ohm)	50	
Polarization Type	Vertical & Horizontal	
V. S .W. R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Name: Shenzhen Huasai Yongbang Technology

Address: 2nd–4th Floor, Building C, Jiwei Yusheng Industrial Park, Hangcheng Subdistrict, Bao'an District,
Shenzhen City, Guangdong Province

Antenna Layout & module on the system board

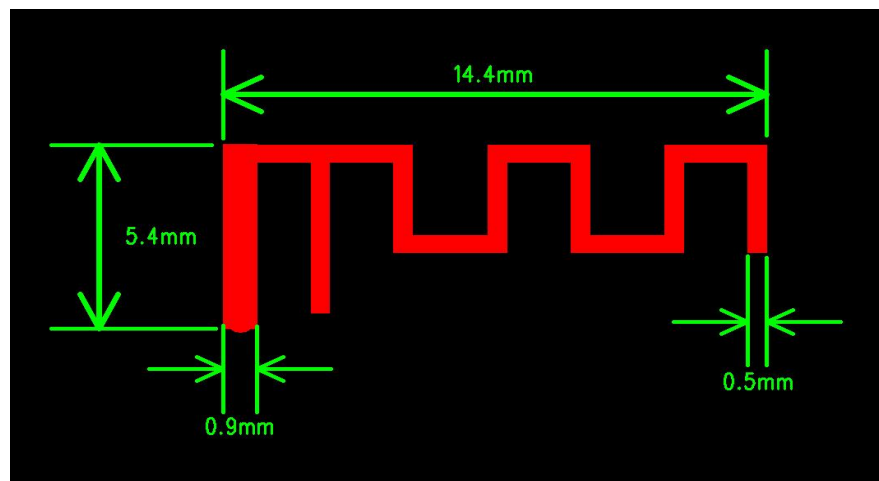

Antenna Gain


Gain Table

Unit in dBi @2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.35	-0.48	1.68	-3.83	1.11	-2.99	60.2 %

Return Loss




The Environment of Antenna Radiation Pattern

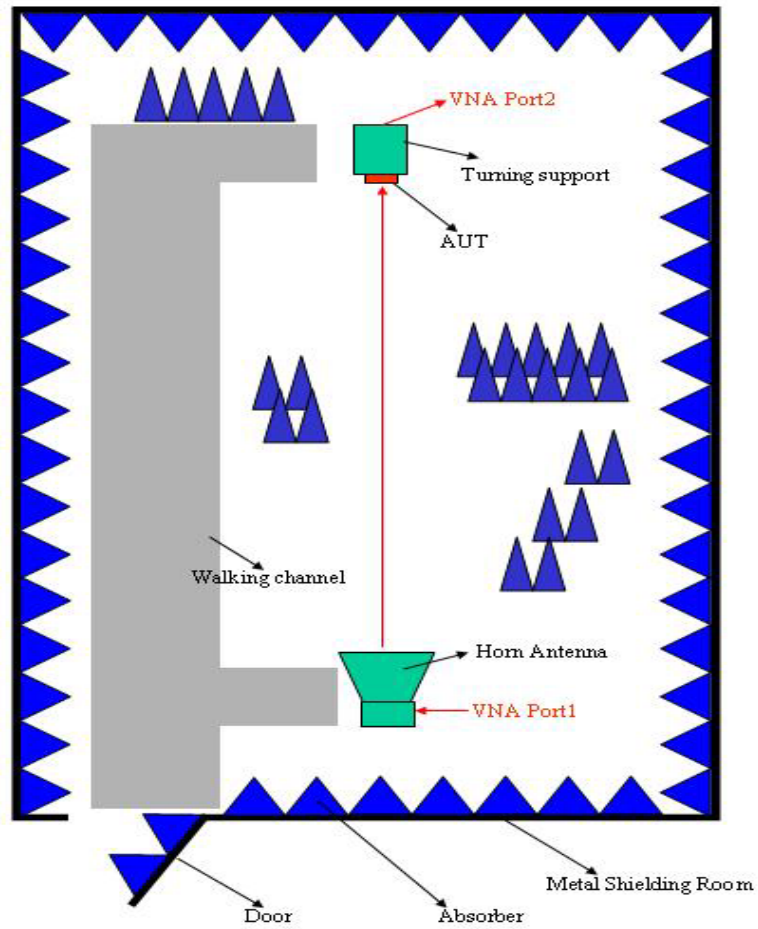


3D radiation pattern diagram



XY-plane

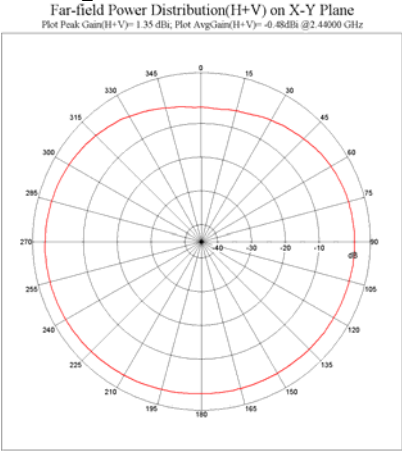

XZ-plane

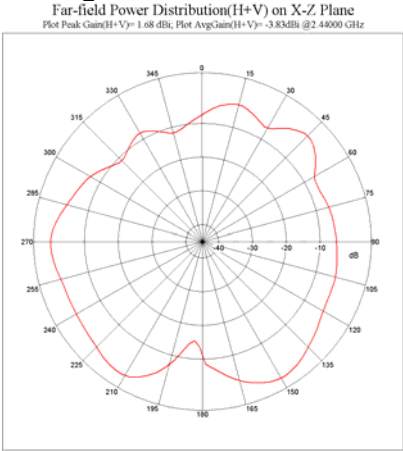

YZ-plane

