



FCC Radio Test Report

FCC ID: 2AOKI-WF8225U1

This report concerns: Original Grant

Project No. : 2601C218
Equipment : WIFI7 Module
Brand Name : AI-LINK
Model Name : WF8225-U1
Applicant : Sichuan AI-Link Technology Co.,Ltd.
Address : Anzhou Industrial Park, Mianyang, Sichuan, P.R.C
Manufacturer : Sichuan AI-Link Technology Co.,Ltd.
Address : Anzhou Industrial Park, Mianyang, Sichuan, P.R.C
Factory : Sichuan AI-Link Technology Co.,Ltd.
Address : Anzhou Industrial Park, Mianyang, Sichuan, P.R.C
Date of Receipt : Jan. 20, 2026
Date of Test : Jan. 22, 2026 ~ Mar. 05, 2026
Issued Date : Mar. 12, 2026
Test Sample : Engineering Sample No.: DG920260120293 for conducted,
DG920260120294 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by : 
Antony Liang

Approved by : 
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.
Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	14
3.3 PARAMETERS OF TEST SOFTWARE	16
3.4 DUTY CYCLE	18
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	20
3.6 SUPPORT UNITS	20
3.7 CUSTOMER INFORMATION DESCRIPTION	20
4 . AC POWER LINE CONDUCTED EMISSIONS	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	21
4.3 DEVIATION FROM TEST STANDARD	21
4.4 TEST SETUP	22
4.5 EUT OPERATION CONDITIONS	22
4.6 TEST RESULTS	22
5 . RADIATED EMISSIONS	23
5.1 LIMIT	23
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	26
5.4 TEST SETUP	26
5.5 EUT OPERATION CONDITIONS	28
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	28
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	28
5.8 TEST RESULTS - ABOVE 1000 MHZ	28
6 . BANDWIDTH	29
6.1 LIMIT	29

Table of Contents	Page
6.2 TEST PROCEDURE	29
6.3 DEVIATION FROM STANDARD	29
6.4 TEST SETUP	29
6.5 EUT OPERATION CONDITIONS	29
6.6 TEST RESULTS	29
7 . MAXIMUM E.I.R.P.	30
7.1 LIMIT	30
7.2 TEST PROCEDURE	30
7.3 DEVIATION FROM STANDARD	30
7.4 TEST SETUP	31
7.5 EUT OPERATION CONDITIONS	31
7.6 TEST RESULTS	31
8 . MAXIMUM POWER SPECTRAL DENSITY (E.I.R.P.)	32
8.1 LIMIT	32
8.2 TEST PROCEDURE	32
8.3 DEVIATION FROM STANDARD	32
8.4 TEST SETUP	33
8.5 EUT OPERATION CONDITIONS	33
8.6 TEST RESULTS	33
9 . IN-BAND EMISSION (MASK)	34
9.1 LIMIT	34
9.2 TEST PROCEDURE	35
9.3 DEVIATION FROM STANDARD	35
9.4 TEST SETUP	35
9.5 EUT OPERATION CONDITIONS	35
9.6 TEST RESULTS	35
10 . CONTENTION BASED PROTOCOL	36
10.1 LIMIT	36
10.2 TEST PROCEDURE	36
10.3 DEVIATION FROM STANDARD	37
10.4 TEST SETUP	38
10.5 EUT OPERATION CONDITIONS	38
10.6 TEST RESULTS	38
11 . FREQUENCY STABILITY	39

Table of Contents	Page
11.1 LIMIT	39
11.2 TEST PROCEDURE	39
11.3 DEVIATION FROM STANDARD	39
11.4 TEST SETUP	39
11.5 EUT OPERATION CONDITIONS	39
11.6 TEST RESULTS	39
12 . LIST OF MEASURING EQUIPMENTS	40
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	43
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	46
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	51
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	54
APPENDIX E - BANDWIDTH	121
APPENDIX F - MAXIMUM E.I.R.P.	162
APPENDIX G - MAXIMUM POWER SPECTRAL DENSITY (E.I.R.P.)	168
APPENDIX H - IN-BAND EMISSION (MASK)	191
APPENDIX I - CONTENTION BASED PROTOCOL	202
APPENDIX J - FREQUENCY STABILITY	225

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-6-2601C218	R00	Original Report.	Mar. 12, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 987594 D02 U-NII 6GHz EMC Measurement v03

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum e.i.r.p.	APPENDIX F	PASS	-----
15.407(a)	Maximum Power Spectral Density (e.i.r.p.)	APPENDIX G	PASS	-----
15.407(b)	In-Band Emission (Mask)	APPENDIX H	PASS	-----
15.407(d)	Contention Based Protocol	APPENDIX I	PASS	-----
15.407(g)	Frequency Stability	APPENDIX J	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

(3) Device Type:

☐ 6ID: Indoor access point

☐ 6PP: Subordinate device (operating under control of a low-power indoor access point)

☒ 6XD: Indoor client (operating under control of a low-power indoor access point)

☐ 6CD: Dual client (operating under control of either a low-power indoor access point or standard power access point)

☐ 6SD: Standard power access point

☐ 6FX: Standard client (operating under control of a Standard power access point)

☐ 6FC: Fixed client (operating under control of a Standard power access point)

(4) The report format version is TP.1.1.1.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For radiated emissions above 1GHz Items: Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For other Items: No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGGDCB01 (3m)	CISPR	30MHz ~ 1000MHz	3.88
		1GHz ~ 18GHz	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGGDCB01 (1m)	CISPR	18GHz ~ 40GHz	4.30

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.75 %
Maximum e.i.r.p.	1.3 dB
Maximum Power Spectral Density (e.i.r.p.)	1.8 dB
Frequency Stability	1.4 ppm
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C	52%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -9kHz to 30MHz	23°C	44%	DC 5V	Hayden Chen
Radiated Emissions -30MHz to 1000MHz	23°C	51%	DC 5V	Torin Long
Radiated Emissions -Above 1000 MHz	24°C	40%	DC 5V	Ilya Zhang
	26°C	44%	DC 5V	Ilya Zhang
	23°C	32%	DC 5V	Lafu Li
Bandwidth	23-24°C	42-46%	DC 5V	Kadin Wu
Maximum e.i.r.p.	24°C	59%	DC 5V	Arvin Tong
Maximum Power Spectral Density (e.i.r.p.)	23-24°C	42-46%	DC 5V	Kadin Wu
In-Band Emission (Mask)	23-24°C	42-46%	DC 5V	Kadin Wu
Contention Based Protocol	23-25°C	36-38%	DC 5V	Kadin Wu
Frequency Stability	Normal & Extreme	42-46%	Normal & Extreme	Kadin Wu

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WIFI7 Module
Brand Name	AI-LINK
Test Model	WF8225-U1
Model Name	WF8225-U1
Model Difference(s)	N/A
Hardware Version	V20
Software Version	1816
Power Source	DC Voltage supplied from External Power Supply.
Power Rating	DC 5V/2A
Frequency Range	U-NII 5: 5925 MHz ~ 6425 MHz U-NII 6: 6425 MHz ~ 6525 MHz U-NII 7: 6525 MHz ~ 6875 MHz U-NII 8: 6875 MHz ~ 7125 MHz
Operation Frequency	UNII-5: 5955 MHz ~ 6415 MHz UNII-6: 6425 MHz ~ 6515 MHz UNII-7: 6525 MHz ~ 6875 MHz UNII-8: 6895 MHz ~ 7115 MHz
Modulation Technology	IEEE 802.11a: OFDM IEEE 802.11ax/be: OFDMA
Transfer Rate	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11ax: up to 2402 Mbps IEEE 802.11be: up to 2882 Mbps
Maximum e.i.r.p. UNII-5	IEEE 802.11be(EHT160): 14.37 dBm (0.0274 W)
Maximum e.i.r.p. UNII-6	IEEE 802.11be(EHT160): 14.21 dBm (0.0264 W)
Maximum e.i.r.p. UNII-7	IEEE 802.11be(EHT160): 14.97 dBm (0.0314 W)
Maximum e.i.r.p. UNII-8	IEEE 802.11be(EHT160): 15.52 dBm (0.0356 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

UNII-5							
IEEE 802.11a IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	3	5965	7	5985	15	6025
5	5975	11	6005	23	6065	47	6185
9	5995	19	6045	39	6145	79	6345
13	6015	27	6085	55	6225		
17	6035	35	6125	71	6305		
21	6055	43	6165	87	6385		
25	6075	51	6205				
29	6095	59	6245				
33	6115	67	6285				
37	6135	75	6325				
41	6155	83	6365				
45	6175	91	6405				
49	6195						
53	6215						
57	6235						
61	6255						
65	6275						
69	6295						
73	6315						
77	6335						
81	6355						
85	6375						
89	6395						
93	6415						

UNII-6							
IEEE 802.11a IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	99	6445	103	6465	111	6505
101	6455	107	6485				
105	6475	115	6525				
109	6495						
113	6515						

UNII-7							
IEEE 802.11a IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	123	6565	119	6545	143	6665
121	6555	131	6605	135	6625	175	6825
125	6575	139	6645	151	6705		
129	6595	147	6685	167	6785		
133	6615	155	6725	183	6865		
137	6635	163	6765				
141	6655	171	6805				
145	6675	179	6845				
149	6695						
153	6715						
157	6735						
161	6755						
165	6775						
169	6795						
173	6815						
177	6835						
181	6855						

UNII-8							
IEEE 802.11a IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
185	6875	187	6885	199	6945	207	6985
189	6895	195	6925	215	7025		
193	6915	203	6965				
197	6935	211	7005				
201	6955	219	7045				
205	6975	227	7085				
209	6995						
213	7015						
217	7035						
221	7055						
225	7075						
229	7095						
233	7115						

3. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	Hanyang Antenna Design Co., Ltd.	7925	PCB	N/A	2.41
2	Hanyang Antenna Design Co., Ltd.	7925	PCB	N/A	3.21

Note:

- This EUT supports CDD, and Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=3.21.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 3.21 + 10\log(2/1)\text{dBi} = 6.22$.
- Beamforming Gain: 3 dB.

4. Operating Mode and Antenna Configuration:

For Non Beamforming:

Operating Mode \ TX Mode	2TX
IEEE 802.11a	V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE20)	V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE40)	V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE80)	V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE160)	V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT20)	V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT40)	V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT80)	V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT160)	V (Ant. 1+Ant. 2)

For Beamforming:

Operating Mode \ TX Mode	2TX
IEEE 802.11ax(HE20)	V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE40)	V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE80)	V (Ant. 1+Ant. 2)
IEEE 802.11ax(HE160)	V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT20)	V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT40)	V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT80)	V (Ant. 1+Ant. 2)
IEEE 802.11be(EHT160)	V (Ant. 1+Ant. 2)

3.2 TEST MODES

Test Items	Test Mode	Channel	Note
AC Power Line Conducted Emissions	IEEE 802.11be(EHT160)	207	-
Radiated Emissions-9kHz to 30MHz	IEEE 802.11be(EHT160)	207	-
Radiated Emissions-30MHz to 1000MHz	IEEE 802.11be(EHT160)	207	-
Radiated Emissions-Above 1000 MHz	IEEE 802.11a IEEE 802.11be(EHT20)	1,233	Bandedge
	IEEE 802.11be(EHT40)	3,227	
	IEEE 802.11be(EHT80)	7,215	
	IEEE 802.11be(EHT160)	15,207	
	IEEE 802.11a IEEE 802.11be(EHT20)	1/45/93, 97/105/113, 117/149/181, 185/209/233	Harmonic
	IEEE 802.11be(EHT40)	3/43/91, 99/107/115, 123/155/179, 187/211/227	
	IEEE 802.11be(EHT80)	7/39/87, 103, 119/151/183, 199/215	
	IEEE 802.11be(EHT160)	15/47/79, 111, 143/175, 207	
Bandwidth. & Maximum e.i.r.p. & Maximum Power Spectral Density(e.i.r.p.) & In - Band Emission(Mask)	IEEE 802.11a IEEE 802.11be(EHT20)	1/45/93, 97/105/113, 117/149/181, 185/209/233	-
	IEEE 802.11be(EHT40)	3/43/91, 99/107/115, 123/155/179, 187/211/227	
	IEEE 802.11be(EHT80)	7/39/87, 103, 119/151/183, 199/215	
	IEEE 802.11be(EHT160)	15/47/79, 111, 143/175, 207	
Contention Based Protocol	IEEE 802.11be(EHT20)	33, 97, 117, 189	-
	IEEE 802.11be(EHT160)	47, 111, 143, 207	
Frequency Stability	IEEE 802.11a	1,97,117,189	-

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11be(EHT160) channel 207 is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) EHT20/EHT40/EHT80/EHT160 covers HE20/HE40/HE80/HE160, due to same modulation (in full RU). The power setting for 802.11ax HE20/HE40/HE80/HE160 are the same or lower than 802.11be EHT20/EHT40/EHT80/EHT160.
- (6) For Beamforming operation, the manufacturer automatically reduces power based on a factor calculated as the difference between the beamforming directional gain and the CDD directional power gain. Thus, only the CDD mode was evaluated in this report.
- (7) IEEE 802.11ax mode and IEEE 802.11be mode only support full RU and non support channel puncturing, so only the full RU is evaluated and measured inside report.
- (8) For radiated emission 1 GHz - 18GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Horizontal and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-5			
Test Software Version	QAtool_V14		
Frequency (MHz)	5955	6175	6415
IEEE 802.11a	-1	-4	-2
IEEE 802.11be(EHT20)	-1.5	-3.5	-2
Frequency (MHz)	5965	6165	6405
IEEE 802.11be(EHT40)	1.5	-1	1
Frequency (MHz)	5985	6145	6385
IEEE 802.11be(EHT80)	4	2.5	4
Frequency (MHz)	6025	6185	6345
IEEE 802.11be(EHT160)	6.5	6.5	6.5

UNII-6			
Test Software Version	QAtool_V14		
Frequency (MHz)	6435	6475	6515
IEEE 802.11a	-2	-2	-2
IEEE 802.11be(EHT20)	-1.5	-1.5	-2
Frequency (MHz)	6445	6485	6525
IEEE 802.11be(EHT40)	1.5	1.5	1.5
Frequency (MHz)	6465		
IEEE 802.11be(EHT80)	4		
Frequency (MHz)	6505		
IEEE 802.11be(EHT160)	7		


UNII-7			
Test Software Version	QAtool_V14		
Frequency (MHz)	6535	6695	6855
IEEE 802.11a	-2.5	-2.5	-1.5
IEEE 802.11be(EHT20)	-2	-2.5	-1.5
Frequency (MHz)	6565	6725	6845
IEEE 802.11be(EHT40)	1.5	1	1.5
Frequency (MHz)	6545	6705	6865
IEEE 802.11be(EHT80)	4	4	4
Frequency (MHz)	6665	6825	
IEEE 802.11be(EHT160)	7	7.5	


UNII-8			
Test Software Version	QAtool_V14		
Frequency (MHz)	6875	6995	7115
IEEE 802.11a	-1.5	0.5	0
IEEE 802.11be(EHT20)	-1	1	-5
Frequency (MHz)	6885	7005	7085
IEEE 802.11be(EHT40)	2	3.5	3
Frequency (MHz)	6945	7025	
IEEE 802.11be(EHT80)	5.5	5.5	
Frequency (MHz)	6985		
IEEE 802.11be(EHT160)	8.5		

3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.


Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)	1/On Time (B)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)	1/B Minimum VBW (kHz)
IEEE 802.11a	2.022	1	2.022	2.509	80.59%	0.94	0.495
IEEE 802.11be(EHT20)	4.079	1	4.079	4.564	89.37%	0.49	0.245
IEEE 802.11be(EHT40)	4.065	1	4.065	4.558	89.18%	0.50	0.246
IEEE 802.11be(EHT80)	4.062	1	4.062	4.558	89.12%	0.50	0.246
IEEE 802.11be(EHT160)	4.079	1	4.079	4.564	89.37%	0.49	0.245

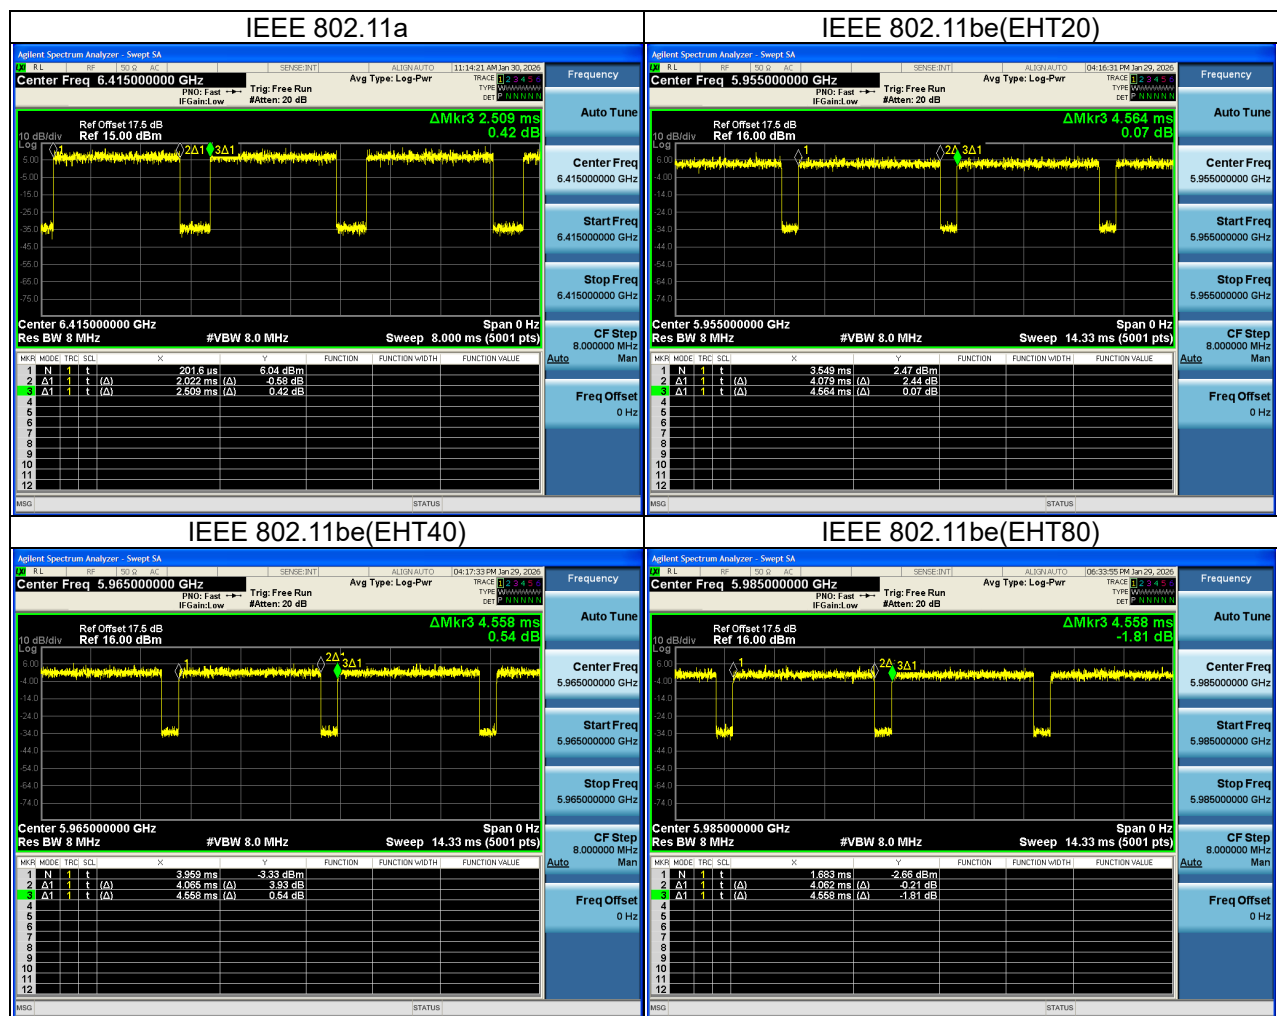

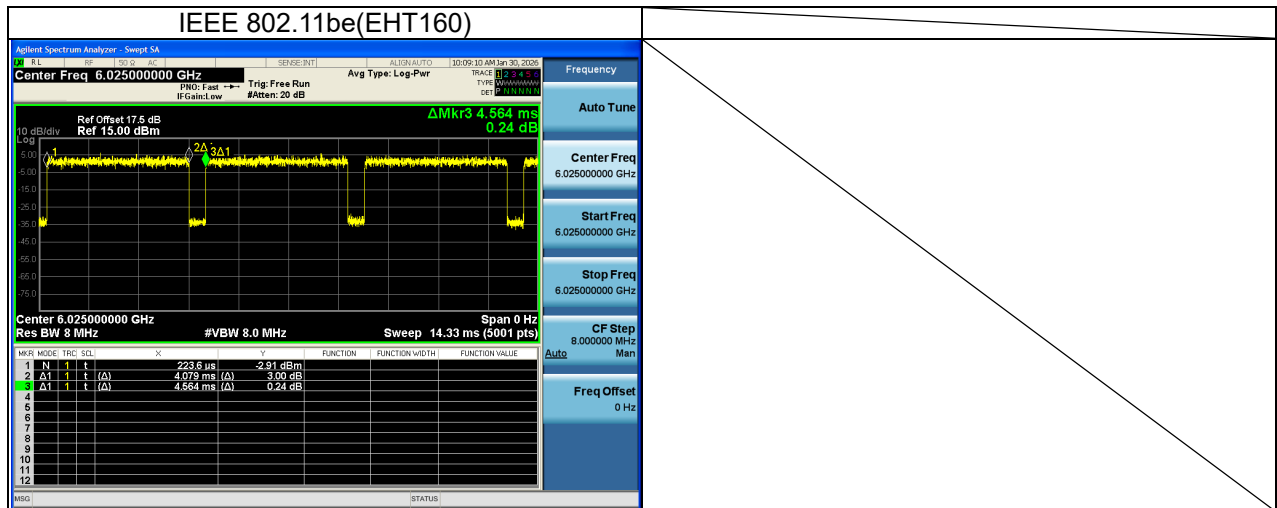

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 3.6.

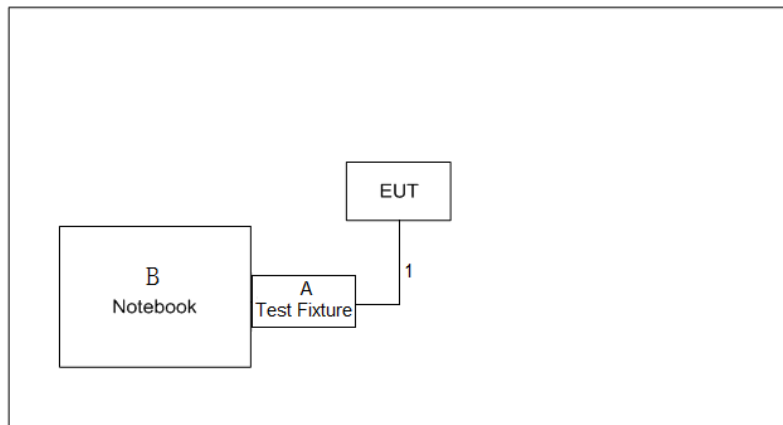

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Test Fixture	N/A	N/A	N/A
B	Notebook	HP	HP ProBook 450	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	Data Cable	NO	NO	0.1m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

4.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

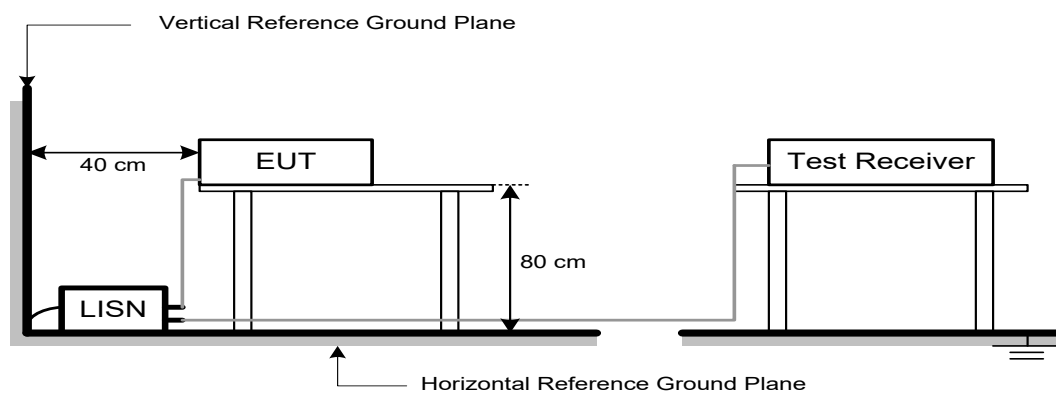

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

According to 15.407(b)(6) the limits are as follows:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz) AND UNWANTED EMISSION WITHIN THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Maximum field strength Limit at 3m (dBμV/m)	Maximum field strength Limit at 1m (dBμV/m)
5925-7125	Average: -27	68.2	77.7 (Note 2)

NOTE:

(1) e.i.r.p. Limit (dBμV/m at 3m) = Power Limit(dBm) + 95.2. (Referring to FCC KDB 987594 D02, clause G.2.d)(iii))

(2)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain (if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
21.22	-	68.2	=	-46.98

5.2 TEST PROCEDURE

For measurements below 30 MHz:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

For measurements 30 MHz to 40 GHz:

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(30MHz to 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (30MHz to 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

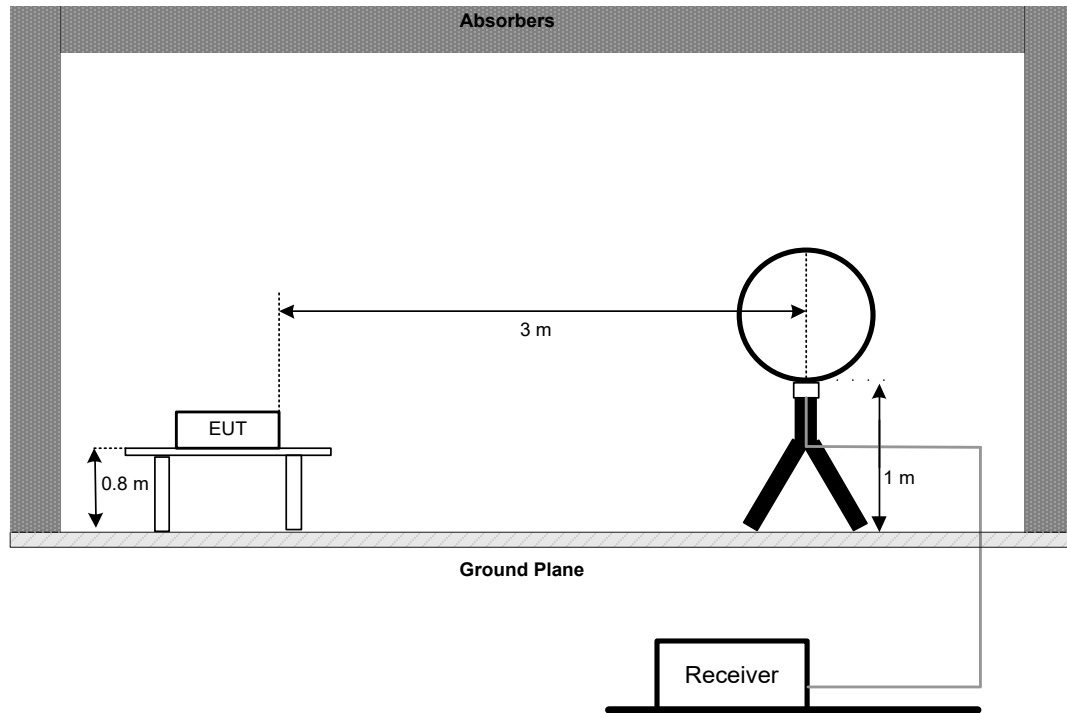


30 MHz to 1 GHz

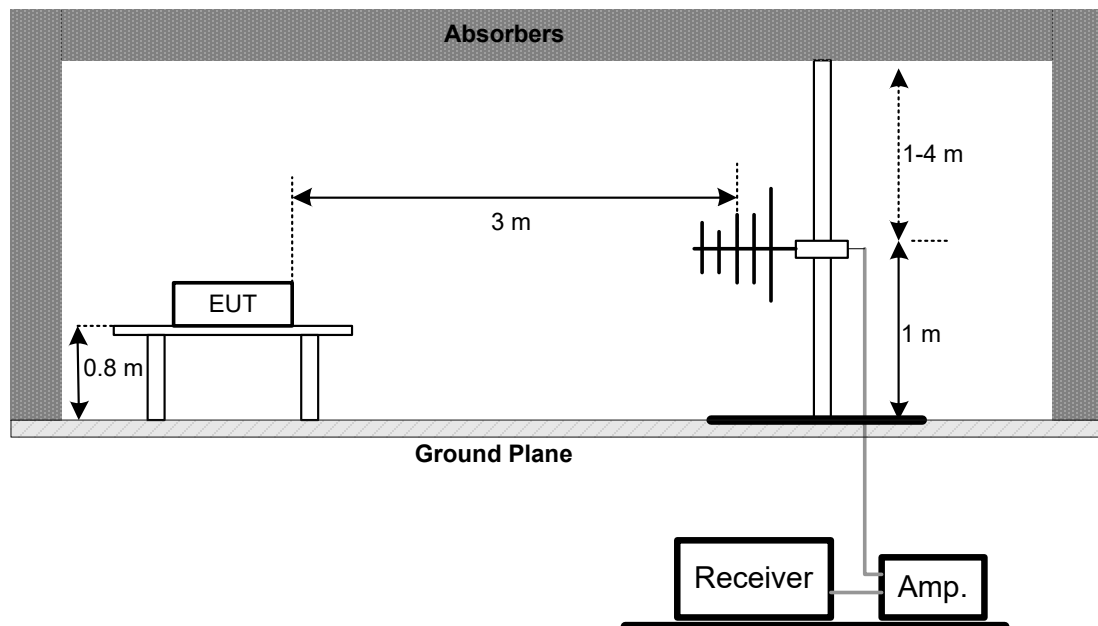

Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)

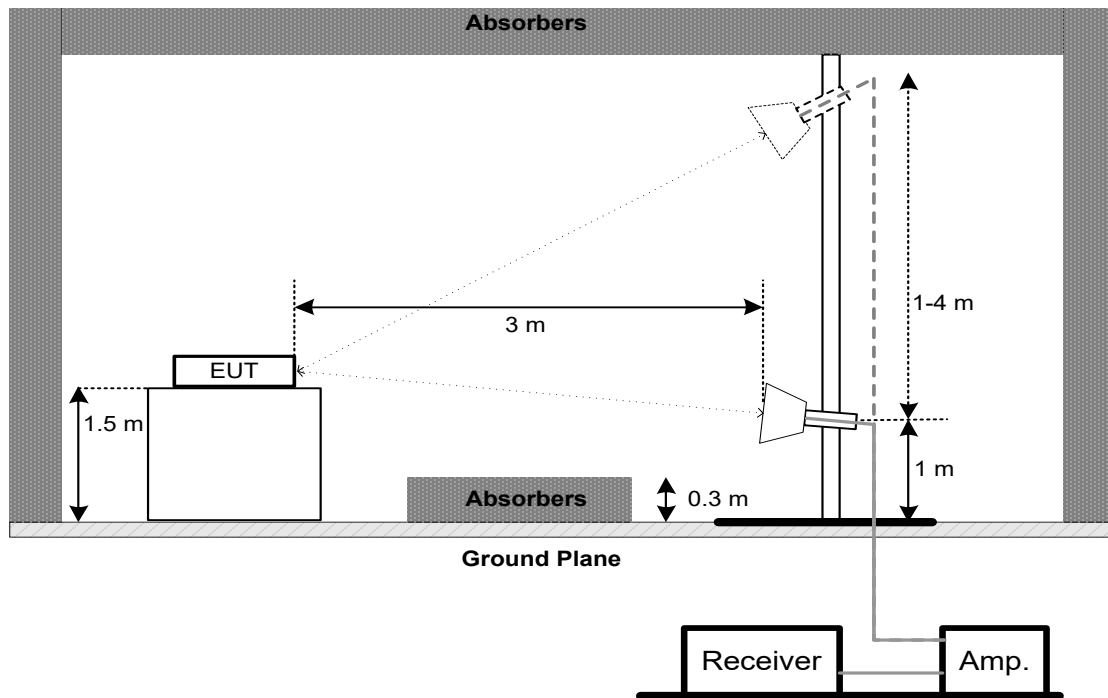

Harmonic(18 GHz to 40 GHz)

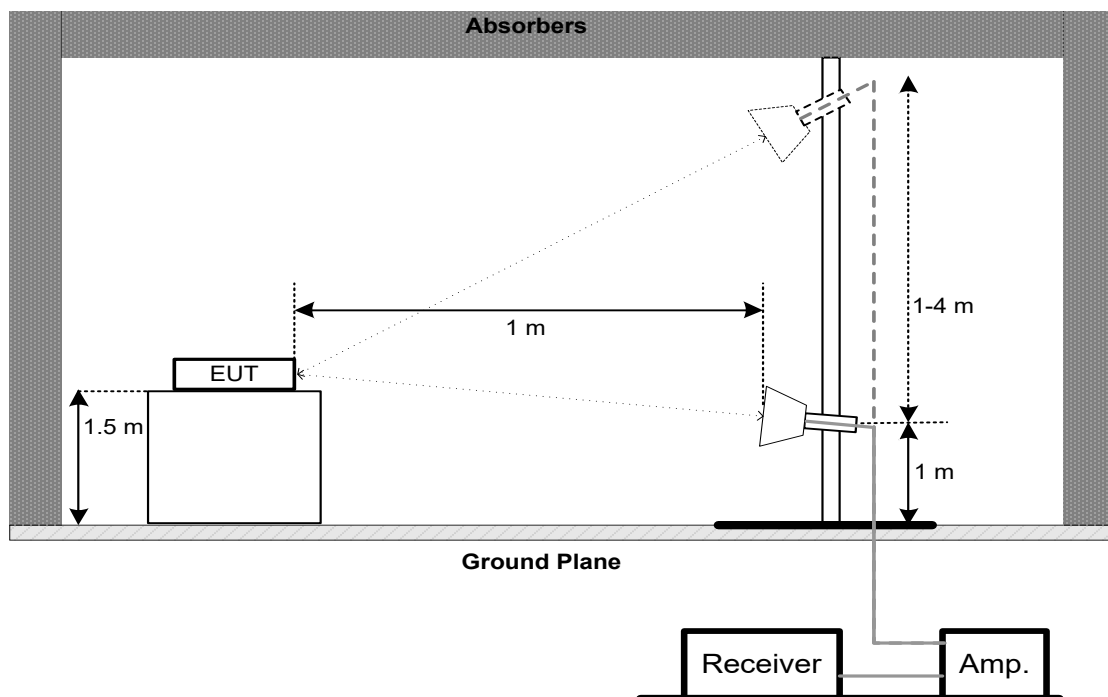

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	26 dB Bandwidth	Maximum 320 MHz	5925-7125

6.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Spectrum Setting:
For 26 dB Bandwidth:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM E.I.R.P.

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum e.i.r.p.	Standard power access point and fixed client device 36 dBm	5925-6425 6525-6875
		Indoor access point 30 dBm	
		Subordinate device operating under the control of an indoor access point 30 dBm	
		Client devices operating under the control of a standard power access point 30 dBm	
		Client devices operating under the control of an indoor access point 24 dBm	6425-6525 6875-7125
		Indoor access point 30 dBm	
		Subordinate device operating under the control of an indoor access point 30 dBm	
		Client devices operating under the control of an indoor access point 24 dBm	


7.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

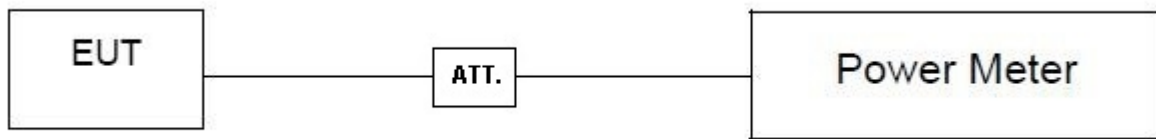

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. MAXIMUM POWER SPECTRAL DENSITY (E.I.R.P.)

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Power Spectral Density (e.i.r.p.)	Standard power access point and fixed client device 23 dBm/MHz	5925-6425 6525-6875
		Indoor access point 5 dBm/MHz	
		Subordinate device operating under the control of an indoor access point 5 dBm/MHz	
		Client devices operating under the control of a standard power access point 17 dBm/MHz	
		Client devices operating under the control of an indoor access point -1 dBm/MHz	6425-6525 6875-7125
		Indoor access point 5 dBm/MHz	
		Subordinate device operating under the control of an indoor access point 5 dBm/MHz	
		Client devices operating under the control of an indoor access point -1 dBm/MHz	

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.


9. IN-BAND EMISSION (MASK)

9.1 LIMIT

Section	Test Item	Frequency Range (MHz)	(X) dBc (Note 1)
FCC 15.407(b)	In-Band Emission (Mask)	At 1MHz outside of channel edge	20
		At one channel bandwidth from the channel center (Note 2)	28
		At one- and one-half times the channel bandwidth away from channel center (Note 3)	40
		More than one- and one-half times the channel bandwidth	40

Note:

1. The power spectral density must be suppressed by "X" dB.
2. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression.
3. At frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression.

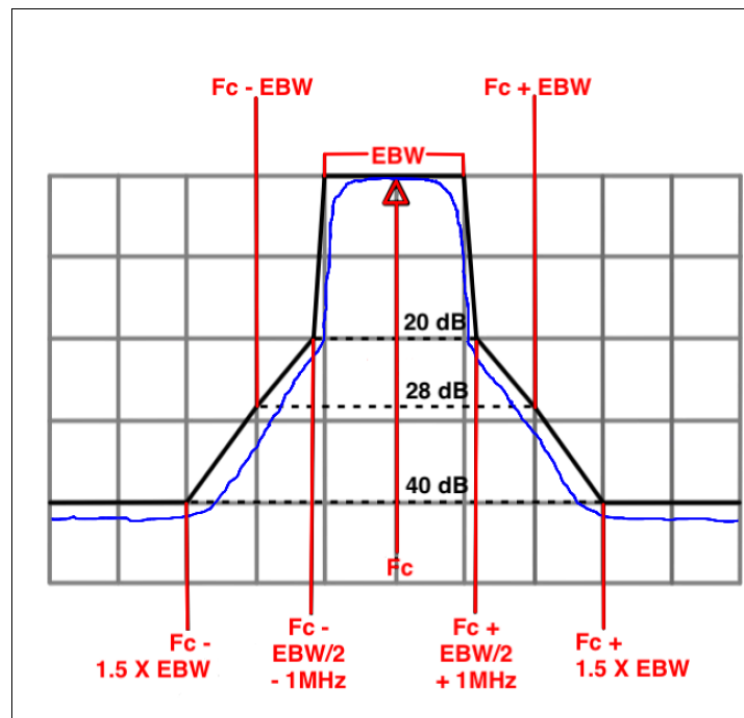

9.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	$\geq 3 \times \text{RBW}$
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. CONTENTION BASED PROTOCOL

10.1 LIMIT

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. (See note)

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

10.2 TEST PROCEDURE

Number of times detection threshold:

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

Where:

BW_{EUT} : Transmission bandwidth of EUT signal.

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal).

f_{c1} : Center frequency of EUT transmission.

f_{c2} : Center frequency of simulated incumbent signal.

For Conducted measurement:

- a. Configure the EUT to transmit with a constant duty cycle.
- b. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
- c. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- d. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step b.
- e. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- f. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT.
- g. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- h. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- i. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- j. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step e, choose a different center frequency for the AWGN signal and repeat the process.

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP

For Conducted measurement:

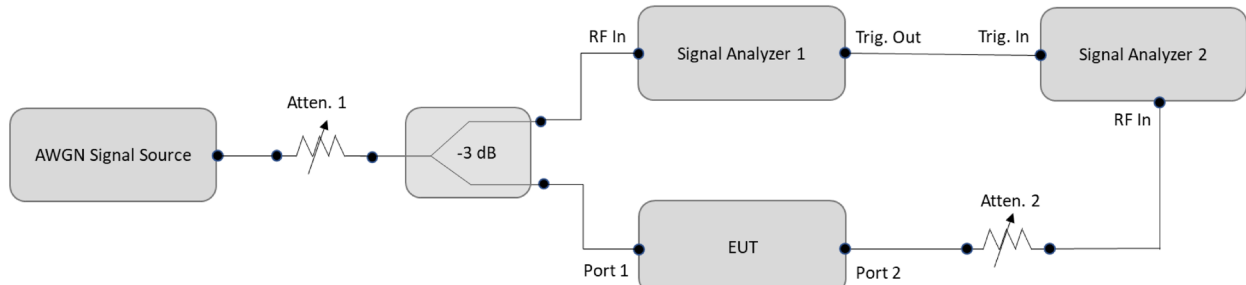


Figure 2. Contention-based protocol test setup, conducted method Step-by-Step Procedure, Conducted Setup

10.5 EUT OPERATION CONDITIONS

The EUT was Configured to be in normally transmitting mode with a constant duty cycle.

10.6 TEST RESULTS

Please refer to the APPENDIX I.

11. FREQUENCY STABILITY

11.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5925-6425
			6425-6525
			6525-6875
			6875-7125

11.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is -10°C~70°C.

11.3 DEVIATION FROM STANDARD

No deviation.

11.4 TEST SETUP

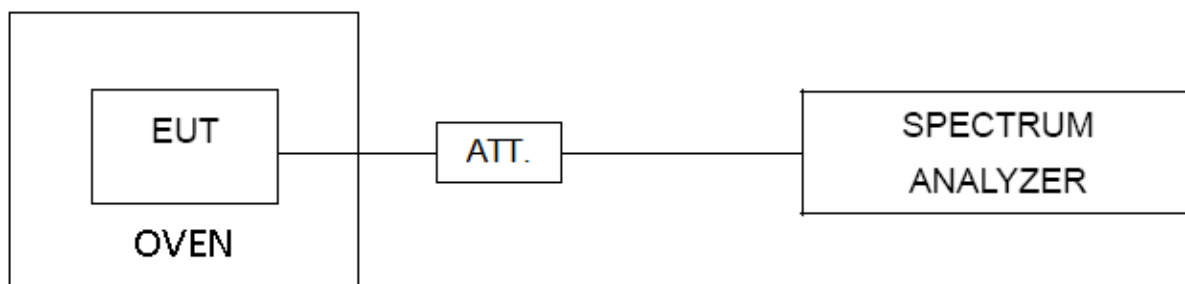

11.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

11.6 TEST RESULTS

Please refer to the APPENDIX J.

12. LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions (Test Date: Jan. 26, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL RE System	BTL	BTL RE System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Jan. 26, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 01, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Mar. 05, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 07, 2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 07, 2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 1 GHz - 18 GHz (Test Date: Feb. 03, 2026 ~ Feb. 13, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Positioning Controller	MF	MF-7802	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	Double Ridged Horn Antenna	RF SPIN	DRH18-E	210509A18ES	Sep. 12, 2026
4	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Jul. 25, 2026
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 0000	N/A	Oct. 20, 2026
6	Cable	EMC INSTRUMENT	EMC104-SM-SM-3 000	N/A	Oct. 20, 2026
7	Cable	RegalWay	RWLP50-4.0A-SMS M-1M	N/A	Oct. 20, 2026
8	966 Chamber room	Tai He	9*6*6(NSA&VSWR)	N/A	May 18, 2026
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 28, 2026
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	COM-MW	ZHPF6-M8000 18000-1331	N/A	Oct. 17, 2026

Radiated Emissions - Above 18 GHz (Test Date: Jan. 28, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Jul. 25, 2026
2	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980911	Jun. 05, 2026
3	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	0 1046	Jul. 18, 2026
4	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 06, 2027
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 06, 2027
6	Positioning Controller	MF	MF-7802	N/A	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chamber room	Tai He	9*6*6(NSA&VSWR)	N/A	May 18, 2026

Bandwidth & Maximum Power Spectral Density & In-Band Emission (Mask) (Test Date: Jan. 29, 2026 ~ Mar. 05, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Nov. 21, 2026
2	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
3	Cable	RegalWay	N/A	RWP50-402-SMSM- 1M	N/A
4	Measurement Software	BTL	WIFI6E TestSystem	N/A	N/A

Maximum e.i.r.p. (Test Date: Mar. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 17, 2026
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 17, 2026
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A


Contention Based Protocol (Test Date: Feb. 12, 2026 ~ Feb. 27, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Oct. 17, 2026
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Nov. 21, 2026
3	MXG Vector Signal Generator	Keysight	N5182B	MY57300568	Nov. 21, 2026
4	Frequency Extender	Keysight	N5182BX07	MY61500188	Feb. 01, 2027
5	Cable	RegalWay	N/A	RWP50-402-SMSM-1M	N/A
6	Cable	RegalWay	N/A	RWP50-402-SMSM-1M	N/A
7	Cable	RegalWay	N/A	RWP50-402-SMSM-1M	N/A
8	Measurement Software	BTL	WIFI6E TestSystem	N/A	N/A
9	Wifi Router	Tplink	BE9300	N/A	N/A
10	Power divider	N/A	PD-2SF-2080	N/A	Nov. 21, 2026

Frequency Stability (Test Date: Jan. 29, 2026 ~ Mar. 05, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Nov. 21, 2026
2	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
3	Cable	RegalWay	N/A	RWP50-402-SMSM-1M	N/A
4	Measurement Software	BTL	WIFI6E TestSystem	N/A	N/A
5	Desktop Constant Temperature Chamber	BELL	BTH-50C	20170306001	Dec. 19, 2026
6	DC power supply	UNI-T	UDP6721	AWP7224050031	Nov. 21, 2026

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX BE(EHT160) Mode Channel 207	Phase	Line
-----------	--------------------------------	-------	------

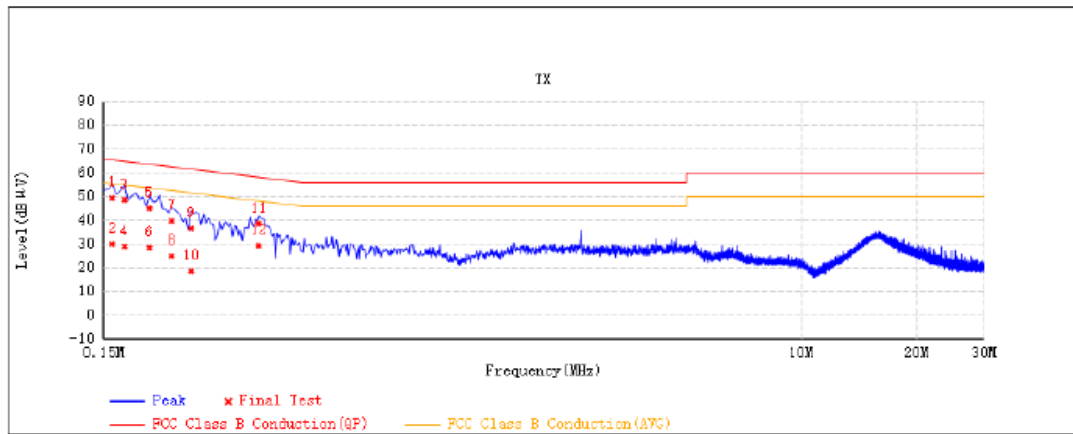


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
*	1	0.1578	39.06	10.37	49.43	65.57	-16.14	QP	
	2	0.1578	19.69	10.37	30.06	55.57	-25.51	AVG	
	3	0.1703	38.37	10.38	48.74	64.96	-16.22	QP	
	4	0.1703	18.71	10.38	29.09	54.96	-25.87	AVG	
	5	0.1978	34.69	10.4	45.08	63.69	-18.61	QP	
	6	0.1978	18.13	10.4	28.53	53.69	-25.17	AVG	
	7	0.226	29.44	10.41	39.86	62.6	-22.74	QP	
	8	0.226	14.62	10.41	25.03	52.6	-27.56	AVG	
	9	0.2539	26.18	10.43	36.61	61.63	-25.02	QP	
	10	0.2539	8.31	10.43	18.74	51.63	-32.89	AVG	
	11	0.3821	28.19	10.46	38.65	58.24	-19.59	QP	
	12	0.3821	19.02	10.46	29.47	48.24	-18.76	AVG	

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

Test Mode	TX BE(EHT160) Mode Channel 207	Phase	Neutral
-----------	--------------------------------	-------	---------

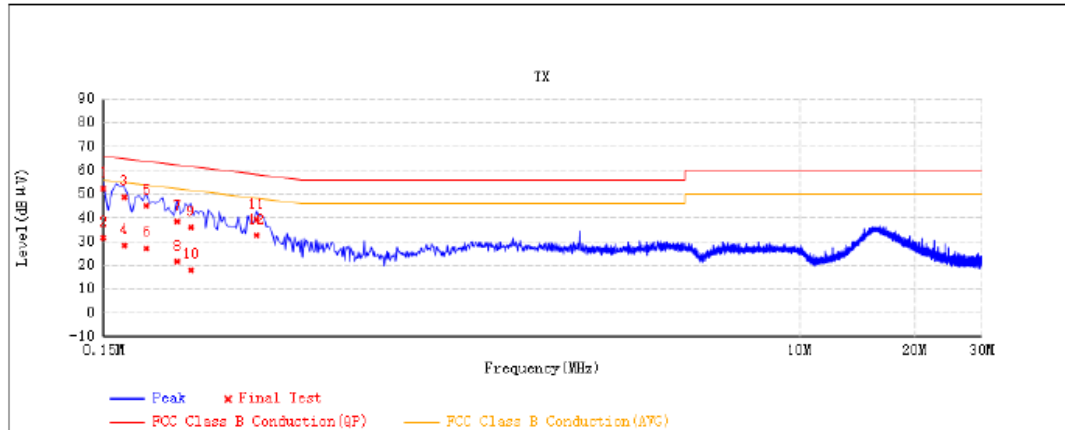

Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
*	1	0.15	41.92	10.42	52.33	66	-13.67	QP	
	2	0.15	21.3	10.42	31.72	56	-24.28	AVG	
	3	0.1703	38.4	10.43	48.83	64.96	-16.13	QP	
	4	0.1703	17.89	10.43	28.32	54.96	-26.64	AVG	
	5	0.1943	34.66	10.44	45.09	63.86	-18.77	QP	
	6	0.1943	16.85	10.44	27.29	53.86	-26.57	AVG	
	7	0.2341	28.05	10.45	38.5	62.31	-23.8	QP	
	8	0.2341	11.21	10.45	21.66	52.31	-30.64	AVG	
	9	0.2541	25.68	10.46	36.13	61.63	-25.49	QP	
	10	0.2541	7.43	10.46	17.89	51.63	-33.74	AVG	
	11	0.3775	28.72	10.49	39.21	58.32	-19.11	QP	
	12	0.3775	22.08	10.49	32.57	48.32	-15.76	AVG	


REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX BE(EHT160) Mode Channel 207	Polarization	Ant 0°
-----------	--------------------------------	--------------	--------

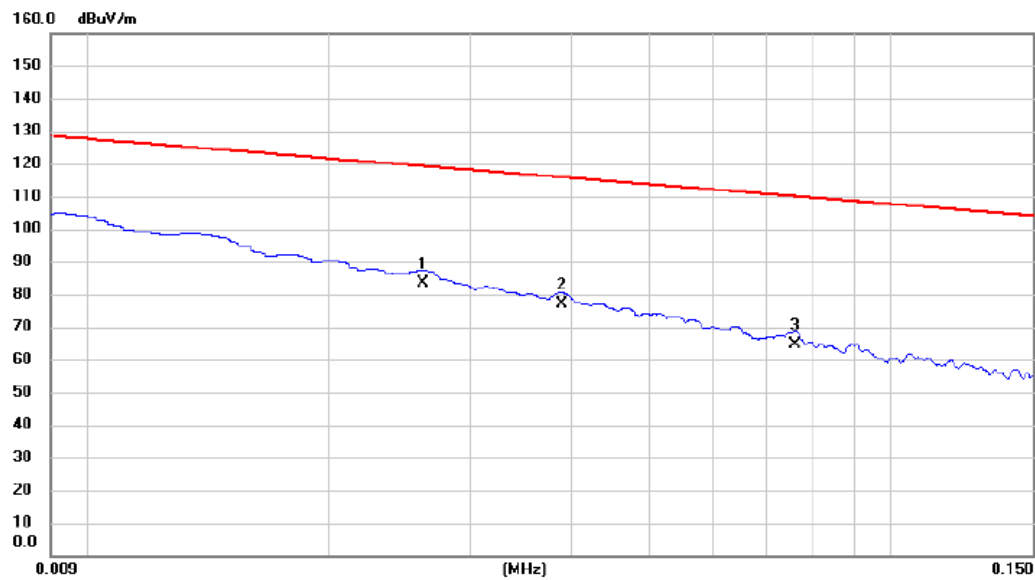


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.026	63.14	20.22	83.36	119.24	-35.88	AVG	
2		0.039	56.91	20.14	77.05	115.78	-38.73	AVG	
3		0.076	44.29	20.14	64.43	109.99	-45.56	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 207	Polarization	Ant 0°
-----------	--------------------------------	--------------	--------

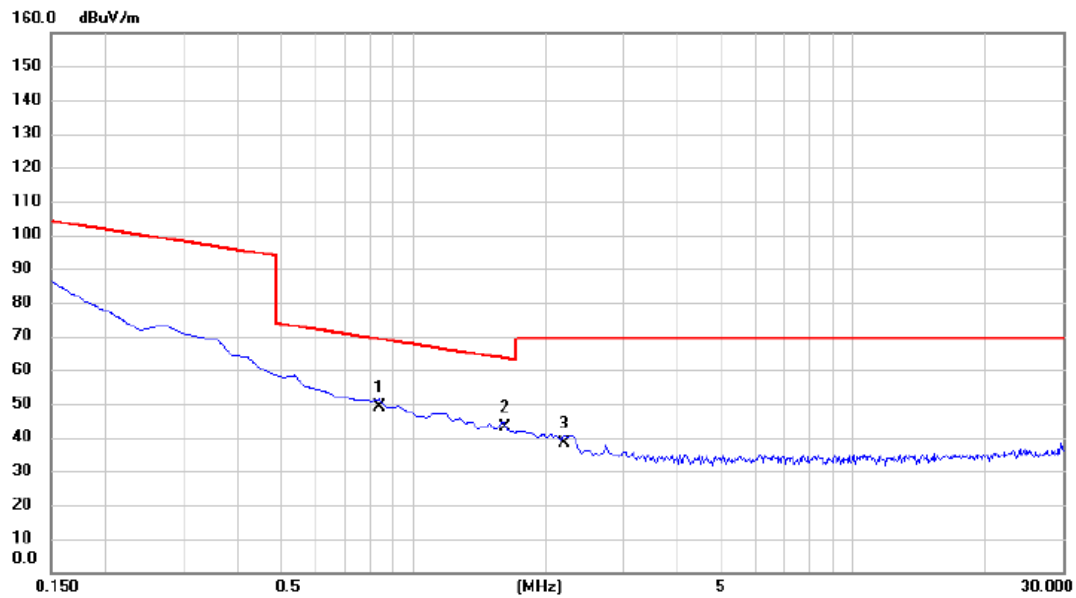


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.837	29.15	19.97	49.12	69.15	-20.03	QP	
2		1.613	22.98	20.01	42.99	63.45	-20.46	QP	
3		2.210	18.31	20.02	38.33	69.54	-31.21	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 207	Polarization	Ant 90°
-----------	--------------------------------	--------------	---------

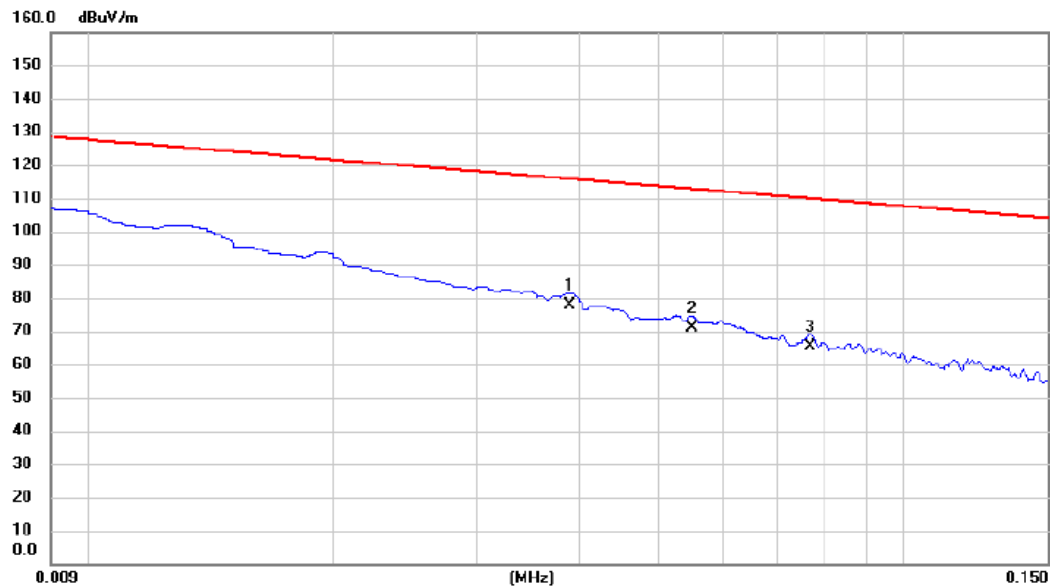


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.039	57.84	20.14	77.98	115.78	-37.80	AVG	
2		0.055	50.69	20.14	70.83	112.80	-41.97	AVG	
3		0.077	45.32	20.14	65.46	109.91	-44.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 207	Polarization	Ant 90°
-----------	--------------------------------	--------------	---------

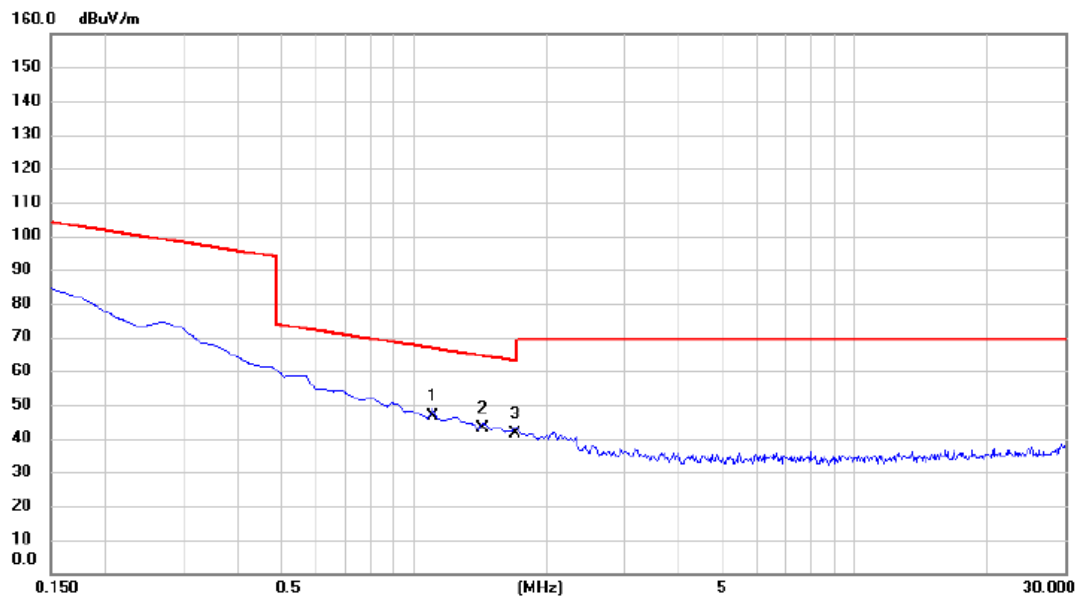

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	1.105	26.74	20.00	46.74	66.74	-20.00	QP	
2		1.434	22.91	20.00	42.91	64.48	-21.57	QP	
3		1.702	21.33	20.01	41.34	62.98	-21.64	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX BE(EHT160) Mode Channel 207	Polarization	Vertical
-----------	--------------------------------	--------------	----------

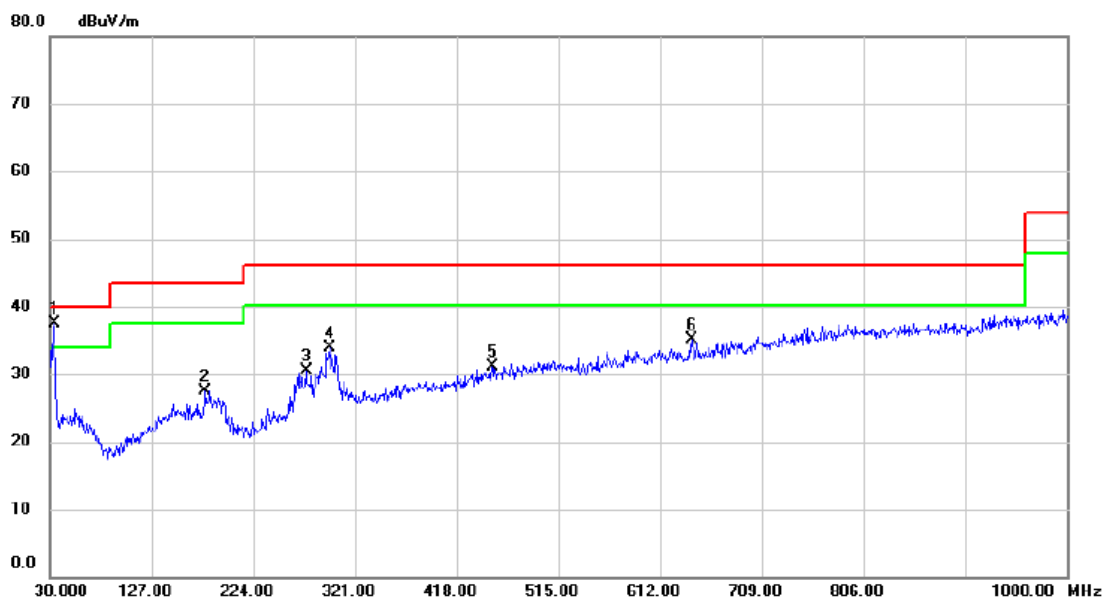


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.880	49.85	-12.43	37.42	40.00	-2.58	peak	
2		178.410	39.16	-11.64	27.52	43.52	-16.00	peak	
3		274.440	41.00	-10.54	30.46	46.02	-15.56	peak	
4		296.750	43.75	-9.82	33.93	46.02	-12.09	peak	
5		451.950	37.08	-6.04	31.04	46.02	-14.98	peak	
6		642.070	38.02	-2.96	35.06	46.02	-10.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 207	Polarization	Horizontal
-----------	--------------------------------	--------------	------------

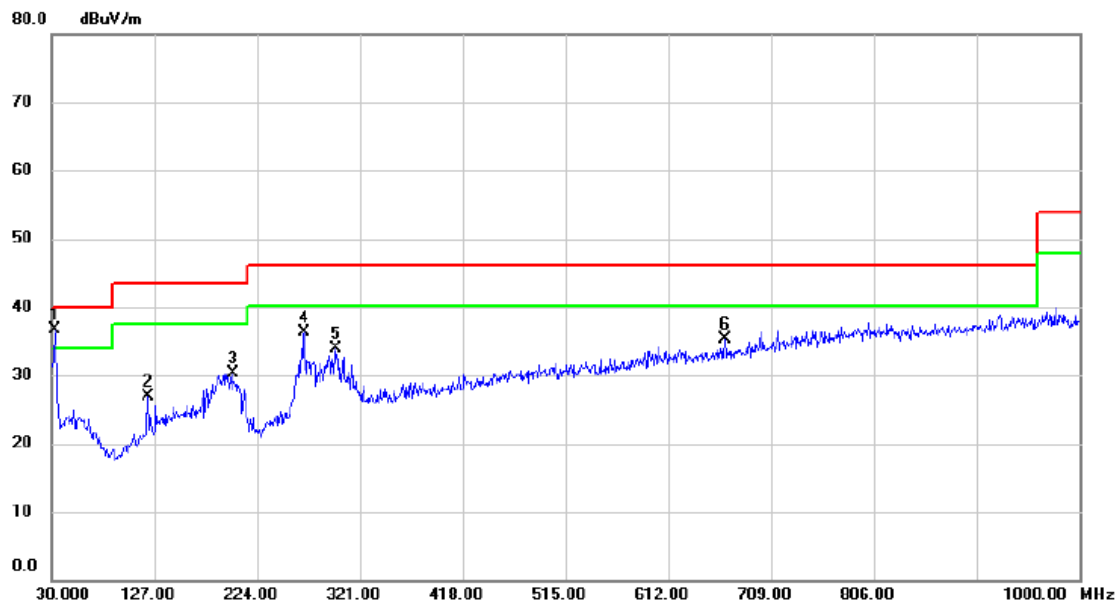

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.910	49.25	-12.47	36.78	40.00	-3.22	peak	
2		121.180	40.22	-13.32	26.90	43.52	-16.62	peak	
3		200.720	43.92	-13.61	30.31	43.52	-13.21	peak	
4		268.620	47.15	-10.79	36.36	46.02	-9.66	peak	
5		297.720	43.78	-9.79	33.99	46.02	-12.03	peak	
6		665.350	37.97	-2.60	35.37	46.02	-10.65	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-5_TX A Mode 5955 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

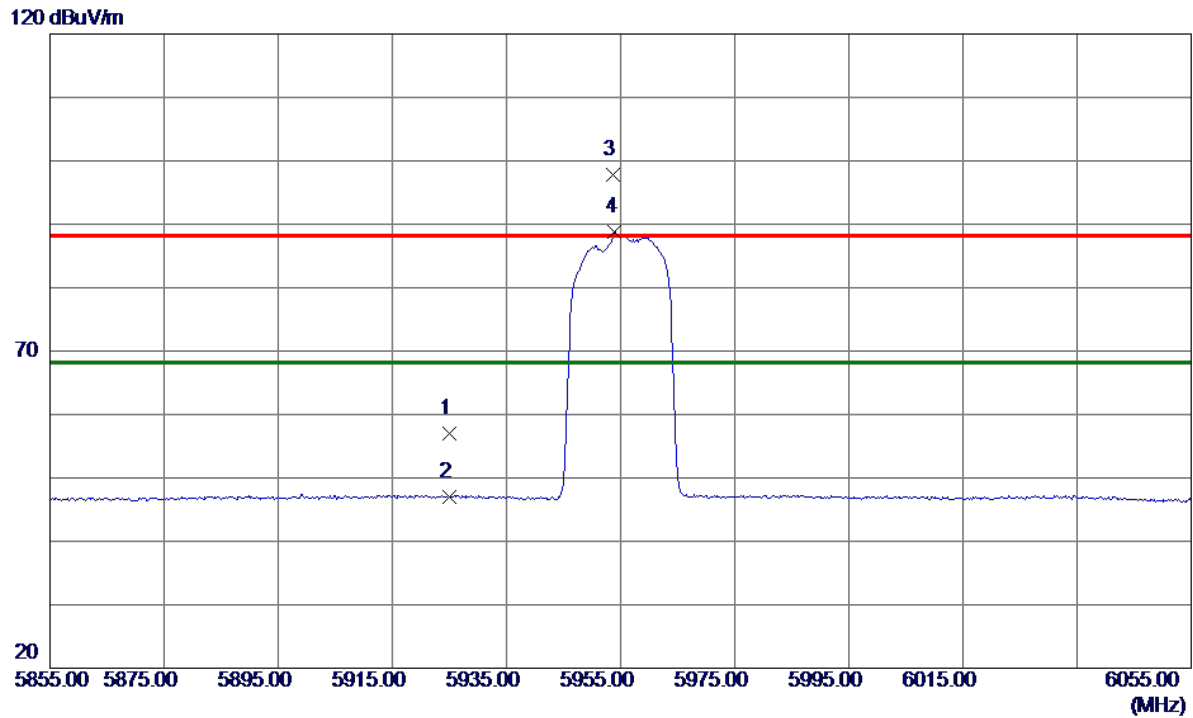


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	39.00	18.00	57.00	88.20	-31.20	Peak	
2	5925.0000	29.06	18.00	47.06	68.20	-21.14	AVG	
3	5953.6000	79.62	18.13	97.75	88.20	9.55	Peak	No Limit
4 *	5954.0000	70.60	18.14	88.74	68.20	20.54	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX A Mode 7115 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

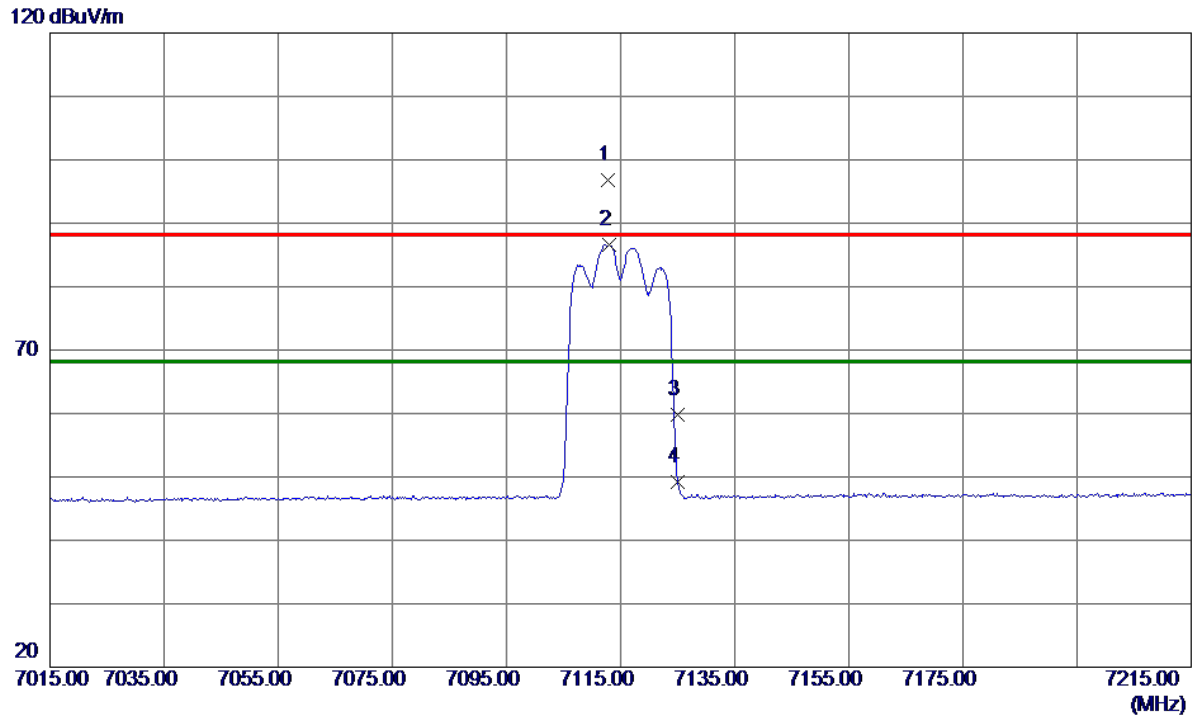


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7112.8000	78.28	18.52	96.80	88.20	8.60	Peak	No Limit
2 *	7113.0000	68.10	18.52	86.62	68.20	18.42	AVG	No Limit
3	7125.0000	41.23	18.53	59.76	88.20	-28.44	Peak	
4	7125.0000	30.71	18.53	49.24	68.20	-18.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE20 Mode 5955 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

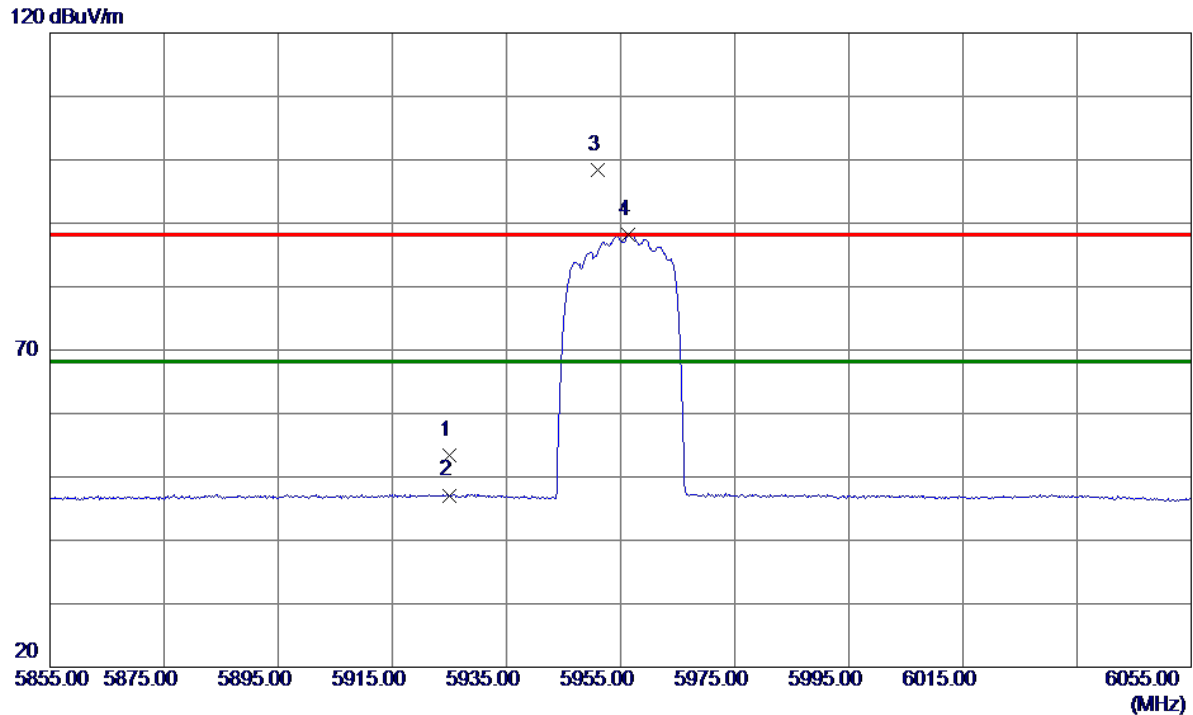


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	35.46	18.00	53.46	88.20	-34.74	Peak	
2	5925.0000	29.10	18.00	47.10	68.20	-21.10	AVG	
3	5951.0000	80.31	18.12	98.43	88.20	10.23	Peak	No Limit
4 *	5956.4000	70.01	18.15	88.16	68.20	19.96	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE20 Mode 7115 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

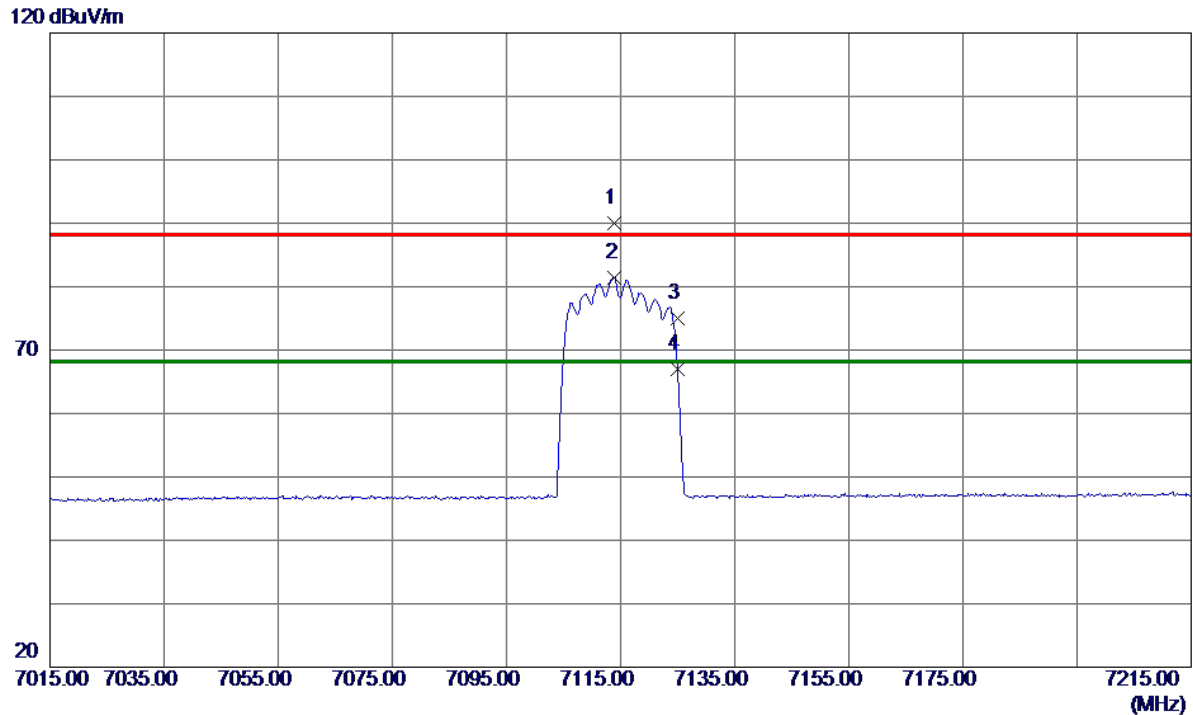


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7113.8000	71.38	18.52	89.90	88.20	1.70	Peak	No Limit
2 *	7114.0000	62.96	18.52	81.48	68.20	13.28	AVG	No Limit
3	7125.0000	56.47	18.53	75.00	88.20	-13.20	Peak	
4	7125.0000	48.42	18.53	66.95	68.20	-1.25	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE40 Mode 5965 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

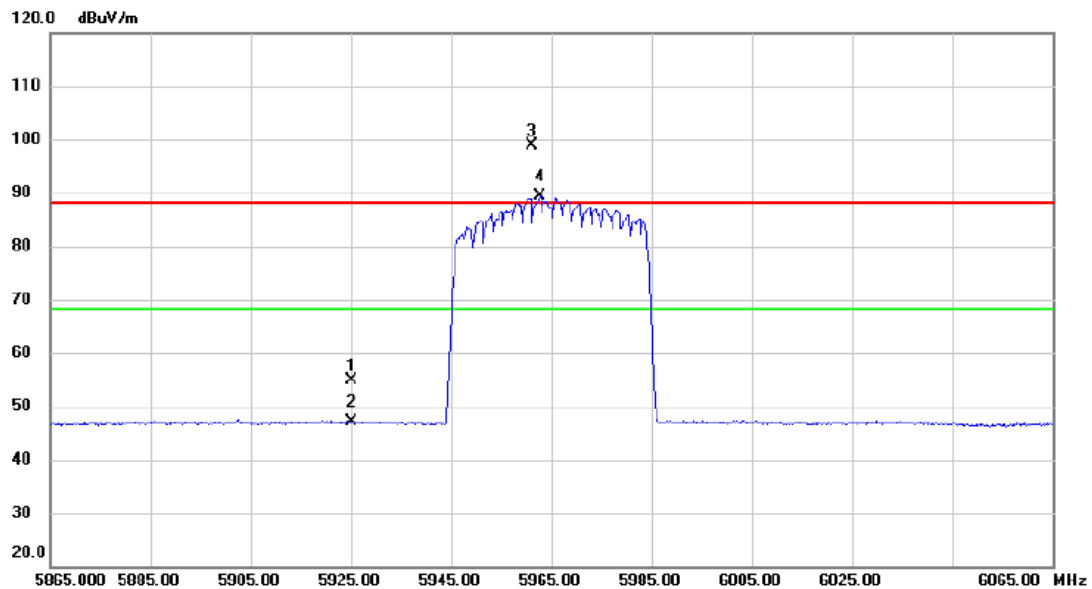


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5925.000	36.97	18.01	54.98	88.20	-33.22	peak	
2		5925.000	29.05	18.01	47.06	68.20	-21.14	AVG	
3	X	5961.200	80.70	18.17	98.87	88.20	10.67	peak	No Limit
4	*	5962.800	71.20	18.17	89.37	68.20	21.17	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE40 Mode 7085 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

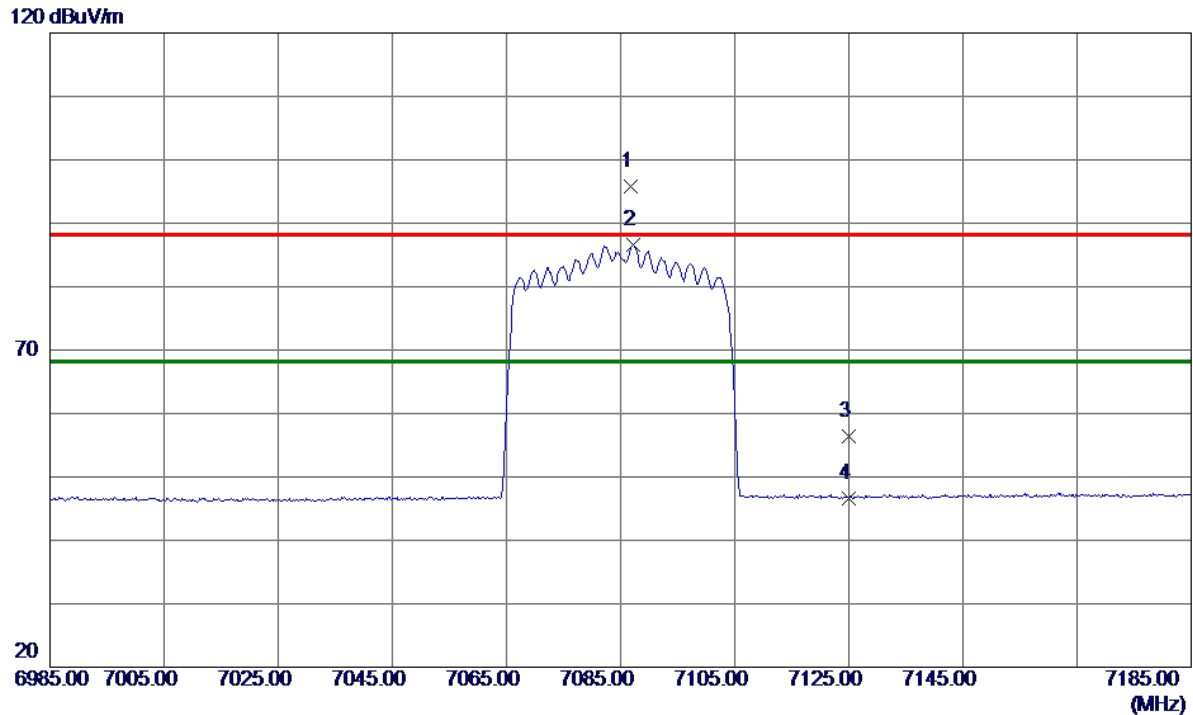


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7086.8000	77.27	18.48	95.75	88.20	7.55	Peak	No Limit
2 *	7087.2000	68.20	18.48	86.68	68.20	18.48	AVG	No Limit
3	7125.0000	37.85	18.53	56.38	88.20	-31.82	Peak	
4	7125.0000	28.16	18.53	46.69	68.20	-21.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE80 Mode 5985 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

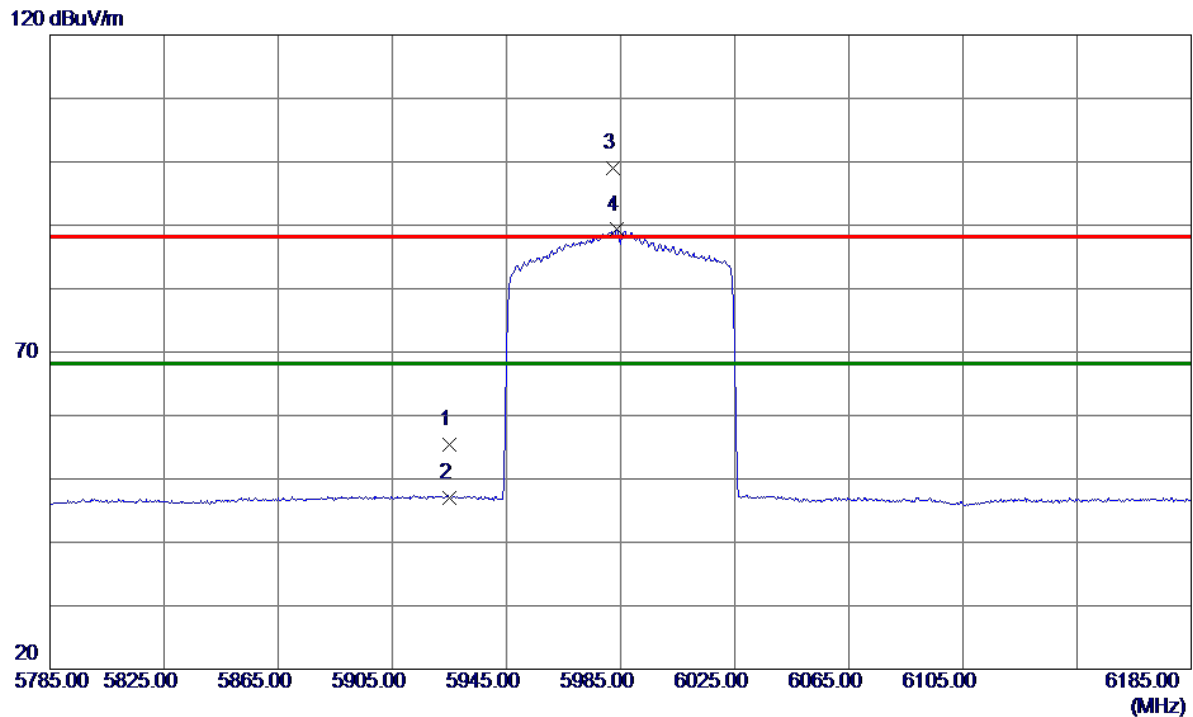


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	37.39	18.00	55.39	88.20	-32.81	Peak	
2	5925.0000	29.00	18.00	47.00	68.20	-21.20	AVG	
3	5982.2000	80.79	18.27	99.06	88.20	10.86	Peak	No Limit
4 *	5983.8000	71.03	18.27	89.30	68.20	21.10	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE80 Mode 7025 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

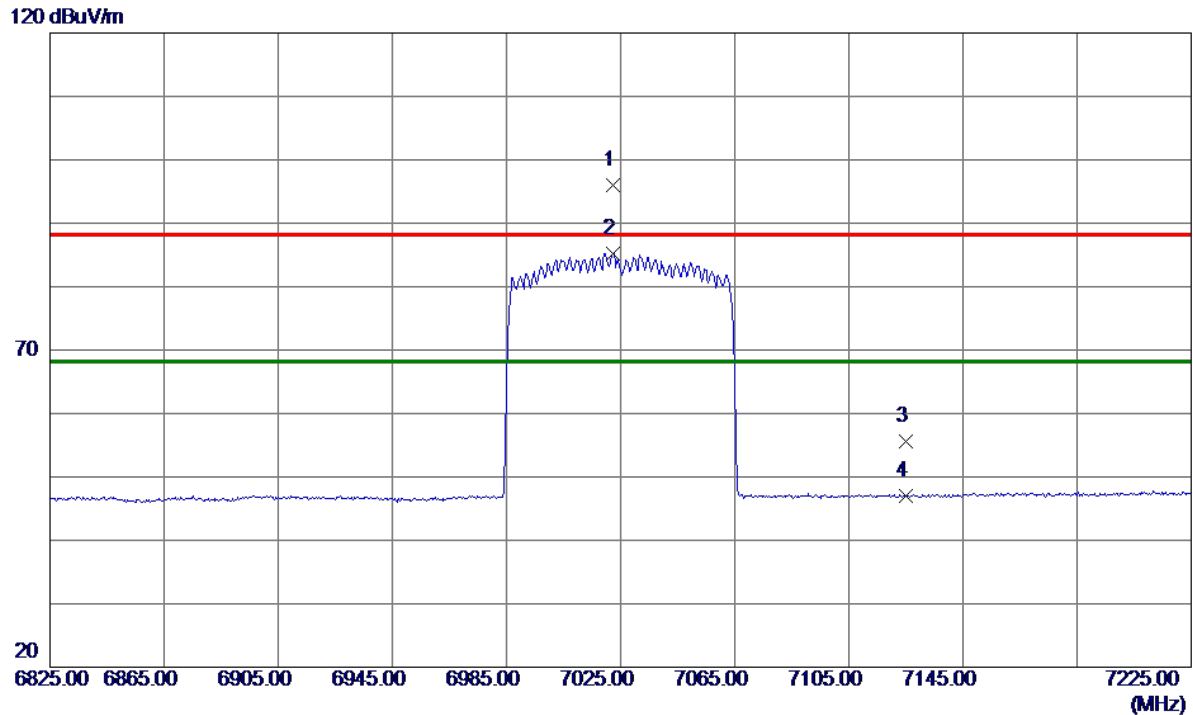


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7022.2000	77.66	18.40	96.06	88.20	7.86	Peak	No Limit
2 *	7022.2000	66.87	18.40	85.27	68.20	17.07	AVG	No Limit
3	7125.0000	37.04	18.53	55.57	88.20	-32.63	Peak	
4	7125.0000	28.50	18.53	47.03	68.20	-21.17	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE160 Mode 6025 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

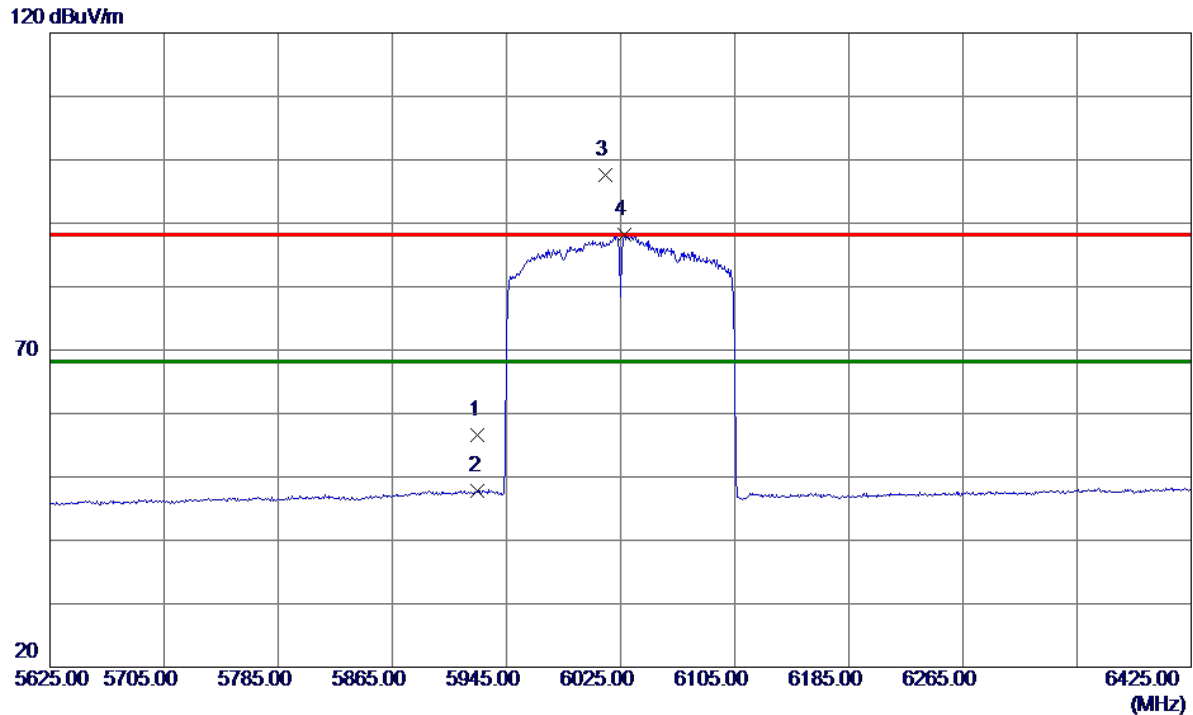


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	38.65	18.00	56.65	88.20	-31.55	Peak	
2	5925.0000	29.84	18.00	47.84	68.20	-20.36	AVG	
3	6014.6000	79.18	18.38	97.56	88.20	9.36	Peak	No Limit
4 *	6027.4000	69.79	18.40	88.19	68.20	19.99	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE160 Mode 6985 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

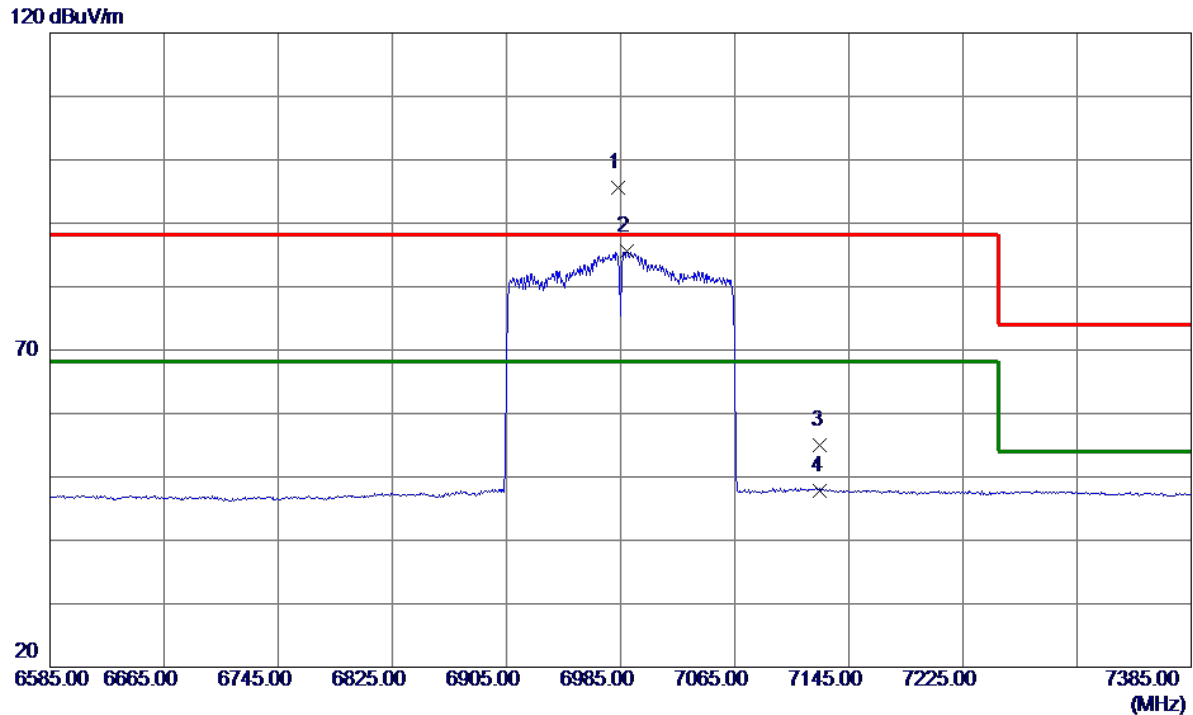


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	6983.4000	77.15	18.40	95.55	88.20	7.35	Peak	No Limit
2 *	6989.8000	67.22	18.39	85.61	68.20	17.41	AVG	No Limit
3	7125.0000	36.40	18.53	54.93	88.20	-33.27	Peak	
4	7125.0000	29.31	18.53	47.84	68.20	-20.36	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX A Mode 5955 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

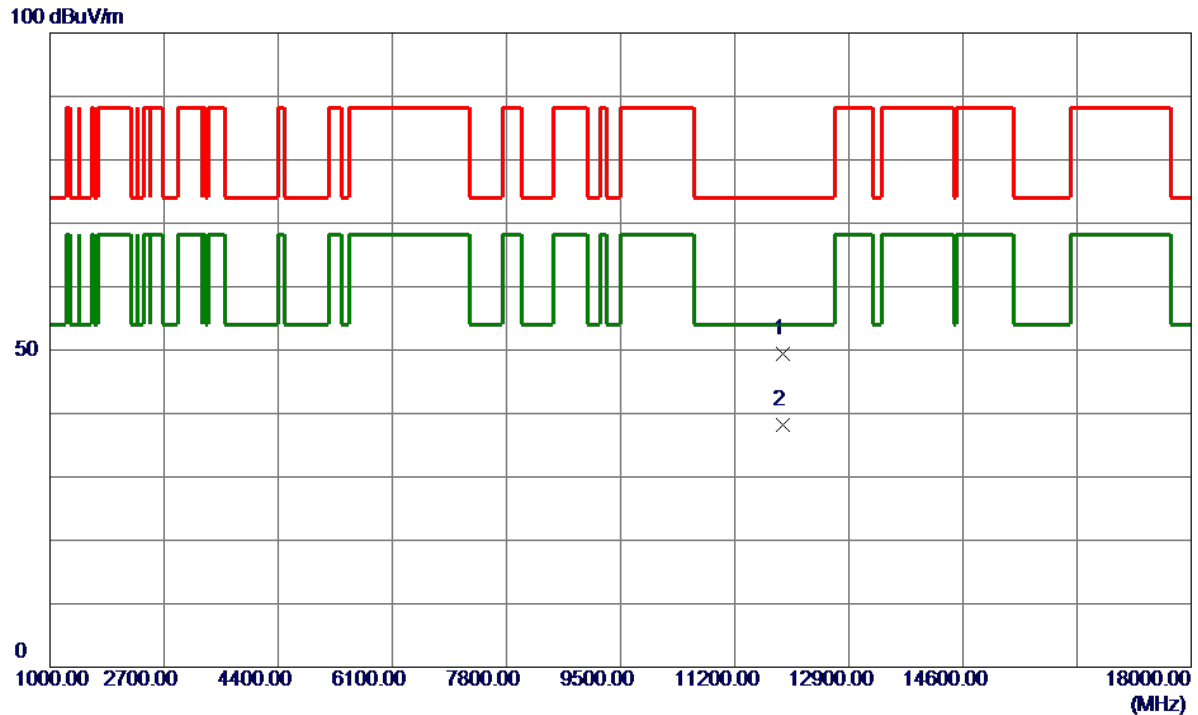


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11915.6400	36.11	13.27	49.38	74.00	-24.62	Peak	
2 *	11917.4000	25.00	13.27	38.27	54.00	-15.73	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX A Mode 6175 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

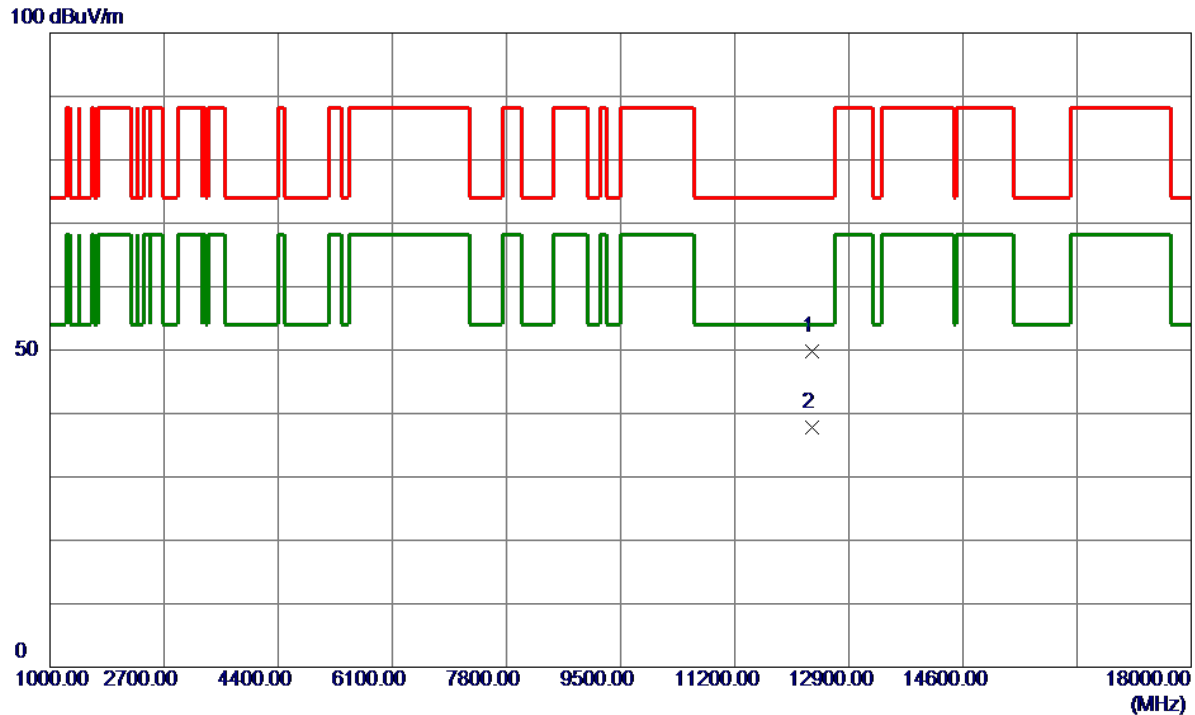


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12357.5199	37.29	12.60	49.89	74.00	-24.11	Peak	
2 *	12358.3000	25.11	12.60	37.71	54.00	-16.29	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX A Mode 6415 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

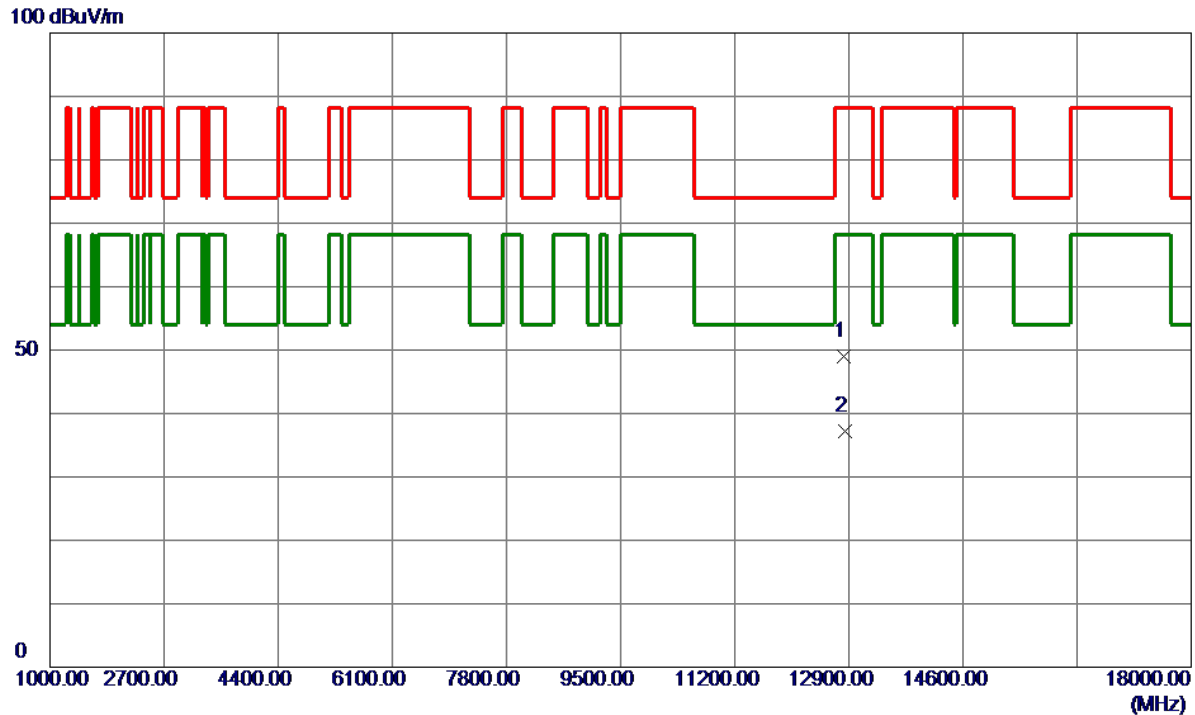


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12823.4600	36.85	12.07	48.92	88.20	-39.28	Peak	
2 *	12836.2400	25.08	12.05	37.13	68.20	-31.07	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX A Mode 6435 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

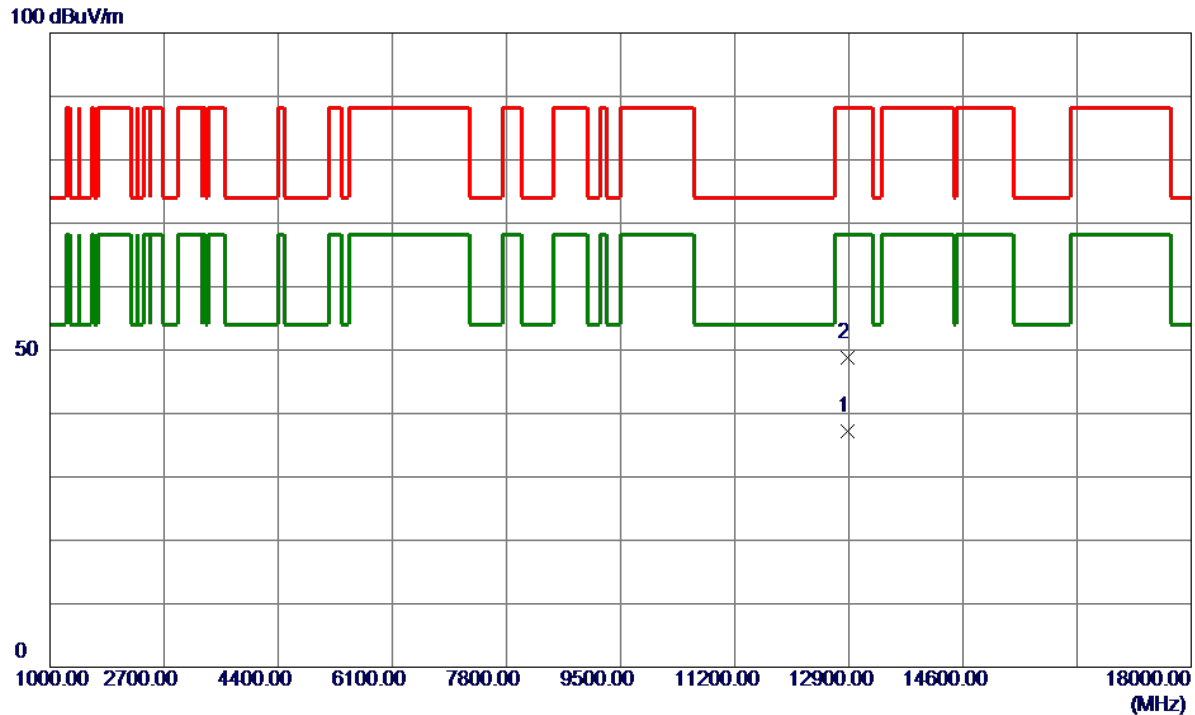


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12877.7000	25.21	12.01	37.22	68.20	-30.98	AVG	
2	12879.9200	36.87	12.01	48.88	88.20	-39.32	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX A Mode 6475 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

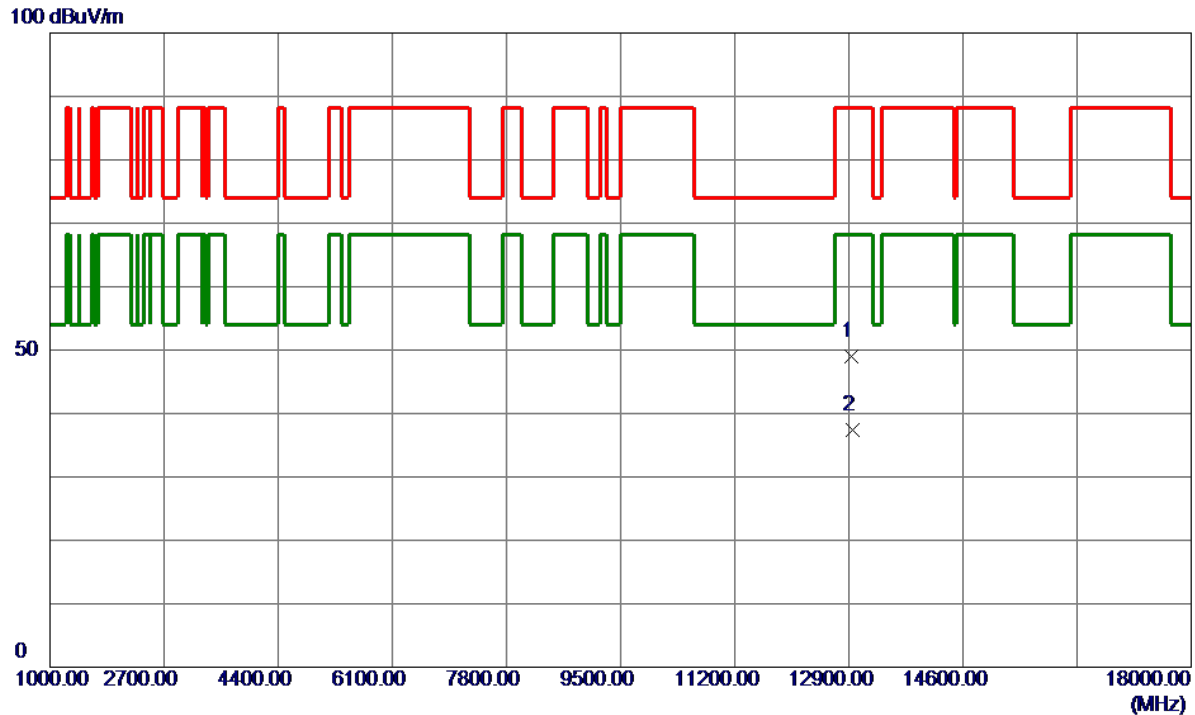


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12944.6800	37.09	11.95	49.04	88.20	-39.16	Peak	
2 *	12953.7000	25.41	11.94	37.35	68.20	-30.85	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX A Mode 6515 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

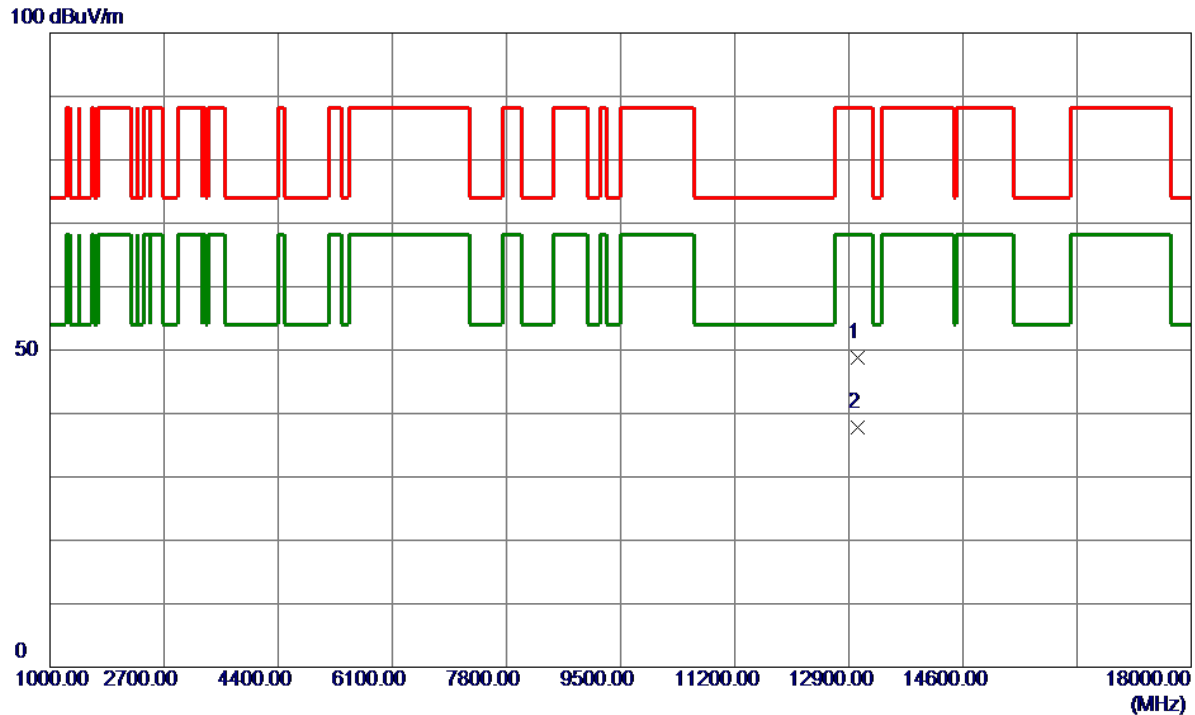


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13037.3400	36.95	11.94	48.89	88.20	-39.31	Peak	
2 *	13039.7200	25.83	11.94	37.77	68.20	-30.43	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX A Mode 6535 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

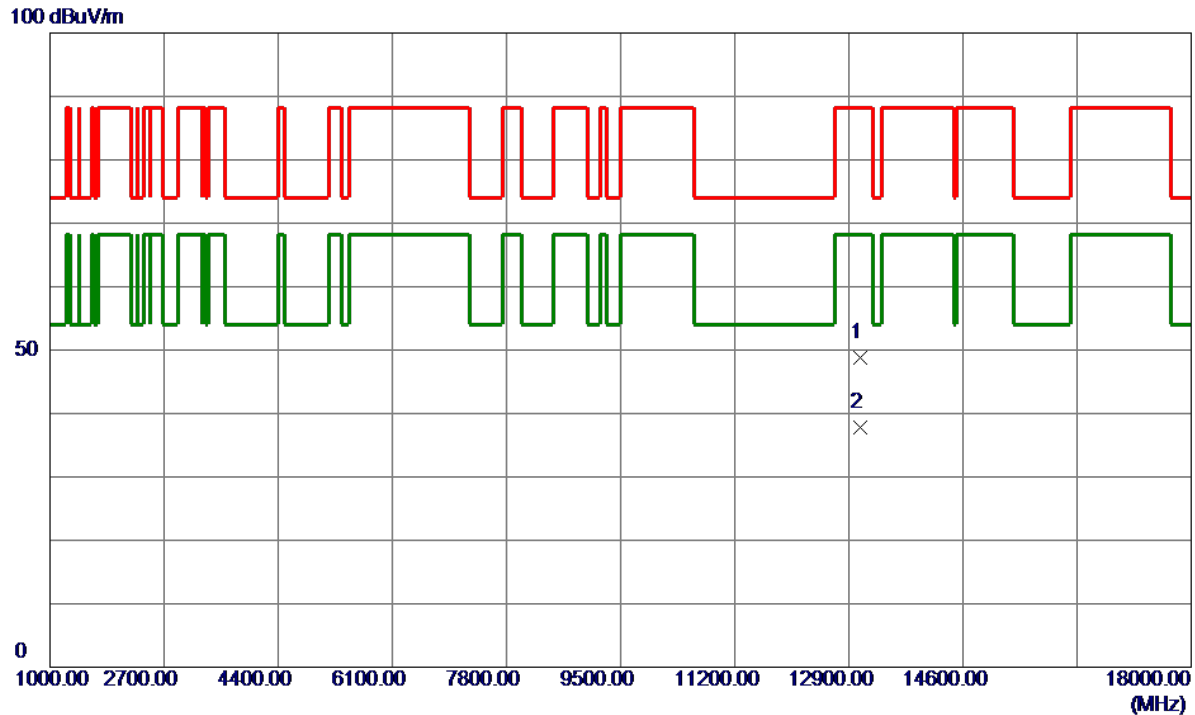


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13060.6200	36.75	11.97	48.72	88.20	-39.48	Peak	
2 *	13061.6600	25.82	11.97	37.79	68.20	-30.41	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX A Mode 6695 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

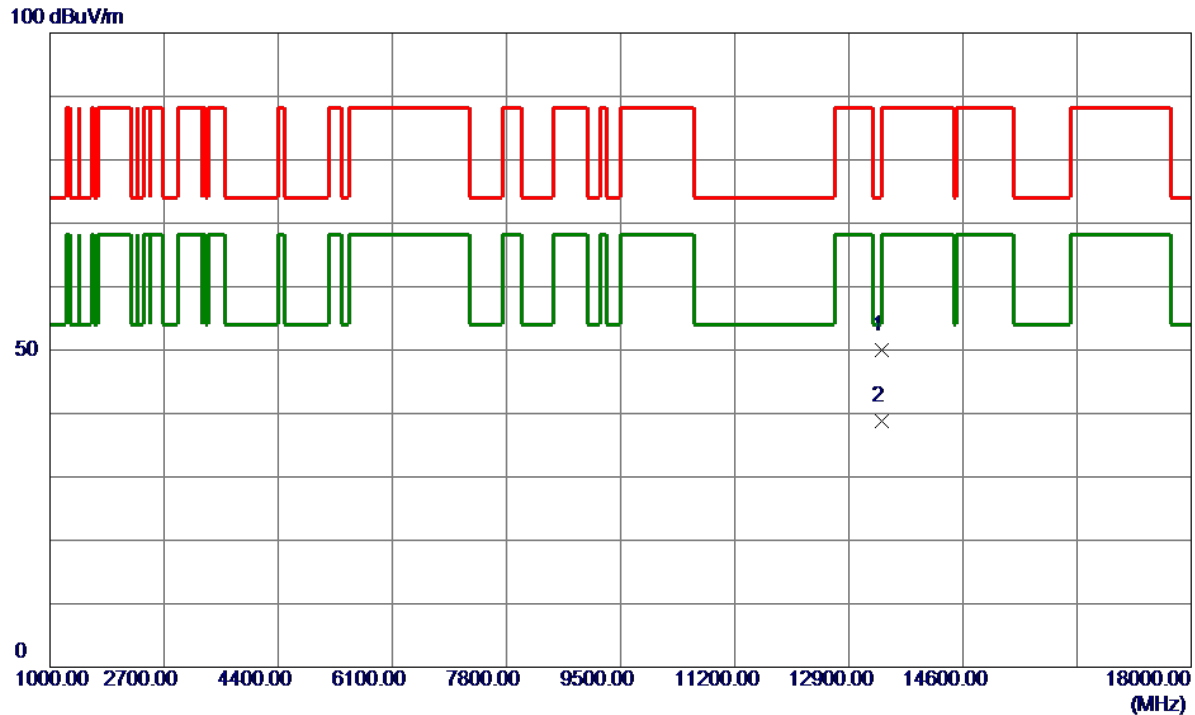


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13389.3200	37.63	12.42	50.05	74.00	-23.95	Peak	
2 *	13392.1400	26.36	12.42	38.78	54.00	-15.22	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX A Mode 6855 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

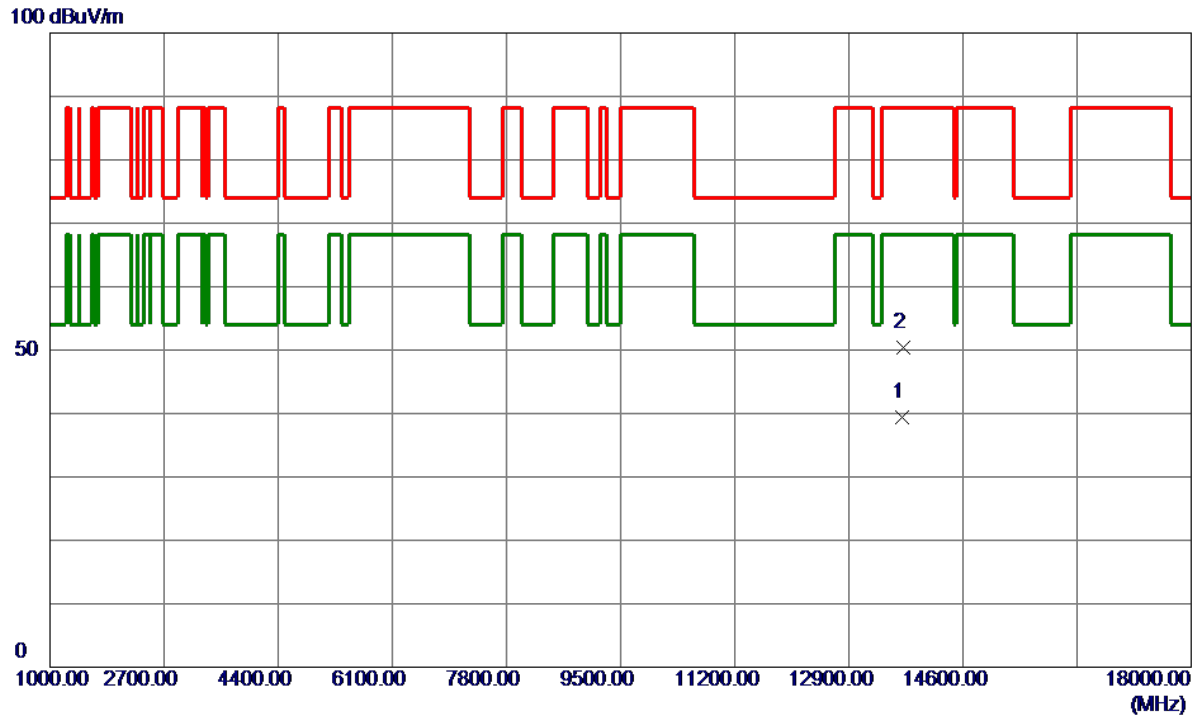


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13702.6200	26.76	12.72	39.48	68.20	-28.72	AVG	
2	13713.6200	37.75	12.72	50.47	88.20	-37.73	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX A Mode 6875 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

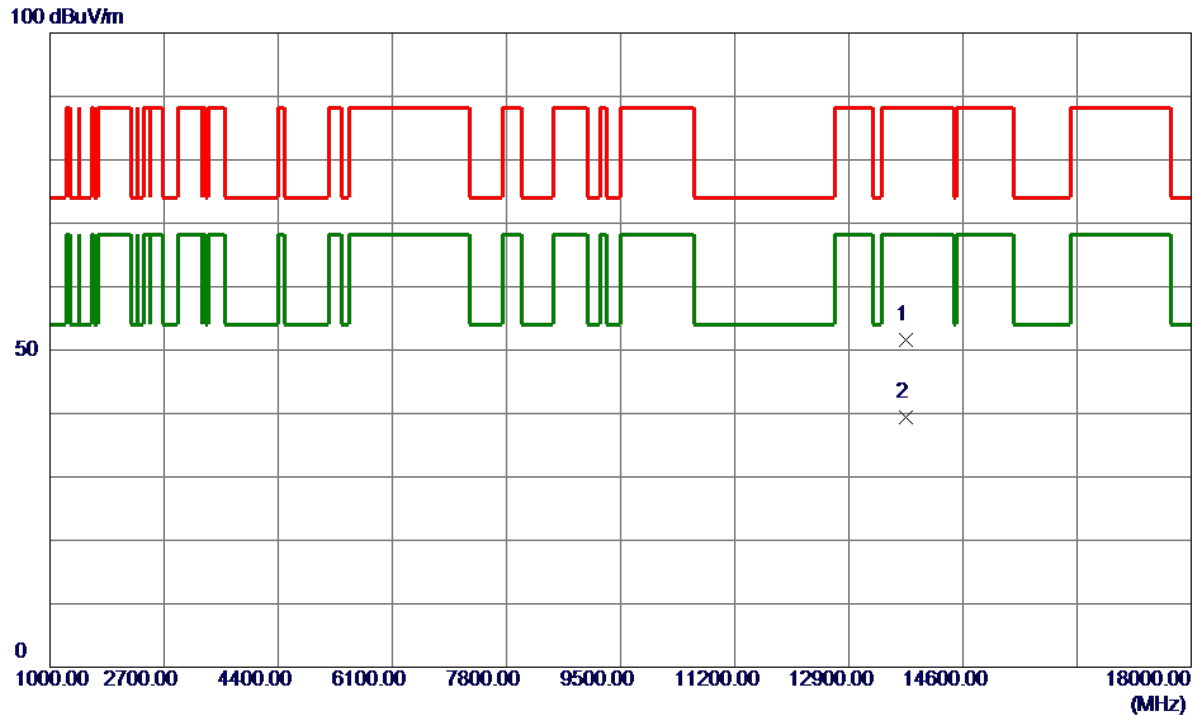


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13741.5800	38.78	12.74	51.52	88.20	-36.68	Peak	
2 *	13748.3800	26.72	12.75	39.47	68.20	-28.73	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX A Mode 6995 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

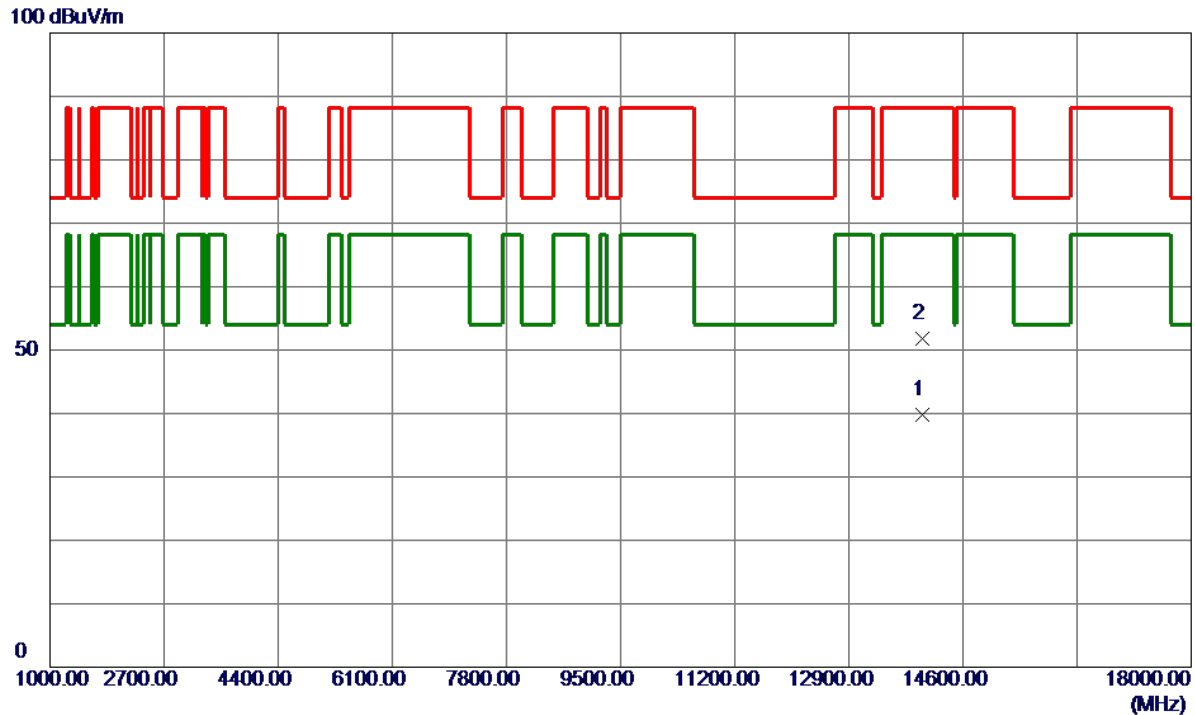


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13991.4600	26.93	12.92	39.85	68.20	-28.35	AVG	
2	13999.2200	38.93	12.93	51.86	88.20	-36.34	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX A Mode 7115 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

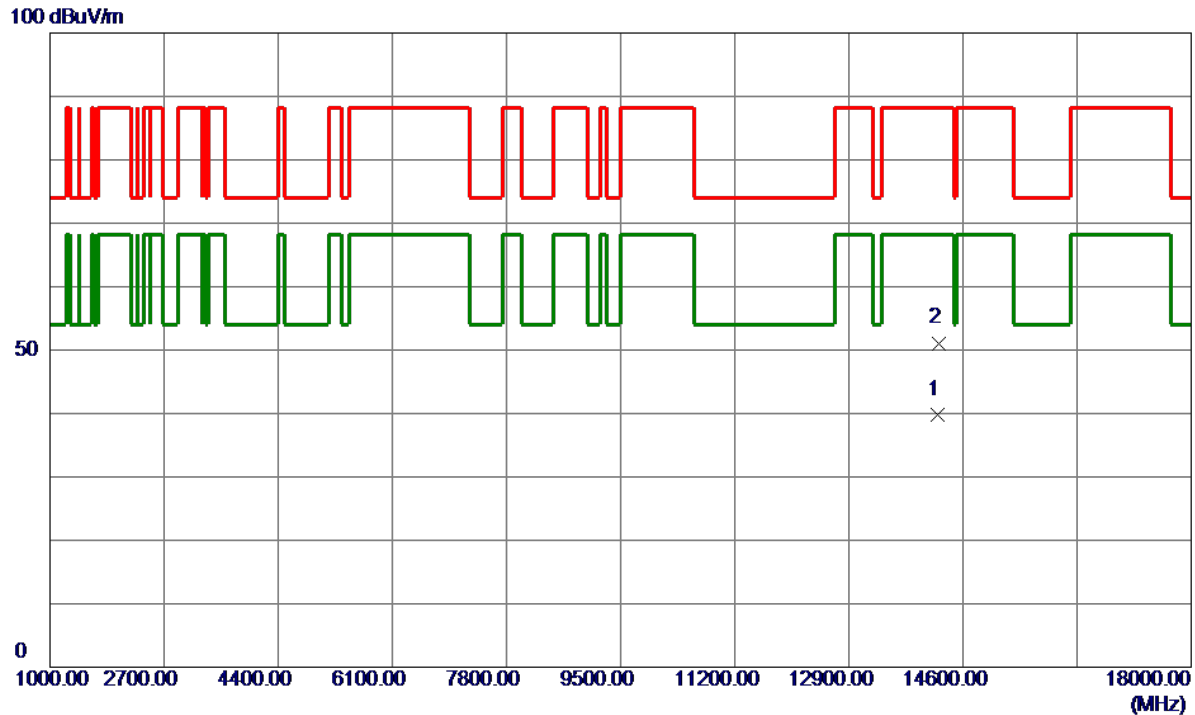


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	14230.4400	26.59	13.18	39.77	68.20	-28.43	AVG	
2	14238.0600	37.91	13.19	51.10	88.20	-37.10	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE20 Mode 5955 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

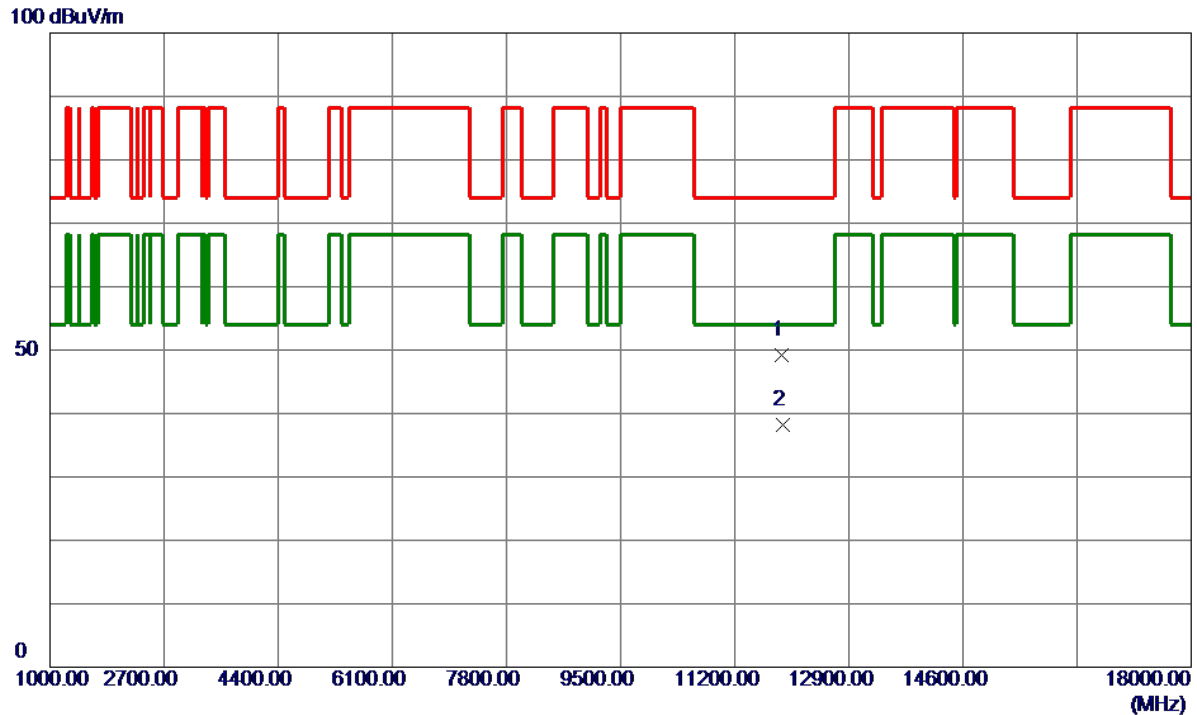


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11906.1000	35.97	13.28	49.25	74.00	-24.75	Peak	
2 *	11917.8800	24.92	13.26	38.18	54.00	-15.82	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE20 Mode 6175 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

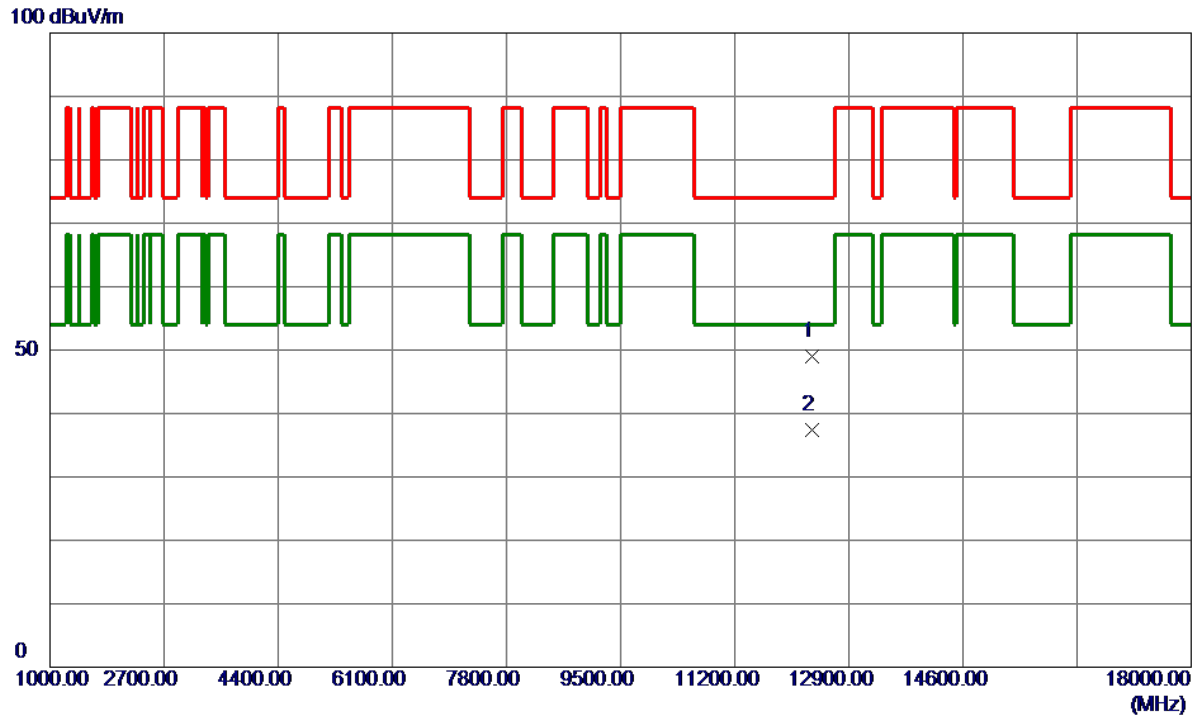


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12356.7400	36.42	12.60	49.02	74.00	-24.98	Peak	
2 *	12356.9000	24.84	12.60	37.44	54.00	-16.56	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE20 Mode 6415 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

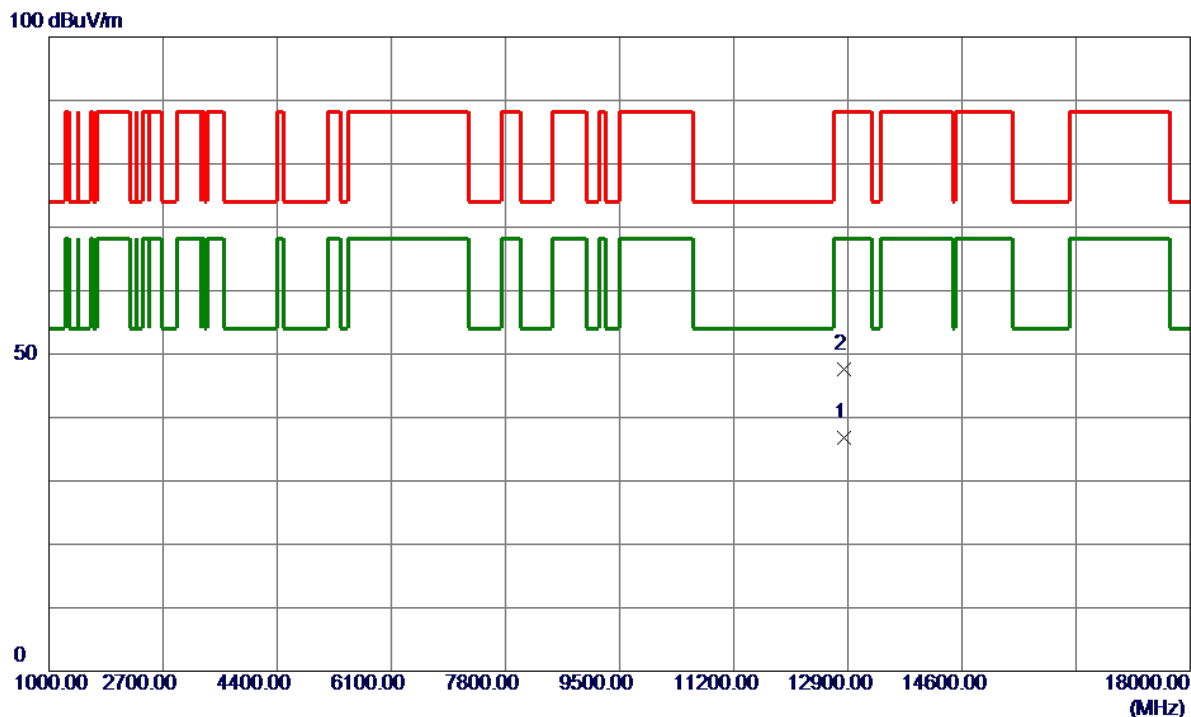


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12839.4200	24.77	12.05	36.82	68.20	-31.38	AVG	
2	12836.0599	35.57	12.05	47.62	88.20	-40.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE20 Mode 6435 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

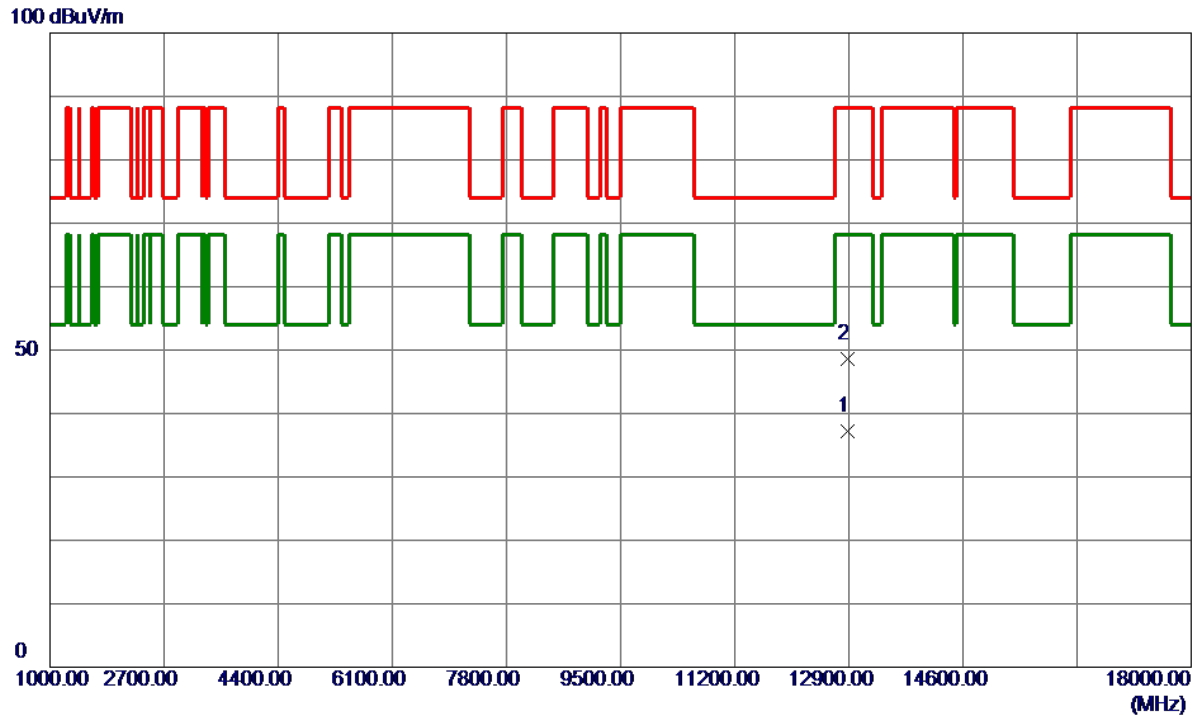


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12877.1800	25.15	12.01	37.16	68.20	-31.04	AVG	
2	12876.5599	36.57	12.01	48.58	88.20	-39.62	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE20 Mode 6475 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

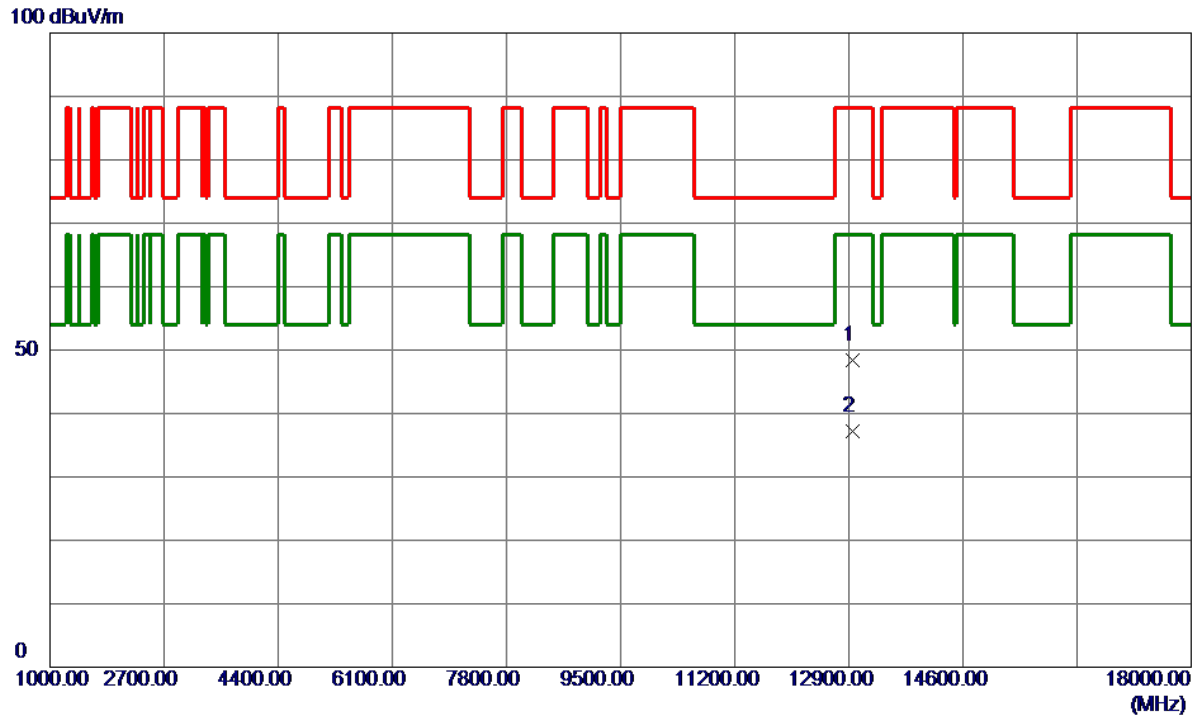


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12947.3200	36.45	11.94	48.39	88.20	-39.81	Peak	
2 *	12956.3400	25.32	11.93	37.25	68.20	-30.95	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE20 Mode 6515 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

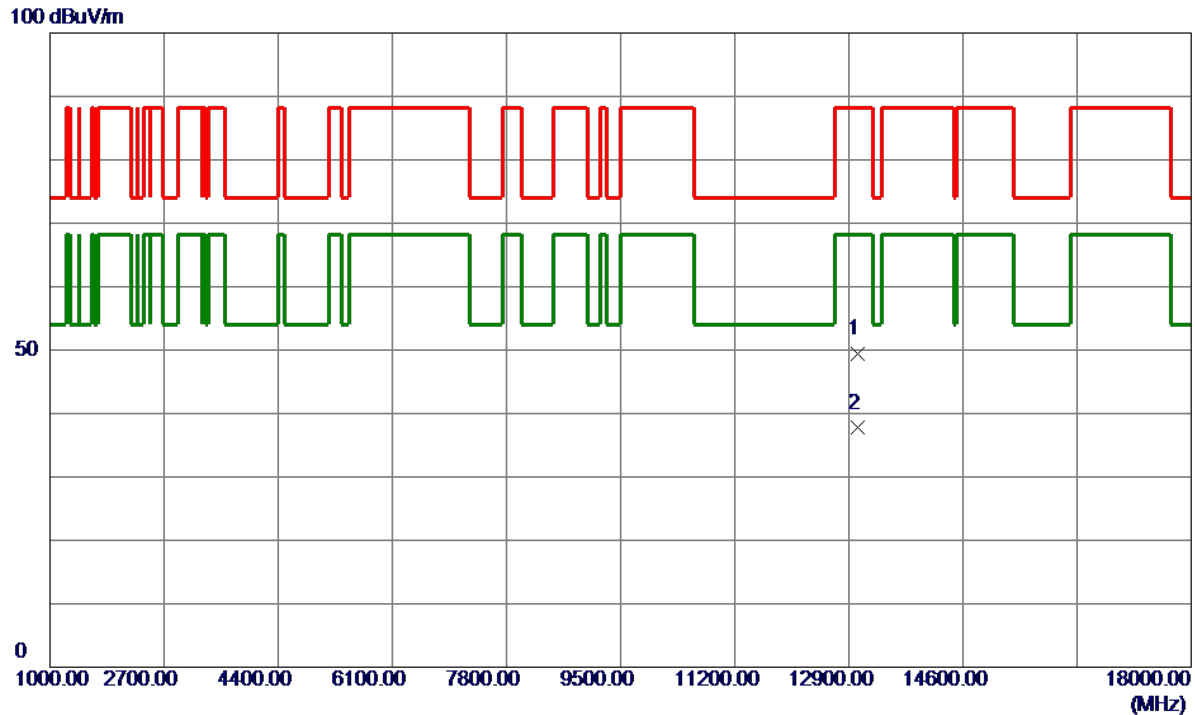


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13024.2400	37.45	11.92	49.37	88.20	-38.83	Peak	
2 *	13039.5599	25.76	11.94	37.70	68.20	-30.50	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE20 Mode 6535 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

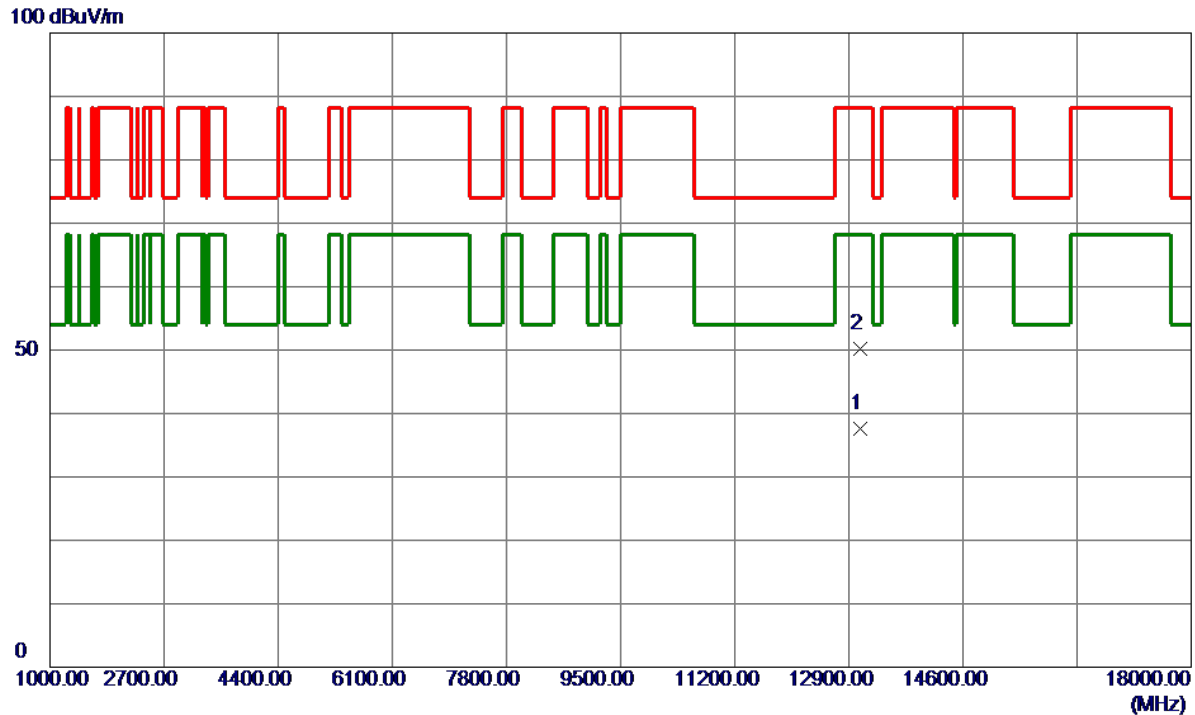


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13062.1000	25.72	11.97	37.69	68.20	-30.51	AVG	
2	13063.7600	38.30	11.98	50.28	88.20	-37.92	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE20 Mode 6695 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

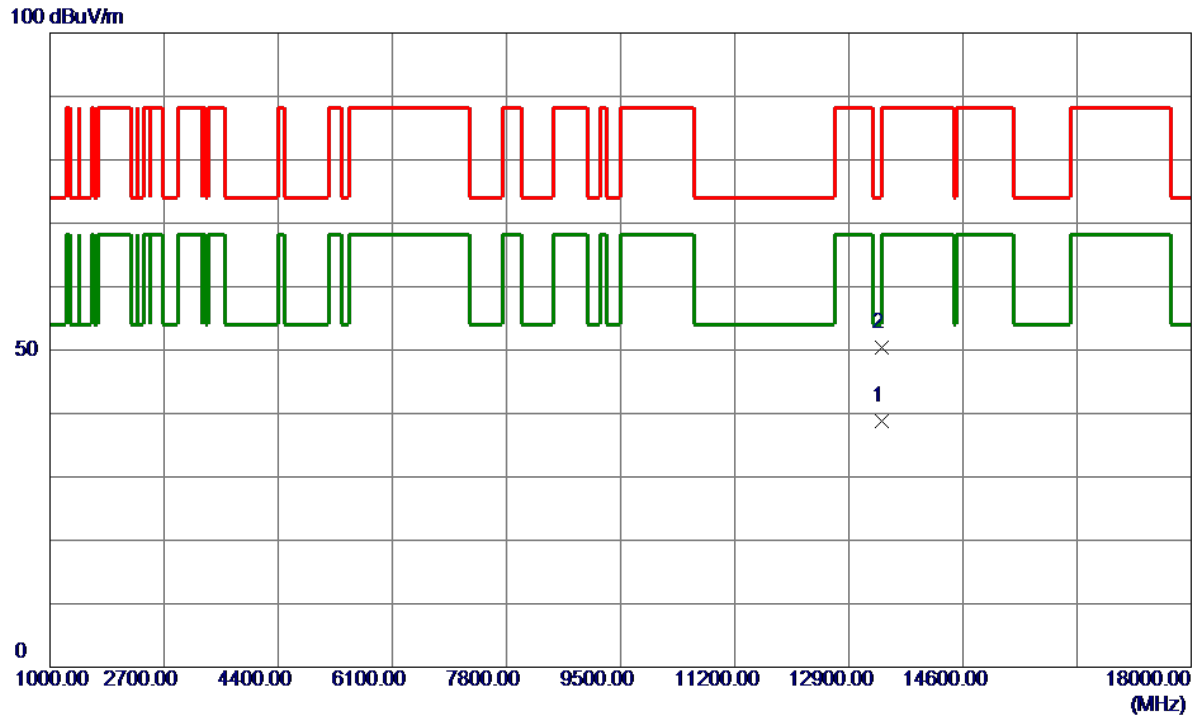


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13384.7600	26.36	12.41	38.77	54.00	-15.23	AVG	
2	13383.2200	38.00	12.41	50.41	74.00	-23.59	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE20 Mode 6855 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

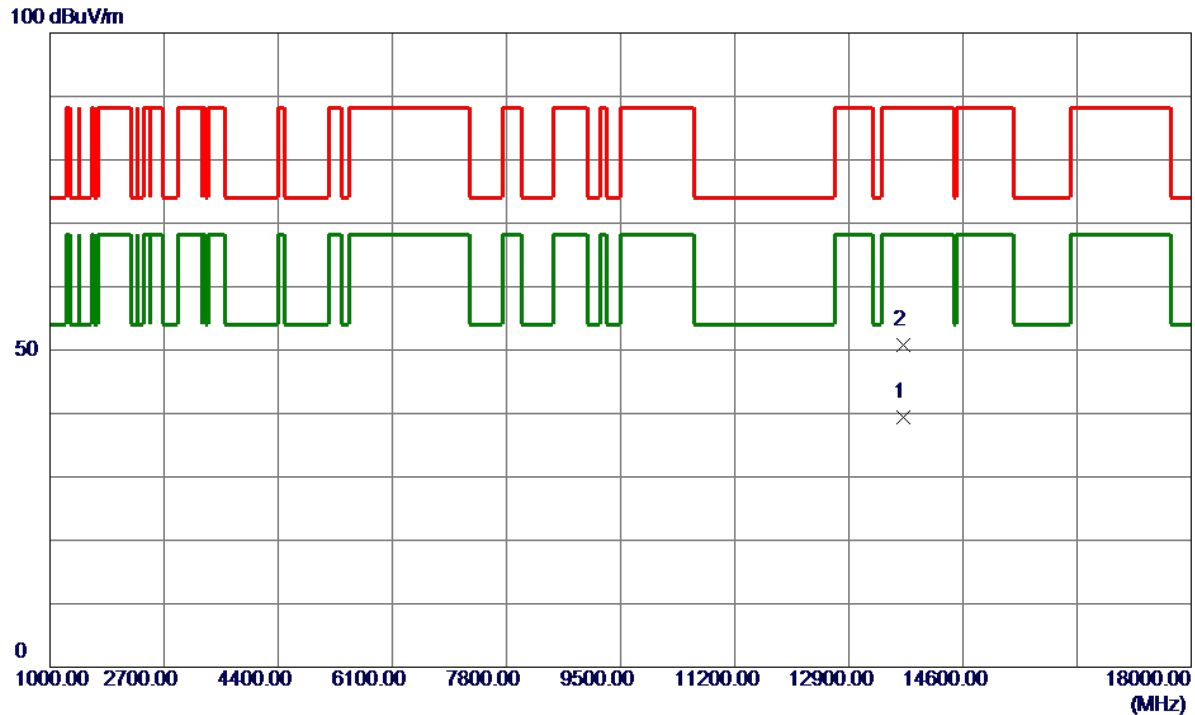


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13703.0400	26.59	12.72	39.31	68.20	-28.89	AVG	
2	13704.8600	38.11	12.72	50.83	88.20	-37.37	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE20 Mode 6875 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

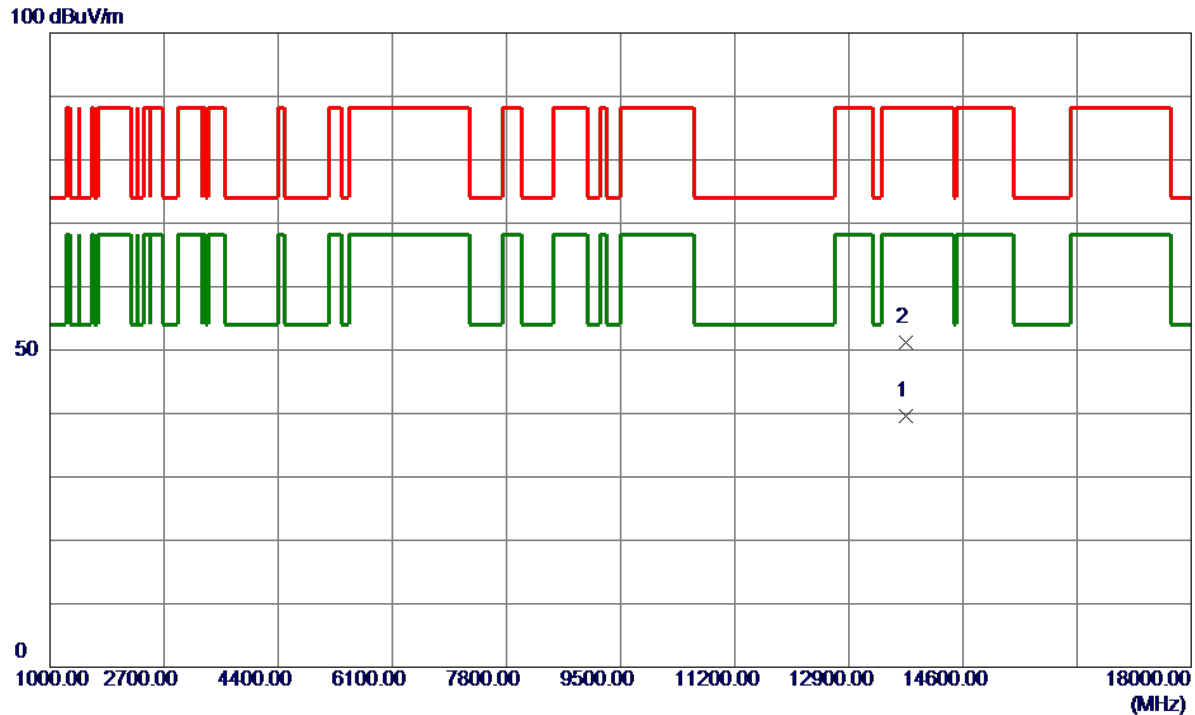


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13747.2600	26.80	12.75	39.55	68.20	-28.65	AVG	
2	13744.9200	38.44	12.75	51.19	88.20	-37.01	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE20 Mode 6995 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

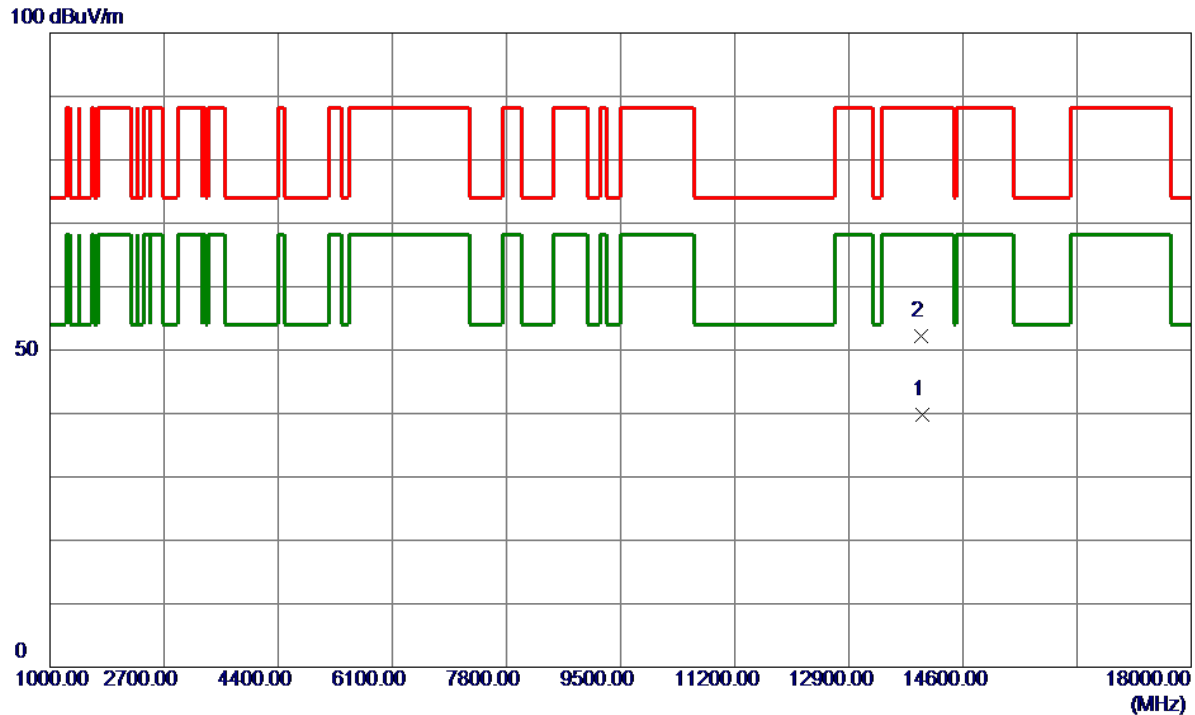


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13992.5800	26.84	12.92	39.76	68.20	-28.44	AVG	
2	13985.5000	39.20	12.92	52.12	88.20	-36.08	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE20 Mode 7115 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

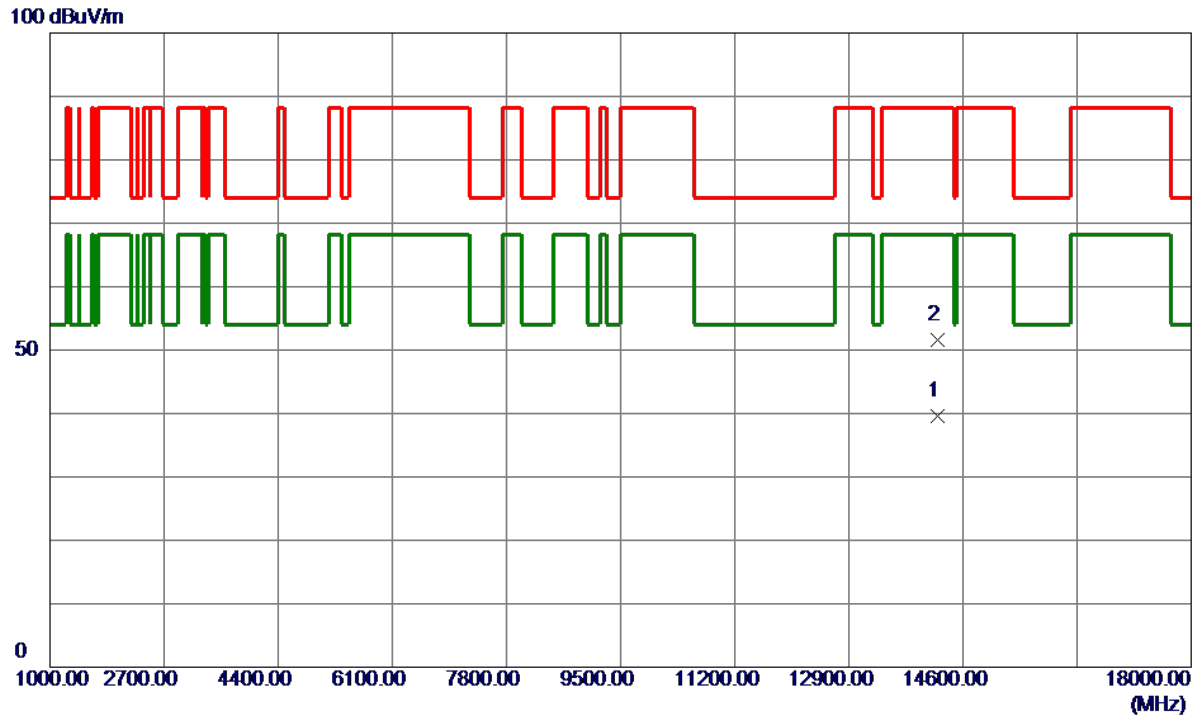


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	14221.6000	26.49	13.17	39.66	68.20	-28.54	AVG	
2	14223.8200	38.46	13.18	51.64	88.20	-36.56	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE40 Mode 5965 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

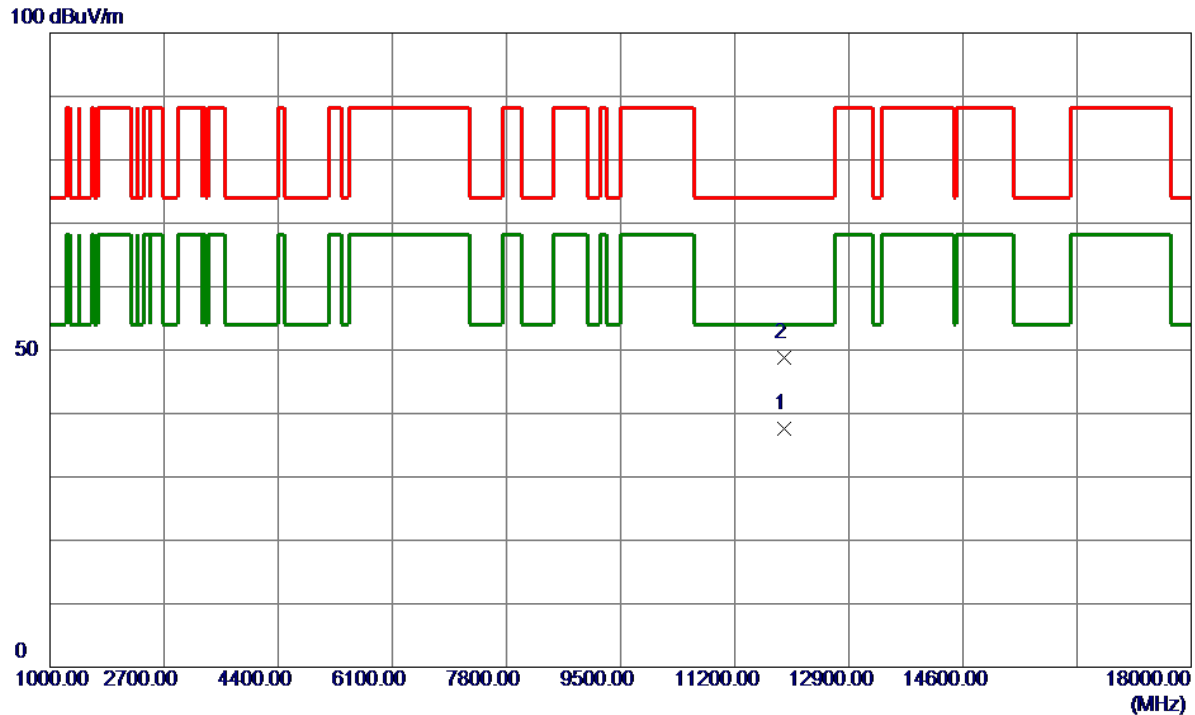


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11934.4400	24.35	13.24	37.59	54.00	-16.41	AVG	
2	11930.3200	35.55	13.24	48.79	74.00	-25.21	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE40 Mode 6165 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

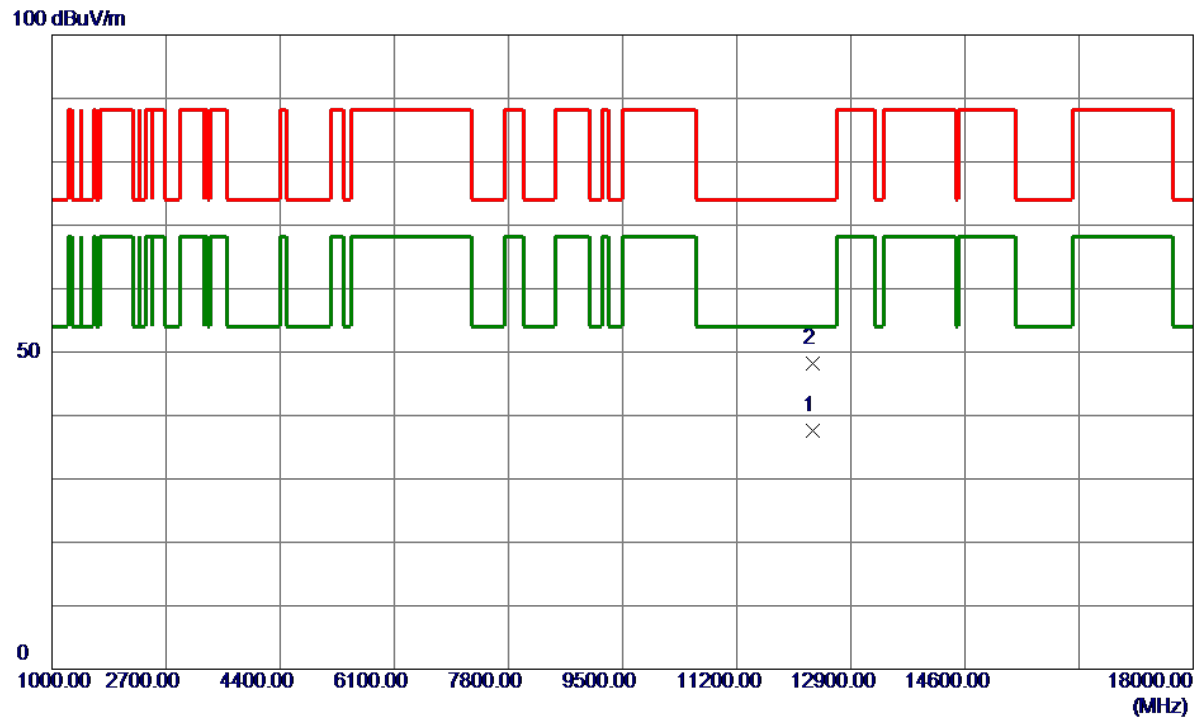


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12327.3800	24.93	12.65	37.58	54.00	-16.42	AVG	
2	12328.5800	35.58	12.64	48.22	74.00	-25.78	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE40 Mode 6405 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

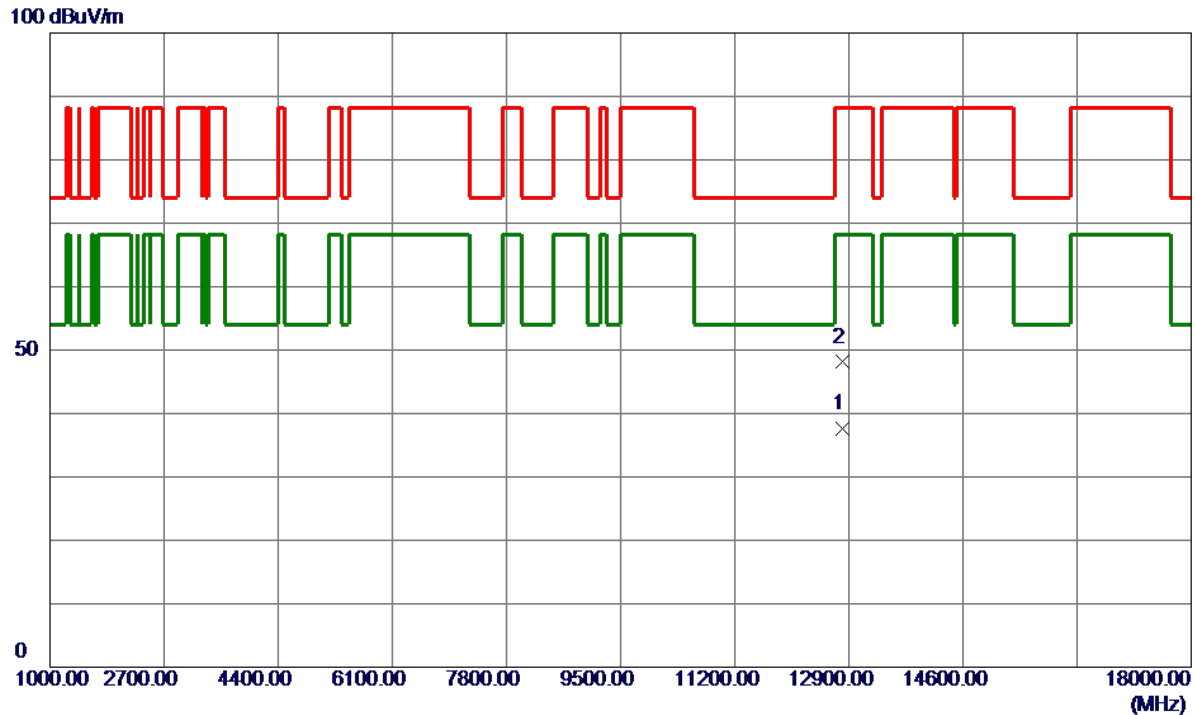


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12813.4600	25.44	12.08	37.52	68.20	-30.68	AVG	
2	12810.1500	36.02	12.08	48.10	88.20	-40.10	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE40 Mode 6445 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

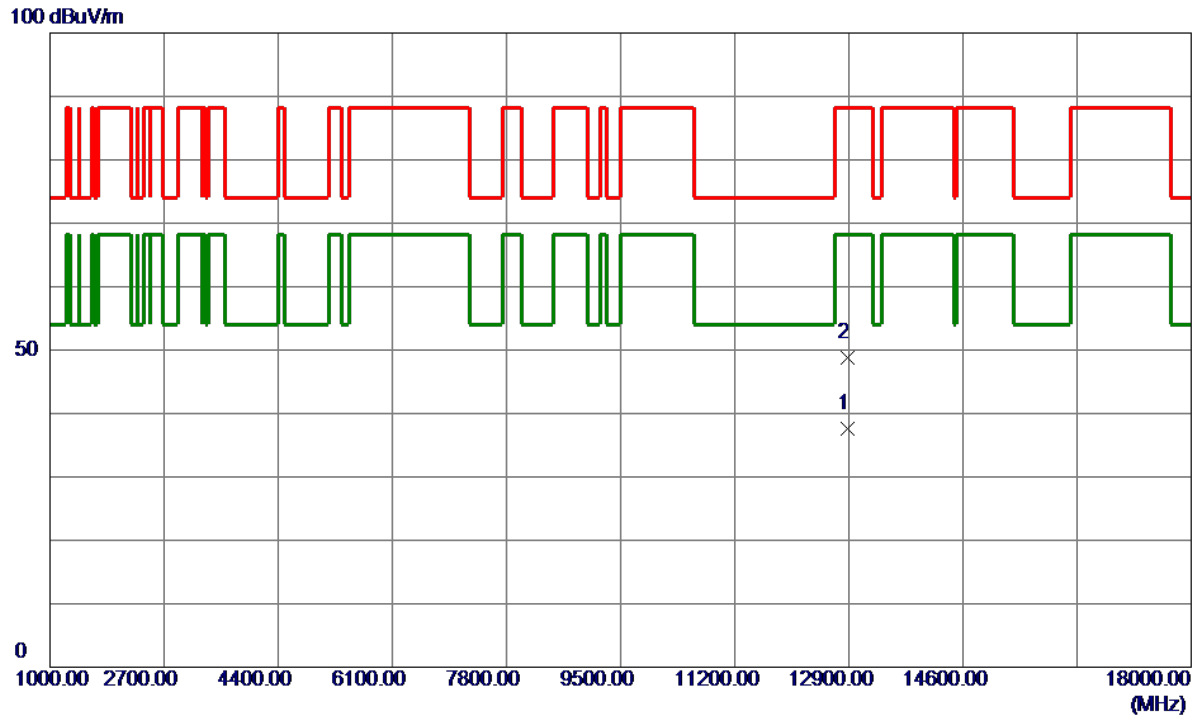


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12887.1800	25.66	12.00	37.66	68.20	-30.54	AVG	
2	12888.5900	36.88	12.00	48.88	88.20	-39.32	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE40 Mode 6485 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

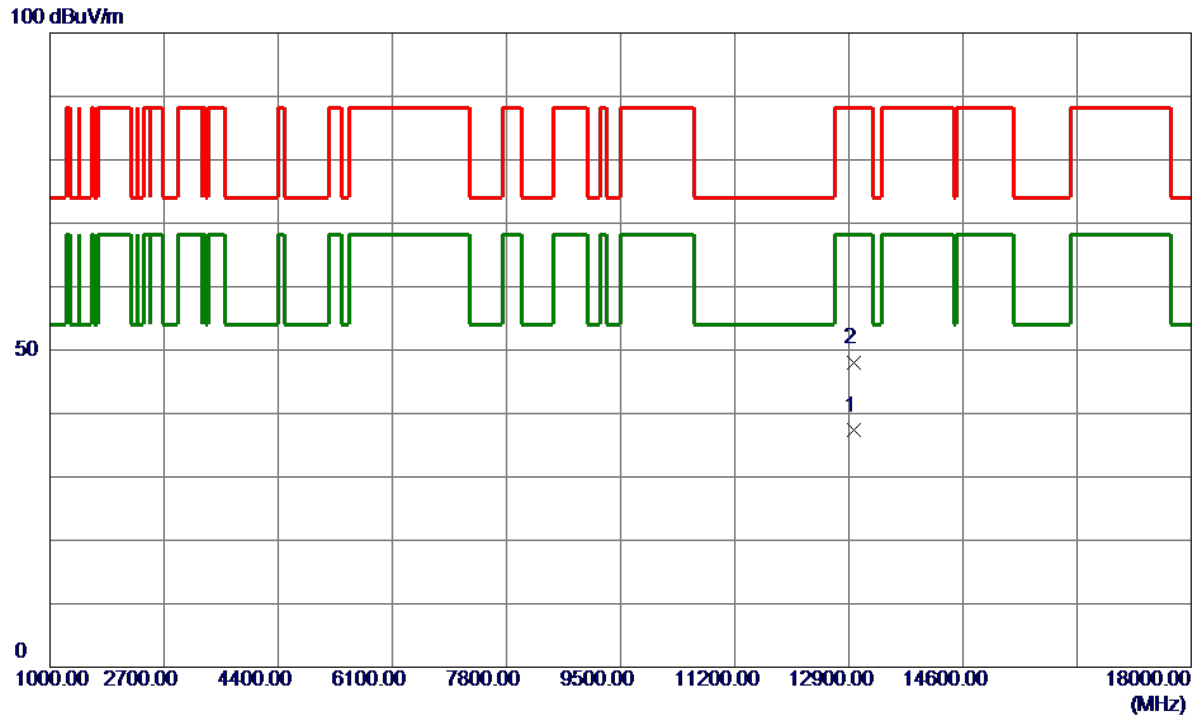


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12966.5900	25.38	11.92	37.30	68.20	-30.90	AVG	
2	12970.1300	36.09	11.92	48.01	88.20	-40.19	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE40 Mode 6525 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

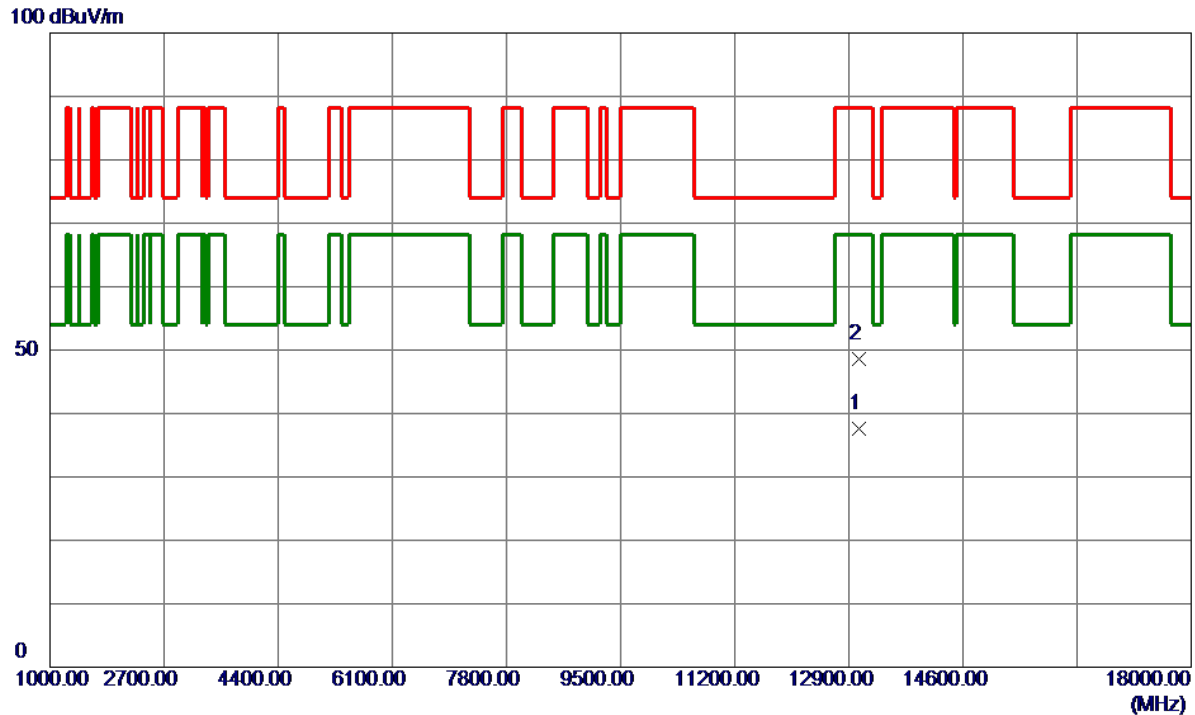


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13048.1900	25.64	11.96	37.60	68.20	-30.60	AVG	
2	13045.2100	36.62	11.95	48.57	88.20	-39.63	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE40 Mode 6565 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

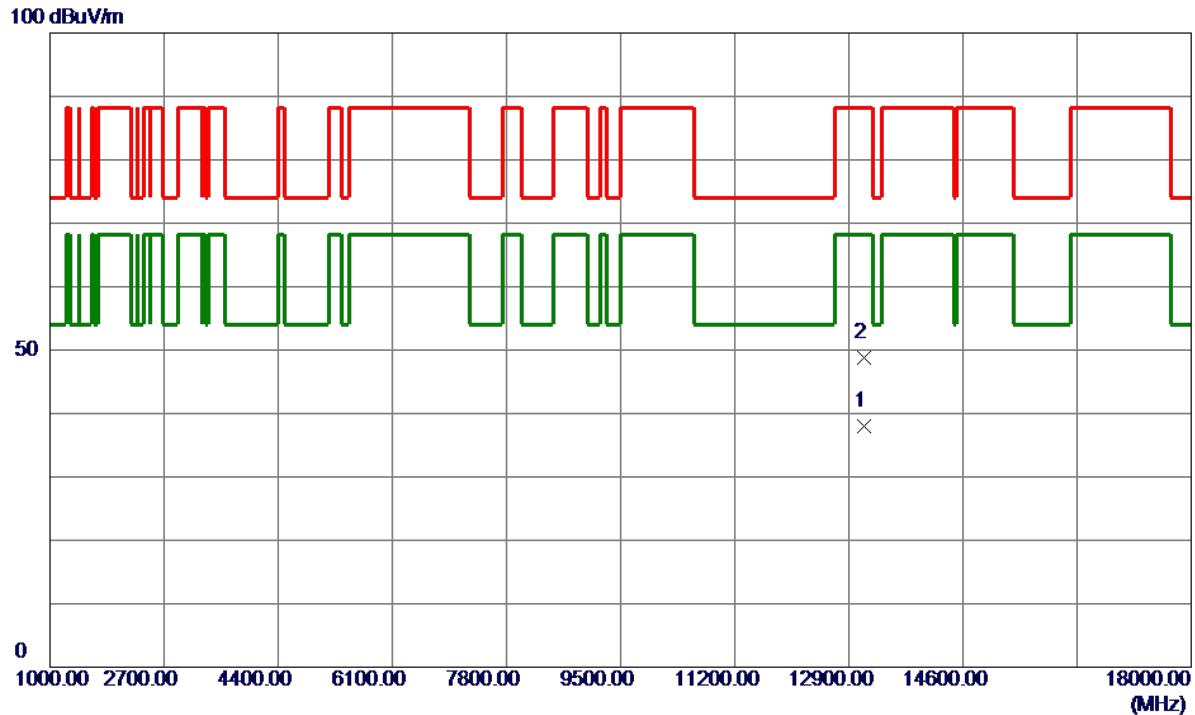


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13128.4000	25.98	12.06	38.04	68.20	-30.16	AVG	
2	13131.9000	36.75	12.07	48.82	88.20	-39.38	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE40 Mode 6725 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

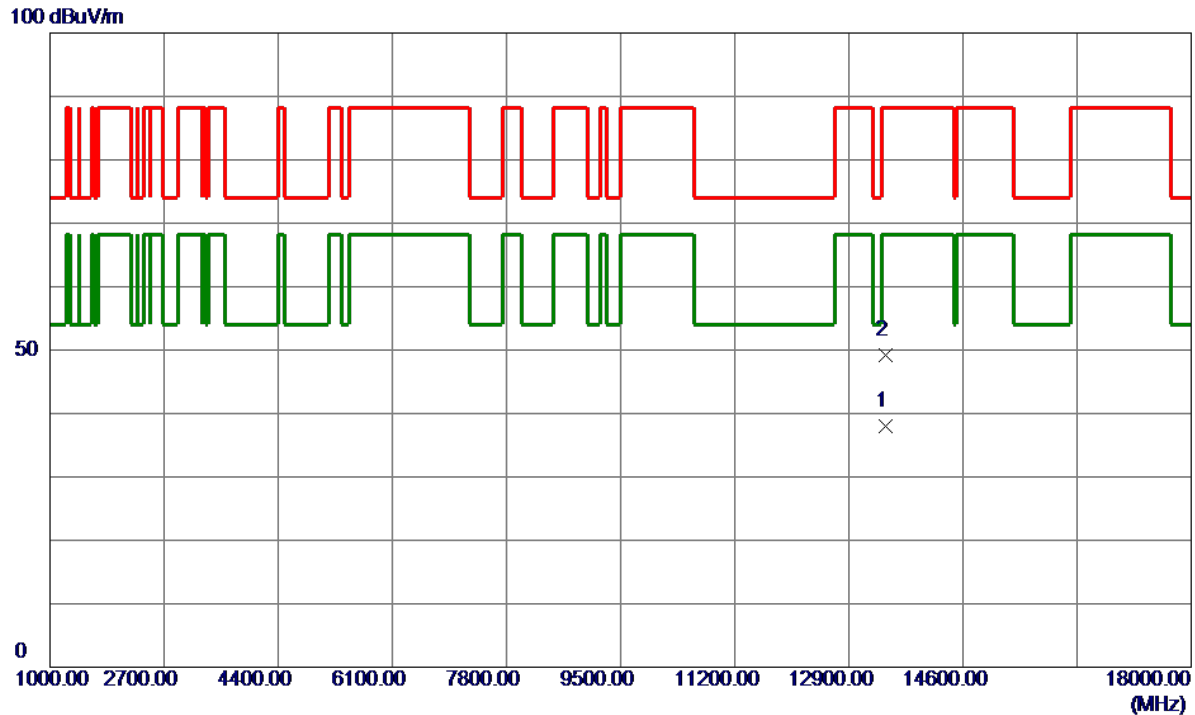


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13454.1400	25.43	12.51	37.94	68.20	-30.26	AVG	
2	13453.5700	36.60	12.51	49.11	88.20	-39.09	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE40 Mode 6845 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

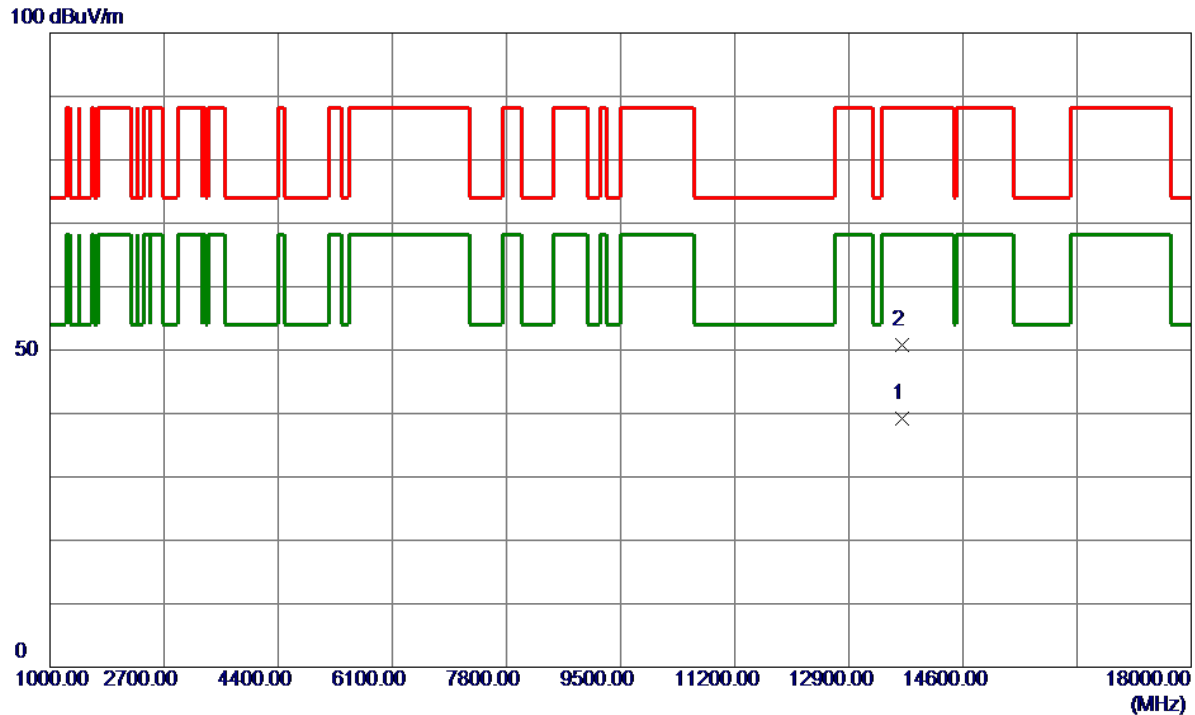


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13692.1700	26.49	12.71	39.20	68.20	-29.00	AVG	
2	13685.7200	38.13	12.70	50.83	88.20	-37.37	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE40 Mode 6885 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

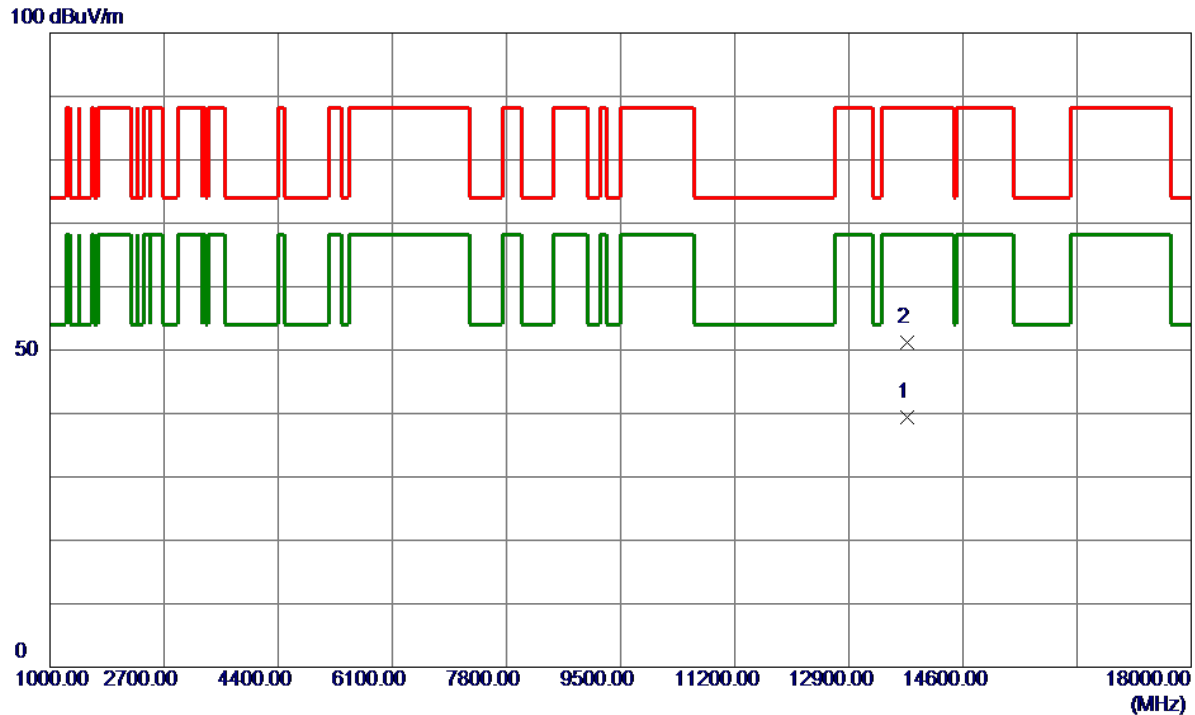


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13771.6500	26.71	12.77	39.48	68.20	-28.72	AVG	
2	13769.7400	38.39	12.76	51.15	88.20	-37.05	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE40 Mode 7005 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

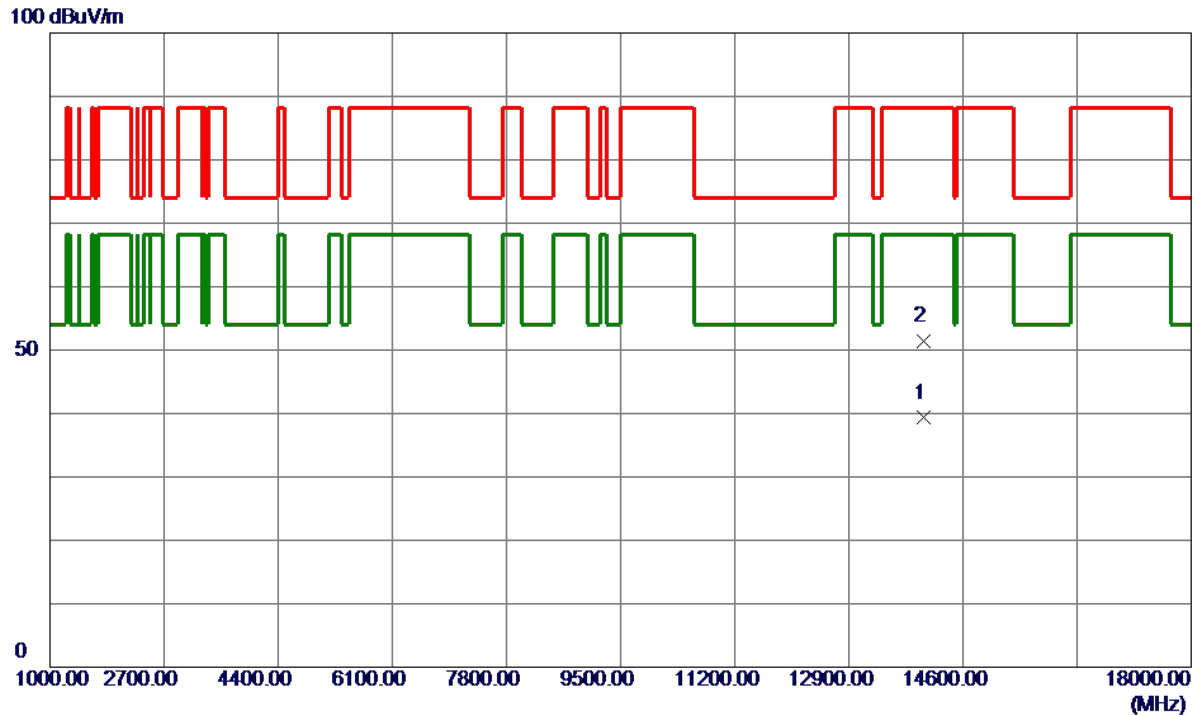


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	14014.7300	26.35	12.95	39.30	68.20	-28.90	AVG	
2	14011.6900	38.45	12.94	51.39	88.20	-36.81	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE40 Mode 7085 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

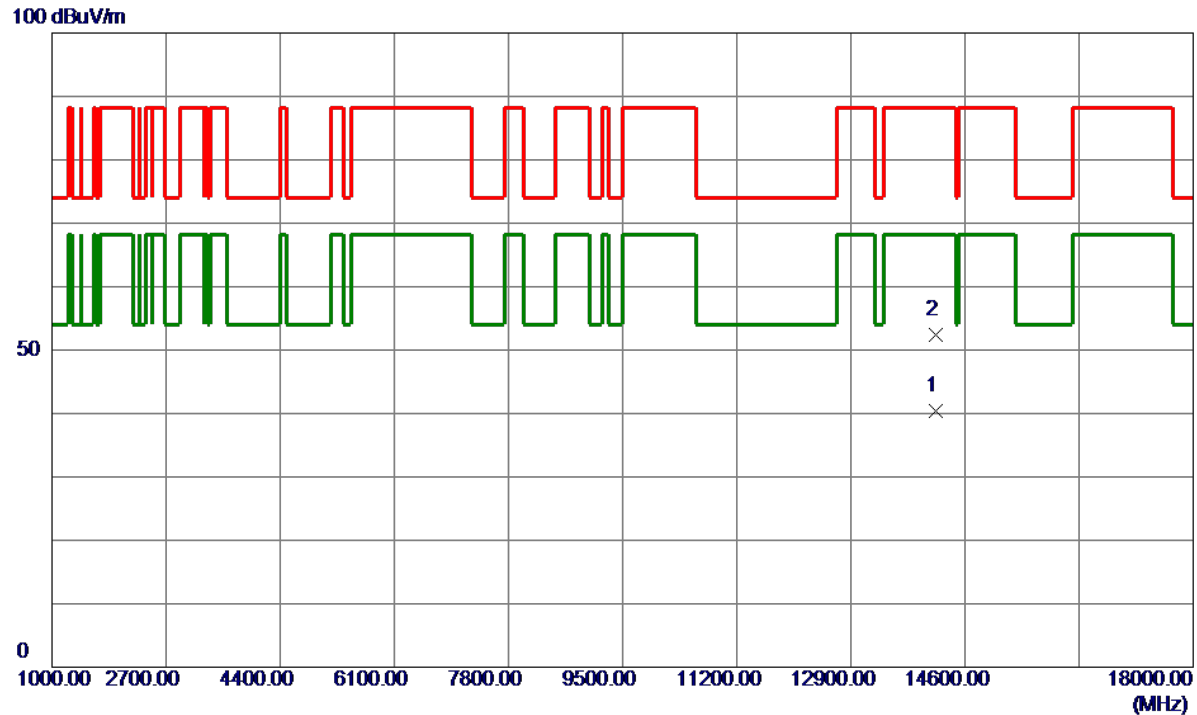


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	14173.7100	27.30	13.12	40.42	68.20	-27.78	AVG	
2	14167.1200	39.32	13.11	52.43	88.20	-35.77	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE80 Mode 5985 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

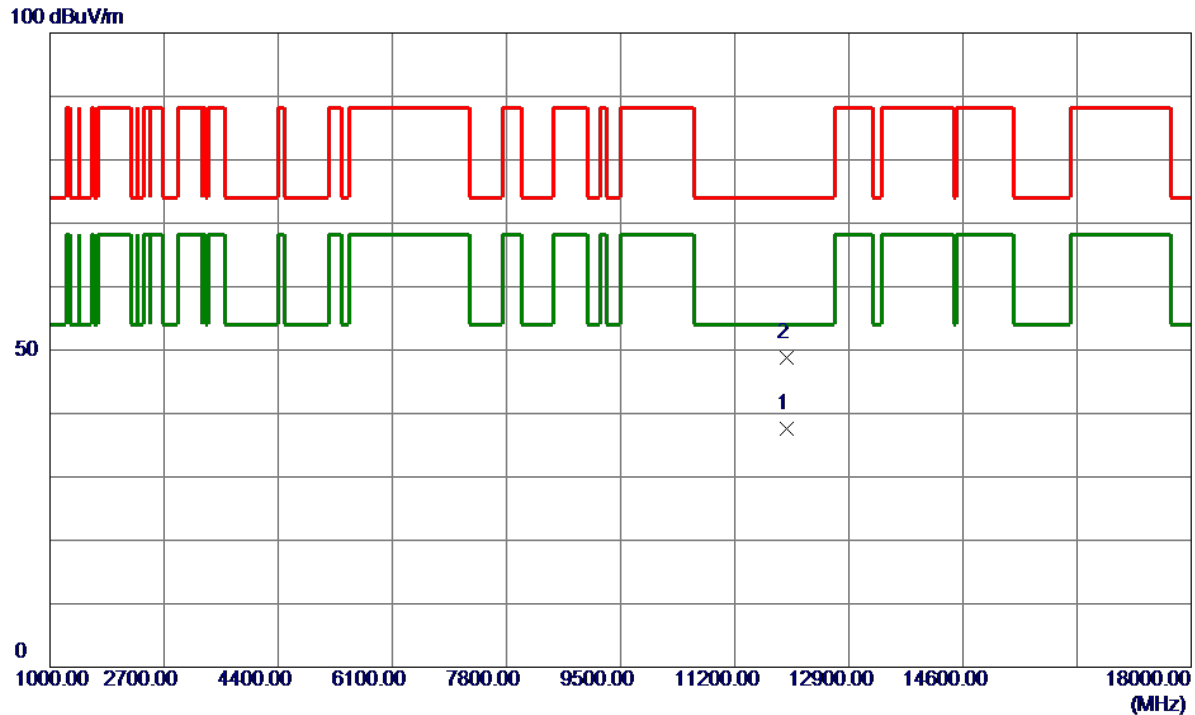


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11972.8500	24.49	13.17	37.66	54.00	-16.34	AVG	
2	11973.3600	35.66	13.17	48.83	74.00	-25.17	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE80 Mode 6145 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

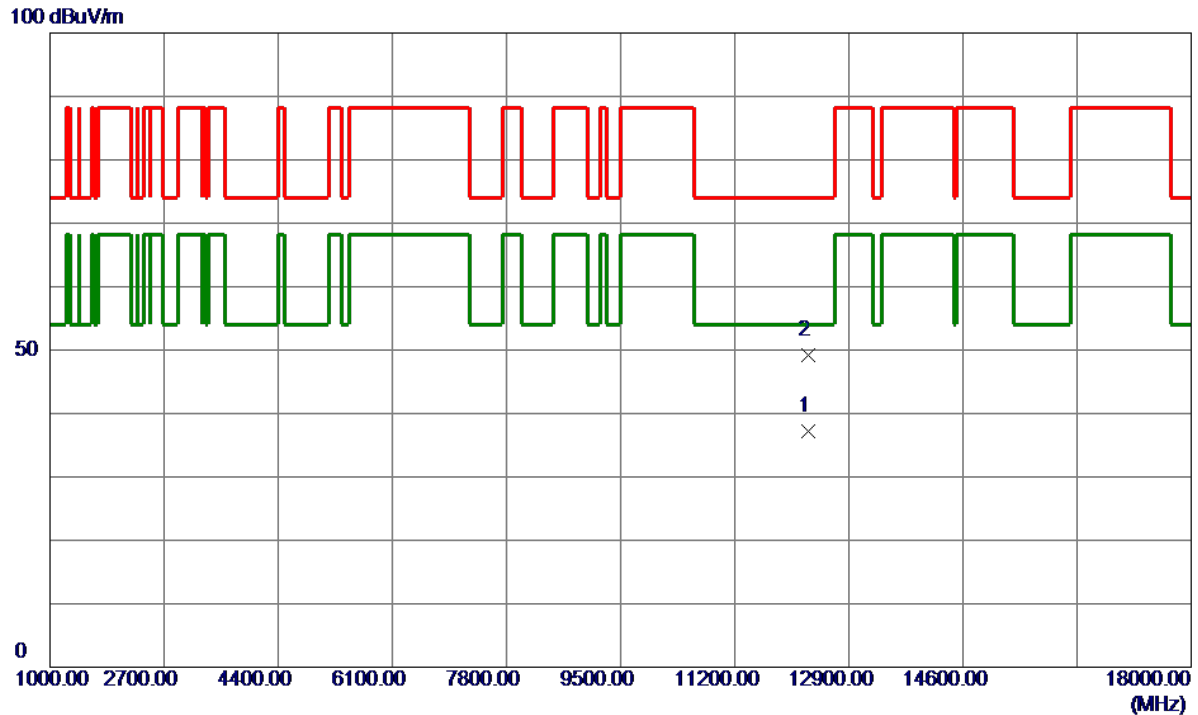


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12289.6400	24.46	12.70	37.16	54.00	-16.84	AVG	
2	12290.9100	36.42	12.70	49.12	74.00	-24.88	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE80 Mode 6385 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

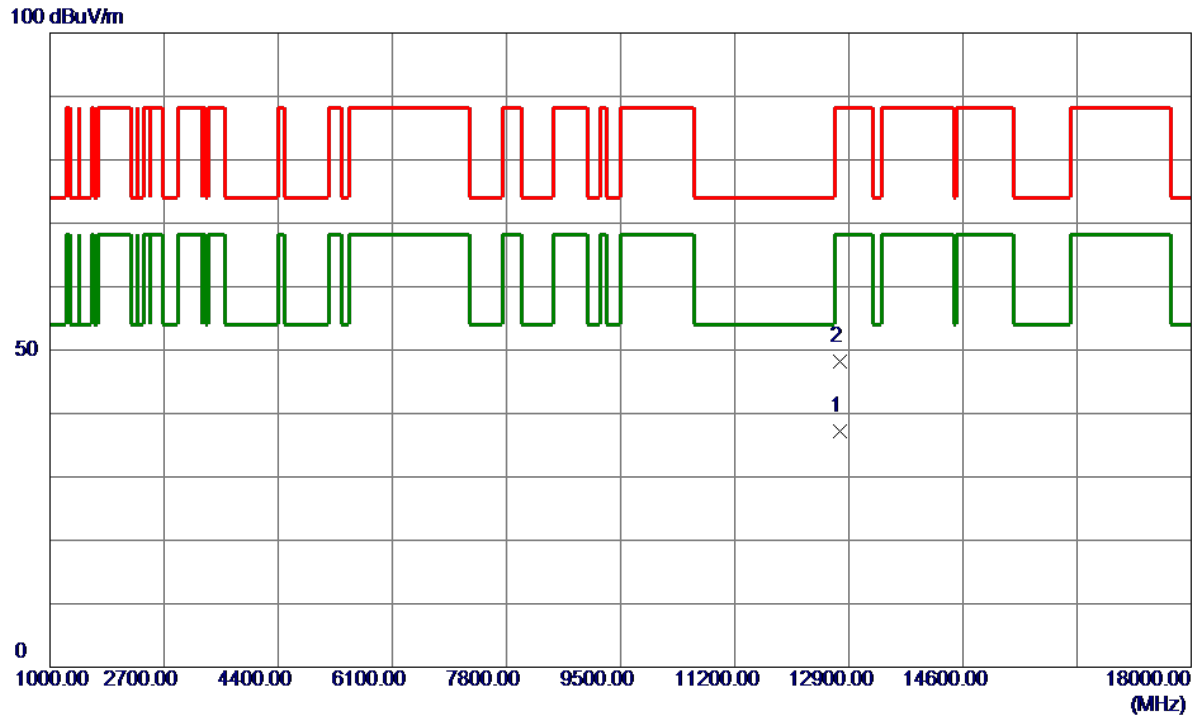


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12772.5800	25.05	12.12	37.17	68.20	-31.03	AVG	
2	12770.9800	36.12	12.12	48.24	88.20	-39.96	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE80 Mode 6465 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

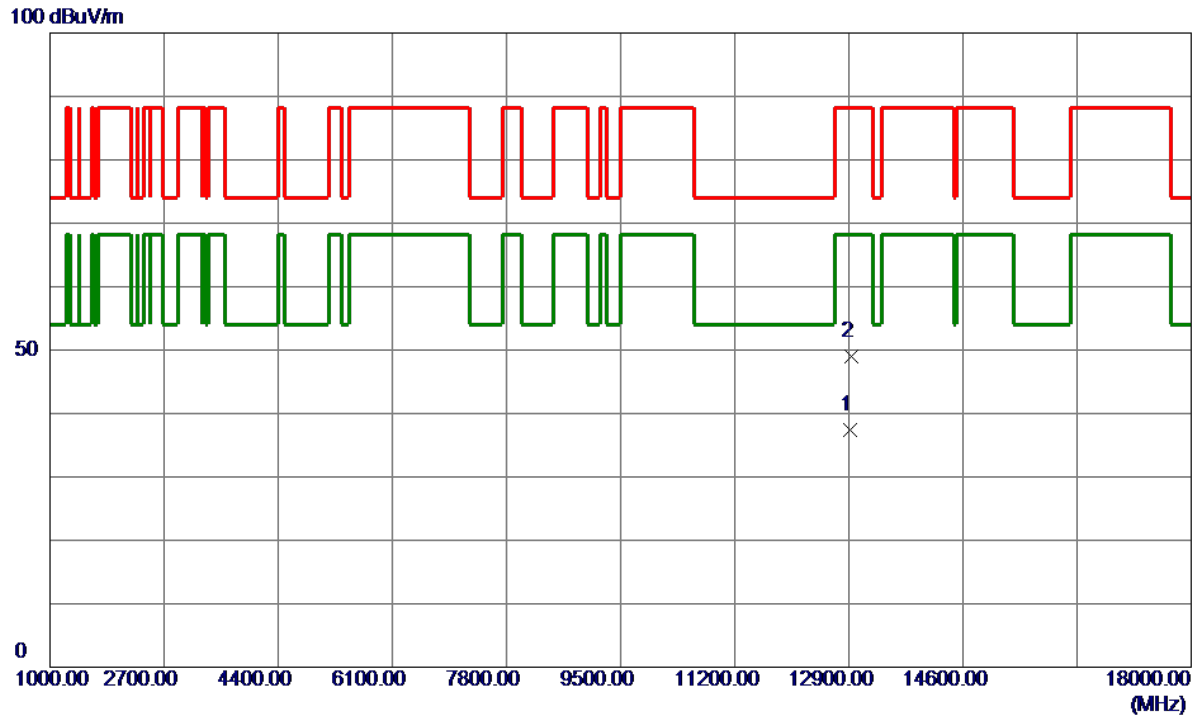


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12927.6600	25.53	11.96	37.49	68.20	-30.71	AVG	
2	12929.3000	36.97	11.96	48.93	88.20	-39.27	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE80 Mode 6545 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

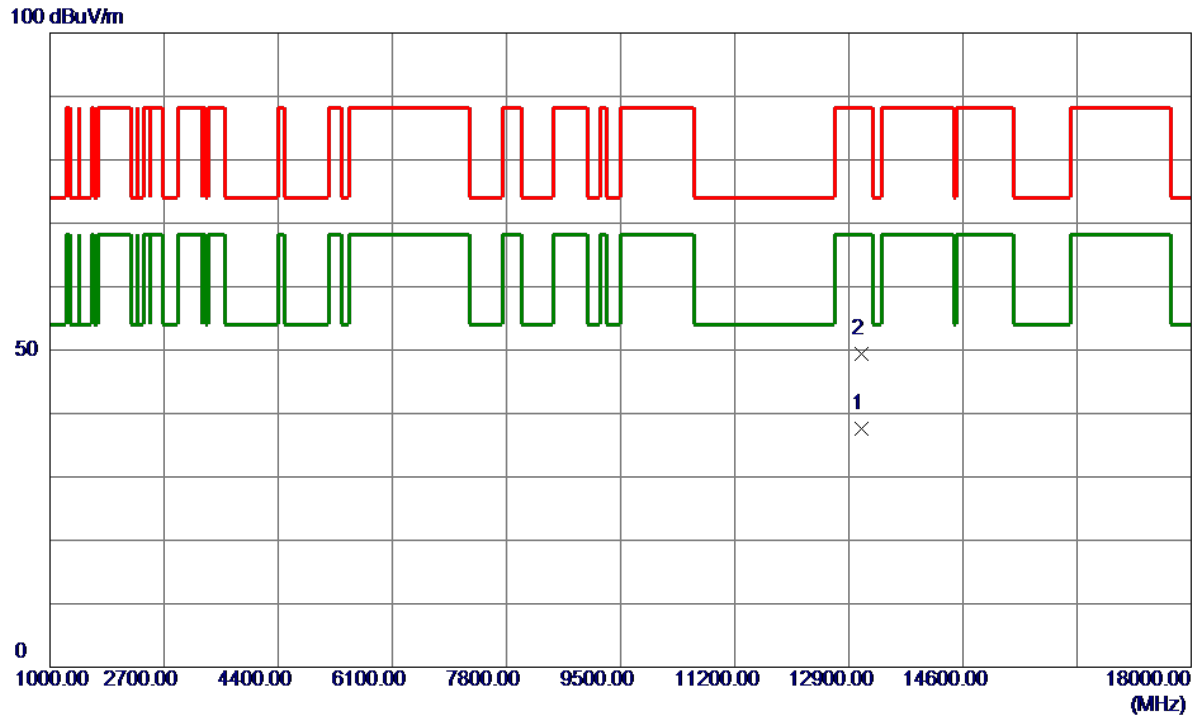


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13093.4900	25.50	12.02	37.52	68.20	-30.68	AVG	
2	13086.6900	37.32	12.01	49.33	88.20	-38.87	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE80 Mode 6705 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

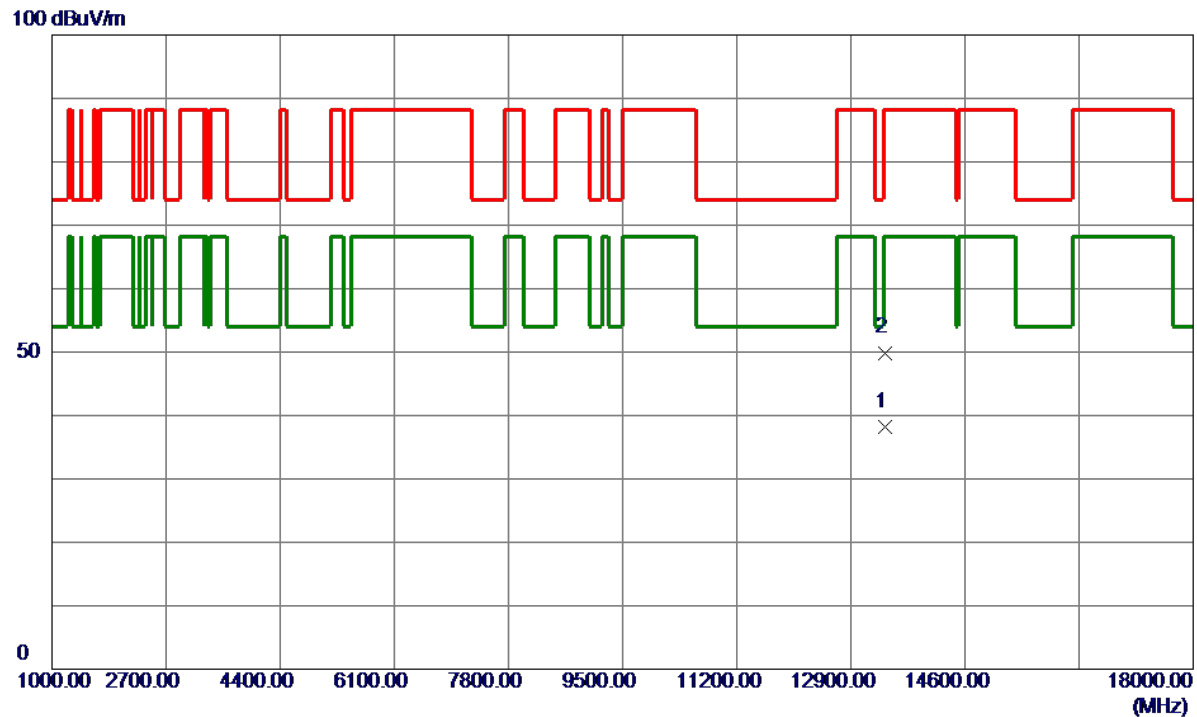


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13410.1000	25.83	12.45	38.28	68.20	-29.92	AVG	
2	13409.8099	37.45	12.45	49.90	88.20	-38.30	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE80 Mode 6865 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

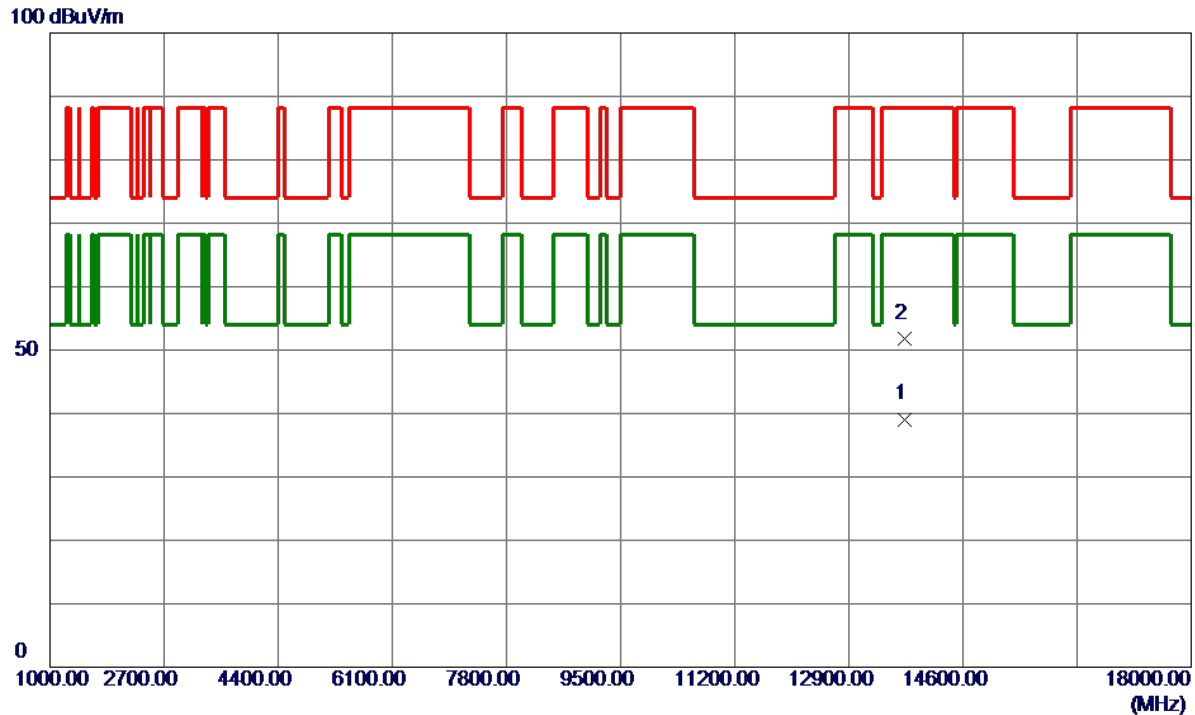


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13729.6400	26.36	12.74	39.10	68.20	-29.10	AVG	
2	13733.7200	39.09	12.74	51.83	88.20	-36.37	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE80 Mode 6945 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

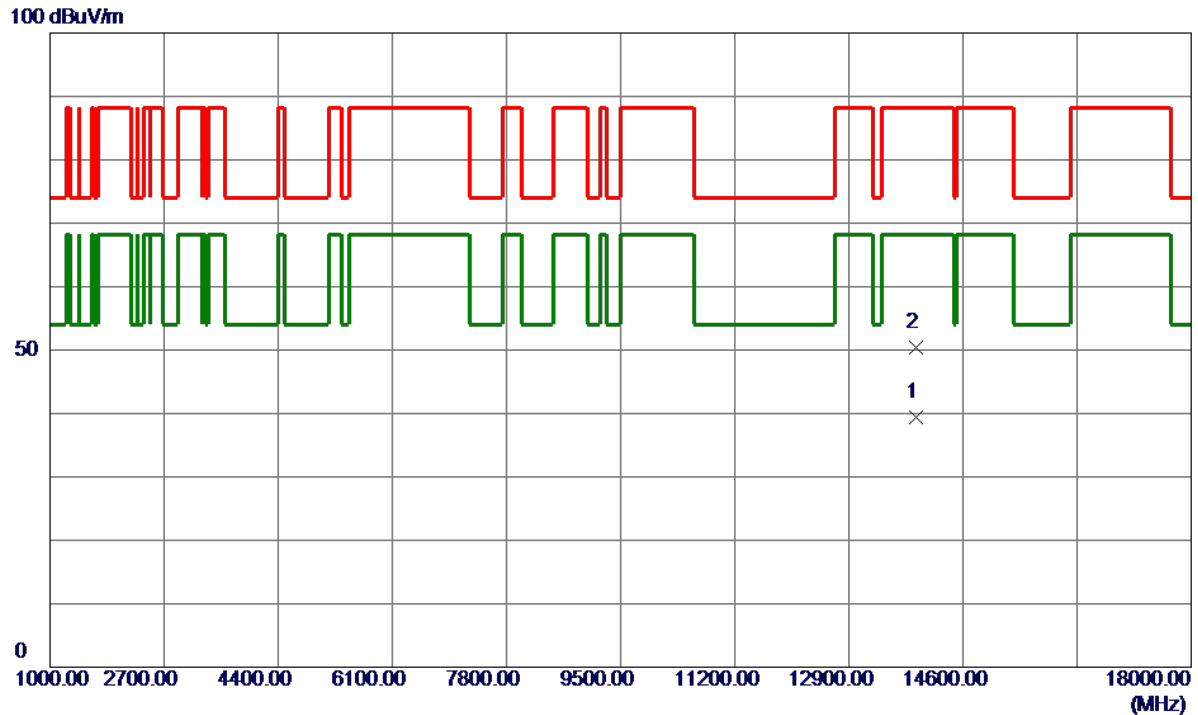


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13892.3700	26.56	12.85	39.41	68.20	-28.79	AVG	
2	13892.9200	37.55	12.85	50.40	88.20	-37.80	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE80 Mode 7025 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

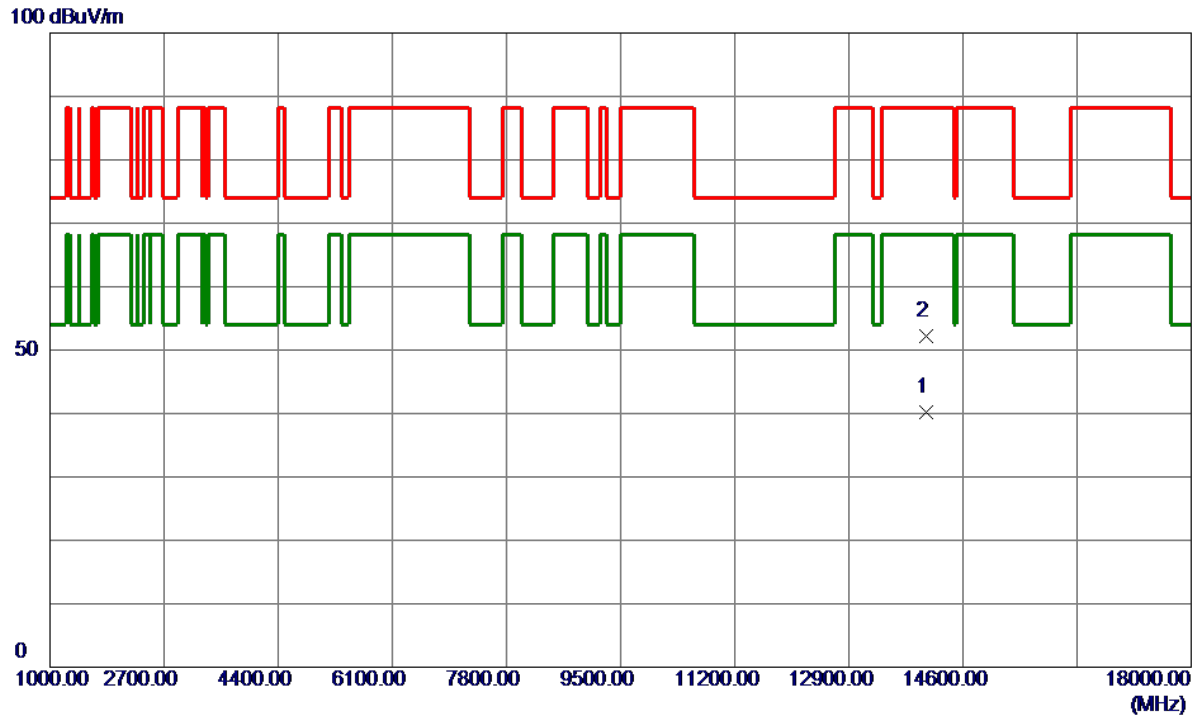


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	14053.7400	27.15	12.99	40.14	68.20	-28.06	AVG	
2	14046.4600	39.31	12.98	52.29	88.20	-35.91	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE160 Mode 6025 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

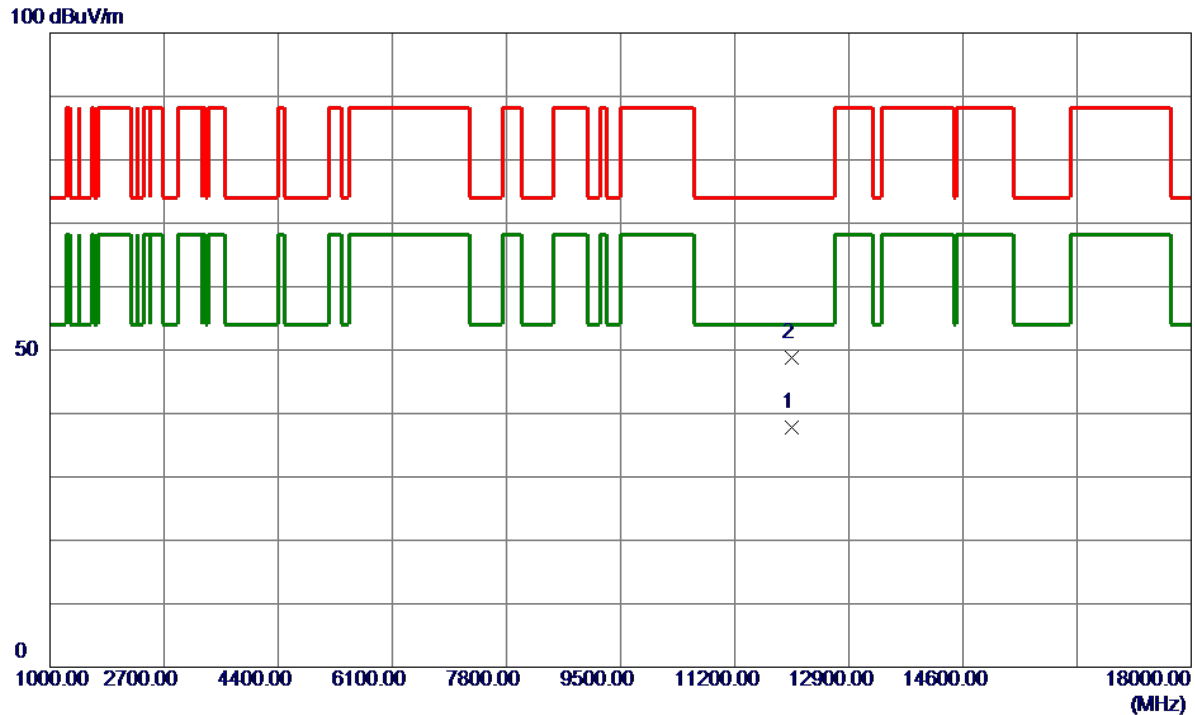


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12049.2400	24.72	13.06	37.78	54.00	-16.22	AVG	
2	12050.8700	35.78	13.05	48.83	74.00	-25.17	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE160 Mode 6185 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

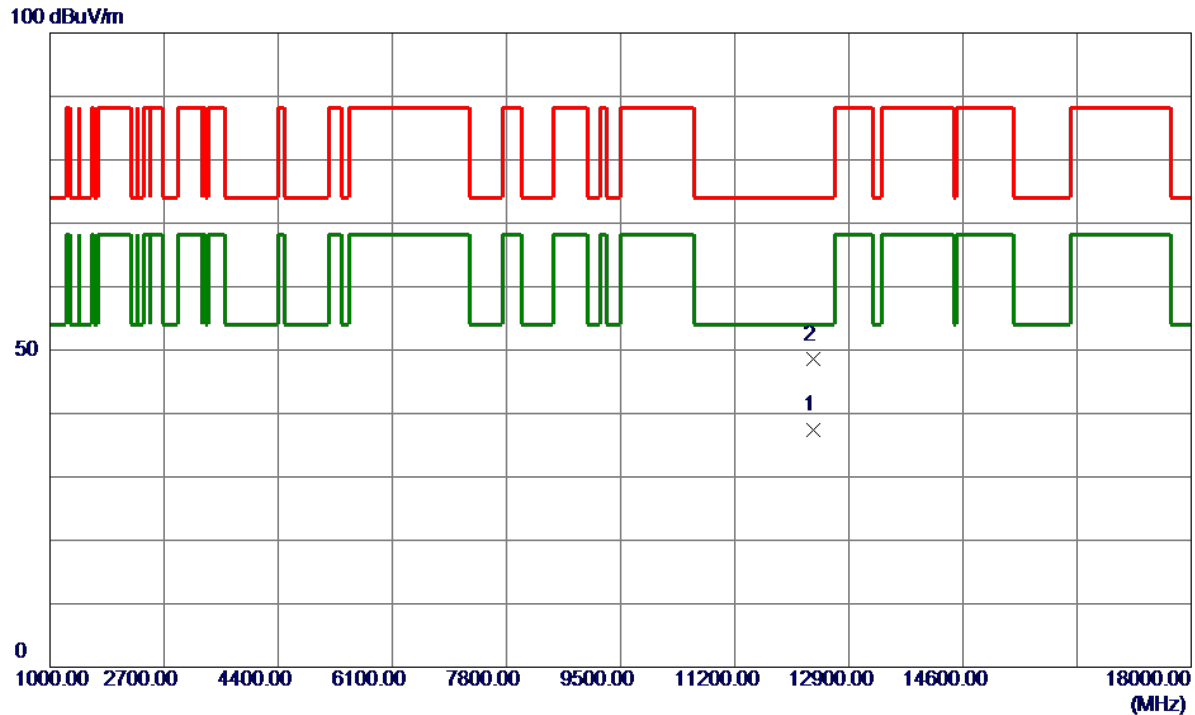


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12365.0500	24.88	12.59	37.47	54.00	-16.53	AVG	
2	12372.2500	35.92	12.58	48.50	74.00	-25.50	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE160 Mode 6345 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

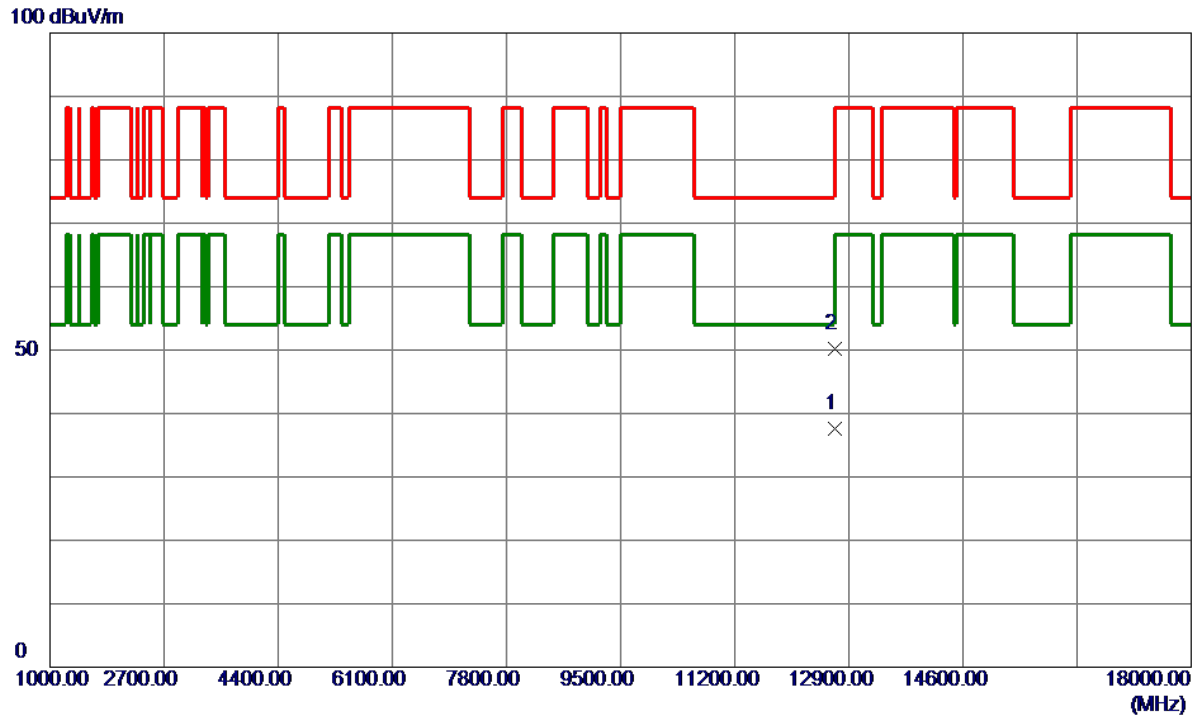


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	12693.8900	25.32	12.20	37.52	54.00	-16.48	AVG	
2	12691.0800	38.02	12.20	50.22	74.00	-23.78	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE160 Mode 6505 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

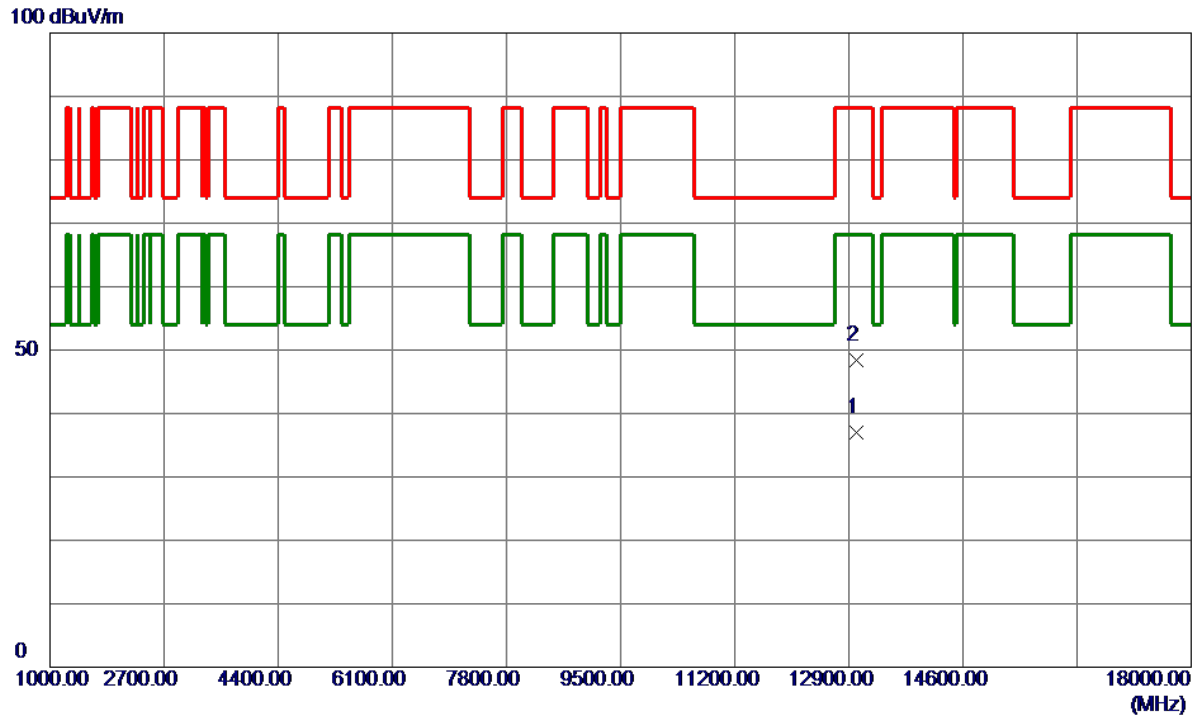


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13010.3500	25.12	11.90	37.02	68.20	-31.18	AVG	
2	13012.0400	36.56	11.91	48.47	88.20	-39.73	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE160 Mode 6665 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

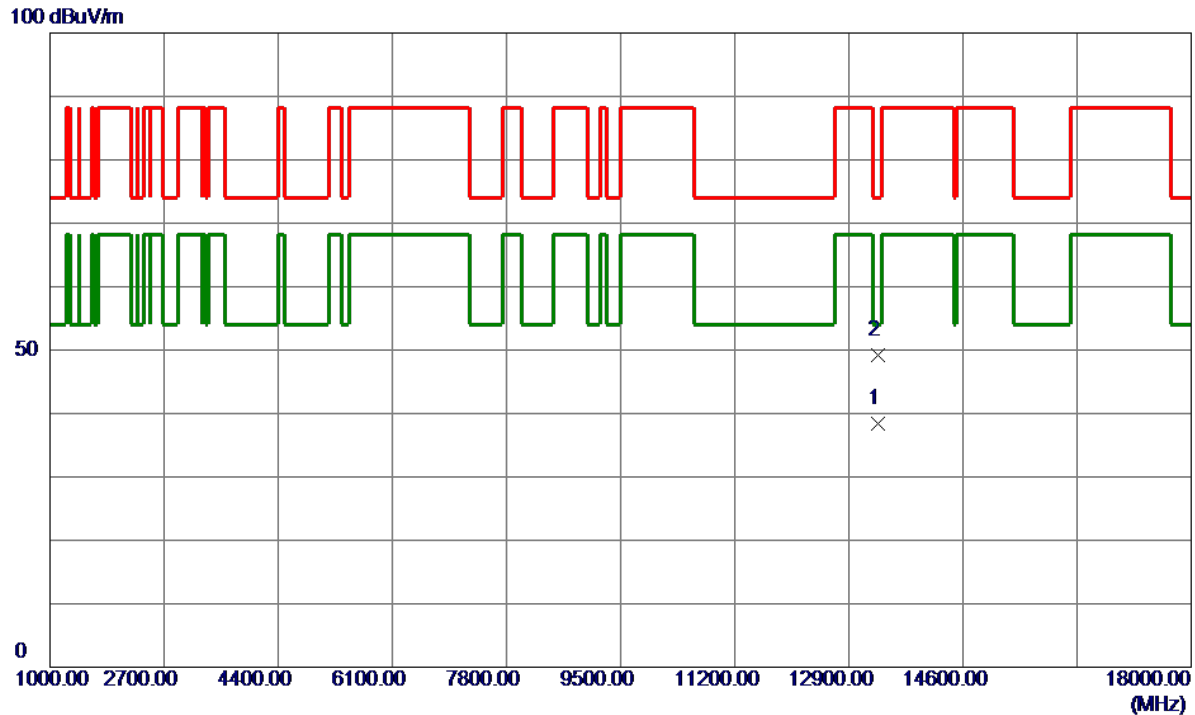


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13333.4200	26.04	12.34	38.38	54.00	-15.62	AVG	
2	13333.0199	36.80	12.34	49.14	74.00	-24.86	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE160 Mode 6825 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

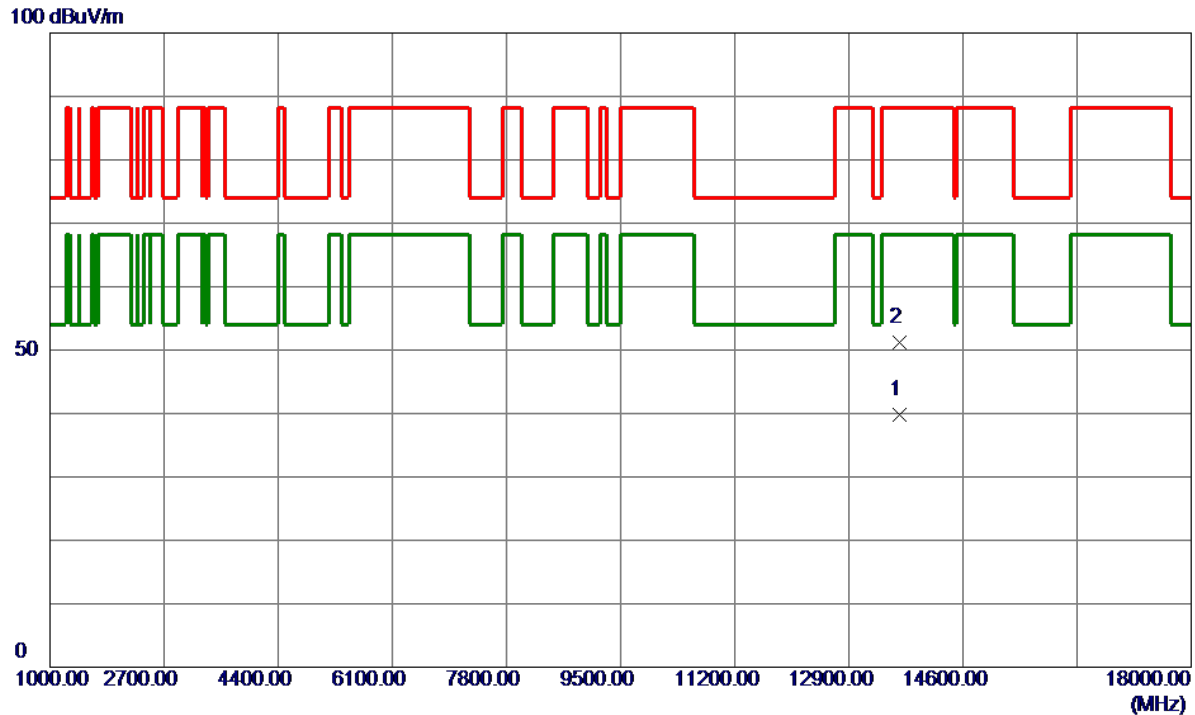


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13654.3700	27.10	12.68	39.78	68.20	-28.42	AVG	
2	13653.8800	38.58	12.68	51.26	88.20	-36.94	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE160 Mode 6985 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

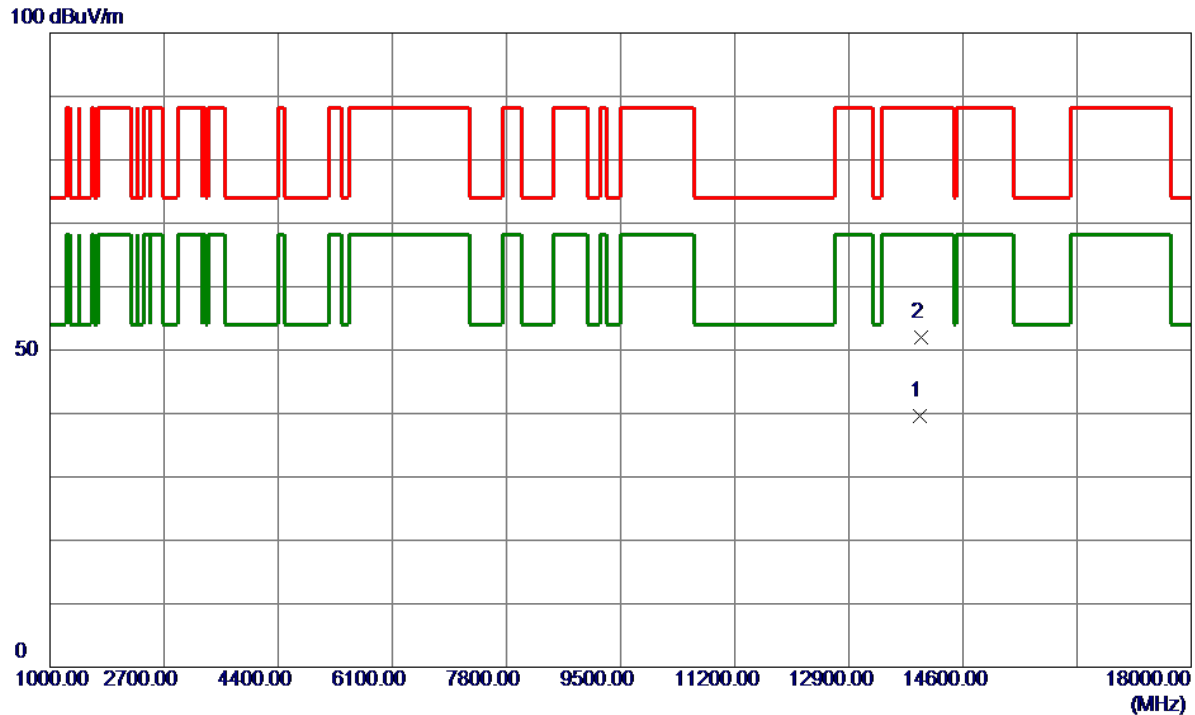


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13965.7500	26.78	12.91	39.69	68.20	-28.51	AVG	
2	13973.6400	39.18	12.91	52.09	88.20	-36.11	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE160 Mode 6985 MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

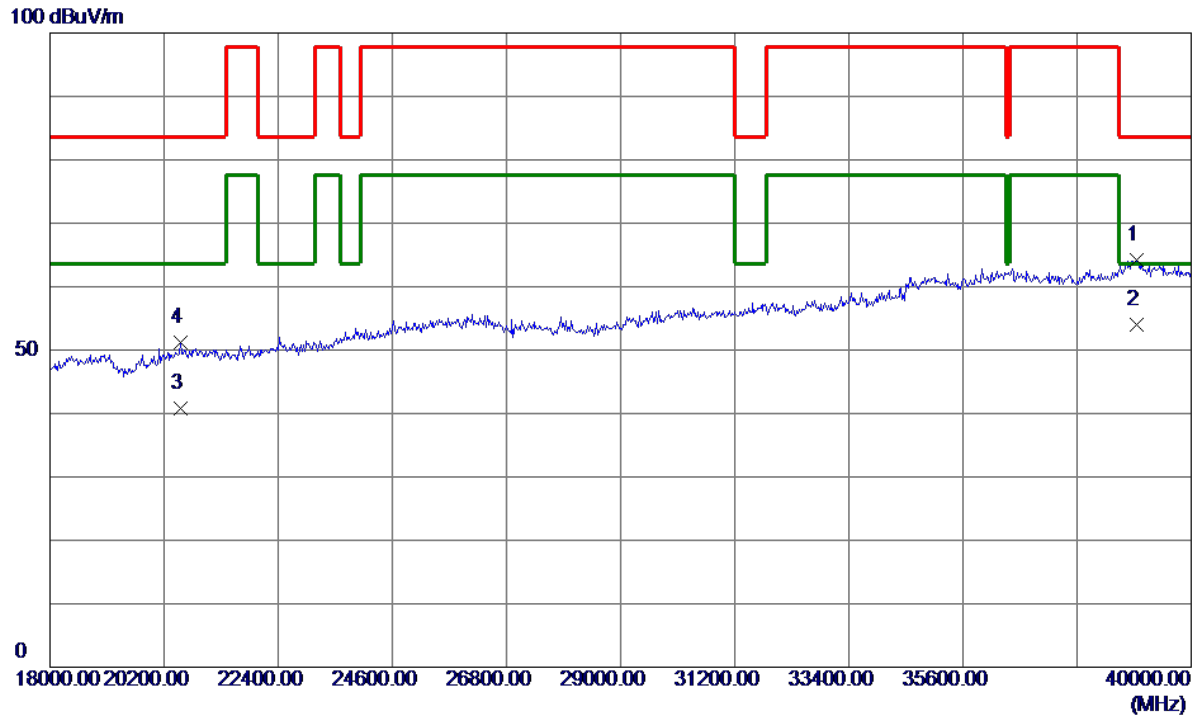


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38944.0000	49.26	14.97	64.23	83.50	-19.27	Peak	
2 *	38944.0000	38.97	14.97	53.94	63.50	-9.56	AVG	
3	20508.0000	38.19	2.54	40.73	63.50	-22.77	AVG	
4	20508.0000	48.72	2.54	51.26	83.50	-32.24	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE160 Mode 6985 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

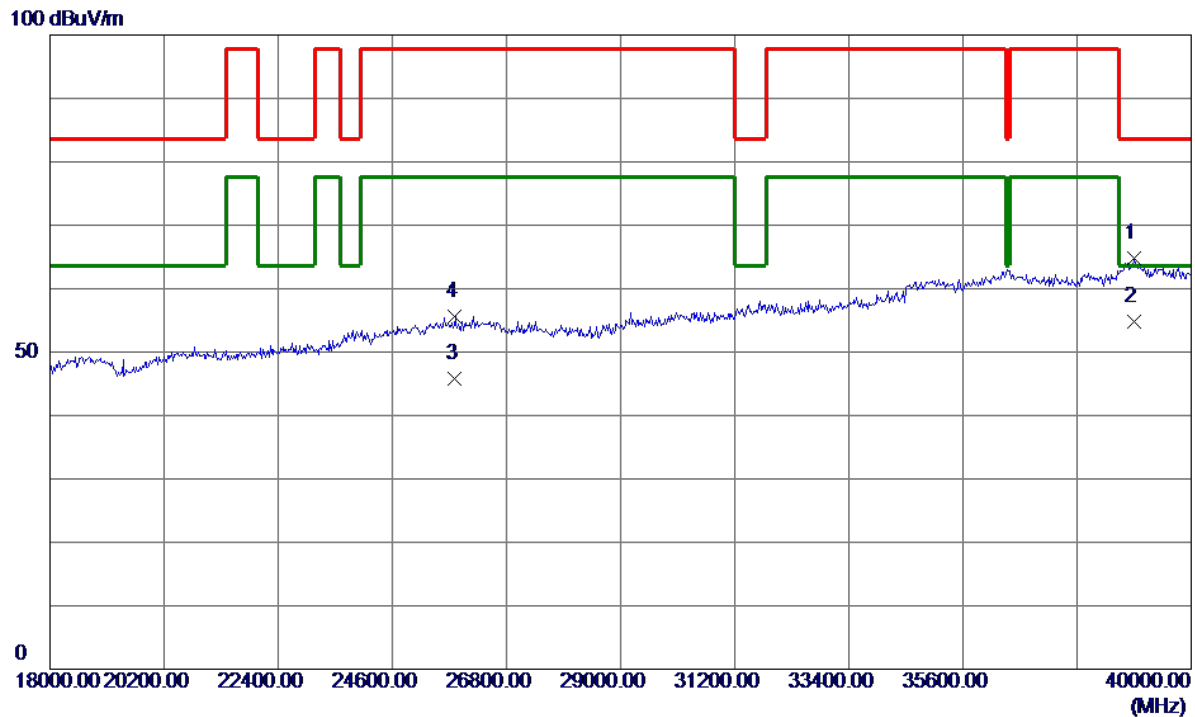

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38900.0000	49.99	14.84	64.83	83.50	-18.67	Peak	
2 *	38900.0000	39.89	14.84	54.73	63.50	-8.77	AVG	
3	25810.0000	37.28	8.58	45.86	77.70	-31.84	AVG	
4	25810.0000	47.11	8.58	55.69	97.70	-42.01	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

Worst case:

Test Mode	UNII-7_TX A Mode 6695 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

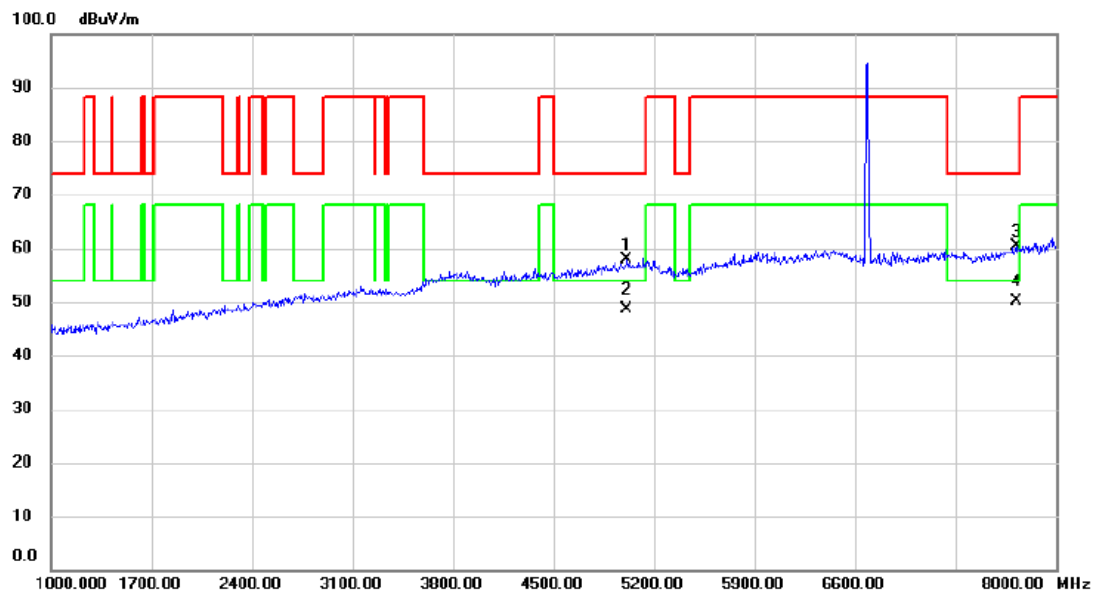

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5011.000	42.02	15.82	57.84	74.00	-16.16	peak	
2		5011.000	32.89	15.82	48.71	54.00	-5.29	AVG	
3		7720.000	40.32	19.96	60.28	74.00	-13.72	peak	
4	*	7720.000	30.16	19.96	50.12	54.00	-3.88	AVG	

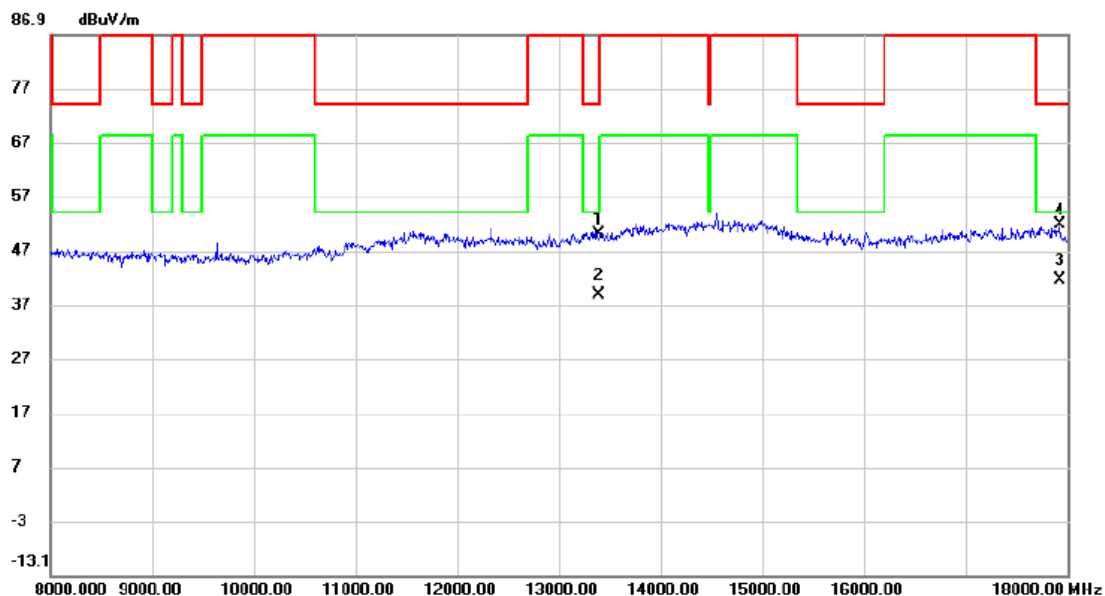

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		13389.320	37.63	12.42	50.05	74.00	-23.95	peak	
2		13392.140	26.35	12.43	38.78	54.00	-15.22	AVG	
3	*	17920.000	31.68	9.81	41.49	54.00	-12.51	AVG	
4		17920.000	41.96	9.81	51.77	74.00	-22.23	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

Test Mode	IEEE 802.11a_Ant_1
-----------	--------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
5955	18.31	16.41	320	Pass
6175	18.04	16.41	320	Pass
6415	18.22	16.40	320	Pass

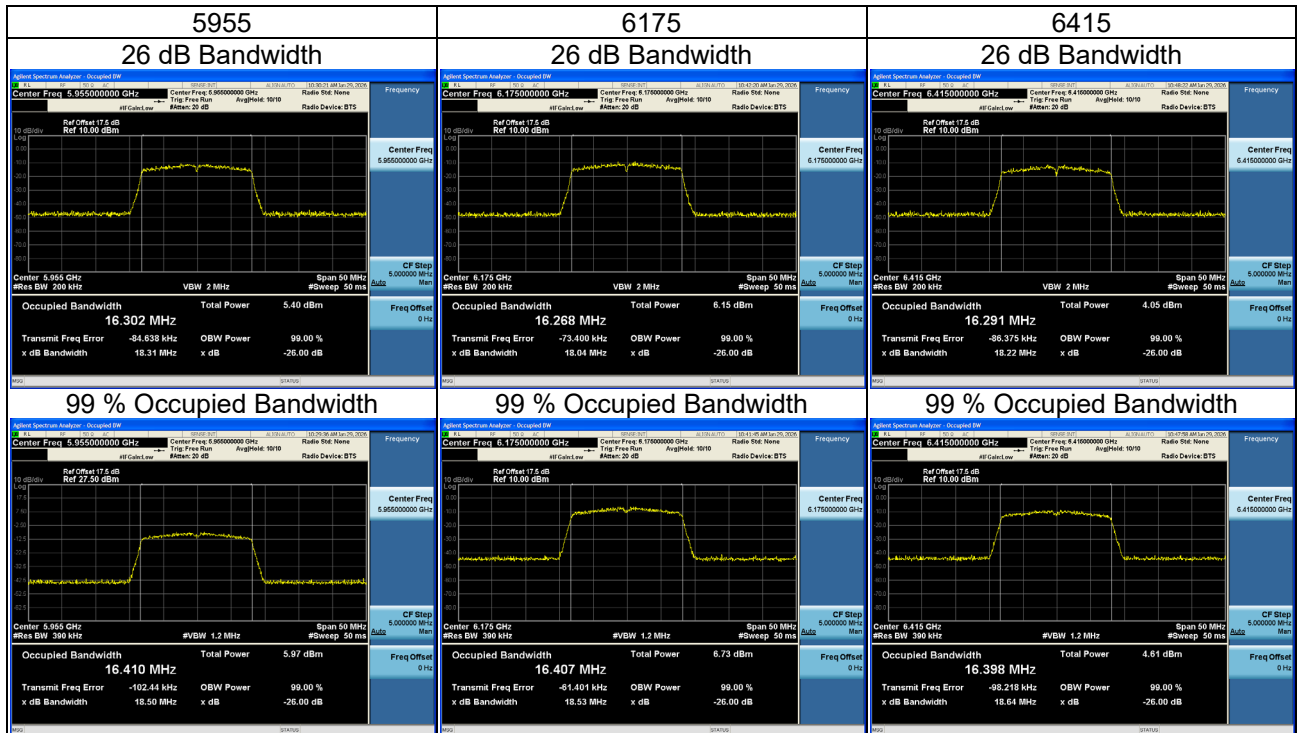

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6435	18.17	16.40	320	Pass
6475	18.16	16.38	320	Pass
6515	18.24	16.43	320	Pass

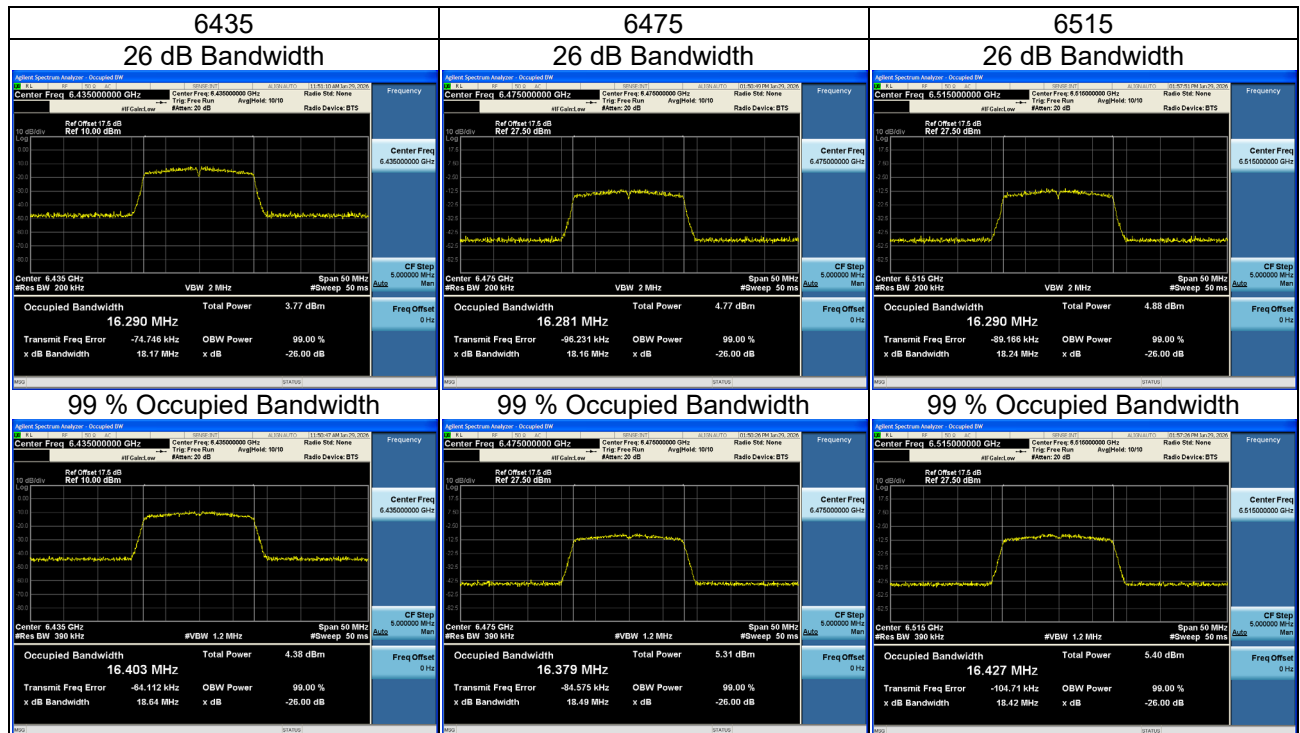

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)	Result
6535	18.05	16.41	320	Pass
6695	18.14	16.39	320	Pass
6855	18.03	16.40	320	Pass

