



## Appendix E

### RF Test Data for 5.3GWIFI(Conducted Measurement)

Product Name: Tablet

Test Model: 10WB4

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 23.8°C     |
| Relative Humidity: | 52.1%      |
| ATM Pressure:      | 100.0 kPa  |
| Test Engineer:     | Jay Luo    |
| Supervised by:     | Paddi Chen |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## E.1 -26dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Limit -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|------------------------------|---------|
| NVNT      | a    | 5260            | Ant1    | 28.9                   | ---                          | Pass    |
| NVNT      | a    | 5300            | Ant1    | 27.598                 | ---                          | Pass    |
| NVNT      | a    | 5320            | Ant1    | 28.561                 | ---                          | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 26.381                 | ---                          | Pass    |
| NVNT      | n20  | 5300            | Ant1    | 28.718                 | ---                          | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 29.683                 | ---                          | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 43.965                 | ---                          | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 51.404                 | ---                          | Pass    |






## Test Graphs

-26dB Bandwidth NVNT a 5260MHz Ant1

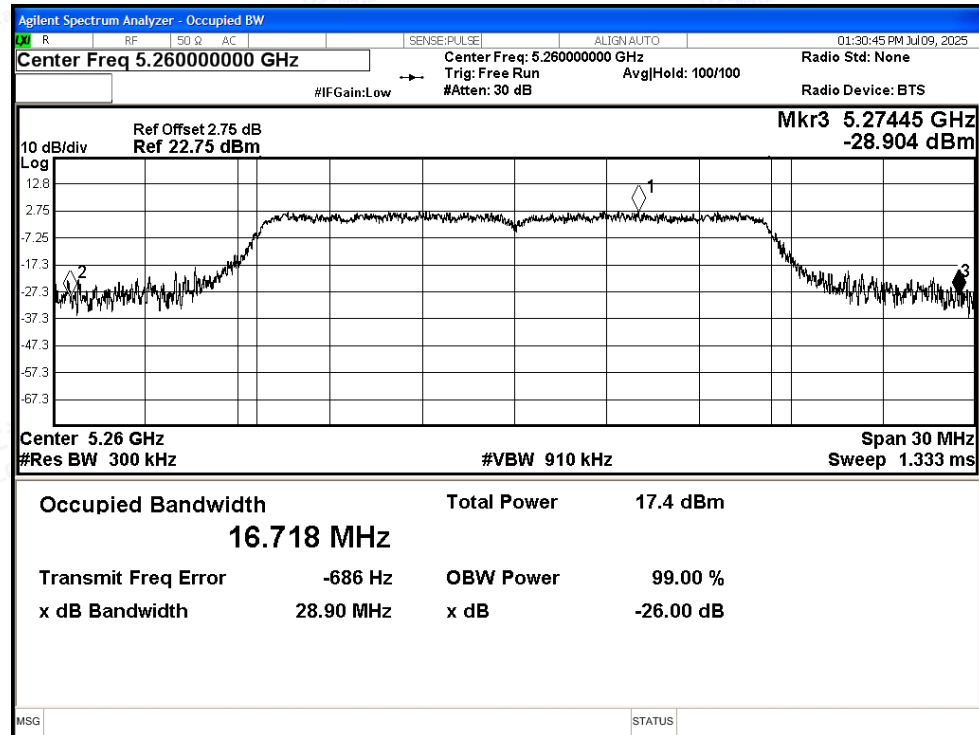

-26dB Bandwidth NVNT a 5300MHz Ant1

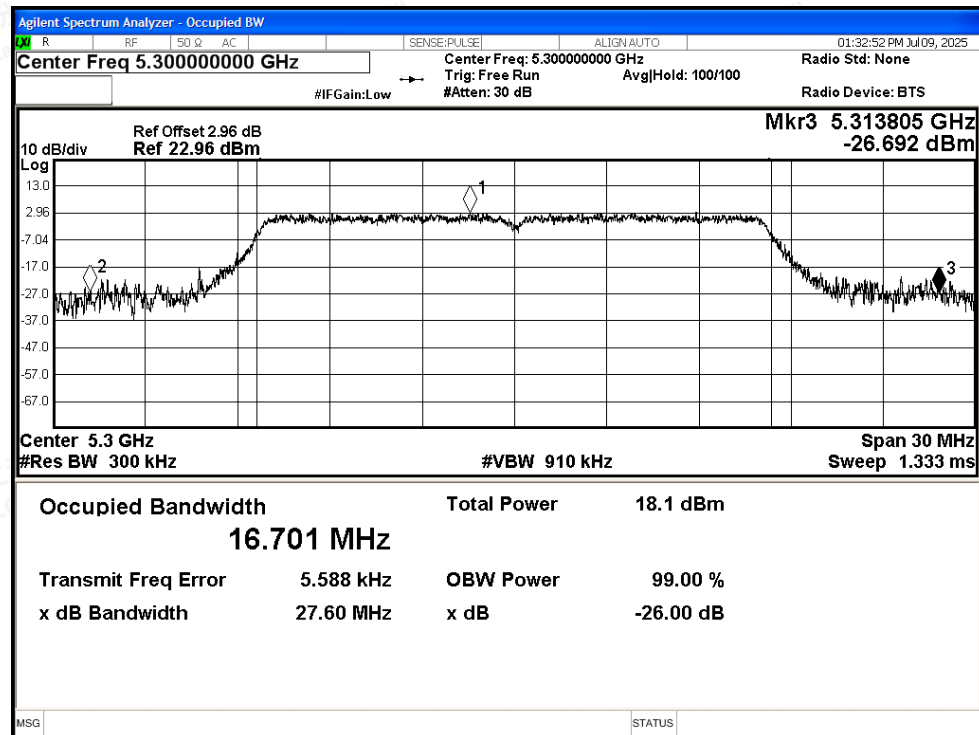

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT a 5320MHz Ant1

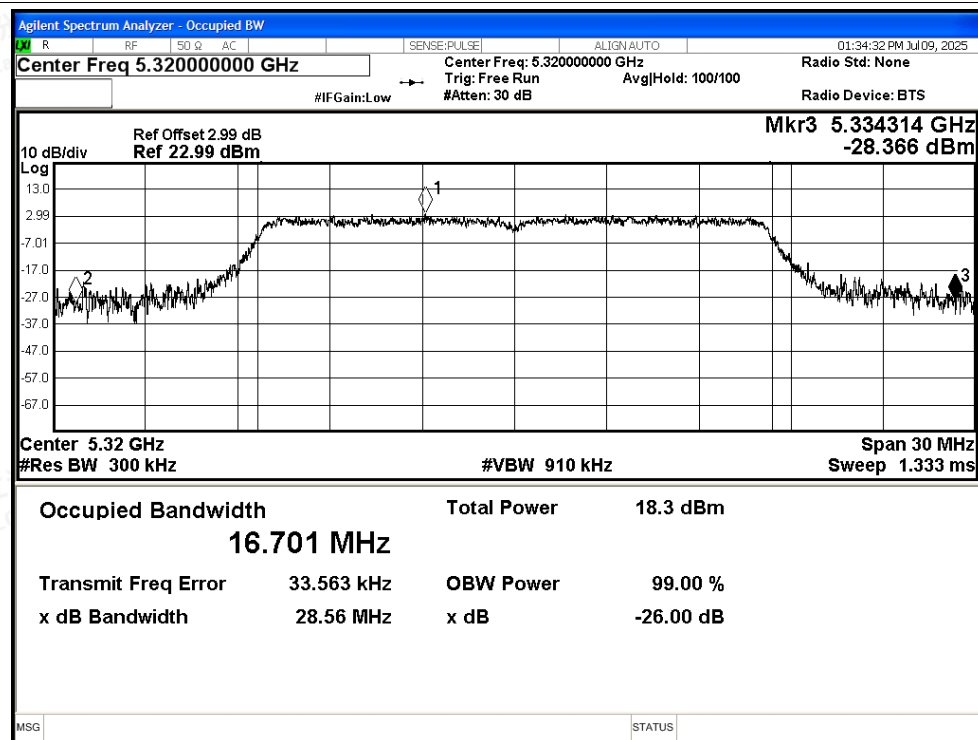

## -26dB Bandwidth NVNT n20 5260MHz Ant1

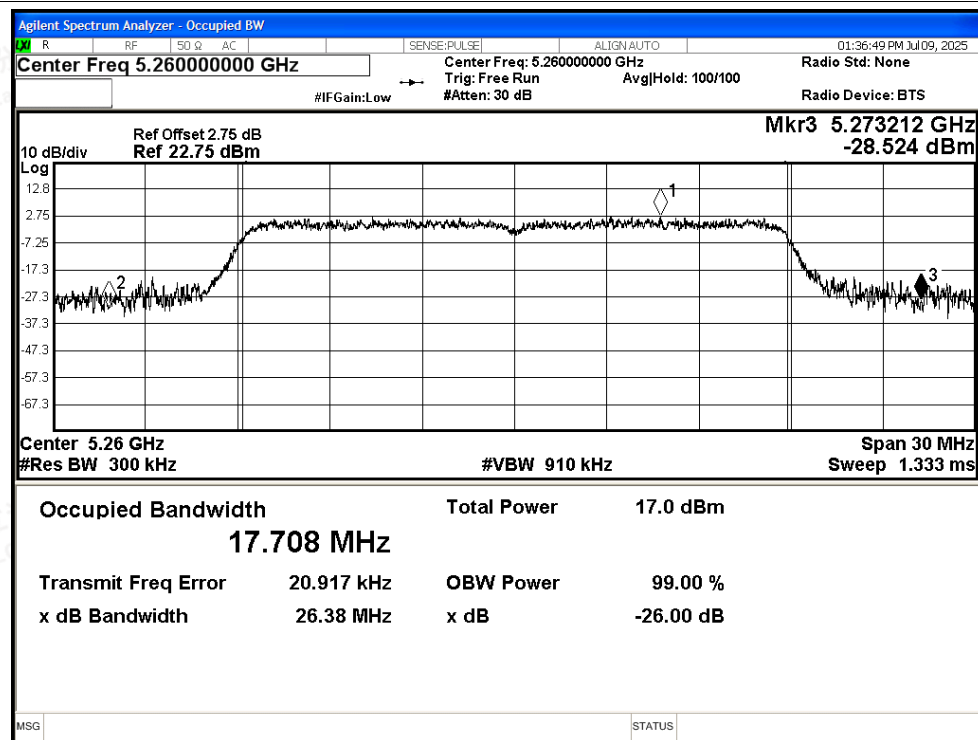

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -26dB Bandwidth NVNT n20 5300MHz Ant1

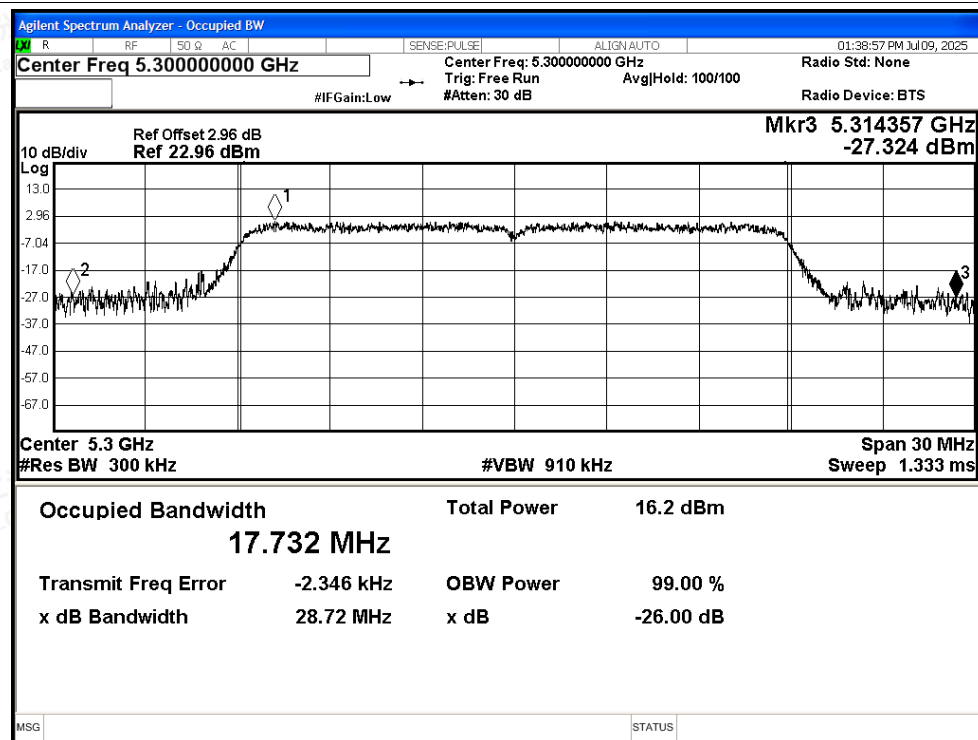


## -26dB Bandwidth NVNT n20 5320MHz Ant1

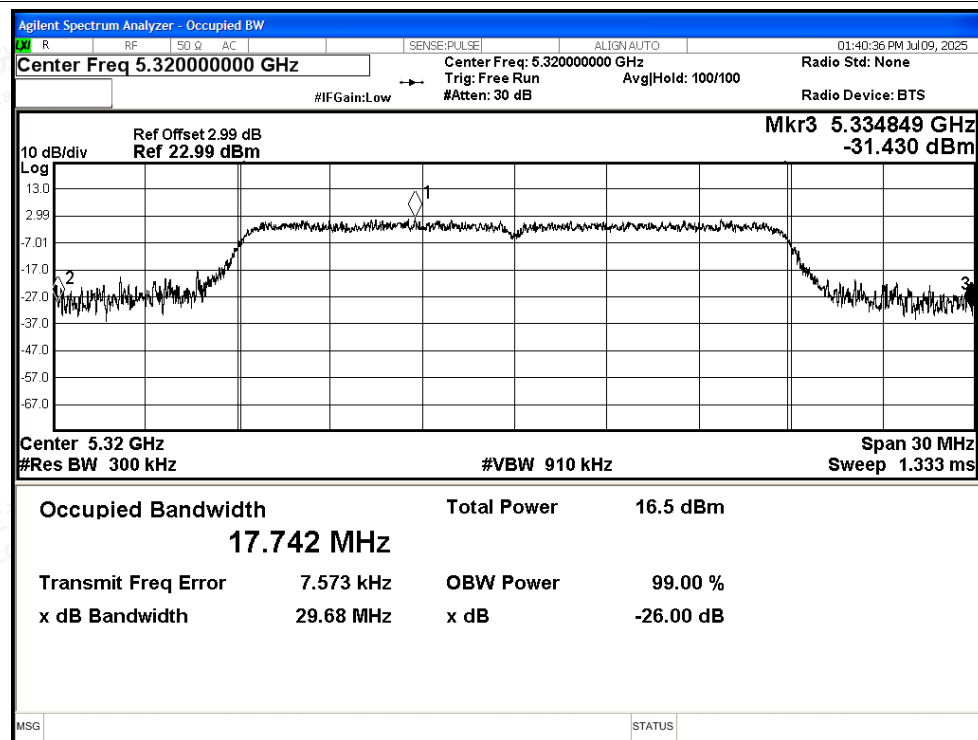




## -26dB Bandwidth NVNT n40 5270MHz Ant1

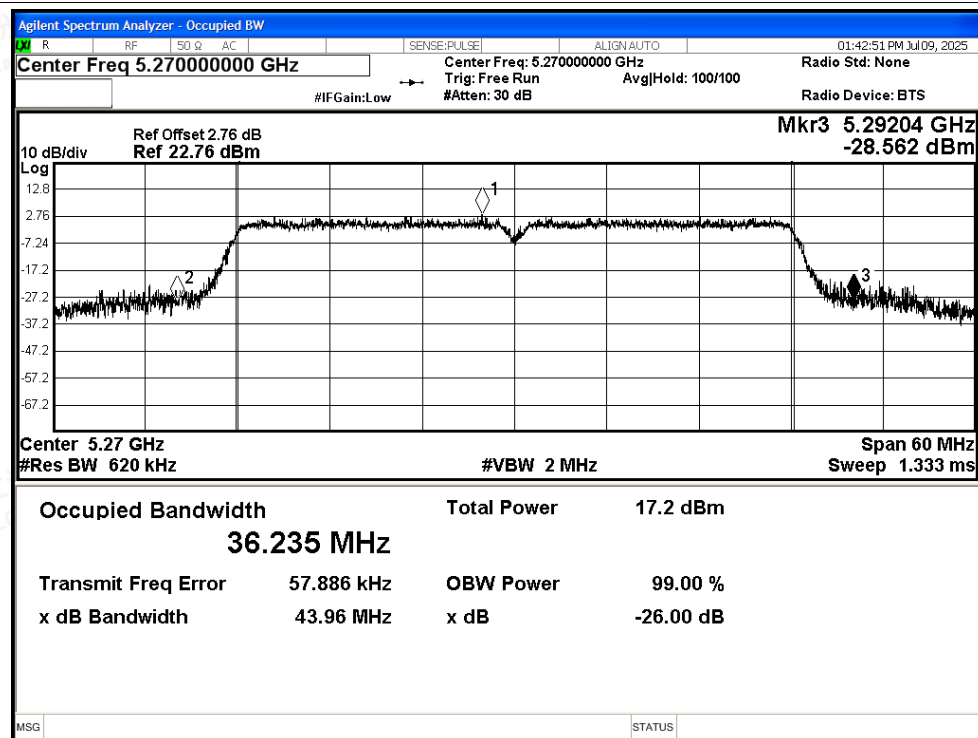

## -26dB Bandwidth NVNT n40 5310MHz Ant1

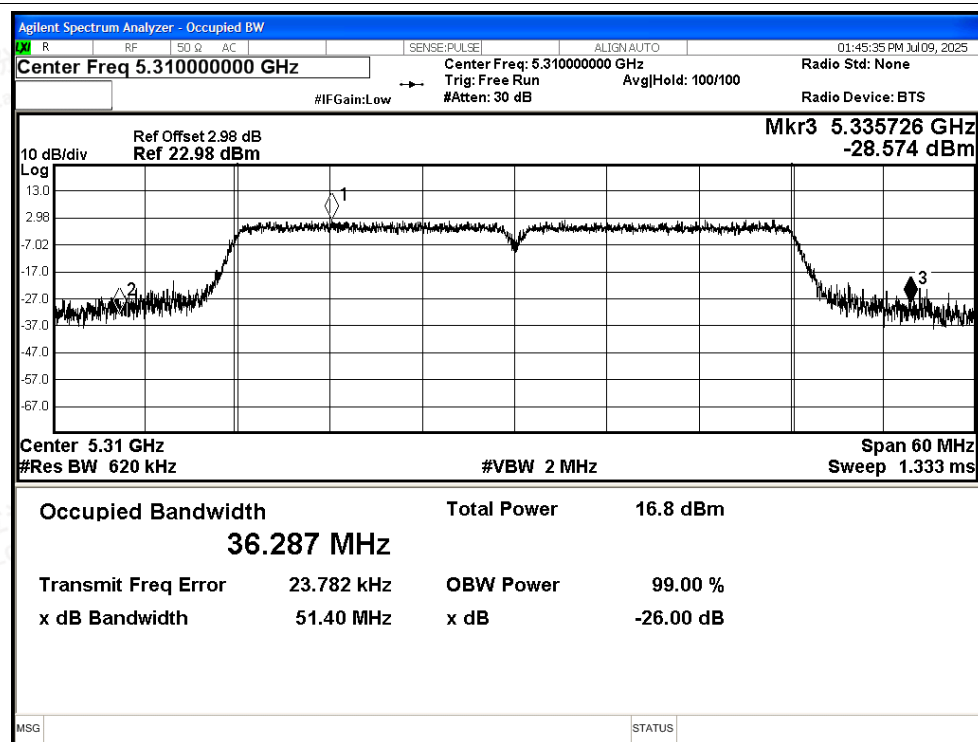



## E.2 Maximum Conducted Output Power

| Condition | Mode | Frequency<br>(MHz) | Antenna | Conducted Power<br>(dBm) | Duty Factor<br>(dB) | Total Power<br>(dBm) | Limit<br>(dBm) | Verdict |
|-----------|------|--------------------|---------|--------------------------|---------------------|----------------------|----------------|---------|
| NVNT      | a    | 5260               | Ant1    | 11.78                    | 0.24                | 12.02                | 24             | Pass    |
| NVNT      | a    | 5300               | Ant1    | 12.41                    | 0.24                | 12.65                | 24             | Pass    |
| NVNT      | a    | 5320               | Ant1    | 12.61                    | 0.24                | 12.85                | 24             | Pass    |
| NVNT      | n20  | 5260               | Ant1    | 11.51                    | 0.12                | 11.63                | 24             | Pass    |
| NVNT      | n20  | 5300               | Ant1    | 10.74                    | 0.12                | 10.86                | 24             | Pass    |
| NVNT      | n20  | 5320               | Ant1    | 11.08                    | 0.12                | 11.2                 | 24             | Pass    |
| NVNT      | n40  | 5270               | Ant1    | 10.89                    | 0.24                | 11.13                | 24             | Pass    |
| NVNT      | n40  | 5310               | Ant1    | 10.69                    | 0.24                | 10.93                | 24             | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,  
518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



### E.3 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD(dBm/MHz) | Duty Factor (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|------------------|---------------------|-----------------|---------|
| NVNT      | a    | 5260            | Ant1    | 1.16                   | 0.24             | 1.4                 | 11              | Pass    |
| NVNT      | a    | 5300            | Ant1    | 1.95                   | 0.24             | 2.19                | 11              | Pass    |
| NVNT      | a    | 5320            | Ant1    | 2.03                   | 0.24             | 2.27                | 11              | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 0.62                   | 0.12             | 0.74                | 11              | Pass    |
| NVNT      | n20  | 5300            | Ant1    | -0.18                  | 0.12             | -0.06               | 11              | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 0.13                   | 0.12             | 0.25                | 11              | Pass    |
| NVNT      | n40  | 5270            | Ant1    | -3.08                  | 0.24             | -2.84               | 11              | Pass    |
| NVNT      | n40  | 5310            | Ant1    | -3.55                  | 0.24             | -3.31               | 11              | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

PSD NVNT a 5260MHz Ant1

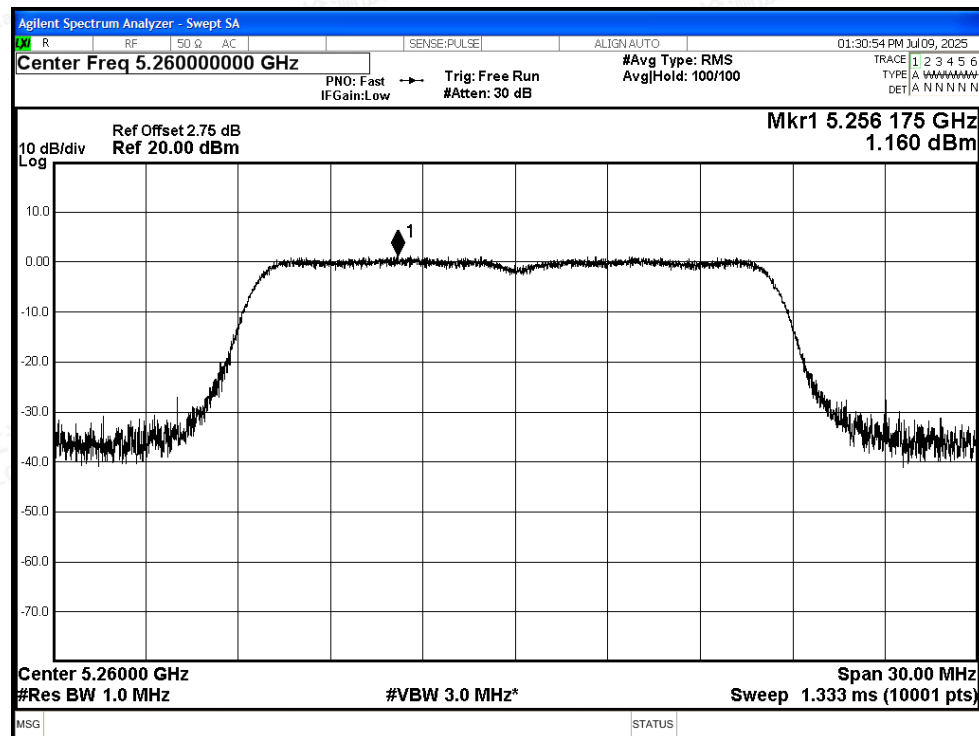

PSD NVNT a 5300MHz Ant1

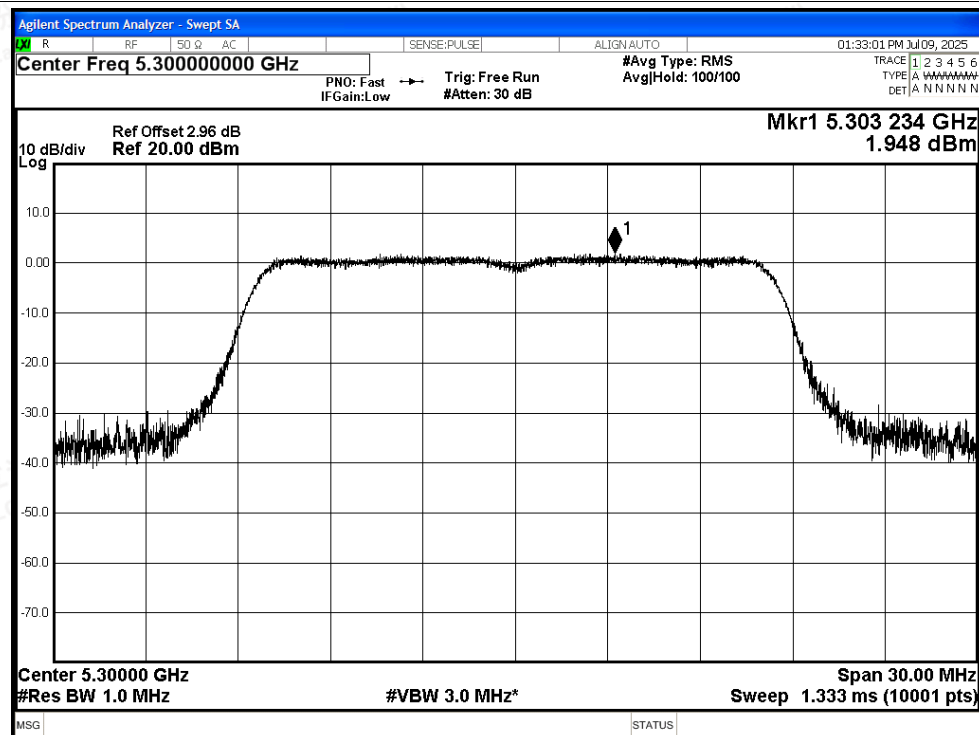

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT a 5320MHz Ant1

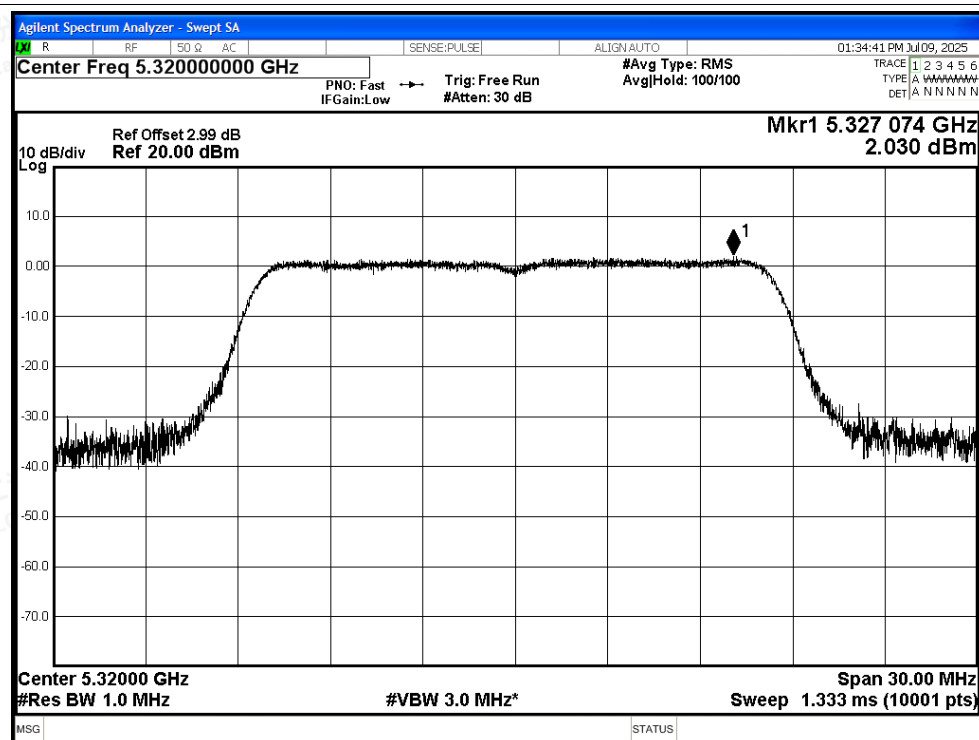

PSD NVNT n20 5260MHz Ant1


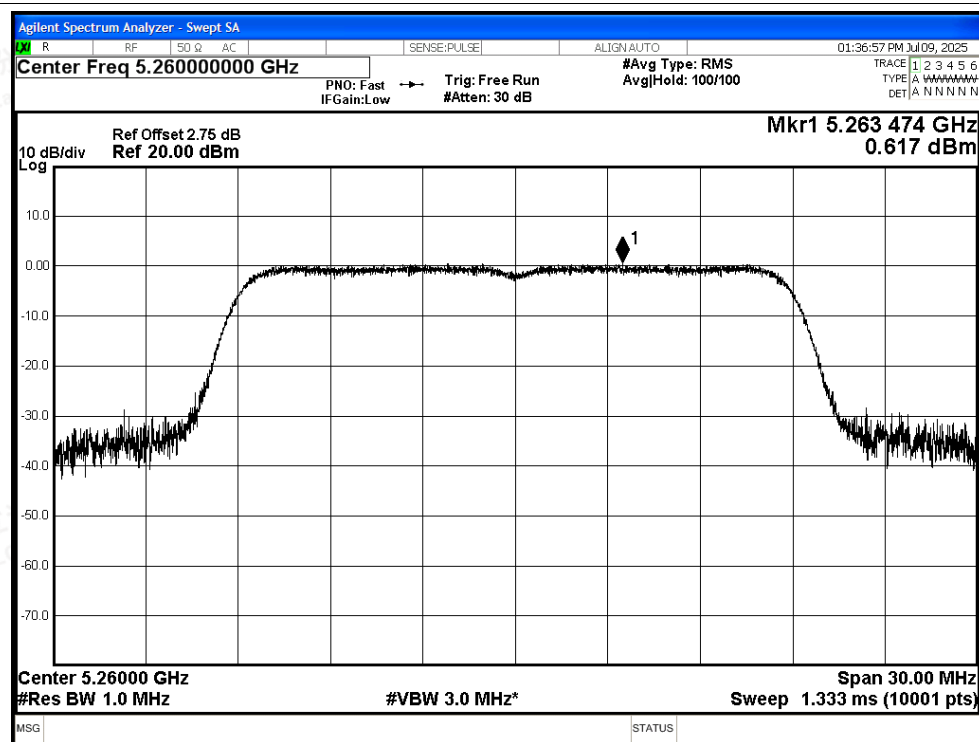




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

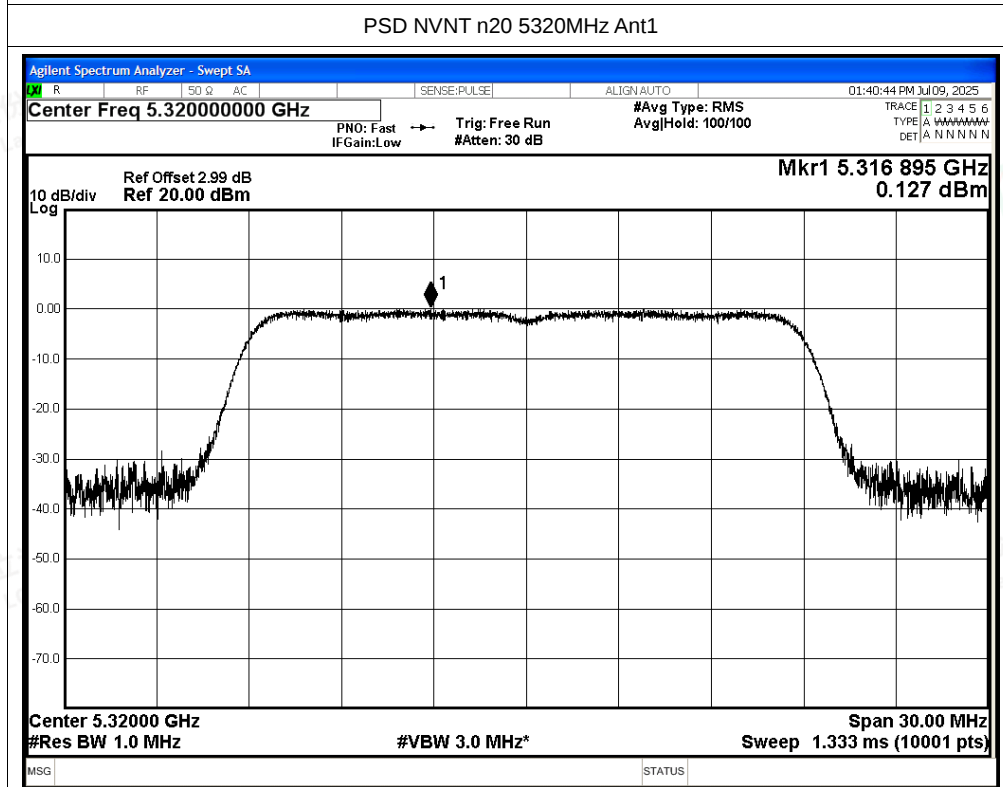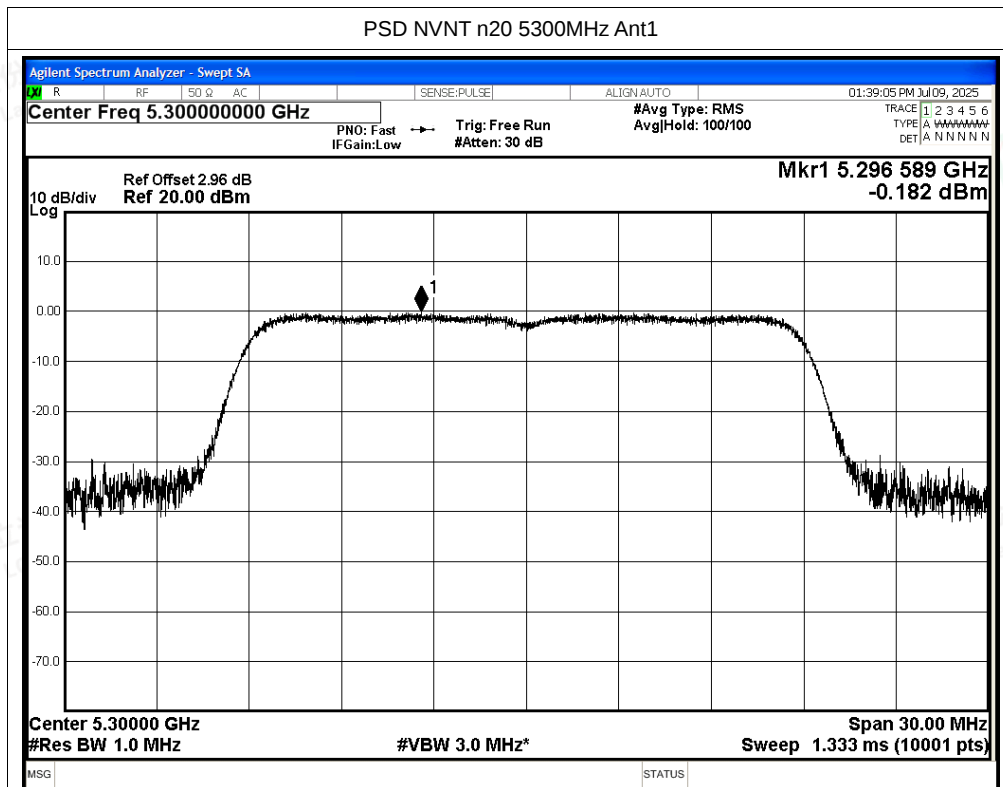

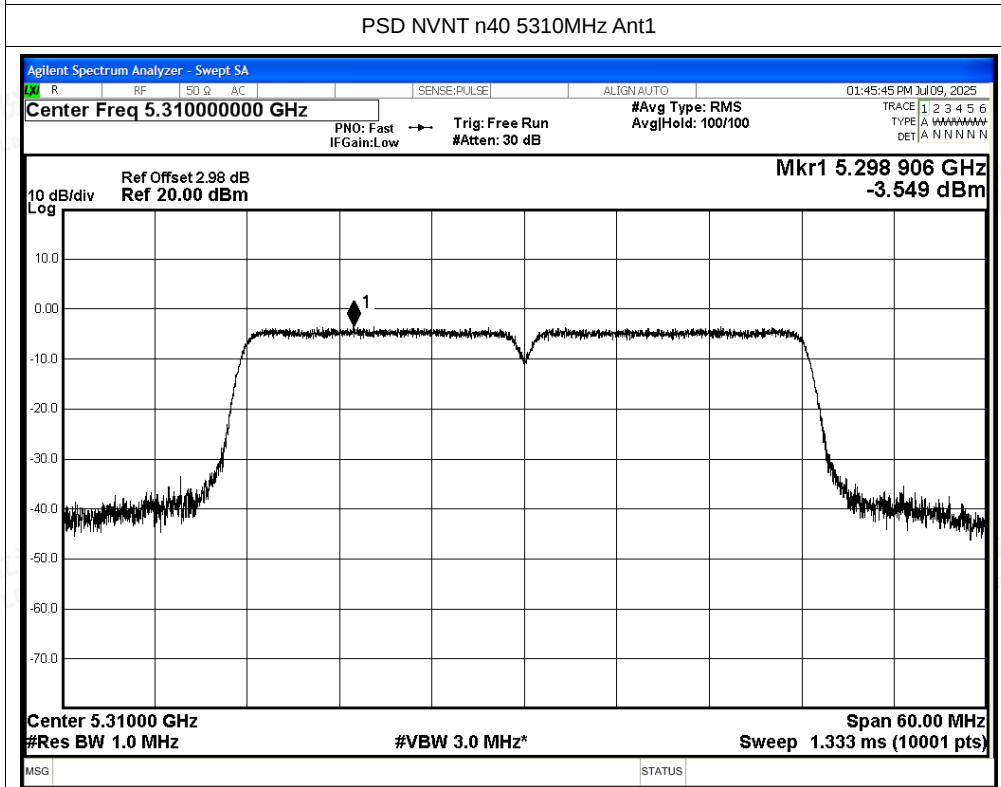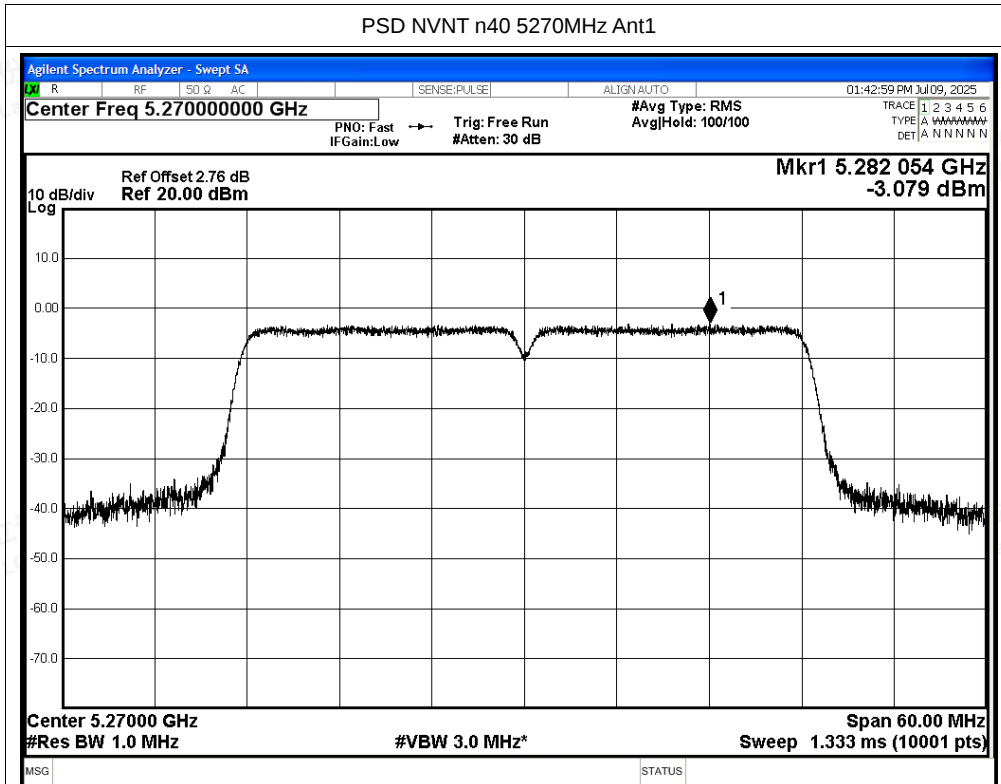

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## E.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | a    | 5260            | Ant1    | 4500            | -50.97      | 3.12       | -                | 47.38      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant1    | 4500            | -58.88      | 3.12       | 0.24             | 39.71      | Average  | 54             | Pass    |
| NVNT      | a    | 5260            | Ant1    | 4790.16         | -46.84      | 3.12       | -                | 51.51      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant1    | 5148.18         | -56.99      | 3.12       | 0.24             | 41.6       | Average  | 54             | Pass    |
| NVNT      | a    | 5260            | Ant1    | 5150            | -49.83      | 3.12       | -                | 48.52      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5260            | Ant1    | 5150            | -57.4       | 3.12       | 0.24             | 41.19      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5350            | -50         | 3.12       | -                | 48.35      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5350            | -58.02      | 3.12       | 0.24             | 40.57      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5421            | -47.15      | 3.12       | -                | 51.20      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5425.8          | -57.35      | 3.12       | 0.24             | 41.24      | Average  | 54             | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5460            | -49.73      | 3.12       | -                | 48.62      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5460            | -57.55      | 3.12       | 0.24             | 41.04      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 4500            | -51.88      | 3.12       | -                | 46.47      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 4500            | -58.93      | 3.12       | 0.12             | 39.54      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 5095.92         | -47.16      | 3.12       | -                | 51.19      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 5136.48         | -57         | 3.12       | 0.12             | 41.47      | Average  | 54             | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 5150            | -48.84      | 3.12       | -                | 49.51      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 5150            | -57.87      | 3.12       | 0.12             | 40.60      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5350            | -46.08      | 3.12       | -                | 52.27      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5350            | -56.27      | 3.12       | 0.12             | 42.20      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5350.8          | -42.81      | 3.12       | -                | 55.54      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5350.2          | -55.9       | 3.12       | 0.12             | 42.57      | Average  | 54             | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5460            | -49.82      | 3.12       | -                | 48.53      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5460            | -58.61      | 3.12       | 0.12             | 39.86      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 4500            | -51.03      | 3.12       | -                | 47.32      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 4500            | -58.83      | 3.12       | 0.24             | 39.76      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 5133.42         | -46.56      | 3.12       | -                | 51.79      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 5124.51         | -56.86      | 3.12       | 0.24             | 41.73      | Average  | 54             | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 5150            | -50.56      | 3.12       | -                | 47.79      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 5150            | -57.56      | 3.12       | 0.24             | 41.03      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5350            | -45.86      | 3.12       | -                | 52.49      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5350            | -56.32      | 3.12       | 0.24             | 42.27      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5350.2          | -44.59      | 3.12       | -                | 53.76      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5350.2          | -55.53      | 3.12       | 0.24             | 43.06      | Average  | 54             | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5460            | -48.27      | 3.12       | -                | 50.08      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5460            | -57.96      | 3.12       | 0.24             | 40.63      | Average  | 54             | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




## Test Graphs

## Restrict Band NVNT a 5260MHz Ant1 Peak

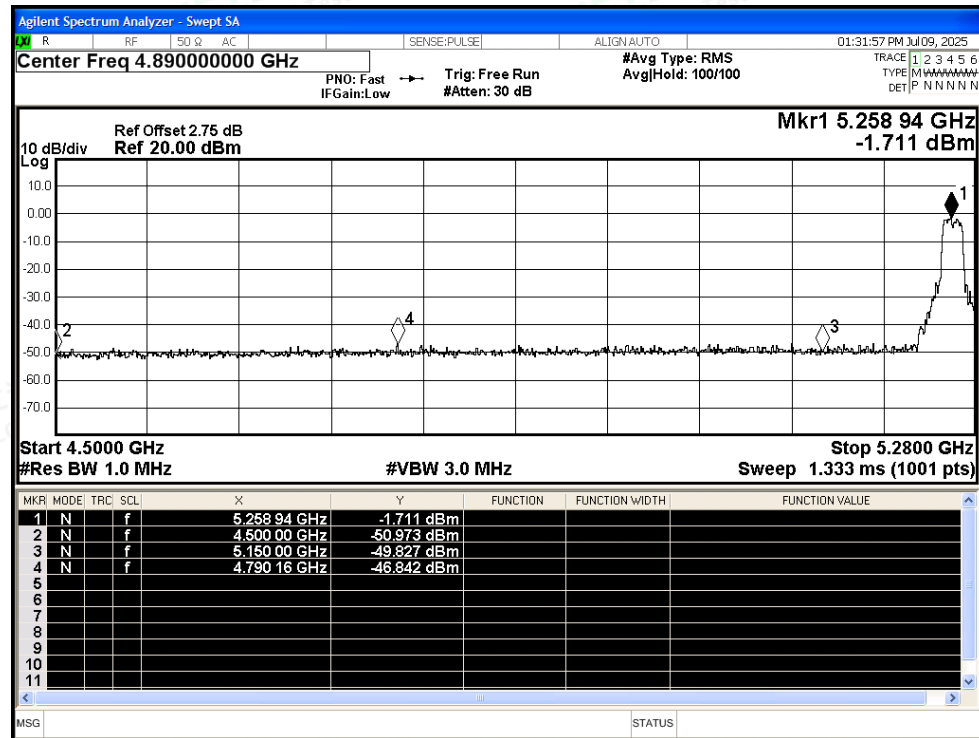

## Restrict Band NVNT a 5260MHz Ant1 Average

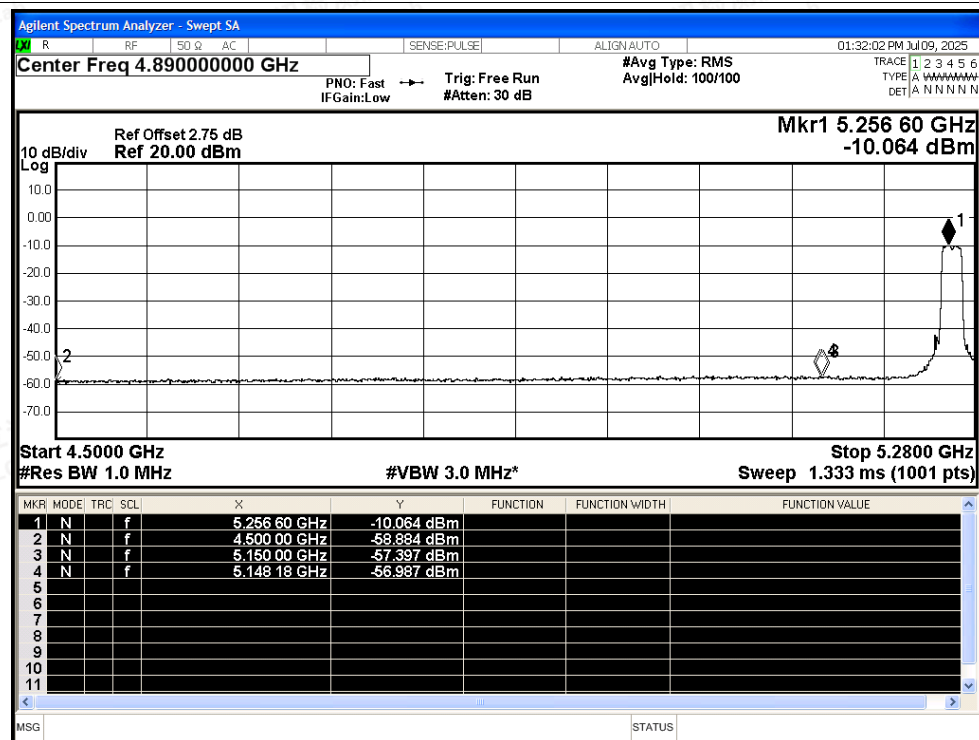

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT a 5320MHz Ant1 Peak

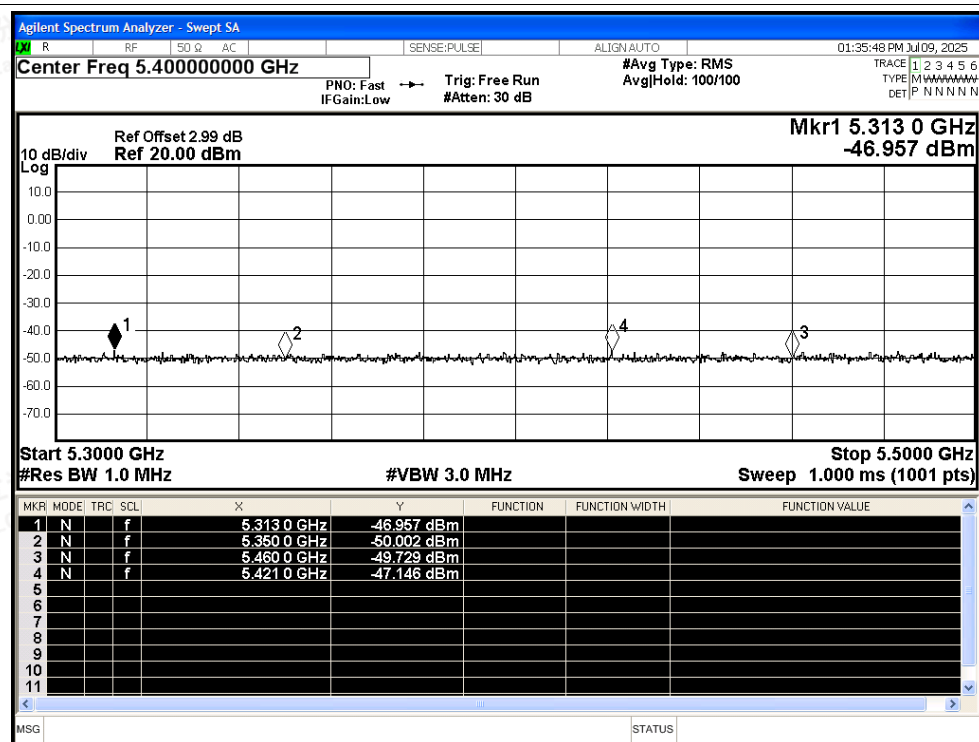

## Restrict Band NVNT a 5320MHz Ant1 Average

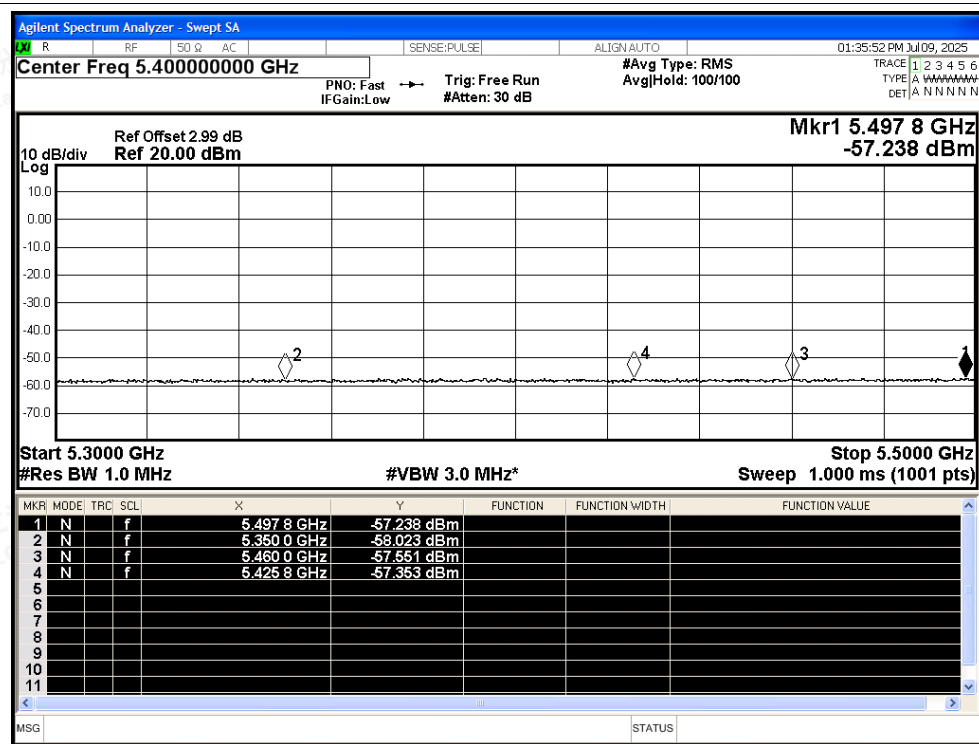

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5260MHz Ant1 Peak

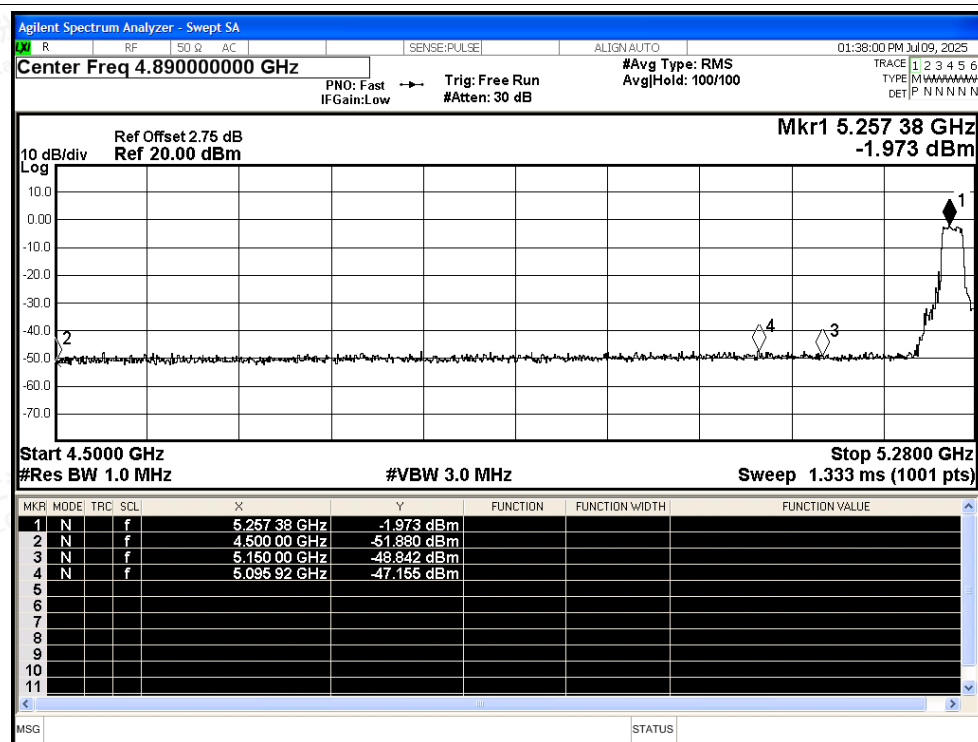

## Restrict Band NVNT n20 5260MHz Ant1 Average

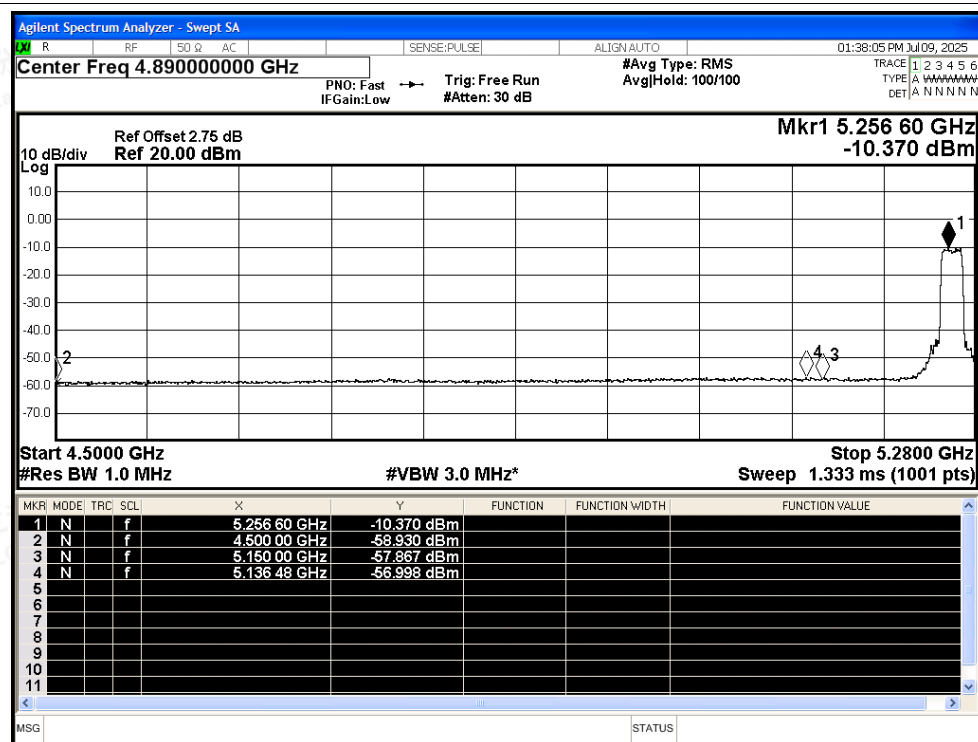

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5320MHz Ant1 Peak

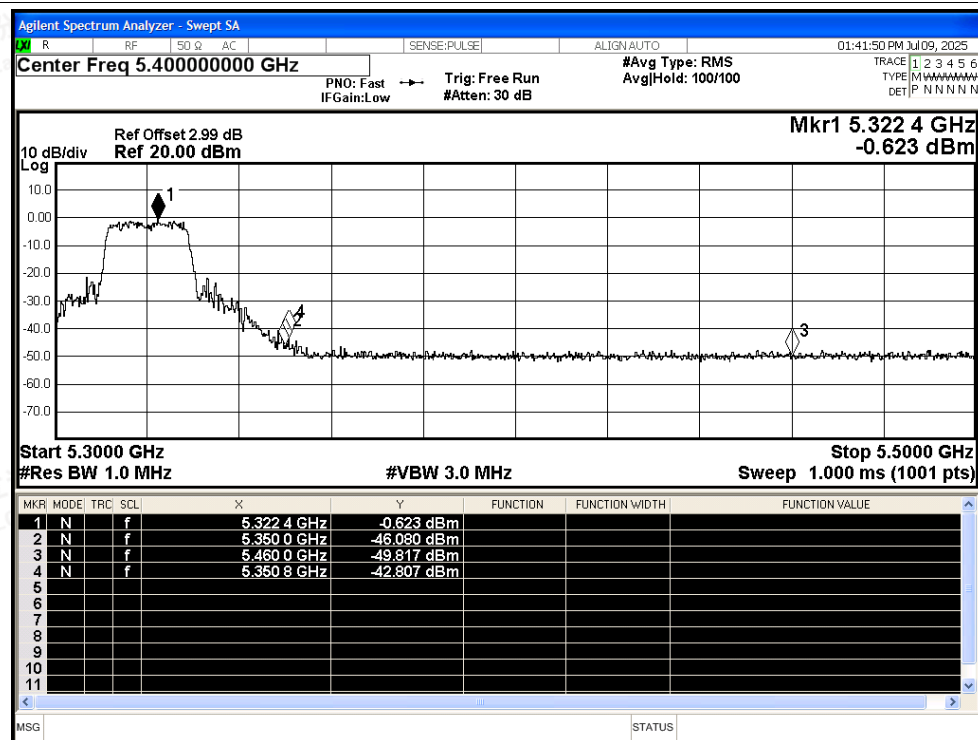

## Restrict Band NVNT n20 5320MHz Ant1 Average

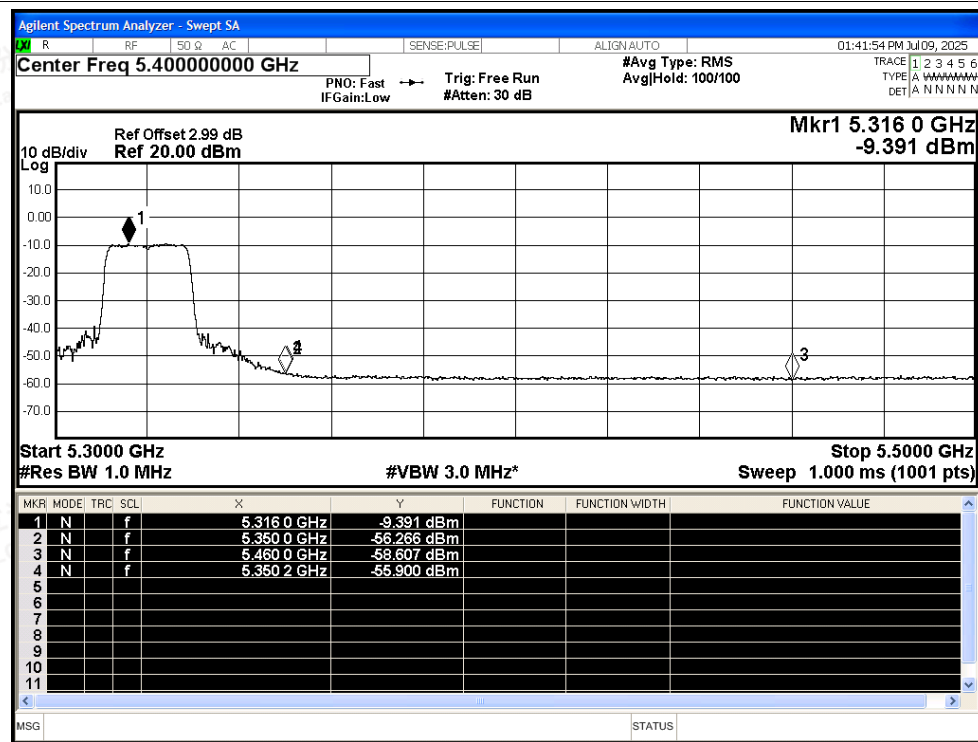

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5270MHz Ant1 Peak

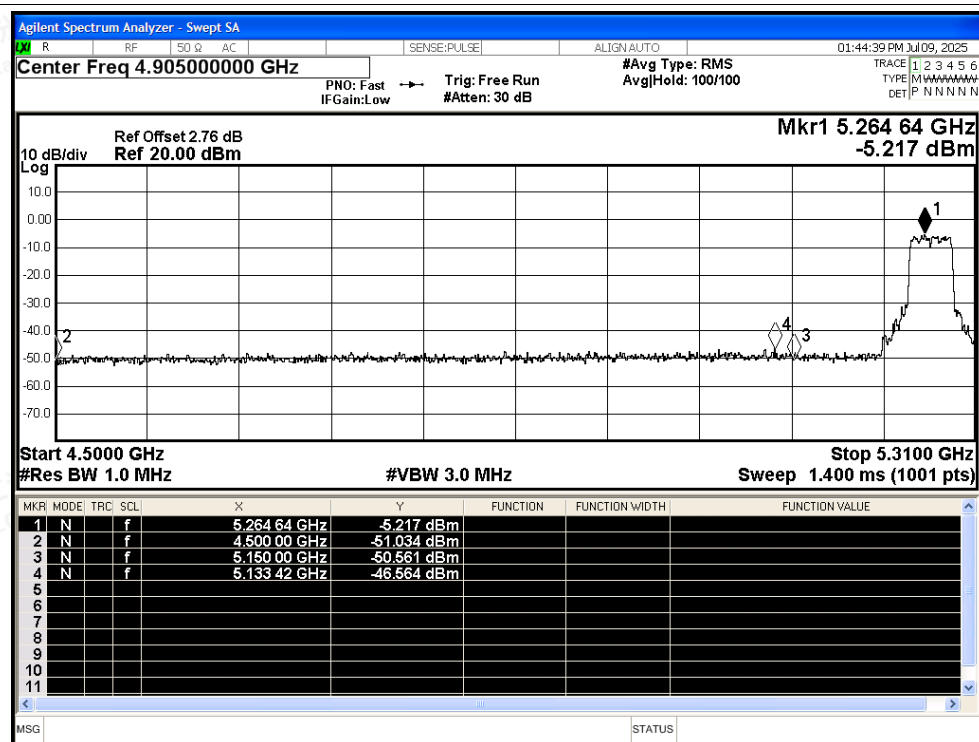

## Restrict Band NVNT n40 5270MHz Ant1 Average

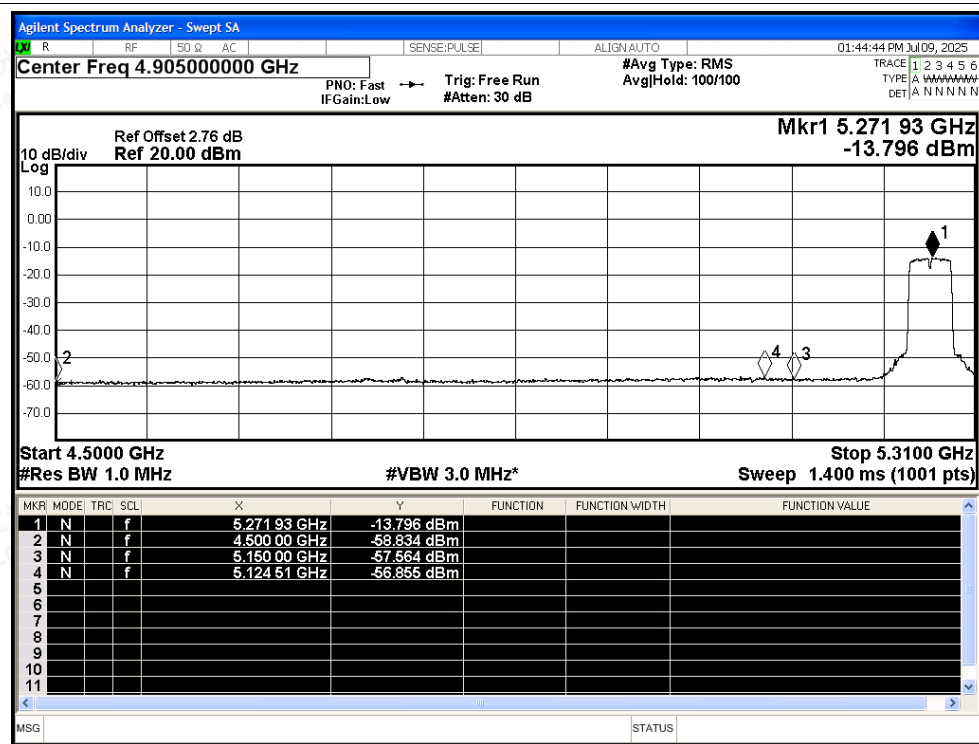

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5310MHz Ant1 Peak

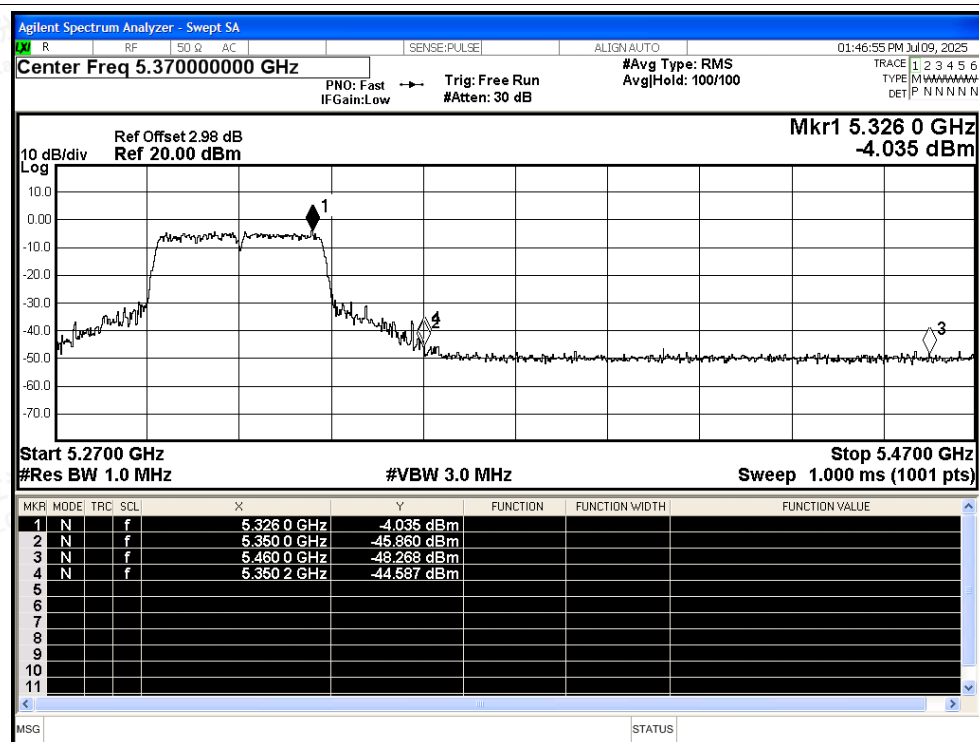

## Restrict Band NVNT n40 5310MHz Ant1 Average

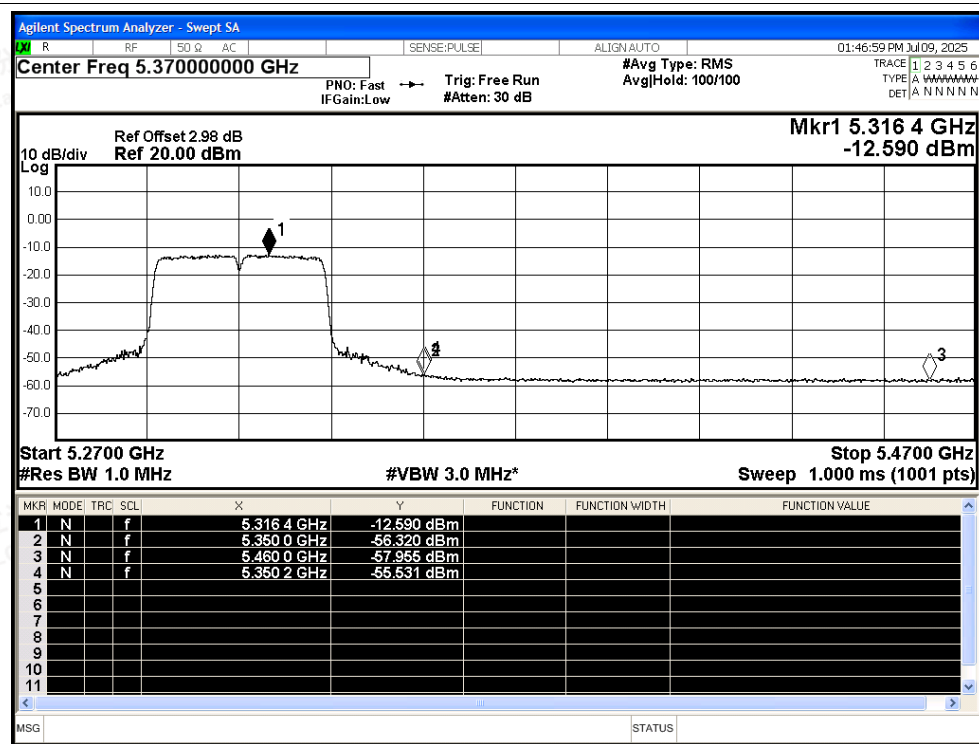

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## E.5 Frequency Stability

| Condition | Mode | Frequency (MHz) | Antenna | Measured Frequency (MHz) | Frequency Error (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
|-----------|------|-----------------|---------|--------------------------|----------------------|-----------------|-------------|---------|
| NVNT      | a    | 5260            | Ant1    | 5259.98                  | -20000               | -3.8            | 25          | Pass    |
| NVNT      | a    | 5300            | Ant1    | 5299.98                  | -20000               | -3.77           | 25          | Pass    |
| NVNT      | a    | 5320            | Ant1    | 5320                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5260            | Ant1    | 5260                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5300            | Ant1    | 5300                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n20  | 5320            | Ant1    | 5319.98                  | -20000               | -3.76           | 25          | Pass    |
| NVNT      | n40  | 5270            | Ant1    | 5270                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n40  | 5310            | Ant1    | 5310                     | 0                    | 0               | 25          | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Freq. Stability NVNT a 5260MHz Ant1

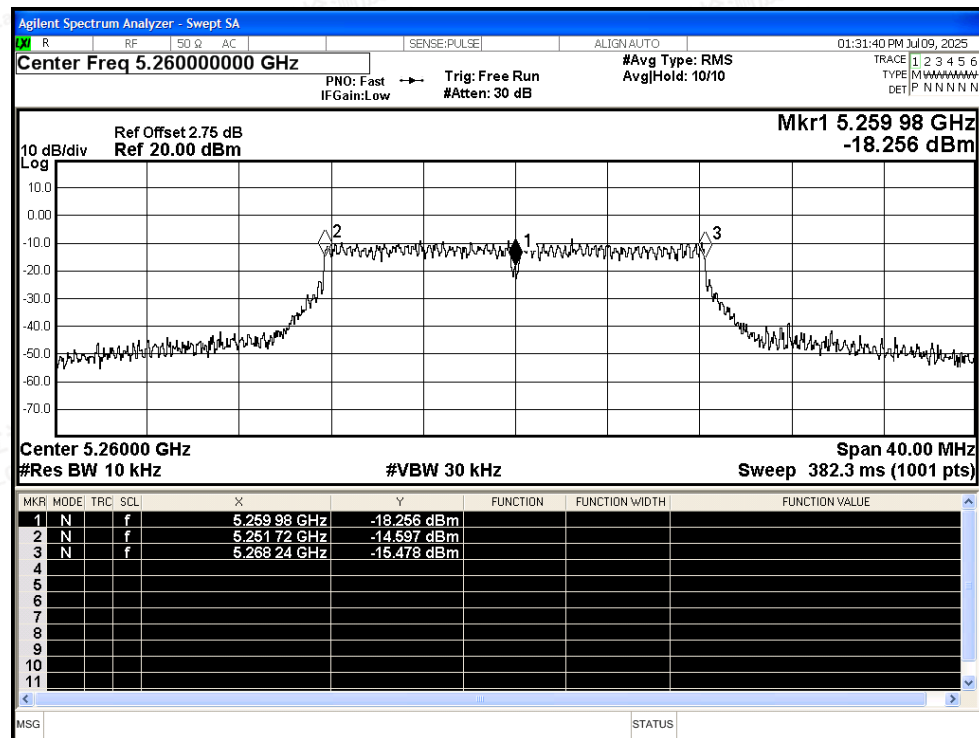


## Freq. Stability NVNT a 5300MHz Ant1

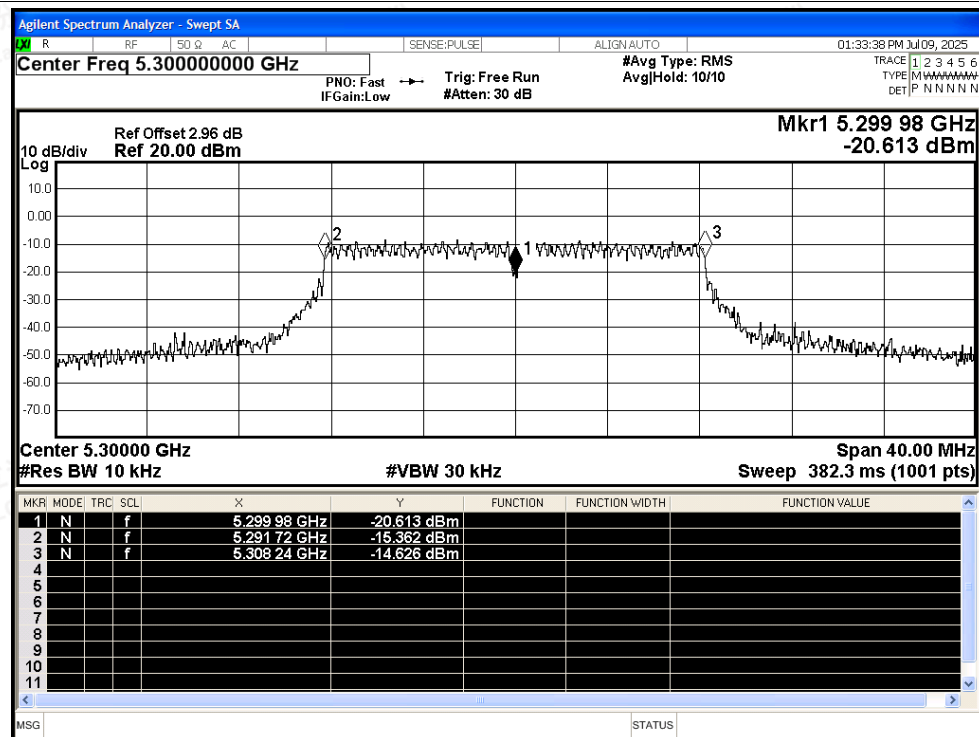




## Freq. Stability NVNT a 5320MHz Ant1

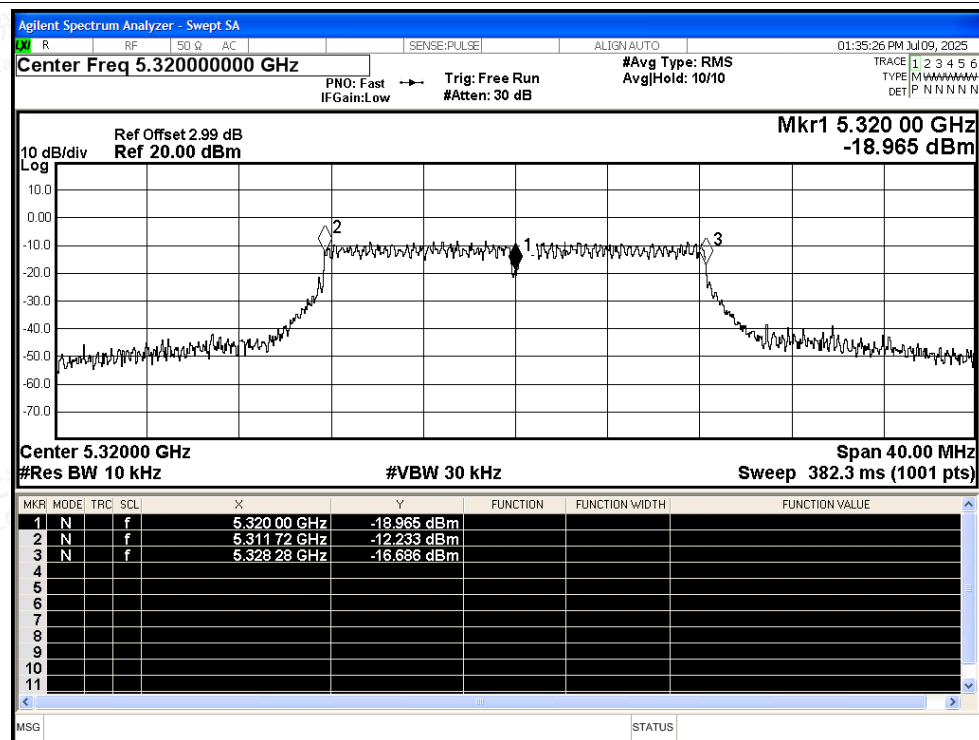

## Freq. Stability NVNT n20 5260MHz Ant1

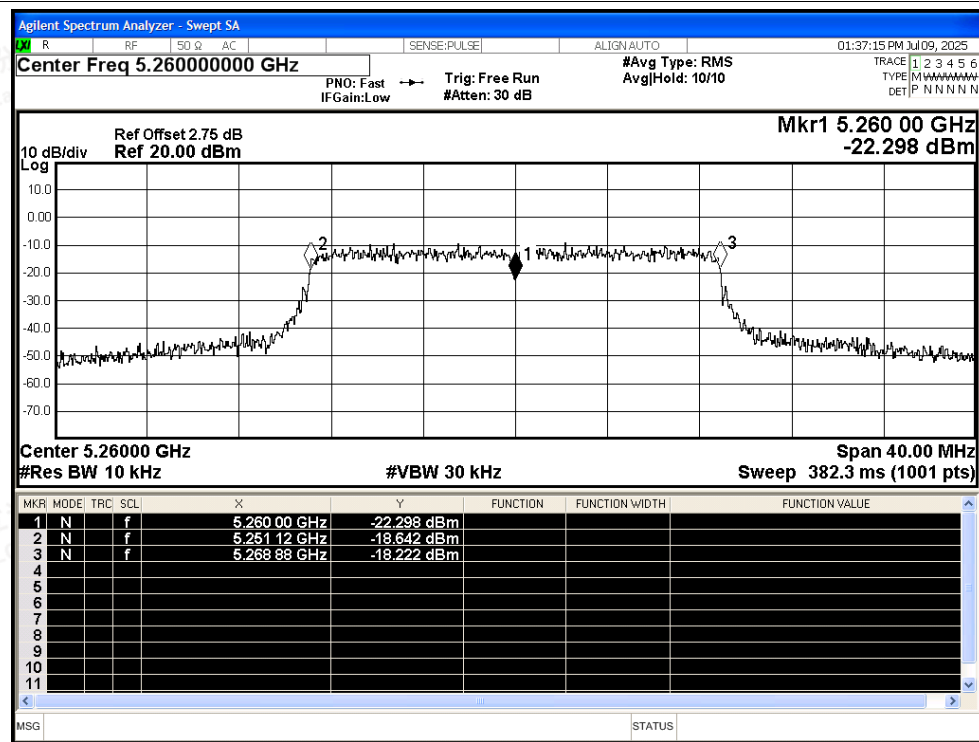

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT n20 5300MHz Ant1

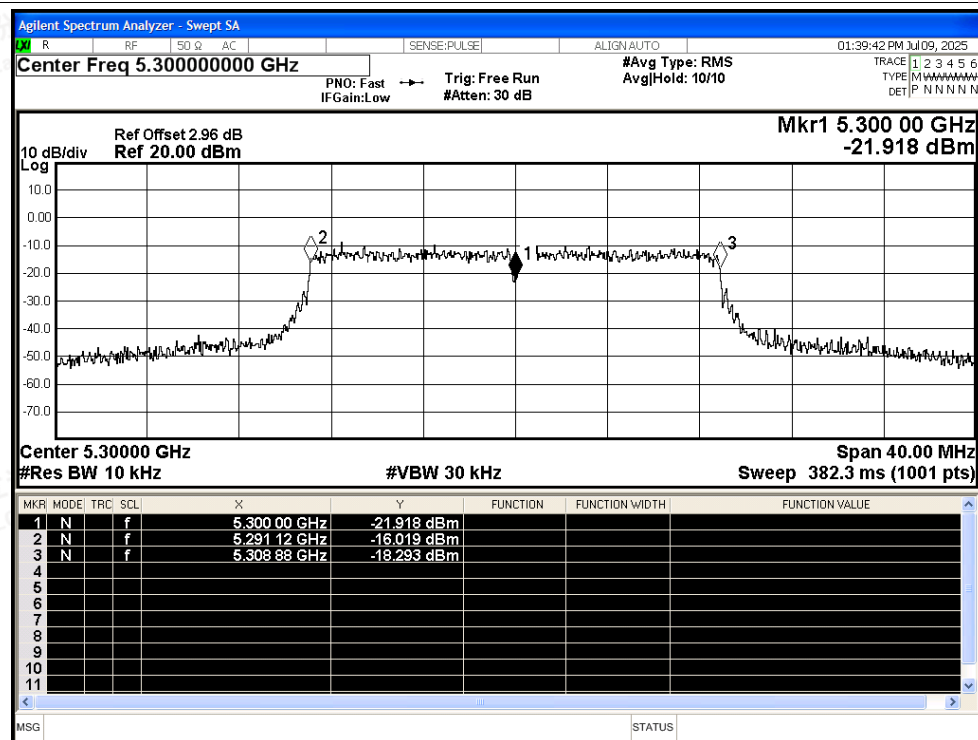

## Freq. Stability NVNT n20 5320MHz Ant1

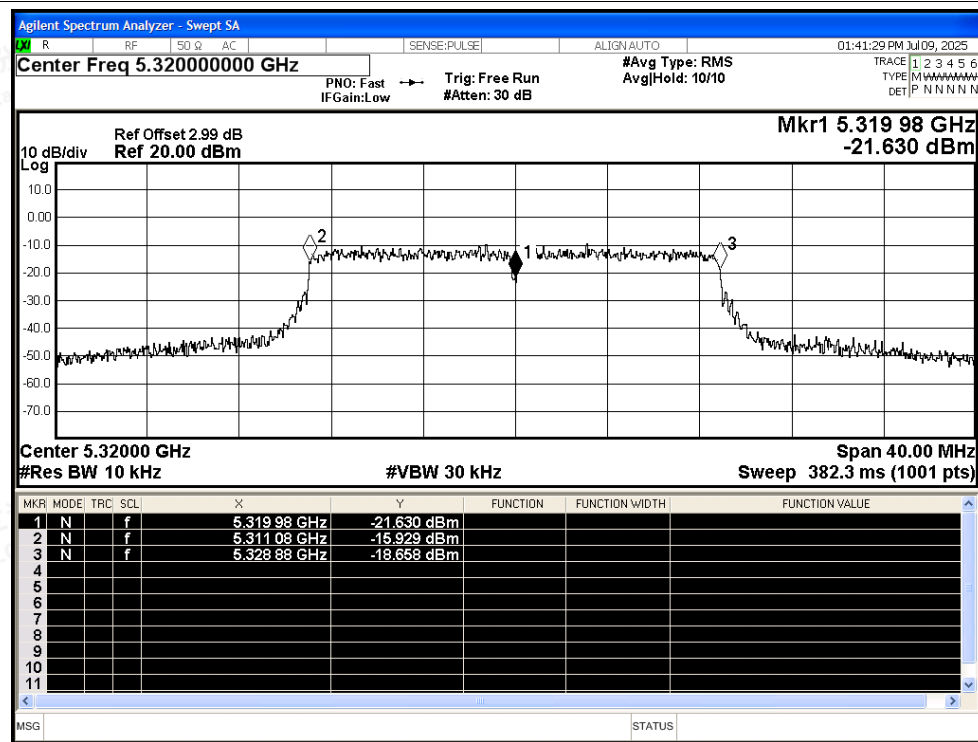

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT n40 5270MHz Ant1

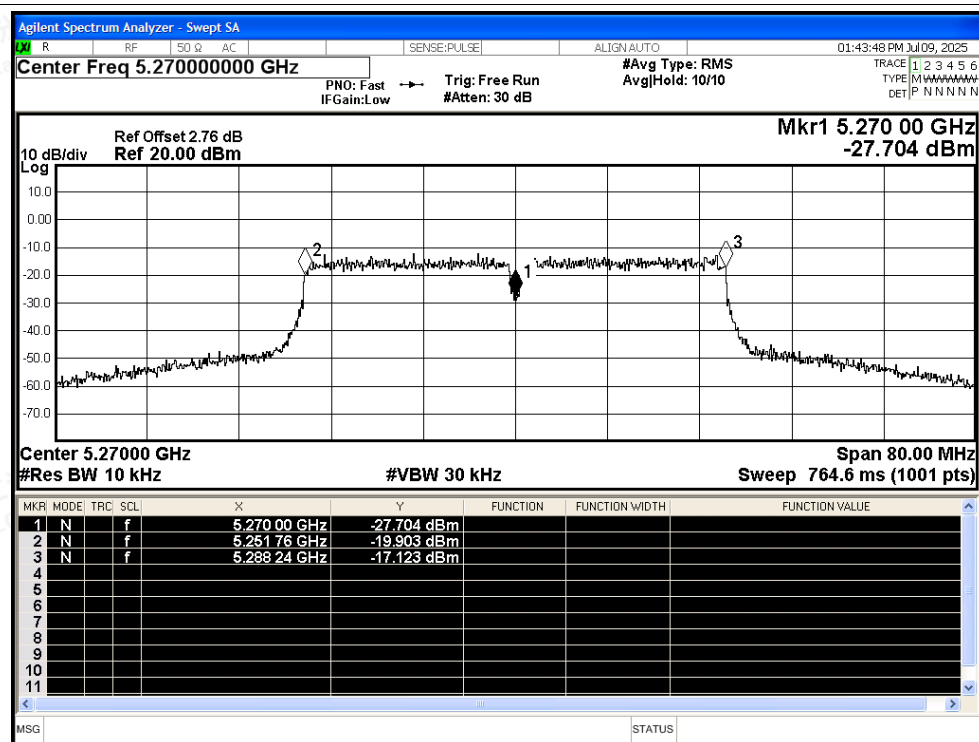

## Freq. Stability NVNT n40 5310MHz Ant1

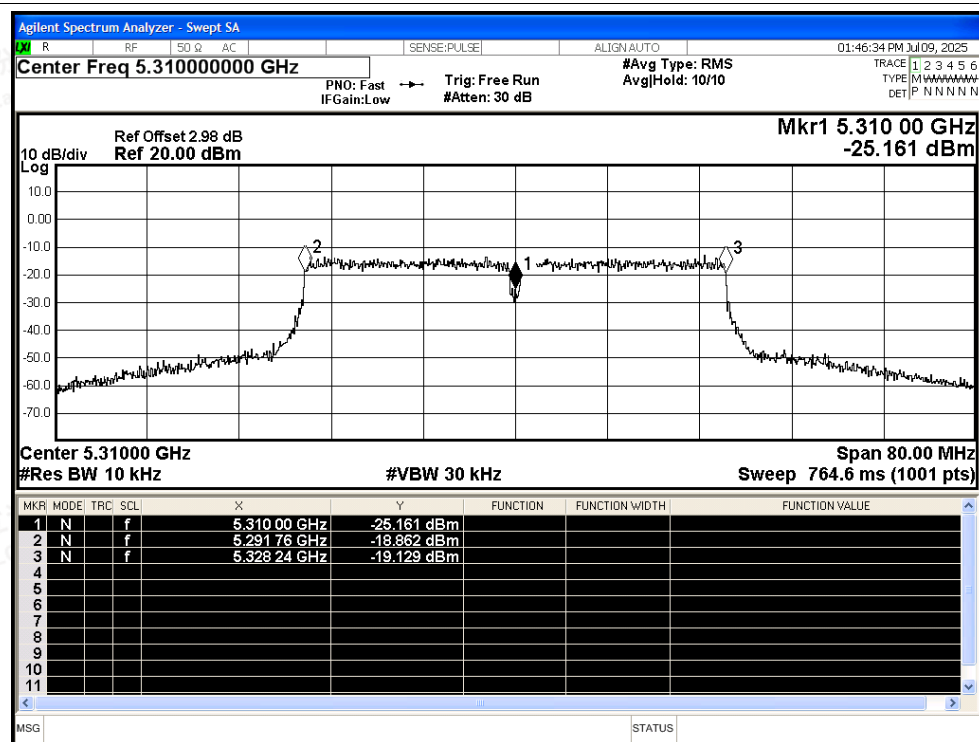

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## E.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5260            | Ant1    | 94.56          | 0.24                   | 0.91      |
| NVNT      | a    | 5300            | Ant1    | 94.65          | 0.24                   | 0.91      |
| NVNT      | a    | 5320            | Ant1    | 94.65          | 0.24                   | 0.91      |
| NVNT      | n20  | 5260            | Ant1    | 97.29          | 0.12                   | 0.44      |
| NVNT      | n20  | 5300            | Ant1    | 97.29          | 0.12                   | 0.44      |
| NVNT      | n20  | 5320            | Ant1    | 97.29          | 0.12                   | 0.44      |
| NVNT      | n40  | 5270            | Ant1    | 94.71          | 0.24                   | 0.9       |
| NVNT      | n40  | 5310            | Ant1    | 94.71          | 0.24                   | 0.9       |






## Test Graphs

## Duty Cycle NVNT a 5260MHz Ant1

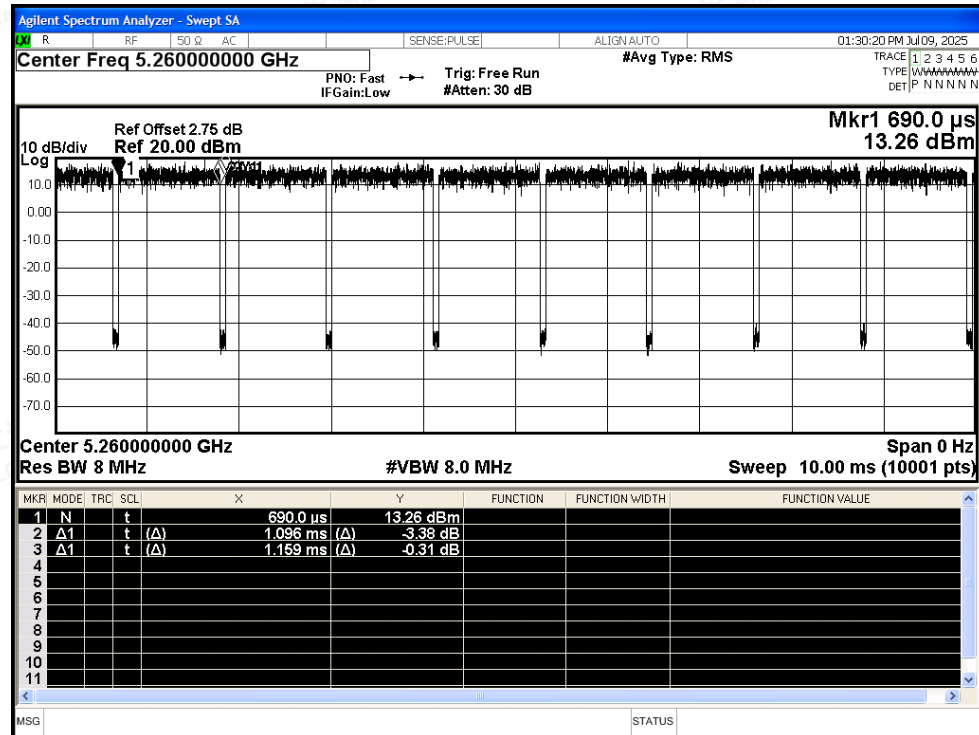

## Duty Cycle NVNT a 5300MHz Ant1

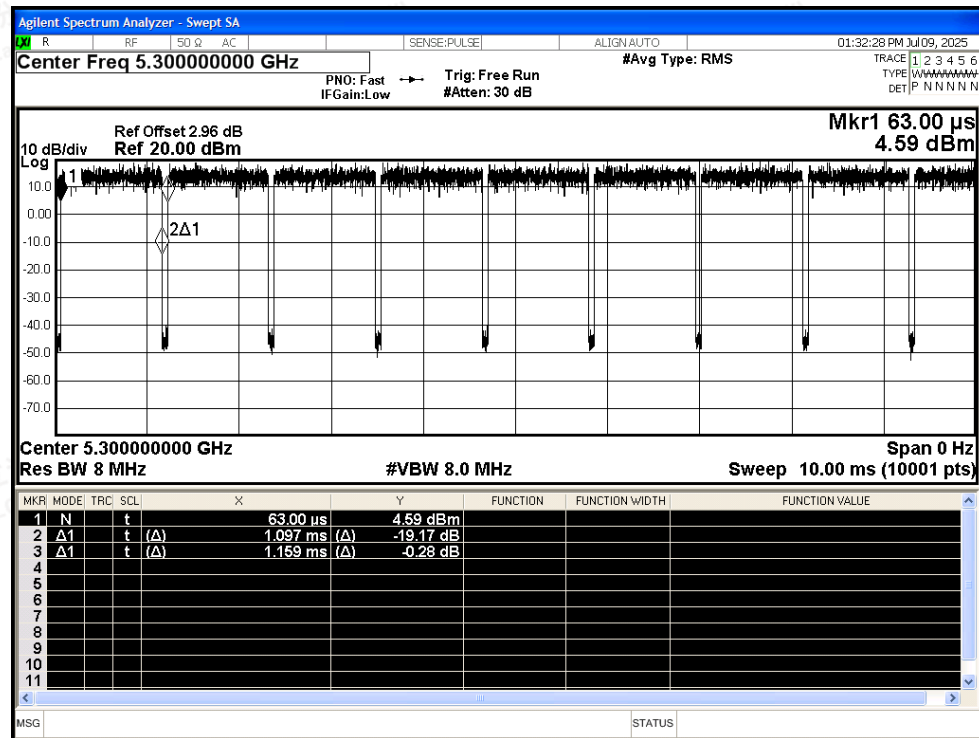

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT a 5320MHz Ant1

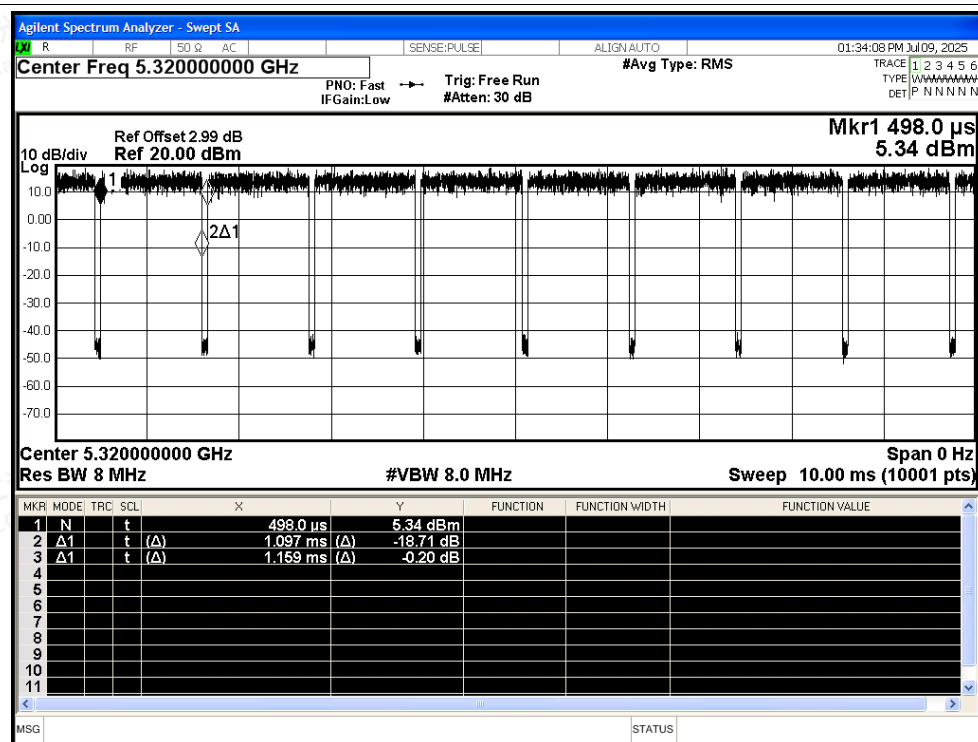

## Duty Cycle NVNT n20 5260MHz Ant1

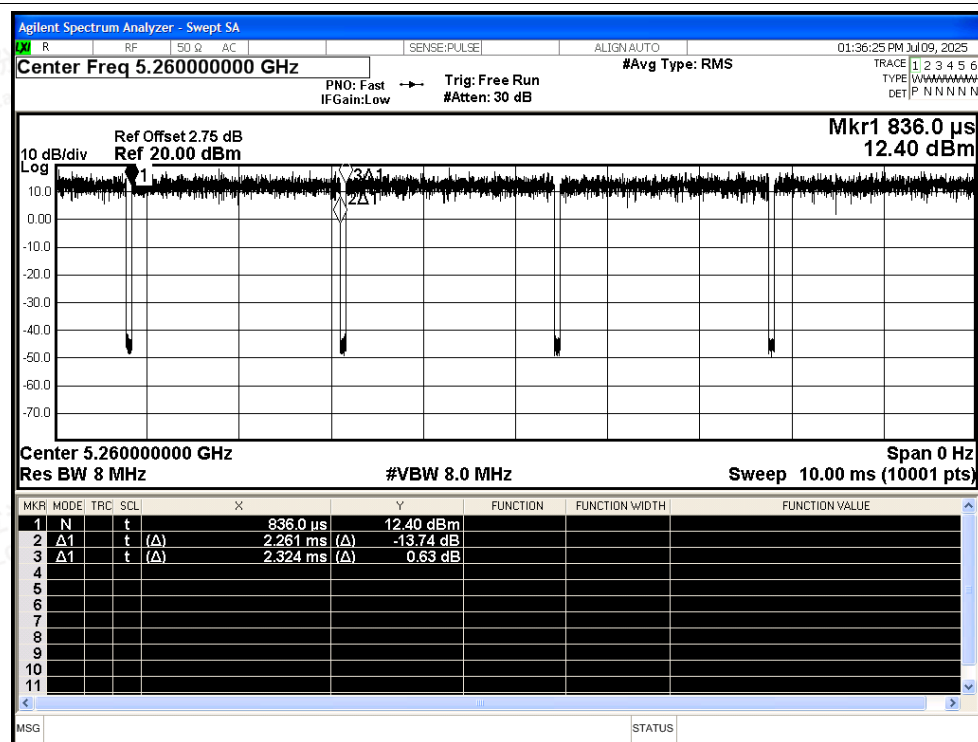

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT n20 5300MHz Ant1

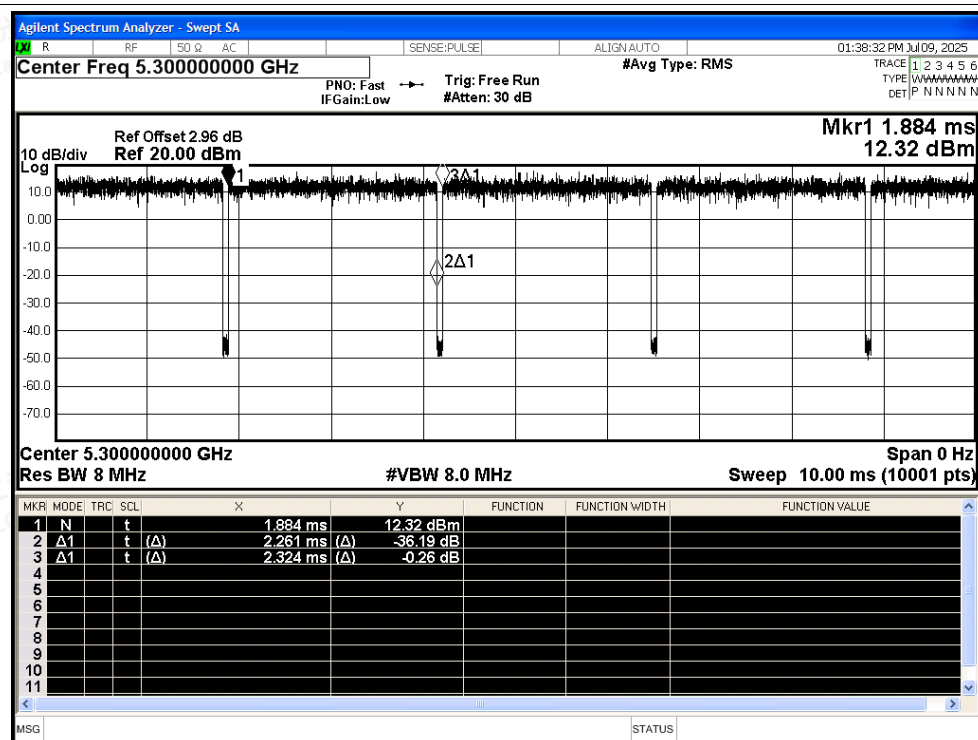

## Duty Cycle NVNT n20 5320MHz Ant1

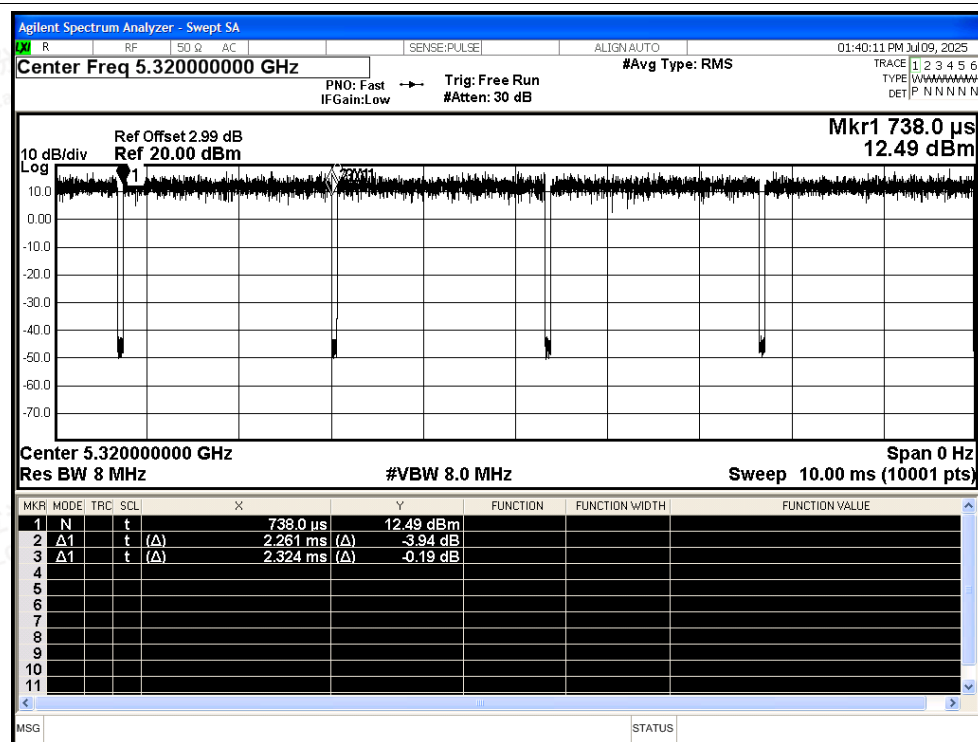

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## Duty Cycle NVNT n40 5270MHz Ant1

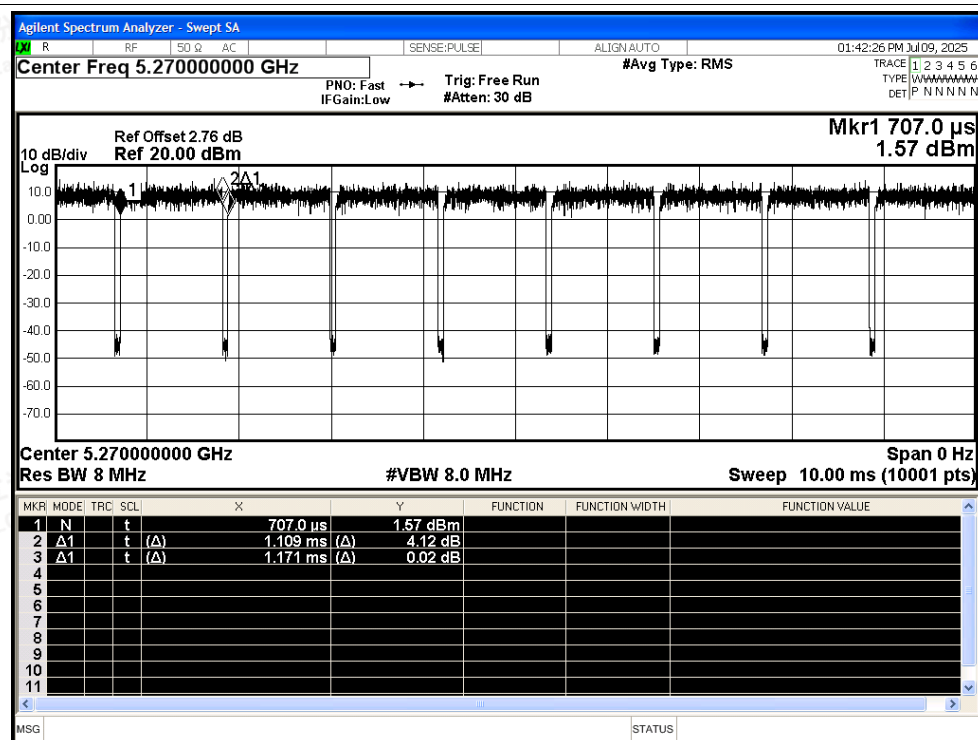

## Duty Cycle NVNT n40 5310MHz Ant1

