

TEST REPORT

Test item description: HEPA Air Purifier
FCC ID: 2BGYX-AP03
Trademark(s): Provirtec
Model/Type reference: AP-03, AP-03 Pro, AP-03 A, AP-03 B
Applicant's name: Shenzhen Qichuang Intelligent Environment Technology Co.,LTD
Address: 20D Block A, South District, Lvjing Xiangsong Meilu Yuan, Xinniu Community, Minzhi Street, Longhua District, Shenzhen, China
Manufacturer: Shenzhen Qichuang Intelligent Environment Technology Co.,LTD
Address: 20D Block A, South District, Lvjing Xiangsong Meilu Yuan, Xinniu Community, Minzhi Street, Longhua District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: May. 14, 2026
Sample tested Date: May. 14, 2026 to May. 26, 2026
Issue Date: May. 26, 2026
Report No.: CTB26051404701RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Bin Mei

Kai Chen

Martin Feng

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. The tested sample(s) and the sample information are provided by the applicant. The authenticity, accuracy, and completeness of the provided information are the sole responsibility of the applicant. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The result decision rules of our laboratory are based solely on the direct comparison between the actual measured values of test results and the standard limits, without considering the measurement uncertainty. "★" indicates the testing items were fulfilled by subcontracted lab. "—" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	6
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup.....	11
6.2 Limit.....	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup.....	15
7.2 Limit.....	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	34
8.1 Block Diagram Of Test Setup.....	34
8.2 Limit.....	34
8.3 Test procedure	34
8.4 Test Result	35
9. CONDUCTED OUTPUT POWER.....	41
9.1 Block Diagram Of Test Setup.....	41
9.2 Limit.....	41
9.3 Test procedure	41
9.4 Test Result	41
10. 6DB OCCUPIED BANDWIDTH.....	42
10.1 Block Diagram Of Test Setup.....	42
10.2 Limit.....	42
10.3 Test procedure	42
10.4 Test Result	42
11. POWER SPECTRAL DENSITY.....	46
11.1 Block Diagram Of Test Setup.....	46
11.2 Limit.....	46
11.3 Test procedure	46
11.4 Test Result	46
12. ANTENNA REQUIREMENT	50
13. EUT TEST SETUP PHOTOGRAPHS.....	51

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB26051404701RF02	May. 26, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density, Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9kHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
Humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	AP-03, AP-03 Pro, AP-03 A, AP-03 B
Model Description:	All the model are the same circuit and RF module, only the name is different. Test sample model: AP-03
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel
Max. RF output power:	WiFi (2.4G): 15.829dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): PCB antenna
Antenna Gain:	WiFi (2.4G): 2.45dBi
Ratings:	INPUT: AC 100-240V~50/60Hz 1.5A Max 60W OUTPUT: 24V DC 2.5A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2026/5/14	2027/5/13
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2026/5/14	2027/5/13
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2026/5/14	2027/5/13
4	Communication test set	R&S	CMW500	108058	V3.5.80	2026/5/14	2027/5/13
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/5/14	2027/5/13
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2026/5/14	2027/5/13
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2026/5/14	2027/5/13
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2026/5/14	2027/5/13
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2026/5/16	2027/5/15
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2026/5/16	2027/5/15
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2026/5/16	2027/5/15
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/7/13	2026/7/12
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2026/5/15	2027/5/14

18	Amplifier	HP	8447E	2945A02747	/	2026/5/15	2027/5/14
19	Amplifier	Agilent	8449B	3008A01838	/	2026/5/14	2027/5/13
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2026/5/17	2027/5/16
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2026/5/15	2027/5/14
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/5/17	2027/5/16
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2026/5/14	2027/5/13
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2026/5/15	2027/5/14
4	Coaxial cable	ZDECL	Z302S	18091904	/	2026/5/14	2027/5/13
5	ISN	Schwarzbeck	NTFM8158	183	/	2026/5/18	2027/5/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2026/5/16	2027/5/15
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2026/5/22	2027/5/21
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2026/5/14	2027/5/13
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2026/5/14	2027/5/13

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/5/15	2027/5/14
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2026/5/17	2027/5/16
4	Amplifier	Agilent	8449B	3008A01838	/	2026/5/14	2027/5/13

5	Amplifier	HP	8447E	2945A02747	/	2026/5/15	2027/5/14
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/5/17	2027/5/16
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2026/5/15	2027/5/14
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/5/14	2027/5/13
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2026/5/14	2027/5/13
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2026/5/14	2027/5/13
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2026/5/14	2027/5/13
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2026/5/14	2027/5/13
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2026/5/14	2027/5/13
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2026/5/14	2027/5/13

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

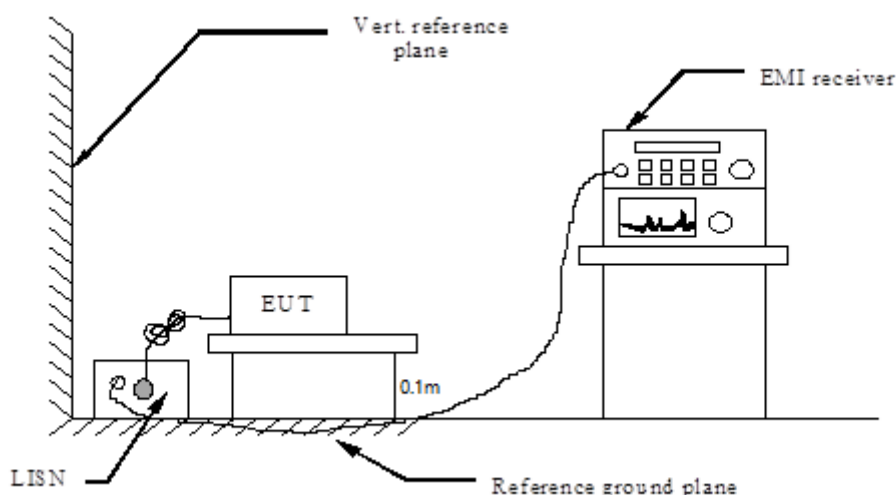

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.

6.4 Test Result

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

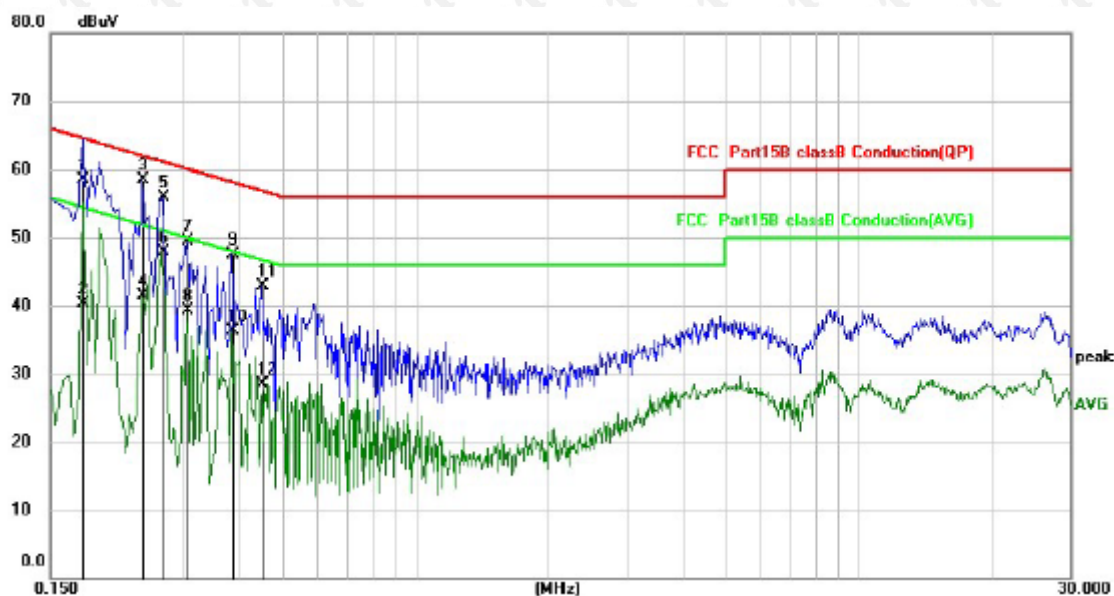


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1780	48.36	10.08	58.44	64.58	-6.14	QP
2		0.1780	30.20	10.08	40.28	54.58	-14.30	AVG
3		0.2420	48.50	10.08	58.58	62.03	-3.45	QP
4		0.2420	31.37	10.08	41.45	52.03	-10.58	AVG
5		0.2700	45.85	10.08	55.93	61.12	-5.19	QP
6	*	0.2700	37.86	10.08	47.94	51.12	-3.18	AVG
7		0.3060	39.33	10.08	49.41	60.08	-10.67	QP
8		0.3060	29.24	10.08	39.32	50.08	-10.76	AVG
9		0.3860	37.33	10.09	47.42	58.15	-10.73	QP
10		0.3860	26.18	10.09	36.27	48.15	-11.88	AVG
11		0.4500	32.82	10.09	42.91	56.88	-13.97	QP
12		0.4500	18.45	10.09	28.54	46.88	-18.34	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

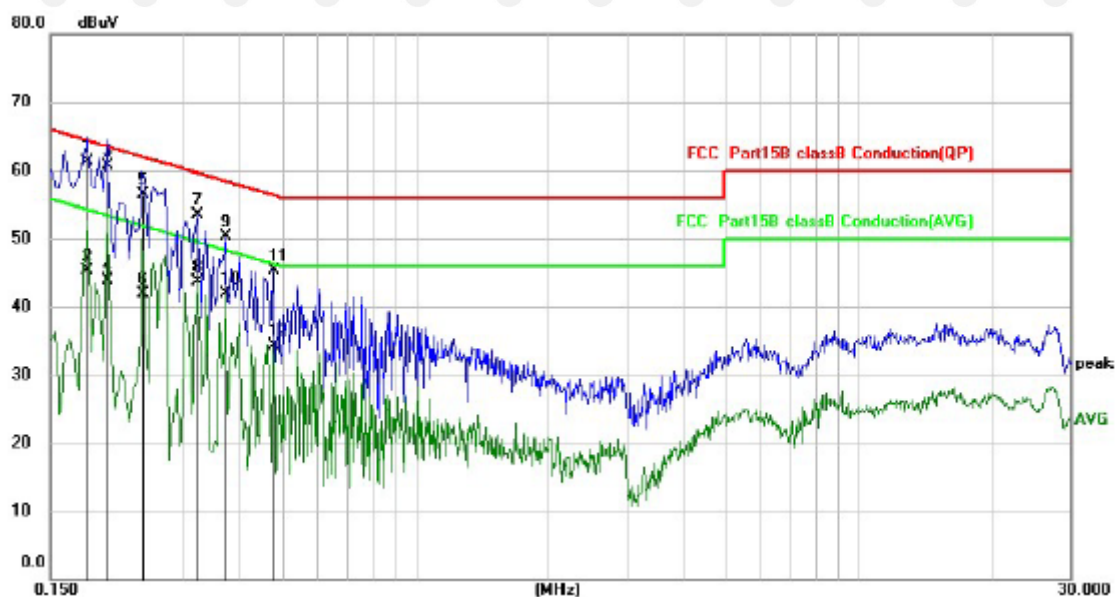


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1819	51.15	10.08	61.23	64.40	-3.17	QP
2		0.1819	35.24	10.08	45.32	54.40	-9.08	AVG
3	*	0.2020	50.70	10.08	60.78	63.53	-2.75	QP
4		0.2020	33.85	10.08	43.93	53.53	-9.60	AVG
5		0.2420	46.39	10.08	56.47	62.03	-5.56	QP
6		0.2420	31.87	10.08	41.95	52.03	-10.08	AVG
7		0.3220	43.42	10.08	53.50	59.66	-6.16	QP
8		0.3220	33.54	10.08	43.62	49.66	-6.04	AVG
9		0.3740	40.31	10.09	50.40	58.41	-8.01	QP
10		0.3740	31.87	10.09	41.96	48.41	-6.45	AVG
11		0.4780	35.27	10.09	45.36	56.37	-11.01	QP
12		0.4780	24.17	10.09	34.26	46.37	-12.11	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit


7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

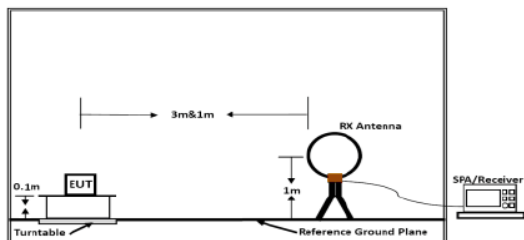


Below 30MHz

Figure 1. Below 30MHz

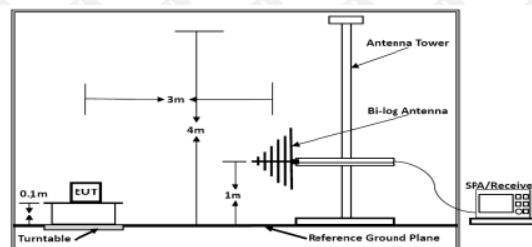

Below 1GHz

Figure 2. 30MHz to 1GHz

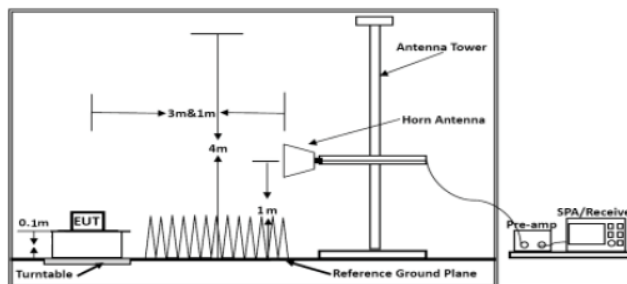

Above 1GHz

Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.1 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	1/T	Average

Remark: If the EUT D is < 98%, then set VBW 1/ T, where Tis defined in item a) of 12.2.

7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		150.5377	34.65	-4.35	30.30	43.50	-13.20	QP
2		306.2162	36.31	-2.42	33.89	46.00	-12.11	QP
3		454.3100	37.17	0.10	37.27	46.00	-8.73	QP
4		541.3721	37.10	2.20	39.30	46.00	-6.70	QP
5	*	716.6820	35.21	6.74	41.95	46.00	-4.05	QP
6	!	775.5167	33.31	8.03	41.34	46.00	-4.66	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		68.9929	41.40	-7.71	33.69	40.00	-6.31	QP
2		85.8983	37.65	-8.33	29.32	40.00	-10.68	QP
3		147.9214	40.37	-4.60	35.77	43.50	-7.73	QP
4		391.4082	33.43	-1.04	32.39	46.00	-13.61	QP
5	!	446.4139	42.03	-0.05	41.98	46.00	-4.02	QP
6	*	824.5968	33.88	8.79	42.67	46.00	-3.33	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9k-30MHz measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.23	-3.64	62.59	74	-11.41	peak
4824	50.51	-3.64	46.87	54	-7.13	AVG
7236	57.90	-0.95	56.95	74	-17.05	peak
7236	46.12	-0.95	45.17	54	-8.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.08	-3.64	62.44	74	-11.56	peak
4824	49.10	-3.64	45.46	54	-8.54	AVG
7236	56.42	-0.95	55.47	74	-18.53	peak
7236	45.02	-0.95	44.07	54	-9.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.15	-3.51	62.64	74	-11.36	peak
4874	49.10	-3.51	45.59	54	-8.41	AVG
7311	59.07	-0.82	58.25	74	-15.75	peak
7311	44.27	-0.82	43.45	54	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.12	-3.51	61.61	74	-12.39	peak
4874	47.15	-3.51	43.64	54	-10.36	AVG
7311	59.24	-0.82	58.42	74	-15.58	peak
7311	43.47	-0.82	42.65	54	-11.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.61	-3.43	60.18	74	-13.82	peak
4924	47.24	-3.43	43.81	54	-10.19	AVG
7386	58.43	-0.75	57.68	74	-16.32	peak
7386	44.03	-0.75	43.28	54	-10.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.32	-3.43	59.89	74	-14.11	peak
4924	47.44	-3.43	44.01	54	-9.99	AVG
7386	58.72	-0.75	57.97	74	-16.03	peak
7386	42.80	-0.75	42.05	54	-11.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz。

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.01	-3.64	60.37	74	-13.63	peak
4824	49.32	-3.64	45.68	54	-8.32	AVG
7236	59.14	-0.95	58.19	74	-15.81	peak
7236	44.55	-0.95	43.60	54	-10.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.49	-3.64	60.85	74	-13.15	peak
4824	46.32	-3.64	42.68	54	-11.32	AVG
7236	59.07	-0.95	58.12	74	-15.88	peak
7236	45.54	-0.95	44.59	54	-9.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.67	-3.51	61.16	74	-12.84	peak
4874	49.07	-3.51	45.56	54	-8.44	AVG
7311	59.05	-0.82	58.23	74	-15.77	peak
7311	43.17	-0.82	42.35	54	-11.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.92	-3.51	59.41	74	-14.59	peak
4874	47.82	-3.51	44.31	54	-9.69	AVG
7311	56.82	-0.82	56.00	74	-18.00	peak
7311	42.19	-0.82	41.37	54	-12.63	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.14	-3.43	61.71	74	-12.29	peak
4924	49.87	-3.43	46.44	54	-7.56	AVG
7386	57.59	-0.75	56.84	74	-17.16	peak
7386	42.77	-0.75	42.02	54	-11.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.43	-3.43	60.00	74	-14.00	peak
4924	48.31	-3.43	44.88	54	-9.12	AVG
7386	57.99	-0.75	57.24	74	-16.76	peak
7386	42.86	-0.75	42.11	54	-11.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.67	-3.64	61.03	74	-12.97	peak
4824	48.31	-3.64	44.67	54	-9.33	AVG
7236	57.51	-0.95	56.56	74	-17.44	peak
7236	43.02	-0.95	42.07	54	-11.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.93	-3.64	60.29	74	-13.71	peak
4824	48.80	-3.64	45.16	54	-8.84	AVG
7236	60.23	-0.95	59.28	74	-14.72	peak
7236	44.79	-0.95	43.84	54	-10.16	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.65	-3.51	60.14	74.00	-13.86	peak
4874.00	49.32	-3.51	45.81	54.00	-8.19	AVG
7311.00	58.47	-0.82	57.65	74.00	-16.35	peak
7311.00	44.04	-0.82	43.22	54.00	-10.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.94	-3.51	60.43	74.00	-13.57	peak
4874.00	45.89	-3.51	42.38	54.00	-11.62	AVG
7311.00	58.12	-0.82	57.30	74.00	-16.70	peak
7311.00	43.16	-0.82	42.34	54.00	-11.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.33	-3.43	59.90	74	-14.10	peak
4924	47.15	-3.43	43.72	54	-10.28	AVG
7386	56.32	-0.75	55.57	74	-18.43	peak
7386	42.38	-0.75	41.63	54	-12.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.09	-3.43	60.66	74	-13.34	peak
4924	46.34	-3.43	42.91	54	-11.09	AVG
7386	56.81	-0.75	56.06	74	-17.94	peak
7386	41.35	-0.75	40.60	54	-13.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.13	-5.81	51.32	74	-22.68	peak
2390	/	-5.81	/	54	/	AVG
2399	64.84	-5.84	59.00	74	-15.00	peak
2399	49.40	-5.84	43.56	54	-10.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.57	-5.81	50.76	74	-23.24	peak
2390	/	-5.81	/	54	/	AVG
2399	62.03	-5.84	56.19	74	-17.81	peak
2399	46.28	-5.84	40.44	54	-13.56	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.86	-5.65	51.21	74	-22.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.68	-5.81	52.87	74	-21.13	peak
2390	/	-5.81	/	54	/	AVG
2399	61.52	-5.84	55.68	74	-18.32	peak
2399	47.49	-5.84	41.65	54	-12.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.59	-5.81	50.78	74	-23.22	peak
2390	/	-5.81	/	54	/	AVG
2399	61.69	-5.84	55.85	74	-18.15	peak
2399	46.95	-5.84	41.11	54	-12.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.49	-5.65	51.84	74	-22.16	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.39	-5.65	50.74	74	-23.26	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.91	-5.81	51.10	74	-22.90	peak
2390	/	-5.81	/	54	/	AVG
2399	63.12	-5.84	57.28	74	-16.72	peak
2399	47.61	-5.84	41.77	54	-12.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.54	-5.81	50.73	74	-23.27	peak
2390	/	-5.81	/	54	/	AVG
2399	60.24	-5.84	54.40	74	-19.60	peak
2399	48.19	-5.84	42.35	54	-11.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.21	-5.65	51.56	74	-22.44	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.13	-5.65	51.48	74	-22.52	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

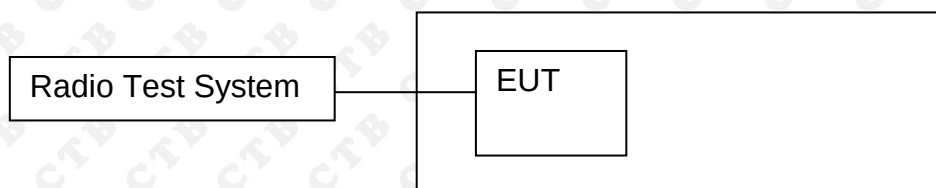


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result

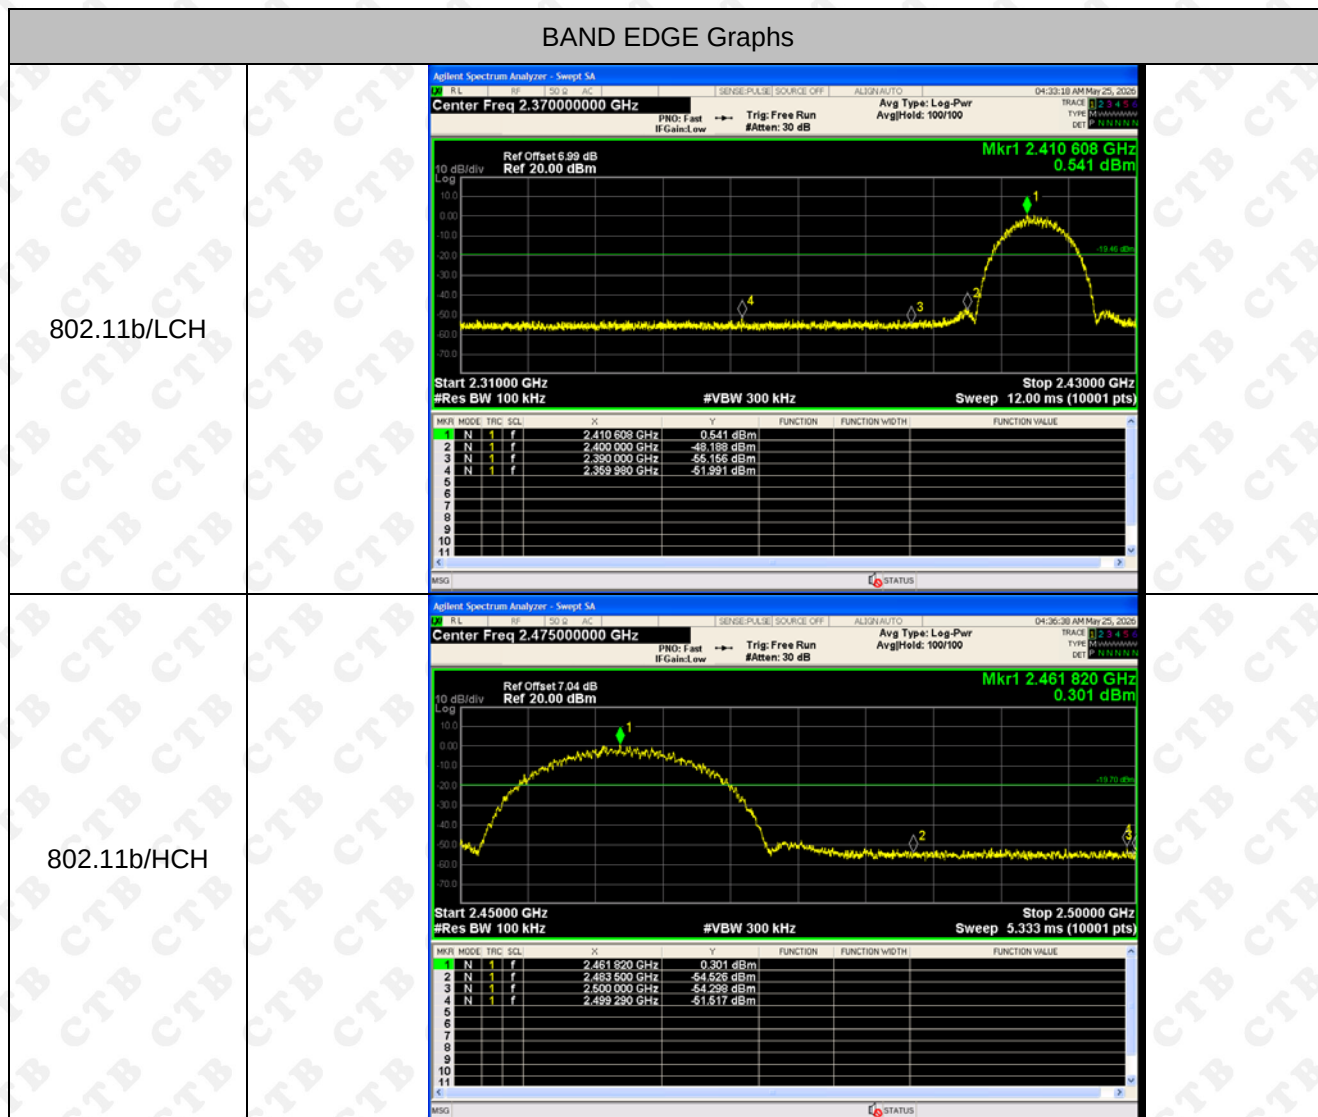


BAND EDGE Graphs


802.11g/LCH

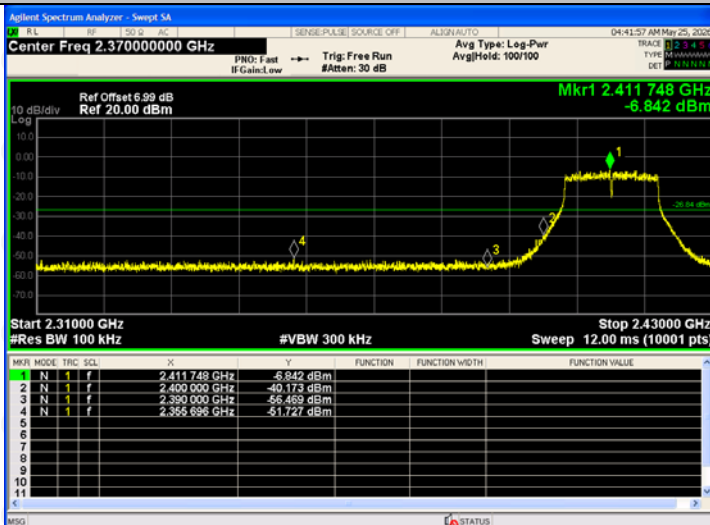


802.11g/HCH

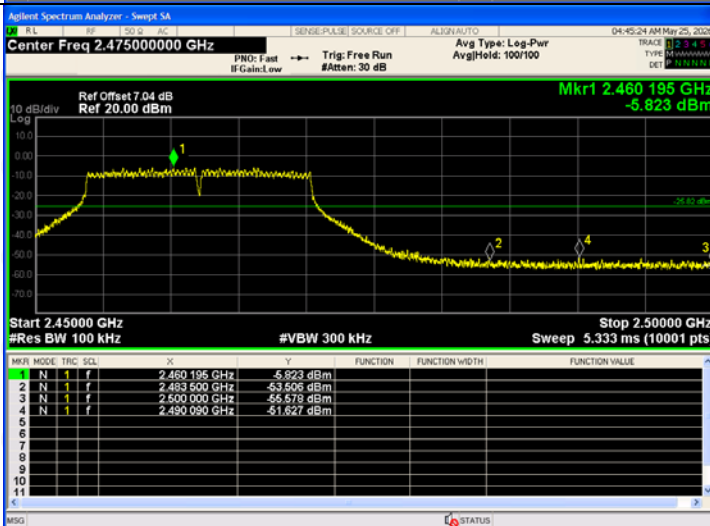

802.11n(HT20)/LCH

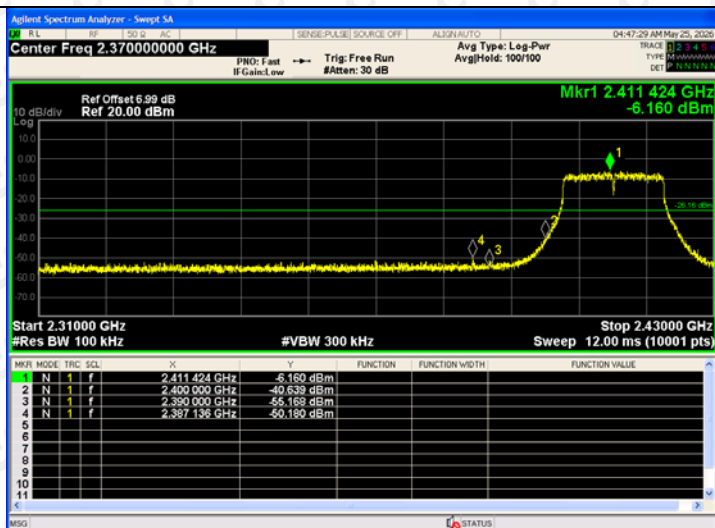


802.11n(HT20)/HCH

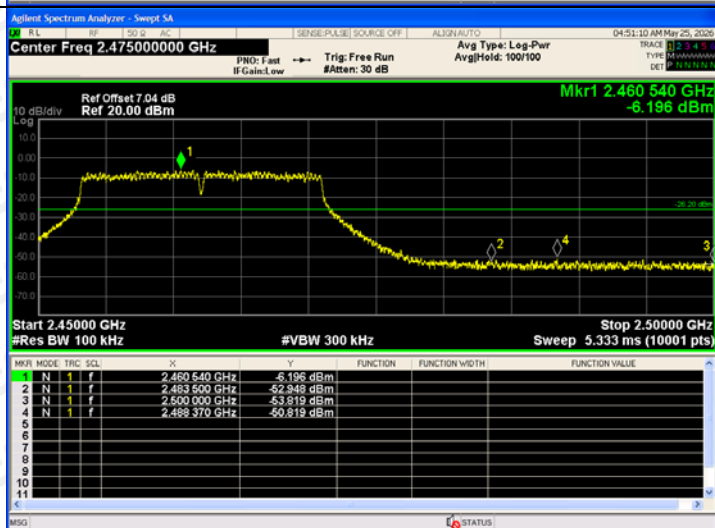


RF Conducted Spurious Emissions Graphs


802.11b/LCH

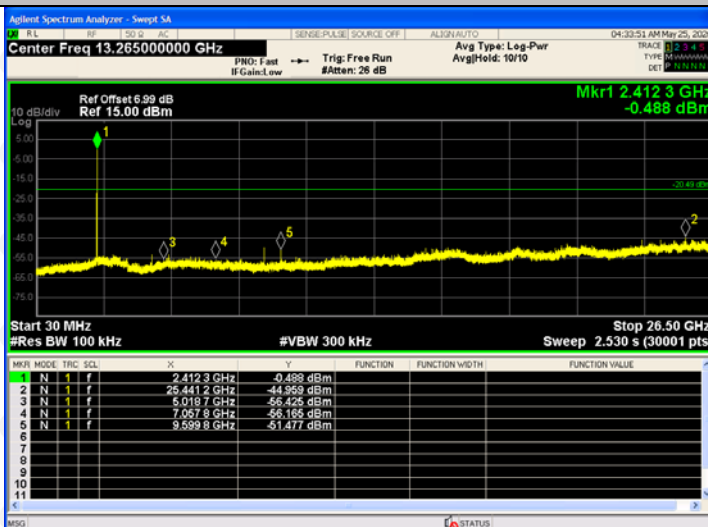

802.11b/MCH

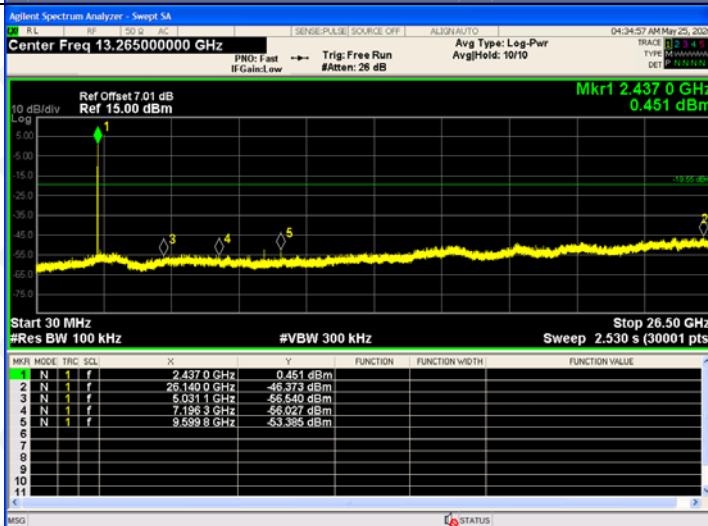


802.11b/HCH

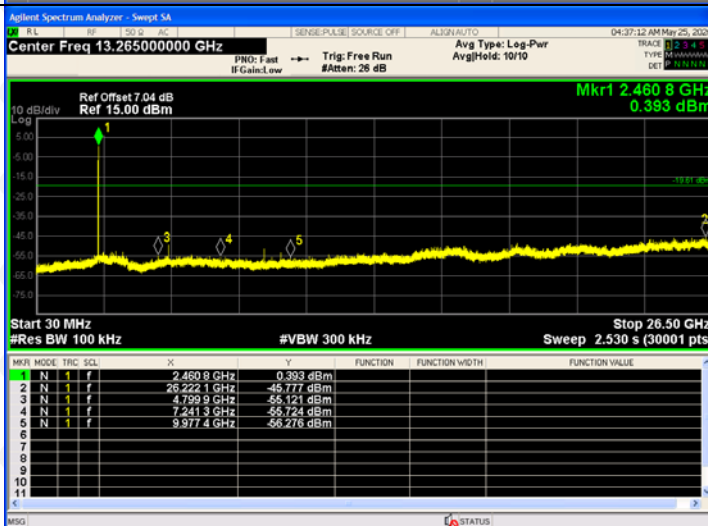


RF Conducted Spurious Emissions Graphs


802.11g/LCH

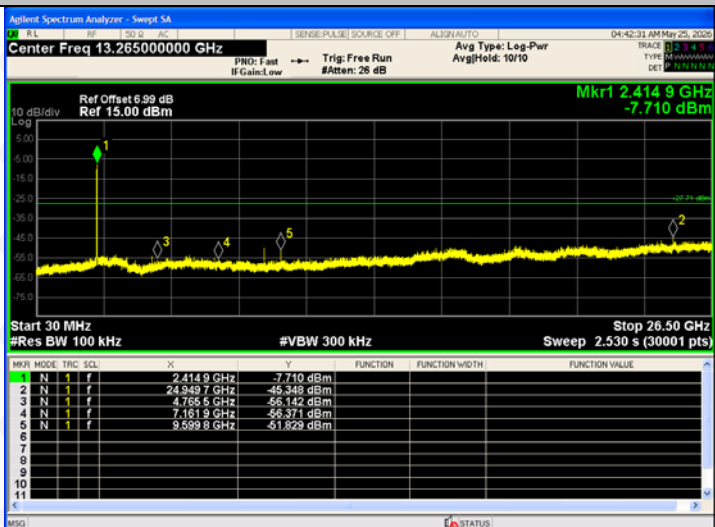

802.11g/MCH

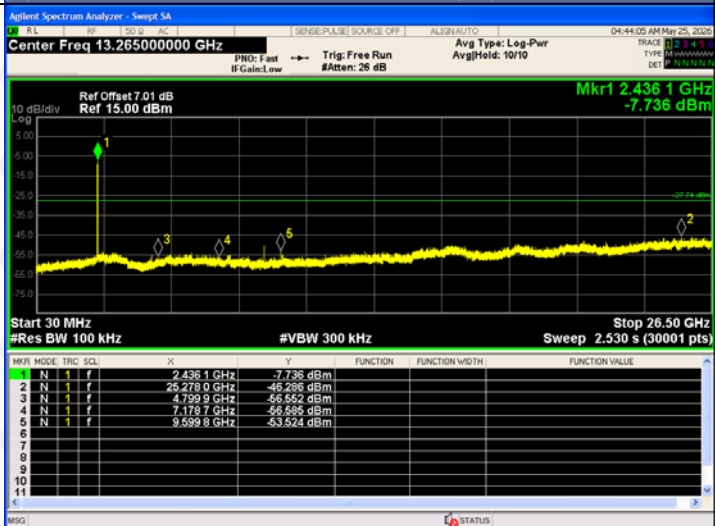


802.11g/HCH

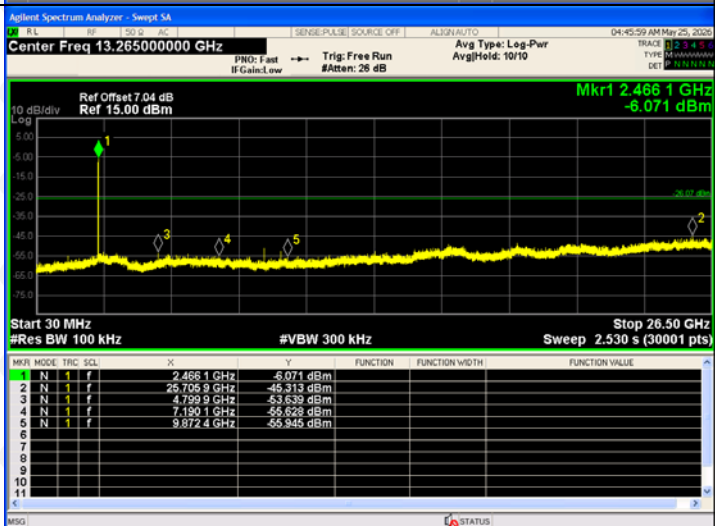


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

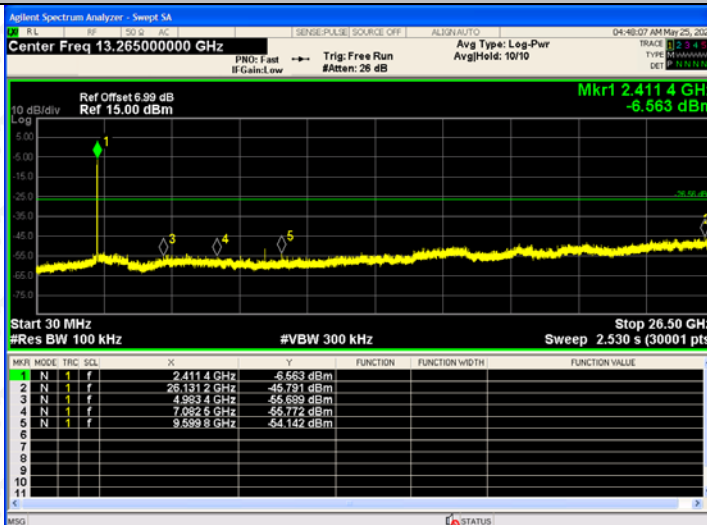

802.11n(HT20)/MCH

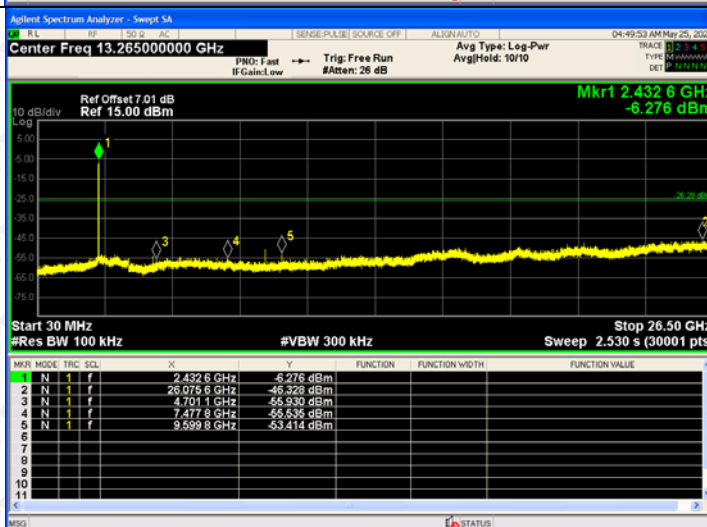

802.11n(HT20)/HCH

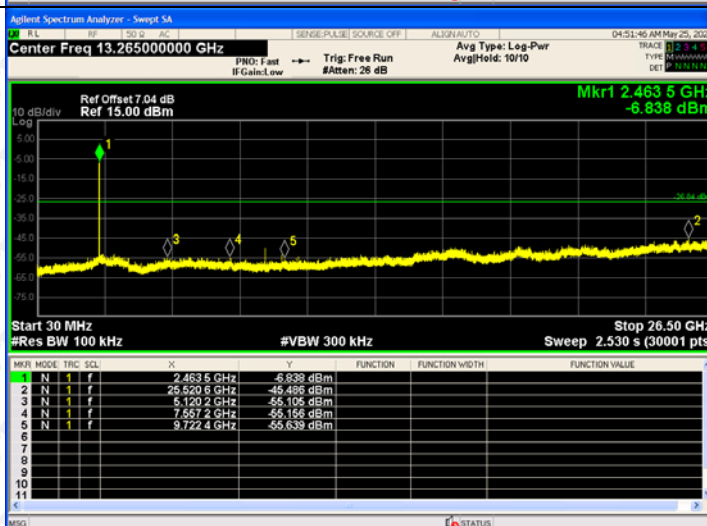

9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	15.829	30	PASS
	MCH	15.468	30	PASS
	HCH	15.374	30	PASS
802.11g	LCH	13.612	30	PASS
	MCH	13.327	30	PASS
	HCH	14.379	30	PASS
802.11n(HT20)	LCH	14.329	30	PASS
	MCH	14.311	30	PASS
	HCH	14.405	30	PASS

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

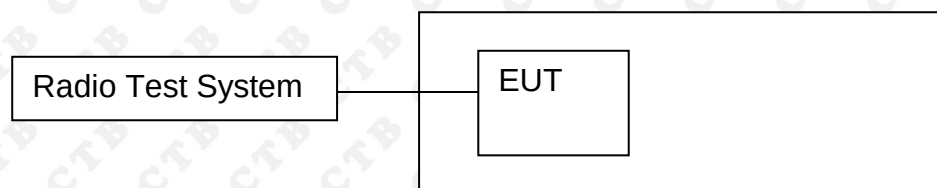

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	8.723	500	PASS
	MCH	9.67	500	PASS
	HCH	8.6	500	PASS
802.11g	LCH	16.519	500	PASS
	MCH	16.566	500	PASS
	HCH	16.579	500	PASS
802.11n(HT20)	LCH	17.74	500	PASS
	MCH	17.663	500	PASS
	HCH	17.72	500	PASS


Test Graph:




802.11g/LCH



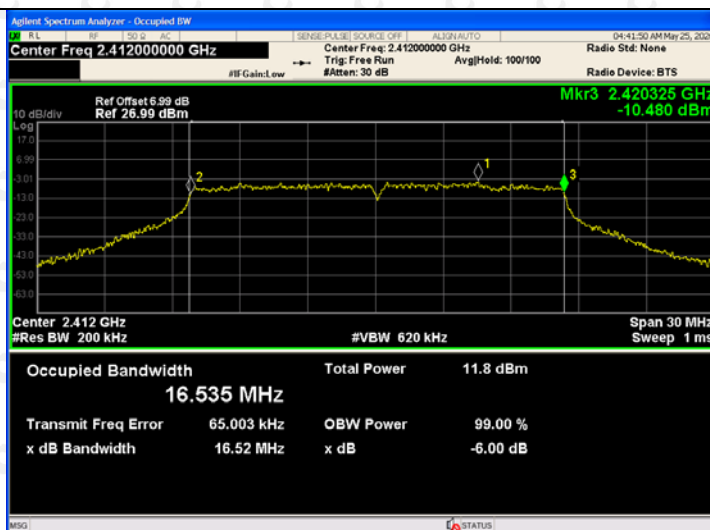


802.11g/MCH

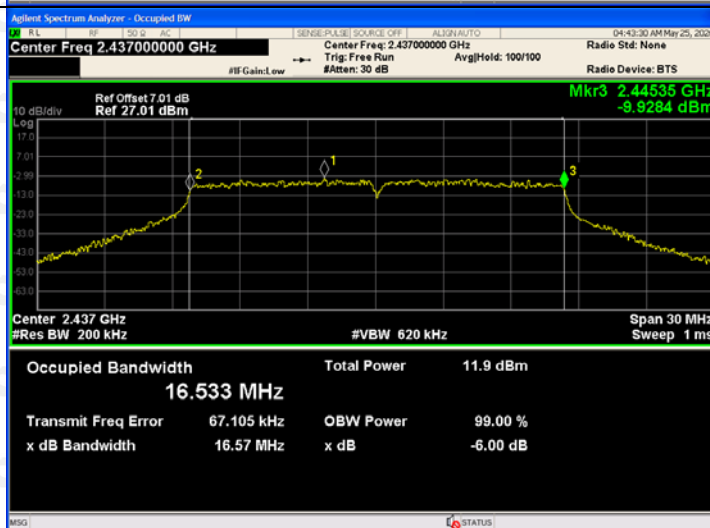


802.11g/HCH

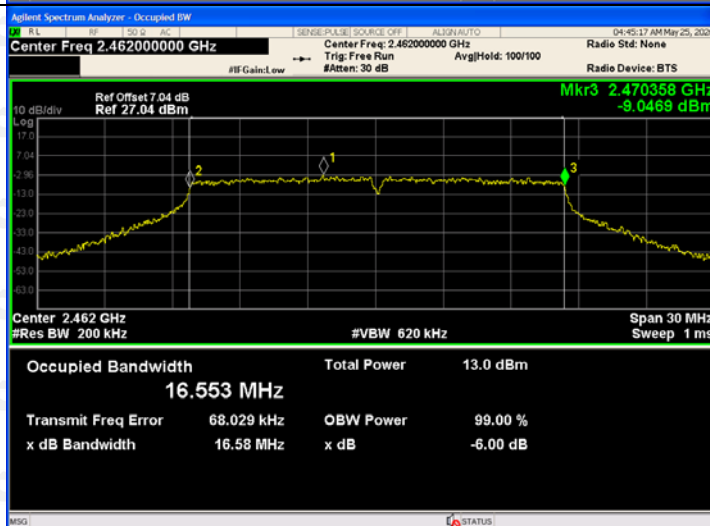

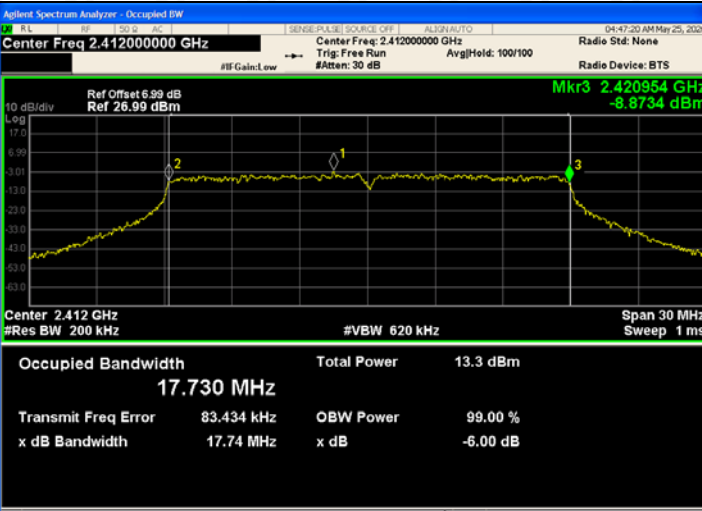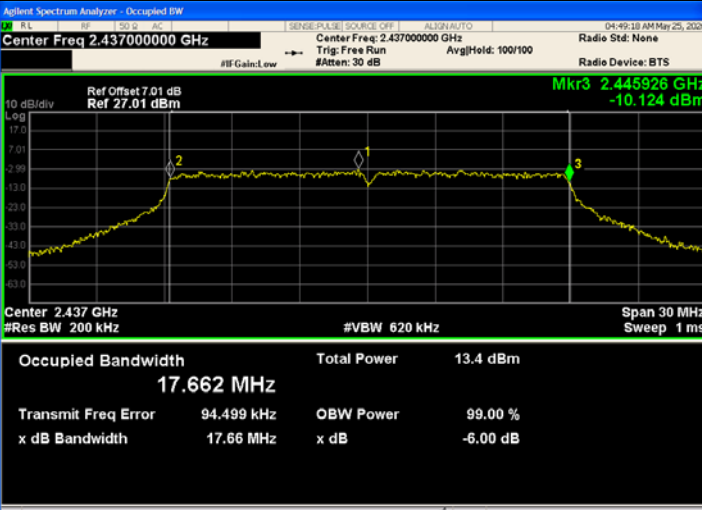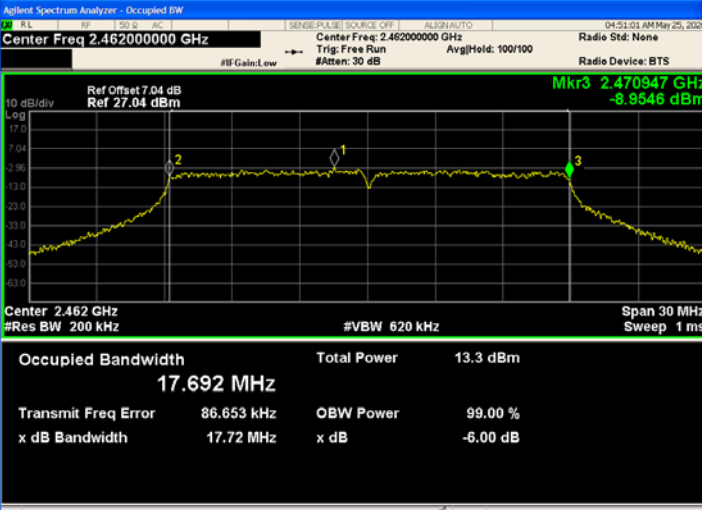802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 6.99 dB Ref 26.99 dBm Mkr3 2.420954 GHz -8.8734 dBm Center 2.412 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.730 MHz Total Power 13.3 dBm Transmit Freq Error 83.434 kHz OBW Power 99.00 % x dB Bandwidth 17.74 MHz x dB -6.00 dB
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.445926 GHz -10.124 dBm Center 2.437 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.662 MHz Total Power 13.4 dBm Transmit Freq Error 94.499 kHz OBW Power 99.00 % x dB Bandwidth 17.66 MHz x dB -6.00 dB
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.470947 GHz -8.9546 dBm Center 2.462 GHz #Res BW 200 kHz #VBW 620 kHz Span 30 MHz Sweep 1 ms Occupied Bandwidth 17.692 MHz Total Power 13.3 dBm Transmit Freq Error 86.653 kHz OBW Power 99.00 % x dB Bandwidth 17.72 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

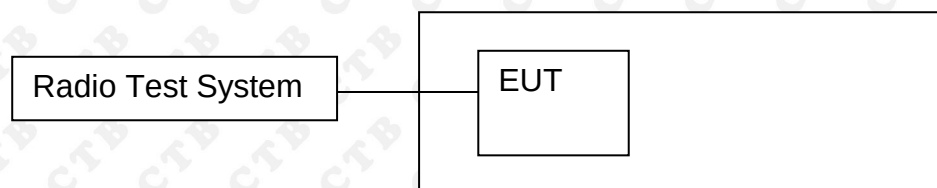

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3kHz]	Limit(8 dBm (in any 3kHz))	Verdict
802.11b	LCH	-13.151	8	PASS
	MCH	-13.47	8	PASS
	HCH	-13.536	8	PASS
802.11g	LCH	-20.539	8	PASS
	MCH	-20.645	8	PASS
	HCH	-19.545	8	PASS
802.11n (HT20)	LCH	-20.637	8	PASS
	MCH	-19.392	8	PASS
	HCH	-19.291	8	PASS


Test Graph

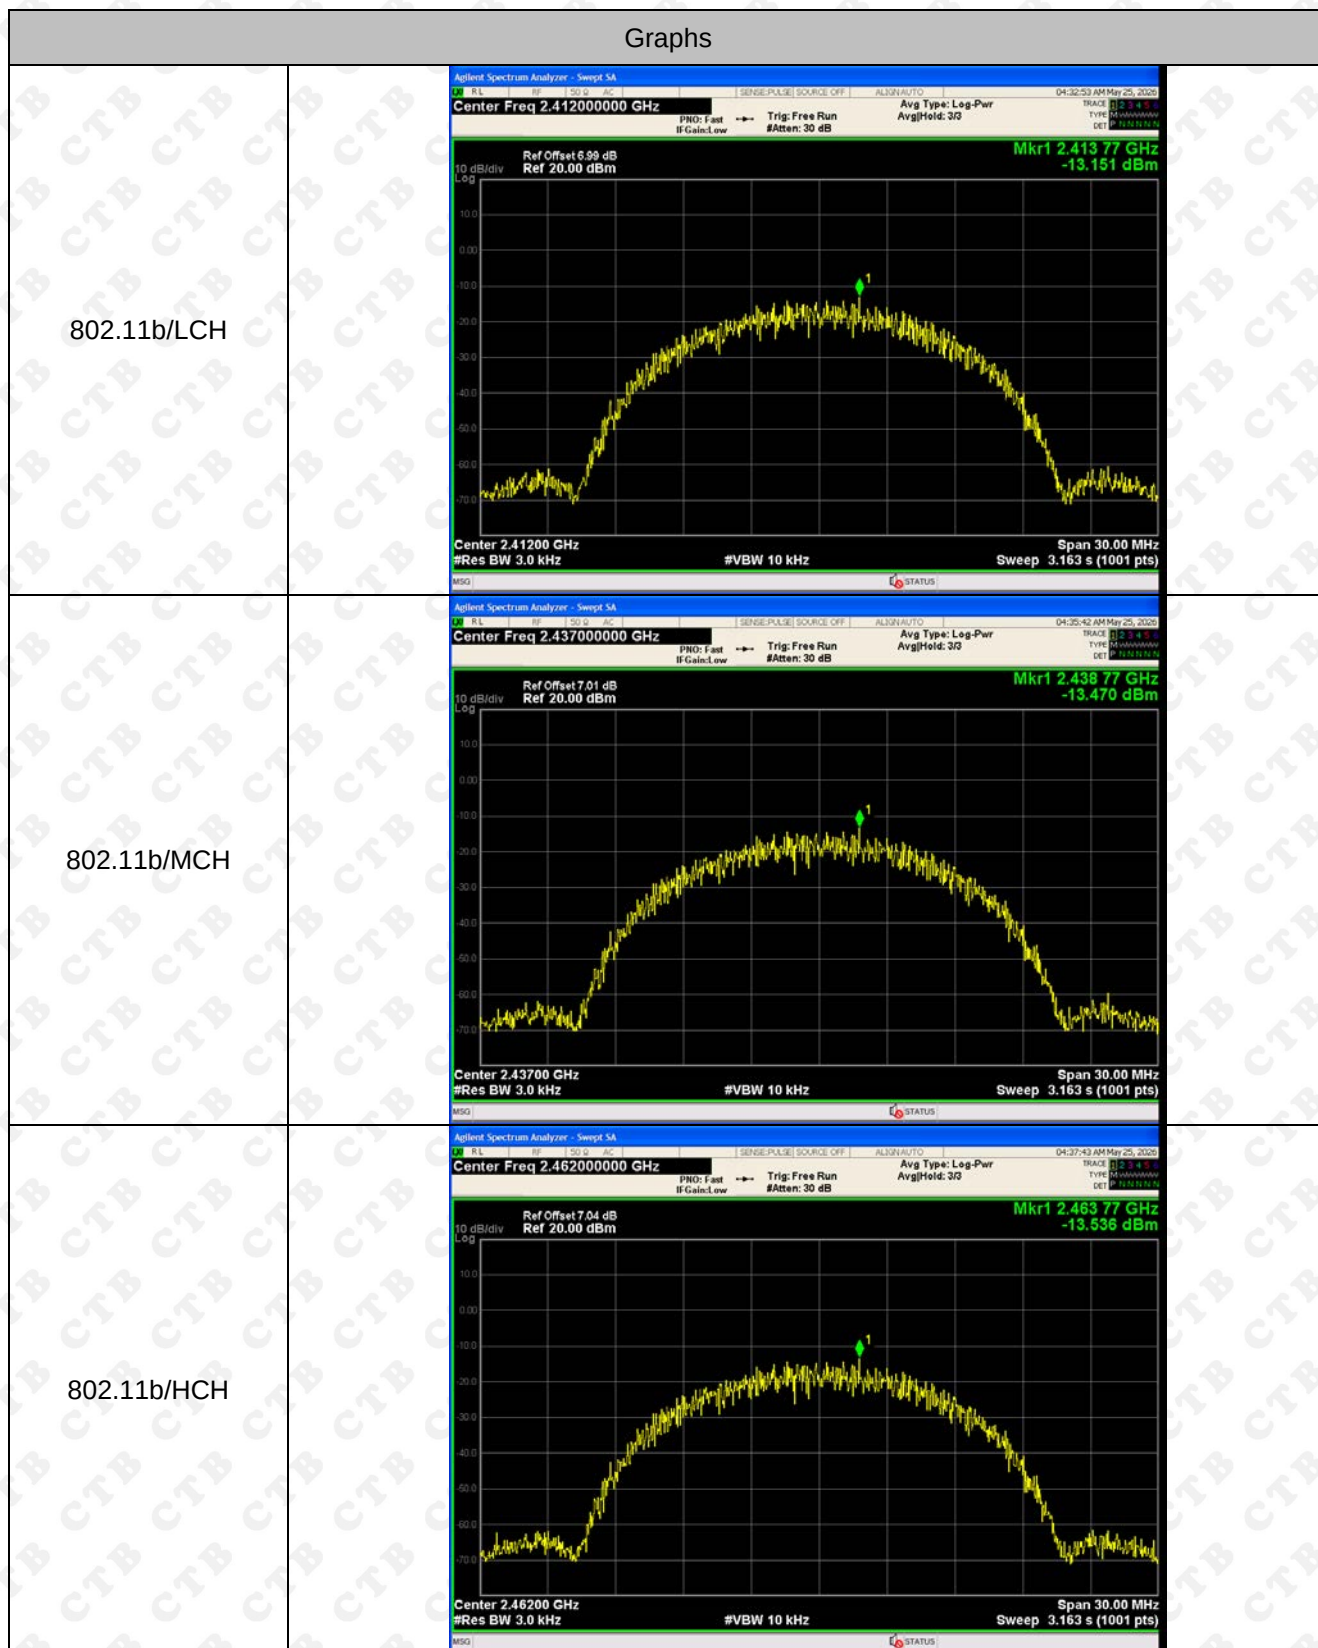

802.11g/LCH




802.11g/MCH

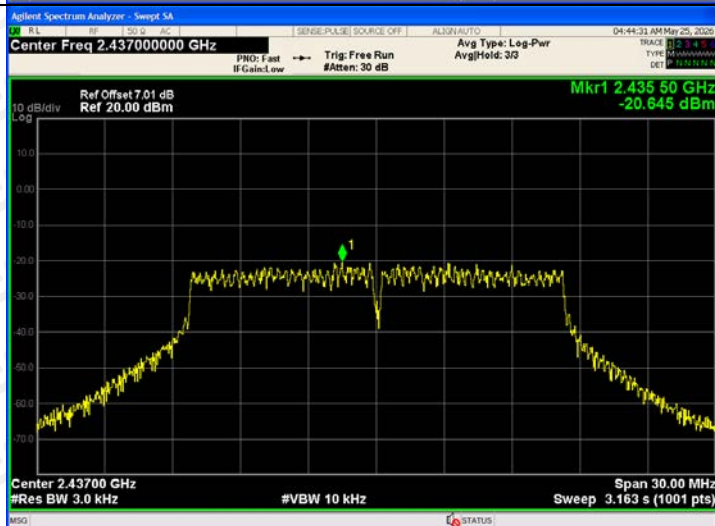

802.11g/HCH



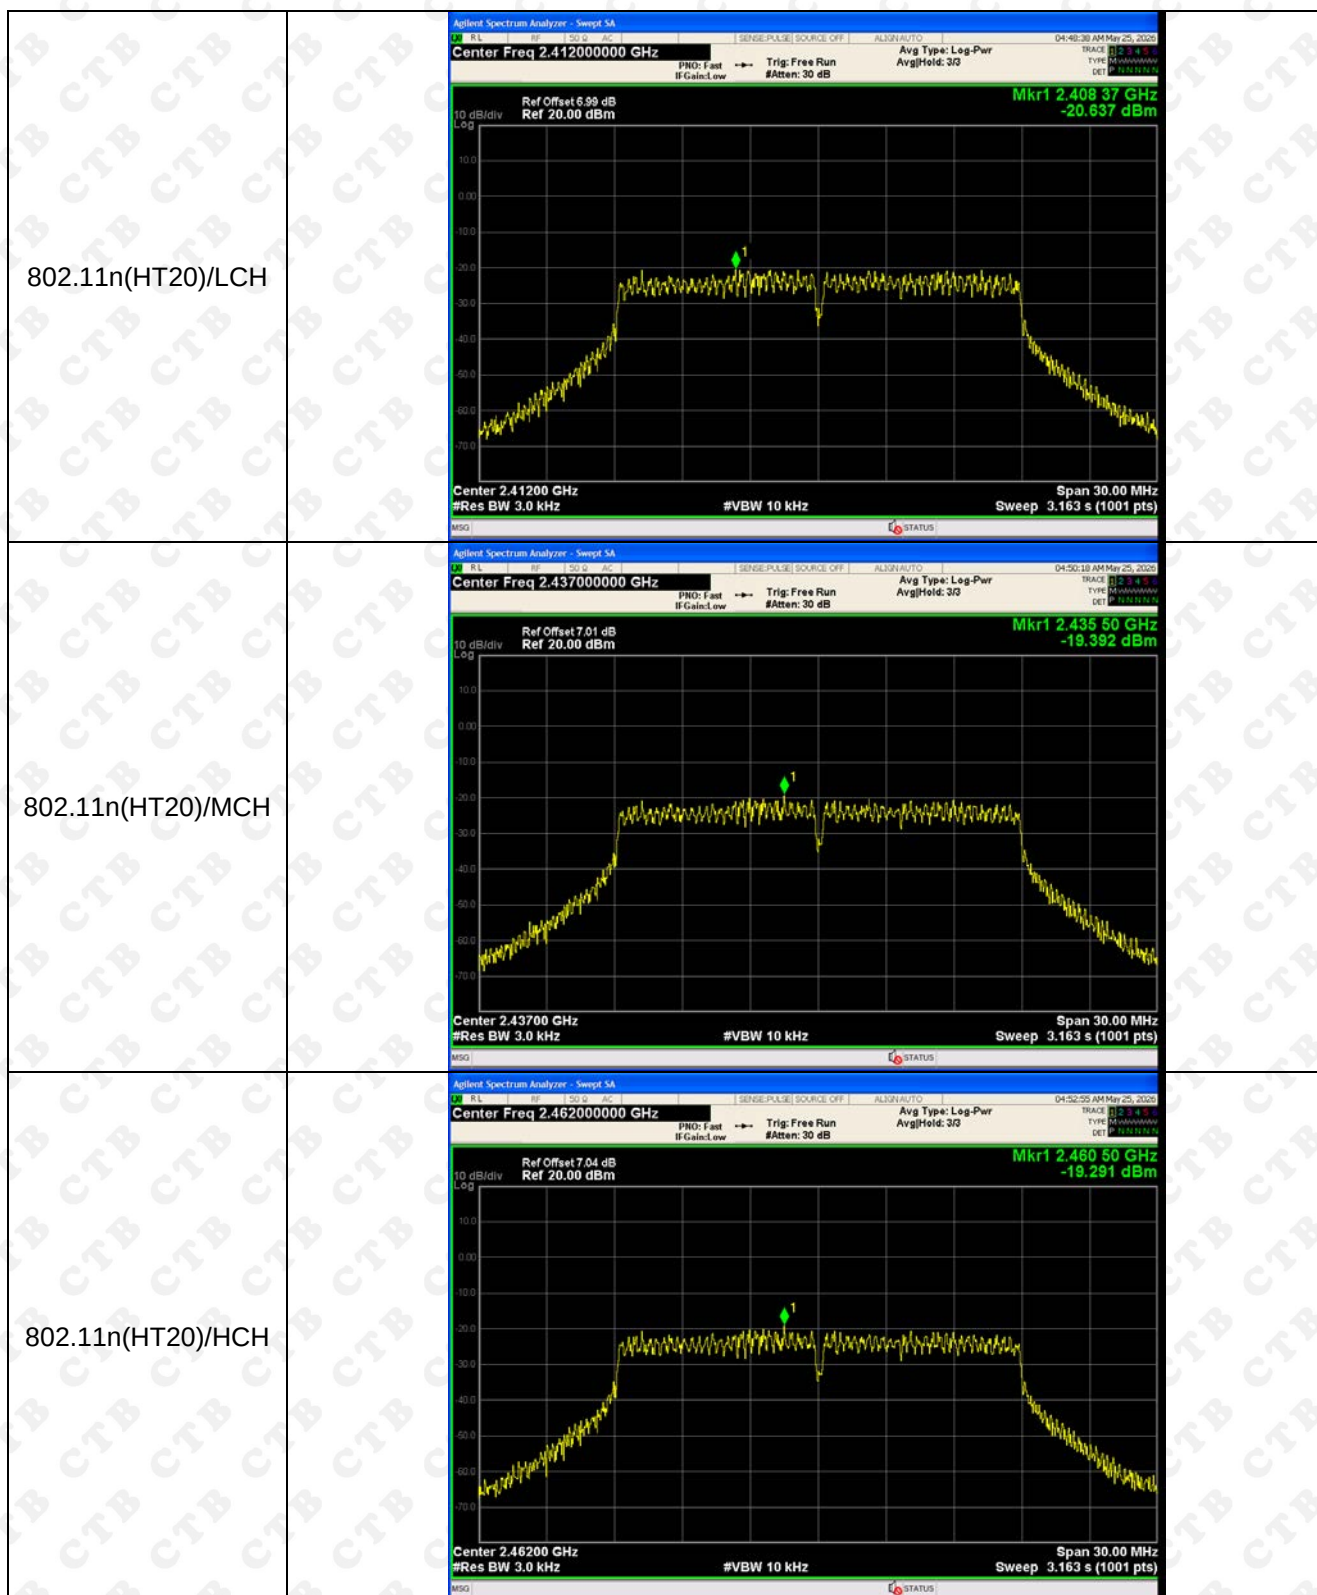

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is 2.45dBi.


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G

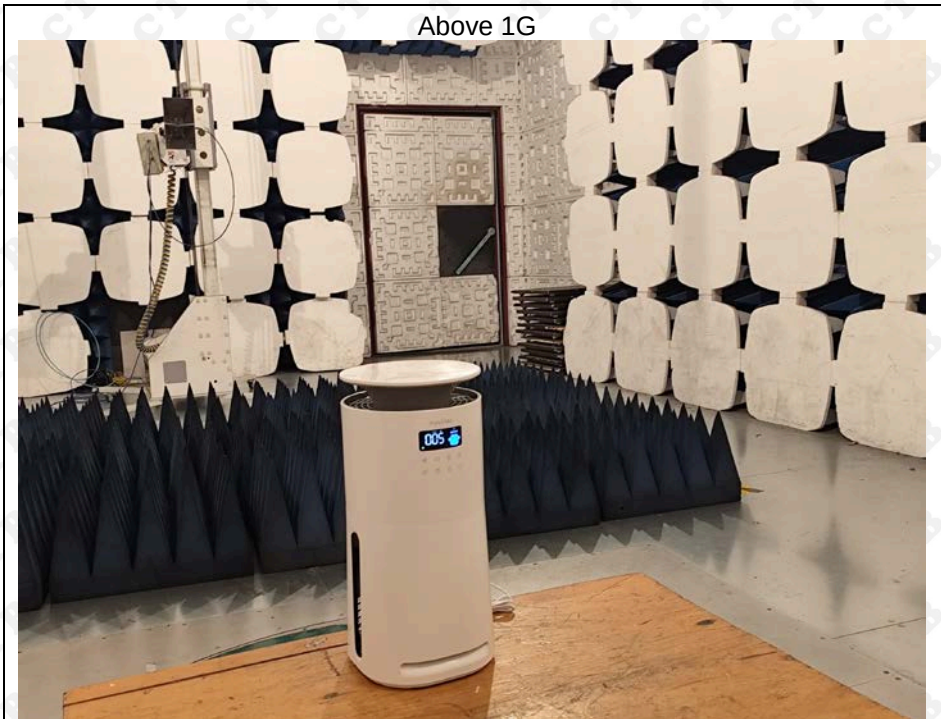

Conducted Emission



RF Conducted



***** END OF REPORT *****