


无线充说明书

尺寸: 284(D)*90(H) mm

WIRELESS CHARGER SPEAKER WITH LAMP

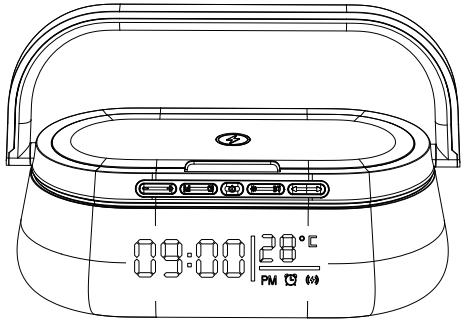

User Manual


CE FCC

MADE IN CHINA

Product Introduction

Thank you for purchasing our product Multi-function Wireless Charger. It uses high-end fast charging chip, luxurious and compact design, and is compatible with any mobile phone that meets Qi standards. It can be perfectly compatible with iPhone8 and above mobile phones, and mobile phones with wireless charging function. Conforms to the fast charging wireless function, effectively saving more time and improving your charging experience.

Product Outline

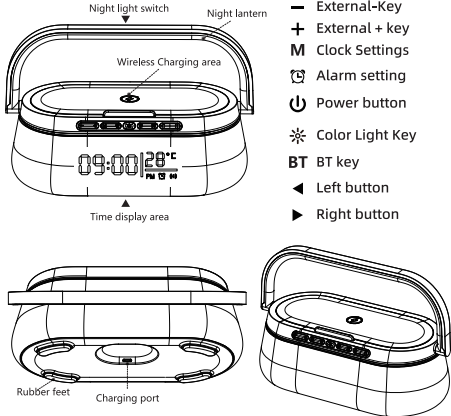

- External-Key
- External + key
- M Clock Settings
- Alarm setting
- Power button
- Color Light Key
- BT BT key
- Left button
- Right button


Applicable Devices

- Devices with built-in quick charge/normal charge wireless receiver.
- Devices with outer-face wireless charging receiver.
- Devices with wireless charging receiver in its protection case .

Note: All devices must be Qi standard.

Instructions

- When charging the battery, the green light is always on and goes out when fully charged. When the wireless charger is working: the standby light is off, the charging blue light is always on and goes out when fully charged, and the blue light flashes when there is a foreign object

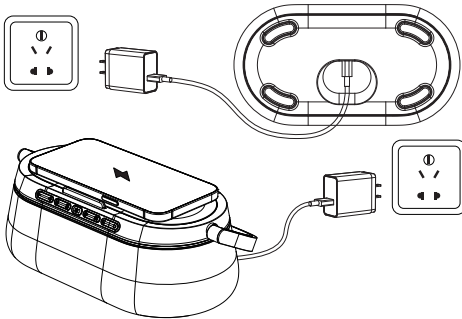

Touch screen for hand lamp:

Double-click to turn on the light (default brightness 30%), then click to turn on medium brightness (brightness 60%), then click to turn on high brightness (brightness 100%), then double-click to turn off the light, in sequence.

Clock brightness adjustment

The default brightness of the clock display is 60%. Press the "-" button to set the clock brightness to 30%. Press the "-" button again to turn off the clock brightness. Press the "+" button to set the clock brightness to low brightness (30%). Press the "+" button again to set the clock brightness to medium brightness (60%). Press the "+" button again to set the clock brightness to high brightness (100%). Repeat this cycle.

Clock Settings

The default setting is 24H system. Press and hold the M key to enter the (year) setting. The digits flash. Use the plus and minus keys to adjust the year. Press the M key again to enter the (month) setting. The digits flash. Use the plus and minus keys to adjust. Press the M key again to enter the (day) setting. The digits flash. Use the plus and minus keys to adjust. Press the M key again to enter the (hour) setting. The clock digits flash. Use the plus and minus keys to adjust. Press the M key again to enter the (minute) setting. The minute digits flash. Use the plus and minus keys to adjust. Press the M key again to enter the 24/12H setting. Use the plus and minus keys to switch. The morning time is 00:00-11:59. The afternoon time is 12:00-23:59. The PM light will only be displayed in the 12-hour system. The AM light will not be displayed in the morning.

Alarm setting

Press and hold the alarm button to enter the alarm setting interface, then enter the "hour" setting and adjust it using the plus and minus keys; short press again to enter the "minute" setting and adjust it using the plus and minus keys; press the alarm button again to exit. Press and hold the alarm button for 3 seconds or no operation for 10 seconds to exit the setting interface by default.

Alarm on/off settings

Short press the alarm button to turn on the alarm, and the alarm indicator light stays on. Short press the alarm button again to turn off the alarm, and the alarm symbol light goes out (indicating the alarm is off).

The alarm will ring for 30 seconds, pause for 10 seconds, and then ring for another 30 seconds before automatically turning off. You can enter snooze mode by pressing any button except the alarm button. The snooze time is 5 minutes. You can turn off the alarm by pressing the alarm button while the alarm is ringing. (The volume of the alarm must be gradually increased from 30% 50% 75% 100%)

Switch setting

Long press the power button to turn on, and long press the power button again to turn off. Click the power button 5 times in a row to clear the Bluetooth pairing (prompt Clear bluetooth), it will not automatically shut down when connected to Bluetooth, and the speaker will automatically shut down if there is no Bluetooth connection for 5 minutes.

Color Light Settings

In Bluetooth mode, the lights will automatically turn on (7 colors are flashing in a single tone by default), short press the light button to switch (7 colors change gradually at the same time), short press the light button again to switch (follow the music rhythm), short press the light button again to turn off the lights, exit Bluetooth to turn off the lights

BT key settings

Long press the BT button to enter Bluetooth mode, short press the BT button to pause/play music, single click the left button to reduce the volume (10%), single click the right button to increase the volume (10%), long press the left button to go to the previous song, long press the right button to go to the next song, long press the BT button again to switch to FM mode, short press the BT button to automatically search/stop searching, in FM mode, single click the left button to reduce the volume (10%), single click the right button to increase the volume (10%), long press the left button to go to the previous channel, long press the right button to go to the next channel. Long press again to return to clock mode, and cycle in sequence;

At any volume level, the volume of the reminder tone is 30%. When the battery level is lower than 20%, you will be reminded once, and again at 10%. If the battery power cannot be supplied by any charger, the device will not shut down or restart, but will only charge more slowly.

Note:

1. When playing music, the music will pause after the voice and phone call are connected, and the original song will play automatically after hanging up.

Specifications

WIRELESS CHARGER SPEAKER WITH LAMP
Model:HT-548 FCC ID:28KMD-HT-548
Input:5V=3A, 9V=3A Battery capacity:1800mAh LED Power:1W
Wireless Charging for Phone: 15W/10W/7.5W/5W Speaker Power:305WX2

Standard Accessories

1* Multifunctional Wireless Charger 1* USB Cable
1* User Manual

Attention

- Do not use or store the product in direct sunlight or high temperature places for a long time. Do not charge the product too close to magnetic cards, magnetic recording media and precision instruments.
- Do not touch the AC adapter with wet hands.
- Please keep this product away from water or other liquids.
- If you want to clean the product, disconnect it from the power source.
- Product operating environment temperature range: -20-45°C.

FCC STATEMENT :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.