

D603无线收音领夹麦克风

使用说明书



版本:A1

产品介绍


感谢您选择我们的的产品

本产品为无线麦克风,可提供专业级的录音输出,即插即用,无需APP,可实现网络直播(需直播APP支持)、视频Vlog拍摄、节目访谈、采访录音、视频教学等场合的使用,无线收音麦克风由三部分构成:麦克风发射端、接收端和充电仓(如下图所示)




麦克风发射端(TX)

接收端(RX)



收纳式充电仓

ID图示

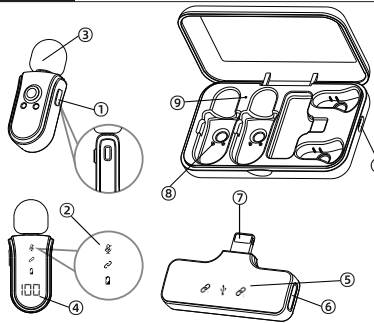

①开/关机按键/静音按键按键

长按:开关机,开机后连接指示灯闪烁,配对成功后常亮;
短按:开关麦克风,麦克风关闭时,静音指示灯常亮;

(注:发射器3分钟内未与接收器连接,将进入关机状态)
▲个别版本因软件不同,操作方法可能会不一样。

②发射器指示灯

- 静音指示灯:静音时亮起
- 连接指示灯:配对中闪烁,配对成功常亮
- 电源指示灯:低电闪烁,充电常亮,充满熄灭

③全指向收音麦克风

④100级数值电量指示

⑤接收器指示灯



左右两个是TX1/TX2连接指示灯,连接成功指示灯亮
中间是USB连接指示灯,USB连接常亮,录音时闪烁。

⑥接收端充电接口

如果直播时,在手机电量不足的情况下,可通过接口给手机充电。

⑦接收端OTG数字接口

连接手机或电脑,传输麦克风音频到手机,当接口跟手机或电脑接口不一致时,需另外购买转接头。



⑧麦克风入仓充电触点

无线麦克风没有电的时候,放入仓内,可以给麦克风充电。
使用时需确保触点干净,无脏污,无水渍,不可导电物体接触,避免造成短路。

⑨充电仓指示灯


外接5V电源给充电仓充电,充电仓红灯闪烁,充满红灯常亮。充电仓给发射器充电绿灯常亮,充满熄灭。

⑩充电仓Type-C充电口

可以给充电仓充电。


使用方法

1、长按麦克风的开机键,连接指示灯闪亮,表示开机成功,连接指示灯常亮表示配对成功,开机后短按可以开关麦克风。



开机键

2、将接收端插口插入手机的接口。

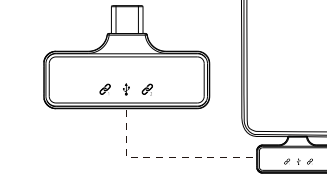

注:OPPO/VIVO/IQOO/Readme或其他部分品牌手机需要到手机设置里面,搜索“OTG”并打开OTG能使用,部分手机还需要设置默认录音设备,在设置中改成外接设备

3、接收器中间指示灯连接USB成功后灯常亮,录音时闪烁,两边两颗指示灯分别为两个发射器的指示灯,发射器连接成功后,指示灯常亮。



接收器指示灯

技术规格

通讯方式:2.4G无线传输
传输延时:<20ms
频率响应:30HZ-18KHZ
灵敏度:-36dB
信噪比:65db
最大声压级:105dB
传输距离:≥50米(空旷环境)
麦克风指向性:全指向型
充电仓电池容量:450mAH(3.7V)
麦克风电池容量:45mAH(3.7V)
续航:4-5h,配合充电仓续航可达15小时左右
*包装标识无线传输距离50米是指产品在部分环境能承载的最远距离
本手册及产品技术指标如有更新恕不另行通知

包装清单

- 1. 麦克风(发射器)*2
- 2. 接收器*1
- 3. 充电仓*1
- 4. 磁吸衣领夹*2
- 5. 防风海绵*2
- 6. 防风毛绒*2
- 7. 合格证*1
- 8. 充电线*1
- 9. 说明书*1

售后保修

用户信息

型号	
产品编号	
购买日期	

保修记录


保修日期	故障及处理方法	完成日期	签名

合格证

检验员
日期



此产品已通过
检验

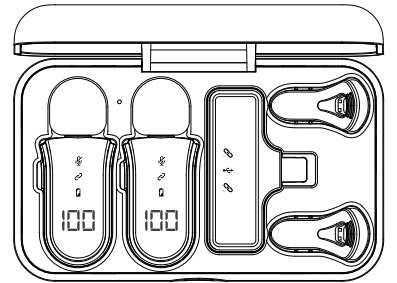

D603 Wireless Lavalier Microphone

operation instructions




REV:A1


Product Introduction

Thank you for choosing our product

This product is a wireless microphone that offers professional-level audio recording output. It is plug-and-play and does not require an app. It can be used for live streaming (requires support of the live streaming app), video Vlog shooting, program interviews, interview recordings, video teaching, etc. The wireless audio receiver consists of three parts: the microphone transmitter, the receiver, and the charging case (as shown in the following picture).



Microphone transmitter (TX)




Receiver (RX)



Charging Dock Storage Box

ID diagram

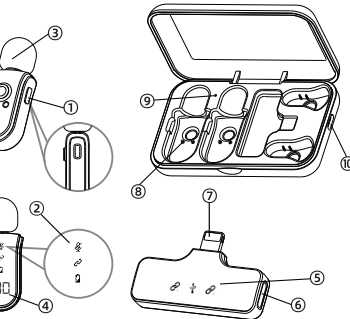

- ① On/Off button/Mute button
Long press: To turn on/off the device. After turning on, the connection indicator light flashes. It stays on after successful pairing.
Short press: To switch the microphone on/off. When the microphone is turned off, the mute indicator light remains on.

(Note: If the transmitter fails to connect with the receiver within 3 minutes, it will enter the shutdown state.)
▲ Depending on the specific version and the software used, the operation methods may vary.

- ②Transmitter indicator light
 - ☞ Silence indicator light: Lights up when in silent mode.
 - ☞ Connection indicator light: Flashes during pairing, remains constantly on upon successful pairing.
 - ☞ Power Indicator Light: Flashes when low on battery, stays on while charging, turns off when fully charged

- ③Fully directed towards the receiving microphone

- ④100-level numerical battery level indicator

- ⑤Receiver indicator light
 - ☞ ☞ ☞

The two on the left and right are the connection indicator lights for TX1/TX2. The indicator light turns on when the connection is successful. In the middle is the USB connection indicator light. The USB connection is always on and flashes when recording.

- ⑥Receiving end charging interface
If the phone's battery is low during a live stream, you can charge the phone via the port.

- ⑦ Receiving end OTG digital interface
Connect the device to the mobile phone or computer, and transfer the audio from the microphone to the mobile phone. If the interface is not compatible with the interface of the mobile phone or computer, a conversion adapter needs to be purchased separately.




- ⑧charging contact points for microphone docking
When the wireless microphone is without power, place it in the charging case to recharge it. When using it, make sure the contacts are clean, free from dirt and water stains, and no conductive objects should come into contact with it to avoid short circuits.

- ⑨Charging compartment indicator light
Connect a 5V power supply to charge the charging compartment. The red light of the charging compartment will flash when charging, and it will remain on when fully charged. The green light of the charging compartment will remain on when charging the transmitter, and it will go out when fully charged.

- ⑩Charging compartment - Type-C charging port
It can charge the charging dock.


Usage method

- 1. Long press the power button of the microphone, and the connection indicator light will flash, indicating that the device has been powered on successfully. If the connection indicator light remains constantly on, it means the pairing has been successful. After powering on, a short press can be used to switch the microphone on and off.

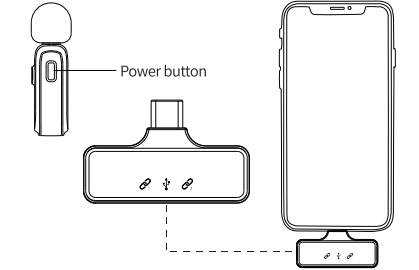

- 2. Insert the receiving port into the interface of the mobile phone.
Note: For OPPO/VIVO/IQOO/Readme or other brands of mobile phones, you need to go to the phone settings, search for "OTG", and turn on OTG to be able to use it. Some phones also require setting the default recording device. In the settings, change it to an external device.

- 3. The middle indicator light of the receiver remains constantly illuminated after successful connection to the USB. It flashes during recording. The two indicator lights on both sides are the indicator lights of the two transmitters. When the transmitters are successfully connected, the indicator lights remain constantly illuminated.

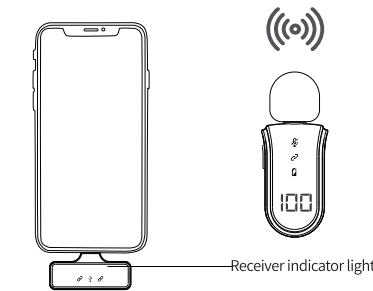

Technical specifications

Communication method: 2.4G wireless transmission
Transmission delay: < 20ms
Frequency response: 30Hz - 18KHz
Sensitivity: -36dB
Signal-to-noise ratio: 65db
Maximum sound pressure level: 105dB
Transmission distance: ≥ 50 meters (in an open environment)
Microphone directivity: omnidirectional
Battery capacity of charging case: 450mAh (3.7V)
Battery capacity of microphone: 45mAh (3.7V)
Battery life: 4-5 hours, with the charging case, the battery life can reach approximately 15 hours
* The wireless transmission distance of 50 meters indicated in the packaging label refers to the maximum distance that the product can cover under certain conditions

Packing list

- 1. Microphone (Transmitter) * 2
- 2. Receiver*1
- 3. Charging Case * 1
- 4. Magnetic collar clip * 2
- 5. Windproof Sponge * 2
- 6. windproof plush*2
- 7. Certificate of Conformity * 1
- 8. charging cable *1
- 9. Instruction Manual * 1

After-sale warranty

User Info

Model	
Product number	
Purchase date	
Customer name	

Warranty records

Warranty date	Troubleandhandlingmethod	CompletionDate	Sign

Certificate

CHECKER
DATE

PASSED
QC01
合格

This product has
passed the inspection

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.