

MQM711 Bluetooth (BLE) Module

– Powered by Qualcomm QCC711

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

Table of Contents

1	<i>Product Overview</i>	4
2	<i>Hardware Specification</i>	7
2.1	Block Diagram	7
2.2	Pinout Description	8
2.2.1	Pin Map	8
2.2.2	Pin Definition	9
2.2.3	I/O Pin Mux Table	10
2.2.4	Programmable Series Engine	11
2.3	Computing Subsystem	12
2.3.1	Microcontroller	12
2.4	Memory	13
2.5	Peripheral Interfaces	13
3	<i>Electrical Characteristics</i>	15
3.1	Absolute Maximum Ratings	15
3.2	Recommended Operating Conditions	15
4	<i>Radio Performance</i>	17
5	<i>Power Consumption</i>	18
5.1	Active Power	18
5.2	Sleep Power	18
6	<i>Mechanical Specification</i>	20
6.1	Pin Antenna	20
6.1.1	Dimension	20
6.1.2	Recommended PCB Landing Pattern	20

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

6.2	PCB Antenna	21
6.2.1	Dimension	21
6.2.2	Recommended PCB Landing Pattern.....	21
6.3	Connector Antenna.....	22
6.3.1	Dimension	22
6.3.2	Recommended PCB Landing Pattern.....	22
7	<i>Manufacturing Recommendation</i>	23
7.1	Power Layout Guideline.....	23
7.2	Soldering Recommendations.....	23
8	<i>Statement</i>	25
8.1	Operational use conditions	Error! Bookmark not defined.
8.2	Antenna used.....	25
8.3	Instruction to Host product manufacturer when choosing external connector:	Error! Bookmark not defined.
8.4	Trace antenna designs information	Error! Bookmark not defined.

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

1 Product Overview

Powered by Qualcomm QCC711, MQM711 modules are purposefully designed LGA form factor BLE modules that combine multi-core processing capabilities, high-security as well as BLE long-range to cater to the demands of diverse IoT applications. Their compact size and on-chip memory, including SRAM and RRAM (NVM), contribute to reducing costs and enhancing performance, making them an attractive choice for space-constrained IoT edge devices.

Unlike many other BLE modules on the market, MQM711 modules have integrated three processors – 64MHz Arm Cortex-M processor for application and 32MHz Arm Cortex-M0 processor for BLE with shared on-chip memory of 128KB SRAM and 512KB RRAM. Additional Root-of-Trust 32MHz RISC-V processor with its own secure SRAM and ROM is dedicated to security subsystem to ensure the highest level of security for IoT applications with critical security needs. They have built-in resistive RAM (RRAM), the industry latest Non-volatile Memory (NVM) technology, eliminating need for externally attached NOR flash as well as resulting in more streamlined and cost-effective system. They also feature 3-wire and 4-wire SPI display control, making them capable of driving external LCD/TFT screens commonly found on a dedicated MCU. Furthermore, MQM711 modules can be powered directly by a battery, making it suitable for portable and battery-operated devices.

MQM711 can operate in hostless mode, capable of running both the Bluetooth stack and applications internally without requiring an external MCU. Moreover, they support hostless mode (HCI) through a UART interface, functioning as a Bluetooth transceiver to offload the Bluetooth stack. This enables the external MCU to focus on handling applications rather than managing the Bluetooth stack.

MQM711 modules include the following configurations:

Module	Form Factor	Antenna
MQM711-0-50-0P	12.19 x 12.19 x 2.2 mm, 1.27 mm pitch, 32-pin, LGA	Dipole Antenna
MQM711-0-50-0B	12.19 x 16.24 x 2.2 mm, 1.27 mm pitch, 32-pin, LGA	PCB Antenna
MQM711-0-50-0U	12.19 x 16.24 x 2.2 mm, 1.27 mm pitch, 32-pin, LGA	Dipole Antenna

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

MQM711 module portfolio is graphically illustrated below:

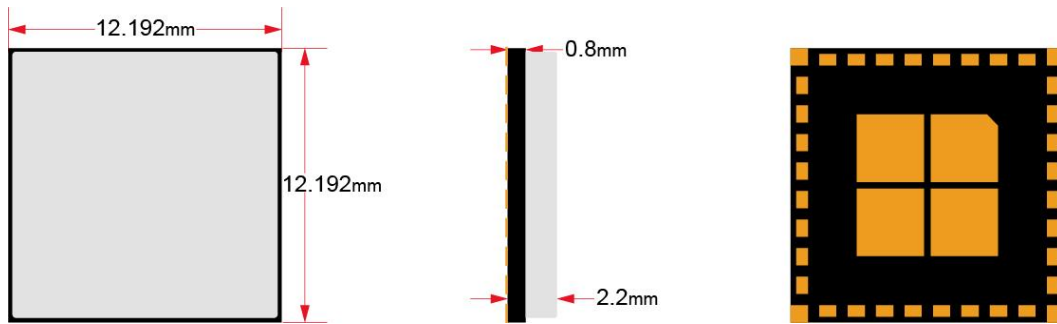


Figure 1: MQM711-0-50-0P Module View

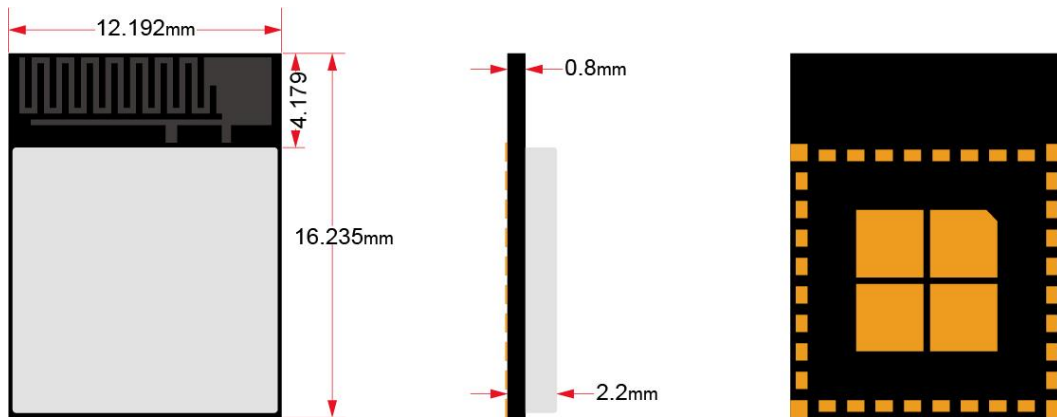


Figure 2: MQM711-0-50-0B Module View

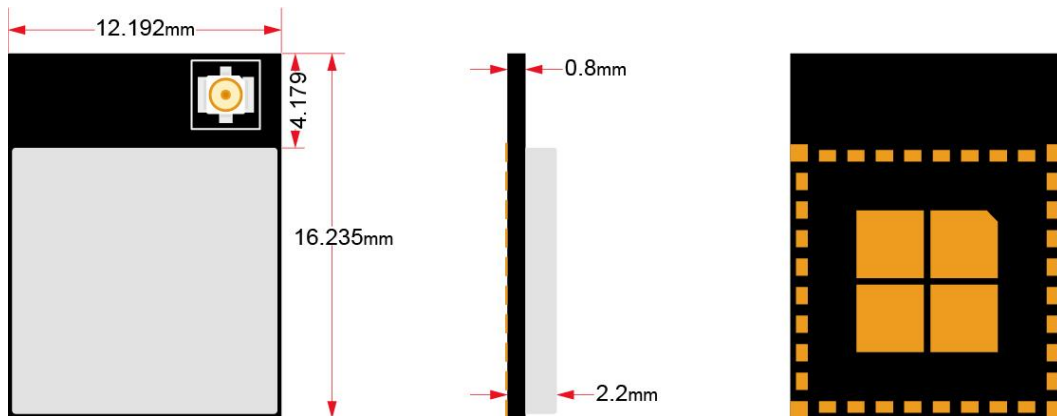


Figure 3: MQM711-0-50-0U Module View

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

The module specific development kit is also provided to facilitate application software development as shown below:

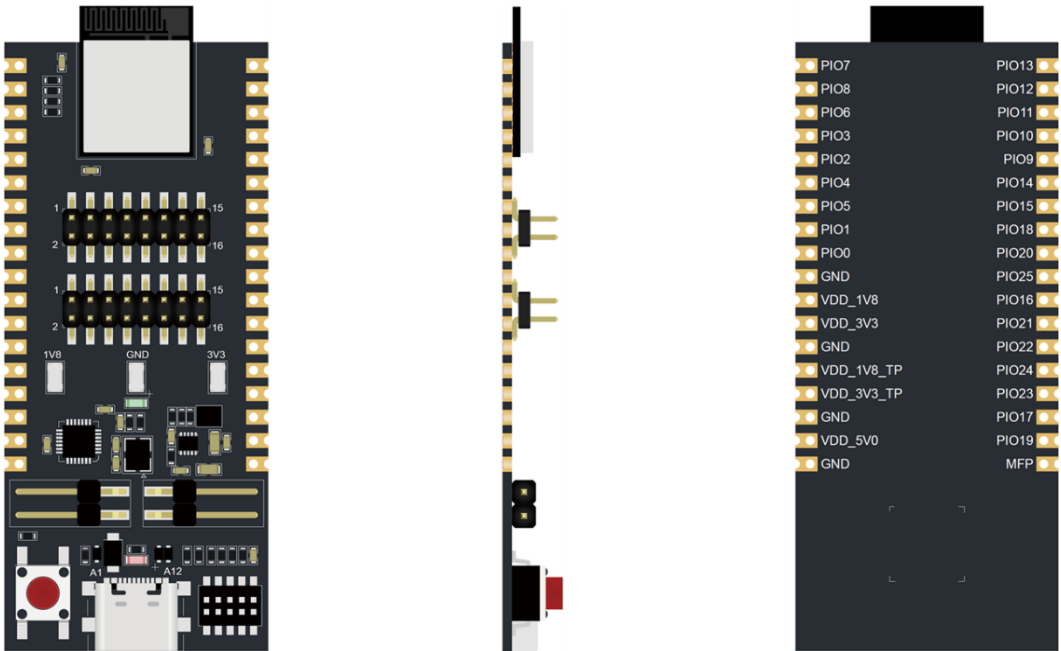


Figure 4: MQM711 Module Development Kit

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

2 Hardware Specification

This section provides detailed hardware design and specification of MQM711 modules. MQM711 hardware design has been optimized for small footprint and reduced RBOM cost.

2.1 Block Diagram

MQM711 integrates 4MB NOR flash and a 32.768kHz RTC crystal as optional components. The design also supports PCB antenna (MQM711-0-50-0B) or simply provides antenna pin (MQM711-0-50-0U) to allow customized antenna implementation on motherboard. The block diagram is shown below.

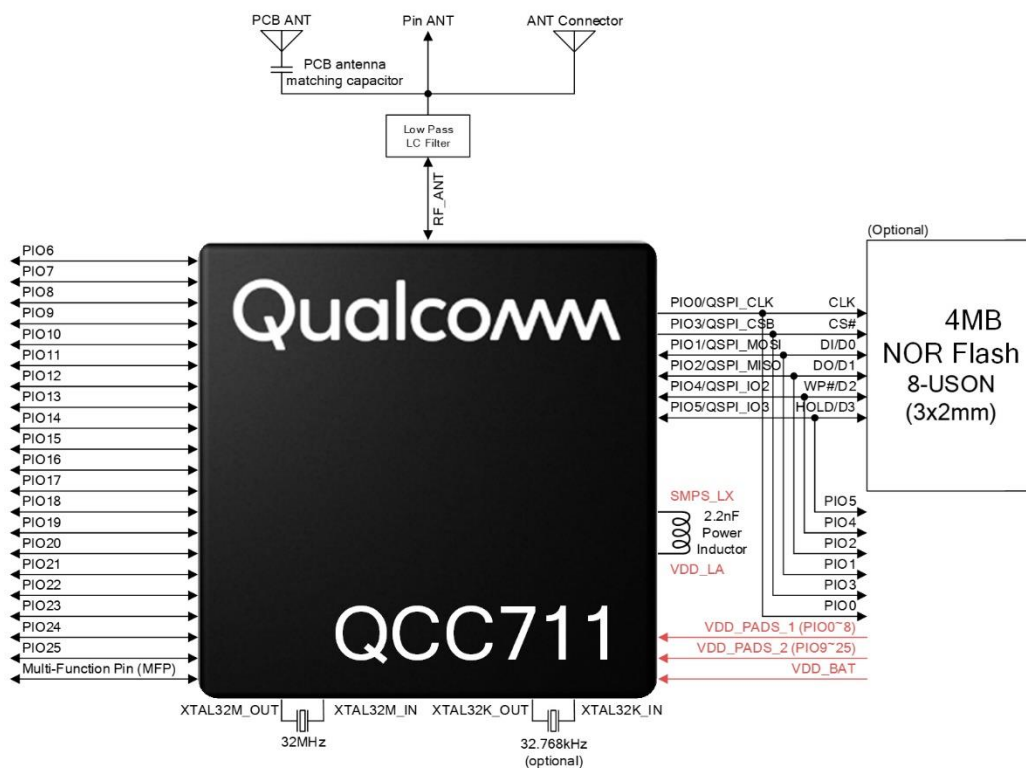


Figure 5: MQM711 Module Block Diagram

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

2.2 Pinout Description

2.2.1 Pin Map

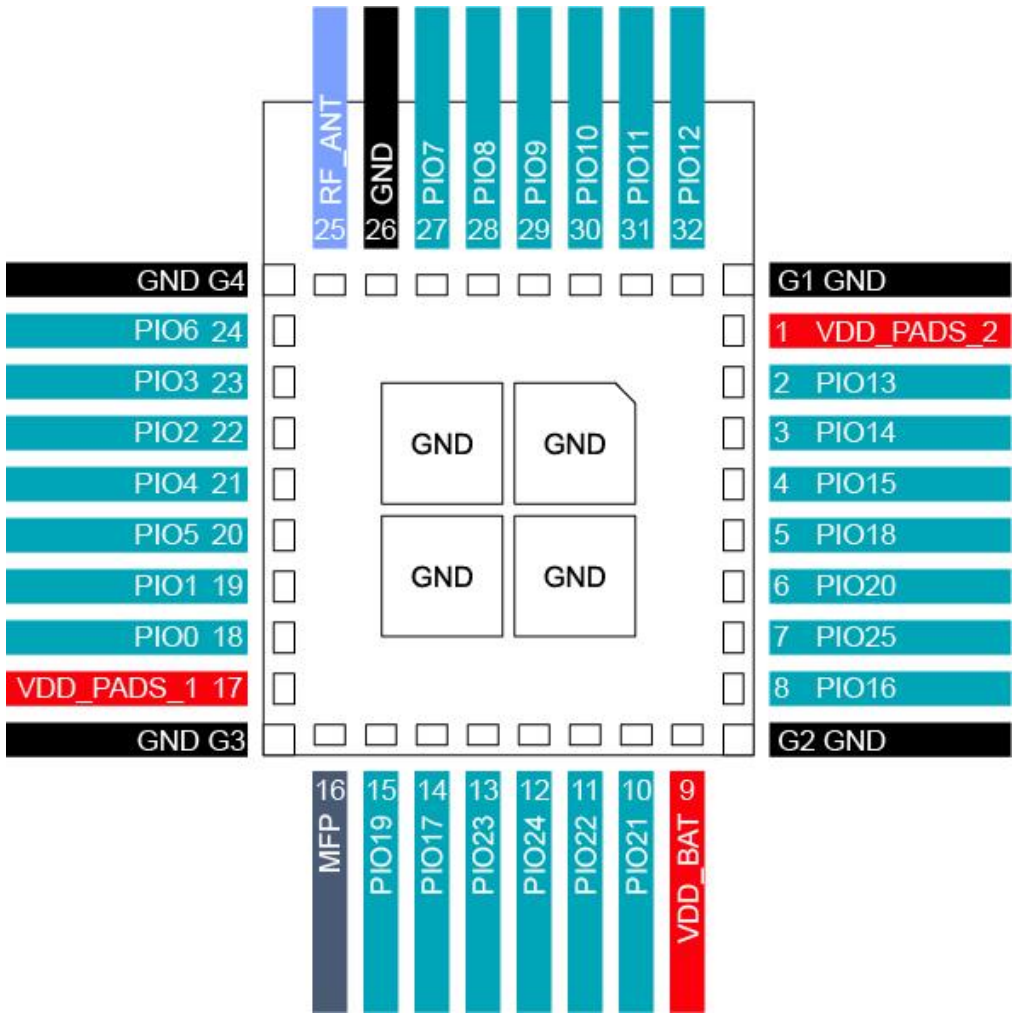


Figure 6: MQM711-0-50-0P Module Pin Map

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

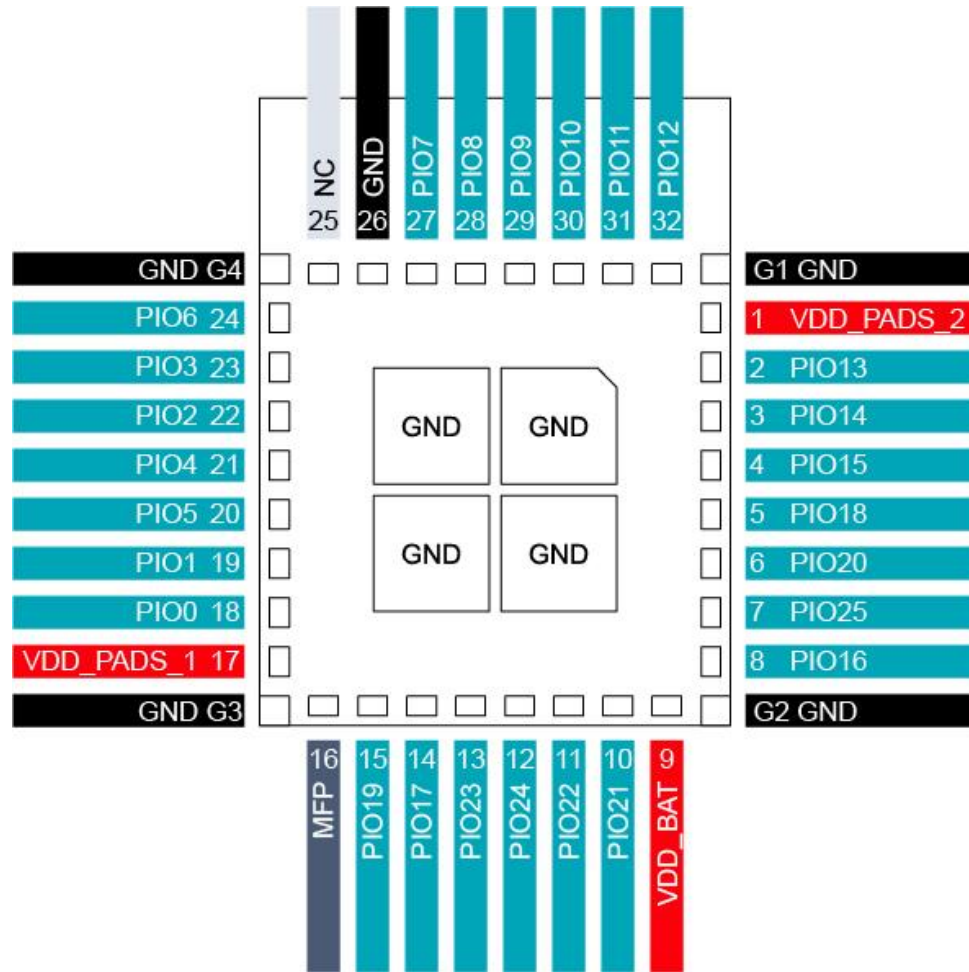


Figure 7: MQM711-0-50-0B/U Module Pin Map

2.2.2 Pin Definition

Pin	Pin Name	Type	Power Domain	Description
9	VDD_VBAT	PWR	-	Power input (1.71~3.6V)
17	VDD_PADS_1	PWR	-	Host I/O voltage input ($\leq$ VDD_VBAT)
1	VDD_PADS_2	PWR	-	Host I/O voltage input ($\leq$ VDD_VBAT)
G1-G4,26	GND	GND	GND	Ground
25	RF_ANT	AI/AO	-	Pin antenna(MQM711-0-50-0P)
	NC	-	-	No Connection(MQM711-0-50-0B/U)
16	MFP	DI	VDD_VBATT	SW configurable as a reset input
18	PIO0	DI/DO	VDD_PADS_1	Generic PIO
19	PIO1	DI/DO	VDD_PADS_1	Generic PIO
22	PIO2	DI/DO	VDD_PADS_1	Generic PIO

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

23	PIO3	DI/DO	VDD_PADS_1	Generic PIO
21	PIO4	DI/DO	VDD_PADS_1	Generic PIO
20	PIO5	DI/DO	VDD_PADS_1	Generic PIO
24	PIO6	DI/DO	VDD_PADS_1	Generic PIO
27	PIO7	DI/DO	VDD_PADS_1	Generic PIO
28	PIO8	DI/DO	VDD_PADS_1	Generic PIO
29	PIO9	DI/DO	VDD_PADS_2	Generic PIO
30	PIO10	DI/DO	VDD_PADS_2	Generic PIO
31	PIO11	DI/DO	VDD_PADS_2	Generic PIO
32	PIO12	DI/DO	VDD_PADS_2	Generic PIO
2	PIO13	DI/DO	VDD_PADS_2	Generic PIO
3	PIO14	DI/DO	VDD_PADS_2	Generic PIO
4	PIO15	DI/DO	VDD_PADS_2	Generic PIO
8	PIO16	DI/DO	VDD_PADS_2	Generic PIO
14	PIO17	DI/DO	VDD_PADS_2	Generic PIO
5	PIO18	DI/DO	VDD_PADS_2	Generic PIO
15	PIO19	DI/DO	VDD_PADS_2	Generic PIO
6	PIO20	DI/DO	VDD_PADS_2	Generic PIO
10	PIO21	DI/DO	VDD_PADS_2	Generic PIO
11	PIO22	DI/DO	VDD_PADS_2	Generic PIO, analog in configurable
13	PIO23	DI/DO	VDD_PADS_2	Generic PIO, analog in configurable
12	PIO24	DI/DO	VDD_PADS_2	Generic PIO, analog in configurable
7	PIO25	DI/DO	VDD_PADS_2	Generic PIO, analog in configurable

2.2.3 I/O Pin Mux Table

GPIO	QSPI	I2C	FTC	LED	Analog	CoEx	Debug	SE0	SE1	SE2	SE3
PIO0	QSPI_CLK	SDA	ftc0_out	BLUE				Port 0	Port 0	Port 0	Port 0
PIO1	QSPI_MOSI	SCL	ftc0_out	RED				Port 1	Port 1	Port 1	Port 1
PIO2	QSPI_MISO	SDA	ftc0_out	GREEN				Port 2	Port 2	Port 2	Port 2
PIO3	QSPI_CSB	SCL	ftc1_out	WHITE				Port 3	Port 3	Port 3	Port 3
PIO4	QSPI_IO2	SDA	ftc1_out	WHITE				Port 0	Port 4	Port 4	Port 4
PIO5	QSPI_IO3	SCL	ftc1_out	BLUE				Port 1	Port 0	Port 0	Port 0
PIO6		SDA	ftc_in	RED				Port 2	Port 1	Port 1	Port 1
PIO7		SCL		GREEN				Port 3	Port 2	Port 2	Port 2

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

PIO8								Port 4	Port 3	Port 3	Port 3
PIO9							TCK/SWD_CLK		Port 4	Port 4	Port 4
PIO10							TMS/SWD_DIO		Port 0	Port 0	Port 0
PIO11	QSPI_CLK	SDA	ftc_in				TDI/test_hf	Port 0	Port 1	Port 1	Port 1
PIO12	QSPI_MOSI	SCL					TDO/SWO	Port 1	Port 2	Port 2	Port 2
PIO13	QSPI_MISO	SDA	ftc2_out				Test_lf	Port 2	Port 3	Port 3	Port 3
PIO14	QSPI_CSB	SCL	ftc2_out					Port 3	Port 4	Port 4	Port 4
PIO15	QSPI_IO2	SDA	ftc2_out	BLUE/WHITE			trace_ctrl	Port 4		Port 3	Port 3
PIO16	QSPI_IO3	SCL	ftc_in	RED/WHITE			trace_clk	Port 0	Port 0	Port 1	Port 1
PIO17		SDA	ftc3_out	GREEN/WHITE			trace_data_0	Port 1	Port 1	Port 2	Port 2
PIO18		SCL	ftc3_out	WHITE			trace_data_1	Port 2	Port 2	Port 3	Port 3
PIO19		SDA	ftc3_out	WHITE			trace_data_2	Port 3	Port 3	Port 4	Port 4
PIO20		SCL		WHITE		slv_pta_coex_active	trace_data_3	Port 4	Port 4		
PIO21		SDA	ftc_in	WHITE		slv_pta_coex_status		Port 0	Port 0	Port 0	Port 0
PIO22		SCL		BLUE	ADC	slv_pta_coex_confx		Port 1	Port 1	Port 1	Port 1
PIO23		SDA		RED	ADC	mstr_pta_coex_active		Port 2	Port 2	Port 2	Port 2
PIO24		SCL		GREEN	ADC	mstr_pta_coex_status		Port 3	Port 3	Port 3	Port 3
PIO25				WHITE	ADC	mstr_pta_coex_confx		Port 4	Port 4	Port 4	Port 4

2.2.4 Programmable Series Engine

Serial Engines (SE) and supported interfaces

SE	3-wire or 4-wire SPI Display Controller	True 4-wire SPI Controller/Peripheral	I2C Controller	8-bit UART	9-bit UART
SE0	Yes	Yes	Yes	Yes	Yes
SE1	Yes	Yes	Yes	Yes	Yes
SE2	-	-	Yes	Yes	-
SE3	-	-	Yes	Yes	-

Serial engines default port mappings

SE	3-wire Display	4-wire Display	I2C	UART	SE0 true 4-wire SPI
Port 0	CS1	CS1	SDA	CTS	MISO
Port 1	SDIN	SDIN	SCL	RTS	MOSI
Port 2	CLK	CLS	-	TXD	CLS

Documentation Title		Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet			V1.3	Public	Release	Aug 29,2025
Port 3	CS	CS	-	RXD	CS	
Port 4		D/C	-	-	CS1	

2.3 Computing Subsystem

2.3.1 Microcontroller

MQM711 modules have Qualcomm QCC711 at his core which integrates three microcontrollers – Arm Cortex-M3 processor, Arm Cortex-M0 processor, and RISC-V:

Arm Cortex-M3 processor – Running at 32MHz, dedicated to higher layer protocol and user applications. It conducts inter-processor communication with Arm Cortec-M0 processor for BLE services and with RISC-V processor for security services.

Arm Cortex-M0 processor – Running at 32MHz, dedicated to BLE radio and lower protocol layer (MAC) processing.

RISC-V processor – Running at 32MHz, dedicated to security services. it can function as a Root-of-Trust (RoT) processor to execute highly secure bootstrap code under Trusted Execution Environment (TEE) that validate the user application image before handing over the control to Arm Cortex-M3 processor. RISC-V has its own 32KB SRAM, 192KB ROM and protected OTP area and will be NOT visible to user applications, making it highly reliable and secure.

The computing subsystem software architecture consists of three parts as illustrated below. Computing Subsystem (APSS) has been open-sourced on GitHub while Bluetooth Subsystem (BTSS) and Security Subsystem will be offered in binary format inside software SDK package.

GitHub Download Link: <https://github.com/quic/qccsdk-qcc711/>

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

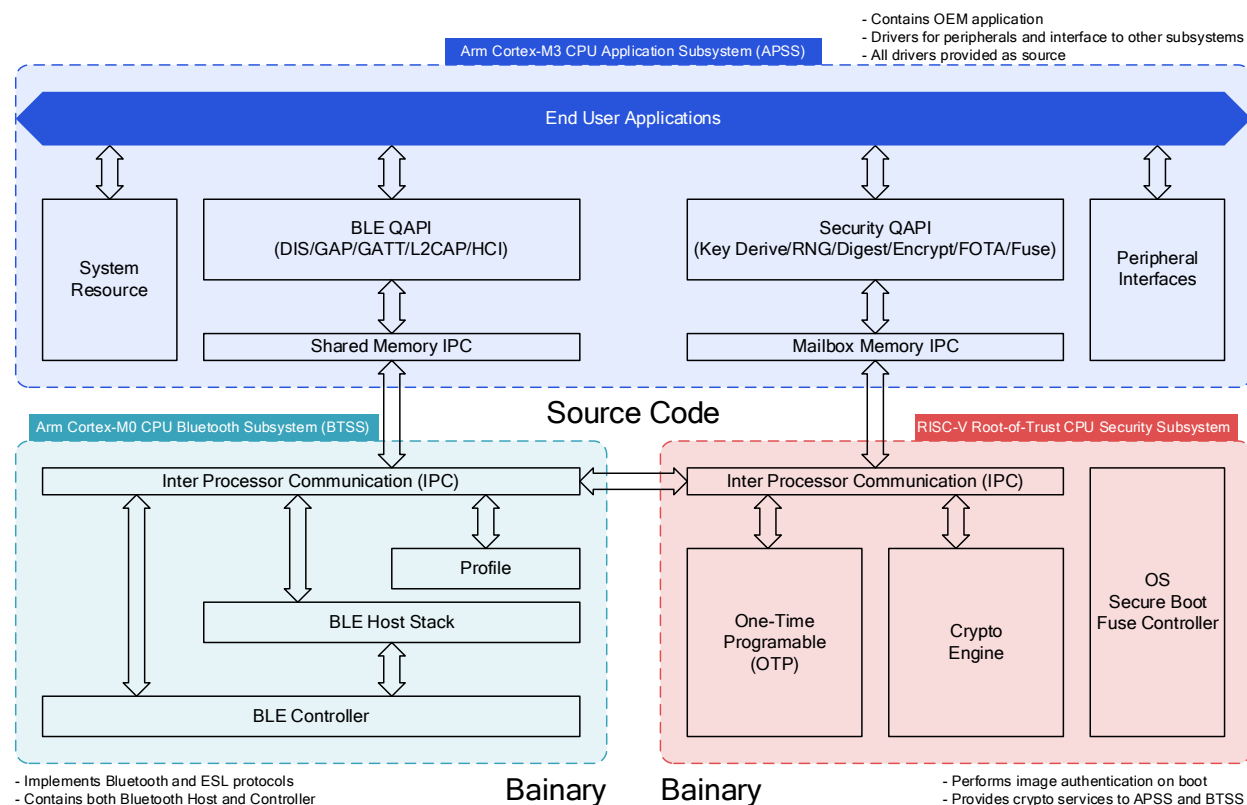


Figure 8: Computing Subsystem Software Architecture

2.4 Memory

There are 512KB on-chip RRAM, 128KB on-chip SRAM and 2KB OTP/MTP shared among three processors. Built-in Non-volatile memory RRAM hosting execution code will eliminate needs of an external NOR flash to reduce system cost.

Additional NOR flash can be added through QSPI interface for additional data storage.

2.5 Peripheral Interfaces

MQM711 modules supports the following peripheral interfaces through 26x configurable PIO:

- 2x SPI master or slave, support 3-wire/4-wire SPI for display and true 4-wire SPI with DMA
- 2x I2C master and 1x I2C slave, supporting 100kbps, 400kbps, and 1000kbps data rate
- 2x 9-bit UART with hardware flow control, supporting maximum 2M baud rate

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

- 1x 8-bit UART with hardware flow control, supporting maximum 2M baud rate
- 4x 10-bit ADC
- 4x FTC (PWM)
- 4x LED driver
- 3-wire PTA coexistence master or slave
- SWD with 4-bit trace

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

3 Electrical Characteristics

3.1 Absolute Maximum Ratings

The absolute maximum ratings provided in this section reflect the stress levels that, if exceeded, may cause permanent damage to the device. No functionality is guaranteed outside the operating specifications. Functionality and reliability are only guaranteed within the operating specifications.

Pin	Parameter	Min	Max	Unit
VDD_VBATT	Power input voltage	VDD_PADS_2	3.63	V
VDD_PADS_1	I/O port 1 voltage	VSS - 0.3	3.63	V
VDD_PADS_2	I/O port 2 voltage	VSS - 0.3	3.63	V
Digital I/O	PIO25:PIO9	VSS - 0.3	VDD_PADS_2 + 0.3	V
	PIO8:PIO0	VSS - 0.3	VDD_PADS_1 + 0.3	V
	MFP	VSS - 0.3	VDD_VBAT + 0.3	V
All ground / VSS pads	-	0	0	V
Storage temperature	-	-40	85	°C

3.2 Recommended Operating Conditions

Pin	Parameter	Min	Max	Unit
VDD_VBATT	Power input voltage	1.71	3.6	V
VDD_PADS_1	I/O port 1 voltage	0	3.6	V
VDD_PADS_2	I/O port 2 voltage	0	3.6	V
Digital I/O	PIO25:PIO9	VSS	VDD_PADS_2	V
	PIO8:PIO0	VSS	VDD_PADS_1	V
	MFP	VSS	VDD_VBAT	V

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

All ground / VSS pads	-	0	0	V
Operating temperature	-	-40	85	°C
Storage temperature	-	-40	85	°C

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

4 Radio Performance

Channel Bandwidth	Modulation	Parameter	Data Rate	Typical	Unit
2MHz	GFSK	Tx Power	2Mbps	+6.5	dBm
			1Mbps	+6.5	dBm
			500kbps	+6.5	dBm
			125kbps	+6.5	dBm
		Rx Sensitivity @ 30.8% PER (Boost Mode)	2Mbps	-93.5	dBm
			1Mbps	-98.0	dBm
			500kbps	-100.5	dBm
			125kbps	-107.5	dBm
		Rx Sensitivity @ 30.8% PER (Normal Mode)	2Mbps	-90.0	dBm
			1Mbps	-95.0	dBm
			500kbps	-97.5	dBm
			125kbps	-104.0	dBm

Note: Measured using test packets with 37 octet payload, VBATT = 3.0V

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

5 Power Consumption

MQM711 modules can operate in four power states as shown below to maximize power saving:

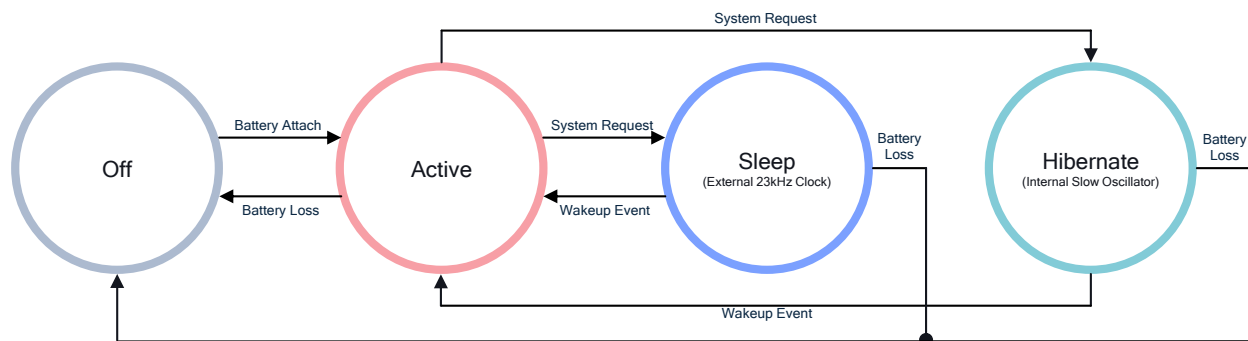


Figure 9: Power State Diagram

5.1 Active Power

Channel Bandwidth	Modulation	Parameter	dBm	Average Current	Unit
2MHz	GFSK	Tx Power	0	10.5	mA
			+4	14.6	mA
			+6	16.6	mA
		Rx Power Normal	TBD	TBD	mA
		Rx Power Boost	-95	5.3	mA

5.2 Sleep Power

Test Mode	MCU State	Average Current	Unit
- Software controlled 16KB SRAM retained 32kHz crystal running - Measured from the SDK - once connected to an AP	Sleep	4	μA
- Software controlled - No SRAM retained	Hibernate	16	μA

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025
- Internal LFLPO running - Measured from the SDK - not connected to an AP					

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

6 Mechanical Specification

6.1 Pin Antenna

6.1.1 Dimension

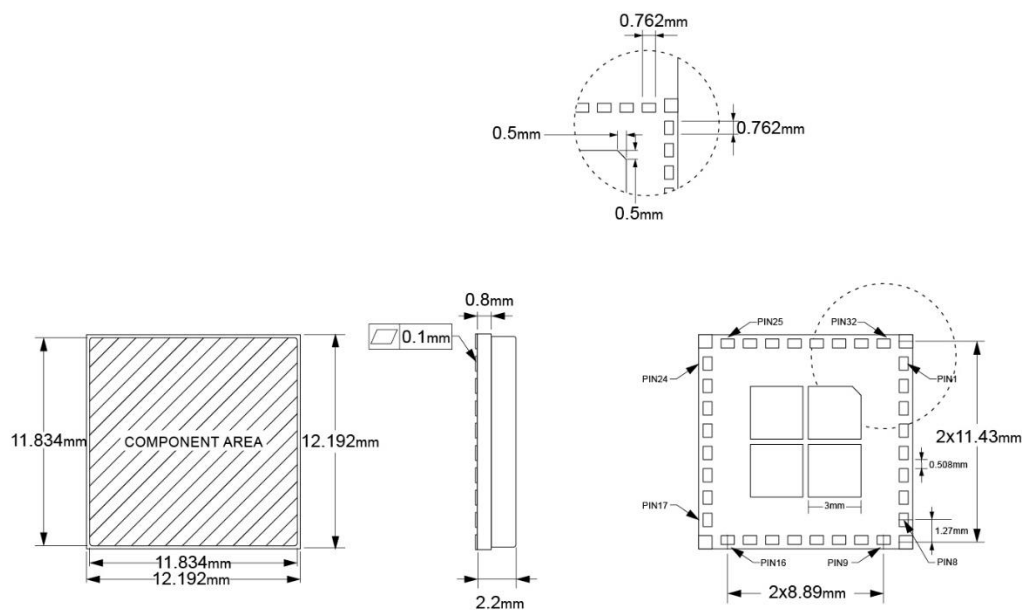


Figure 10: MQM711-0-50-0P Module Dimension

6.1.2 Recommended PCB Landing Pattern

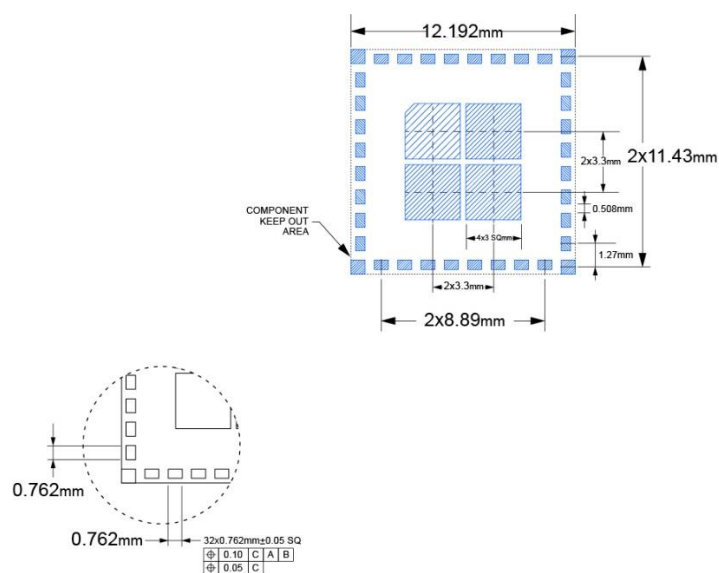


Figure 11: MQM711-0-50-0P Module PCB Landing Pattern

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

6.2 PCB Antenna

6.2.1 Dimension

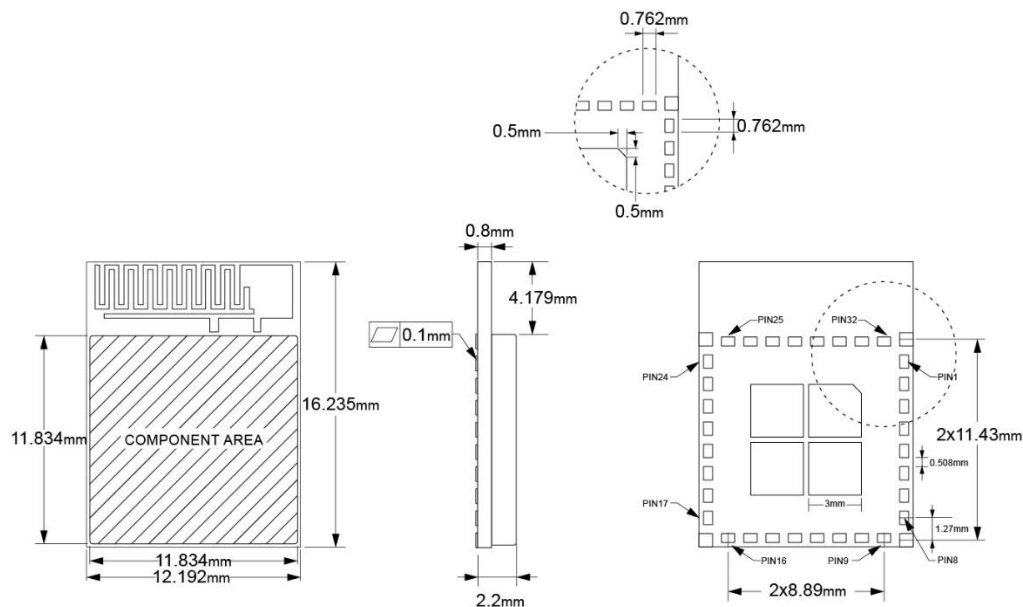


Figure 12: MQM711-0-50-0B Module Dimension

6.2.2 Recommended PCB Landing Pattern

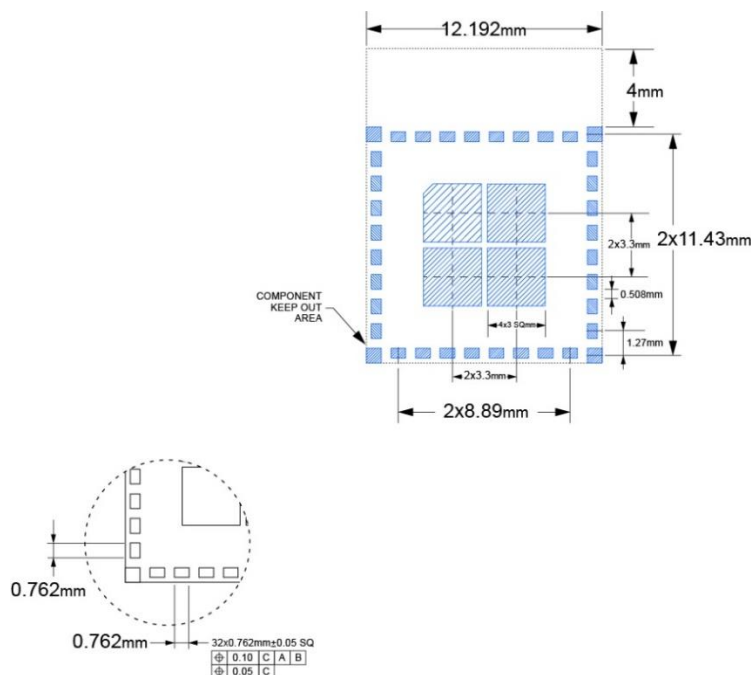


Figure 13: MQM711-0-50-0B Module PCB Landing Pattern

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

6.3 Connector Antenna

6.3.1 Dimension

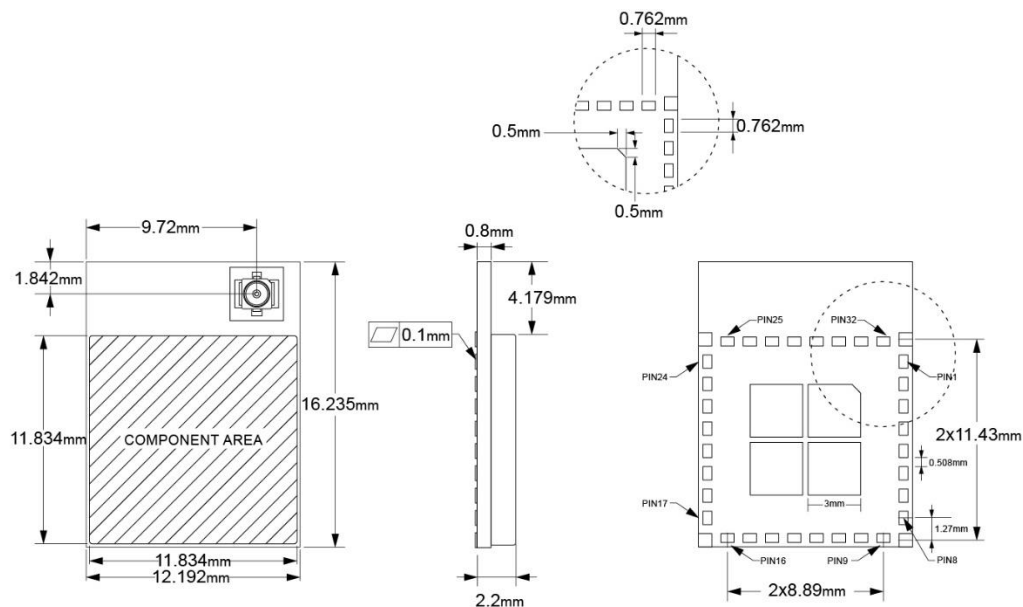


Figure 14: MQM711-0-50-0U Module Dimension

6.3.2 Recommended PCB Landing Pattern

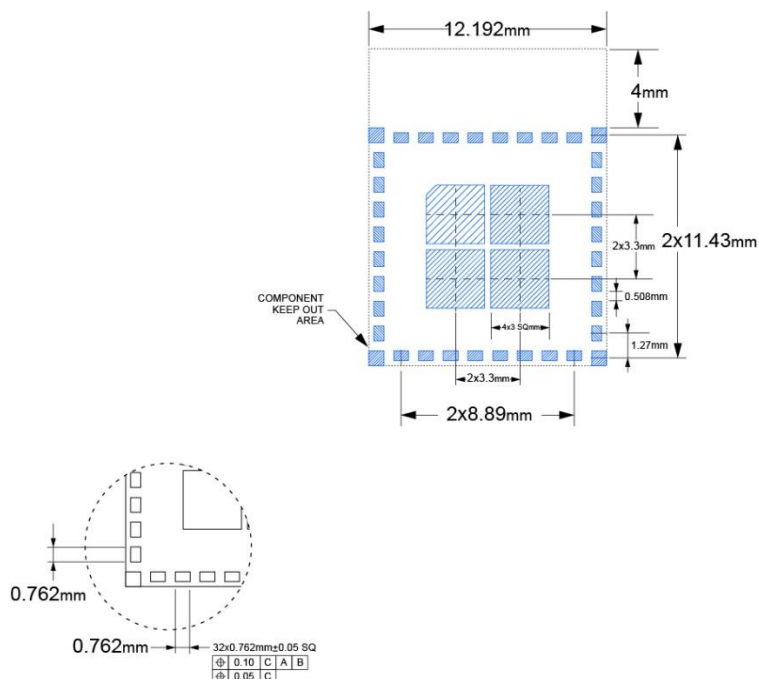


Figure 15: MQM711-0-50-0U Module PCB Landing Pattern

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

7 Manufacturing Recommendation

7.1 Power Layout Guideline

MQM711 modules are powered by either 3V battery or DC 3.3V. Power pin connection capacitor is as close as possible to chip and pin. Decoupling the power supply from the chip using a capacitor. Use capacitors to prevent noise from coupling back to the power plane.

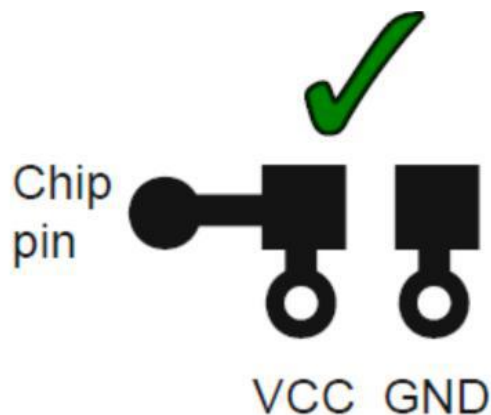


Figure 16: Power Layout Guideline

7.2 Soldering Recommendations

MQM711 modules can be SMT on the board following the temperature curve graph:

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

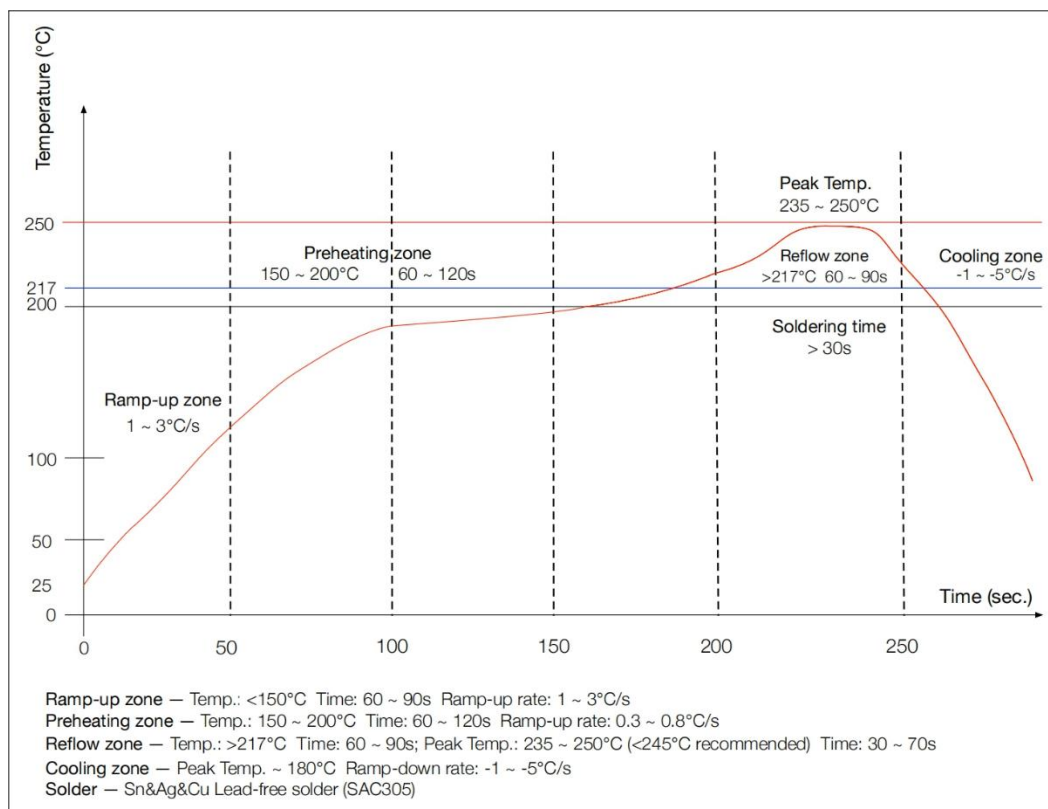


Figure 17: Soldering Guideline

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

8 Statement

Antenna used

Antenna Type	Brand/ manufacturer	Model No.	Max. Antenna Gain
PCB Antenna	INPAQ TECHNOLOGY(SUZHOU)	RFIQMO711010NB001	2.52dBi
Dipole Antenna	INPAQ TECHNOLOGY(SUZHOU)	RFPCA521010EMABY01	3.37dBi

=====

FCC&IC regulatory compliance statement

§15.19 Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

RSS-Gen Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

l'appareil contient des émetteurs/récepteurs exempts de licence qui sont conformes aux CNR exempts de licence d'Innovation, Sciences et Développement économique Canada. L'exploitation est soumise aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage,
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

§15.21 Information to user

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Exposure compliance statement

This Module complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Labelling Instruction for Host Product Integrator

Please notice that if the FCC and IC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. For FCC, this exterior label should follow "Contains FCC ID: 2BQY7-M7110". In accordance with FCC KDB guidance 784748 Labeling Guidelines.

§ 15.19 Labelling requirements shall be complied on end user device.

Labelling rules for special device, please refer to §2.925, § 15.19(a)(5) and relevant KDB publications. For E-label, please refer to §2.935.

Installation Notice to Host Product Manufacturer

The OEM integrator is responsible for ensuring that the end-user has no manual instruction to remove or install module.

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

The module is limited to installation in mobile application, a separate approval is required for all other operating configurations, including portable configurations with respect to §2.1093 and difference antenna configurations.

Antenna Change Notice to Host manufacturer

If you desire to increase antenna gain and either change antenna type or use same antenna type certified, a Class II permissive change application is required to be filed by us, or you (host manufacturer) can take responsibility through the change in FCC ID&IC ID (new application) procedure followed by a Class II permissive change application.

FCC other Parts, Part 15B Compliance Requirements for Host product manufacturer

This modular transmitter is only FCC authorized for the specific rule parts listed on our grant, host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

Host manufacturer in any case shall ensure host product which is installed and operating with the module is in compliant with Part 15B requirements.

Please note that For a Class B or Class A digital device or peripheral, the instructions furnished the user manual of the end-user product shall include statement set out in §15.105 *Information to the user* or such similar statement and place it in a prominent location in the text of host product manual. Original texts as following:

For Class B

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.*
- Increase the separation between the equipment and receiver.*
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

—Consult the dealer or an experienced radio/TV technician for help.

For Class A

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

=====

EU Conformity Statement



- This product is marked with "CE" and comply therefore with the applicable harmonized
- European standards listed under the Radio Equipment Directive 2014/53/EU.

RF Exposure Information

This device has been tested and meets applicable limits for Radio Frequency (RF) exposure.

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

BLE(2402MHz-2480MHz): 8.94dBm (Max EIRP)

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

Revision History

Revision	Description	Date
1.0	Initial draft	July 1, 2024
1.1	Update size and pin map	Jan 14, 2025
1.2	Update Module name	Mar 18, 2025
1.3	Add statement	Aug 29,2025

Documentation Title	Documentation No	Revision	Classification	Status	Date
MQM711 Bluetooth (BLE) Module Datasheet		V1.3	Public	Release	Aug 29,2025

Disclaimer and Copyright Notice

Information in this document, including URL references, is subject to change without notice.

THIS DOCUMENT IS PROVIDED AS IS WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE.

All liability, including liability for infringement of any proprietary rights, relating to the use of information in this document, is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

Copyright©2025 Meticomm. All rights reserved.