



FCC RADIO TEST REPORT

FCC ID : A4RG1XJ6
Equipment : Wireless Device
Model Name : G1XJ6
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jan. 20, 2026 and testing was performed from Jan. 29, 2026 to Mar. 13, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 EUT Operation Test Setup	9
2.5 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum E.I.R.P Output Power Measurement	12
3.3 Power Spectral Density Measurement	13
3.4 Unwanted Emissions Measurement	15
3.5 AC Conducted Emission Measurement.....	20
3.6 Antenna Requirements.....	22
4 List of Measuring Equipment.....	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Spot Check Evaluation on G1XJ6	



History of this test report

Report No.	Version	Description	Issue Date
FR5O3008F	01	Initial issue of report	Mar. 31, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(e)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum E.I.R.P Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
3.5	15.207	AC Conducted Emission	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- ECR inquiry for data referencing from A4RG0F3Y has been approved by FCC. The ECR inquiry and the associated document are submitted in the confidential exhibit.
- A4RG1XJ6 is different from FCC ID: A4RG0F3Y (Reference model), in the following:
 - The only difference between A4RG0F3Y and A4RG1XJ6 are the LTE and NTN function, which is depopulated by hardware.
- All the test results are referenced from A4RG0F3Y (Sporton Test Report FR5O3007F, and spot check results to justify data referencing is presented in the Appendix E.
- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Julia Chang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs Bluetooth, Bluetooth-LE, Bluetooth-LE ASK, Bluetooth-LE GFSK, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, UWB, 60GHz and GNSS.
Antenna Type WLAN: PIFA Antenna

EUT Information List	
S/N	Performed Test Item
58011WRDQL10KA	RF Conducted Measurement
5C251WRDQL13PF	Radiated Spurious Emission
5C261WRDQL13RY	Conducted Emission

Antenna information		
5850 MHz ~ 5895 MHz	Peak Gain (dBi)	0.5

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 291074 D02 EMC Measurement v01
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane with Adapter as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Bandwidth	Channel	Frequency (MHz)	Note
5850-5895 MHz (U-NII-4)	20 MHz	169	5845	Straddle
		173	5865	
		177	5885	
	40 MHz	167	5835	Straddle
		175	5875	
	80 MHz	171	5855	Straddle

Note: The channel noted with "straddle" spans 5.725-5.850 GHz and 5.850-5.895 GHz.

2.2 Test Mode

This device support 26/52/106/242/484/996-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.


The power for 802.11ac VHT20/40 mode is smaller than 802.11n mode, so all other conducted and radiated test is covered by 802.11n mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : WLAN (5GHz_11a Ch173) Tx + USB Cable (Charging from Adapter)
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

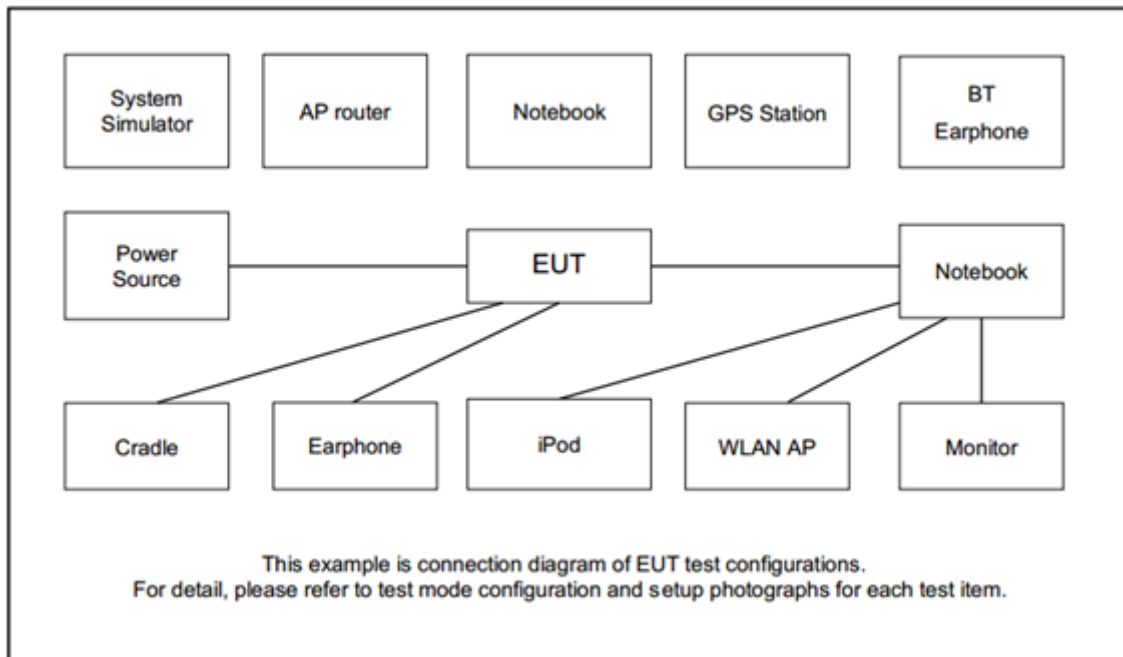

2.4 EUT Operation Test Setup

The RF test items, utility “adb version 1.0.41” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

The testing follows FCC KDB 291074 D02 EMC Measurement v01 Section 2.11 Minimum Emission bandwidth

1. Set RBW = 100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
6. Measure and record the results in the test report.

3.1.4 Test Setup

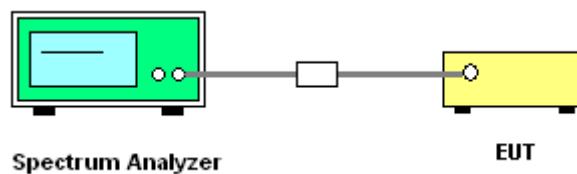

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum E.I.R.P Output Power Measurement

3.2.1 Limit of Maximum E.I.R.P Output Power

For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

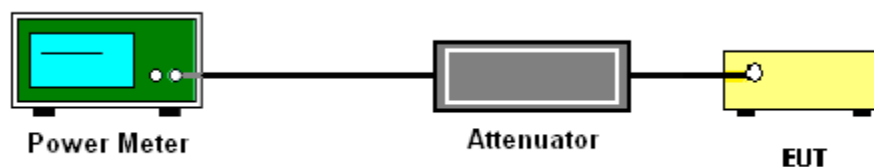

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

1. For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band.
2. For client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands shall meet both 15.407(a)(3)(i) 30dBm/500kHz and 15.407(a)(3)(iii) 14dBm/MHz limit, where the stringent limit 14dBm/MHz is applied.
3. For an indoor access point operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands shall meet both 15.407(a)(3)(ii) 36dBm limit, where the stringent limit 20dBm/MHz is applied.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

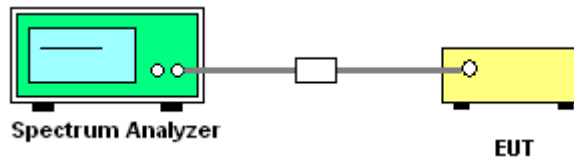

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz:

15.407(b)(5)(ii), all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of –5 dBm/MHz and shall decrease linearly to an e.i.r.p. of –27 dBm/MHz at or above 5.925 GHz.

All emissions below 5.725 GHz shall not exceed an e.i.r.p. of –27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

- (3) KDB789033 D02 v02r01 G)2)c)

Use guidance in KDB Publication 789033 for all measurements. Unwanted emissions outside of restricted bands are measured with an RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

Unwanted band-edge emissions may be measured using the integration method as described in KDB Publication 789033 3. d) (ii). Emissions below 5725 MHz should be measured using peak-detection while emission above 5895 MHz should be measured using average.

Frequency(GHz)	EIRP (dBm)	Field Strength @3m distance (dBuV/m)	Note
Below 5.65	-27dBm/MHz	68.2	Peak
5.7	10dBm/MHz	105.2	Peak
5.72	15.6dBm/MHz	110.8	Peak
5.725	27dBm/MHz	122.2	Peak
5.895	-5dBm/MHz	90.2	Average
5.895	15dBm/MHz	110.2	Peak
Above 5.925	-27dBm/MHz	68.2	Average
Above 5.925	-7dBm/MHz	88.2	Peak

Note: Field strength at 3 m distance is converted to EIRP as the following equation:

$$\text{EIRP[dBm]} = \text{E[dBuV/m]} - 95.2$$

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 Section G) Unwanted emissions measurement.
 - Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
- The EUT was placed at distance 3 meter from measurement antenna which was mounted on the top of a variable height antenna tower.


4. The measurement antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

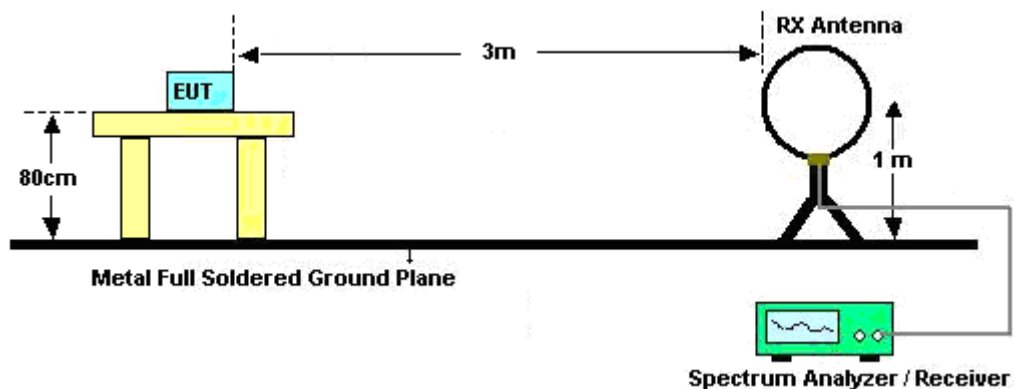


For radiated emissions from 30MHz to 1GHz

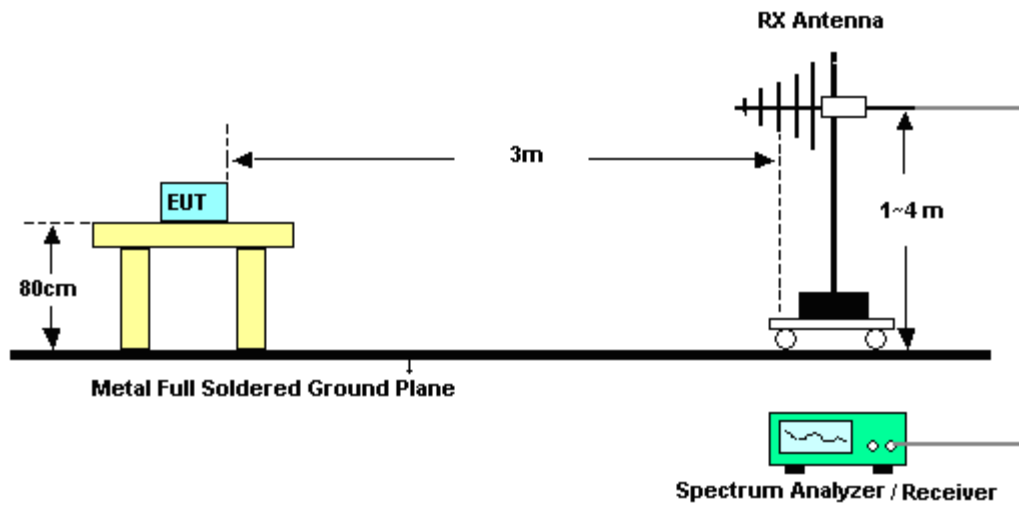

For radiated test from 1GHz to 18GHz

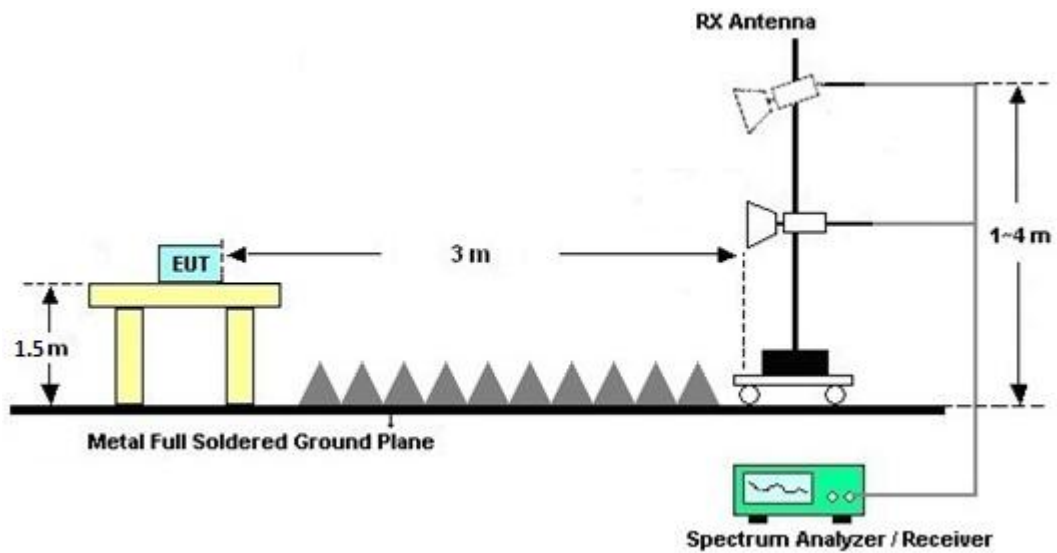

For radiated test above 18GHz

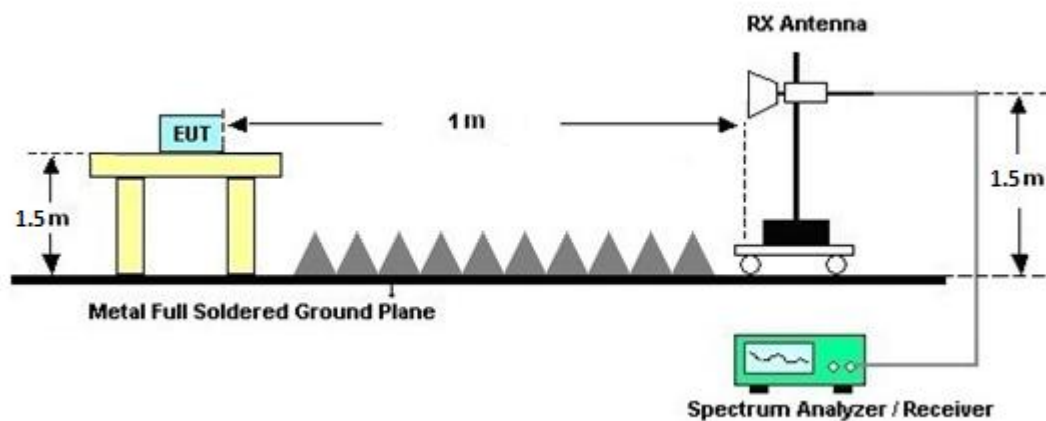

**3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Results of Radiated Spurious Emissions and Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

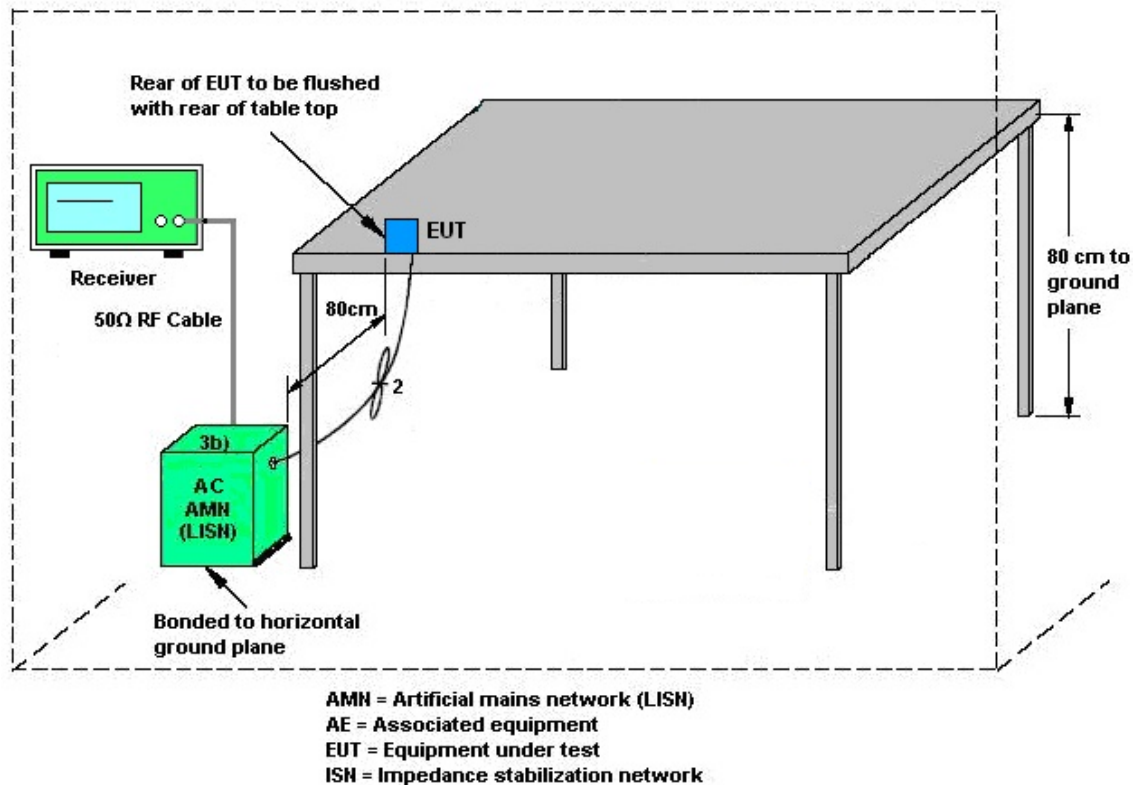

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

- b) Unique (non-standard) antenna connector.
- (3) Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec. 11, 2025	Feb. 03, 2026~ Mar. 05, 2026	Dec. 10, 2026	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Nov. 26, 2025	Feb. 03, 2026~ Mar. 05, 2026	Nov. 25, 2026	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18 EN	1GHz~18GHz	Aug. 07, 2025	Feb. 03, 2026~ Mar. 05, 2026	Aug. 06, 2026	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBEC K	BBHA 9170	1223	18GHz~40GHz	Jul. 02, 2025	Feb. 03, 2026~ Mar. 05, 2026	Jul. 01, 2026	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 13, 2025	Feb. 03, 2026~ Mar. 05, 2026	Jul. 12, 2026	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 26, 2025	Feb. 03, 2026~ Mar. 05, 2026	Sep. 25, 2026	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Feb. 03, 2026~ Mar. 05, 2026	Aug. 25, 2026	Radiation (03CH21-HY)
EXA Signal Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 09, 2025	Feb. 03, 2026~ Mar. 05, 2026	Sep. 08, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Feb. 03, 2026~ Mar. 03, 2026	Mar. 04, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 04, 2026	Mar. 04, 2026~ Mar. 05, 2026	Mar. 03, 2027	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,804612/2,803954/2	30MHz~40GHz	Aug. 11, 2025	Feb. 03, 2026~ Mar. 05, 2026	Aug. 10, 2026	Radiation (03CH21-HY)
RF Cable	EMCI	EMC101Y-KM-KM-1000	240906	30MHz~40GHz	Oct. 21, 2025	Feb. 03, 2026~ Mar. 05, 2026	Oct. 20, 2026	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 21, 2025	Feb. 03, 2026~ Mar. 05, 2026	Oct. 20, 2026	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 03, 2026~ Mar. 05, 2026	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 03, 2026~ Mar. 05, 2026	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 03, 2026~ Mar. 05, 2026	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 03, 2026~ Mar. 05, 2026	N/A	Radiation (03CH21-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPIL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Jan. 29, 2026~ Mar. 11, 2026	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Jan. 29, 2026~ Mar. 11, 2026	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Dec. 16, 2025	Jan. 29, 2026~ Mar. 11, 2026	Dec. 15, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900067 (BOX7)	N/A	Jul. 02, 2025	Jan. 29, 2026~ Mar. 11, 2026	Jul. 01, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Jan. 29, 2026~ Mar. 11, 2026	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 13, 2026	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 13, 2026	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Mar. 13, 2026	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 2, 2026	Mar. 13, 2026	Mar. 1, 2027	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Mar. 13, 2026	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Mar. 13, 2026	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 21, 2025	Mar. 13, 2026	Oct. 20, 2026	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.4 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Shiming Liu	Temperature:	21~25	°C
Test Date:	2026/1/29~2026/3/11	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-4 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	1	169	5845	23.81	-	44.62	-	16.52	-	0.5	Pass
11a	6Mbps	1	173	5865	25.64	-	45.10	-	16.56	-	0.5	Pass
11a	6Mbps	1	177	5885	27.90	-	45.54	-	16.59	-	0.5	Pass
HT20	MCS0	1	169	5845	25.09	-	46.71	-	17.84	-	0.5	Pass
HT20	MCS0	1	173	5865	28.03	-	47.72	-	17.80	-	0.5	Pass
HT20	MCS0	1	177	5885	29.94	-	48.54	-	17.94	-	0.5	Pass
HT40	MCS0	1	167	5835	42.45	-	91.60	-	36.70	-	0.5	Pass
HT40	MCS0	1	175	5875	40.91	-	94.11	-	36.49	-	0.5	Pass
VHT80	MCS0	1	171	5855	76.54	-	158.46	-	75.97	-	0.5	Pass

TEST RESULTS DATA
Average Power Table

UNII-4 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	
					Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
11a	6Mbps	1	169	5845	17.80	-		0.50	-	18.30	-	30	-
11a	6Mbps	1	173	5865	17.80	-		0.50	-	18.30	-	30	-
11a	6Mbps	1	177	5885	17.90	-		0.50	-	18.40	-	30	-
HT20	MCS0	1	169	5845	17.70	-		0.50	-	18.20	-	30	-
HT20	MCS0	1	173	5865	17.70	-		0.50	-	18.20	-	30	-
HT20	MCS0	1	177	5885	17.90	-		0.50	-	18.40	-	30	-
HT40	MCS0	1	167	5835	17.20	-		0.50	-	17.70	-	30	-
HT40	MCS0	1	175	5875	17.00	-		0.50	-	17.50	-	30	-
VHT20	MCS0	1	169	5845	17.60	-		0.50	-	18.10	-	30	-
VHT20	MCS0	1	173	5865	17.60	-		0.50	-	18.10	-	30	-
VHT20	MCS0	1	177	5885	17.80	-		0.50	-	18.30	-	30	-
VHT40	MCS0	1	167	5835	17.10	-		0.50	-	17.60	-	30	-
VHT40	MCS0	1	175	5875	16.90	-		0.50	-	17.40	-	30	-
VHT80	MCS0	1	171	5855	16.20	-		0.50	-	16.70	-	30	-

TEST RESULTS DATA
Power Spectral Density

UNII-4 single antenna																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP PSD (dBm/MHz)		EIRP PSD Limit (dBm/MHz)		Pass /Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	1	169	5845	0.43	-	5.75	-		0.50	-	6.25	-	14.00	-	Pass
11a	6Mbps	1	173	5865	0.43	-	5.81	-		0.50	-	6.31	-	14.00	-	Pass
11a	6Mbps	1	177	5885	0.43	-	6.03	-		0.50	-	6.53	-	14.00	-	Pass
HT20	MCS0	1	169	5845	0.46	-	5.45	-		0.50	-	5.95	-	14.00	-	Pass
HT20	MCS0	1	173	5865	0.46	-	5.42	-		0.50	-	5.92	-	14.00	-	Pass
HT20	MCS0	1	177	5885	0.46	-	5.61	-		0.50	-	6.11	-	14.00	-	Pass
HT40	MCS0	1	167	5835	0.48	-	2.53	-		0.50	-	3.03	-	14.00	-	Pass
HT40	MCS0	1	175	5875	0.48	-	2.05	-		0.50	-	2.55	-	14.00	-	Pass
VHT80	MCS0	1	171	5855	0.52	-	-1.71	-		0.50	-	-1.21	-	14.00	-	Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-4 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	1	169	5845	Full	20.05	-	44.16	-	19.05	-	0.5	Pass
HE20	MCS0	1	173	5865	Full	20.66	-	42.68	-	19.13	-	0.5	Pass
HE20	MCS0	1	177	5885	Full	20.23	-	44.34	-	19.13	-	0.5	Pass
HE40	MCS0	1	167	5835	Full	38.22	-	68.56	-	37.76	-	0.5	Pass
HE40	MCS0	1	175	5875	Full	38.42	-	73.57	-	37.93	-	0.5	Pass
HE80	MCS0	1	171	5855	Full	77.86	-	166.21	-	77.33	-	0.5	Pass

TEST RESULTS DATA
Average Power Table

UNII-4 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	
						Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
HE20	MCS0	1	169	5845	Full	17.40	-		0.50	-	17.90	-	30	-
HE20	MCS0	1	169	5845	26/0	8.30	-		0.50	-	8.80	-	30	-
HE20	MCS0	1	169	5845	52/37	11.40	-		0.50	-	11.90	-	30	-
HE20	MCS0	1	169	5845	106/53	14.20	-		0.50	-	14.70	-	30	-
HE20	MCS0	1	173	5865	Full	17.10	-		0.50	-	17.60	-	30	-
HE20	MCS0	1	173	5865	26/4	8.60	-		0.50	-	9.10	-	30	-
HE20	MCS0	1	173	5865	52/38	11.20	-		0.50	-	11.70	-	30	-
HE20	MCS0	1	173	5865	106/53	13.80	-		0.50	-	14.30	-	30	-
HE20	MCS0	1	177	5885	Full	17.30	-		0.50	-	17.80	-	30	-
HE20	MCS0	1	177	5885	26/8	8.10	-		0.50	-	8.60	-	30	-
HE20	MCS0	1	177	5885	52/40	10.70	-		0.50	-	11.20	-	30	-
HE20	MCS0	1	177	5885	106/54	13.80	-		0.50	-	14.30	-	30	-
HE40	MCS0	1	167	5835	Full	16.50	-		0.50	-	17.00	-	30	-
HE40	MCS0	1	175	5875	Full	16.50	-		0.50	-	17.00	-	30	-
HE80	MCS0	1	171	5855	Full	16.30	-		0.50	-	16.80	-	30	-




TEST RESULTS DATA
Power Spectral Density

UNII-4 single antenna																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP PSD (dBm/MHz)		EIRP PSD Limit (dBm/MHz)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	1	169	5845	Full	0.58	-	5.26	-		0.50	-	5.76	-	14.00	-	Pass
HE20	MCS0	1	169	5845	26/0	0.77	-	5.21	-		0.50	-	5.71	-	14.00	-	Pass
HE20	MCS0	1	169	5845	52/37	0.78	-	5.10	-		0.50	-	5.60	-	14.00	-	Pass
HE20	MCS0	1	169	5845	106/53	0.85	-	5.12	-		0.50	-	5.62	-	14.00	-	Pass
HE20	MCS0	1	173	5865	Full	0.58	-	4.87	-		0.50	-	5.37	-	14.00	-	Pass
HE20	MCS0	1	173	5865	26/4	0.77	-	4.81	-		0.50	-	5.31	-	14.00	-	Pass
HE20	MCS0	1	173	5865	52/38	0.78	-	4.86	-		0.50	-	5.36	-	14.00	-	Pass
HE20	MCS0	1	173	5865	106/53	0.85	-	4.64	-		0.50	-	5.14	-	14.00	-	Pass
HE20	MCS0	1	177	5885	Full	0.58	-	5.06	-		0.50	-	5.56	-	14.00	-	Pass
HE20	MCS0	1	177	5885	26/8	0.77	-	4.67	-		0.50	-	5.17	-	14.00	-	Pass
HE20	MCS0	1	177	5885	52/40	0.78	-	4.67	-		0.50	-	5.17	-	14.00	-	Pass
HE20	MCS0	1	177	5885	106/54	0.85	-	4.79	-		0.50	-	5.29	-	14.00	-	Pass
HE40	MCS0	1	167	5835	Full	0.59	-	1.25	-	0.50	-	1.75	-	14.00	-	Pass	
HE40	MCS0	1	175	5875	Full	0.59	-	1.37	-	0.50	-	1.87	-	14.00	-	Pass	
HE80	MCS0	1	171	5855	Full	0.62	-	-1.34	-	0.50	-	-0.84	-	14.00	-	Pass	

**Test Result of 6dB and 26dB and 99% Occupied Bandwidth**

SISO <Ant. 0>

<802.11a>

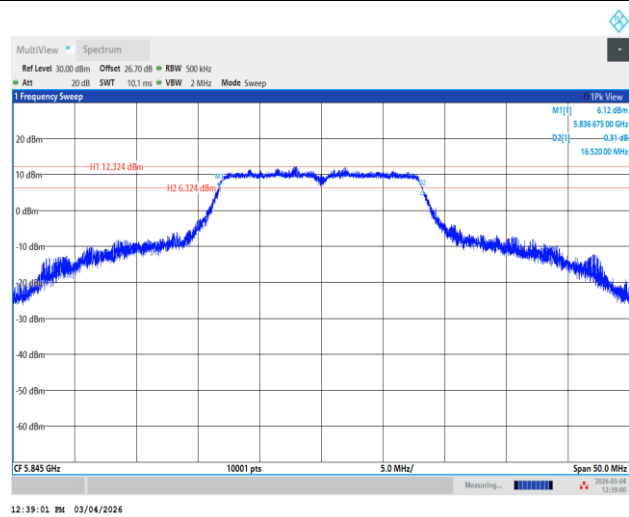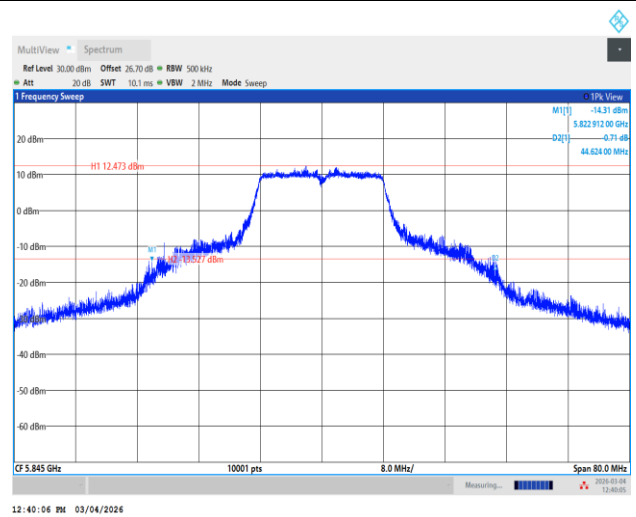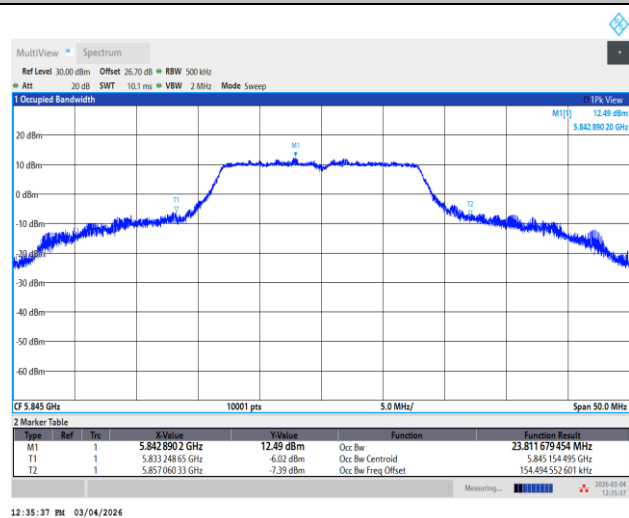
6dB Bandwidth**26dB Bandwidth****99% Occupied Bandwidth**

N/A




<802.11n HT20>


6dB Bandwidth

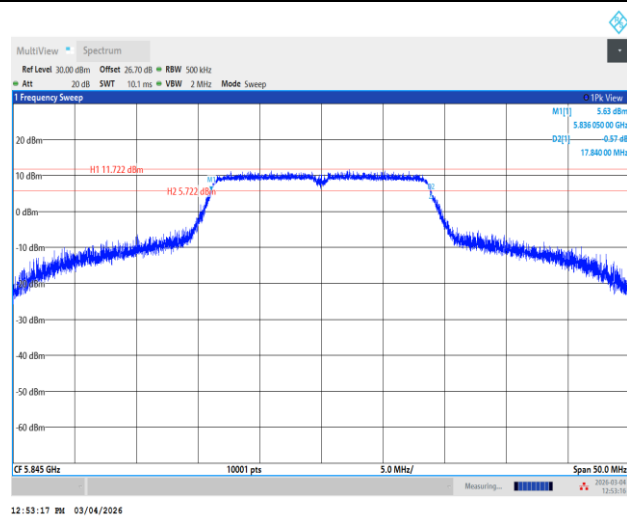

26dB Bandwidth

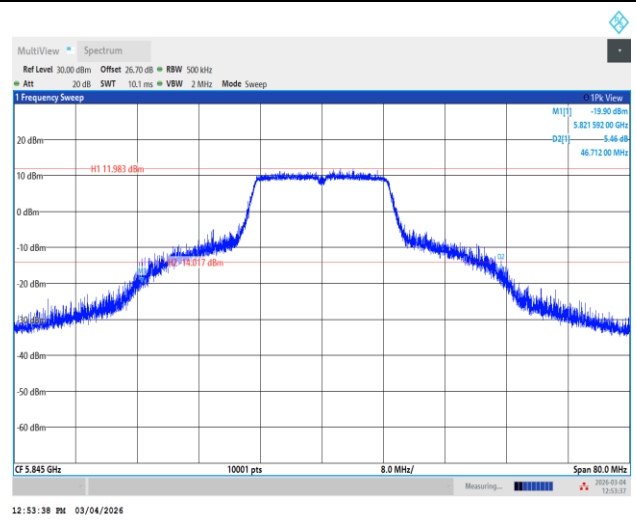

99% Occupied Bandwidth

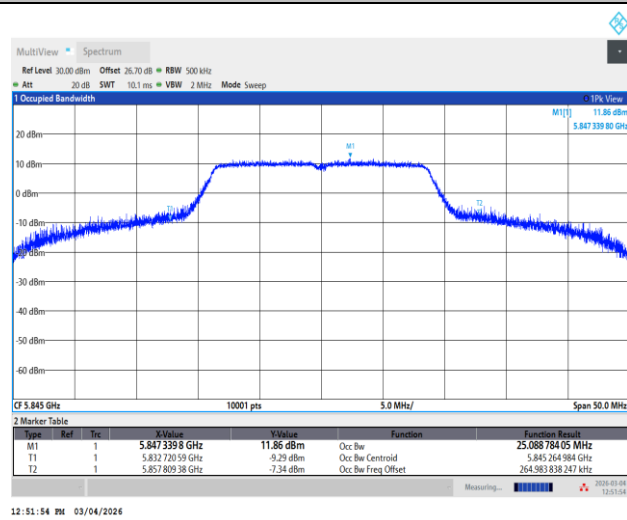


N/A




<802.11n HT40>


6dB Bandwidth

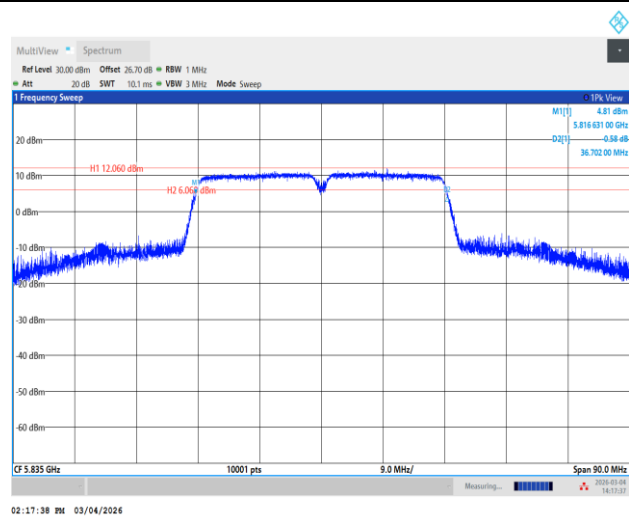

26dB Bandwidth

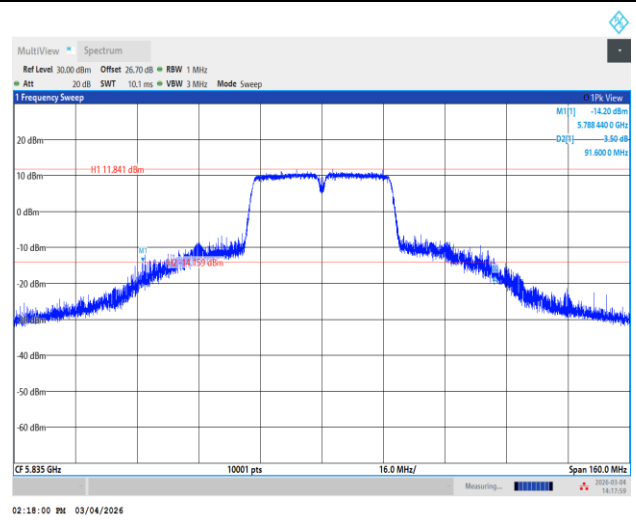

99% Occupied Bandwidth

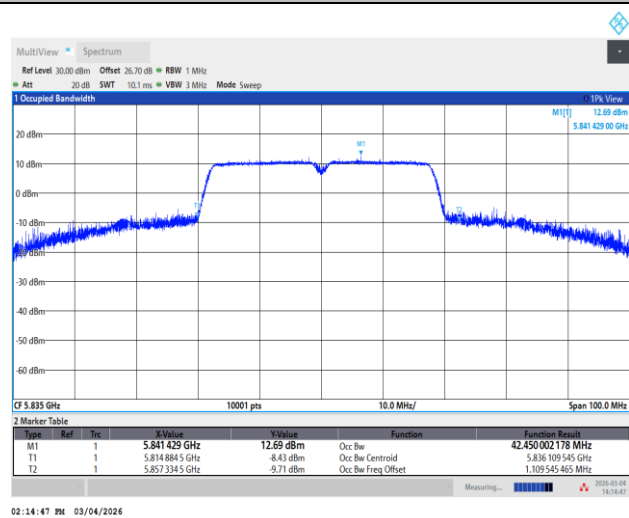


N/A




<802.11ac VHT80>


6dB Bandwidth

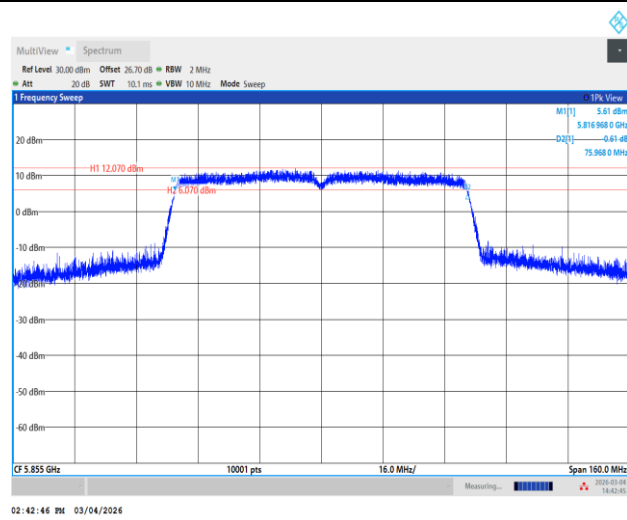

26dB Bandwidth

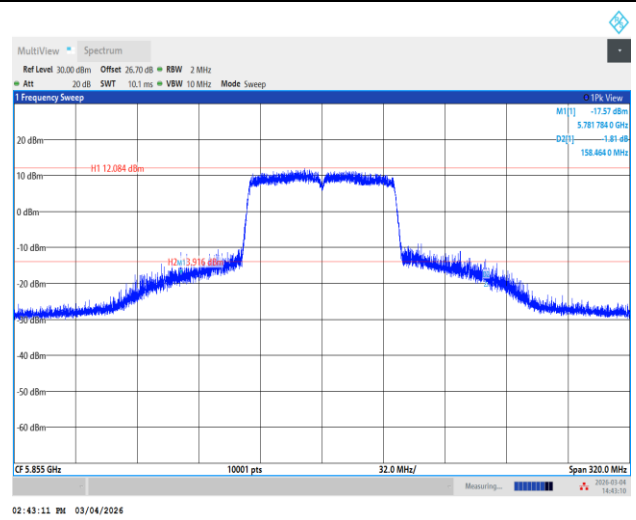

99% Occupied Bandwidth

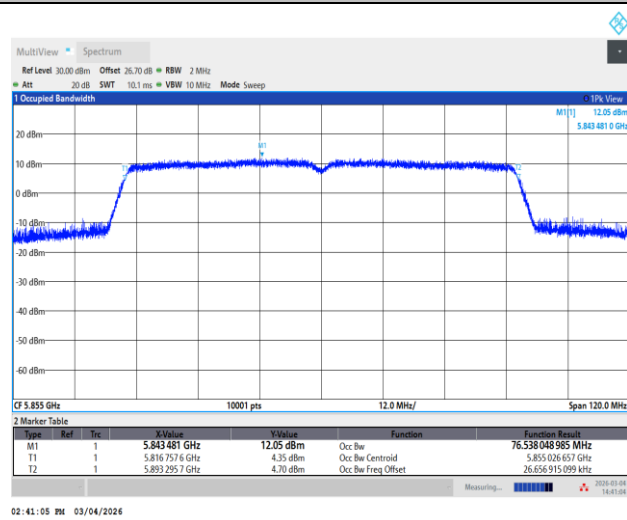


N/A




<802.11ax HE20>


6dB Bandwidth

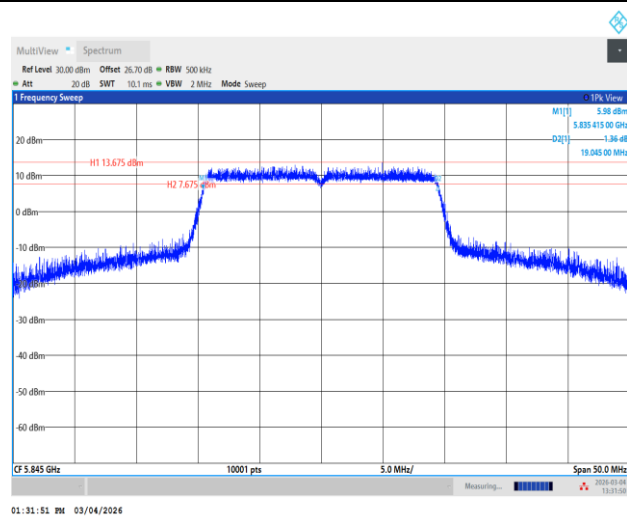

26dB Bandwidth

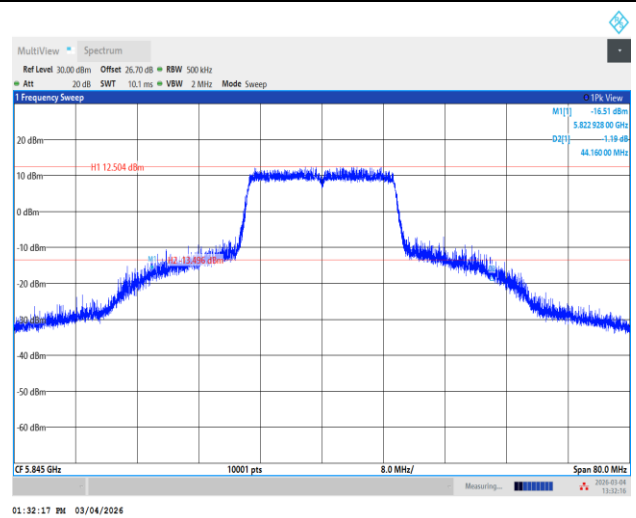

99% Occupied Bandwidth

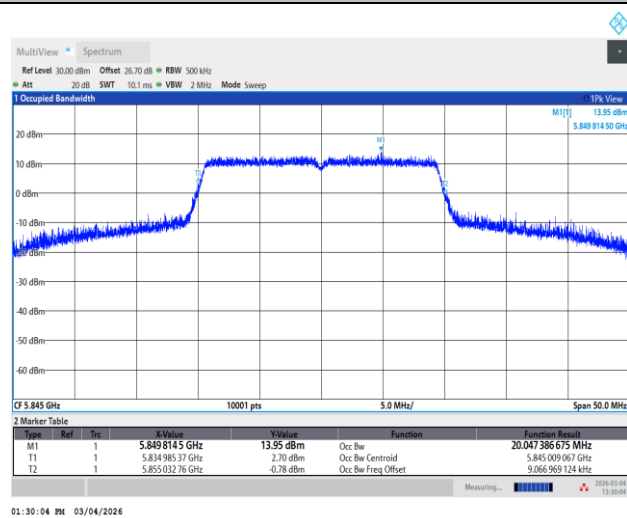


N/A




<802.11ax HE40>


6dB Bandwidth

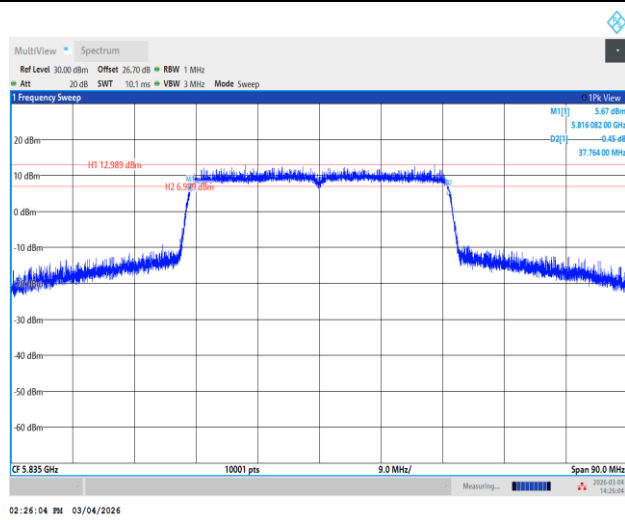

26dB Bandwidth

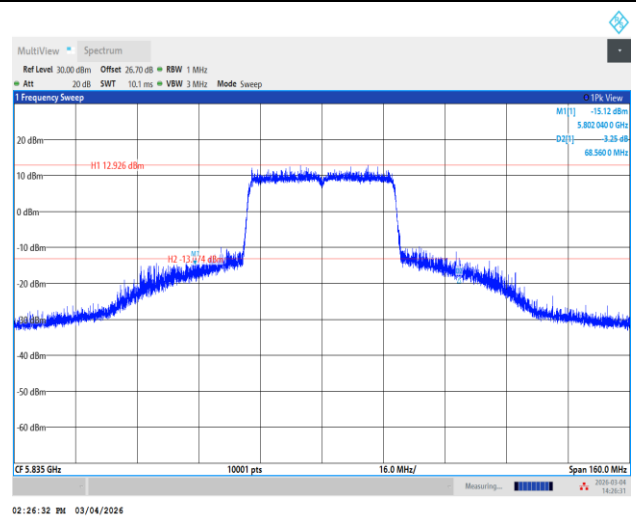

99% Occupied Bandwidth

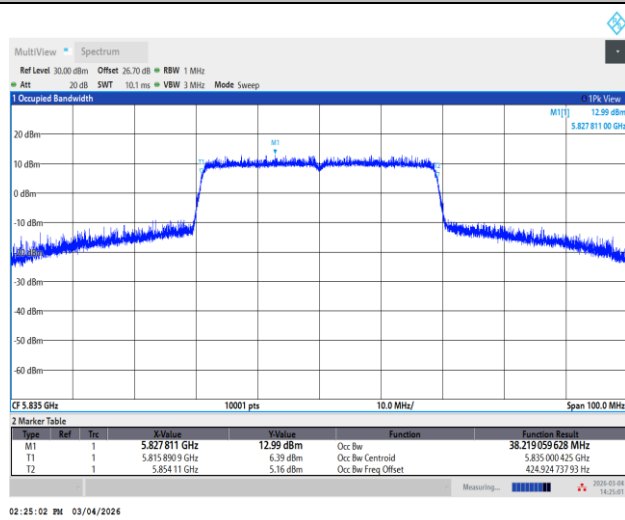


N/A




**Test Result of Power Spectral Density**

<802.11a>

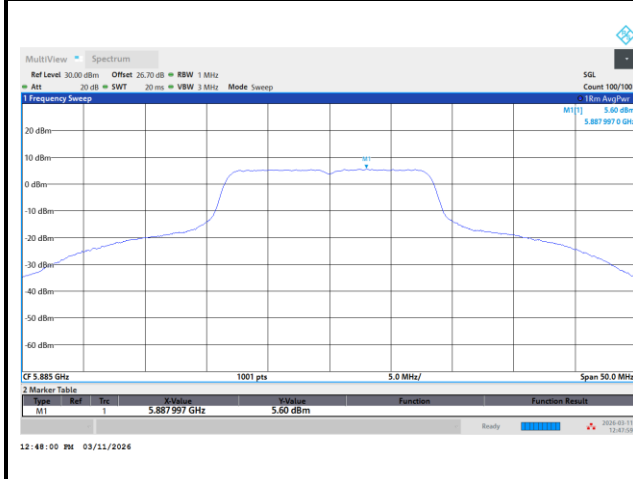Maximum Power Density Plot Trace 1 (Ant 0)**Maximum Power Density Plot Trace 2 (Ant 1)**


<802.11n HT20>

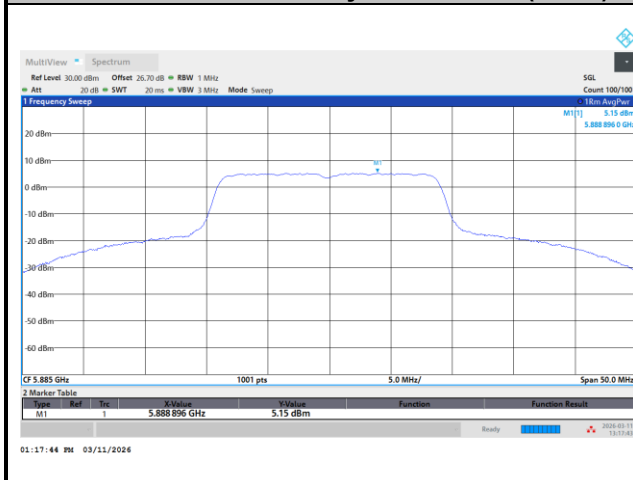Maximum Power Density Plot Trace 1 (Ant 0)**Maximum Power Density Plot Trace 2 (Ant 1)**



<802.11n HT40>


Maximum Power Density Plot Trace 1 (Ant 0)

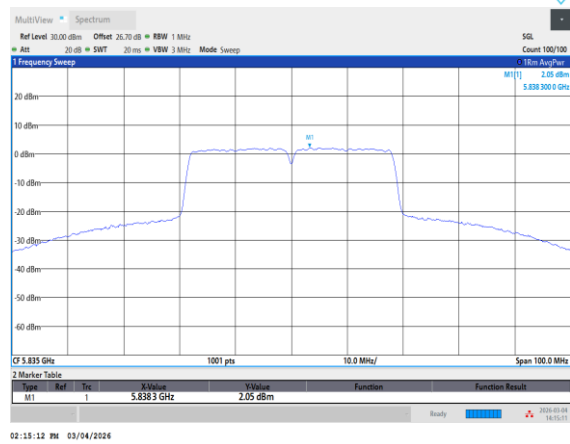

Maximum Power Density Plot Trace 2 (Ant 1)

<802.11ac VHT80>

Maximum Power Density Plot Trace 1 (Ant 0)

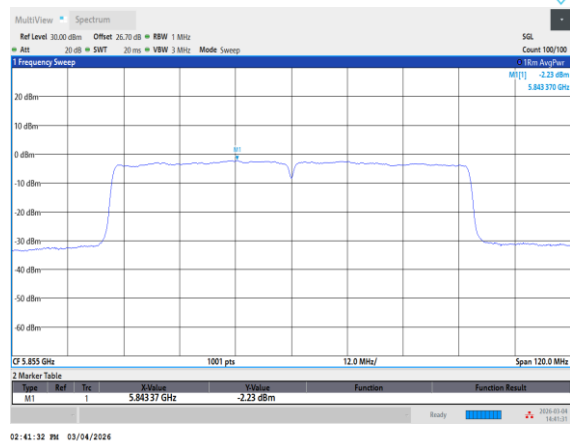


Maximum Power Density Plot Trace 2 (Ant 1)



<802.11ax HE20>


Maximum Power Density Plot Trace 1 (Ant 0)

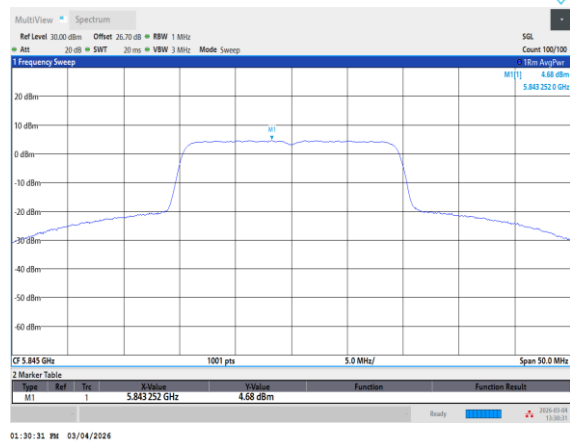

Maximum Power Density Plot Trace 2 (Ant 1)

<802.11ax HE40>

Maximum Power Density Plot Trace 1 (Ant 0)

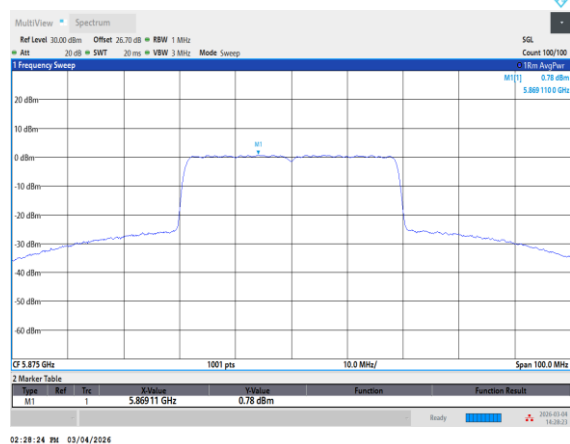


Maximum Power Density Plot Trace 2 (Ant 1)



<802.11ax HE80>

Maximum Power Density Plot Trace 1 (Ant 0)

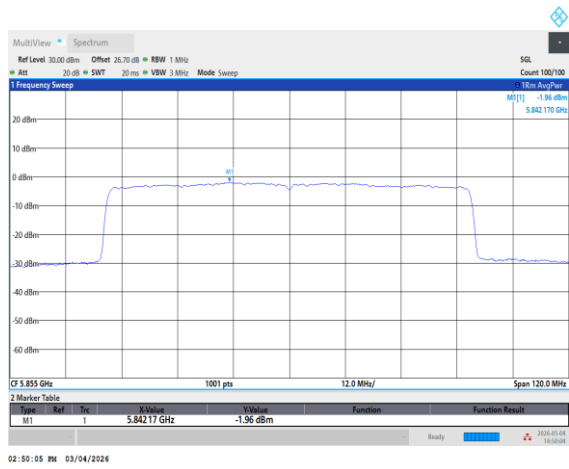

Maximum Power Density Plot Trace 2 (Ant 1)




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Brian Chen	Temperature :	17.2~23.6℃
		Relative Humidity :	46.7~49.9%

EUT Information

Report NO : 5O3008
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

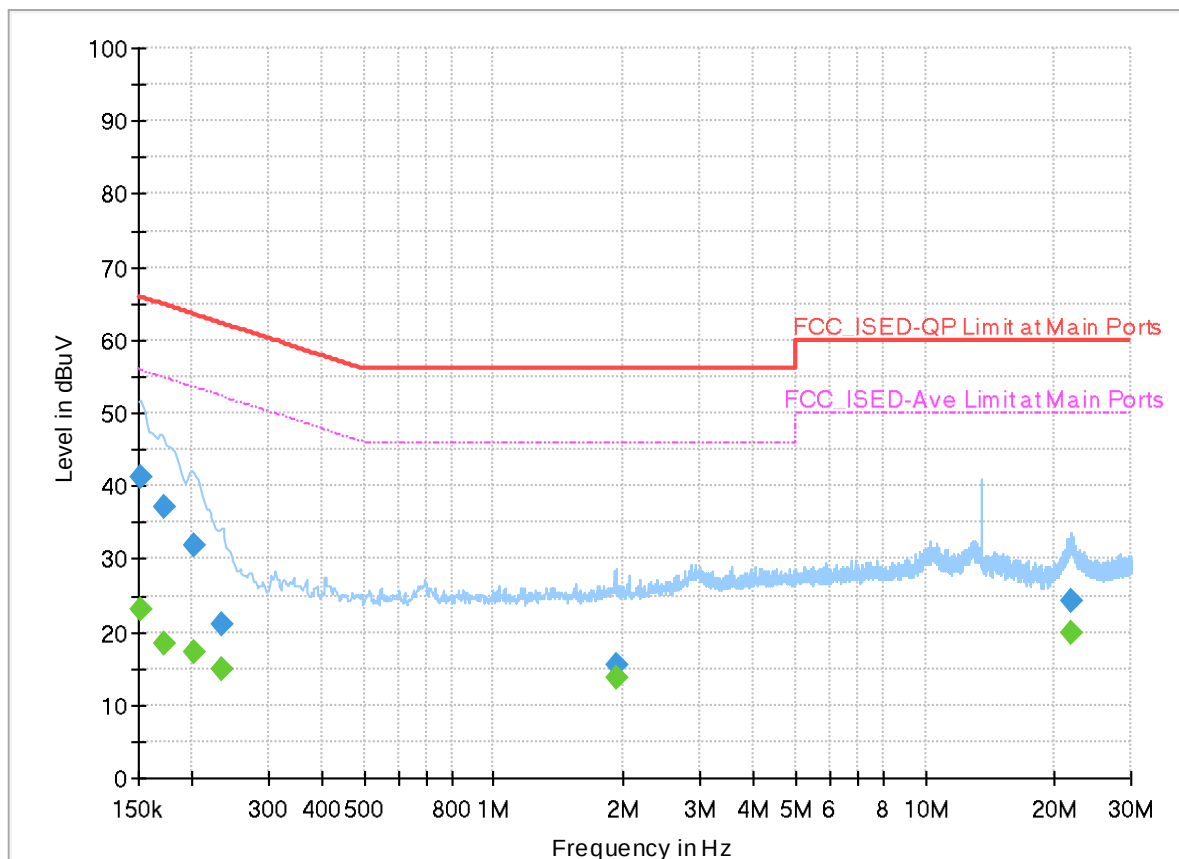


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	23.06	55.88	32.82	L1	ON	20.0
0.152250	41.33	---	65.88	24.55	L1	ON	20.0
0.172500	---	18.44	54.84	36.40	L1	ON	20.0
0.172500	37.08	---	64.84	27.76	L1	ON	20.0
0.201750	---	17.37	53.54	36.17	L1	ON	20.0
0.201750	31.78	---	63.54	31.76	L1	ON	20.0
0.233250	---	14.83	52.33	37.50	L1	ON	20.0
0.233250	21.02	---	62.33	41.31	L1	ON	20.0
1.923000	---	13.84	46.00	32.16	L1	ON	20.1
1.923000	15.59	---	56.00	40.41	L1	ON	20.1
21.763500	---	19.75	50.00	30.25	L1	ON	20.9
21.763500	24.34	---	60.00	35.66	L1	ON	20.9

EUT Information

Report NO : 5O3008
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

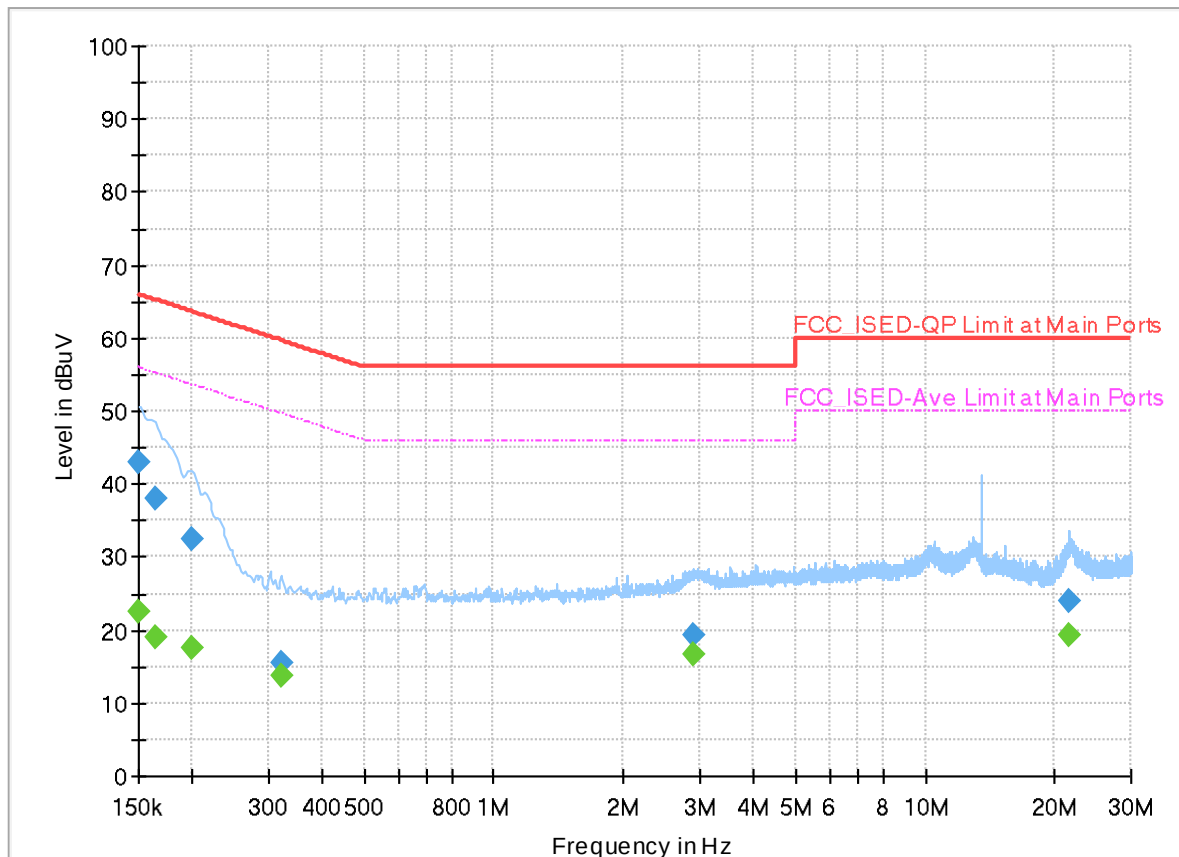

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	22.59	56.00	33.41	N	ON	20.0
0.150000	42.95	---	66.00	23.05	N	ON	20.0
0.163500	---	18.97	55.28	36.31	N	ON	20.0
0.163500	38.10	---	65.28	27.18	N	ON	20.0
0.199500	---	17.45	53.63	36.18	N	ON	20.0
0.199500	32.48	---	63.63	31.15	N	ON	20.0
0.323250	---	13.85	49.62	35.77	N	ON	20.0
0.323250	15.52	---	59.62	44.10	N	ON	20.0
2.901750	---	16.57	46.00	29.43	N	ON	20.1
2.901750	19.41	---	56.00	36.59	N	ON	20.1
21.678000	---	19.40	50.00	30.60	N	ON	20.9
21.678000	24.11	---	60.00	35.89	N	ON	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jack Cheng, Ray Lung	Temperature :	21.1 ~ 25.7°C
		Relative Humidity :	55.8 ~ 63.2%

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-4	5.825-5.925	0	802.11a	169	5845	6Mbps	-	-
Mode 2	U-NII-4	5.825-5.925	0	802.11a	173	5865	6Mbps	-	-
Mode 3	U-NII-4	5.825-5.925	0	802.11a	177	5885	6Mbps	-	-
Mode 4	U-NII-4	5.825-5.925	0	802.11n HT20	169	5845	MCS0	-	-
Mode 5	U-NII-4	5.825-5.925	0	802.11n HT20	173	5865	MCS0	-	-
Mode 6	U-NII-4	5.825-5.925	0	802.11n HT20	177	5885	MCS0	-	-
Mode 7	U-NII-4	5.825-5.925	0	802.11n HT40	167	5835	MCS0	-	-
Mode 8	U-NII-4	5.825-5.925	0	802.11n HT40	175	5875	MCS0	-	-
Mode 9	U-NII-4	5.825-5.925	0	802.11ac VHT80	171	5855	MCS0	-	-
Mode 10	U-NII-4	5.825-5.925	0	802.11ax HE20	169	5845	MCS0	Full	-
Mode 11	U-NII-4	5.825-5.925	0	802.11ax HE20	173	5865	MCS0	Full	-
Mode 12	U-NII-4	5.825-5.925	0	802.11ax HE20	177	5885	MCS0	Full	-
Mode 13	U-NII-4	5.825-5.925	0	802.11ax HE20	177	5885	MCS0	26/8	-
Mode 14	U-NII-4	5.825-5.925	0	802.11ax HE20	177	5885	MCS0	52/40	-
Mode 15	U-NII-4	5.825-5.925	0	802.11ax HE20	177	5885	MCS0	106/54	-
Mode 16	U-NII-4	5.825-5.925	0	802.11ax HE40	167	5835	MCS0	Full	-
Mode 17	U-NII-4	5.825-5.925	0	802.11ax HE40	175	5875	MCS0	Full	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 18	U-NII-4	5.825-5.925	0	802.11ax HE80	171	5855	MCS0	Full	-
Mode 19	U-NII-4	5.825-5.925	0	SHF (Above 18GHz)					-
Mode 20	U-NII-4	5.825-5.925	0	LF (Below 1GHz)					-



C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	169	5647.50	49.59	68.20	-18.61	H	Peak	Pass	-	Band Edge
	802.11a	169	11690.00	41.29	54.00	-12.71	H	Avg.	Pass	-	Harmonic
2	802.11a	173	5618.88	49.95	68.20	-18.25	V	Peak	Pass	-	Band Edge
	802.11a	173	11730.00	41.47	54.00	-12.53	H	Avg.	Pass	-	Harmonic
3	802.11a	177	5895.25	78.15	90.02	-11.87	V	Avg.	Pass	-	Band Edge
	802.11a	177	11770.00	41.79	54.00	-12.21	H	Avg.	Pass	-	Harmonic
4	802.11n HT20	169	5610.33	49.94	68.20	-18.26	H	Peak	Pass	-	Band Edge
	802.11n HT20	169	11690.00	41.56	54.00	-12.44	H	Avg.	Pass	-	Harmonic
5	802.11n HT20	173	5605.31	49.40	68.20	-18.80	V	Peak	Pass	-	Band Edge
	802.11n HT20	173	11730.00	41.41	54.00	-12.59	H	Avg.	Pass	-	Harmonic
6	802.11n HT20	177	5895.25	79.19	90.02	-10.83	V	Avg.	Pass	-	Band Edge
	802.11n HT20	177	11770.00	41.54	54.00	-12.46	V	Avg.	Pass	-	Harmonic
7	802.11n HT40	167	5647.50	50.20	68.20	-18.00	H	Peak	Pass	-	Band Edge
8	802.11n HT40	175	5923.00	59.30	69.66	-10.36	V	Avg.	Pass	-	Band Edge
9	802.11ac VHT80	171	5925.00	60.12	68.20	-8.08	V	Avg.	Pass	-	Band Edge
10	802.11ax HE20	169	5646.32	49.75	68.20	-18.45	H	Peak	Pass	Full	Band Edge
	802.11ax HE20	169	11690.00	41.59	54.00	-12.41	H	Avg.	Pass	Full	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
11	802.11ax HE20	173	5614.75	49.25	68.20	-18.95	V	Peak	Pass	Full	Band Edge
	802.11ax HE20	173	11730.00	41.66	54.00	-12.34	H	Avg.	Pass	Full	Harmonic
12	802.11ax HE20	177	5895.25	81.29	90.02	-8.73	V	Avg.	Pass	Full	Band Edge
	802.11ax HE20	177	11770.00	41.67	54.00	-12.33	H	Avg.	Pass	Full	Harmonic
13	802.11ax HE20	177	5926.00	61.58	68.20	-6.62	V	Avg.	Pass	26/8	Band Edge
14	802.11ax HE20	177	5895.25	78.39	90.02	-11.63	V	Avg.	Pass	52/40	Band Edge
15	802.11ax HE20	177	5895.25	77.58	90.02	-12.44	V	Avg.	Pass	106/54	Band Edge
16	802.11ax HE40	167	5620.95	49.98	68.20	-18.22	H	Peak	Pass	Full	Band Edge
	802.11ax HE40	167	11670.00	41.36	54.00	-12.64	H	Avg.	Pass	Full	Harmonic
17	802.11ax HE40	175	5925.00	55.79	68.20	-12.41	V	Avg.	Pass	Full	Band Edge
	802.11ax HE40	175	11750.00	41.35	54.00	-12.65	V	Avg.	Pass	Full	Harmonic
18	802.11ax HE80	171	5926.75	59.95	68.20	-8.25	V	Avg.	Pass	Full	Band Edge
	802.11ax HE80	171	11710.00	42.35	54.00	-11.65	V	Avg.	Pass	Full	Harmonic
19	SHF		39453.64	52.07	74.00	-21.93	H	Peak	Pass	-	-
20	LF		716.76	37.18	46.00	-8.82	H	Peak	Pass	-	-



Mode	1										
	Band Edge - L										
	U-NII-4_5.825-5.925_802.11a_CH169_5845MHz										
ANT	0										
Pol.	Horizontal										
Peak											



Mode	1	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11a_CH169_5845MHz	
ANT	0	
Pol.	Horizontal	Fundamental
Peak	</	





Mode	1																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.825-5.925_802.11a_CH169_5845MHz																																																																																																																																										
ANT	0																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-02-26 PEAK_BE(UNII 4) Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5624.19</td><td>49.51</td><td>68.20</td><td>-18.69</td><td>37.39</td><td>33.00</td><td>13.09</td><td>34.93</td><td>0.96</td><td>109</td><td>226</td><td>Peak</td></tr><tr><td>2</td><td>5650.15</td><td>47.21</td><td>68.31</td><td>-21.10</td><td>34.96</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>109</td><td>226</td><td>Peak</td></tr><tr><td>3</td><td>5700.01</td><td>48.51</td><td>105.20</td><td>-56.69</td><td>35.09</td><td>33.40</td><td>13.19</td><td>35.02</td><td>1.05</td><td>109</td><td>226</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>48.50</td><td>110.95</td><td>-62.45</td><td>35.75</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>109</td><td>226</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5624.19	49.51	68.20	-18.69	37.39	33.00	13.09	34.93	0.96	109	226	Peak	2	5650.15	47.21	68.31	-21.10	34.96	33.10	13.12	34.96	0.99	109	226	Peak	3	5700.01	48.51	105.20	-56.69	35.09	33.40	13.19	35.02	1.05	109	226	Peak	4	5720.07	48.50	110.95	-62.45	35.75	33.52	13.21	35.05	1.07	109	226	Peak	Level (dBuV/m) Date: 2026-02-26 PEAK(UNII 4) Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>104.51</td><td>-----</td><td>-----</td><td>91.53</td><td>33.72</td><td>13.36</td><td>35.20</td><td>1.10</td><td>109</td><td>226</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	104.51	-----	-----	91.53	33.72	13.36	35.20	1.10	109	226	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5624.19	49.51	68.20	-18.69	37.39	33.00	13.09	34.93	0.96	109	226	Peak																																																																																																																															
2	5650.15	47.21	68.31	-21.10	34.96	33.10	13.12	34.96	0.99	109	226	Peak																																																																																																																															
3	5700.01	48.51	105.20	-56.69	35.09	33.40	13.19	35.02	1.05	109	226	Peak																																																																																																																															
4	5720.07	48.50	110.95	-62.45	35.75	33.52	13.21	35.05	1.07	109	226	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5845.00	104.51	-----	-----	91.53	33.72	13.36	35.20	1.10	109	226	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>97.32</td><td>-----</td><td>-----</td><td>84.36</td><td>33.70</td><td>13.37</td><td>35.20</td><td>1.09</td><td>109</td><td>226</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	97.32	-----	-----	84.36	33.70	13.37	35.20	1.09	109	226	Average																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5845.00	97.32	-----	-----	84.36	33.70	13.37	35.20	1.09	109	226	Average																																																																																																																															



Mode	1	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11a_CH169_5845MHz	
ANT	0	
Pol.	Vertical	Fundamental
Peak		

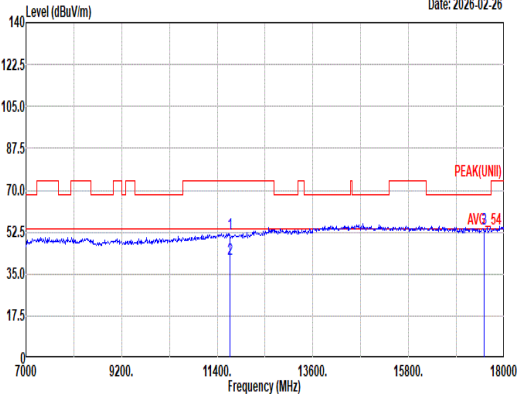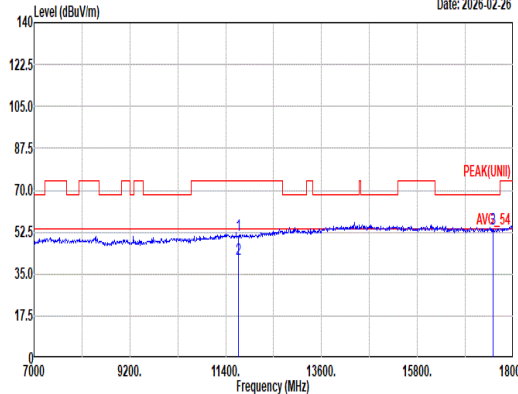

Mode	1																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-4_5.825-5.925_802.11a_CH169_5845MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-02-26  Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11690.00</td><td>51.54</td><td>74.00</td><td>-22.46</td><td>32.95</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Peak</td></tr><tr><td>2 11690.00</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>22.70</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Average</td></tr><tr><td>3 17535.00</td><td>53.81</td><td>68.20</td><td>-14.39</td><td>35.53</td><td>39.83</td><td>23.85</td><td>47.85</td><td>2.45</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11690.00	51.54	74.00	-22.46	32.95	38.40	19.18	41.00	2.01	-- -- Peak	2 11690.00	41.29	54.00	-12.71	22.70	38.40	19.18	41.00	2.01	-- -- Average	3 17535.00	53.81	68.20	-14.39	35.53	39.83	23.85	47.85	2.45	-- -- Peak	Level (dBuV/m) Date: 2026-02-26  Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11690.00</td><td>51.14</td><td>74.00</td><td>-22.86</td><td>32.55</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Peak</td></tr><tr><td>2 11690.00</td><td>41.26</td><td>54.00</td><td>-12.74</td><td>22.67</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Average</td></tr><tr><td>3 17535.00</td><td>53.73</td><td>68.20</td><td>-14.47</td><td>35.45</td><td>39.83</td><td>23.85</td><td>47.85</td><td>2.45</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11690.00	51.14	74.00	-22.86	32.55	38.40	19.18	41.00	2.01	-- -- Peak	2 11690.00	41.26	54.00	-12.74	22.67	38.40	19.18	41.00	2.01	-- -- Average	3 17535.00	53.73	68.20	-14.47	35.45	39.83	23.85	47.85	2.45	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11690.00	51.54	74.00	-22.46	32.95	38.40	19.18	41.00	2.01	-- -- Peak																																																																																																																	
2 11690.00	41.29	54.00	-12.71	22.70	38.40	19.18	41.00	2.01	-- -- Average																																																																																																																	
3 17535.00	53.81	68.20	-14.39	35.53	39.83	23.85	47.85	2.45	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11690.00	51.14	74.00	-22.86	32.55	38.40	19.18	41.00	2.01	-- -- Peak																																																																																																																	
2 11690.00	41.26	54.00	-12.74	22.67	38.40	19.18	41.00	2.01	-- -- Average																																																																																																																	
3 17535.00	53.73	68.20	-14.47	35.45	39.83	23.85	47.85	2.45	-- -- Peak																																																																																																																	





Mode	1	
	Harmonic	
	U-NII-4_5.825-5.925_802.11a_CH169_5845MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Frequency (MHz) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Frequency (MHz) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL



Mode	2																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.825-5.925_802.11a_CH173_5865MHz																																																																																																															
ANT	0																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5621.24</td><td>49.65</td><td>68.20</td><td>-18.55</td><td>37.56</td><td>32.98</td><td>13.09</td><td>34.93</td><td>0.95</td><td>100 196 Peak</td></tr><tr><td>2 5650.45</td><td>49.05</td><td>68.53</td><td>-19.48</td><td>36.80</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>100 196 Peak</td></tr><tr><td>3 5705.61</td><td>49.62</td><td>106.77</td><td>-57.15</td><td>36.98</td><td>33.43</td><td>13.19</td><td>35.03</td><td>1.05</td><td>100 196 Peak</td></tr><tr><td>4 5720.36</td><td>49.10</td><td>111.62</td><td>-62.52</td><td>36.35</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>100 196 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5621.24	49.65	68.20	-18.55	37.56	32.98	13.09	34.93	0.95	100 196 Peak	2 5650.45	49.05	68.53	-19.48	36.80	33.10	13.12	34.96	0.99	100 196 Peak	3 5705.61	49.62	106.77	-57.15	36.98	33.43	13.19	35.03	1.05	100 196 Peak	4 5720.36	49.10	111.62	-62.52	36.35	33.52	13.21	35.05	1.07	100 196 Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5865.00</td><td>101.16</td><td>-----</td><td>-----</td><td>88.24</td><td>33.70</td><td>13.39</td><td>35.23</td><td>1.06</td><td>100 196 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5865.00	101.16	-----	-----	88.24	33.70	13.39	35.23	1.06	100 196 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5621.24	49.65	68.20	-18.55	37.56	32.98	13.09	34.93	0.95	100 196 Peak																																																																																																							
2 5650.45	49.05	68.53	-19.48	36.80	33.10	13.12	34.96	0.99	100 196 Peak																																																																																																							
3 5705.61	49.62	106.77	-57.15	36.98	33.43	13.19	35.03	1.05	100 196 Peak																																																																																																							
4 5720.36	49.10	111.62	-62.52	36.35	33.52	13.21	35.05	1.07	100 196 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5865.00	101.16	-----	-----	88.24	33.70	13.39	35.23	1.06	100 196 Peak																																																																																																							
Avg	Blank	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5865.00</td><td>94.43</td><td>-----</td><td>-----</td><td>81.51</td><td>33.70</td><td>13.39</td><td>35.23</td><td>1.06</td><td>100 196 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5865.00	94.43	-----	-----	81.51	33.70	13.39	35.23	1.06	100 196 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5865.00	94.43	-----	-----	81.51	33.70	13.39	35.23	1.06	100 196 Average																																																																																																							

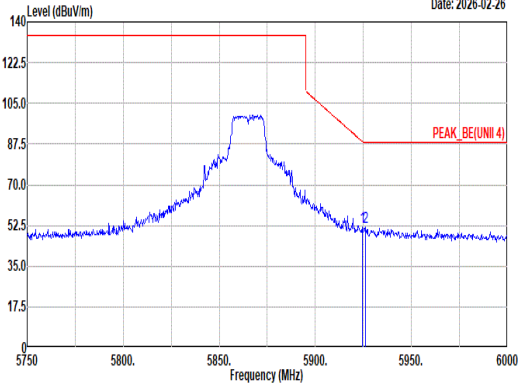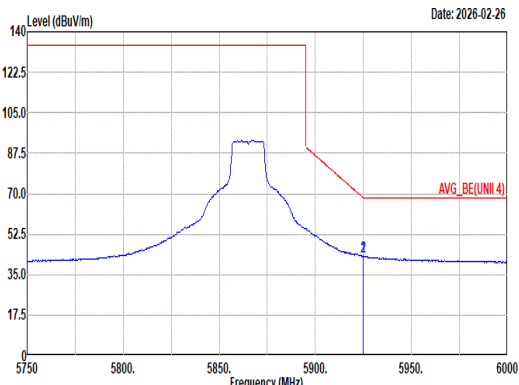

Mode	2																																																								
	Band Edge - R																																																								
	U-NII-4_5.825-5.925_802.11a_CH173_5865MHz																																																								
ANT	0																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	Level (dBuV/m) Date: 2026-02-26  Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.50</td><td>51.81</td><td>88.57</td><td>-36.76</td><td>39.03</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>196 Peak</td></tr><tr><td>2</td><td>5926.25</td><td>51.81</td><td>88.20</td><td>-36.39</td><td>39.02</td><td>33.65</td><td>13.46</td><td>35.30</td><td>0.98</td><td>100</td><td>196 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.50	51.81	88.57	-36.76	39.03	33.65	13.45	35.30	0.98	100	196 Peak	2	5926.25	51.81	88.20	-36.39	39.02	33.65	13.46	35.30	0.98	100	196 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	5924.50	51.81	88.57	-36.76	39.03	33.65	13.45	35.30	0.98	100	196 Peak																																														
2	5926.25	51.81	88.20	-36.39	39.02	33.65	13.46	35.30	0.98	100	196 Peak																																														
Avg	Level (dBuV/m) Date: 2026-02-26  Site : 03CH21-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>42.92</td><td>68.20</td><td>-25.28</td><td>30.14</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>196 Average</td></tr><tr><td>2</td><td>5925.00</td><td>42.92</td><td>68.20</td><td>-25.28</td><td>30.14</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>196 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5925.00	42.92	68.20	-25.28	30.14	33.65	13.45	35.30	0.98	100	196 Average	2	5925.00	42.92	68.20	-25.28	30.14	33.65	13.45	35.30	0.98	100	196 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	5925.00	42.92	68.20	-25.28	30.14	33.65	13.45	35.30	0.98	100	196 Average																																														
2	5925.00	42.92	68.20	-25.28	30.14	33.65	13.45	35.30	0.98	100	196 Average																																														



Mode	2																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.825-5.925_802.11a_CH173_5865MHz																																																																																																																																								
ANT	0																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																		
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5618.88</td><td>49.95</td><td>68.20</td><td>-18.25</td><td>37.87</td><td>32.98</td><td>13.08</td><td>34.93</td><td>0.95</td><td>100</td><td>221</td><td>Peak</td></tr><tr><td>2</td><td>5650.15</td><td>48.01</td><td>68.31</td><td>-20.30</td><td>35.76</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>100</td><td>221</td><td>Peak</td></tr><tr><td>3</td><td>5700.01</td><td>48.10</td><td>105.20</td><td>-57.10</td><td>35.48</td><td>33.40</td><td>13.19</td><td>35.02</td><td>1.05</td><td>100</td><td>221</td><td>Peak</td></tr><tr><td>4</td><td>5720.36</td><td>47.40</td><td>111.62</td><td>-64.22</td><td>34.65</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>100</td><td>221</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5618.88	49.95	68.20	-18.25	37.87	32.98	13.08	34.93	0.95	100	221	Peak	2	5650.15	48.01	68.31	-20.30	35.76	33.10	13.12	34.96	0.99	100	221	Peak	3	5700.01	48.10	105.20	-57.10	35.48	33.40	13.19	35.02	1.05	100	221	Peak	4	5720.36	47.40	111.62	-64.22	34.65	33.52	13.21	35.05	1.07	100	221	Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5865.00</td><td>104.34</td><td>-----</td><td>-----</td><td>91.42</td><td>33.70</td><td>13.39</td><td>35.23</td><td>1.06</td><td>100</td><td>221</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5865.00	104.34	-----	-----	91.42	33.70	13.39	35.23	1.06	100	221	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5618.88	49.95	68.20	-18.25	37.87	32.98	13.08	34.93	0.95	100	221	Peak																																																																																																																													
2	5650.15	48.01	68.31	-20.30	35.76	33.10	13.12	34.96	0.99	100	221	Peak																																																																																																																													
3	5700.01	48.10	105.20	-57.10	35.48	33.40	13.19	35.02	1.05	100	221	Peak																																																																																																																													
4	5720.36	47.40	111.62	-64.22	34.65	33.52	13.21	35.05	1.07	100	221	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5865.00	104.34	-----	-----	91.42	33.70	13.39	35.23	1.06	100	221	Peak																																																																																																																													
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5865.00</td><td>97.14</td><td>-----</td><td>-----</td><td>84.21</td><td>33.70</td><td>13.38</td><td>35.22</td><td>1.07</td><td>100</td><td>221</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5865.00	97.14	-----	-----	84.21	33.70	13.38	35.22	1.07	100	221	Average																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5865.00	97.14	-----	-----	84.21	33.70	13.38	35.22	1.07	100	221	Average																																																																																																																													





Mode	2	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11a_CH173_5865MHz	
ANT	0	
Pol.	Vertical	Fundamental
Peak		



Mode	2																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-4_5.825-5.925_802.11a_CH173_5865MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11730.00</td><td>51.19</td><td>74.00</td><td>-22.81</td><td>32.60</td><td>38.40</td><td>19.22</td><td>41.05</td><td>2.02</td><td>-- -- Peak</td></tr><tr><td>2 11730.00</td><td>41.47</td><td>54.00</td><td>-12.53</td><td>22.88</td><td>38.40</td><td>19.22</td><td>41.05</td><td>2.02</td><td>-- -- Average</td></tr><tr><td>3 17595.00</td><td>52.97</td><td>68.20</td><td>-15.23</td><td>34.43</td><td>39.98</td><td>23.89</td><td>47.79</td><td>2.46</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11730.00	51.19	74.00	-22.81	32.60	38.40	19.22	41.05	2.02	-- -- Peak	2 11730.00	41.47	54.00	-12.53	22.88	38.40	19.22	41.05	2.02	-- -- Average	3 17595.00	52.97	68.20	-15.23	34.43	39.98	23.89	47.79	2.46	-- -- Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11730.00</td><td>50.83</td><td>74.00</td><td>-23.17</td><td>32.24</td><td>38.40</td><td>19.22</td><td>41.05</td><td>2.02</td><td>-- -- Peak</td></tr><tr><td>2 11730.00</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>22.85</td><td>38.40</td><td>19.22</td><td>41.05</td><td>2.02</td><td>-- -- Average</td></tr><tr><td>3 17595.00</td><td>53.90</td><td>68.20</td><td>-14.30</td><td>35.36</td><td>39.98</td><td>23.89</td><td>47.79</td><td>2.46</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11730.00	50.83	74.00	-23.17	32.24	38.40	19.22	41.05	2.02	-- -- Peak	2 11730.00	41.44	54.00	-12.56	22.85	38.40	19.22	41.05	2.02	-- -- Average	3 17595.00	53.90	68.20	-14.30	35.36	39.98	23.89	47.79	2.46	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11730.00	51.19	74.00	-22.81	32.60	38.40	19.22	41.05	2.02	-- -- Peak																																																																																																																	
2 11730.00	41.47	54.00	-12.53	22.88	38.40	19.22	41.05	2.02	-- -- Average																																																																																																																	
3 17595.00	52.97	68.20	-15.23	34.43	39.98	23.89	47.79	2.46	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11730.00	50.83	74.00	-23.17	32.24	38.40	19.22	41.05	2.02	-- -- Peak																																																																																																																	
2 11730.00	41.44	54.00	-12.56	22.85	38.40	19.22	41.05	2.02	-- -- Average																																																																																																																	
3 17595.00	53.90	68.20	-14.30	35.36	39.98	23.89	47.79	2.46	-- -- Peak																																																																																																																	

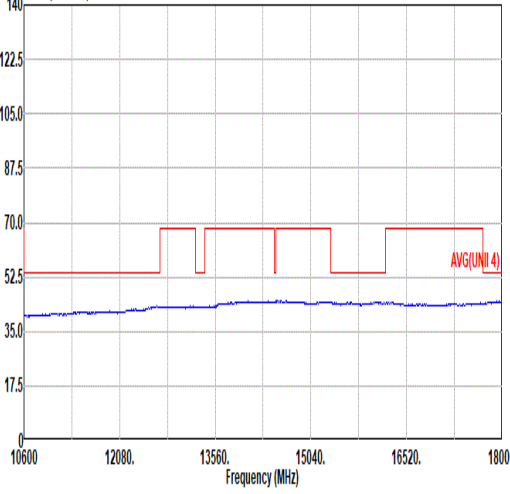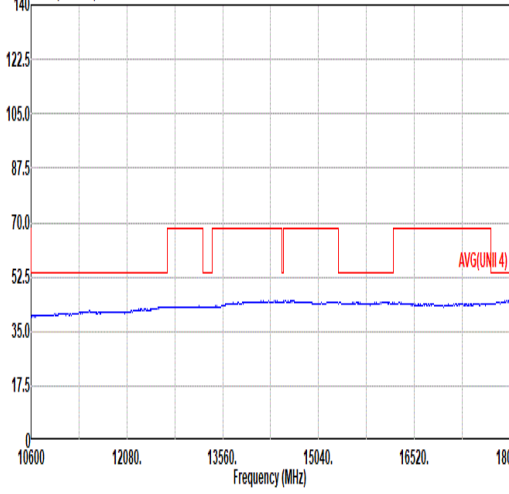

Mode	2	
	Harmonic	
	U-NII-4_5.825-5.925_802.11a_CH173_5865MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-02-26  Site : 03CH21-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-02-26  Site : 03CH21-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL



Mode	3																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.825-5.925_802.11a_CH177_5885MHz																																																																																																																																								
ANT	0																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5640.97</td><td>50.00</td><td>68.20</td><td>-18.20</td><td>37.75</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>100</td><td>187</td><td>Peak</td></tr><tr><td>2</td><td>5650.15</td><td>48.54</td><td>68.31</td><td>-19.77</td><td>36.29</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>100</td><td>187</td><td>Peak</td></tr><tr><td>3</td><td>5700.30</td><td>48.56</td><td>105.28</td><td>-56.72</td><td>35.94</td><td>33.40</td><td>13.19</td><td>35.02</td><td>1.05</td><td>100</td><td>187</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>47.23</td><td>110.95</td><td>-63.72</td><td>34.48</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>100</td><td>187</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5640.97	50.00	68.20	-18.20	37.75	33.10	13.12	34.96	0.99	100	187	Peak	2	5650.15	48.54	68.31	-19.77	36.29	33.10	13.12	34.96	0.99	100	187	Peak	3	5700.30	48.56	105.28	-56.72	35.94	33.40	13.19	35.02	1.05	100	187	Peak	4	5720.07	47.23	110.95	-63.72	34.48	33.52	13.21	35.05	1.07	100	187	Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>101.41</td><td>-----</td><td>-----</td><td>88.51</td><td>33.70</td><td>13.41</td><td>35.25</td><td>1.04</td><td>100</td><td>187</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	101.41	-----	-----	88.51	33.70	13.41	35.25	1.04	100	187	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5640.97	50.00	68.20	-18.20	37.75	33.10	13.12	34.96	0.99	100	187	Peak																																																																																																																													
2	5650.15	48.54	68.31	-19.77	36.29	33.10	13.12	34.96	0.99	100	187	Peak																																																																																																																													
3	5700.30	48.56	105.28	-56.72	35.94	33.40	13.19	35.02	1.05	100	187	Peak																																																																																																																													
4	5720.07	47.23	110.95	-63.72	34.48	33.52	13.21	35.05	1.07	100	187	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	101.41	-----	-----	88.51	33.70	13.41	35.25	1.04	100	187	Peak																																																																																																																													
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>93.76</td><td>-----</td><td>-----</td><td>80.88</td><td>33.70</td><td>13.41</td><td>35.26</td><td>1.03</td><td>100</td><td>187</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5885.00	93.76	-----	-----	80.88	33.70	13.41	35.26	1.03	100	187	Average																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5885.00	93.76	-----	-----	80.88	33.70	13.41	35.26	1.03	100	187	Average																																																																																																																													



Mode	3																																																										
	Band Edge - R																																																										
	U-NII-4_5.825-5.925_802.11a_CH177_5885MHz																																																										
ANT	0																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5906.00</td><td>76.84</td><td>102.12</td><td>-25.28</td><td>63.99</td><td>33.69</td><td>13.43</td><td>35.28</td><td>1.01</td><td>100</td><td>187</td><td>Peak</td></tr><tr><td>2</td><td>5926.75</td><td>60.16</td><td>88.20</td><td>-28.04</td><td>47.37</td><td>33.65</td><td>13.46</td><td>35.30</td><td>0.98</td><td>100</td><td>187</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5906.00	76.84	102.12	-25.28	63.99	33.69	13.43	35.28	1.01	100	187	Peak	2	5926.75	60.16	88.20	-28.04	47.37	33.65	13.46	35.30	0.98	100	187	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5906.00	76.84	102.12	-25.28	63.99	33.69	13.43	35.28	1.01	100	187	Peak																																															
2	5926.75	60.16	88.20	-28.04	47.37	33.65	13.46	35.30	0.98	100	187	Peak																																															
Avg	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>74.61</td><td>90.02</td><td>-15.41</td><td>61.73</td><td>33.70</td><td>13.42</td><td>35.26</td><td>1.02</td><td>100</td><td>187</td><td>Average</td></tr><tr><td>2</td><td>5925.50</td><td>49.31</td><td>68.20</td><td>-18.89</td><td>36.53</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>187</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5895.25	74.61	90.02	-15.41	61.73	33.70	13.42	35.26	1.02	100	187	Average	2	5925.50	49.31	68.20	-18.89	36.53	33.65	13.45	35.30	0.98	100	187	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.25	74.61	90.02	-15.41	61.73	33.70	13.42	35.26	1.02	100	187	Average																																															
2	5925.50	49.31	68.20	-18.89	36.53	33.65	13.45	35.30	0.98	100	187	Average																																															



Mode	3																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.825-5.925_802.11a_CH177_5885MHz																																																																																																																																										
ANT	0																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5624.49</td><td>50.27</td><td>68.20</td><td>-17.93</td><td>38.15</td><td>33.00</td><td>13.09</td><td>34.93</td><td>0.96</td><td>129</td><td>225</td><td>Peak</td></tr><tr><td>2</td><td>5650.15</td><td>49.30</td><td>68.31</td><td>-19.01</td><td>37.05</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>129</td><td>225</td><td>Peak</td></tr><tr><td>3</td><td>5700.01</td><td>48.09</td><td>105.20</td><td>-57.11</td><td>35.47</td><td>33.40</td><td>13.19</td><td>35.02</td><td>1.05</td><td>129</td><td>225</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>47.49</td><td>110.95</td><td>-63.46</td><td>34.74</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>129</td><td>225</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5624.49	50.27	68.20	-17.93	38.15	33.00	13.09	34.93	0.96	129	225	Peak	2	5650.15	49.30	68.31	-19.01	37.05	33.10	13.12	34.96	0.99	129	225	Peak	3	5700.01	48.09	105.20	-57.11	35.47	33.40	13.19	35.02	1.05	129	225	Peak	4	5720.07	47.49	110.95	-63.46	34.74	33.52	13.21	35.05	1.07	129	225	Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>104.91</td><td>-----</td><td>-----</td><td>92.01</td><td>33.70</td><td>13.41</td><td>35.25</td><td>1.04</td><td>129</td><td>225</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	104.91	-----	-----	92.01	33.70	13.41	35.25	1.04	129	225	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5624.49	50.27	68.20	-17.93	38.15	33.00	13.09	34.93	0.96	129	225	Peak																																																																																																																															
2	5650.15	49.30	68.31	-19.01	37.05	33.10	13.12	34.96	0.99	129	225	Peak																																																																																																																															
3	5700.01	48.09	105.20	-57.11	35.47	33.40	13.19	35.02	1.05	129	225	Peak																																																																																																																															
4	5720.07	47.49	110.95	-63.46	34.74	33.52	13.21	35.05	1.07	129	225	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	104.91	-----	-----	92.01	33.70	13.41	35.25	1.04	129	225	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>97.27</td><td>-----</td><td>-----</td><td>84.39</td><td>33.70</td><td>13.41</td><td>35.26</td><td>1.03</td><td>129</td><td>225</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	97.27	-----	-----	84.39	33.70	13.41	35.26	1.03	129	225	Average																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	97.27	-----	-----	84.39	33.70	13.41	35.26	1.03	129	225	Average																																																																																																																															



Mode	3																																																													
	Band Edge - R																																																													
	U-NII-4_5.825-5.925_802.11a_CH177_5885MHz																																																													
ANT	0																																																													
Pol.	Vertical						Fundamental																																																							
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5900.50</td><td>85.75</td><td>106.16</td><td>-20.41</td><td>72.88</td><td>33.70</td><td>13.43</td><td>35.27</td><td>1.01 129 225 Peak</td></tr><tr><td>2</td><td>5925.50</td><td>62.21</td><td>88.20</td><td>-25.99</td><td>49.43</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98 129 225 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5900.50	85.75	106.16	-20.41	72.88	33.70	13.43	35.27	1.01 129 225 Peak	2	5925.50	62.21	88.20	-25.99	49.43	33.65	13.45	35.30	0.98 129 225 Peak	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	5900.50	85.75	106.16	-20.41	72.88	33.70	13.43	35.27	1.01 129 225 Peak																																																					
2	5925.50	62.21	88.20	-25.99	49.43	33.65	13.45	35.30	0.98 129 225 Peak																																																					
Avg	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5895.25</td><td>78.15</td><td>90.02</td><td>-11.87</td><td>65.27</td><td>33.70</td><td>13.42</td><td>35.26</td><td>1.02 129 225 Average</td></tr><tr><td>2</td><td>5925.25</td><td>51.81</td><td>68.20</td><td>-16.39</td><td>39.03</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98 129 225 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5895.25	78.15	90.02	-11.87	65.27	33.70	13.42	35.26	1.02 129 225 Average	2	5925.25	51.81	68.20	-16.39	39.03	33.65	13.45	35.30	0.98 129 225 Average	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	5895.25	78.15	90.02	-11.87	65.27	33.70	13.42	35.26	1.02 129 225 Average																																																					
2	5925.25	51.81	68.20	-16.39	39.03	33.65	13.45	35.30	0.98 129 225 Average																																																					



Mode	3																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-4_5.825-5.925_802.11a_CH177_5885MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11770.00</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>33.59</td><td>38.40</td><td>19.26</td><td>41.10</td><td>2.03</td><td>-- -- Peak</td></tr><tr><td>2 11770.00</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>23.20</td><td>38.40</td><td>19.26</td><td>41.10</td><td>2.03</td><td>-- -- Average</td></tr><tr><td>3 17655.00</td><td>54.53</td><td>68.20</td><td>-13.67</td><td>35.93</td><td>39.90</td><td>23.94</td><td>47.72</td><td>2.48</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11770.00	52.18	74.00	-21.82	33.59	38.40	19.26	41.10	2.03	-- -- Peak	2 11770.00	41.79	54.00	-12.21	23.20	38.40	19.26	41.10	2.03	-- -- Average	3 17655.00	54.53	68.20	-13.67	35.93	39.90	23.94	47.72	2.48	-- -- Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11770.00</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>32.80</td><td>38.40</td><td>19.26</td><td>41.10</td><td>2.03</td><td>-- -- Peak</td></tr><tr><td>2 11770.00</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>23.12</td><td>38.40</td><td>19.26</td><td>41.10</td><td>2.03</td><td>-- -- Average</td></tr><tr><td>3 17655.00</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>36.18</td><td>39.90</td><td>23.94</td><td>47.72</td><td>2.48</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11770.00	51.39	74.00	-22.61	32.80	38.40	19.26	41.10	2.03	-- -- Peak	2 11770.00	41.71	54.00	-12.29	23.12	38.40	19.26	41.10	2.03	-- -- Average	3 17655.00	54.78	68.20	-13.42	36.18	39.90	23.94	47.72	2.48	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11770.00	52.18	74.00	-21.82	33.59	38.40	19.26	41.10	2.03	-- -- Peak																																																																																																																	
2 11770.00	41.79	54.00	-12.21	23.20	38.40	19.26	41.10	2.03	-- -- Average																																																																																																																	
3 17655.00	54.53	68.20	-13.67	35.93	39.90	23.94	47.72	2.48	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11770.00	51.39	74.00	-22.61	32.80	38.40	19.26	41.10	2.03	-- -- Peak																																																																																																																	
2 11770.00	41.71	54.00	-12.29	23.12	38.40	19.26	41.10	2.03	-- -- Average																																																																																																																	
3 17655.00	54.78	68.20	-13.42	36.18	39.90	23.94	47.72	2.48	-- -- Peak																																																																																																																	



Mode	3	
	Harmonic	
	U-NII-4_5.825-5.925_802.11a_CH177_5885MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL



Mode	4									
	Band Edge - L									
	U-NII-4_5.825-5.925_802.11n HT20_CH169_5845MHz									
ANT	0									
Pol.	Horizontal					Fundamental				
Peak	Level (dBuV/m) Date: 2026-02-26 </									



Mode	4																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.825-5.925_802.11n HT20_CH169_5845MHz																																																																																																																																										
ANT	0																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5637.76</td><td>48.83</td><td>68.20</td><td>-19.37</td><td>36.65</td><td>33.05</td><td>13.11</td><td>34.95</td><td>0.97</td><td>124</td><td>225</td><td>Peak</td></tr><tr><td>2</td><td>5658.15</td><td>47.64</td><td>68.31</td><td>-20.67</td><td>35.39</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>124</td><td>225</td><td>Peak</td></tr><tr><td>3</td><td>5707.68</td><td>50.22</td><td>107.35</td><td>-57.13</td><td>37.56</td><td>33.45</td><td>13.19</td><td>35.03</td><td>1.05</td><td>124</td><td>225</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>47.71</td><td>110.95</td><td>-63.24</td><td>34.96</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>124</td><td>225</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5637.76	48.83	68.20	-19.37	36.65	33.05	13.11	34.95	0.97	124	225	Peak	2	5658.15	47.64	68.31	-20.67	35.39	33.10	13.12	34.96	0.99	124	225	Peak	3	5707.68	50.22	107.35	-57.13	37.56	33.45	13.19	35.03	1.05	124	225	Peak	4	5720.07	47.71	110.95	-63.24	34.96	33.52	13.21	35.05	1.07	124	225	Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>104.02</td><td>-----</td><td>-----</td><td>91.08</td><td>33.70</td><td>13.37</td><td>35.21</td><td>1.08</td><td>124</td><td>225</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	104.02	-----	-----	91.08	33.70	13.37	35.21	1.08	124	225	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5637.76	48.83	68.20	-19.37	36.65	33.05	13.11	34.95	0.97	124	225	Peak																																																																																																																															
2	5658.15	47.64	68.31	-20.67	35.39	33.10	13.12	34.96	0.99	124	225	Peak																																																																																																																															
3	5707.68	50.22	107.35	-57.13	37.56	33.45	13.19	35.03	1.05	124	225	Peak																																																																																																																															
4	5720.07	47.71	110.95	-63.24	34.96	33.52	13.21	35.05	1.07	124	225	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5845.00	104.02	-----	-----	91.08	33.70	13.37	35.21	1.08	124	225	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>97.19</td><td>-----</td><td>-----</td><td>84.21</td><td>33.72</td><td>13.36</td><td>35.20</td><td>1.10</td><td>124</td><td>225</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5845.00	97.19	-----	-----	84.21	33.72	13.36	35.20	1.10	124	225	Average																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5845.00	97.19	-----	-----	84.21	33.72	13.36	35.20	1.10	124	225	Average																																																																																																																															



Mode	4	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11n HT20_CH169_5845MHz	
ANT	0	
Pol.	Vertical	Fundamental
Peak	</	



Mode	4																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-4_5.825-5.925_802.11n HT20_CH169_5845MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11690.00</td><td>51.46</td><td>74.00</td><td>-22.54</td><td>32.87</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Peak</td></tr><tr><td>2 11690.00</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>22.97</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Average</td></tr><tr><td>3 17535.00</td><td>53.72</td><td>68.20</td><td>-14.48</td><td>35.44</td><td>39.83</td><td>23.85</td><td>47.85</td><td>2.45</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11690.00	51.46	74.00	-22.54	32.87	38.40	19.18	41.00	2.01	-- -- Peak	2 11690.00	41.56	54.00	-12.44	22.97	38.40	19.18	41.00	2.01	-- -- Average	3 17535.00	53.72	68.20	-14.48	35.44	39.83	23.85	47.85	2.45	-- -- Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11690.00</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>32.75</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Peak</td></tr><tr><td>2 11690.00</td><td>41.53</td><td>54.00</td><td>-12.47</td><td>22.94</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Average</td></tr><tr><td>3 17535.00</td><td>54.01</td><td>68.20</td><td>-14.19</td><td>35.73</td><td>39.83</td><td>23.85</td><td>47.85</td><td>2.45</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11690.00	51.34	74.00	-22.66	32.75	38.40	19.18	41.00	2.01	-- -- Peak	2 11690.00	41.53	54.00	-12.47	22.94	38.40	19.18	41.00	2.01	-- -- Average	3 17535.00	54.01	68.20	-14.19	35.73	39.83	23.85	47.85	2.45	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11690.00	51.46	74.00	-22.54	32.87	38.40	19.18	41.00	2.01	-- -- Peak																																																																																																																	
2 11690.00	41.56	54.00	-12.44	22.97	38.40	19.18	41.00	2.01	-- -- Average																																																																																																																	
3 17535.00	53.72	68.20	-14.48	35.44	39.83	23.85	47.85	2.45	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11690.00	51.34	74.00	-22.66	32.75	38.40	19.18	41.00	2.01	-- -- Peak																																																																																																																	
2 11690.00	41.53	54.00	-12.47	22.94	38.40	19.18	41.00	2.01	-- -- Average																																																																																																																	
3 17535.00	54.01	68.20	-14.19	35.73	39.83	23.85	47.85	2.45	-- -- Peak																																																																																																																	



Mode	4	
	Harmonic	
	U-NII-4_5.825-5.925_802.11n HT20_CH169_5845MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-02-26 Frequency (MHz) Site : 03CH21-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-02-26 Frequency (MHz) Site : 03CH21-HY Condition: AVG(UNI 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL



Mode	5																																																																																																																								
	Band Edge - L																																																																																																																								
	U-NII-4_5.825-5.925_802.11n HT20_CH173_5865MHz																																																																																																																								
ANT	0																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																		
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5632.45</td><td>49.32</td><td>68.20</td><td>-18.88</td><td>37.16</td><td>33.03</td><td>13.10</td><td>34.94</td><td>0.97</td><td>101 192 Peak</td></tr><tr><td>2 5658.74</td><td>47.57</td><td>68.75</td><td>-21.18</td><td>35.32</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>101 192 Peak</td></tr><tr><td>3 5700.01</td><td>48.31</td><td>105.20</td><td>-56.89</td><td>35.69</td><td>33.40</td><td>13.19</td><td>35.02</td><td>1.05</td><td>101 192 Peak</td></tr><tr><td>4 5720.07</td><td>47.56</td><td>110.95</td><td>-63.39</td><td>34.81</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>101 192 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5632.45	49.32	68.20	-18.88	37.16	33.03	13.10	34.94	0.97	101 192 Peak	2 5658.74	47.57	68.75	-21.18	35.32	33.10	13.12	34.96	0.99	101 192 Peak	3 5700.01	48.31	105.20	-56.89	35.69	33.40	13.19	35.02	1.05	101 192 Peak	4 5720.07	47.56	110.95	-63.39	34.81	33.52	13.21	35.05	1.07	101 192 Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5865.00</td><td>101.26</td><td>-----</td><td>-----</td><td>88.34</td><td>33.70</td><td>13.39</td><td>35.23</td><td>1.06</td><td>101 192 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5865.00	101.26	-----	-----	88.34	33.70	13.39	35.23	1.06	101 192 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1 5632.45	49.32	68.20	-18.88	37.16	33.03	13.10	34.94	0.97	101 192 Peak																																																																																																																
2 5658.74	47.57	68.75	-21.18	35.32	33.10	13.12	34.96	0.99	101 192 Peak																																																																																																																
3 5700.01	48.31	105.20	-56.89	35.69	33.40	13.19	35.02	1.05	101 192 Peak																																																																																																																
4 5720.07	47.56	110.95	-63.39	34.81	33.52	13.21	35.05	1.07	101 192 Peak																																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1 5865.00	101.26	-----	-----	88.34	33.70	13.39	35.23	1.06	101 192 Peak																																																																																																																
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5865.00</td><td>94.25</td><td>-----</td><td>-----</td><td>81.33</td><td>33.70</td><td>13.39</td><td>35.23</td><td>1.06</td><td>101 192 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5865.00	94.25	-----	-----	81.33	33.70	13.39	35.23	1.06	101 192 Average																																																																						
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1 5865.00	94.25	-----	-----	81.33	33.70	13.39	35.23	1.06	101 192 Average																																																																																																																



Mode	5	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11n HT20_CH173_5865MHz	
ANT	0	
Pol.	Horizontal	Fundamental
Peak	</	



Mode	5																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.825-5.925_802.11n HT20_CH173_5865MHz																																																																																																															
ANT	0																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5605.31</td><td>49.40</td><td>68.20</td><td>-18.80</td><td>37.38</td><td>32.92</td><td>13.07</td><td>34.91</td><td>0.94</td><td>108 221 Peak</td></tr><tr><td>2 5650.74</td><td>49.08</td><td>68.75</td><td>-19.67</td><td>36.83</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>108 221 Peak</td></tr><tr><td>3 5701.19</td><td>50.11</td><td>105.53</td><td>-55.42</td><td>37.49</td><td>33.41</td><td>13.19</td><td>35.03</td><td>1.05</td><td>108 221 Peak</td></tr><tr><td>4 5720.07</td><td>47.21</td><td>110.95</td><td>-63.74</td><td>34.46</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>108 221 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5605.31	49.40	68.20	-18.80	37.38	32.92	13.07	34.91	0.94	108 221 Peak	2 5650.74	49.08	68.75	-19.67	36.83	33.10	13.12	34.96	0.99	108 221 Peak	3 5701.19	50.11	105.53	-55.42	37.49	33.41	13.19	35.03	1.05	108 221 Peak	4 5720.07	47.21	110.95	-63.74	34.46	33.52	13.21	35.05	1.07	108 221 Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5865.00</td><td>104.09</td><td>-----</td><td>-----</td><td>91.17</td><td>33.70</td><td>13.39</td><td>35.23</td><td>1.06</td><td>108 221 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5865.00	104.09	-----	-----	91.17	33.70	13.39	35.23	1.06	108 221 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5605.31	49.40	68.20	-18.80	37.38	32.92	13.07	34.91	0.94	108 221 Peak																																																																																																							
2 5650.74	49.08	68.75	-19.67	36.83	33.10	13.12	34.96	0.99	108 221 Peak																																																																																																							
3 5701.19	50.11	105.53	-55.42	37.49	33.41	13.19	35.03	1.05	108 221 Peak																																																																																																							
4 5720.07	47.21	110.95	-63.74	34.46	33.52	13.21	35.05	1.07	108 221 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5865.00	104.09	-----	-----	91.17	33.70	13.39	35.23	1.06	108 221 Peak																																																																																																							
Avg	Blank	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5865.00</td><td>96.66</td><td>-----</td><td>-----</td><td>83.73</td><td>33.70</td><td>13.38</td><td>35.22</td><td>1.07</td><td>108 221 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5865.00	96.66	-----	-----	83.73	33.70	13.38	35.22	1.07	108 221 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5865.00	96.66	-----	-----	83.73	33.70	13.38	35.22	1.07	108 221 Average																																																																																																							



Mode	5	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11n HT20_CH173_5865MHz	
ANT	0	
Pol.	Vertical	Fundamental
Peak	</	



Mode	5																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-4_5.825-5.925_802.11n HT20_CH173_5865MHz																																																																																																																																													
ANT	0																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>51.60</td><td>74.00</td><td>-22.40</td><td>33.01</td><td>38.40</td><td>19.22</td><td>41.05</td><td>2.02</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11730.00</td><td>41.41</td><td>54.00</td><td>-12.59</td><td>22.02</td><td>38.40</td><td>19.22</td><td>41.05</td><td>2.02</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17595.00</td><td>53.50</td><td>68.20</td><td>-14.70</td><td>34.96</td><td>39.98</td><td>23.89</td><td>47.79</td><td>2.46</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	51.60	74.00	-22.40	33.01	38.40	19.22	41.05	2.02	--	--	Peak	2	11730.00	41.41	54.00	-12.59	22.02	38.40	19.22	41.05	2.02	--	--	Average	3	17595.00	53.50	68.20	-14.70	34.96	39.98	23.89	47.79	2.46	--	--	Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>32.33</td><td>38.40</td><td>19.22</td><td>41.05</td><td>2.02</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>11730.00</td><td>41.36</td><td>54.00</td><td>-12.64</td><td>22.77</td><td>38.40</td><td>19.22</td><td>41.05</td><td>2.02</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>3</td><td>17595.00</td><td>53.84</td><td>68.20</td><td>-14.36</td><td>35.30</td><td>39.98</td><td>23.89</td><td>47.79</td><td>2.46</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	50.92	74.00	-23.08	32.33	38.40	19.22	41.05	2.02	--	--	Peak	2	11730.00	41.36	54.00	-12.64	22.77	38.40	19.22	41.05	2.02	--	--	Average	3	17595.00	53.84	68.20	-14.36	35.30	39.98	23.89	47.79	2.46	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11730.00	51.60	74.00	-22.40	33.01	38.40	19.22	41.05	2.02	--	--	Peak																																																																																																																																		
2	11730.00	41.41	54.00	-12.59	22.02	38.40	19.22	41.05	2.02	--	--	Average																																																																																																																																		
3	17595.00	53.50	68.20	-14.70	34.96	39.98	23.89	47.79	2.46	--	--	Peak																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11730.00	50.92	74.00	-23.08	32.33	38.40	19.22	41.05	2.02	--	--	Peak																																																																																																																																		
2	11730.00	41.36	54.00	-12.64	22.77	38.40	19.22	41.05	2.02	--	--	Average																																																																																																																																		
3	17595.00	53.84	68.20	-14.36	35.30	39.98	23.89	47.79	2.46	--	--	Peak																																																																																																																																		



Mode	5	
	Harmonic	
	U-NII-4_5.825-5.925_802.11n HT20_CH173_5865MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Frequency (MHz) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Frequency (MHz) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL



Mode	6																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.825-5.925_802.11n HT20_CH177_5885MHz																																																																																																																																										
ANT	0																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5617.41</td><td>49.59</td><td>68.20</td><td>-18.61</td><td>37.51</td><td>32.97</td><td>13.08</td><td>34.92</td><td>0.95</td><td>100</td><td>194</td><td>Peak</td></tr><tr><td>2</td><td>5651.63</td><td>48.93</td><td>69.41</td><td>-20.48</td><td>36.67</td><td>33.11</td><td>13.12</td><td>34.96</td><td>0.99</td><td>100</td><td>194</td><td>Peak</td></tr><tr><td>3</td><td>5704.73</td><td>49.52</td><td>106.52</td><td>-57.00</td><td>36.88</td><td>33.43</td><td>13.19</td><td>35.03</td><td>1.05</td><td>100</td><td>194</td><td>Peak</td></tr><tr><td>4</td><td>5728.07</td><td>47.99</td><td>110.95</td><td>-62.96</td><td>35.24</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>100</td><td>194</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5617.41	49.59	68.20	-18.61	37.51	32.97	13.08	34.92	0.95	100	194	Peak	2	5651.63	48.93	69.41	-20.48	36.67	33.11	13.12	34.96	0.99	100	194	Peak	3	5704.73	49.52	106.52	-57.00	36.88	33.43	13.19	35.03	1.05	100	194	Peak	4	5728.07	47.99	110.95	-62.96	35.24	33.52	13.21	35.05	1.07	100	194	Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>101.50</td><td>-----</td><td>-----</td><td>88.60</td><td>33.70</td><td>13.41</td><td>35.25</td><td>1.04</td><td>100</td><td>194</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	101.50	-----	-----	88.60	33.70	13.41	35.25	1.04	100	194	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5617.41	49.59	68.20	-18.61	37.51	32.97	13.08	34.92	0.95	100	194	Peak																																																																																																																															
2	5651.63	48.93	69.41	-20.48	36.67	33.11	13.12	34.96	0.99	100	194	Peak																																																																																																																															
3	5704.73	49.52	106.52	-57.00	36.88	33.43	13.19	35.03	1.05	100	194	Peak																																																																																																																															
4	5728.07	47.99	110.95	-62.96	35.24	33.52	13.21	35.05	1.07	100	194	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	101.50	-----	-----	88.60	33.70	13.41	35.25	1.04	100	194	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>94.17</td><td>-----</td><td>-----</td><td>81.29</td><td>33.70</td><td>13.41</td><td>35.26</td><td>1.03</td><td>100</td><td>194</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	94.17	-----	-----	81.29	33.70	13.41	35.26	1.03	100	194	Average																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	94.17	-----	-----	81.29	33.70	13.41	35.26	1.03	100	194	Average																																																																																																																															



Mode	6																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.825-5.925_802.11n HT20_CH177_5885MHz																																																																																																																																										
ANT	0																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5632.16</td><td>48.91</td><td>68.20</td><td>-19.29</td><td>36.75</td><td>33.03</td><td>13.10</td><td>34.94</td><td>0.97</td><td>102</td><td>225</td><td>Peak</td></tr><tr><td>2</td><td>5658.74</td><td>48.94</td><td>68.75</td><td>-19.81</td><td>36.69</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>102</td><td>225</td><td>Peak</td></tr><tr><td>3</td><td>5702.37</td><td>48.40</td><td>105.86</td><td>-57.46</td><td>35.78</td><td>33.41</td><td>13.19</td><td>35.03</td><td>1.05</td><td>102</td><td>225</td><td>Peak</td></tr><tr><td>4</td><td>5728.07</td><td>48.78</td><td>110.95</td><td>-62.17</td><td>36.03</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>102</td><td>225</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5632.16	48.91	68.20	-19.29	36.75	33.03	13.10	34.94	0.97	102	225	Peak	2	5658.74	48.94	68.75	-19.81	36.69	33.10	13.12	34.96	0.99	102	225	Peak	3	5702.37	48.40	105.86	-57.46	35.78	33.41	13.19	35.03	1.05	102	225	Peak	4	5728.07	48.78	110.95	-62.17	36.03	33.52	13.21	35.05	1.07	102	225	Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>104.97</td><td>-----</td><td>-----</td><td>92.06</td><td>33.70</td><td>13.40</td><td>35.24</td><td>1.05</td><td>102</td><td>225</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	104.97	-----	-----	92.06	33.70	13.40	35.24	1.05	102	225	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5632.16	48.91	68.20	-19.29	36.75	33.03	13.10	34.94	0.97	102	225	Peak																																																																																																																															
2	5658.74	48.94	68.75	-19.81	36.69	33.10	13.12	34.96	0.99	102	225	Peak																																																																																																																															
3	5702.37	48.40	105.86	-57.46	35.78	33.41	13.19	35.03	1.05	102	225	Peak																																																																																																																															
4	5728.07	48.78	110.95	-62.17	36.03	33.52	13.21	35.05	1.07	102	225	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	104.97	-----	-----	92.06	33.70	13.40	35.24	1.05	102	225	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>97.20</td><td>-----</td><td>-----</td><td>84.30</td><td>33.70</td><td>13.41</td><td>35.25</td><td>1.04</td><td>102</td><td>225</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	97.20	-----	-----	84.30	33.70	13.41	35.25	1.04	102	225	Average																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5885.00	97.20	-----	-----	84.30	33.70	13.41	35.25	1.04	102	225	Average																																																																																																																															



Mode	6										
	Band Edge - R										
	U-NII-4_5.825-5.925_802.11n HT20_CH177_5885MHz										
ANT	0										
Pol.	Vertical										
Peak											



Mode	6																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-4_5.825-5.925_802.11n HT20_CH177_5885MHz																																																																																																																																	
ANT	0																																																																																																																																	
Pol.	Horizontal					Vertical																																																																																																																												
Peak Avg	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11770.00</td><td>50.95</td><td>74.00</td><td>-23.05</td><td>32.36</td><td>38.40</td><td>19.26</td><td>41.10</td><td>2.03</td><td>-- -- Peak</td></tr><tr><td>2 11770.00</td><td>41.41</td><td>54.00</td><td>-12.59</td><td>22.82</td><td>38.40</td><td>19.26</td><td>41.10</td><td>2.03</td><td>-- -- Average</td></tr><tr><td>3 17655.00</td><td>53.18</td><td>68.20</td><td>-15.02</td><td>34.58</td><td>39.90</td><td>23.94</td><td>47.72</td><td>2.48</td><td>-- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11770.00	50.95	74.00	-23.05	32.36	38.40	19.26	41.10	2.03	-- -- Peak	2 11770.00	41.41	54.00	-12.59	22.82	38.40	19.26	41.10	2.03	-- -- Average	3 17655.00	53.18	68.20	-15.02	34.58	39.90	23.94	47.72	2.48	-- -- Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11770.00</td><td>51.93</td><td>74.00</td><td>-22.07</td><td>33.34</td><td>38.40</td><td>19.26</td><td>41.10</td><td>2.03</td><td>-- -- Peak</td></tr><tr><td>2 11770.00</td><td>41.54</td><td>54.00</td><td>-12.46</td><td>22.95</td><td>38.40</td><td>19.26</td><td>41.10</td><td>2.03</td><td>-- -- Average</td></tr><tr><td>3 17655.00</td><td>53.79</td><td>68.20</td><td>-14.41</td><td>35.19</td><td>39.90</td><td>23.94</td><td>47.72</td><td>2.48</td><td>-- -- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11770.00	51.93	74.00	-22.07	33.34	38.40	19.26	41.10	2.03	-- -- Peak	2 11770.00	41.54	54.00	-12.46	22.95	38.40	19.26	41.10	2.03	-- -- Average	3 17655.00	53.79	68.20	-14.41	35.19	39.90	23.94	47.72	2.48	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																									
1 11770.00	50.95	74.00	-23.05	32.36	38.40	19.26	41.10	2.03	-- -- Peak																																																																																																																									
2 11770.00	41.41	54.00	-12.59	22.82	38.40	19.26	41.10	2.03	-- -- Average																																																																																																																									
3 17655.00	53.18	68.20	-15.02	34.58	39.90	23.94	47.72	2.48	-- -- Peak																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																									
1 11770.00	51.93	74.00	-22.07	33.34	38.40	19.26	41.10	2.03	-- -- Peak																																																																																																																									
2 11770.00	41.54	54.00	-12.46	22.95	38.40	19.26	41.10	2.03	-- -- Average																																																																																																																									
3 17655.00	53.79	68.20	-14.41	35.19	39.90	23.94	47.72	2.48	-- -- Peak																																																																																																																									



Mode	6	
	Harmonic	
	U-NII-4_5.825-5.925_802.11n HT20_CH177_5885MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Frequency (MHz) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Frequency (MHz) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL



	7																																																																																																																																								
Mode	Band Edge - L																																																																																																																																								
	U-NII-4_5.825-5.925_802.11n HT40_CH167_5835MHz																																																																																																																																								
ANT	0																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	Level (dBuV/m) Date: 2026-02-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5600 5659 5718 5777 5836 5895 PEAK_BE(UNII 4) Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5647.50</td><td>50.20</td><td>68.20</td><td>-18.00</td><td>37.97</td><td>33.09</td><td>13.12</td><td>34.96</td><td>0.98</td><td>100</td><td>192</td><td>Peak</td></tr><tr><td>2</td><td>5650.15</td><td>46.86</td><td>68.31</td><td>-21.45</td><td>34.61</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>100</td><td>192</td><td>Peak</td></tr><tr><td>3</td><td>5708.86</td><td>52.68</td><td>107.68</td><td>-55.00</td><td>40.00</td><td>33.45</td><td>13.20</td><td>35.03</td><td>1.06</td><td>100</td><td>192</td><td>Peak</td></tr><tr><td>4</td><td>5721.25</td><td>52.71</td><td>113.64</td><td>-60.93</td><td>39.95</td><td>33.53</td><td>13.21</td><td>35.05</td><td>1.07</td><td>100</td><td>192</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.50	50.20	68.20	-18.00	37.97	33.09	13.12	34.96	0.98	100	192	Peak	2	5650.15	46.86	68.31	-21.45	34.61	33.10	13.12	34.96	0.99	100	192	Peak	3	5708.86	52.68	107.68	-55.00	40.00	33.45	13.20	35.03	1.06	100	192	Peak	4	5721.25	52.71	113.64	-60.93	39.95	33.53	13.21	35.05	1.07	100	192	Peak	Level (dBuV/m) Date: 2026-02-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 PEAK(UNII 4) Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5835.00</td><td>90.71</td><td>-----</td><td>-----</td><td>85.69</td><td>33.74</td><td>13.34</td><td>35.18</td><td>1.12</td><td>100</td><td>192</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	90.71	-----	-----	85.69	33.74	13.34	35.18	1.12	100	192	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5647.50	50.20	68.20	-18.00	37.97	33.09	13.12	34.96	0.98	100	192	Peak																																																																																																																													
2	5650.15	46.86	68.31	-21.45	34.61	33.10	13.12	34.96	0.99	100	192	Peak																																																																																																																													
3	5708.86	52.68	107.68	-55.00	40.00	33.45	13.20	35.03	1.06	100	192	Peak																																																																																																																													
4	5721.25	52.71	113.64	-60.93	39.95	33.53	13.21	35.05	1.07	100	192	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5835.00	90.71	-----	-----	85.69	33.74	13.34	35.18	1.12	100	192	Peak																																																																																																																													
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200 3400 4600 5800 7000 AVG(UNII 4) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5835.00</td><td>91.47</td><td>-----</td><td>-----</td><td>78.45</td><td>33.74</td><td>13.34</td><td>35.18</td><td>1.12</td><td>100</td><td>192</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5835.00	91.47	-----	-----	78.45	33.74	13.34	35.18	1.12	100	192	Average																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5835.00	91.47	-----	-----	78.45	33.74	13.34	35.18	1.12	100	192	Average																																																																																																																													



Mode	7	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11n HT40_CH167_5835MHz	
ANT	0	
Pol.	Horizontal	Fundamental
Peak	</	



Mode	7																																																																																																																
	Band Edge - L																																																																																																																
	U-NII-4_5.825-5.925_802.11n HT40_CH167_5835MHz																																																																																																																
ANT	0																																																																																																																
Pol.	Vertical	Fundamental																																																																																																															
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5636.58</td><td>49.30</td><td>68.20</td><td>-18.90</td><td>37.12</td><td>33.05</td><td>13.11</td><td>34.95</td><td>0.97</td><td>101 220 Peak</td></tr><tr><td>2 5658.15</td><td>48.80</td><td>68.31</td><td>-19.51</td><td>36.55</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>101 220 Peak</td></tr><tr><td>3 5700.89</td><td>52.97</td><td>105.45</td><td>-52.48</td><td>40.35</td><td>33.41</td><td>13.19</td><td>35.03</td><td>1.05</td><td>101 220 Peak</td></tr><tr><td>4 5720.36</td><td>52.15</td><td>111.62</td><td>-59.47</td><td>39.40</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>101 220 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5636.58	49.30	68.20	-18.90	37.12	33.05	13.11	34.95	0.97	101 220 Peak	2 5658.15	48.80	68.31	-19.51	36.55	33.10	13.12	34.96	0.99	101 220 Peak	3 5700.89	52.97	105.45	-52.48	40.35	33.41	13.19	35.03	1.05	101 220 Peak	4 5720.36	52.15	111.62	-59.47	39.40	33.52	13.21	35.05	1.07	101 220 Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5835.00</td><td>101.37</td><td>-----</td><td>-----</td><td>88.39</td><td>33.72</td><td>13.36</td><td>35.20</td><td>1.10</td><td>101 220 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5835.00	101.37	-----	-----	88.39	33.72	13.36	35.20	1.10	101 220 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																								
1 5636.58	49.30	68.20	-18.90	37.12	33.05	13.11	34.95	0.97	101 220 Peak																																																																																																								
2 5658.15	48.80	68.31	-19.51	36.55	33.10	13.12	34.96	0.99	101 220 Peak																																																																																																								
3 5700.89	52.97	105.45	-52.48	40.35	33.41	13.19	35.03	1.05	101 220 Peak																																																																																																								
4 5720.36	52.15	111.62	-59.47	39.40	33.52	13.21	35.05	1.07	101 220 Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1 5835.00	101.37	-----	-----	88.39	33.72	13.36	35.20	1.10	101 220 Peak																																																																																																								
Avg	Blank	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5835.00</td><td>93.78</td><td>-----</td><td>-----</td><td>80.76</td><td>33.74</td><td>13.34</td><td>35.18</td><td>1.12</td><td>101 220 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5835.00	93.78	-----	-----	80.76	33.74	13.34	35.18	1.12	101 220 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																							
1 5835.00	93.78	-----	-----	80.76	33.74	13.34	35.18	1.12	101 220 Average																																																																																																								



Mode	7										
	Band Edge - R										
	U-NII-4_5.825-5.925_802.11n HT40_CH167_5835MHz										
ANT	0										
Pol.	Vertical						Fundamental				
Peak	</										



Mode	8																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.825-5.925_802.11n HT40_CH175_5875MHz																																																																																																															
ANT	0																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																														
Peak	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5640.97</td><td>49.88</td><td>68.20 -18.32</td><td>37.63</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>100</td><td>191 Peak</td></tr><tr><td>2 5652.51</td><td>49.51</td><td>70.07 -20.56</td><td>37.24</td><td>33.12</td><td>13.13</td><td>34.97</td><td>0.99</td><td>100</td><td>191 Peak</td></tr><tr><td>3 5702.37</td><td>49.59</td><td>105.86 -56.27</td><td>36.97</td><td>33.41</td><td>13.19</td><td>35.03</td><td>1.05</td><td>100</td><td>191 Peak</td></tr><tr><td>4 5720.07</td><td>47.46</td><td>110.95 -63.49</td><td>34.71</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>100</td><td>191 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5640.97	49.88	68.20 -18.32	37.63	33.10	13.12	34.96	0.99	100	191 Peak	2 5652.51	49.51	70.07 -20.56	37.24	33.12	13.13	34.97	0.99	100	191 Peak	3 5702.37	49.59	105.86 -56.27	36.97	33.41	13.19	35.03	1.05	100	191 Peak	4 5720.07	47.46	110.95 -63.49	34.71	33.52	13.21	35.05	1.07	100	191 Peak	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5875.00</td><td>96.28</td><td>-----</td><td>83.40</td><td>33.70</td><td>13.41</td><td>35.26</td><td>1.03</td><td>100</td><td>191 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5875.00	96.28	-----	83.40	33.70	13.41	35.26	1.03	100	191 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5640.97	49.88	68.20 -18.32	37.63	33.10	13.12	34.96	0.99	100	191 Peak																																																																																																							
2 5652.51	49.51	70.07 -20.56	37.24	33.12	13.13	34.97	0.99	100	191 Peak																																																																																																							
3 5702.37	49.59	105.86 -56.27	36.97	33.41	13.19	35.03	1.05	100	191 Peak																																																																																																							
4 5720.07	47.46	110.95 -63.49	34.71	33.52	13.21	35.05	1.07	100	191 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5875.00	96.28	-----	83.40	33.70	13.41	35.26	1.03	100	191 Peak																																																																																																							
Avg	Blank	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5875.00</td><td>89.24</td><td>-----</td><td>76.33</td><td>33.70</td><td>13.40</td><td>35.24</td><td>1.05</td><td>100</td><td>191 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5875.00	89.24	-----	76.33	33.70	13.40	35.24	1.05	100	191 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1 5875.00	89.24	-----	76.33	33.70	13.40	35.24	1.05	100	191 Average																																																																																																							



Mode	8																																																										
	Band Edge - R																																																										
	U-NII-4_5.825-5.925_802.11n HT40_CH175_5875MHz																																																										
ANT	0																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	Level (dBuV/m) Date: 2026-03-01 PEAK_BE(UNII 4) Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5923.75</td><td>65.81</td><td>89.11</td><td>-23.30</td><td>53.03</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>191</td><td>Peak</td></tr><tr><td>2</td><td>5925.25</td><td>64.75</td><td>88.20</td><td>-23.45</td><td>51.97</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>191</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5923.75	65.81	89.11	-23.30	53.03	33.65	13.45	35.30	0.98	100	191	Peak	2	5925.25	64.75	88.20	-23.45	51.97	33.65	13.45	35.30	0.98	100	191	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5923.75	65.81	89.11	-23.30	53.03	33.65	13.45	35.30	0.98	100	191	Peak																																															
2	5925.25	64.75	88.20	-23.45	51.97	33.65	13.45	35.30	0.98	100	191	Peak																																															
Avg	Level (dBuV/m) Date: 2026-03-01 AVG_BE(UNII 4) Site : 03CH21-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:0.020kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5924.50</td><td>54.45</td><td>68.57</td><td>-14.12</td><td>41.67</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>191</td><td>Average</td></tr><tr><td>2</td><td>5925.00</td><td>54.06</td><td>68.20</td><td>-14.14</td><td>41.28</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>191</td><td>Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.50	54.45	68.57	-14.12	41.67	33.65	13.45	35.30	0.98	100	191	Average	2	5925.00	54.06	68.20	-14.14	41.28	33.65	13.45	35.30	0.98	100	191	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5924.50	54.45	68.57	-14.12	41.67	33.65	13.45	35.30	0.98	100	191	Average																																															
2	5925.00	54.06	68.20	-14.14	41.28	33.65	13.45	35.30	0.98	100	191	Average																																															



Mode	8																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.825-5.925_802.11n HT40_CH175_5875MHz																																																																																																																																										
ANT	0																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5625.37</td><td>49.61</td><td>68.20</td><td>-18.59</td><td>37.49</td><td>33.00</td><td>13.09</td><td>34.93</td><td>0.96</td><td>103</td><td>214</td><td>Peak</td></tr><tr><td>2</td><td>5651.92</td><td>48.59</td><td>69.63</td><td>-21.04</td><td>36.34</td><td>33.11</td><td>13.12</td><td>34.97</td><td>0.99</td><td>103</td><td>214</td><td>Peak</td></tr><tr><td>3</td><td>5700.60</td><td>51.57</td><td>105.37</td><td>-53.80</td><td>38.95</td><td>33.40</td><td>13.19</td><td>35.02</td><td>1.05</td><td>103</td><td>214</td><td>Peak</td></tr><tr><td>4</td><td>5720.95</td><td>52.99</td><td>112.97</td><td>-59.98</td><td>40.23</td><td>33.53</td><td>13.21</td><td>35.05</td><td>1.07</td><td>103</td><td>214</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5625.37	49.61	68.20	-18.59	37.49	33.00	13.09	34.93	0.96	103	214	Peak	2	5651.92	48.59	69.63	-21.04	36.34	33.11	13.12	34.97	0.99	103	214	Peak	3	5700.60	51.57	105.37	-53.80	38.95	33.40	13.19	35.02	1.05	103	214	Peak	4	5720.95	52.99	112.97	-59.98	40.23	33.53	13.21	35.05	1.07	103	214	Peak	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>100.91</td><td>-----</td><td>-----</td><td>87.98</td><td>33.70</td><td>13.38</td><td>35.22</td><td>1.07</td><td>103</td><td>214</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5875.00	100.91	-----	-----	87.98	33.70	13.38	35.22	1.07	103	214	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5625.37	49.61	68.20	-18.59	37.49	33.00	13.09	34.93	0.96	103	214	Peak																																																																																																																															
2	5651.92	48.59	69.63	-21.04	36.34	33.11	13.12	34.97	0.99	103	214	Peak																																																																																																																															
3	5700.60	51.57	105.37	-53.80	38.95	33.40	13.19	35.02	1.05	103	214	Peak																																																																																																																															
4	5720.95	52.99	112.97	-59.98	40.23	33.53	13.21	35.05	1.07	103	214	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5875.00	100.91	-----	-----	87.98	33.70	13.38	35.22	1.07	103	214	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>93.56</td><td>-----</td><td>-----</td><td>80.63</td><td>33.70</td><td>13.38</td><td>35.22</td><td>1.07</td><td>103</td><td>214</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5875.00	93.56	-----	-----	80.63	33.70	13.38	35.22	1.07	103	214	Average																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5875.00	93.56	-----	-----	80.63	33.70	13.38	35.22	1.07	103	214	Average																																																																																																																															



Mode	8	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11n HT40_CH175_5875MHz	
ANT	0	
Pol.	Vertical	Fundamental
Peak	</	



Mode	9																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.825-5.925_802.11ac VHT80_CH171_5855MHz																																																																																																																																								
ANT	0																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5640.12</td><td>52.35</td><td>68.20</td><td>-15.85</td><td>40.15</td><td>33.06</td><td>13.11</td><td>34.95</td><td>0.98</td><td>103</td><td>187</td><td>Peak</td></tr><tr><td>2</td><td>5650.45</td><td>50.10</td><td>68.53</td><td>-18.43</td><td>37.85</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>103</td><td>187</td><td>Peak</td></tr><tr><td>3</td><td>5701.19</td><td>53.95</td><td>105.53</td><td>-51.58</td><td>41.33</td><td>33.41</td><td>13.19</td><td>35.03</td><td>1.05</td><td>103</td><td>187</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>54.51</td><td>110.95</td><td>-56.44</td><td>41.76</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>103</td><td>187</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5640.12	52.35	68.20	-15.85	40.15	33.06	13.11	34.95	0.98	103	187	Peak	2	5650.45	50.10	68.53	-18.43	37.85	33.10	13.12	34.96	0.99	103	187	Peak	3	5701.19	53.95	105.53	-51.58	41.33	33.41	13.19	35.03	1.05	103	187	Peak	4	5720.07	54.51	110.95	-56.44	41.76	33.52	13.21	35.05	1.07	103	187	Peak	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>95.10</td><td>-----</td><td>-----</td><td>82.14</td><td>33.70</td><td>13.37</td><td>35.20</td><td>1.09</td><td>103</td><td>187</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5855.00	95.10	-----	-----	82.14	33.70	13.37	35.20	1.09	103	187	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5640.12	52.35	68.20	-15.85	40.15	33.06	13.11	34.95	0.98	103	187	Peak																																																																																																																													
2	5650.45	50.10	68.53	-18.43	37.85	33.10	13.12	34.96	0.99	103	187	Peak																																																																																																																													
3	5701.19	53.95	105.53	-51.58	41.33	33.41	13.19	35.03	1.05	103	187	Peak																																																																																																																													
4	5720.07	54.51	110.95	-56.44	41.76	33.52	13.21	35.05	1.07	103	187	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5855.00	95.10	-----	-----	82.14	33.70	13.37	35.20	1.09	103	187	Peak																																																																																																																													
Avg	Blank						Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:0.910kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>87.68</td><td>-----</td><td>-----</td><td>74.72</td><td>33.70</td><td>13.37</td><td>35.20</td><td>1.09</td><td>103</td><td>187</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5855.00	87.68	-----	-----	74.72	33.70	13.37	35.20	1.09	103	187	Average																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5855.00	87.68	-----	-----	74.72	33.70	13.37	35.20	1.09	103	187	Average																																																																																																																													





Mode	9	
	Band Edge - R	
	U-NII-4_5.825-5.925_802.11ac VHT80_CH171_5855MHz	
ANT	0	
Pol.	Horizontal	Fundamental
Peak	</	



Mode	9																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.825-5.925_802.11ac_VHT80_CH171_5855MHz																																																																																																																																										
ANT	0																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5643.37</td><td>51.65</td><td>68.20</td><td>-16.55</td><td>39.44</td><td>33.07</td><td>13.11</td><td>34.95</td><td>0.98</td><td>107</td><td>227</td><td>Peak</td></tr><tr><td>2</td><td>5650.45</td><td>50.54</td><td>68.53</td><td>-17.99</td><td>38.29</td><td>33.10</td><td>13.12</td><td>34.96</td><td>0.99</td><td>107</td><td>227</td><td>Peak</td></tr><tr><td>3</td><td>5701.78</td><td>54.66</td><td>105.70</td><td>-51.04</td><td>42.04</td><td>33.41</td><td>13.19</td><td>35.03</td><td>1.05</td><td>107</td><td>227</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>56.31</td><td>110.95</td><td>-54.64</td><td>43.56</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>107</td><td>227</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5643.37	51.65	68.20	-16.55	39.44	33.07	13.11	34.95	0.98	107	227	Peak	2	5650.45	50.54	68.53	-17.99	38.29	33.10	13.12	34.96	0.99	107	227	Peak	3	5701.78	54.66	105.70	-51.04	42.04	33.41	13.19	35.03	1.05	107	227	Peak	4	5720.07	56.31	110.95	-54.64	43.56	33.52	13.21	35.05	1.07	107	227	Peak	Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>90.11</td><td>-----</td><td>-----</td><td>85.15</td><td>33.70</td><td>13.37</td><td>35.20</td><td>1.09</td><td>107</td><td>227</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	90.11	-----	-----	85.15	33.70	13.37	35.20	1.09	107	227	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5643.37	51.65	68.20	-16.55	39.44	33.07	13.11	34.95	0.98	107	227	Peak																																																																																																																															
2	5650.45	50.54	68.53	-17.99	38.29	33.10	13.12	34.96	0.99	107	227	Peak																																																																																																																															
3	5701.78	54.66	105.70	-51.04	42.04	33.41	13.19	35.03	1.05	107	227	Peak																																																																																																																															
4	5720.07	56.31	110.95	-54.64	43.56	33.52	13.21	35.05	1.07	107	227	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5855.00	90.11	-----	-----	85.15	33.70	13.37	35.20	1.09	107	227	Peak																																																																																																																															
Avg	Blank						Level (dBuV/m) Date: 2026-03-01 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL : RBW:1000.000kHz VBW:0.910kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>90.52</td><td>-----</td><td>-----</td><td>77.54</td><td>33.72</td><td>13.36</td><td>35.20</td><td>1.10</td><td>107</td><td>227</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	90.52	-----	-----	77.54	33.72	13.36	35.20	1.10	107	227	Average																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																	
1	5855.00	90.52	-----	-----	77.54	33.72	13.36	35.20	1.10	107	227	Average																																																																																																																															

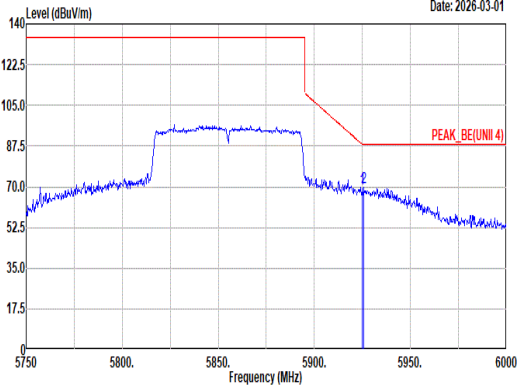
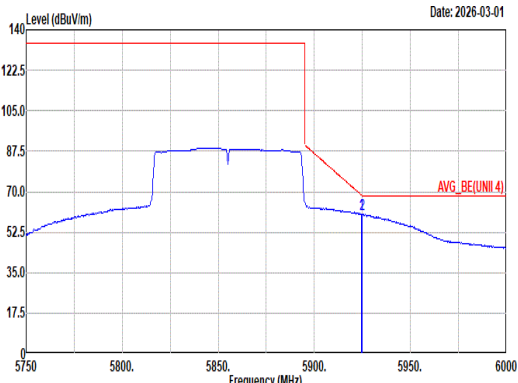


Mode	9																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.825-5.925_802.11ac VHT80_CH171_5855MHz																																																																			
ANT	0																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	Level (dBuV/m) Date: 2026-03-01  Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5925.00</td><td>69.25</td><td>88.20</td><td>-18.95</td><td>56.47</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>107</td><td>227</td><td>Peak</td></tr><tr><td>2</td><td>5925.75</td><td>69.72</td><td>88.20</td><td>-18.48</td><td>56.94</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>107</td><td>227</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5925.00	69.25	88.20	-18.95	56.47	33.65	13.45	35.30	0.98	107	227	Peak	2	5925.75	69.72	88.20	-18.48	56.94	33.65	13.45	35.30	0.98	107	227	Peak	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																											
1	5925.00	69.25	88.20	-18.95	56.47	33.65	13.45	35.30	0.98	107	227	Peak																																																								
2	5925.75	69.72	88.20	-18.48	56.94	33.65	13.45	35.30	0.98	107	227	Peak																																																								
Avg	Level (dBuV/m) Date: 2026-03-01  Site : 03CH21-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:0.910kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5924.50</td><td>60.14</td><td>68.57</td><td>-8.43</td><td>47.36</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>107</td><td>227</td><td>Average</td></tr><tr><td>2</td><td>5925.00</td><td>60.12</td><td>68.20</td><td>-8.08</td><td>47.34</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>107</td><td>227</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5924.50	60.14	68.57	-8.43	47.36	33.65	13.45	35.30	0.98	107	227	Average	2	5925.00	60.12	68.20	-8.08	47.34	33.65	13.45	35.30	0.98	107	227	Average	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																											
1	5924.50	60.14	68.57	-8.43	47.36	33.65	13.45	35.30	0.98	107	227	Average																																																								
2	5925.00	60.12	68.20	-8.08	47.34	33.65	13.45	35.30	0.98	107	227	Average																																																								



Mode	10																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.825-5.925_802.11ax HE20_CH169_Full RU_5845MHz																																																																																																																																								
ANT	0																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5646.32</td><td>49.75</td><td>68.20</td><td>-18.45</td><td>37.52</td><td>33.09</td><td>13.12</td><td>34.96</td><td>0.98</td><td>101</td><td>181</td><td>Peak</td></tr><tr><td>2</td><td>5651.04</td><td>48.14</td><td>68.97</td><td>-20.83</td><td>35.88</td><td>33.11</td><td>13.12</td><td>34.96</td><td>0.99</td><td>101</td><td>181</td><td>Peak</td></tr><tr><td>3</td><td>5701.78</td><td>48.48</td><td>105.70</td><td>-57.22</td><td>35.06</td><td>33.41</td><td>13.19</td><td>35.03</td><td>1.05</td><td>101</td><td>181</td><td>Peak</td></tr><tr><td>4</td><td>5728.07</td><td>47.42</td><td>110.95</td><td>-63.53</td><td>34.67</td><td>33.52</td><td>13.21</td><td>35.05</td><td>1.07</td><td>101</td><td>181</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5646.32	49.75	68.20	-18.45	37.52	33.09	13.12	34.96	0.98	101	181	Peak	2	5651.04	48.14	68.97	-20.83	35.88	33.11	13.12	34.96	0.99	101	181	Peak	3	5701.78	48.48	105.70	-57.22	35.06	33.41	13.19	35.03	1.05	101	181	Peak	4	5728.07	47.42	110.95	-63.53	34.67	33.52	13.21	35.05	1.07	101	181	Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>100.57</td><td>-----</td><td>-----</td><td>87.59</td><td>33.72</td><td>13.36</td><td>35.20</td><td>1.10</td><td>101</td><td>181</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5845.00	100.57	-----	-----	87.59	33.72	13.36	35.20	1.10	101	181	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5646.32	49.75	68.20	-18.45	37.52	33.09	13.12	34.96	0.98	101	181	Peak																																																																																																																													
2	5651.04	48.14	68.97	-20.83	35.88	33.11	13.12	34.96	0.99	101	181	Peak																																																																																																																													
3	5701.78	48.48	105.70	-57.22	35.06	33.41	13.19	35.03	1.05	101	181	Peak																																																																																																																													
4	5728.07	47.42	110.95	-63.53	34.67	33.52	13.21	35.05	1.07	101	181	Peak																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	100.57	-----	-----	87.59	33.72	13.36	35.20	1.10	101	181	Peak																																																																																																																													
Avg	Blank						Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>93.22</td><td>-----</td><td>-----</td><td>80.22</td><td>33.73</td><td>13.35</td><td>35.19</td><td>1.11</td><td>101</td><td>181</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5845.00	93.22	-----	-----	80.22	33.73	13.35	35.19	1.11	101	181	Average																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																																
1	5845.00	93.22	-----	-----	80.22	33.73	13.35	35.19	1.11	101	181	Average																																																																																																																													

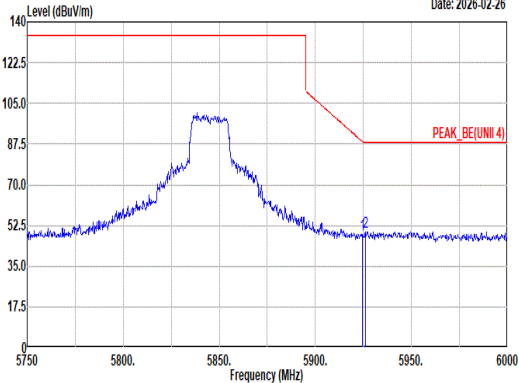
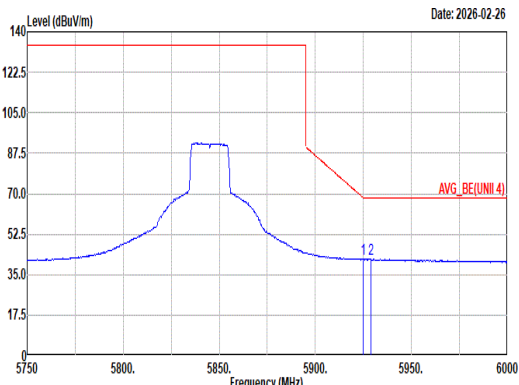


Mode	10																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.825-5.925_802.11ax HE20_CH169_Full RU_5845MHz																																																																				
ANT	0																																																																				
Pol.	Horizontal						Fundamental																																																														
Peak	Level (dBuV/m) Date: 2026-02-26  Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.50</td><td>48.84</td><td>88.57</td><td>-39.73</td><td>36.06</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>101</td><td>181</td><td>Peak</td></tr><tr><td>2</td><td>5926.00</td><td>49.83</td><td>88.20</td><td>-38.37</td><td>37.05</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>101</td><td>181</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.50	48.84	88.57	-39.73	36.06	33.65	13.45	35.30	0.98	101	181	Peak	2	5926.00	49.83	88.20	-38.37	37.05	33.65	13.45	35.30	0.98	101	181	Peak	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	5924.50	48.84	88.57	-39.73	36.06	33.65	13.45	35.30	0.98	101	181	Peak																																																									
2	5926.00	49.83	88.20	-38.37	37.05	33.65	13.45	35.30	0.98	101	181	Peak																																																									
Avg	Level (dBuV/m) Date: 2026-02-26  Site : 03CH21-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>41.65</td><td>68.20</td><td>-26.55</td><td>28.87</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>101</td><td>181</td><td>Average</td></tr><tr><td>2</td><td>5928.75</td><td>41.85</td><td>68.20</td><td>-26.35</td><td>29.08</td><td>33.64</td><td>13.46</td><td>35.30</td><td>0.97</td><td>101</td><td>181</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5925.00	41.65	68.20	-26.55	28.87	33.65	13.45	35.30	0.98	101	181	Average	2	5928.75	41.85	68.20	-26.35	29.08	33.64	13.46	35.30	0.97	101	181	Average	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																											
1	5925.00	41.65	68.20	-26.55	28.87	33.65	13.45	35.30	0.98	101	181	Average																																																									
2	5928.75	41.85	68.20	-26.35	29.08	33.64	13.46	35.30	0.97	101	181	Average																																																									



Mode	10									
	Band Edge - L									
	U-NII-4_5.825-5.925_802.11ax HE20_CH169_Full RU_5845MHz									
ANT	0									
Pol.	Vertical					Fundamental				
Peak	Level (dBuV/m) Date: 2026-02-26									

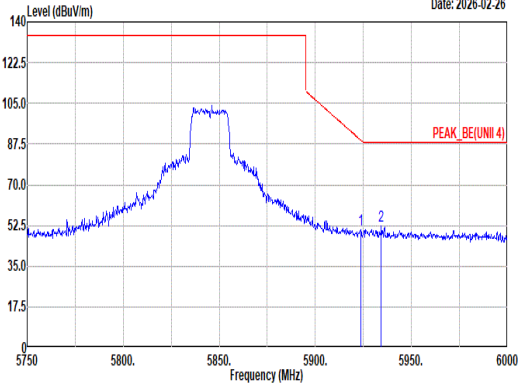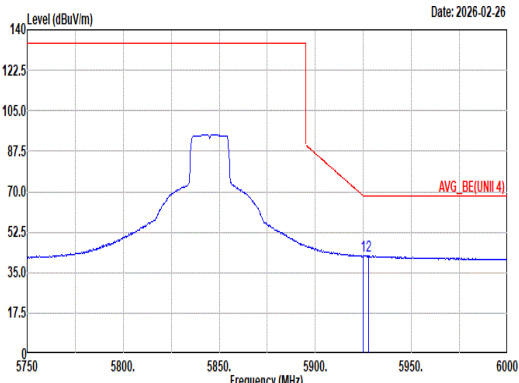

Mode	10																																																								
	Band Edge - R																																																								
	U-NII-4_5.825-5.925_802.11ax HE20_CH169_Full RU_5845MHz																																																								
ANT	0																																																								
Pol.	Vertical	Fundamental																																																							
Peak	Level (dBuV/m) Date: 2026-02-26  PEAK_BE(UNII 4) Site : 03CH21-HY Condition: PEAK_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5923.50</td><td>50.52</td><td>89.30</td><td>-38.78</td><td>37.74</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>224 Peak</td></tr><tr><td>2</td><td>5934.25</td><td>52.26</td><td>88.20</td><td>-35.94</td><td>39.51</td><td>33.63</td><td>13.46</td><td>35.31</td><td>0.97</td><td>100</td><td>224 Peak</td></tr></tbody></table> <td>Blank</td>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5923.50	50.52	89.30	-38.78	37.74	33.65	13.45	35.30	0.98	100	224 Peak	2	5934.25	52.26	88.20	-35.94	39.51	33.63	13.46	35.31	0.97	100	224 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	5923.50	50.52	89.30	-38.78	37.74	33.65	13.45	35.30	0.98	100	224 Peak																																														
2	5934.25	52.26	88.20	-35.94	39.51	33.63	13.46	35.31	0.97	100	224 Peak																																														
Avg	Level (dBuV/m) Date: 2026-02-26  AVG_BE(UNII 4) Site : 03CH21-HY Condition: AVG_BE(UNII 4) 3m DRH18-E_LE2C03A18EN_250007 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>42.20</td><td>68.20</td><td>-26.00</td><td>29.42</td><td>33.65</td><td>13.45</td><td>35.30</td><td>0.98</td><td>100</td><td>224 Average</td></tr><tr><td>2</td><td>5927.75</td><td>42.35</td><td>68.20</td><td>-25.85</td><td>29.58</td><td>33.64</td><td>13.46</td><td>35.30</td><td>0.97</td><td>100</td><td>224 Average</td></tr></tbody></table> <td>Blank</td>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5925.00	42.20	68.20	-26.00	29.42	33.65	13.45	35.30	0.98	100	224 Average	2	5927.75	42.35	68.20	-25.85	29.58	33.64	13.46	35.30	0.97	100	224 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	5925.00	42.20	68.20	-26.00	29.42	33.65	13.45	35.30	0.98	100	224 Average																																														
2	5927.75	42.35	68.20	-25.85	29.58	33.64	13.46	35.30	0.97	100	224 Average																																														



Mode	10																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-4_5.825-5.925_802.11ax HE20_CH169_Full RU_5845MHz																																																																																																																									
ANT	0																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11690.00</td><td>51.12</td><td>74.00</td><td>-22.88</td><td>32.53</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Peak</td></tr><tr><td>2 11690.00</td><td>41.59</td><td>54.00</td><td>-12.41</td><td>23.00</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Average</td></tr><tr><td>3 17535.00</td><td>53.81</td><td>68.20</td><td>-14.39</td><td>35.53</td><td>39.83</td><td>23.85</td><td>47.85</td><td>2.45</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11690.00	51.12	74.00	-22.88	32.53	38.40	19.18	41.00	2.01	-- -- Peak	2 11690.00	41.59	54.00	-12.41	23.00	38.40	19.18	41.00	2.01	-- -- Average	3 17535.00	53.81	68.20	-14.39	35.53	39.83	23.85	47.85	2.45	-- -- Peak	Level (dBuV/m) Date: 2026-02-26 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 11690.00</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>32.13</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Peak</td></tr><tr><td>2 11690.00</td><td>41.54</td><td>54.00</td><td>-12.46</td><td>22.95</td><td>38.40</td><td>19.18</td><td>41.00</td><td>2.01</td><td>-- -- Average</td></tr><tr><td>3 17535.00</td><td>53.28</td><td>68.20</td><td>-14.92</td><td>35.00</td><td>39.83</td><td>23.85</td><td>47.85</td><td>2.45</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 11690.00	50.72	74.00	-23.28	32.13	38.40	19.18	41.00	2.01	-- -- Peak	2 11690.00	41.54	54.00	-12.46	22.95	38.40	19.18	41.00	2.01	-- -- Average	3 17535.00	53.28	68.20	-14.92	35.00	39.83	23.85	47.85	2.45	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11690.00	51.12	74.00	-22.88	32.53	38.40	19.18	41.00	2.01	-- -- Peak																																																																																																																	
2 11690.00	41.59	54.00	-12.41	23.00	38.40	19.18	41.00	2.01	-- -- Average																																																																																																																	
3 17535.00	53.81	68.20	-14.39	35.53	39.83	23.85	47.85	2.45	-- -- Peak																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 11690.00	50.72	74.00	-23.28	32.13	38.40	19.18	41.00	2.01	-- -- Peak																																																																																																																	
2 11690.00	41.54	54.00	-12.46	22.95	38.40	19.18	41.00	2.01	-- -- Average																																																																																																																	
3 17535.00	53.28	68.20	-14.92	35.00	39.83	23.85	47.85	2.45	-- -- Peak																																																																																																																	



Mode	10	
	Harmonic	
	U-NII-4_5.825-5.925_802.11ax HE20_CH169_Full RU_5845MHz	
ANT	0	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 HORIZONTAL	Level (dBuV/m) Date: 2026-02-26 AVG(UNII 4) Site : 03CH21-HY Condition: AVG(UNII 4) 3m DRH18-E_LE2C03A18EN_250807 VERTICAL