

승 인 원

품 명	TM-BLOCK
규 격	TCMN0682PA20A
제조사규격	TCMN0682PA20A
CODE NO.	
적 용 기 종	
특 기 사 항	

검 토	심 사	승 인
승인유효기간	승인일로 부터	년

신청회사명	삼성전기(주)	TEL	031-210-6026
주 소	수원시 팔달구 매탄동 314번지		

T O : SEC

DATE : 14.AUG.2003


S P E C I F I C A T I O N

T M B L O C K

(RF-MOD + TUNER + PIF)

T C M N 0 6 8 2 P A 2 0 A

(NTSC M / USA)

WRITTEN	CHECKED	APPROVED
		

SAMSUNG ELECTRO-MECHANICS CO ., LTD.

MAIN FACTORY

ADD : 314, MAETAN-DONG, PALDAL-KU, SUWON-CITY, KYUNGKI-DO, KOREA

TEL : (031)210-6860,6026,3214 FAX : (031)210-6380

THAILAND FACTORY

ADD : WELLGROW INDUSTRIAL ESTATE 93 M005 T. BANGSMARK A.BANGPAKONG
CHACHENGSAO 24130 THAILAND

TEL : (65)(038)570-191~2 FAX : (65)(038)570-193

I N D E X

Item NO.	ITEM	Page
1. General Specification	Application	2
	Receiving channels	2
	Intermediate frequency	2
	Receiving system	2
	Output channel of modulation	2
	Operating conditions for guarantee	2
	Storage condition	2
	Testing ambient condition	2
	Terminal names and functions	3
	Semiconductor used	4
	Current consumption & supply voltage	4
	PLL data format	4 ~ 6
2. Electrical characteristics	RF section	7 ~ 9
	(Video, Sound, Output, ANT.charateristic)	
	Tuner section	10~12
3. Environment test	IF section	13~16
	Heat load test	17
	Humidity load test	17
	Cold test	17
	Vibration test	17
	Operating life test	18
	Impact test	18
4. Mechanical Characteristics	Static electricity test	18
	Outdrawing diagram	19
5. Circuit view	Circuit diagram	20

1. GENERAL SPECIFICATION

1) APPLICATION

This specification is applied to the VCR receiving the US 181 channel system VHF and UHF bands. (RF modulator output channel is 3 or 4 CH.)

2) RECEIVING CHANNELS

- * M NTSC / USA
- * UHF : CH. W+12 - CH. 69
- * VHF HIGH BAND : CH. C - CH. W+11
- * VHF LOW BAND : CH. 2 - CH. B

3) INTERMEDIATE FREQUENCY

- * PIF : 45.75MHz
- * SIF : 41.25MHz

4) RECEIVING SYSTEM

- * UPPER HETERODYNE SYSTEM

5) OUTPUT CHANNEL OF MODULATION

- * 3 CH. : OPEN (61.25MHz)
- * 4 CH. : GND (67.25MHz) By controlled PIN NO.2 (CH)

6) OPERATING CONDITIONS FOR GUARANTEE

- * TEMPERATURE : -10 ~ 60℃ , HUMIDITY 85% OR LESS

7) STORAGE CONDITION

- * TEMPERATURE : - 20 ~ 70℃ , HUMIDITY 90% OR LESS

8) TESTING AMBIENT CONDITION

- * DEFINED AS TEMPERATURE OF $25 \pm 5^{\circ}\text{C}$ AND HUMIDITY OF $65 \pm 10\% \text{ RH}$

9) REGULATION

- * TCMN0682PA20A IS APPLIED FOR FCC REGULATION.

10) TERMINAL NAMES AND FUNCTIONS

ITEM	PIN NO.	TERMINAL	FUNCTION	REMARK
R F SECTION		RF INPUT	RF SIGNAL INPUT TERMINAL	
		RF OUTPUT	RF SIGNAL OUTPUT TERMINAL	
	1	A I	AUDIO INPUT	
	2	C H	CHANNEL CONTROL (OPEN:3CH, GND:4CH)	
	3	B +	POWER SUPPLY TERMINAL	5V DC
	4	CONTROL	VIDEO /TV CONTROL TERMINAL	
	5	V I	VIDEO SIGNAL INPUT	
TUNER / PIF SECTION	6	N.C	—	
	7	X-TAL	CRYSTAL INPUT TERMINAL	
	8	SAS	SERIAL ADDRESS TERMINAL	
	9	SCL	SERIAL CLOCK SUPPLY TERMINAL	
	10	SDA	SERIAL DATA SUPPLY TERMINAL	
	11	AFT	AFT OUTPUT TERMINAL	
	12	A0	AUDIO OUTPUT TERMINAL	
	13	SIF	SIF OUTPUT TERMINAL	
	14	BT	TUNING VOLTAGE POWER SUPPLY TERMINAL	33V DC
	15	N.C	—	
	16	V0	VIDEO OUTPUT TERMINAL	

S P E C I F I C A T I O N

PAGE

T M - B L O C K

4 / 20

11) SEMICONDUCTOR USED

ITEM	FUNCTION		Q'TY	NAME OF SEMICONDUCTOR	REMARK
R F SECTION	I C		1	LA77000	
	S/W TRANSISTOR		2	BF799W OR EQUIVALENT DEVICE	
	S/W DIODE		1	KDS114E	
TUNER SECTION	MOPLL IC		1	TDA6503ATS	
	VVC DIODE		11	BB153,BB149(BB178, BB179)	
	RF AMP	VHF	1	BF909WR	
		UHF	1	BF909WR OR BF2030WR	
PIF SECTION	I C		1	LA75676V	
	FILTER	SAW-FILTER	1	M1867M	
		C - TRAP	1	TPS4.5MB, XT4.5MB	
		C - FILTER	1	SFSH4.5MDB, LT4.5MH	

12) CURRENT CONSUMPTION & SUPPLY VOLTAGE

TERMINAL		STANDARD SUPPLY VOLTAGE(V)	CURRENT CONSUMPTION(mA)			GURANTEE VOL.RATINS
			MIN.	TYP.	MAX.	
MOD.	MB	5 ± 0.1V DC	-	50	55	4.9 ~ 5.1 V
	CON.	5 ± 0.1V DC	-	0.047	0.173	4.9 ~ 5.1 V
TUNER AND PIF	BT	33 ± 0.1V DC	-	2.5	5	30 ~ 34 V
	BP	5V ± 0.1V DC	115	140	165	4.9 ~ 5.1 V

13) PLL DATA FORMAT

13-1) Description of Tuner PLL Block

The PLL on this IC supports the IIC bus control format.
 The control pins are as shown in the table below.
 ref) ADSW(Address selection), SCL(SCL input), SDA(SDA I/O)

SAMSUNG ELECTRO - MECHANICS CO.,LTD.

13-2) INPUT SIGNAL LEVEL(SCL,SDA)

HIGH -LEVEL INPUT VOLTAGE : 3.0V MIN.

LOW -LEVEL INPUT VOLTAGE : 1.5V MAX.

13-3) X-TAL FREQUENCY : 3.58MHz (from SET)

STEP SIZE IS CHANGED BY REFERENCE DIVIDER.

13-4) Address Setting

The response address can be changed according to the ADSW pin voltage, so that multiple PLL can exist within one system.

ADSW pin voltage	MA1	MA0
0 to 0.1Vcc	0	0
Open or 0.2Vcc to 0.3Vcc	0	1
0.4Vcc to 0.6Vcc	1	0
0.9Vcc to Vcc	1	1

HEXA MODE = C2

13-5) The TDA6503ATS control format is as follows

13-5-1) Write-mode

Byte Write Data	Byte	Bits								Remarks
		MSB							LSB	
Address byte	ADB	1	1	0	0	0	MA1	MA0	0	A
Divider byte 1	DB1	0	N14	N13	N12	N11	N10	N9	N8	A
Divider byte 2	DB2	N7	N6	N5	N4	N3	N2	N1	N0	A
Control byte	CB	1	0(CP)	0	0	0	0(RSA)	1(RSB)	0(OS)	A
band SW byte	BB	X	X	X	X	PUHF	X	PVHFH	PVHFL	A

13-5-2) Read-mode : Slave Transmitter

Mode	bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0	
Address byte	1	1	0	0	0	MA1	MA0	1	A
Status byte	POR	FL	R	1	1	A2	A1	A0	A

13-5-3) Description of symbols used in table

SYMBOL	DESCRIPTION			
A	Acknowledge bit			
MA1,MA0	programmable address bits (MA1=0 ,MA0=1) ref: 13-4)			
N14 to N0	programmable divider bits			
CP	charge pump current bit(output current) logic 0 : charge pump current is 60μA(default) logic 1 : charge pump current is 280μA			
OS	tuning amplifier control bits logic 0:tuning voltage is 'on' (during normal operating) logic 1:tuning voltage is 'off';high impedance output of pin VT(at power-on)			
PVHFL,PVHFH,PUHF and FMST	PMOS ports control bis: logic 0 : corresponding buffer is 'off' logic 1 : corresponding buffer is 'on'			
X	don't care : may be a logic 0 or a logic 1.			
RSA and RSB	Reference Divider ratio select bits			
	RSA	RSB	Divider	FREQUENCY STEP(KHz)
	X	0	80	50
	0	1	128(1024)	31.25
	1	1	64	62.5
POR	power-on reset flag: logic 0 : after an end-of-data detected b the device. logic 1 : at power on			
FL	in-lock flag : logic 0 : loop is not locked logic 1 : loop is locked			
R	ready flag: logic 0 : mode after power-on reset and the PLL is locked logic 1 : in other conditions			
A2,A1 and A0	digital output of the 5-level ADC			

S P E C I F I C A T I O N

PAGE

T M - B L O C K

7 / 20

2.ELECTRICAL CHARACTERISTICS

2-1.RF SECTION PERFORMANCE

2-1-1.VIDEO CHARACTERISTICS

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Video Modulation	72	80	88	%	Input signal:1Vp-p white stair step or ramp
Video Maximum Modulation	87	93	99	%	Input signal:1.5Vp-p stair step or ramp
V/S Ratio	10:3.8	10:4	10:4.1		Input signal:1Vp-p white V:S = 10:4
Video Amplitude Frequency Characteristics	-3.0	-0.5	+3.0	dB	Measure range:0.1MHz~4.2MHz Based on 1MHz Audio input signal:None
Differential Gain(DG)	-7	+2	+7	%	Input signal:1.0Vp-p stair step Video Mod. : 80% Luminance :10~90%
Differential Phase(DP)	-7	+1.5	+7	deg	Input signal:1.0Vp-p stair step Video Mod. : 80% Luminance :10~90%
Video S/N	45	47	-	dB	Measurement Conditions -Standard De-modulator. -S/N Meter H.P.F:100KHz, L.P.F:4.2MHz SC trap:ON, Weight:OFF *Input signal Video:100% White signal Audio:None Video band:0.1~4.2MHz
Chroma Beat	58	65		dB	Input signal Video:0.4Vp-p,3.58MHz, Sine wave Audio:None

2-1-2. SOUND CHARACTERISTICS

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Audio Modulation	64	80	96	%	Input signal:1.1Vp-p Sine wave 1KHz (100% Mod.=±25KHzp-p dev.)
Audio Maximum Modulation	150				Input signal : 1KHz, Sine wave
Audio Amplitude Frequency Characteristics	-3	+1.0	+3	dB	Input signal:1.1Vp-p Sine wave Measure range:50Hz~10KHz Based on 1KHz
Audio Distortion		0.3	2.0	%	Input signal: 1.1Vp-p,1KHz De-emphasis :0N(75usec)
Audio S/N	48	-	-	dB	Video input signal :Black burst Reference audio input signal :1.1Vp-p,1KHz,Sine wave

2-1-3. OUTPUT CHARACTERISTICS

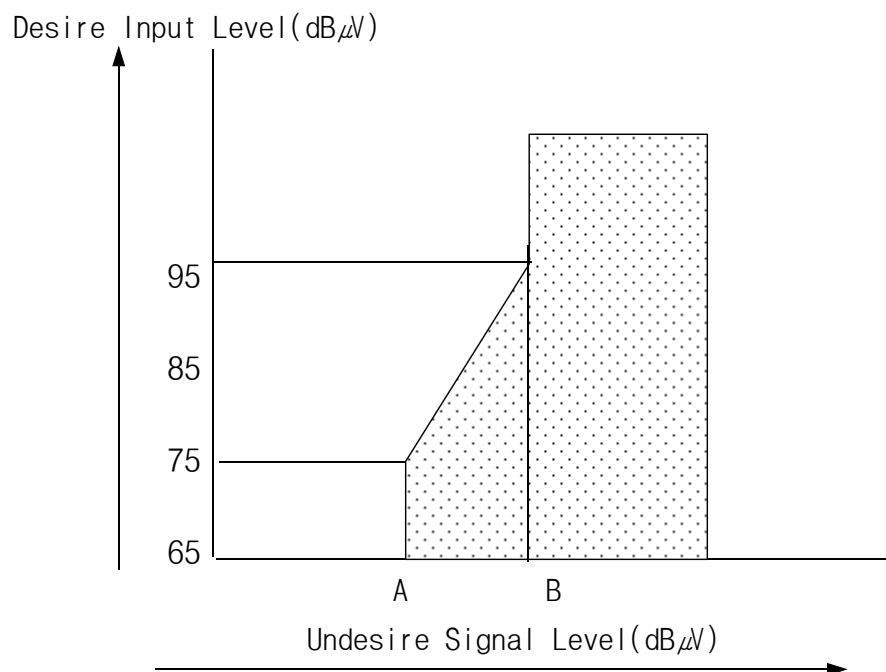
ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Video Carrier	-80	Fp	+80	KHz	Video input signal:None
Sound Carrier	-7	Fs	+7	KHz	Audio input signal:None
Outband spurious	30	-		dB	FCC Standard Precedure Measure range:0~1GHz
Inband spurious	60	-	-	dB	Input signal Video:None Audio:None Measure range:Fp ~ +4.5MHz
Video Carrier Output Level	63	66	69	dB μ V	
P/S Ratio	13	16	19	dB	Audio input signal:None

2-1-4. ANTENNA CHARACTERISTICS

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Insertion Loss	-	-	7.0	dB	ANT IN to ANT OUT Mode:TV (at MOD. OFF)
VSWR			3		ANT OUT Terminal Mode:TV (at MOD. OFF) 54~810MHz Mode:VCR(at MOD. ON) 61~ 72MHz
Isolation	60	-	-	dB	Isolation from ANT OUT to ANT IN:Mode-VCR(at MOD. ON) 61~72MHz
ANT. IN Leakage		6	9.5	dB μ V	Mode:VCR (at MOD. ON) 0~1GHz ANTENA-OUT 75 Ω Loaded Applied for FCC

2-2. TUNER SECTION

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
IF Rejection					
UHF	60	90	—	dB	GR = 0dB (75Ω terminate) GR:Gain Reduction
VHF High	60	90	—		
VHF Low	50	80	—		
UHF	40	65	—		
VHF High	50	75	—		
VHF Low	45	70	—		
Image Rejection					
UHF	50	60	—		GR = 0dB (75Ω terminate) GR:Gain Reduction
VHF W+11~J	50	65	—		
13~2	55	65	—		
UHF	40	55	—		
VHF W+11~J	45	60	—		
13~2	50	65	—		
CH 6 Beat	50			dB	ANT INPUT Des:60dB(μV), (75Ω terminate) Und:54dB(μV), (75Ω terminate)
CH A-5 Beat	50			dB	ANT INPUT Des:54dB(μV), (75Ω terminate)
CB Rejection	0.535MHz ~ 30MHz -7dBm Min.				Desire:55.25MHz~83.25MHz (CH2 ~ CH6) -66dBm s/i=40dB
Available Input signal level	90	100		dB μV	Distortion is nothing on normal condition.

1% Cross
Modulation

CH	A (dB μ V)	B (dB μ V)
UHF	≥ 64	≥ 84
VHF	≥ 64	≥ 84

Cross modulation value should be within hatched area.

A = GR = 0dB

B = GR = 30dB

※ Tuner should be measured for 1% cross modulation with ± 2 channel undesired signal.

Over Range

CH	OSC Fre.	MIN.	TYP.	MAX.	UNIT	
UHF	High-end	+1			MHz	
	Low -end	-2				
V High	High-end	+1				
	Low -end	-2				
V Low	High-end	+2				
	Low -end	-2				

S P E C I F I C A T I O N

PAGE

T M - B L O C K

12 / 20

Noise Figure	CH	MIN.	TYP.	MAX.	UNIT
	VHF			12.5	dB
	CATV			12.5	
	UHF			14	
Lock-up time (Tuning searching time)		Band low ch.<->high ch.		UNIT	REMARK
	VHF	100(typ.)		ms	CP = 0 (Charge pump current=±50μA)
	CATV	100(typ.)			
	UHF	100(typ.)			
ANT Local Radiation	Applied for FCC			When Tuner will be mounted in standard set box,field strength local oscillator should be measured. (Measurement distance:3m)	
Accuracy of Oscillator	MIN.	TYP.	MAX.	UNIT	
	-80		+80	KHz	

S P E C I F I C A T I O N

PAGE

T M - B L O C K

13/ 20

2-3. IF SECTION

When test the electrical characteristics, Fp input level is 70dB μ V,
P/S=-7dB, unless otherwise specified.

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Video S/N					100% white signal. 87.5% modulation. Subcarrier trap:0N HPF:100KHz, LPF:4.2MHz ANT input level VHF:70dB μ V, UHF:70dB μ V (75 Ω terminate)
VHF	45	47		dB	
UHF	45	47			
Video Noise Limit Sensitivity					100% white signal. 87.5% modulation. Subcarrier trap:0N HPF:100KHz, LPF:4.2MHz Video S/N=20dB
VHF			38	dB μ V	
UHF			38		
Video Output Level	0.8	1.0	1.2	Vp-p	Standard color bar:87.5% mod.
Sync Ratio	23.6	28	33.6	%	Standard color bar:87.5% mod. V+S=100%
Color Burst Level	200	250	300	mVp-p	Input Level : 70dB μ V Standard color bar:87.5% mod.

S P E C I F I C A T I O N

PAGE

T M - B L O C K

14 / 20

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Video Amplitude Frequency Characteristics					Multi-burst Signal:87.5% mod. 0.5MHz Reference
1.0 MHz	-3	-1	1	dB	
2.0 MHz	-3	-1	1		
3.0 MHz	-4	-1	2		
3.58MHz	-4	-2	0		
Sin ² 2T Pulse Response	80	90		%	Sin ² 2T Pulse & bar:87.5% mod.
Differential Gain		5	8	%	5 stair step:87.5% mod. Set modulation at the peak of 5th chroma signal.
Differential Phase		5	8	deg	5 stair step:87.5% mod. Set modulation at the peak of 5th chroma signal.
Y/C Delay time	-200	-50	100	nsec	Input Sin ² 2T Pulse & Bar. Use VM700A(Tektronix)
Chroma S/N					100% Chroma signal(RED) 87.5% modulation. Subcarrier trap:OFF HPF:100Hz, LPF:500KHz Ant input level VHF:70dB μ V, UHF:70dB μ V (75 Ω terminate)
AM	49	52		dB	
PM	48	51			
Audio Output Level	200	300	400	mV rms	1KHz/ $\pm$ 15KHz Dev.(60%) Standard color bar:87.5% mod. De-emphasis:0N (ref: figure A of page 16)
Audio Distortion [CH:11]		0.8	3	%	1KHz/ $\pm$ 25KHz Dev.(100%) Standard color bar:87.5% mod. De-emphasis:0N (ref: figure A of page 16)

SAMSUNG ELECTRO - MECHANICS CO.,LTD.

S P E C I F I C A T I O N

PAGE

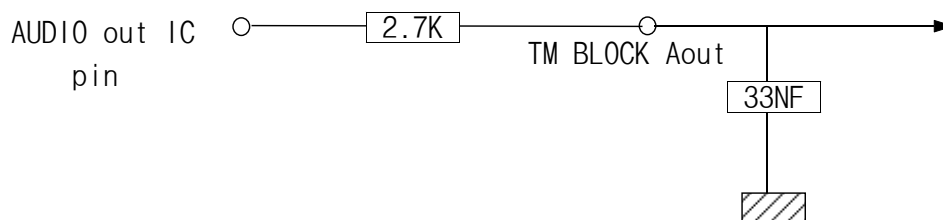
T M - B L O C K

15/ 20

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
Audio Frequency					50Hz~10KHz 1KHz/ ± 15 KHz Standard Standard color bar:87.5% De-emphasis:0N (ref: figure A of page 16)
50 Hz	-3	0	3	dB	
10KHz	-3	0	3		
Audio S/N	47	55		dB	1KHz/ ± 15 KHz Dev. Standard color bar:87.5% mod. use CCITT filter De-emphasis:0N (ref: figure A of page 16)
Audio Buzz		40	100	mV(p-p)	Standard color bar:87.5% mod. Ant input level:70dB(μ V) P/S=-10dB De-emphasis:0N (ref: figure A of page 16)
AFT Alignment Accuracy	1.5	2.5	3.5	V	Alignment center:2.5V RF input level:70dB(μ V) P/S=-7dB Standard color bar:87.5% mod. Testing channel:11CH
920KHz Beat	40	48		dB	11CH,100dB(μ V)(75 Ω term.) P/S=-7dB Video:100% Chroma(RED) $S/i = \frac{3.58\text{MHz signal level}}{920\text{KHz beat level}}$ *Check at Video output terminal

ITEM	SPECIFICATION			UNIT	REMARK
	MIN.	TYP.	MAX.		
4.5MHz Signal Leakage	40	45		dB	11CH, 100dB(μV)(75 Ω term.) P/S=-7dB Video: 100% Chroma(RED) $S/i = \frac{3.58MHz \text{ signal level}}{4.5MHz \text{ beat level}}$ *Check at Video output terminal
SIF LEVEL (4.5MHz)	70	75		dB μV	Standard color bar: 87.5% mod. Ant input level: 70dB(μV) P/S=-7dB

「 Figure A 」



[De-emphasis circuits for Test (Audio)

3.ENVIRONMENT TEST

ITEM	SPECIFICATION		TEST CONDITION
	TUNER	IF	
Heat Load Test	OSC frequency UHF: $\pm 2.0\text{MHz}$ VHF: $\pm 2.5\text{MHz}$		1.Initial value measure at standard test condition. 2.Leave samples in $70^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 96 ± 5 hours, and in standard test condition for 30 minutes, then take measurements within 1 hour. 3.Supply voltage : Standard $\pm 10\%$ 4.Supply voltage cycle : 1.5H ON, 0.5H OFF
Humidity Load Test		*VIDEO S/N $\pm 6\text{dB}$ *VIDEO OUTPUT LEVEL $\pm 0.2\text{Vp-p}$ *NOISE LIMIT SENSITIVITY $\pm 6\text{dB}$	1.Leave samples in $40^{\circ}\text{C} \pm 5^{\circ}\text{C}$ for 24 ± 2 hours, and in standard test condition for 30 minutes, then take measurements 2.Leave samples in $40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for $96 \pm 5\%$ RH hours, for 96 ± 5 hours, and in standard test condition for 30 minutes then take measurement within 1 hour. 3.Supply voltage : Standard $\pm 10\%$ 4.Supply voltage cycle : 1.5 hour ON , 0.5 hour OFF
Cold Test		*AUDIO OUTPUT LEVEL $\pm 30\% \text{ MAX}$	1.Initial value measure at standard test condition. 2.Leave samples in $-20^{\circ}\text{C} \pm 2^{\circ}\text{C}$ for 96 ± 5 hours, and in standard test condition for 2 hours, then take measurements within 1 hour.
Vibration Test			1.Vibration test fixture is used to vibrate the tuner with a total amplitude of 1mm and frequency ranging from 10 to 55Hz, once per minute consecutively, for 40 minutes in each of three directions X, Y and Z.

S P E C I F I C A T I O N

PAGE

T M - B L O C K

18 / 20

ITEM	SPECIFICATION		TEST CONDITION
	TUNER	IF	
Operating Life Test	OSC frequency	*VIDEO S/N $\pm 6\text{dB}$	1.Take measurements in standard test condition. 2.Leave samples for 1000 hours, then take measurements. 3.Supply voltage : Standard
Impact Test		*VIDEO OUTPUT LEVEL $\pm 0.2\text{Vp-p}$	1.Impact acceleration : 50 m/s^2 2.Impact time : 11msec 3.Impact direction : 6 sides per each direction
High Test (Static Electricity Test)		*NOISE LIMIT SENSITIVITY $\pm 6\text{dB}$ *AUDIO OUTPUT LEVEL $\pm 30\% \text{ MAX}$	5KV~20KV, 3 times(150pF charged) series R = 330ohm Terminal: Between RF-IN,RF-OUT & GND Standard pulse at 5KV~20KV

