




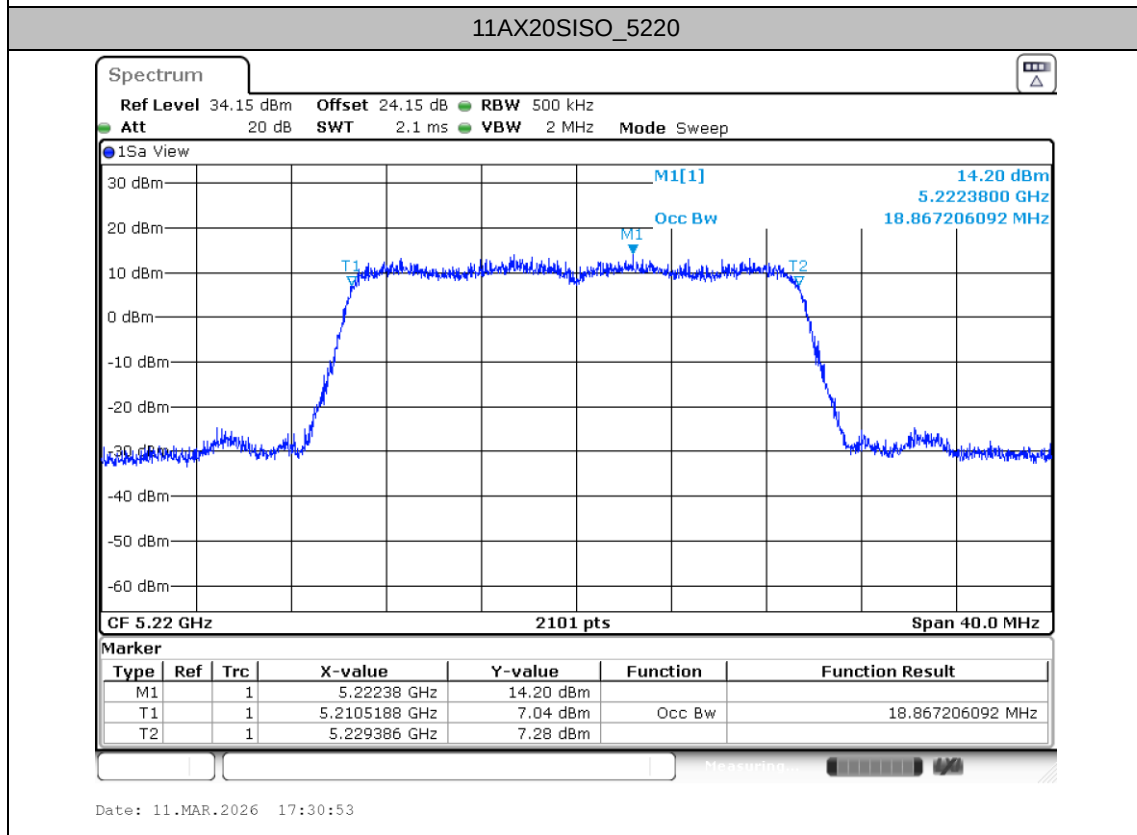
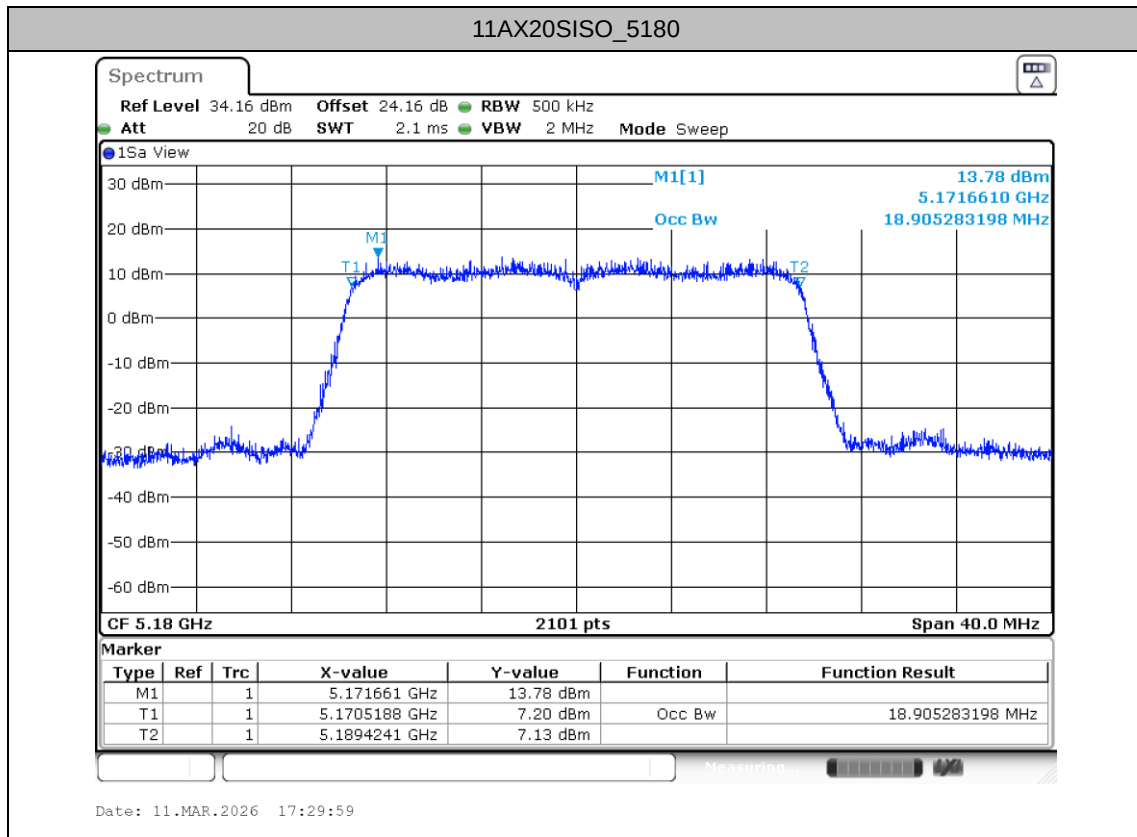
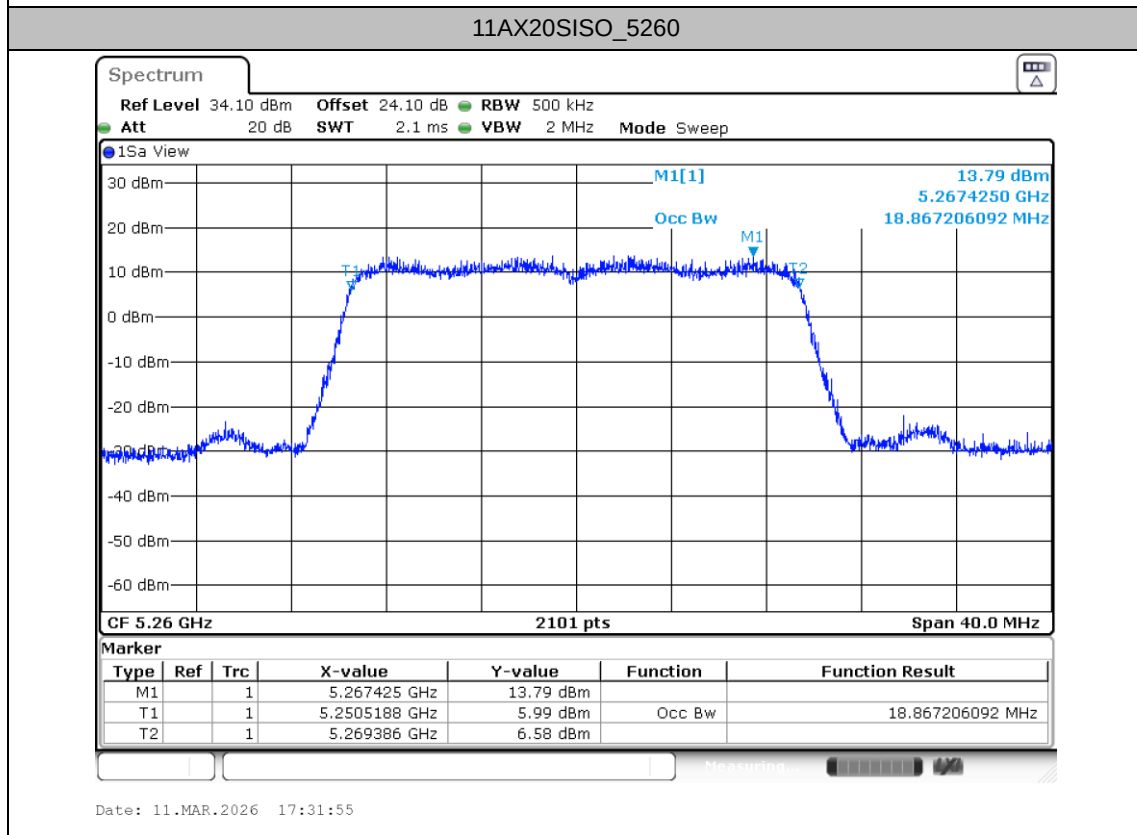
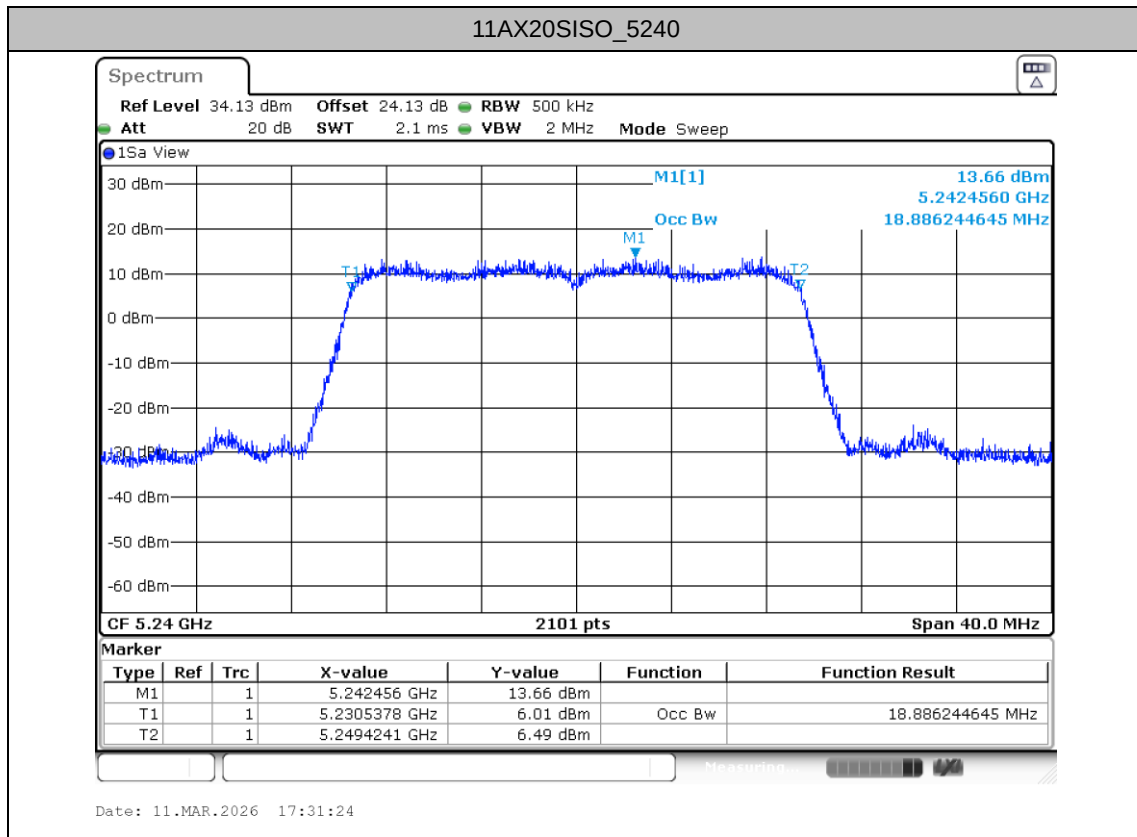
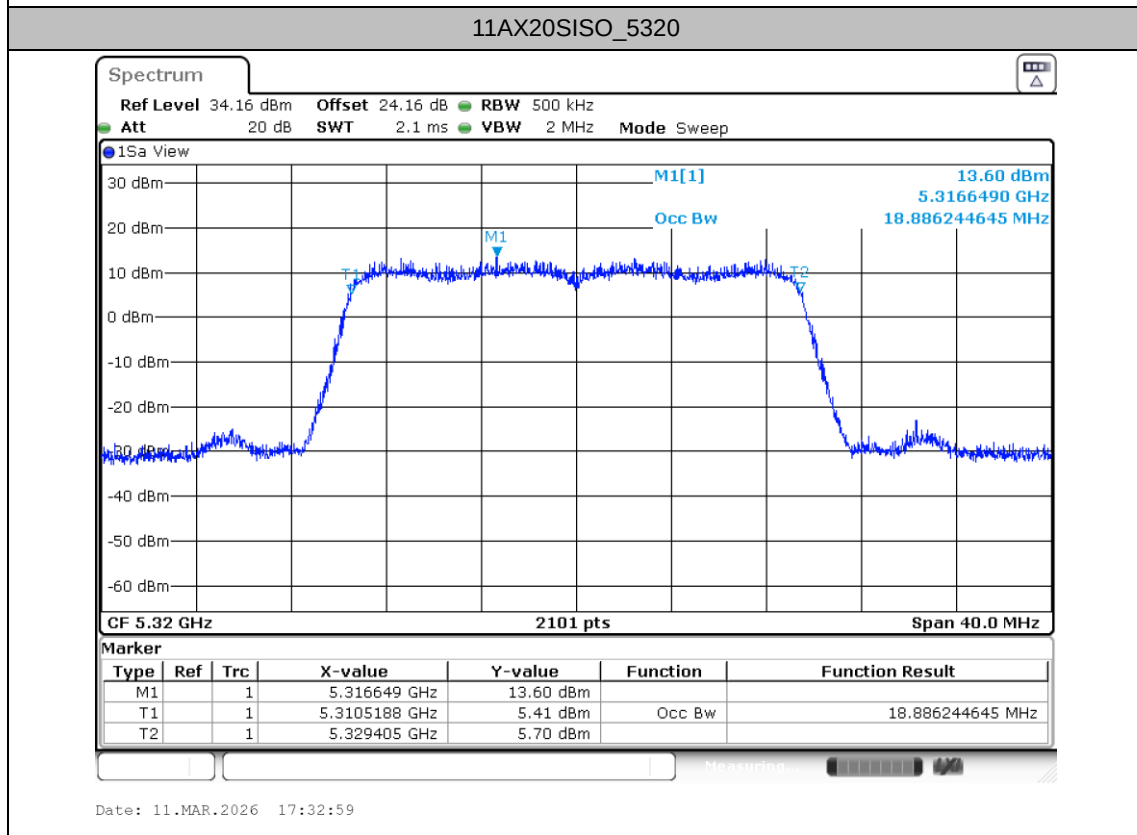


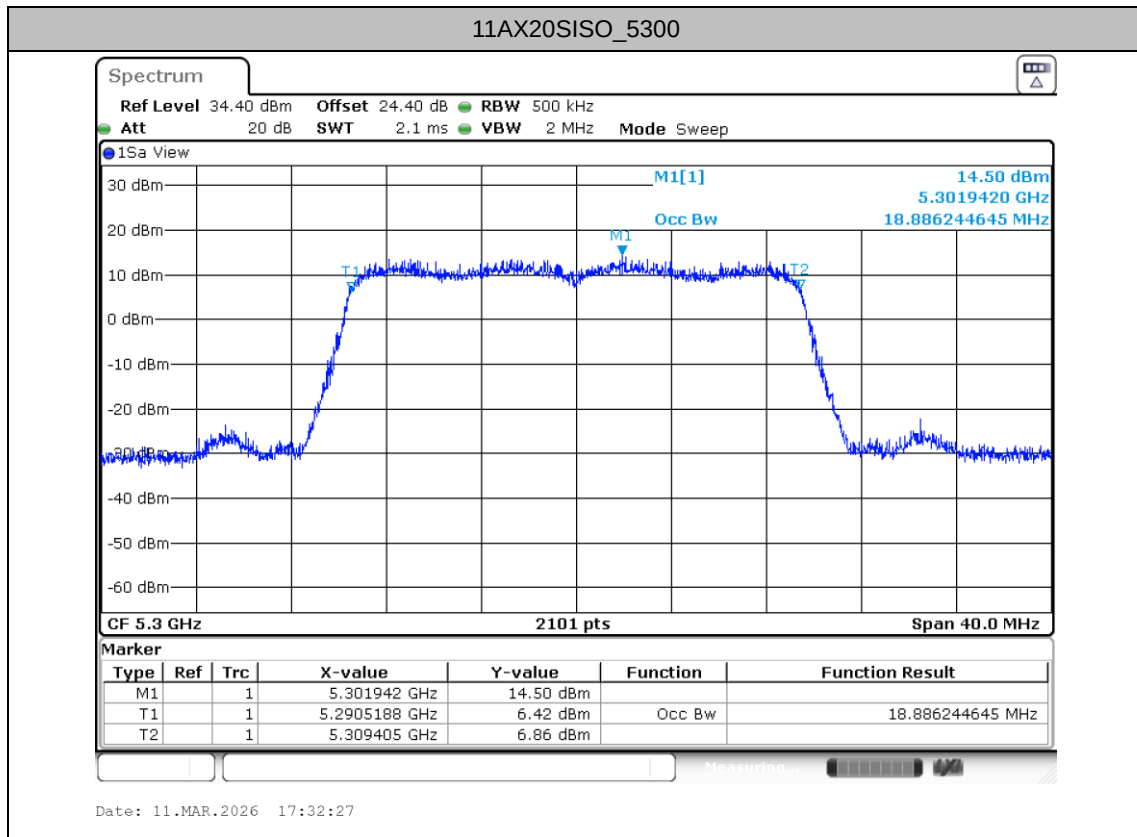


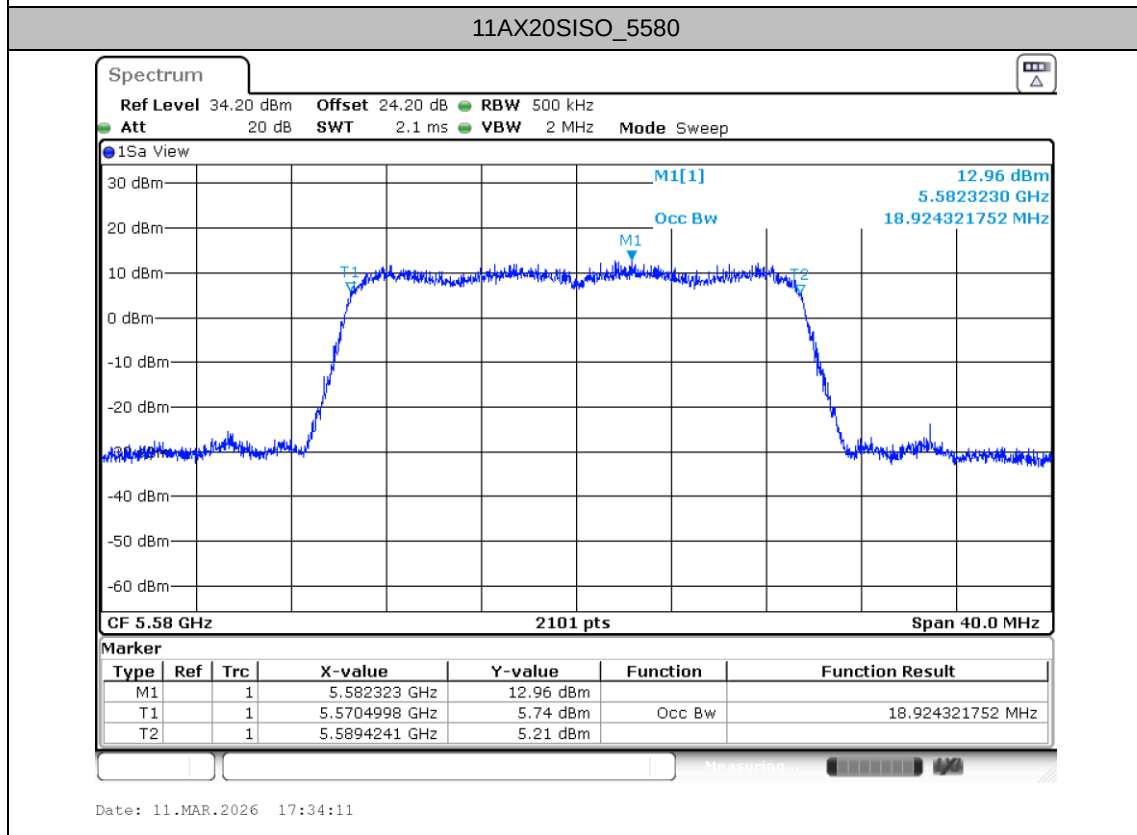


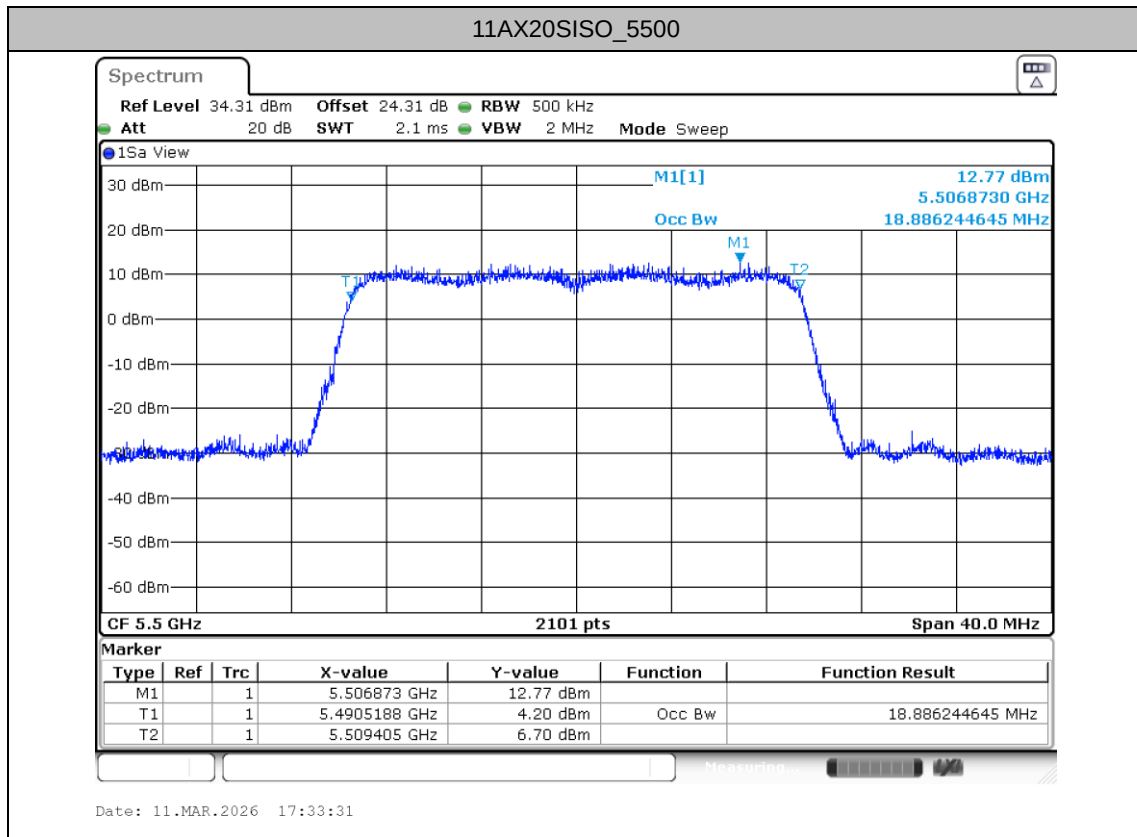

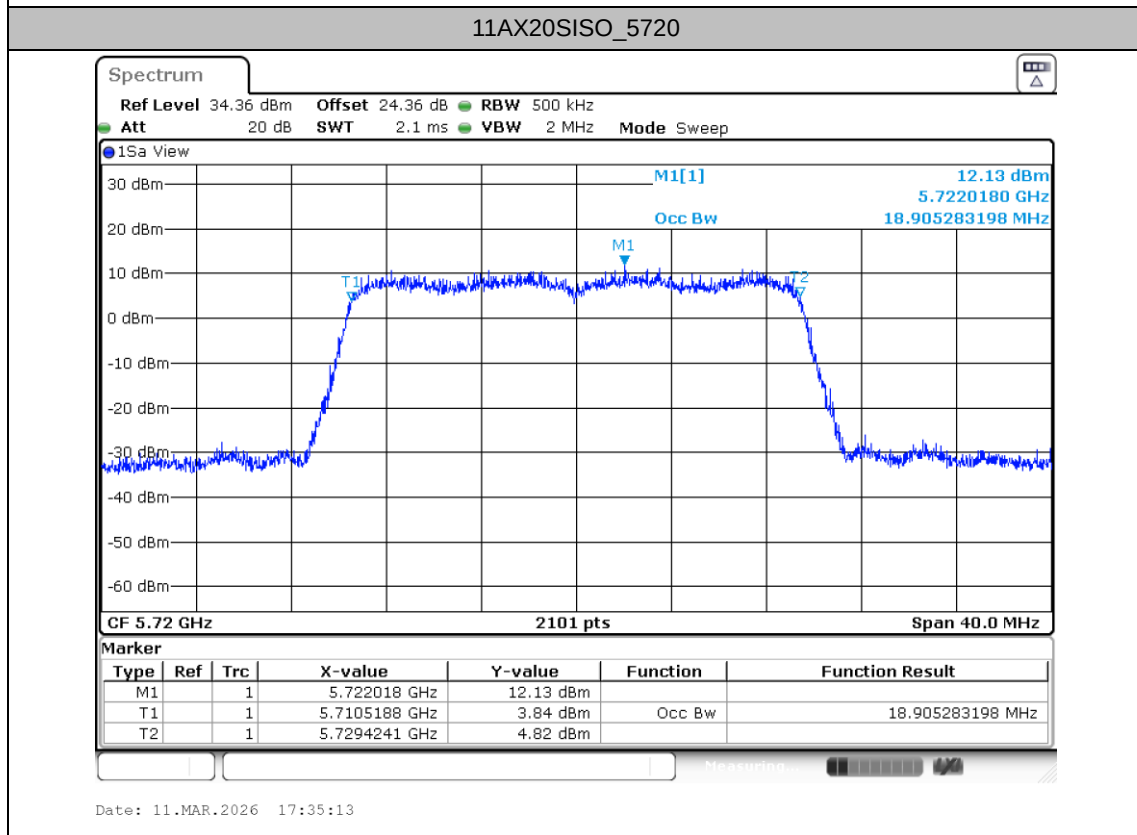

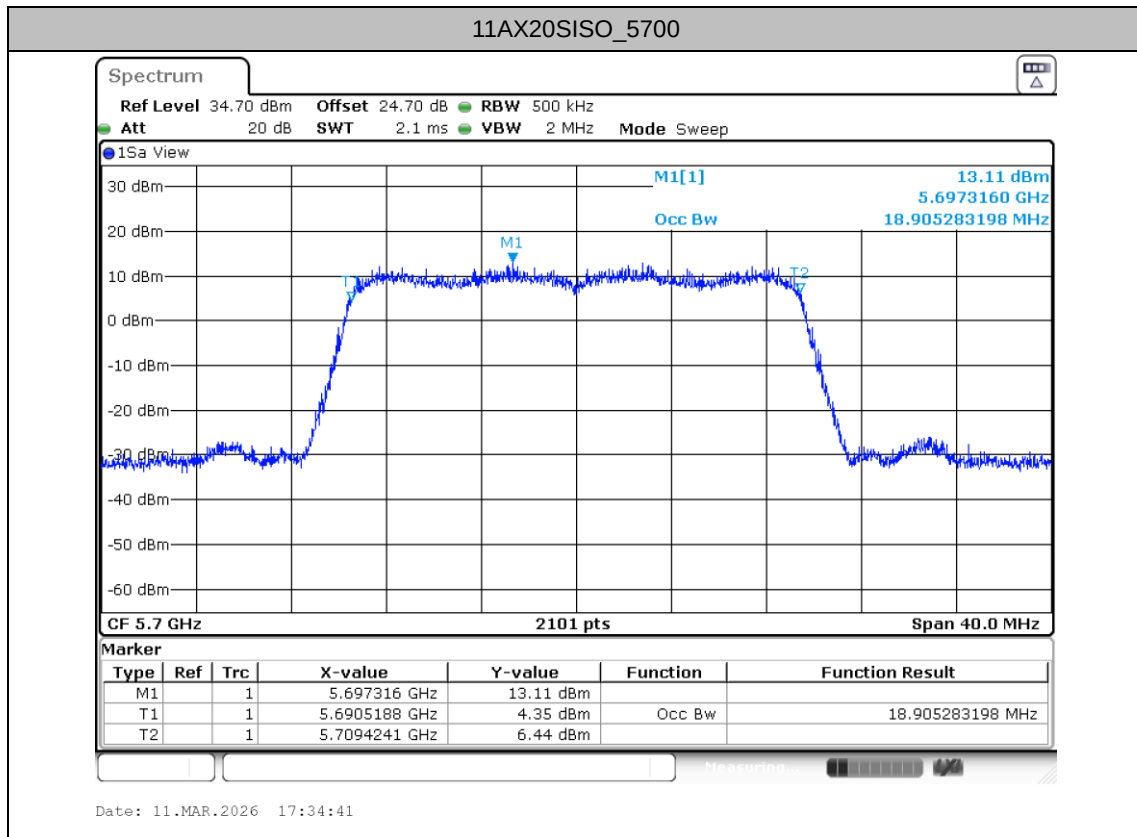

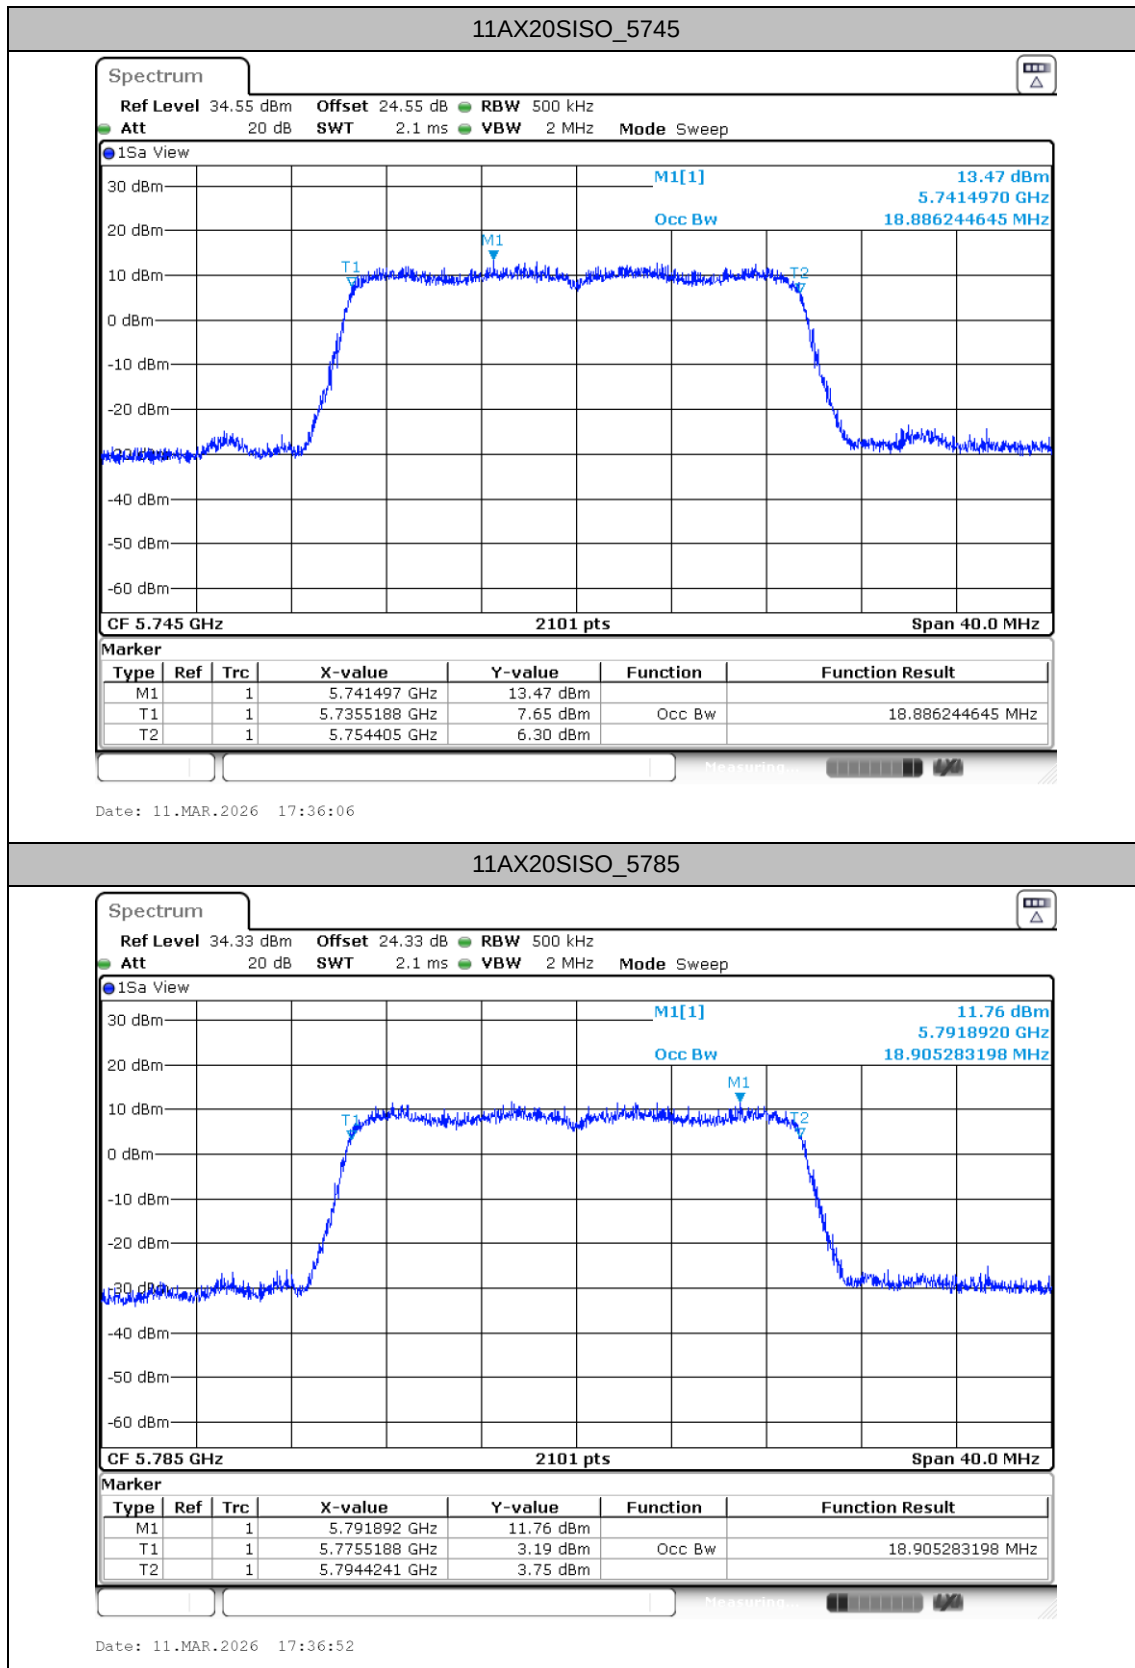

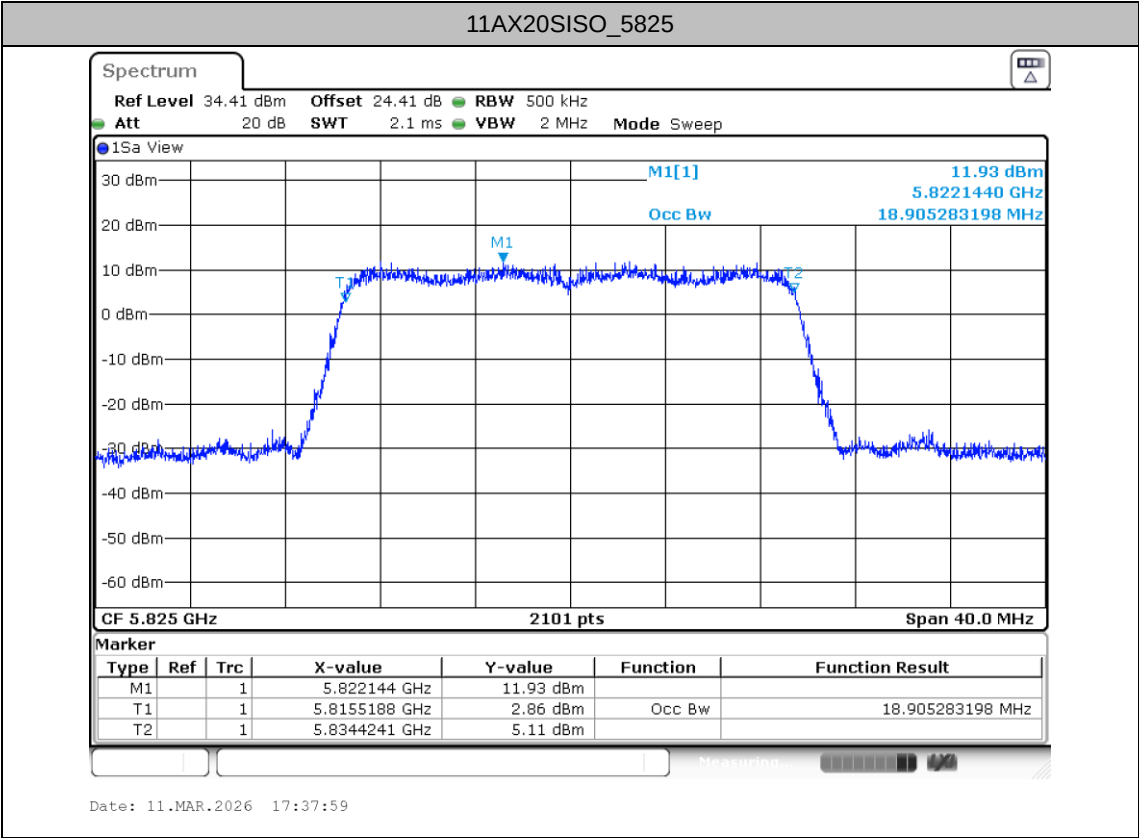




Min emission bandwidth


Test Result B4


TestMode	Antenna	Freq(MHz)	6dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.32	5736.81	5753.13	0.5	PASS
		5785	16.30	5776.81	5793.11	0.5	PASS
		5825	16.34	5816.79	5833.13	0.5	PASS
11AC20SISO	Ant1	5745	16.91	5736.56	5753.48	0.5	PASS
		5785	16.76	5776.60	5793.36	0.5	PASS
		5825	17.31	5816.18	5833.50	0.5	PASS
11AX20SISO	Ant1	5745	18.08	5735.93	5754.01	0.5	PASS
		5785	17.77	5776.16	5793.93	0.5	PASS
		5825	17.89	5815.99	5833.88	0.5	PASS





Test Graphs B4

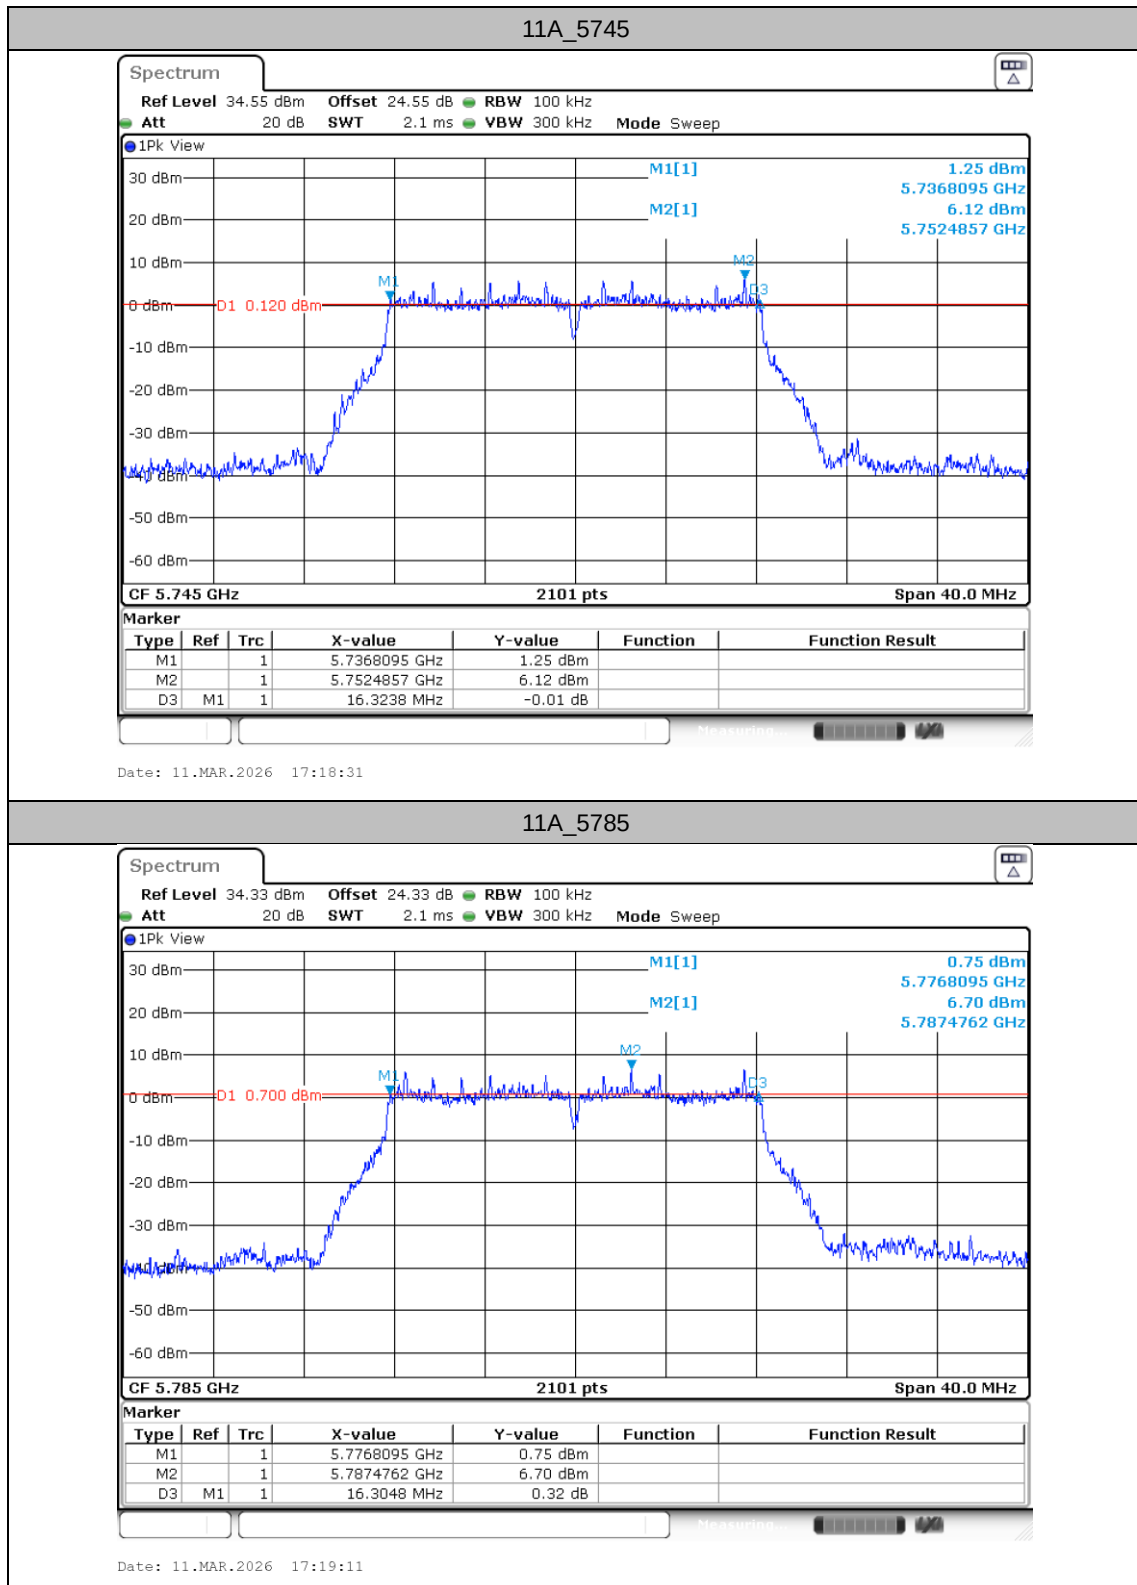

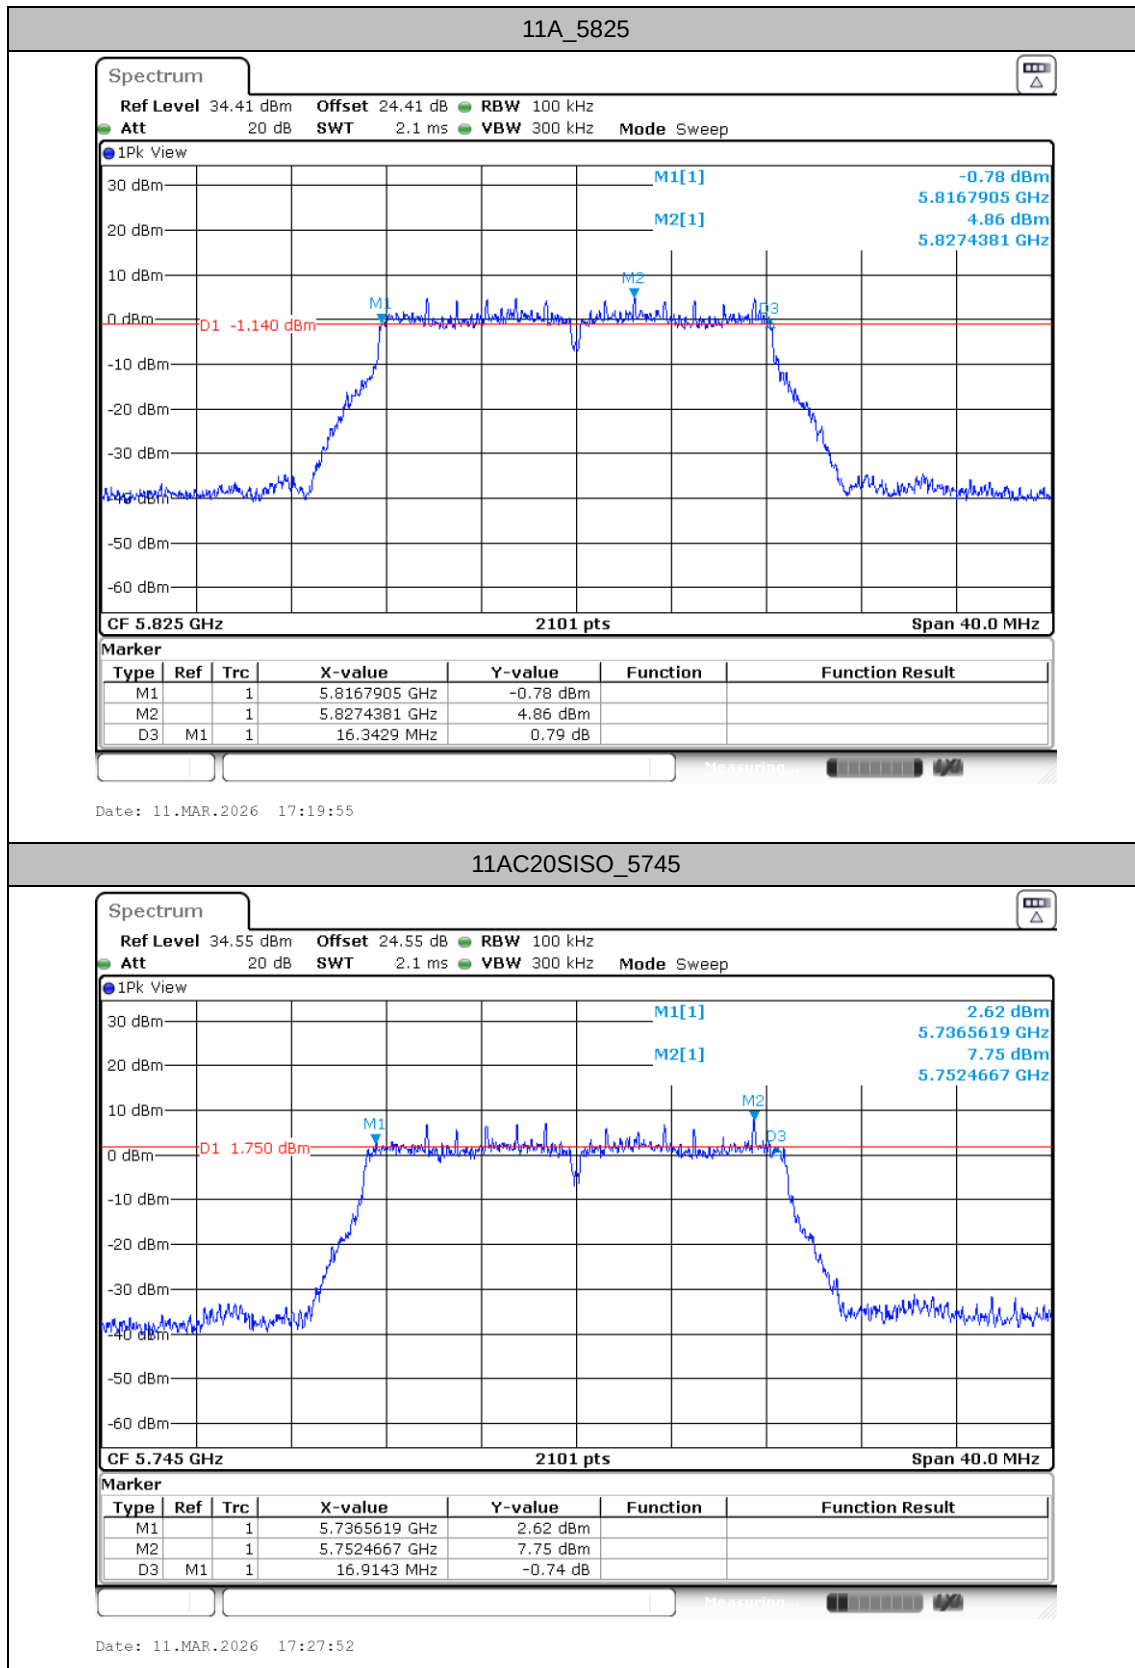

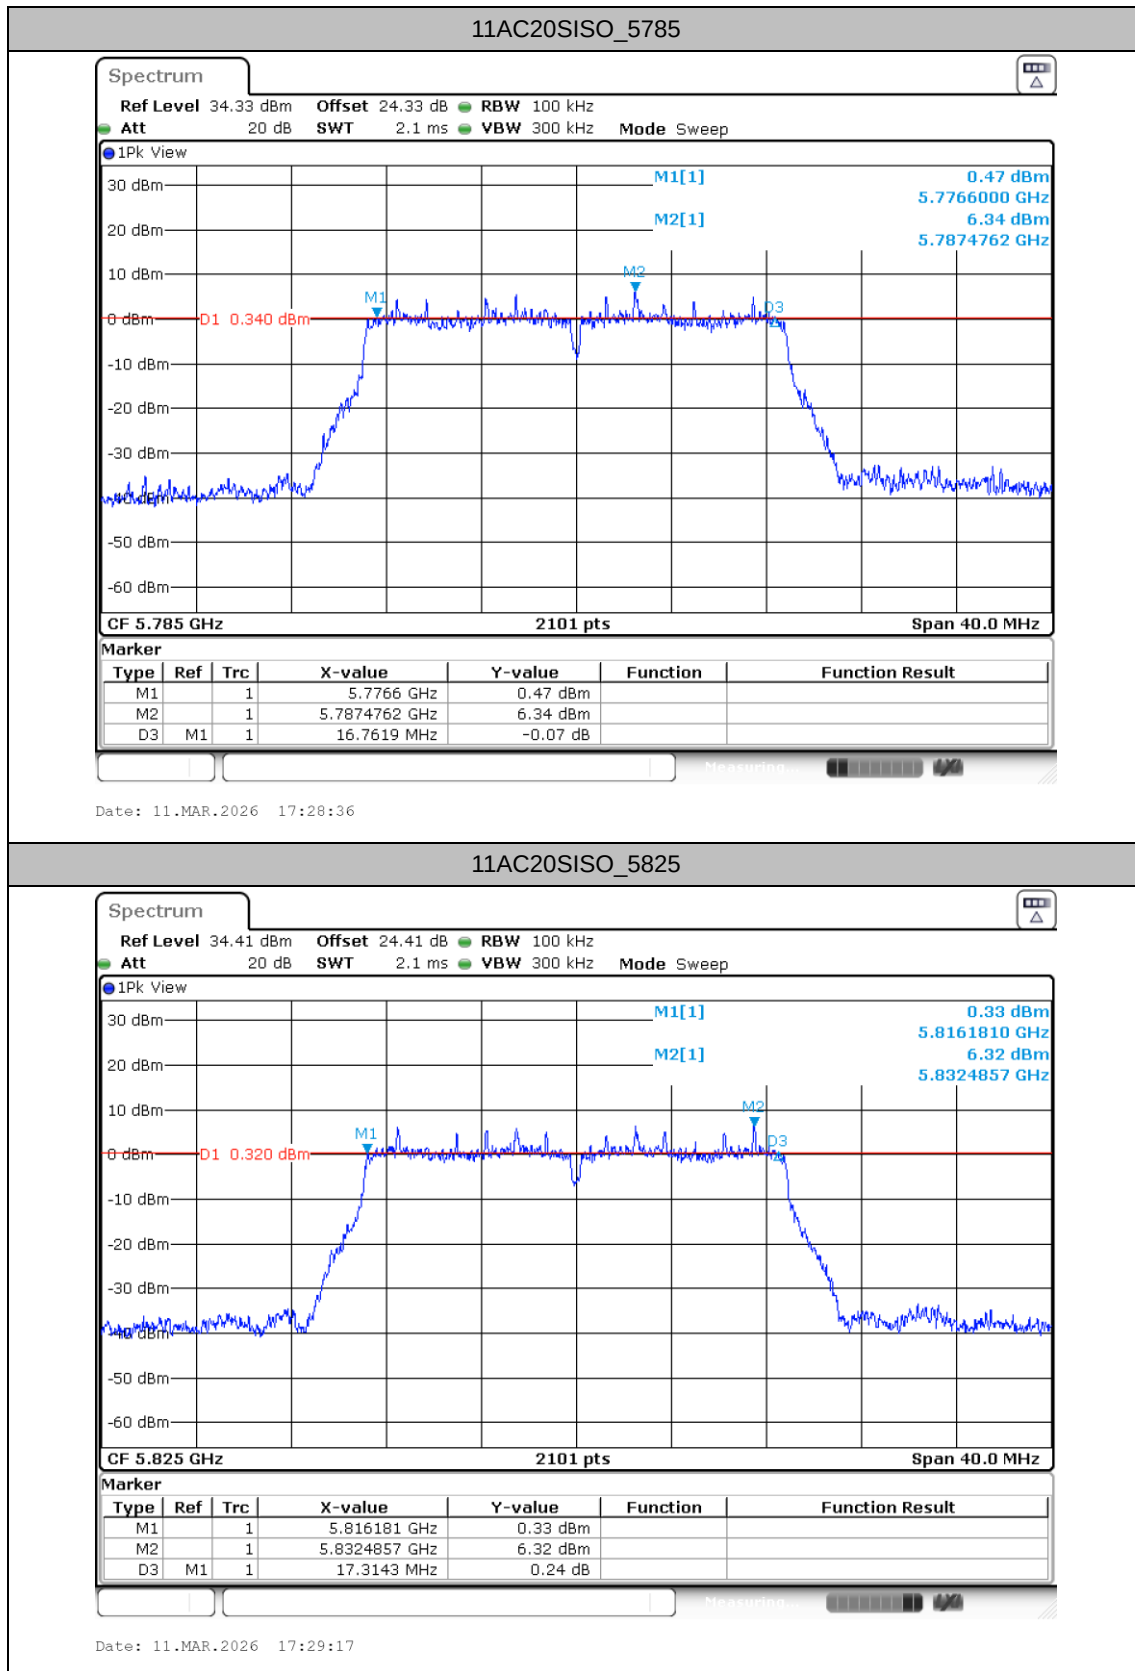

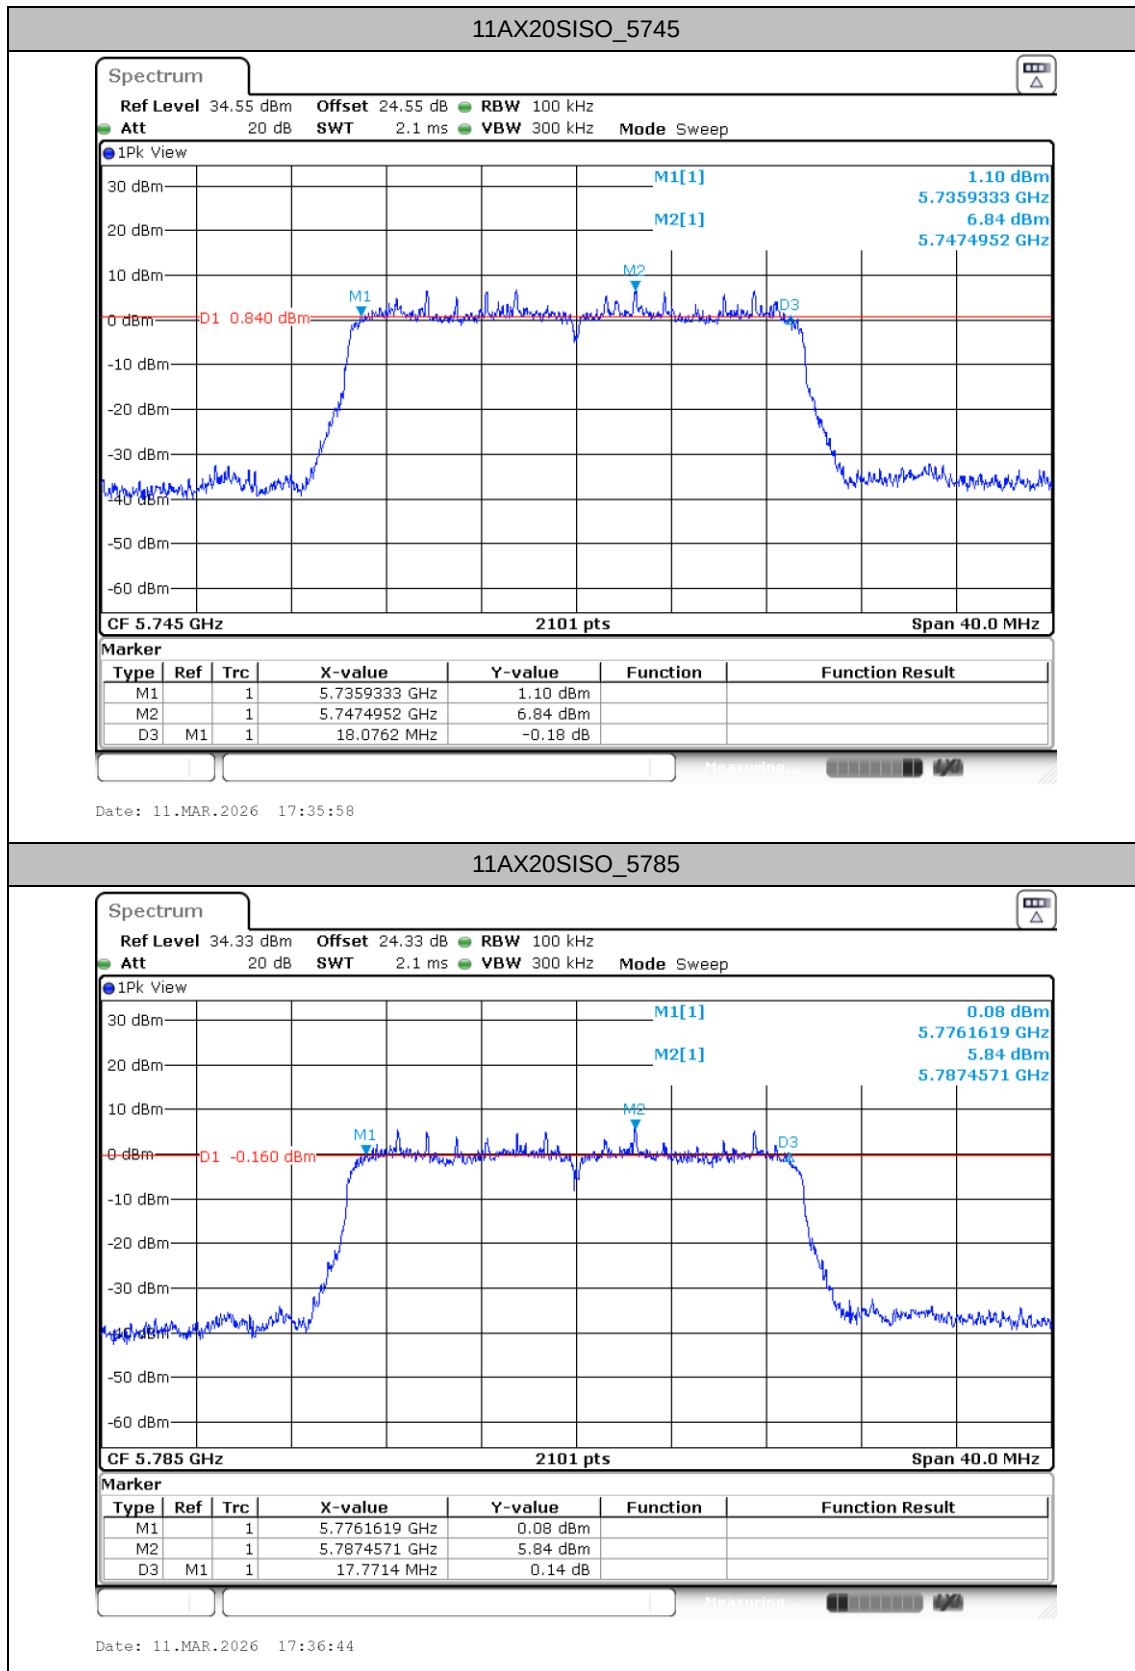

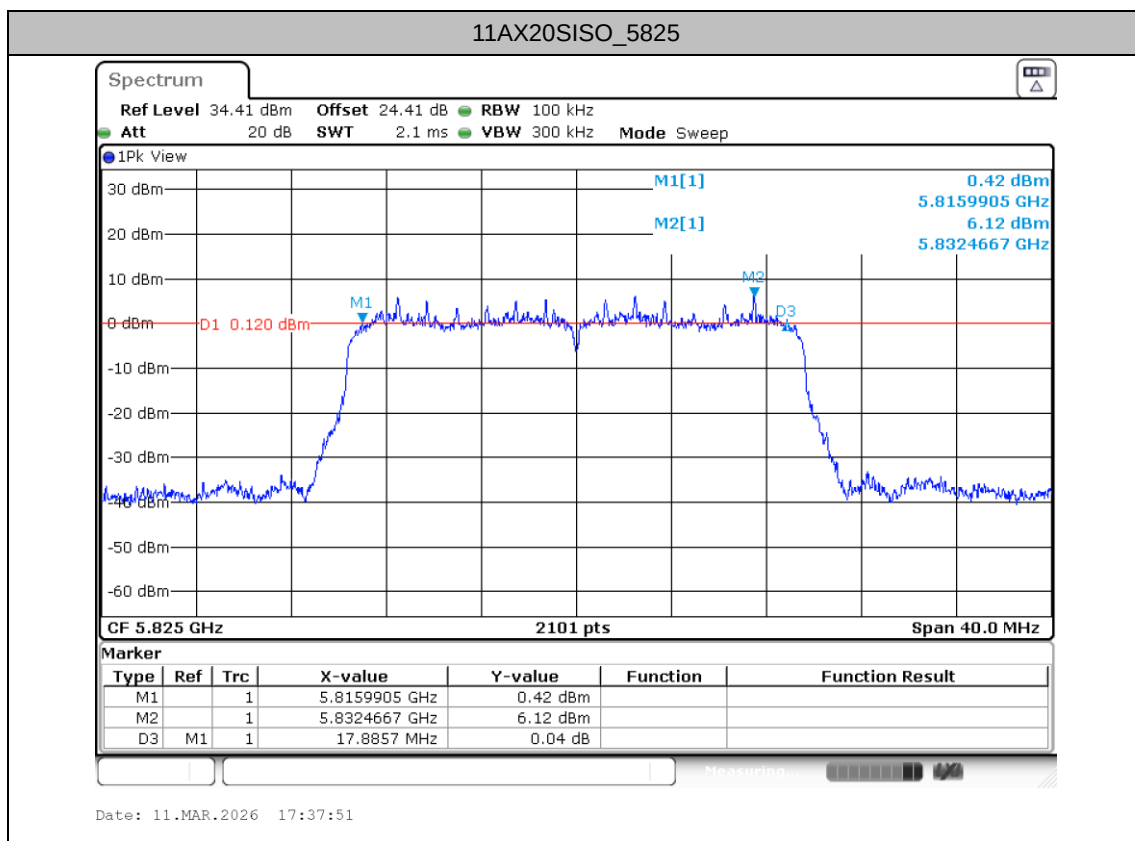



Maximum power spectral density

Test Result


TestMode	Antenna	Freq(MHz)	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	7.5	≤11.00	PASS
		5220	7.21	≤11.00	PASS
		5240	6.97	≤11.00	PASS
		5260	7.49	≤11.00	PASS
		5300	7.53	≤11.00	PASS
		5320	6.72	≤11.00	PASS
		5500	6.07	≤11.00	PASS
		5580	6.06	≤11.00	PASS
		5700	6.08	≤11.00	PASS
		5720 UNII-2C	5.64	≤11.00	PASS
		5720 UNII-3	2.41	≤30.00	PASS
		5745	2.69	≤30.00	PASS
		5785	2.71	≤30.00	PASS
		5825	1.94	≤30.00	PASS
11AC20SISO	Ant1	5180	7.23	≤11.00	PASS
		5220	7.01	≤11.00	PASS
		5240	6.76	≤11.00	PASS
		5260	7.27	≤11.00	PASS
		5300	7.31	≤11.00	PASS
		5320	6.51	≤11.00	PASS
		5500	5.78	≤11.00	PASS
		5580	5.76	≤11.00	PASS
		5700	5.81	≤11.00	PASS
		5720 UNII-2C	4.31	≤11.00	PASS
		5720 UNII-3	1.2	≤30.00	PASS
		5745	3.47	≤30.00	PASS
		5785	1.99	≤30.00	PASS
		5825	2.1	≤30.00	PASS
11AX20SISO	Ant1	5180	6.97	≤11.00	PASS
		5220	6.73	≤11.00	PASS
		5240	6.52	≤11.00	PASS
		5260	7.11	≤11.00	PASS
		5300	7.01	≤11.00	PASS
		5320	6.26	≤11.00	PASS
		5500	5.6	≤11.00	PASS
		5580	5.62	≤11.00	PASS
		5700	5.55	≤11.00	PASS
		5720 UNII-2C	4.07	≤11.00	PASS
		5720 UNII-3	1.01	≤30.00	PASS
		5745	3.37	≤30.00	PASS
		5785	1.69	≤30.00	PASS
		5825	1.87	≤30.00	PASS



Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.



2.The Duty Cycle Factor and is compensated in the graph.







Test Graphs


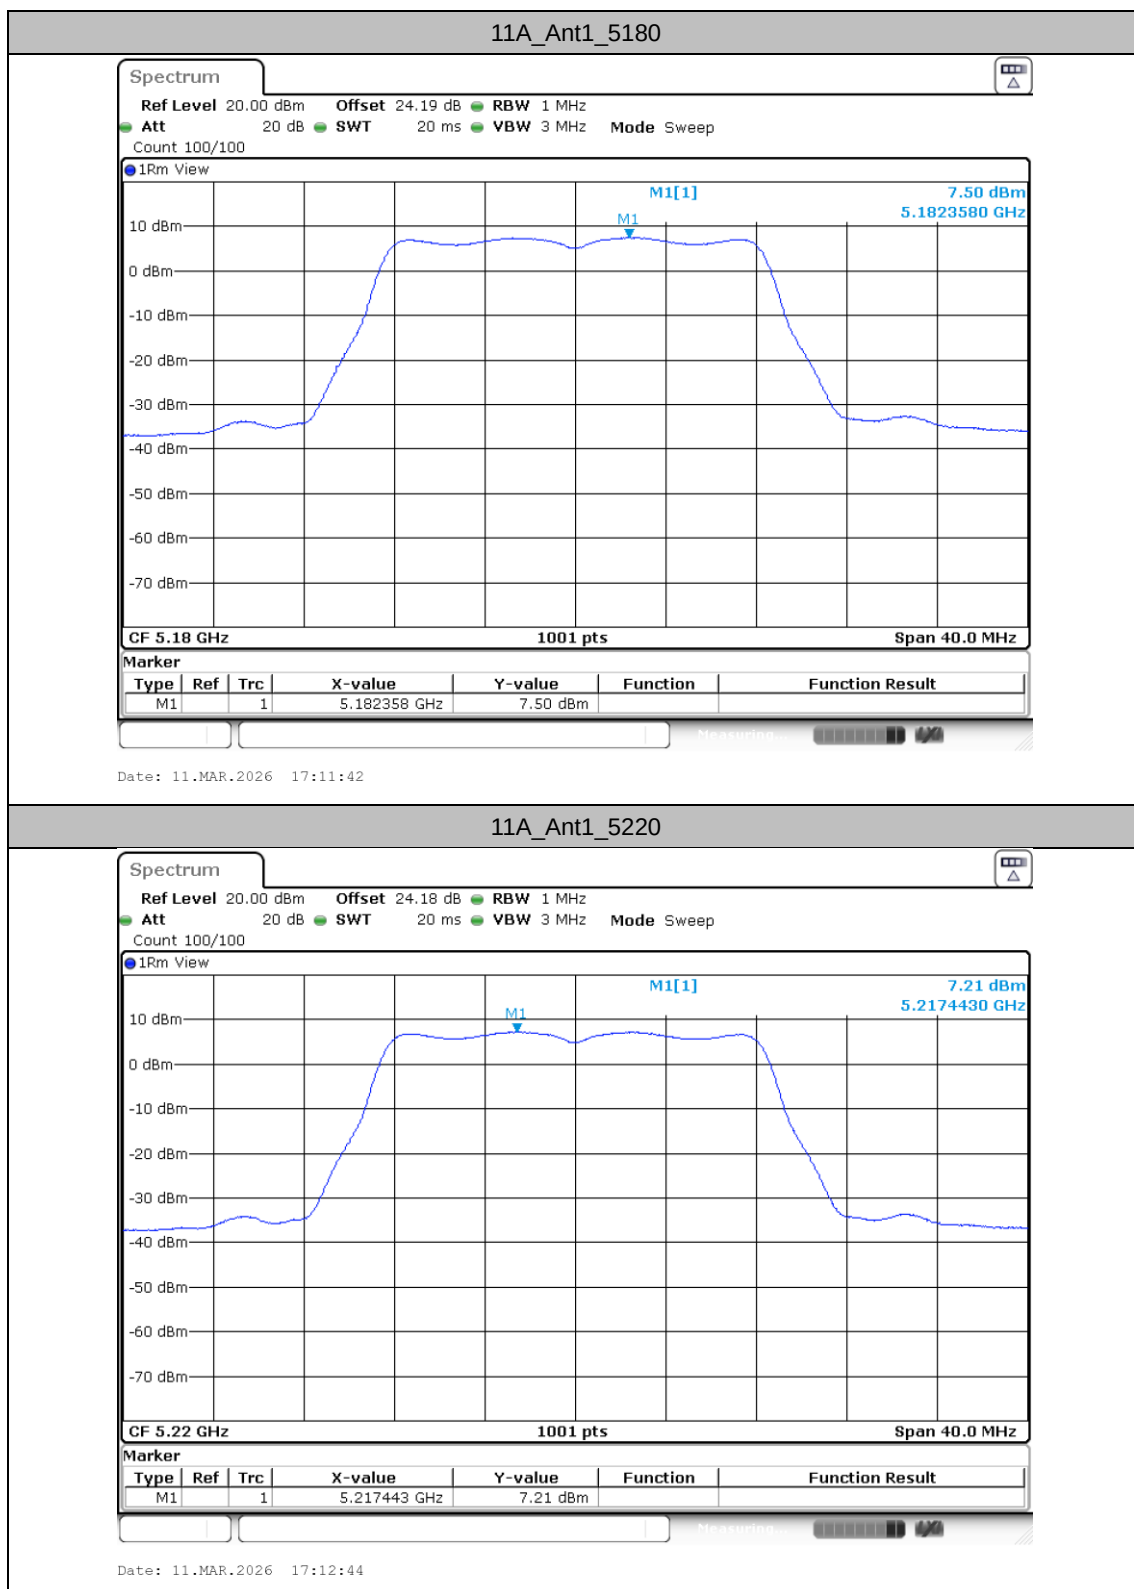


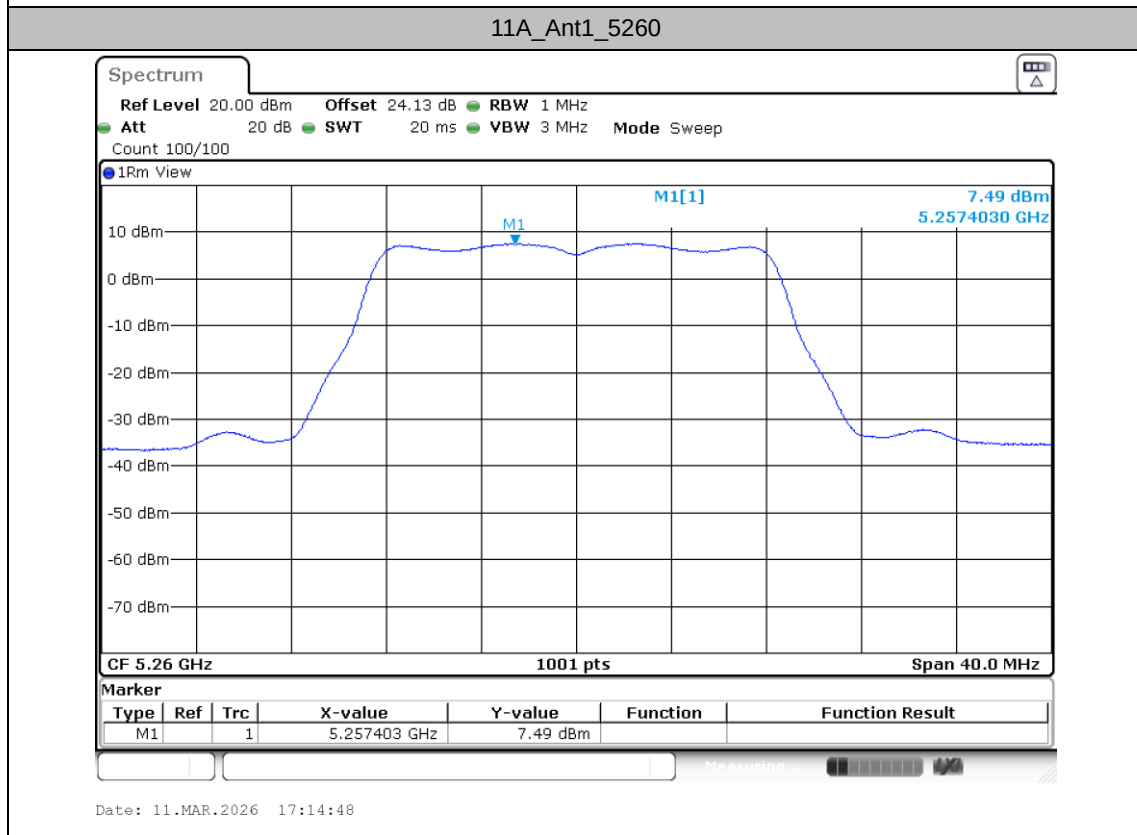
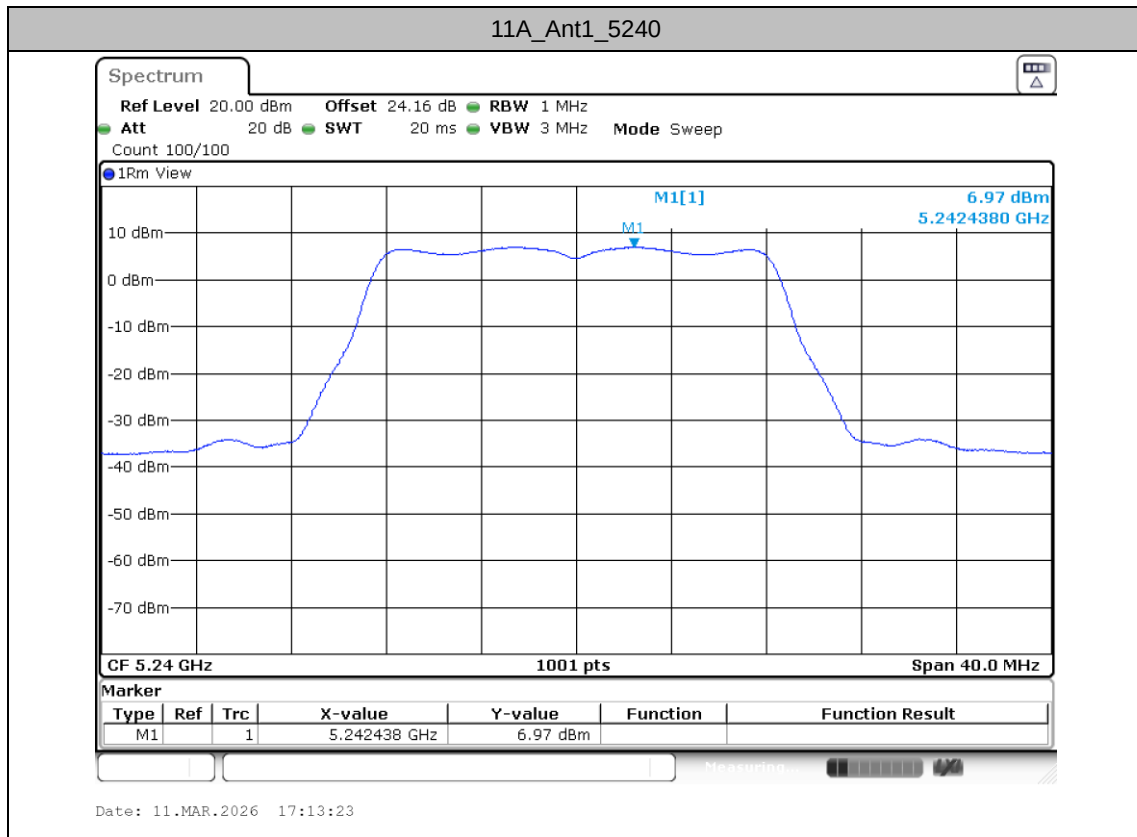


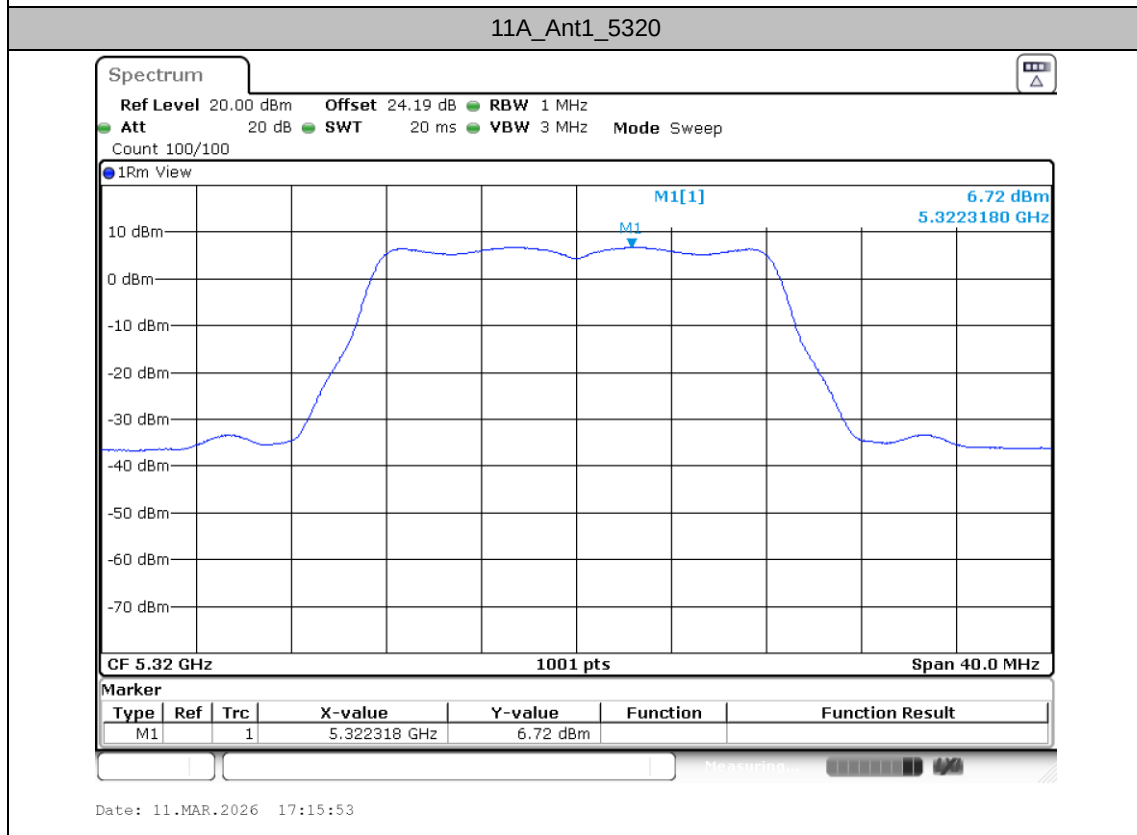
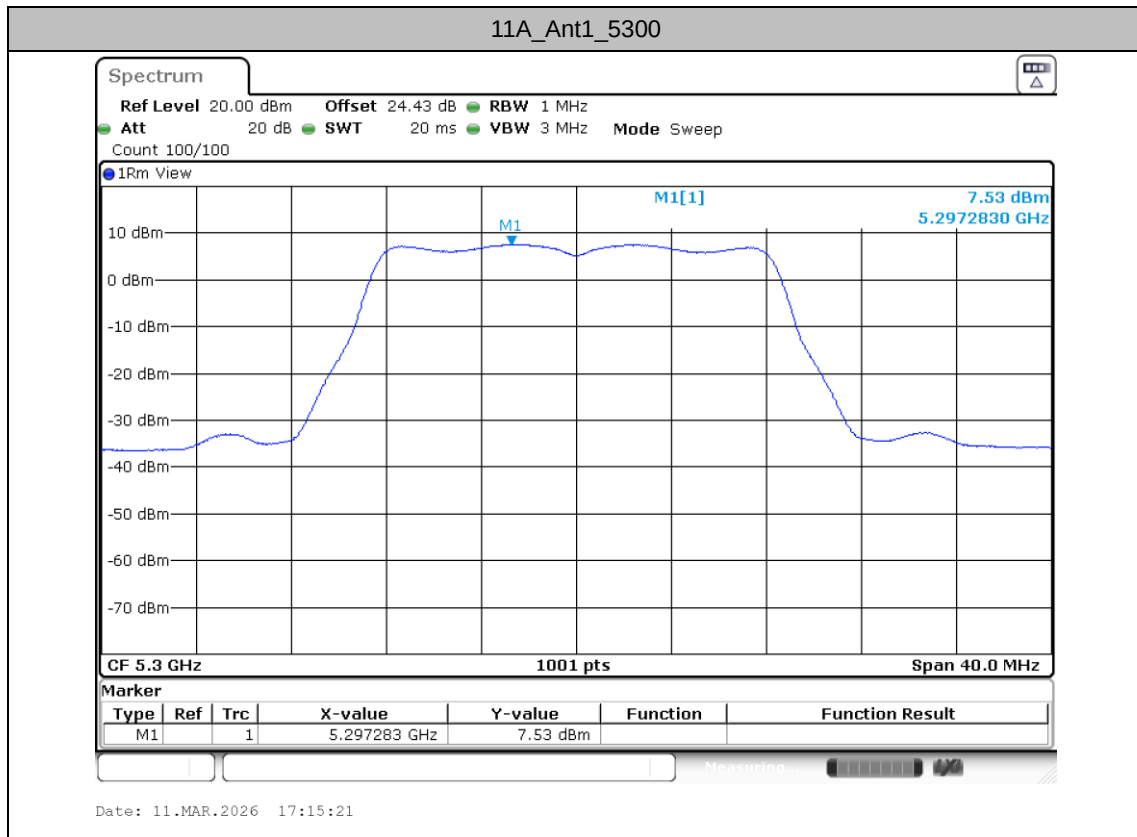


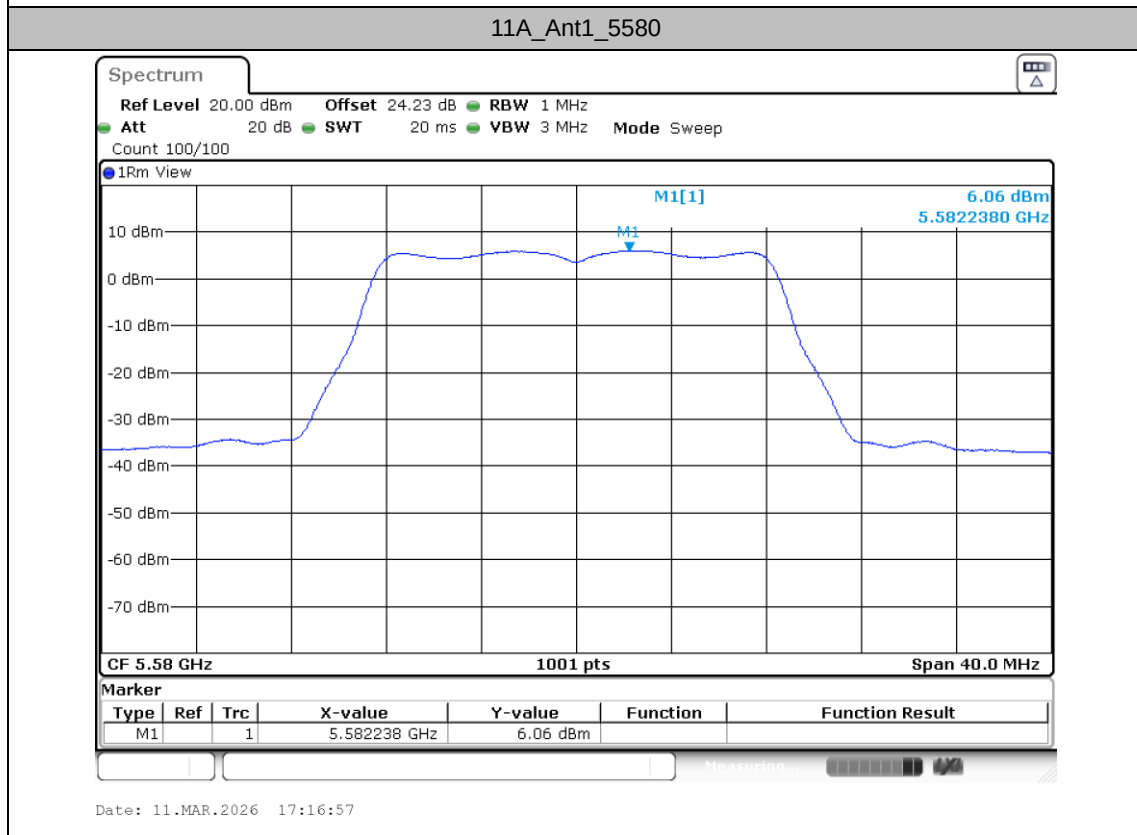
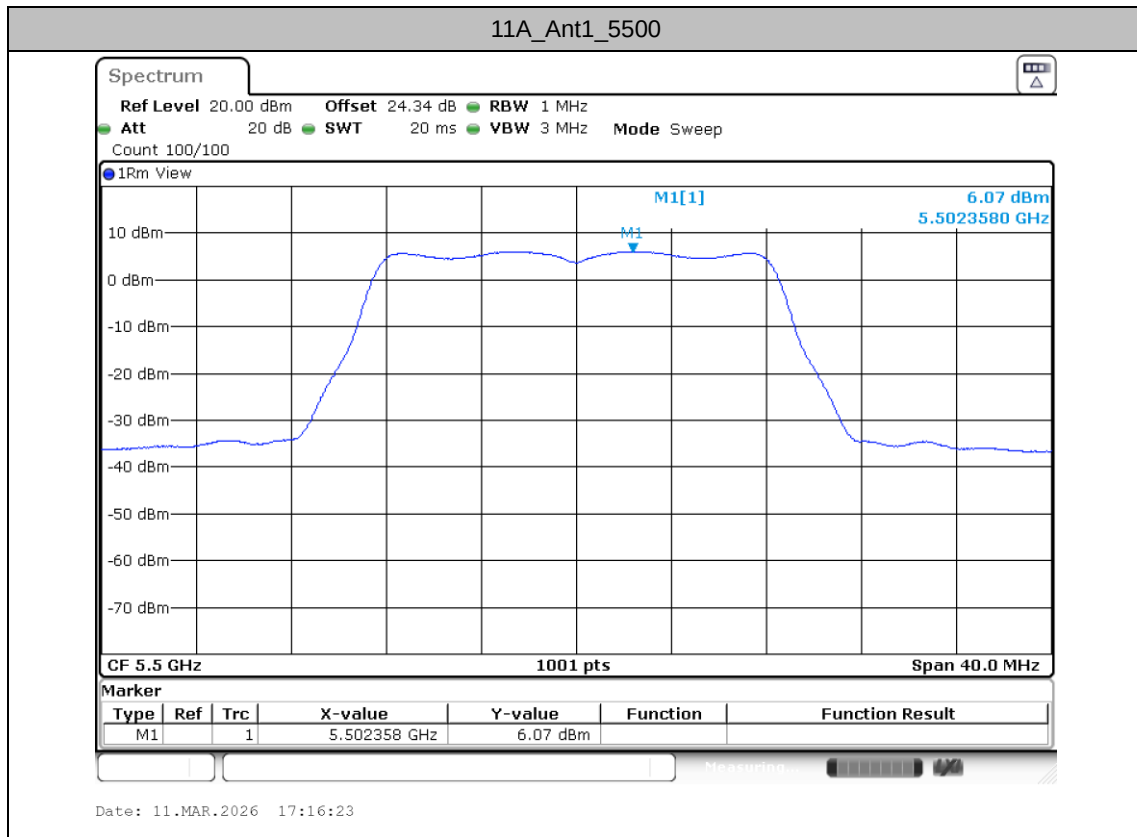


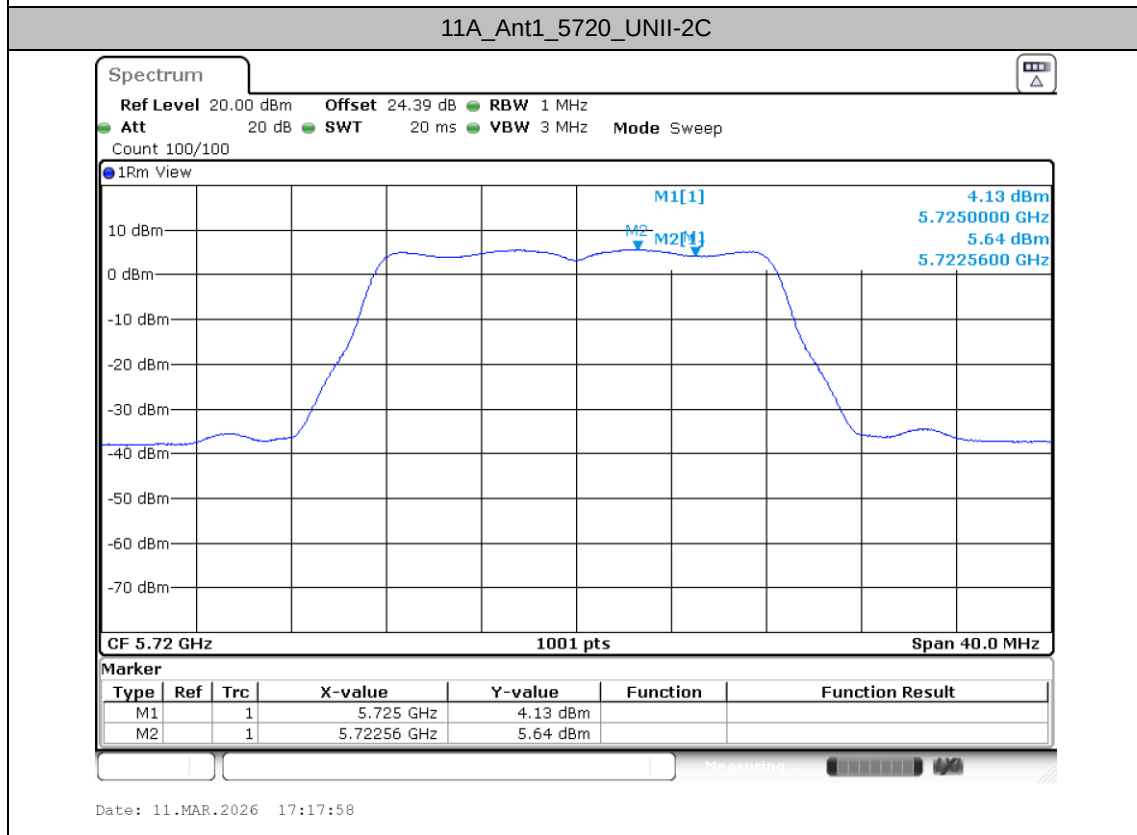
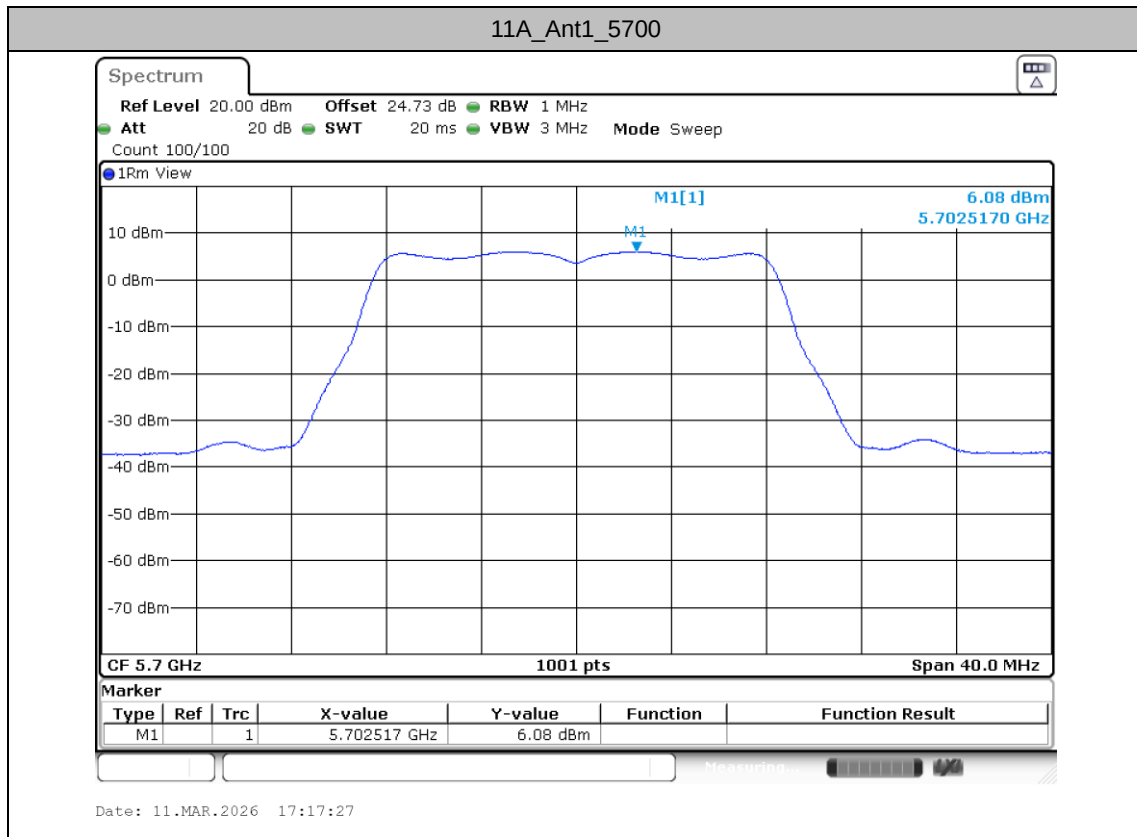


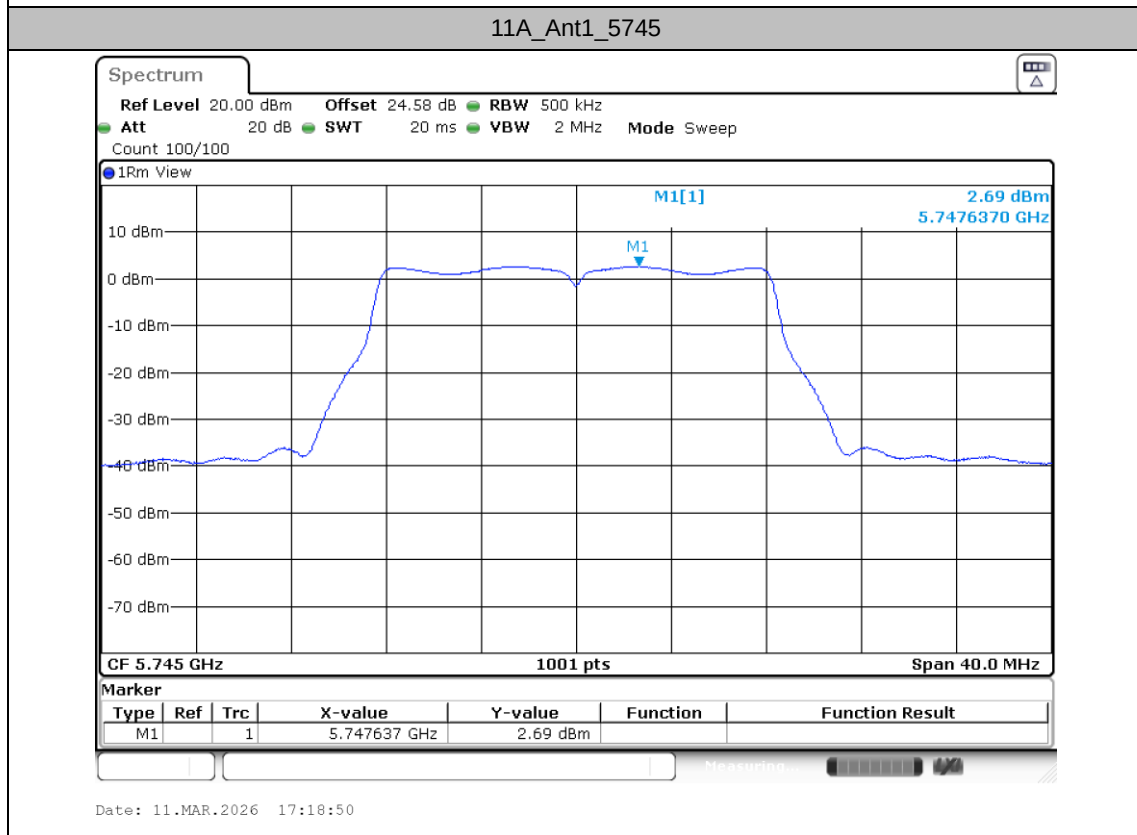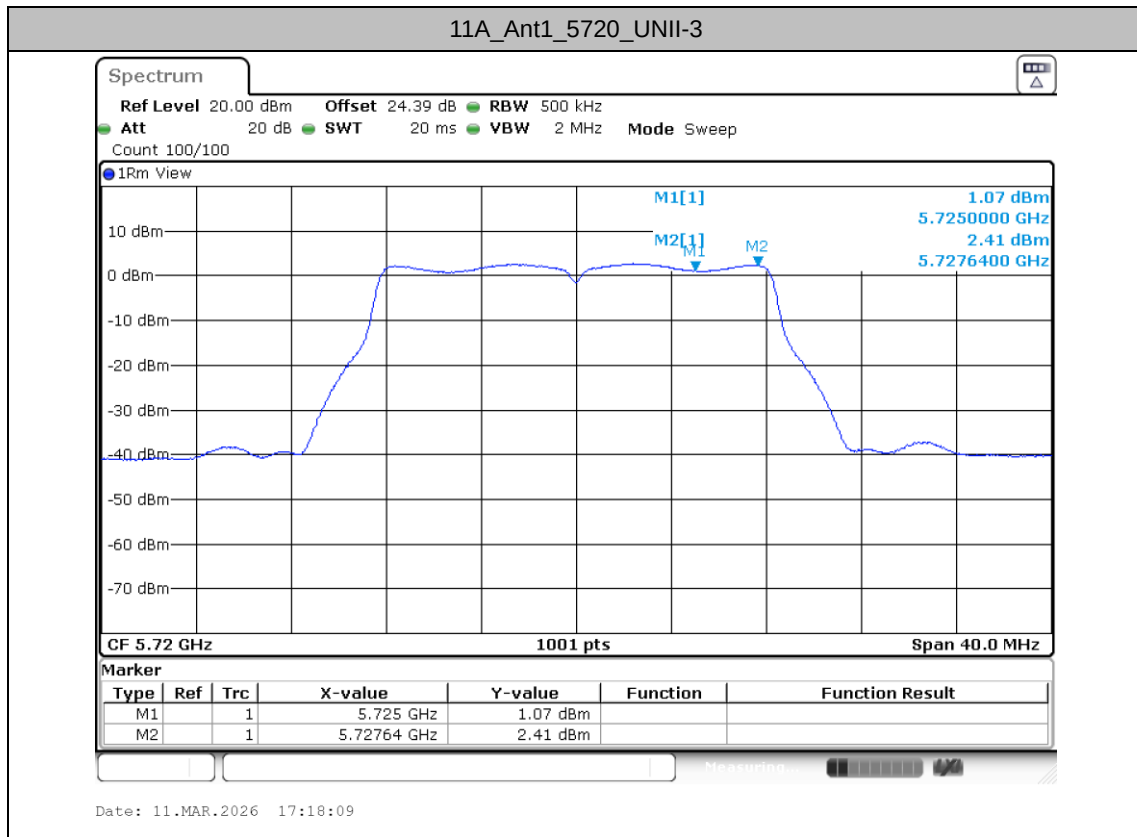

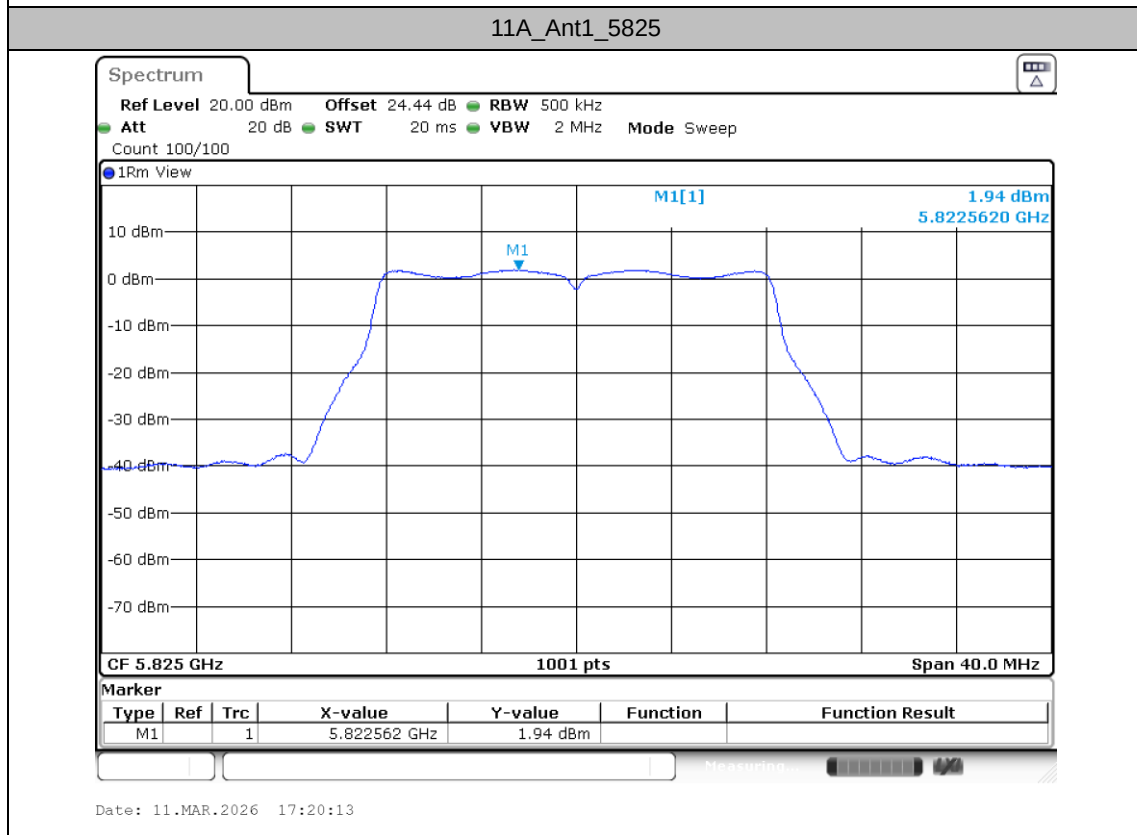
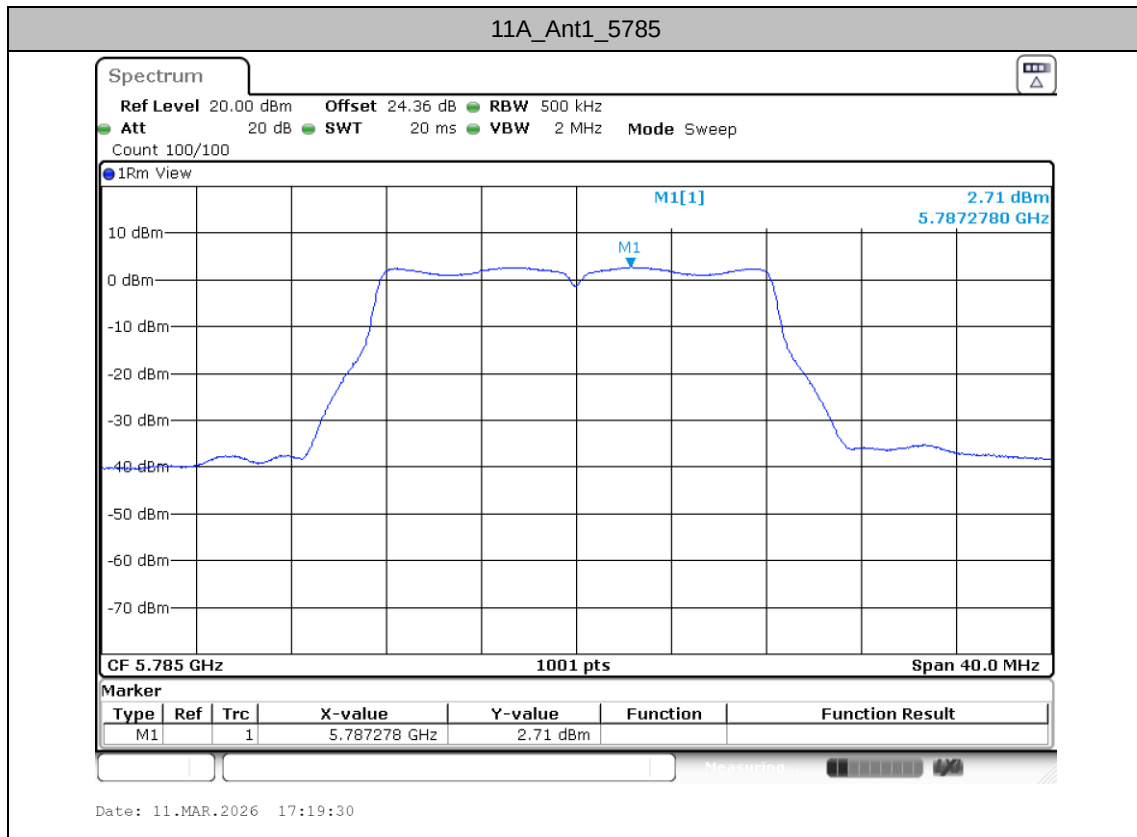


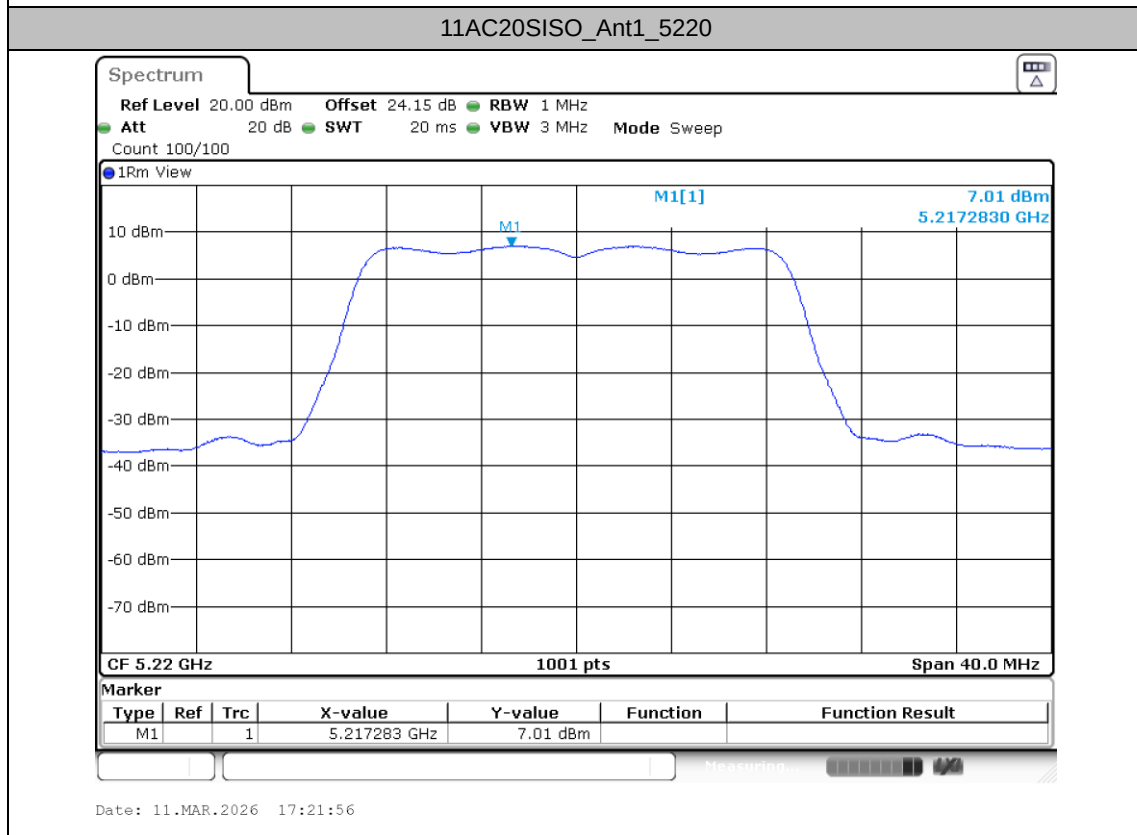
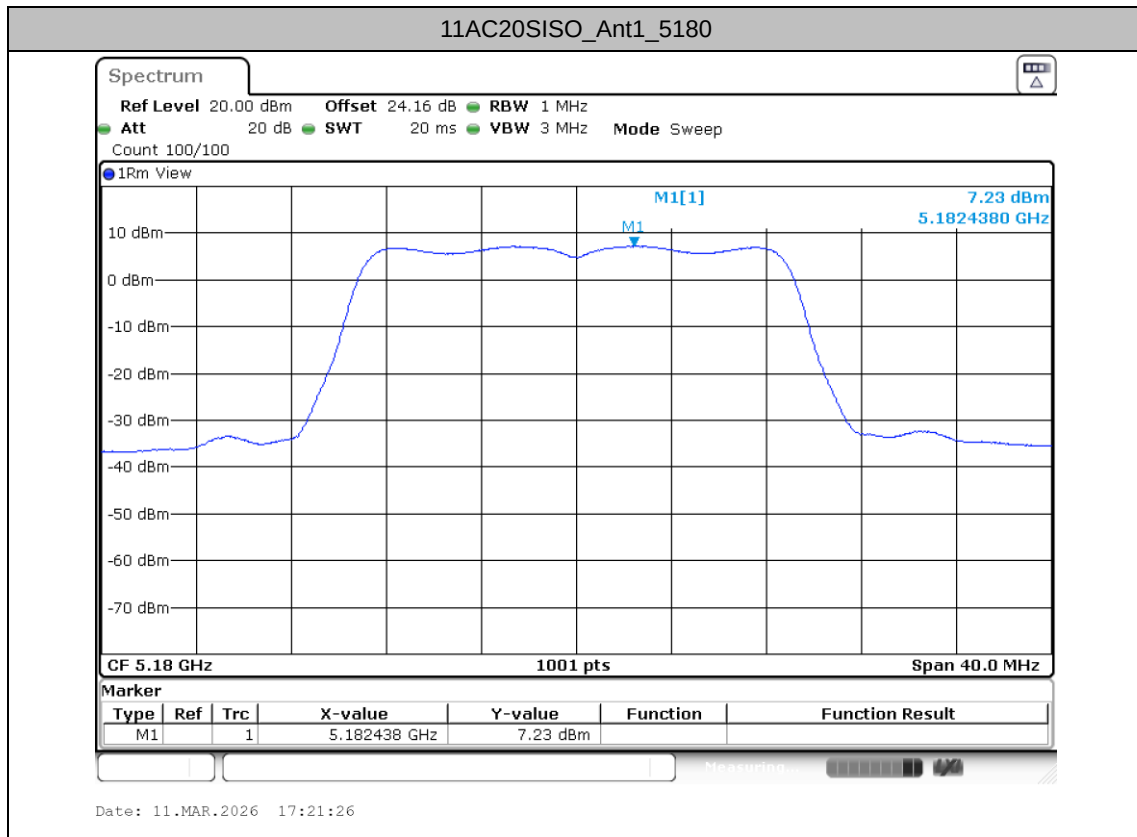


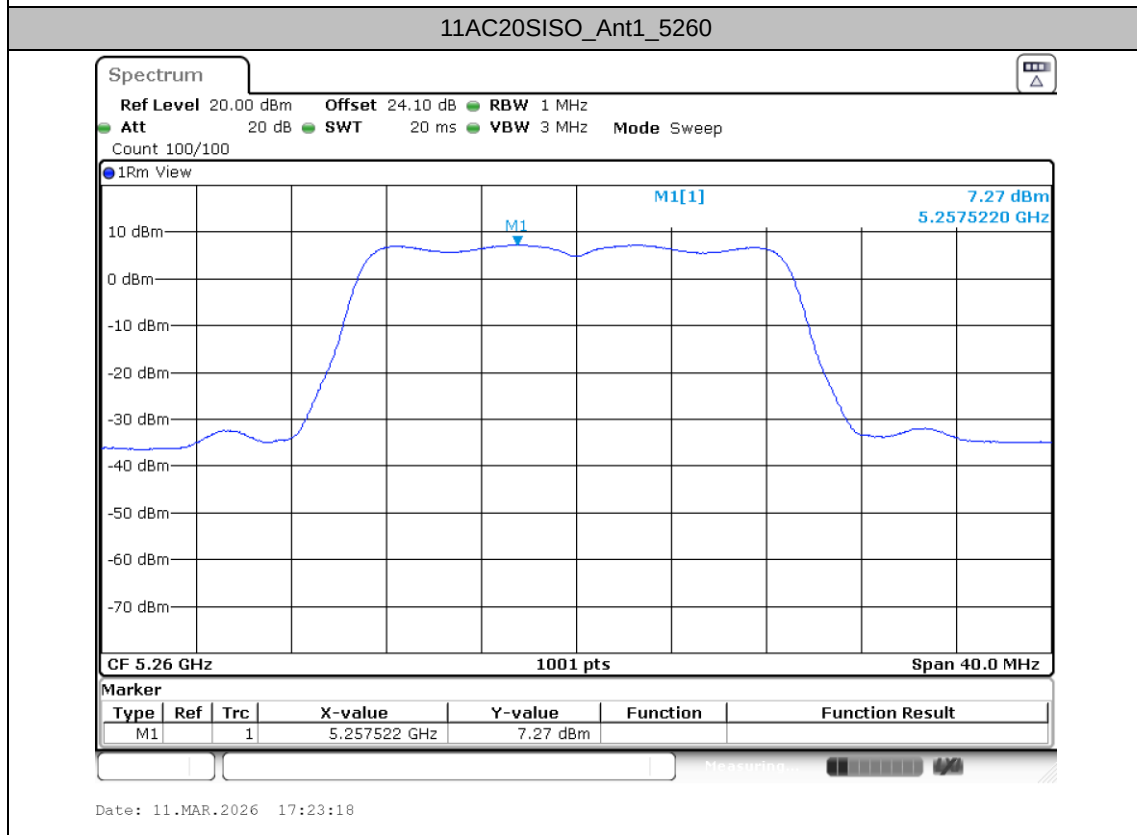
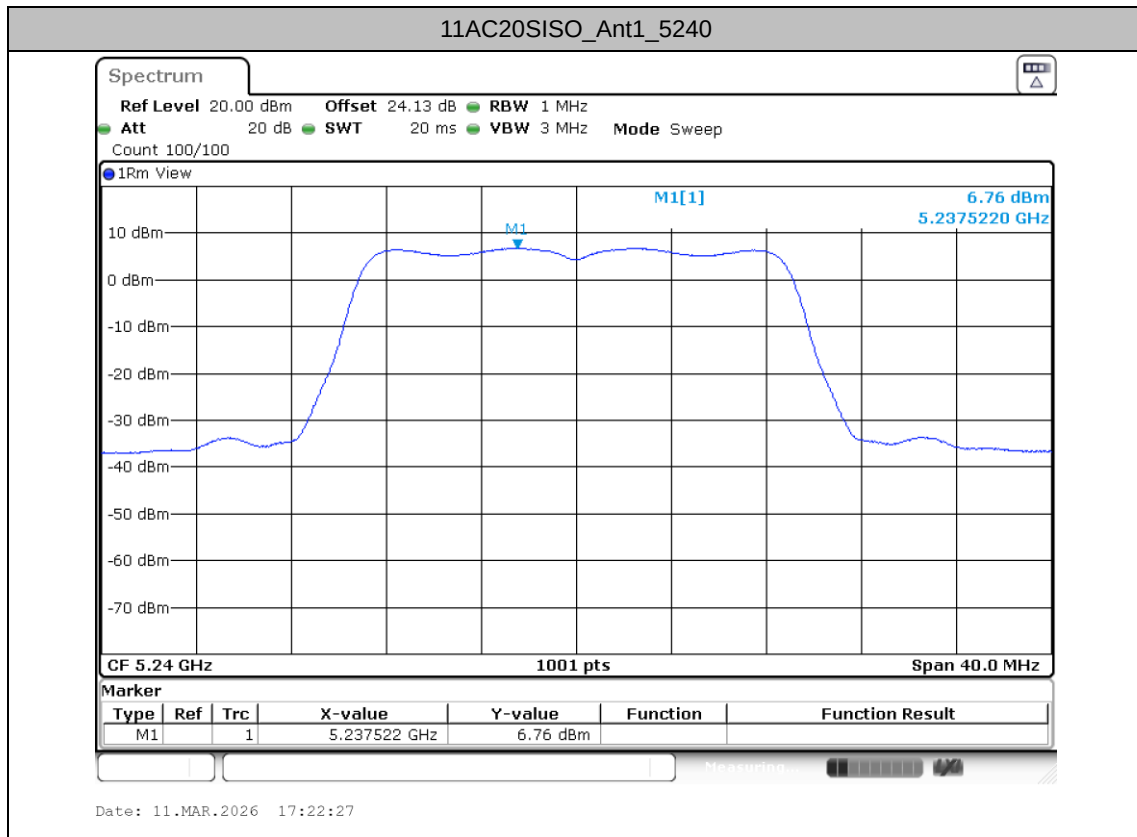


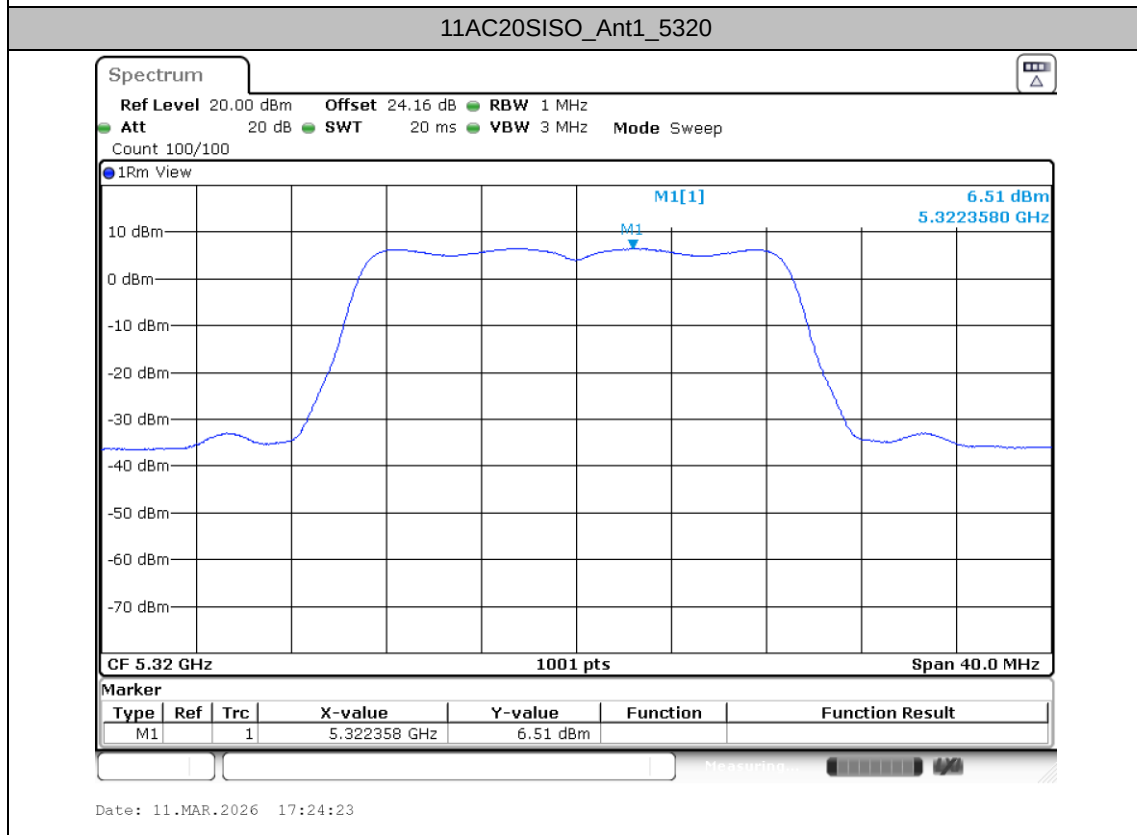
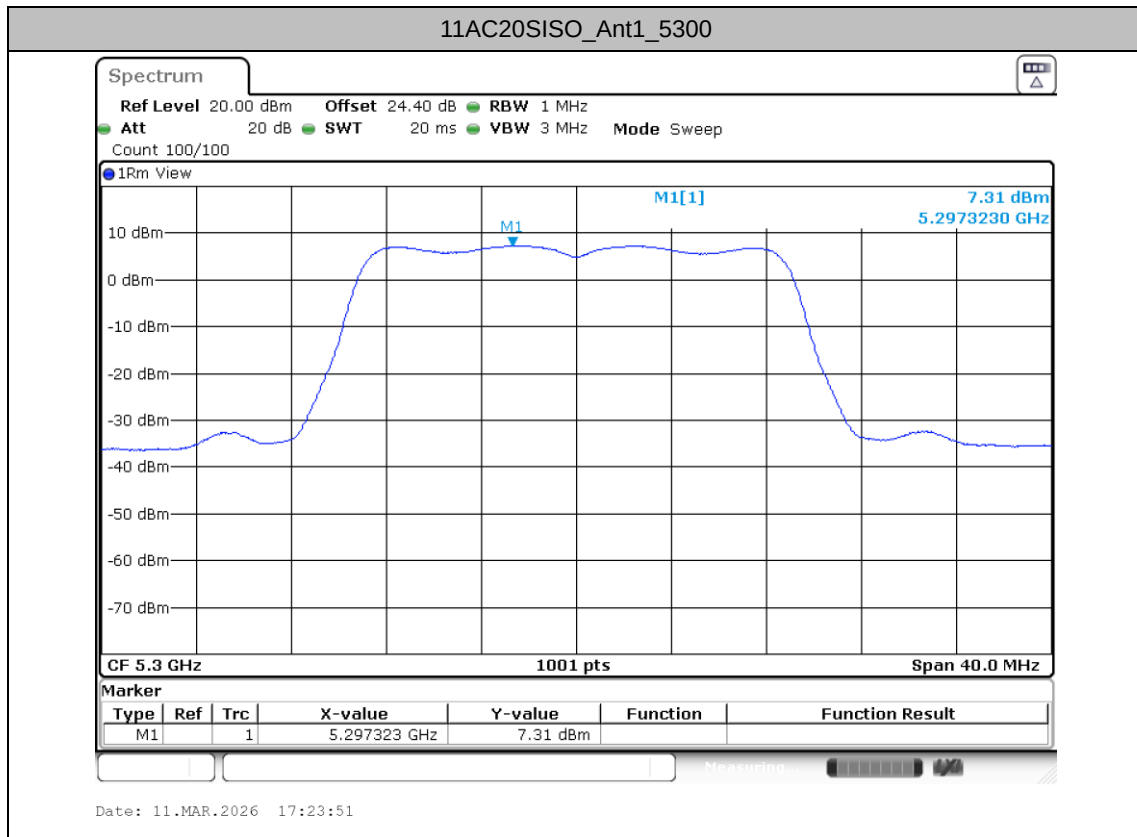





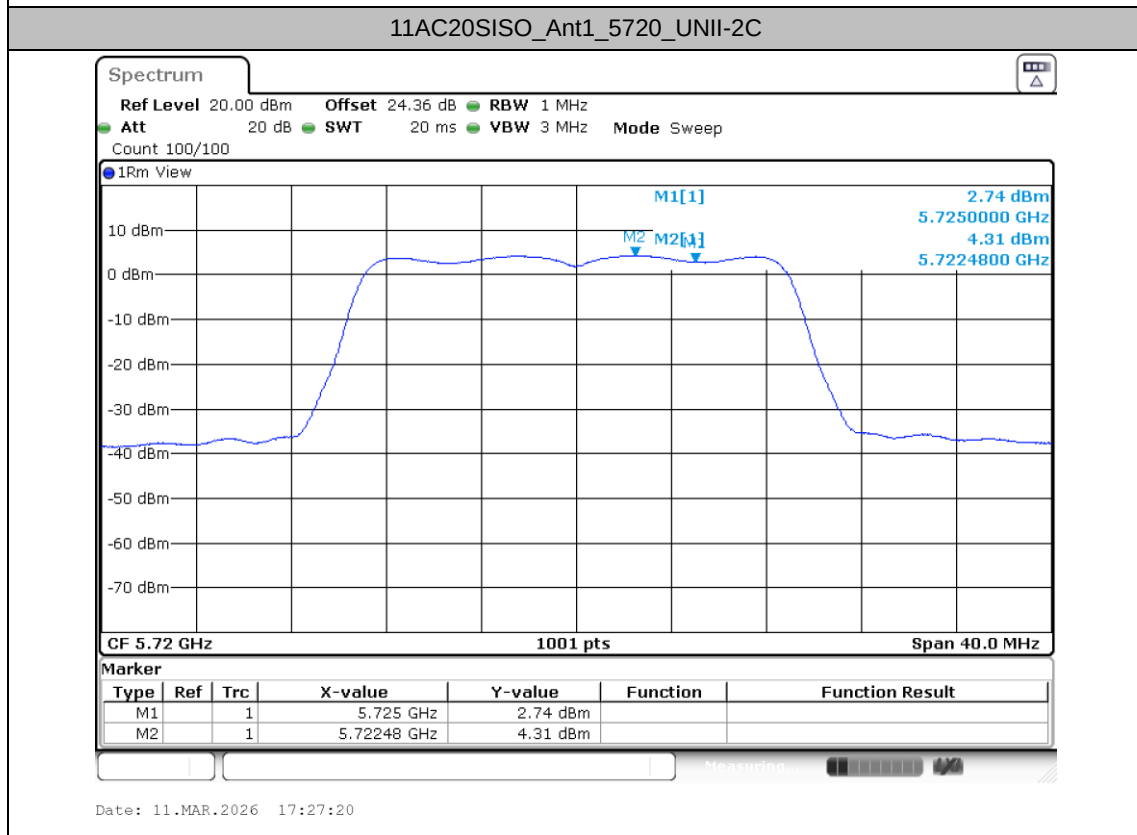
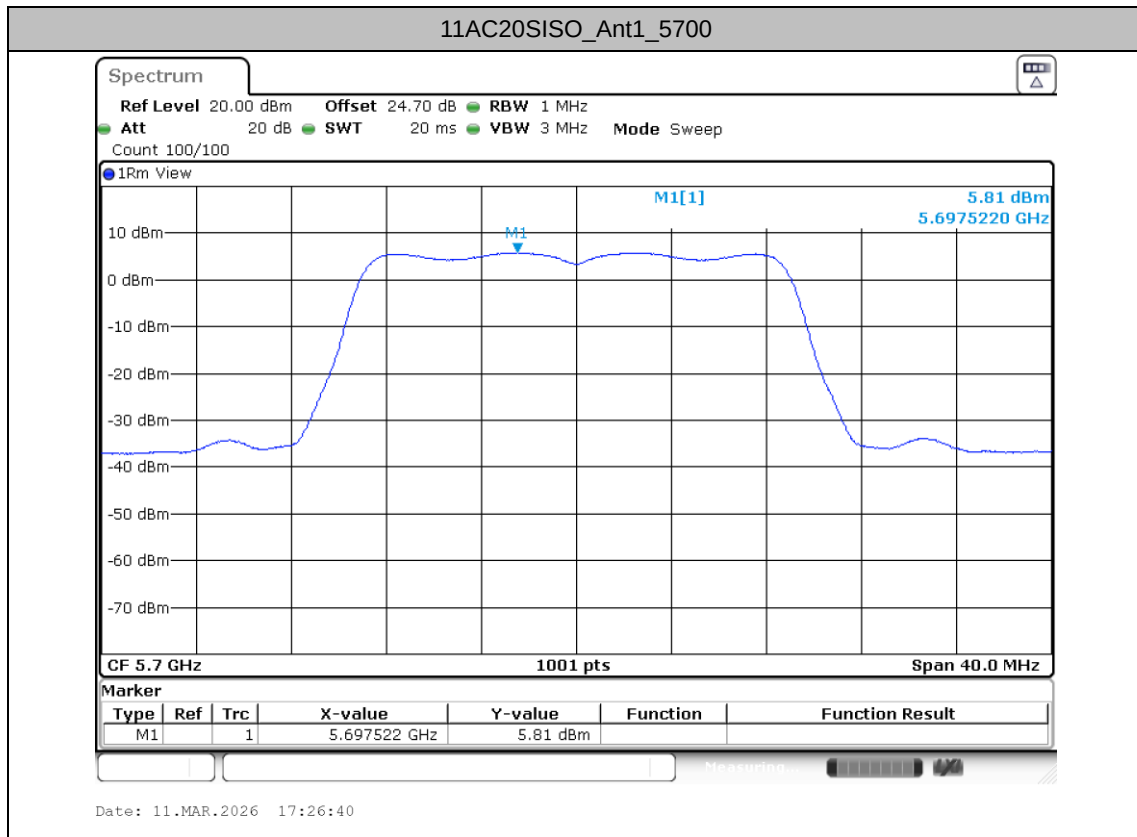


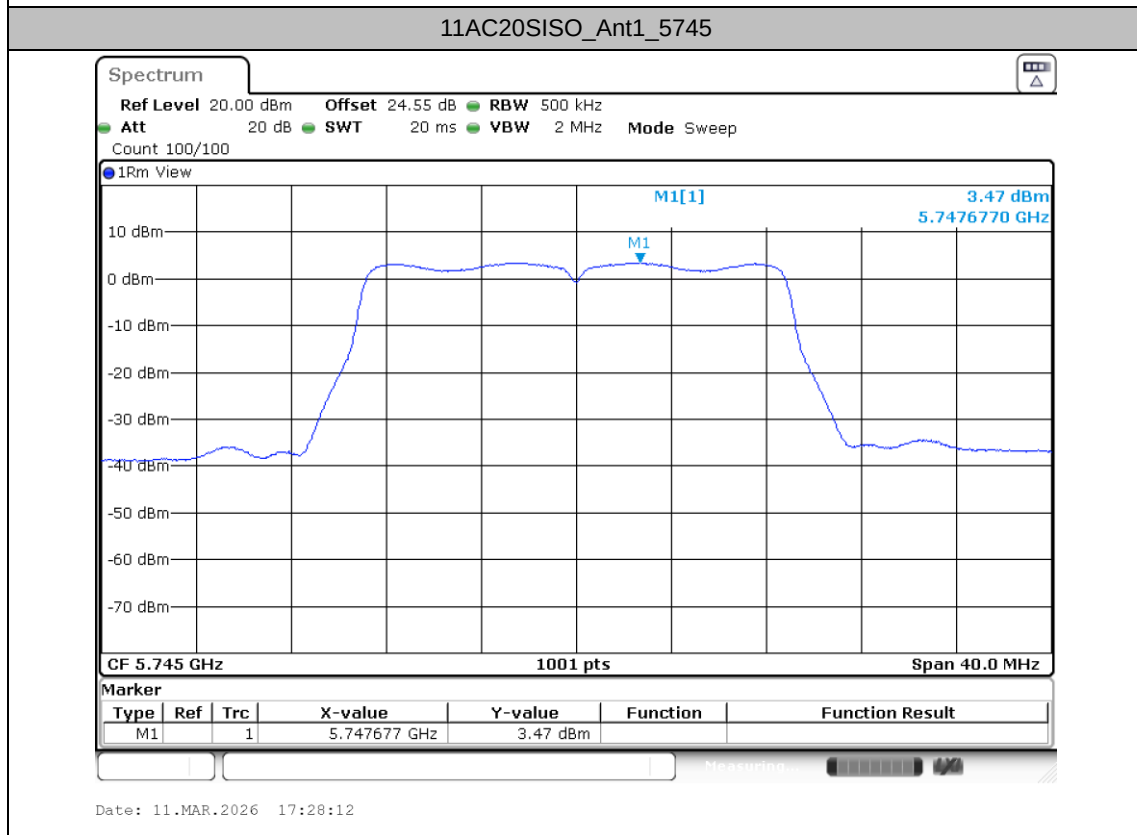
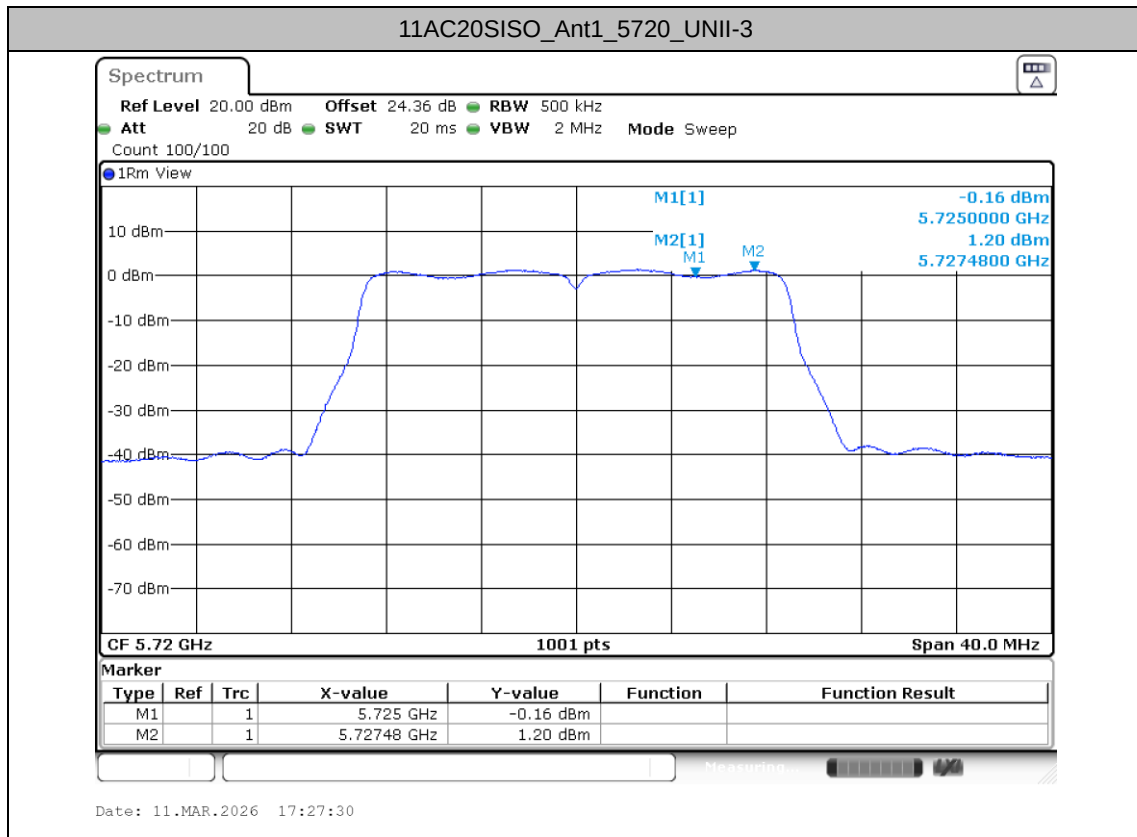


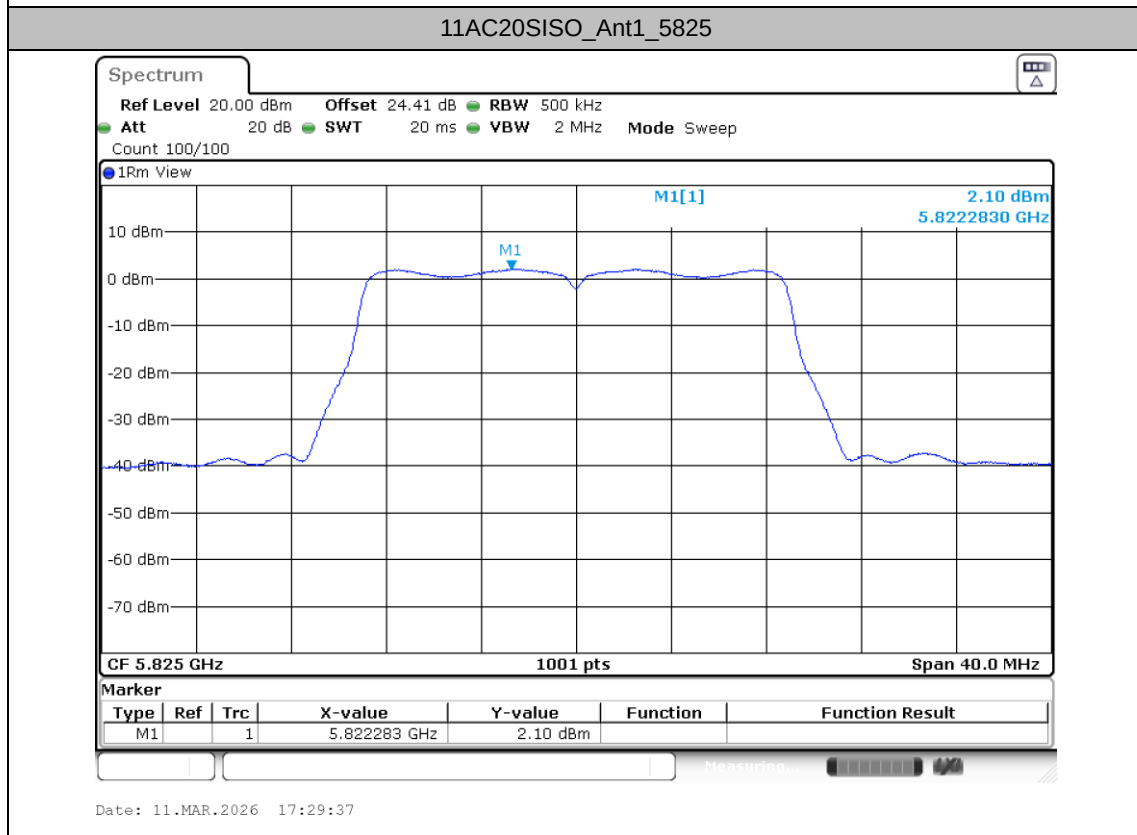
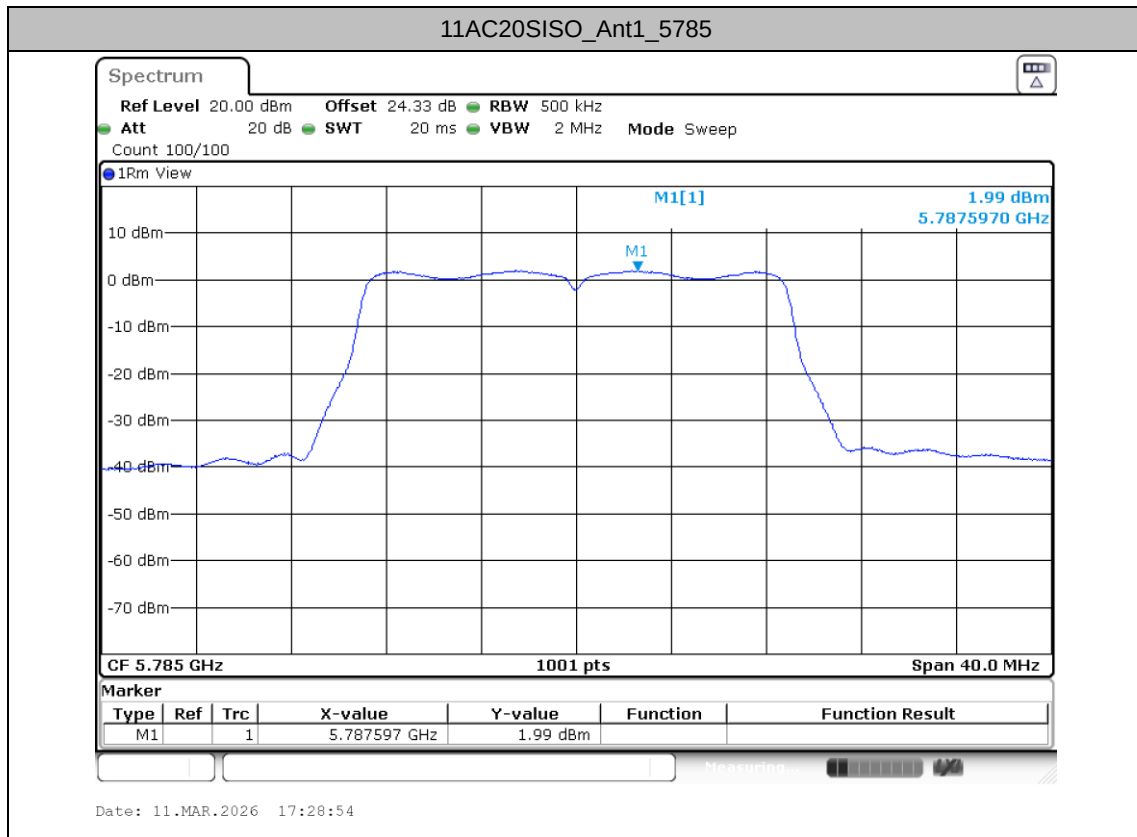


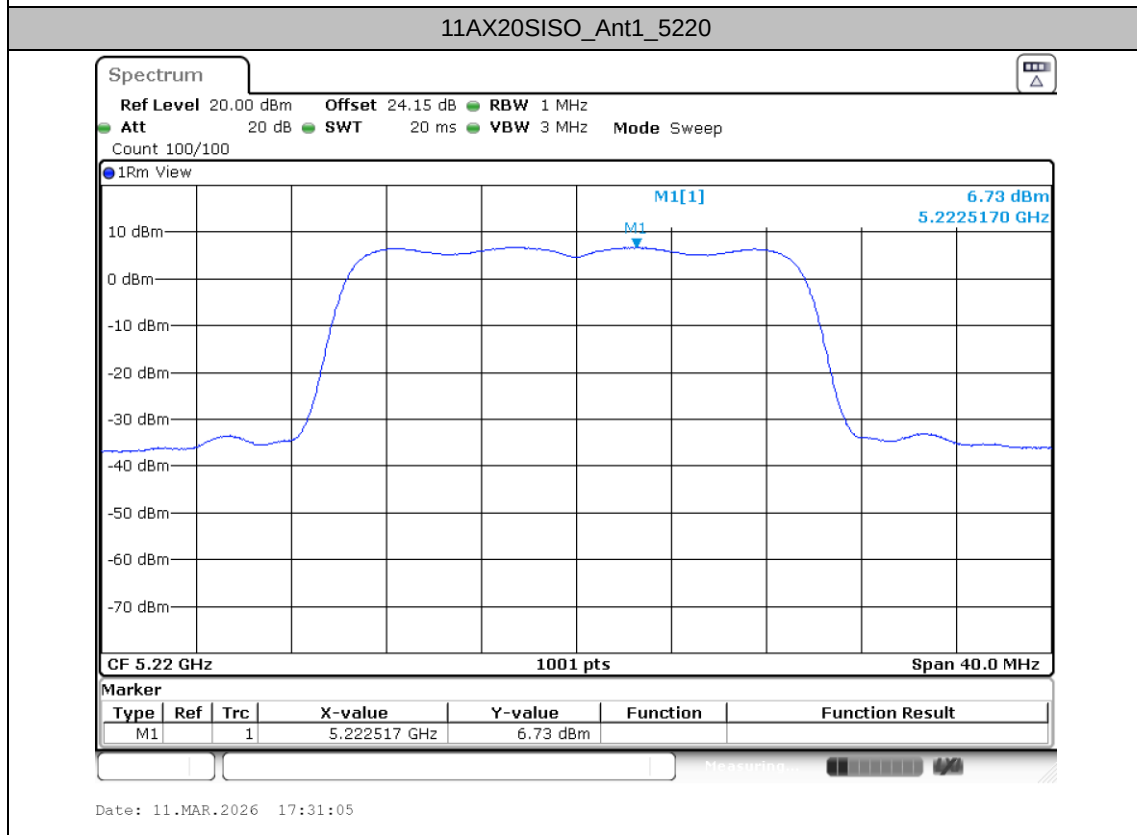
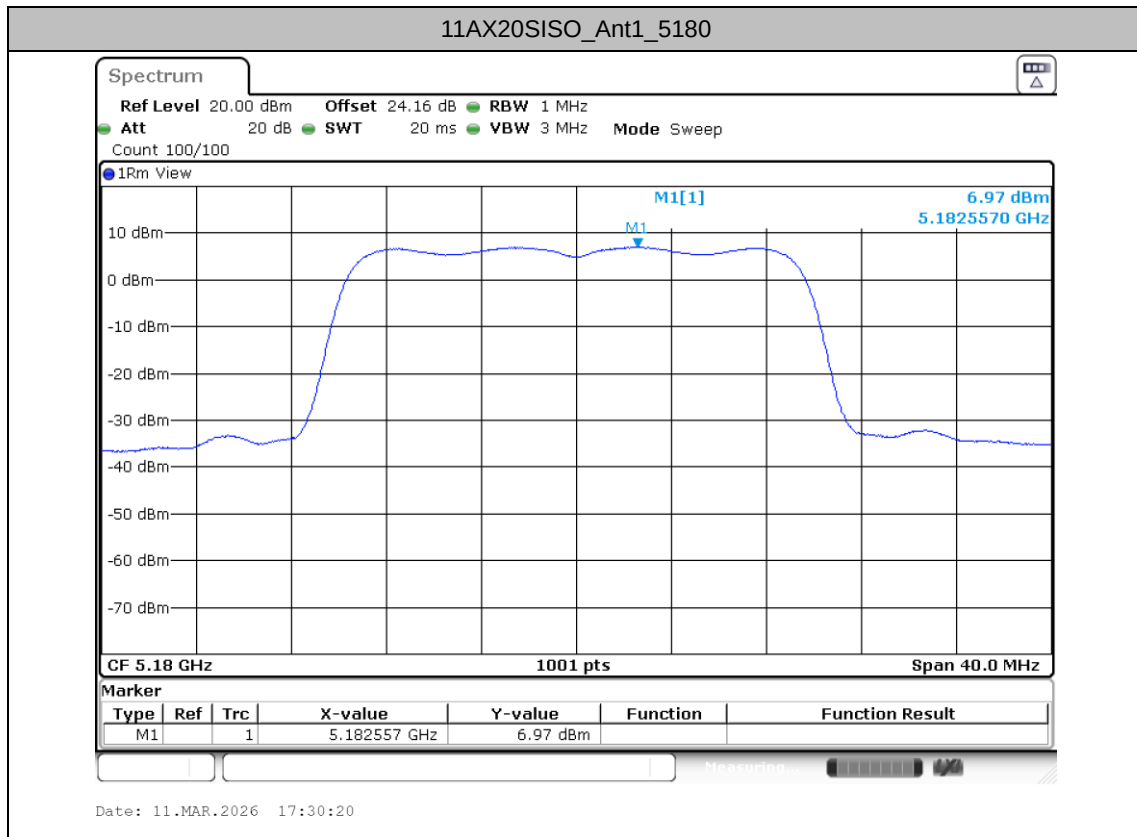



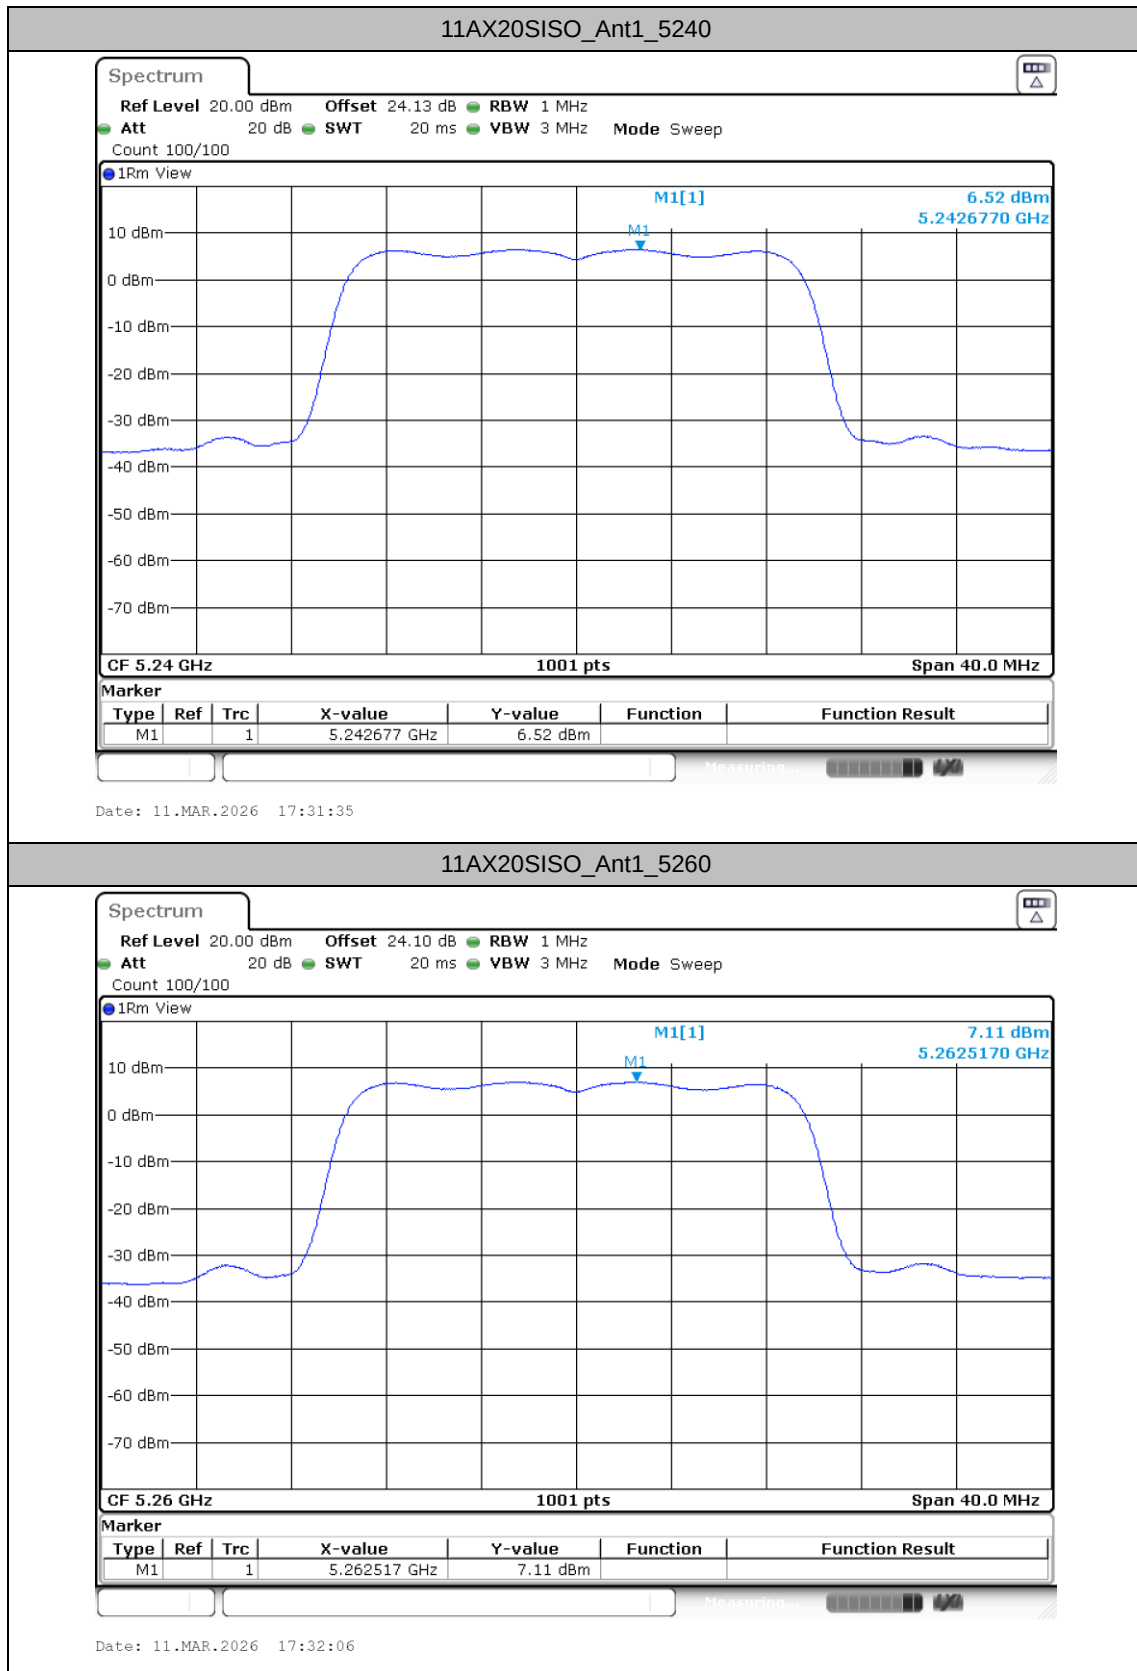


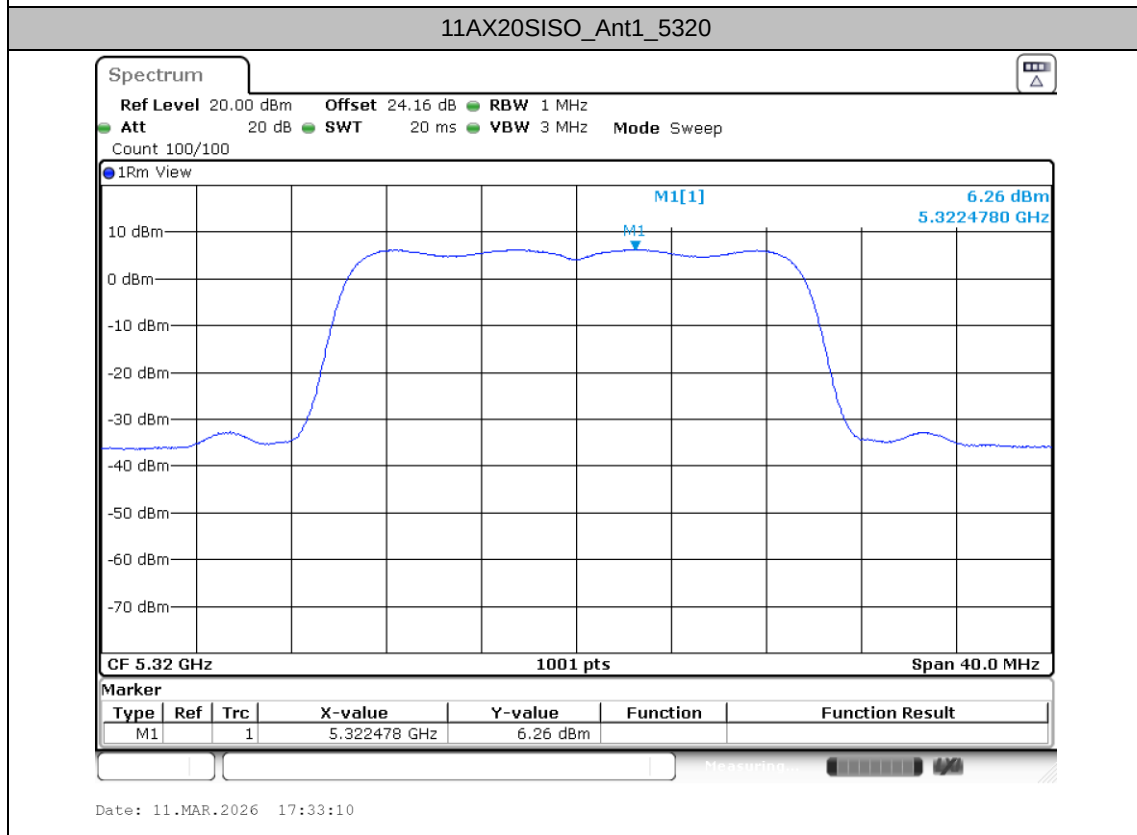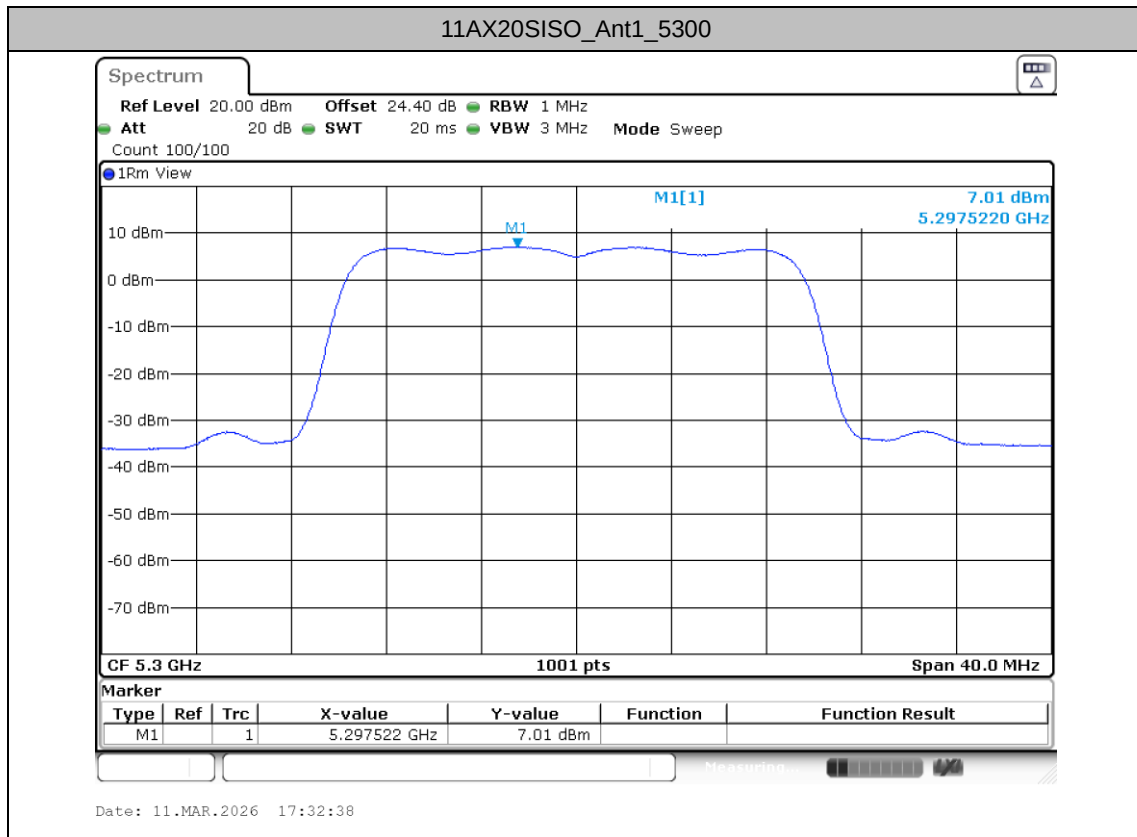

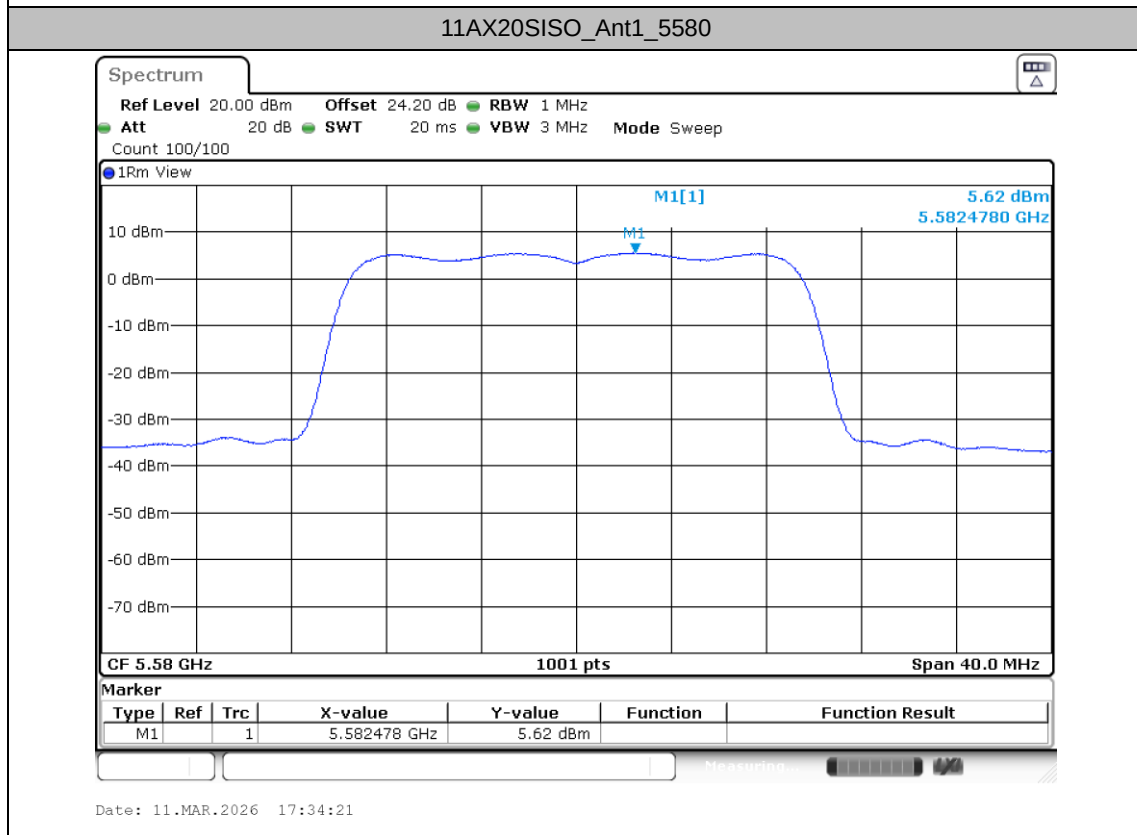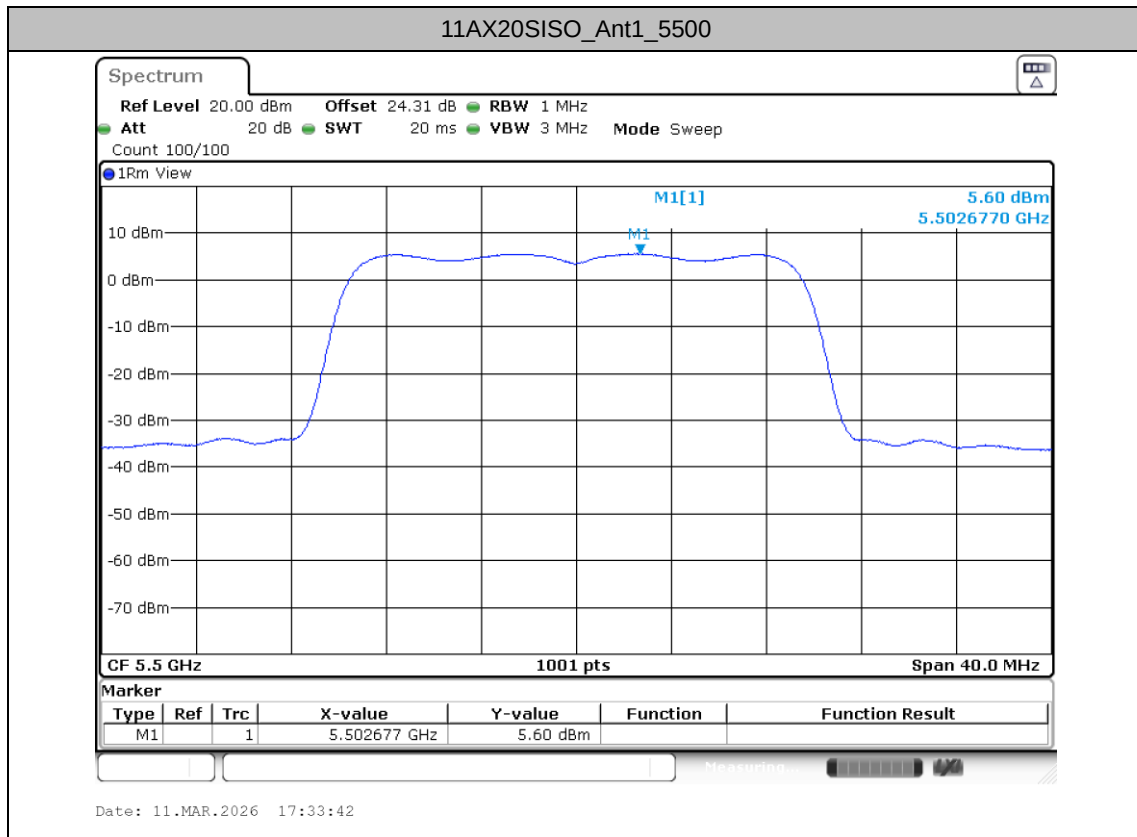

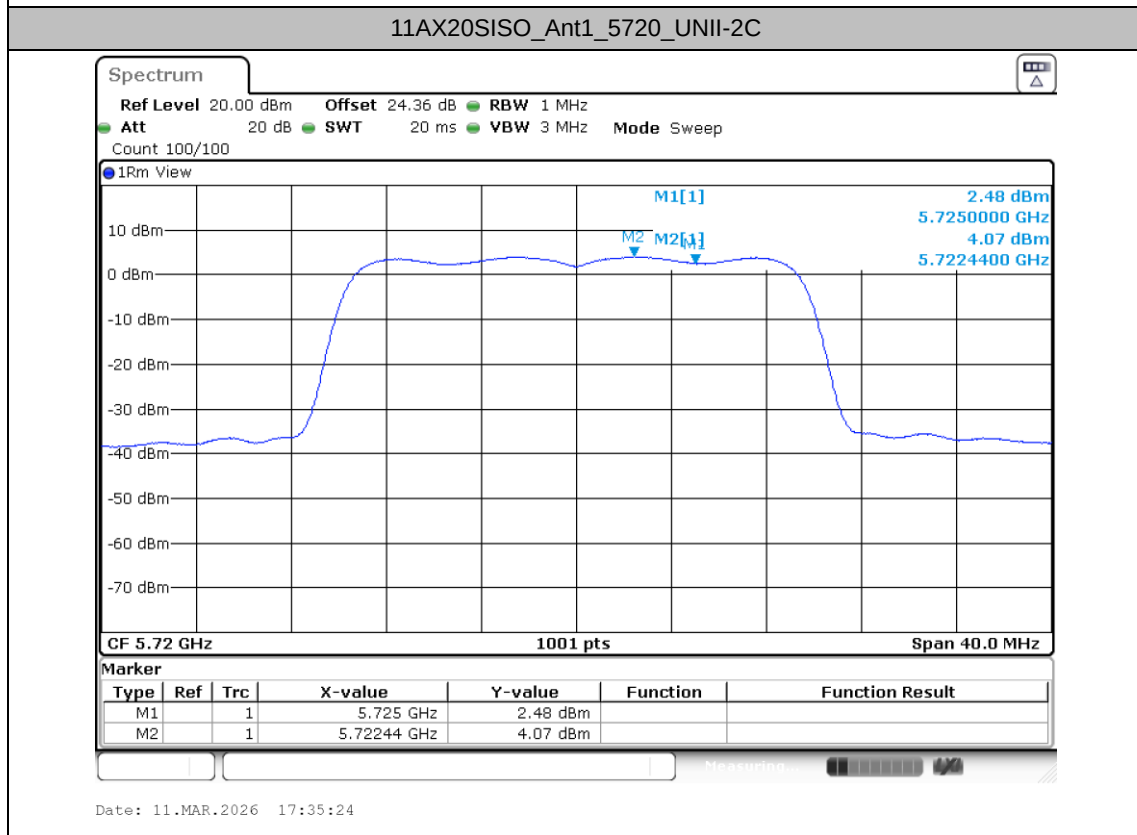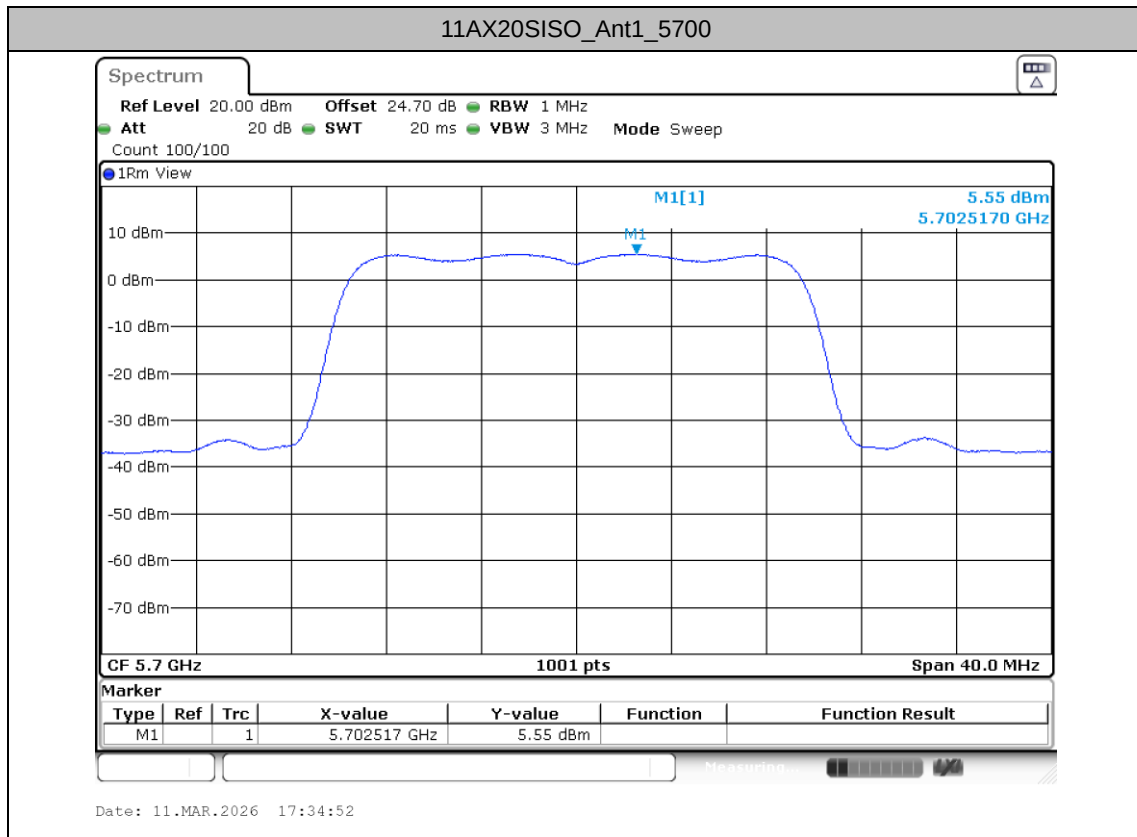

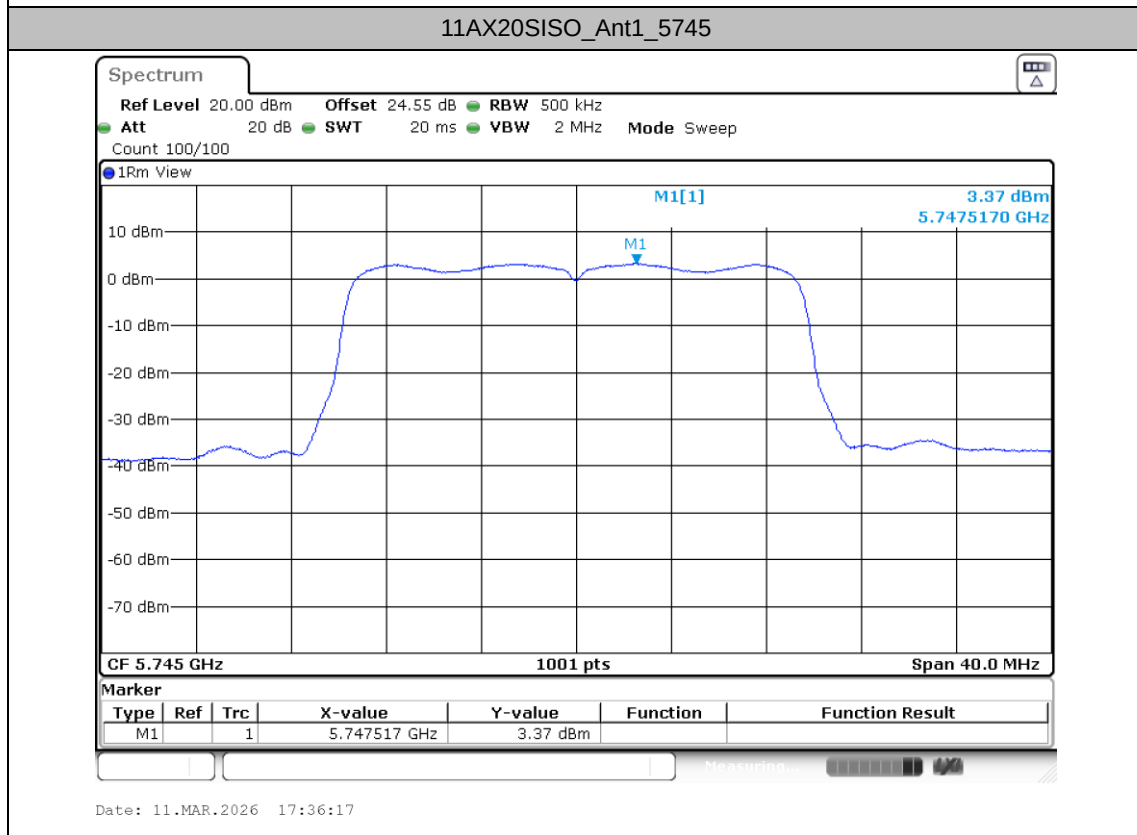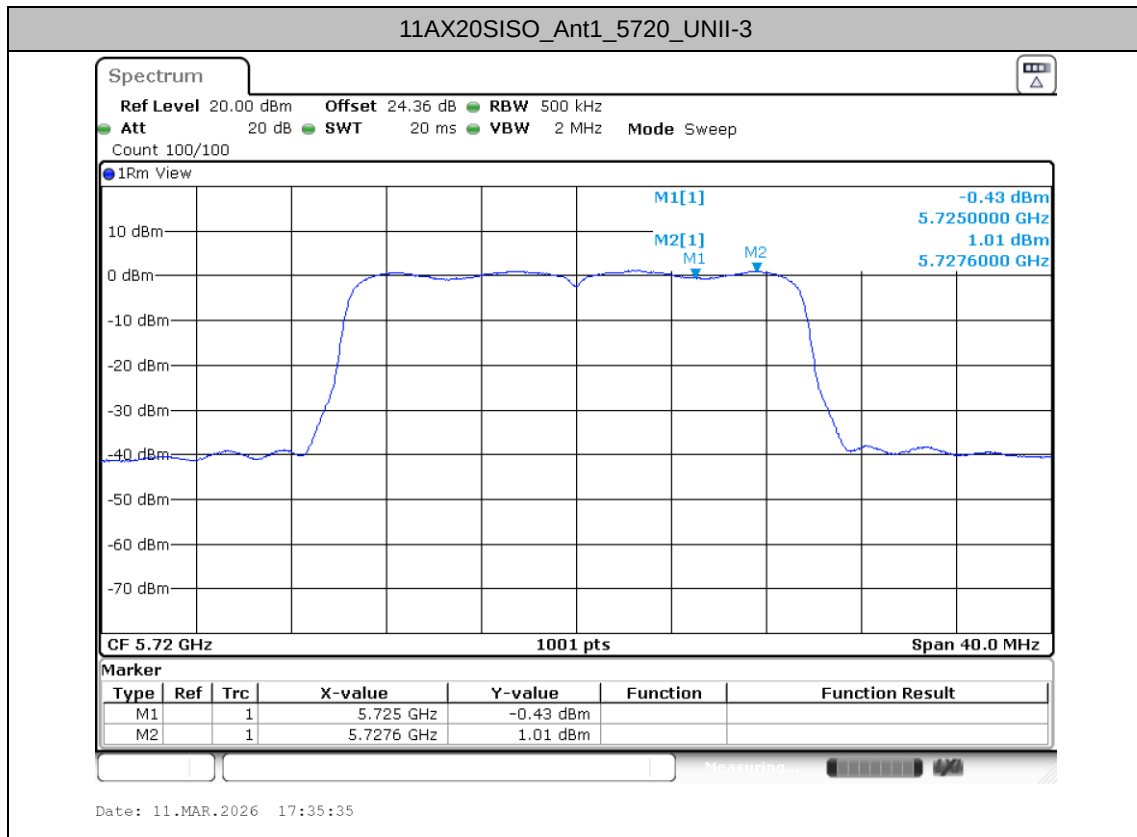

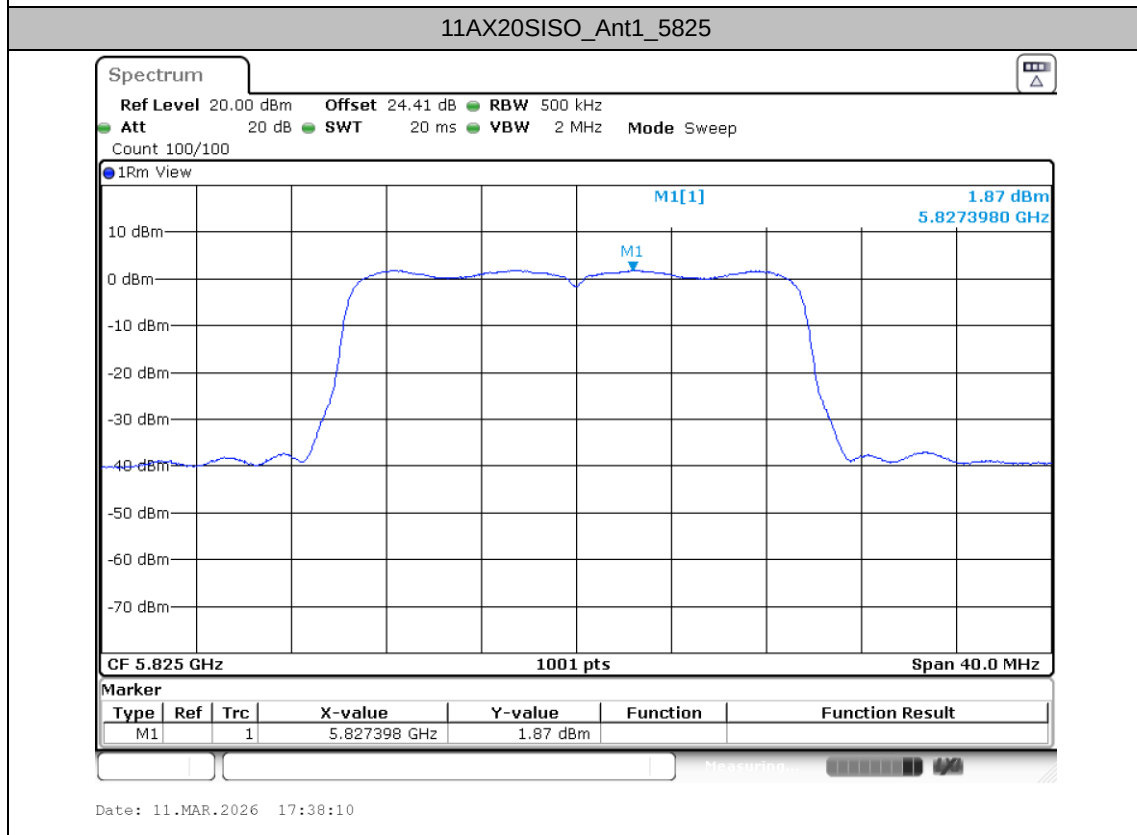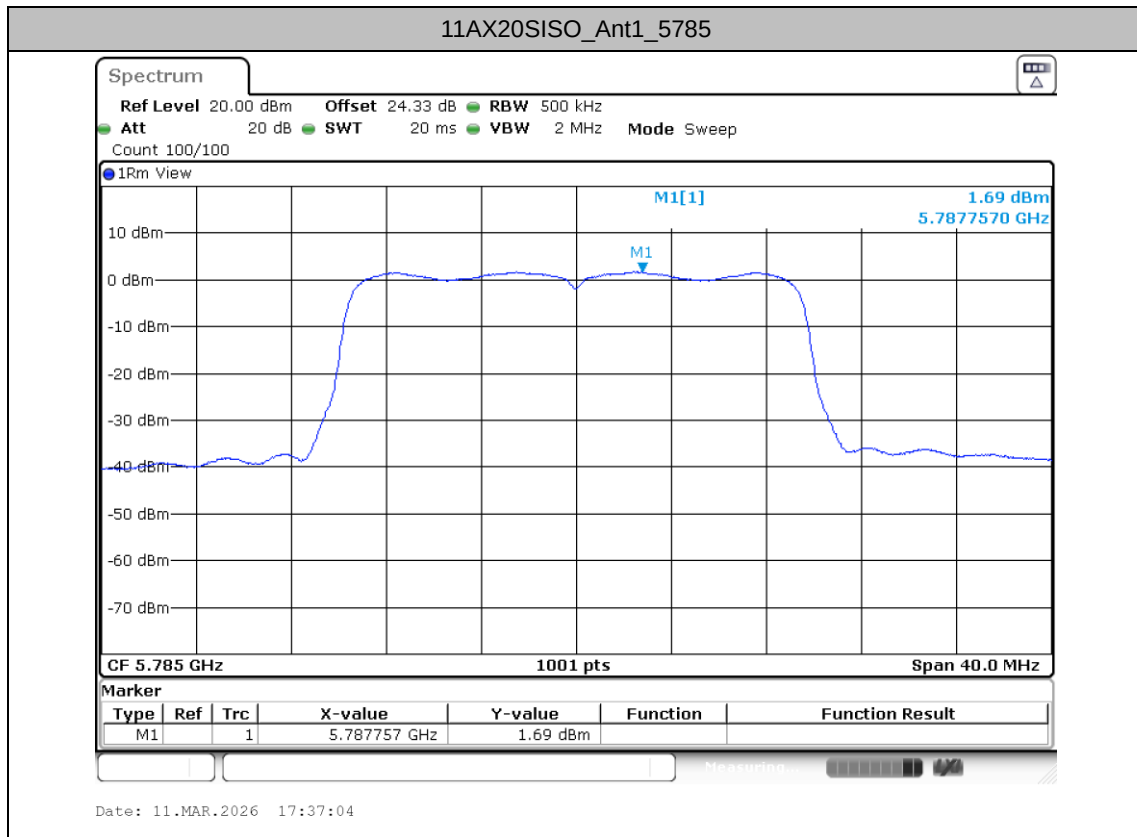



<Single RU>

Maximum power spectral density

Test Result


Test Mode	Antenna	Freq(MHz)	Ru Size	Ru Index	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11AX20SISO	Ant1	5180	26Tone	RU0	6.48	≤11.00	PASS
			52Tone	RU37	6.56	≤11.00	PASS
			106Tone	RU53	6.38	≤11.00	PASS
		5320	26Tone	RU8	5.85	≤11.00	PASS
			52Tone	RU40	6.1	≤11.00	PASS
			106Tone	RU54	5.93	≤11.00	PASS
		5500	26Tone	RU0	5.55	≤11.00	PASS
			52Tone	RU37	5.36	≤11.00	PASS
			106Tone	RU53	5.51	≤11.00	PASS
		5700	26Tone	RU8	5.31	≤11.00	PASS
			52Tone	RU40	5.35	≤11.00	PASS
			106Tone	RU54	5.4	≤11.00	PASS
		5745	26Tone	RU0	2.96	≤30.00	PASS
			52Tone	RU37	2.92	≤30.00	PASS
			106Tone	RU53	3.12	≤30.00	PASS
		5825	26Tone	RU8	1.29	≤30.00	PASS
			52Tone	RU40	1.42	≤30.00	PASS
			106Tone	RU54	1.71	≤30.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.



2.The Duty Cycle Factor and is compensated in the graph.






Test Graphs


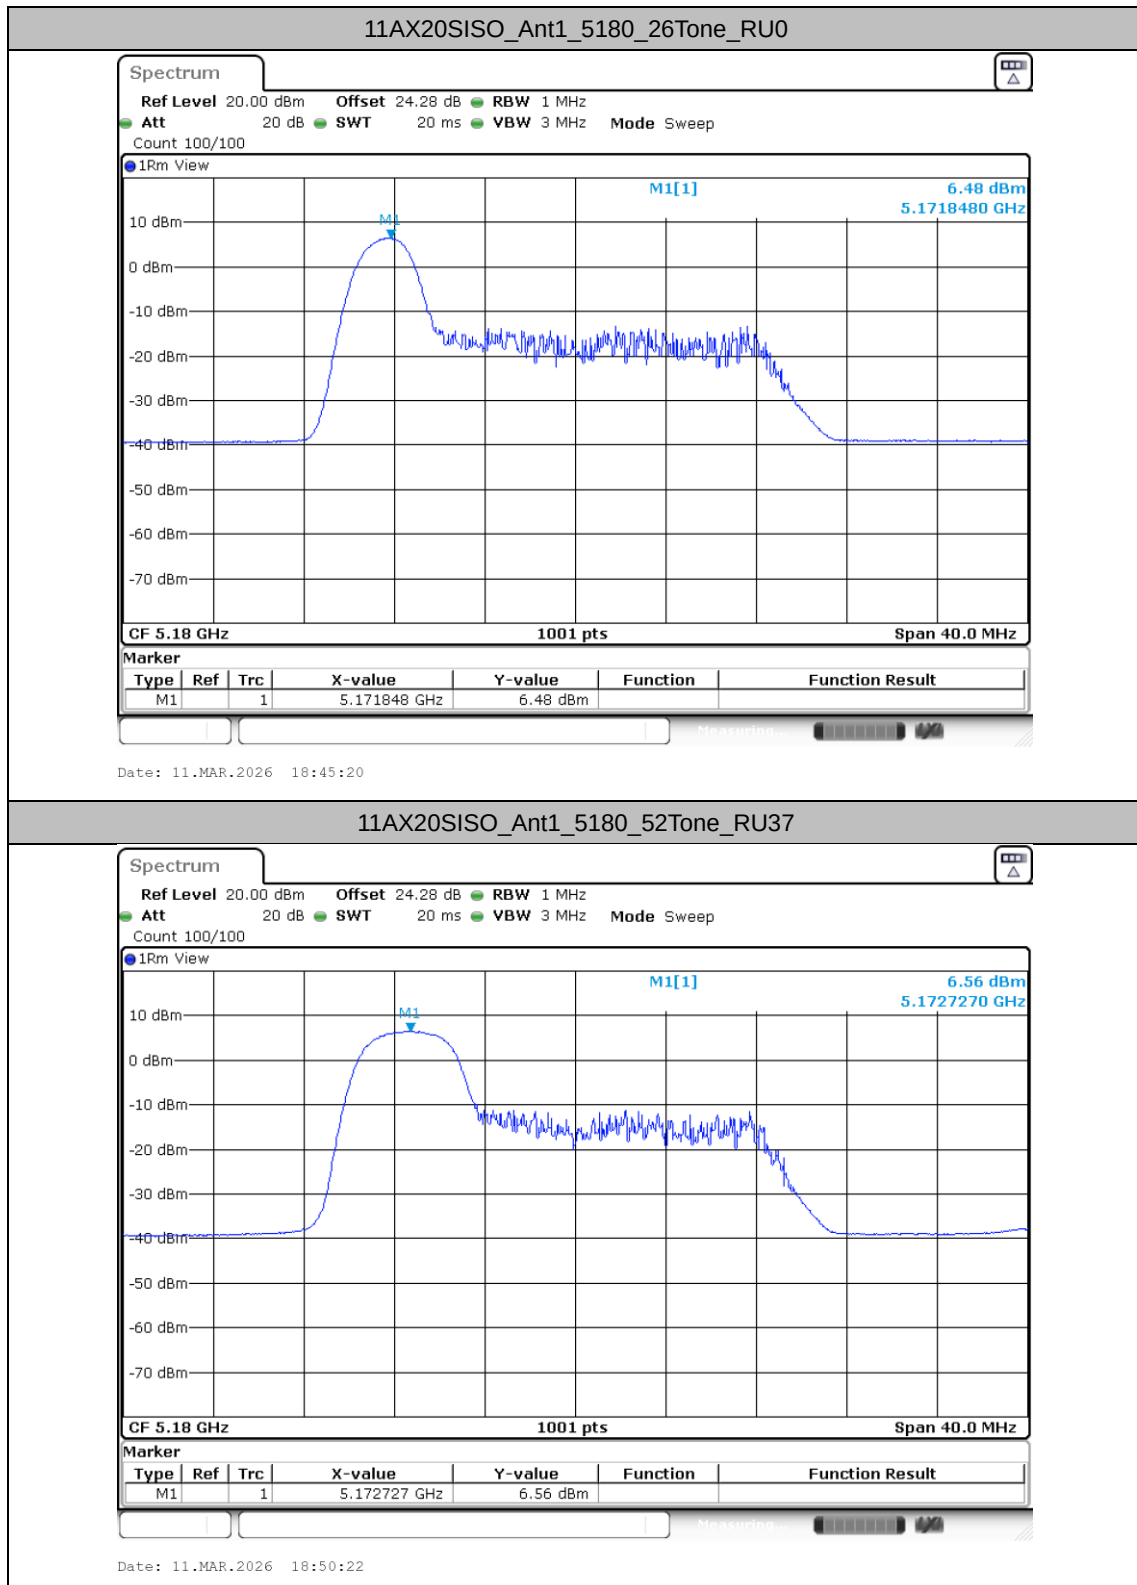



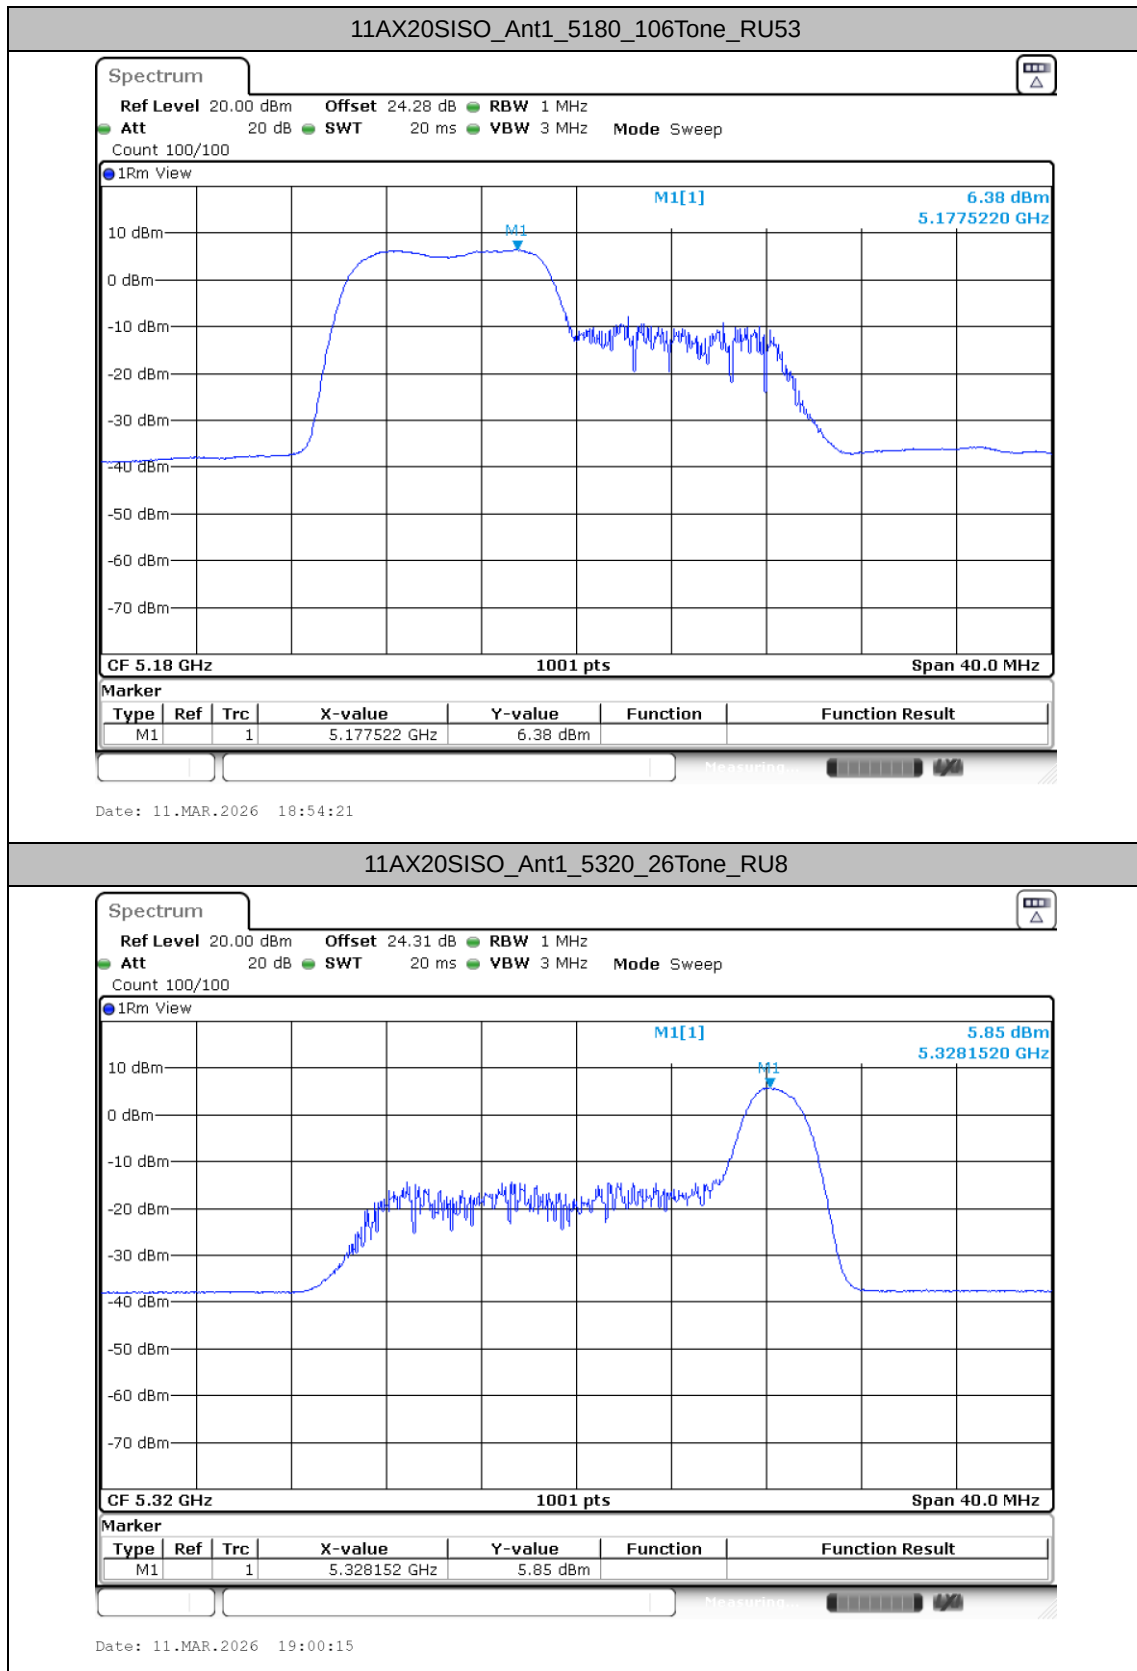


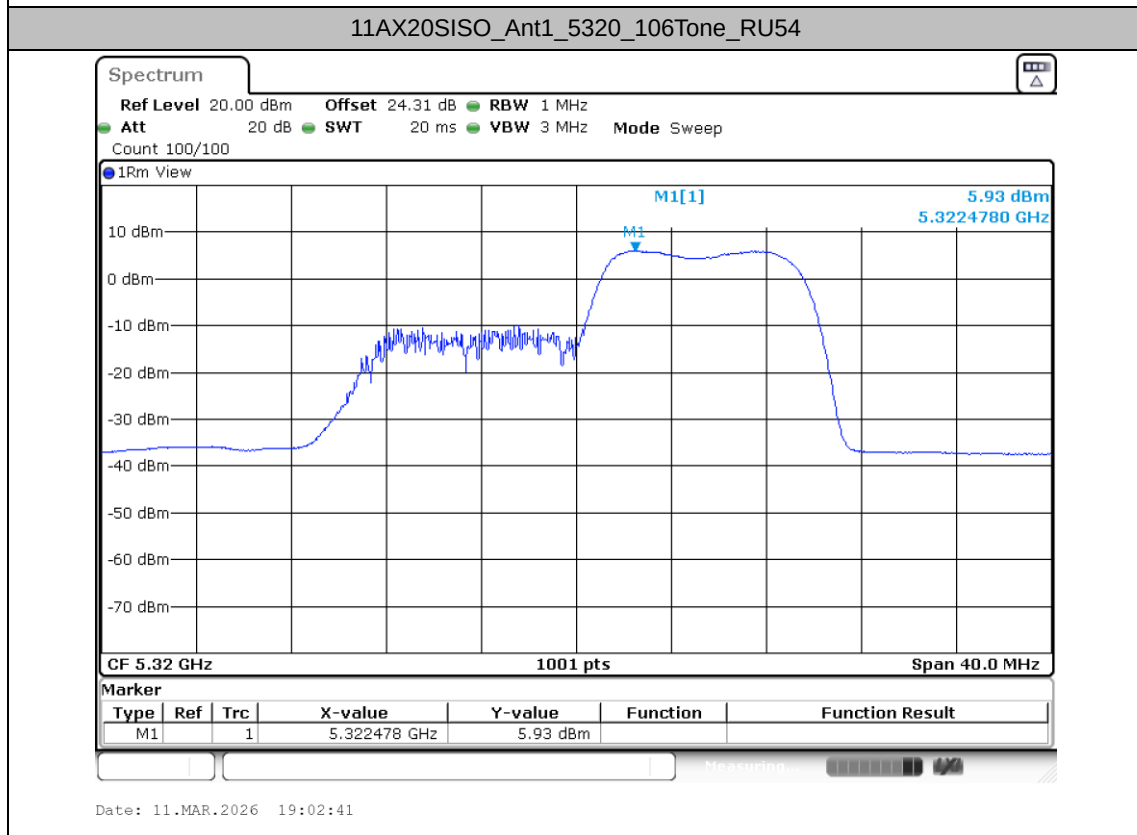
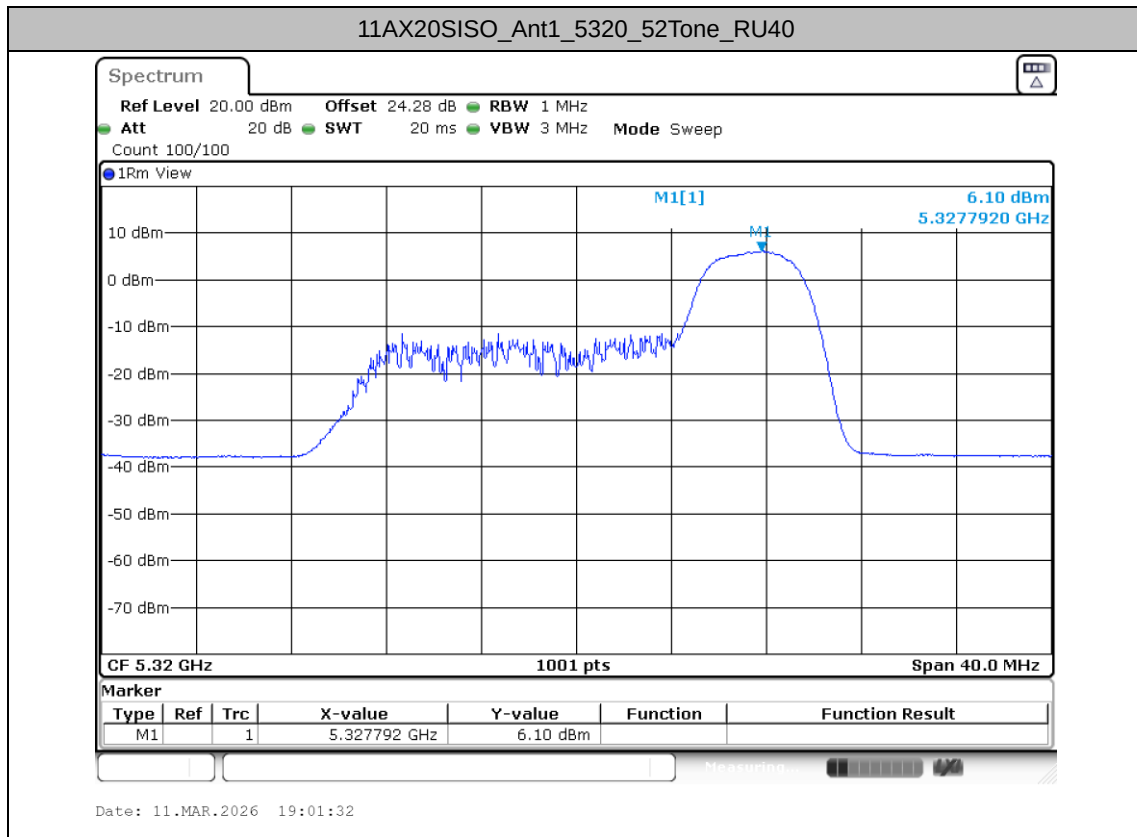


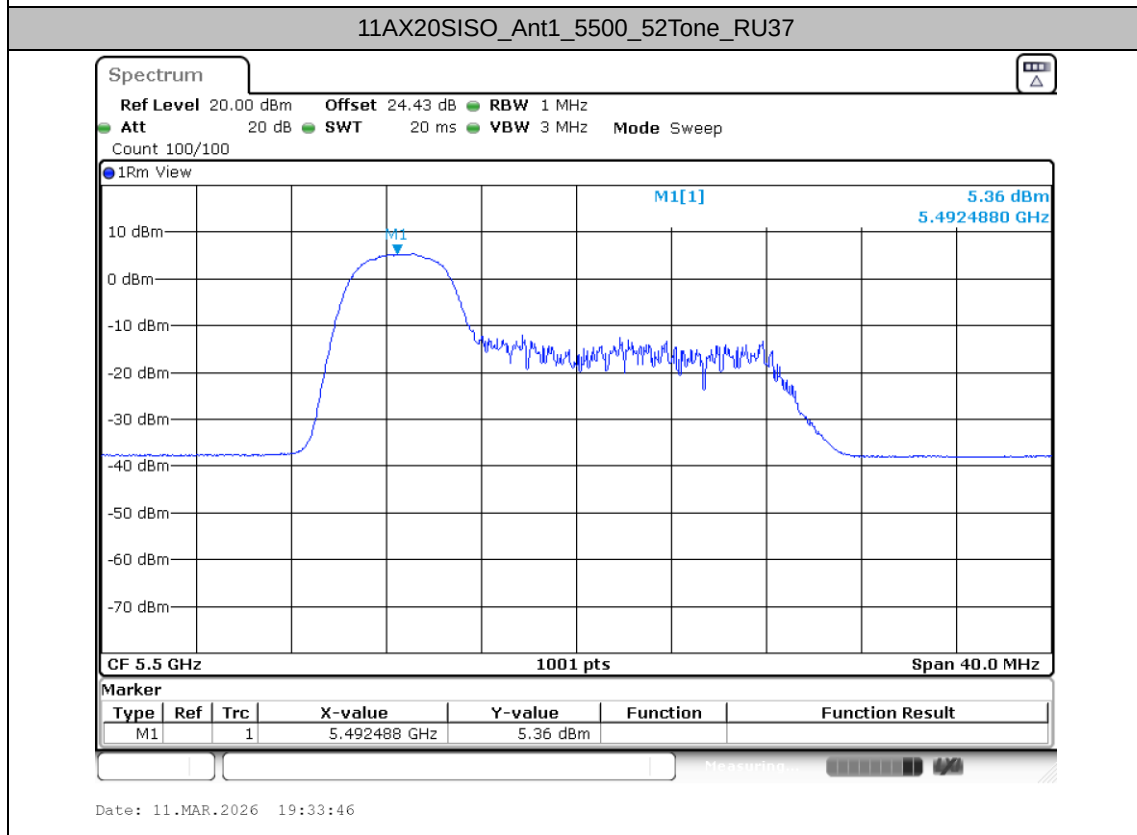
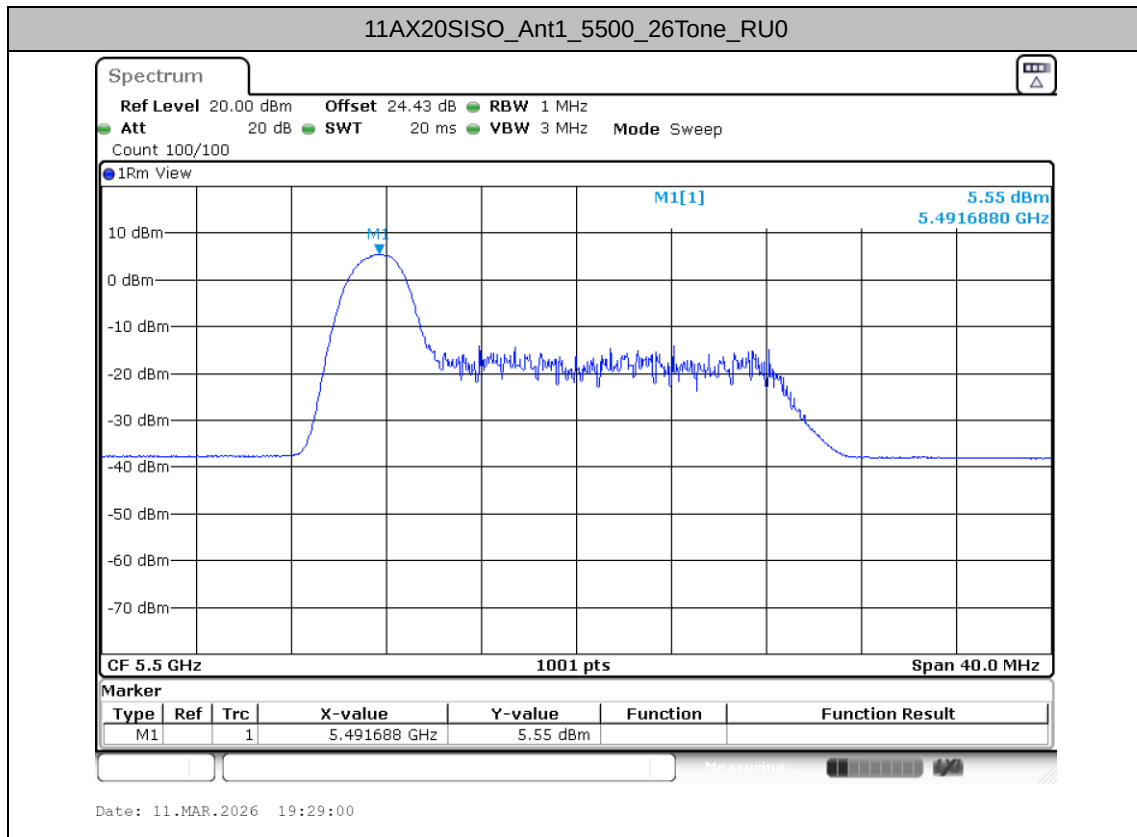


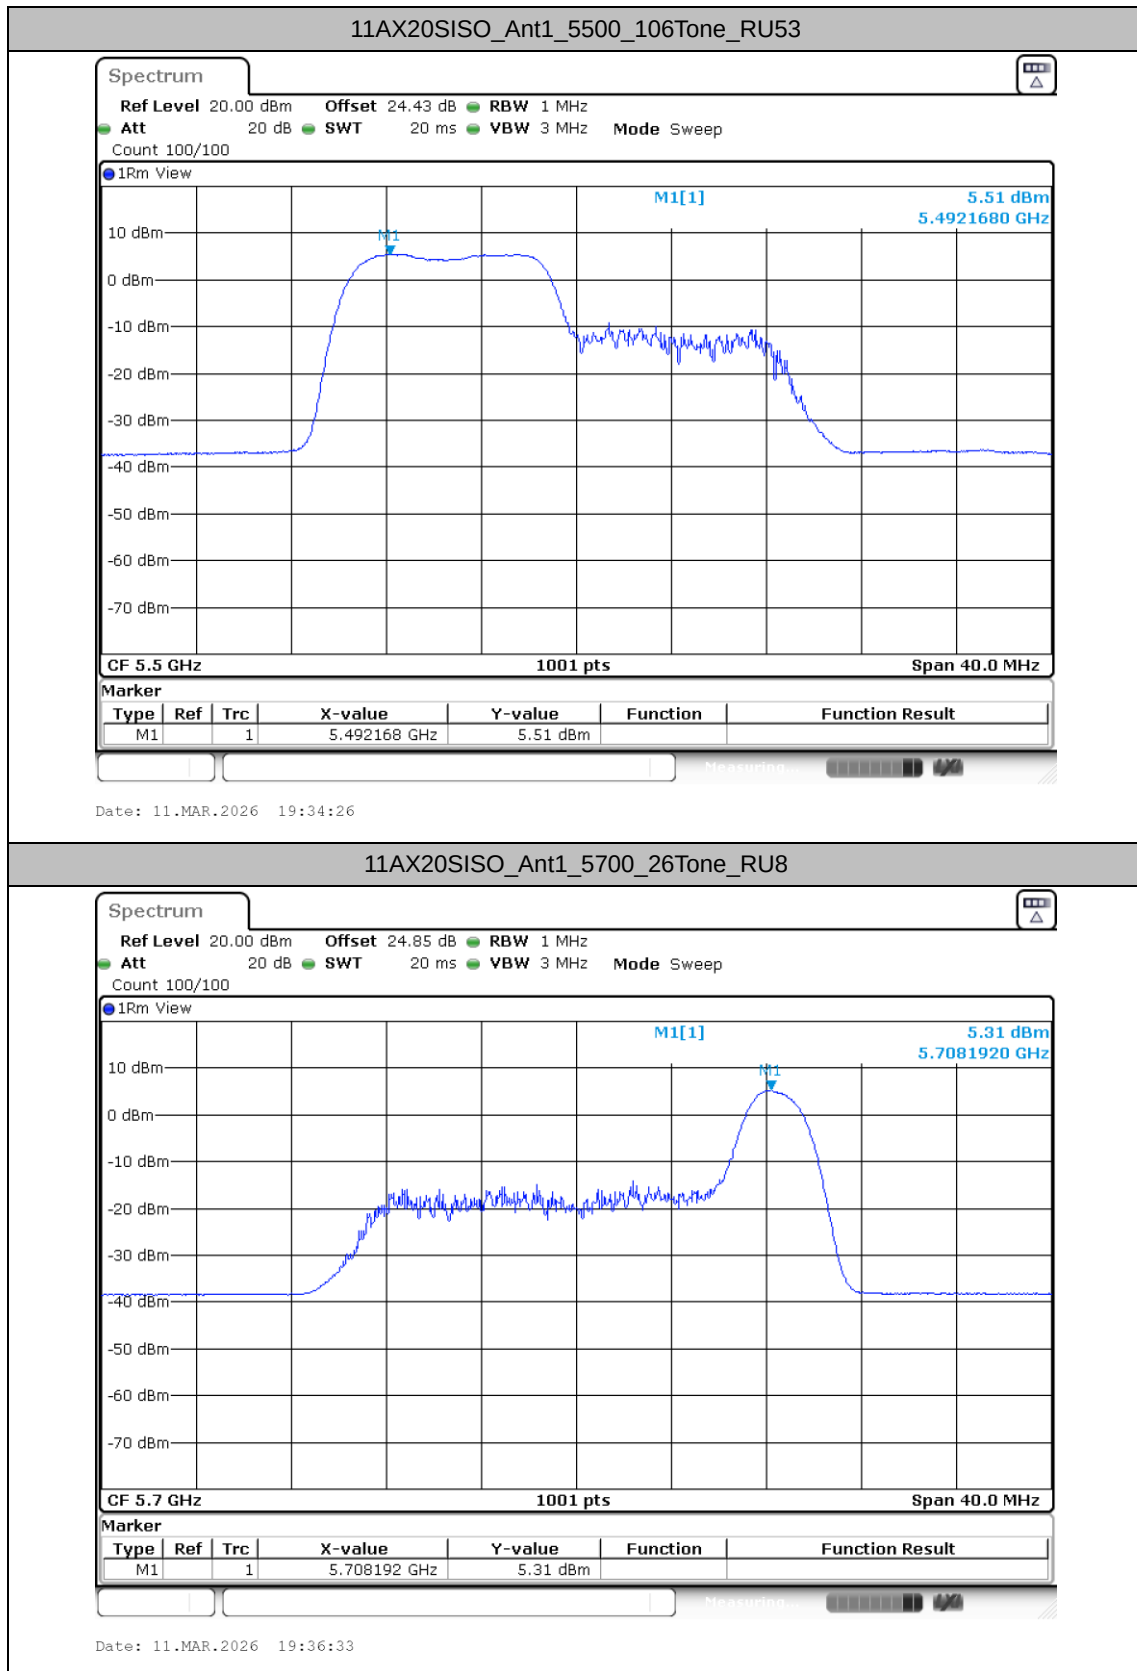

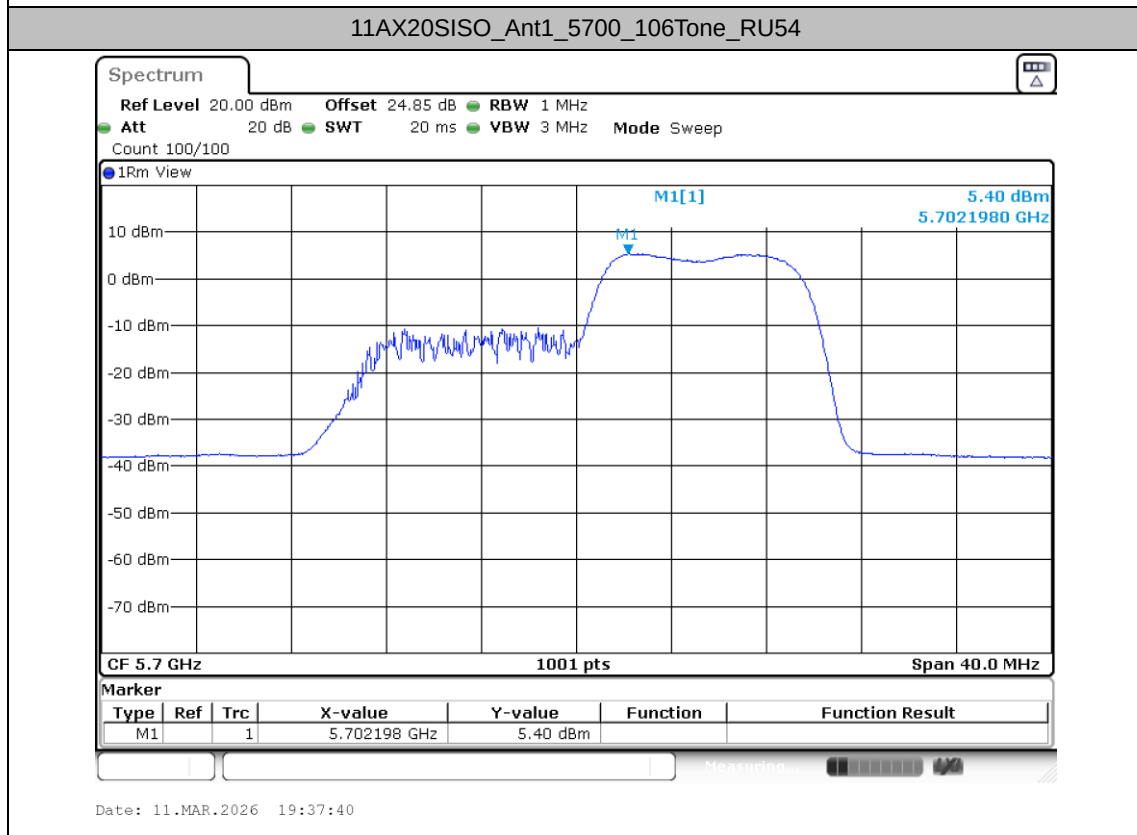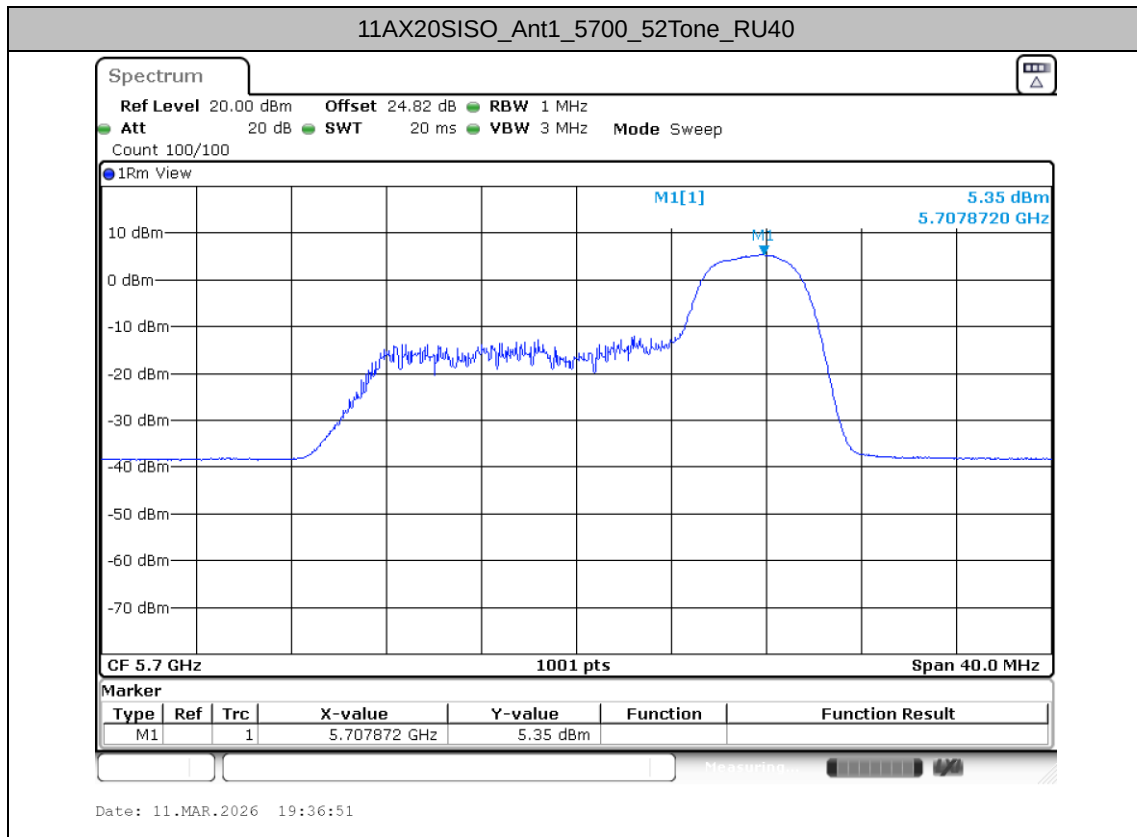


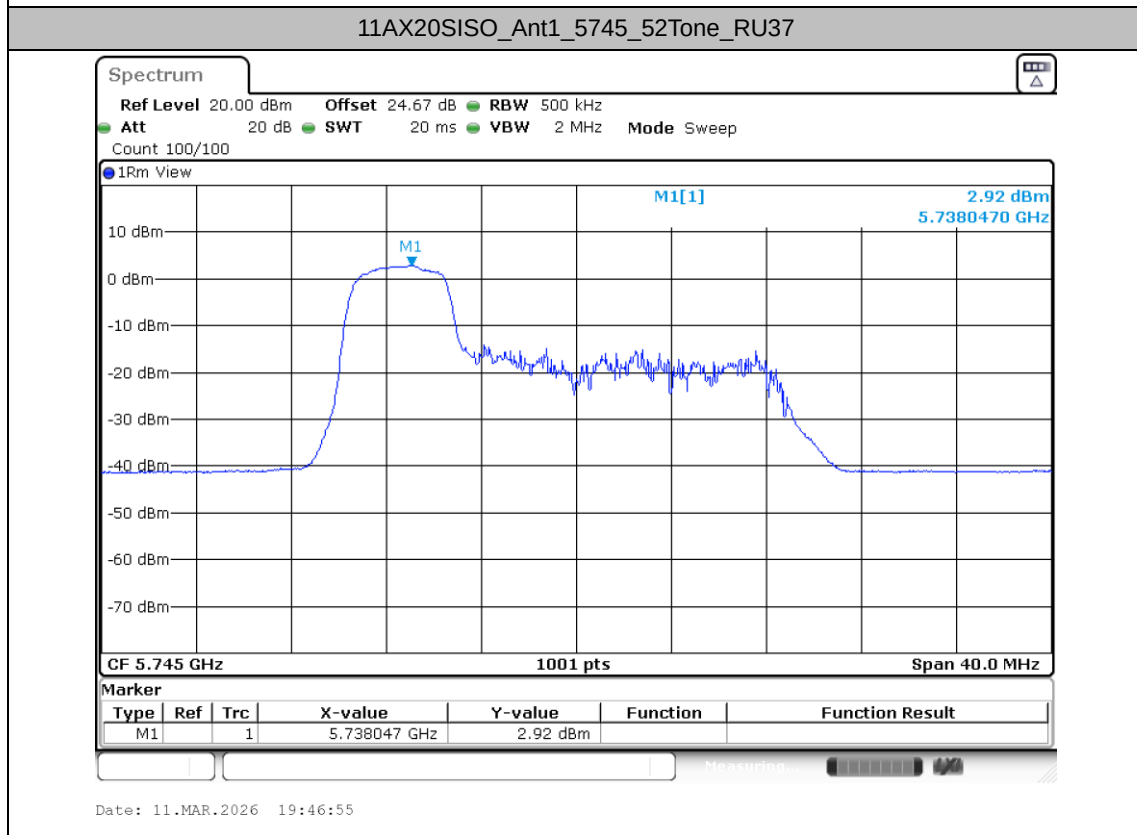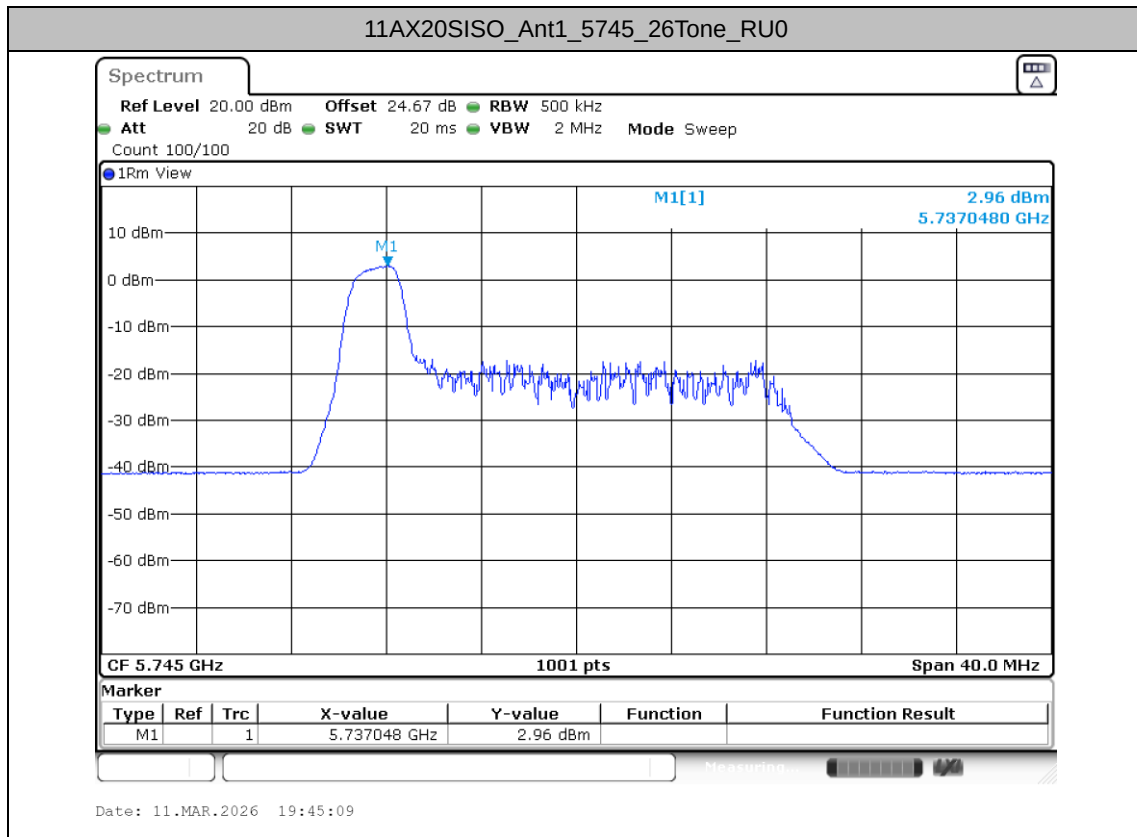

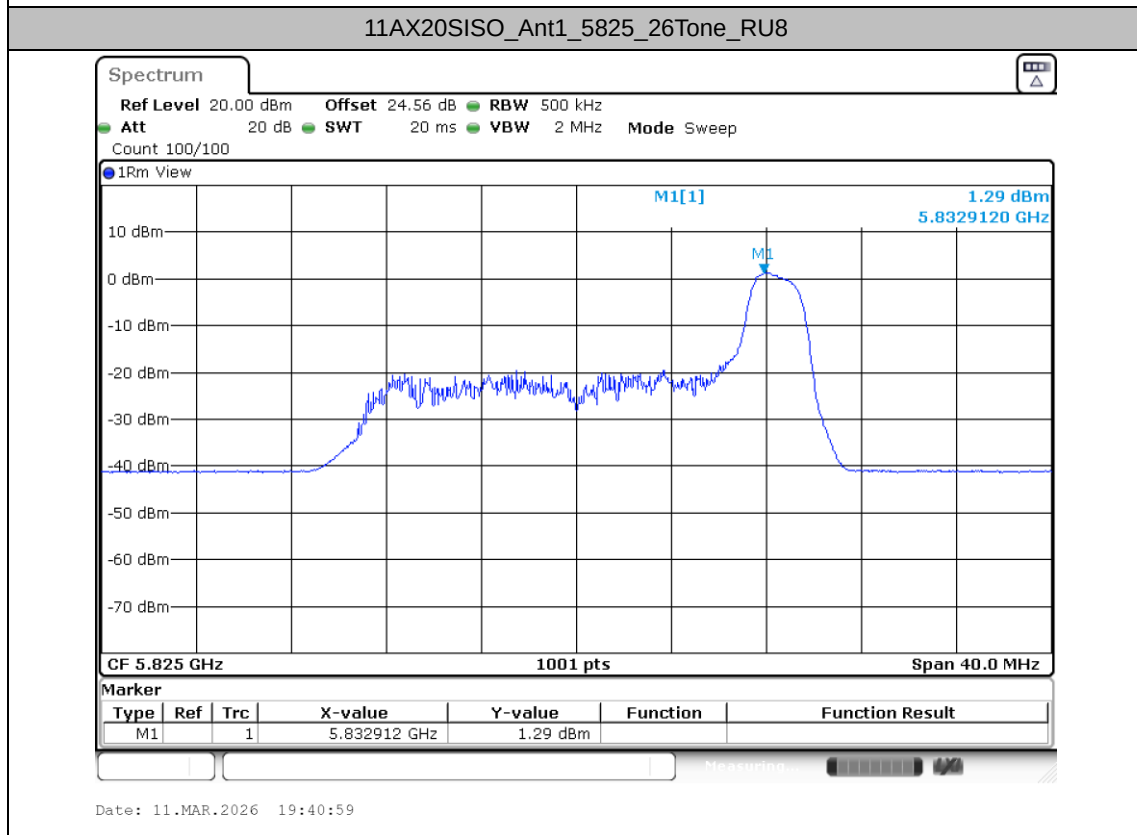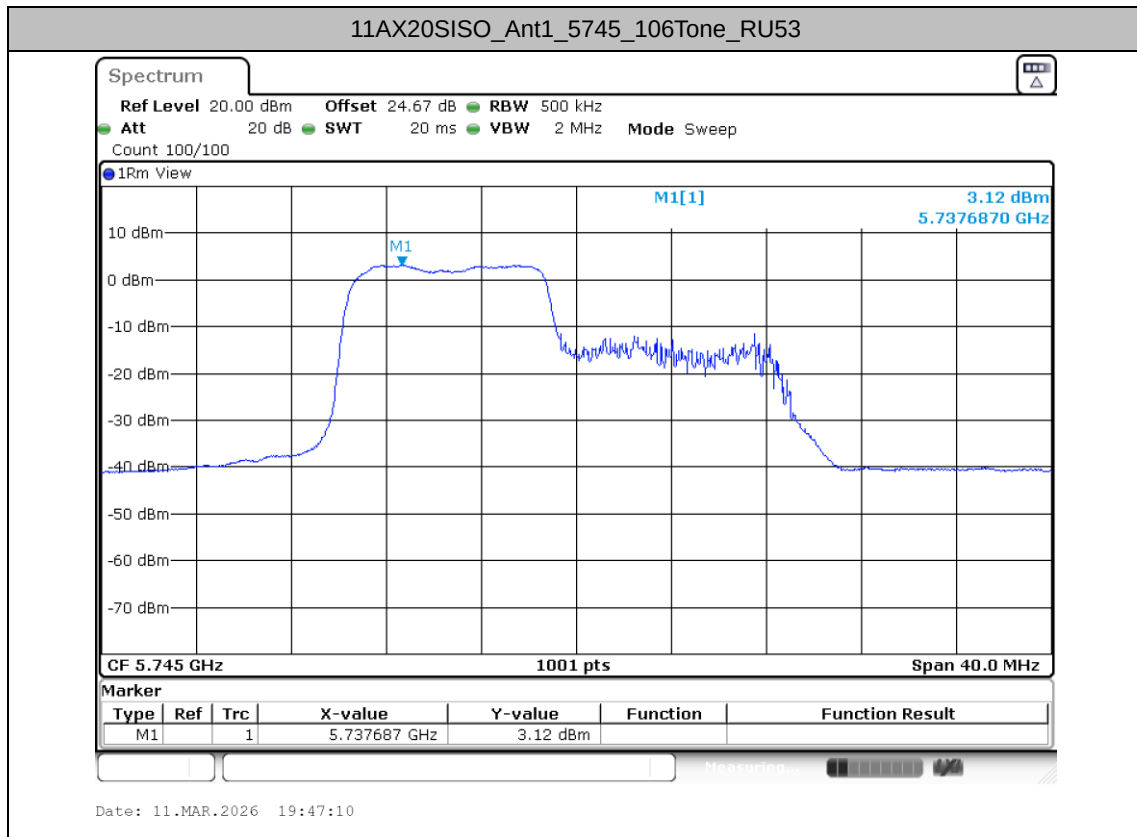

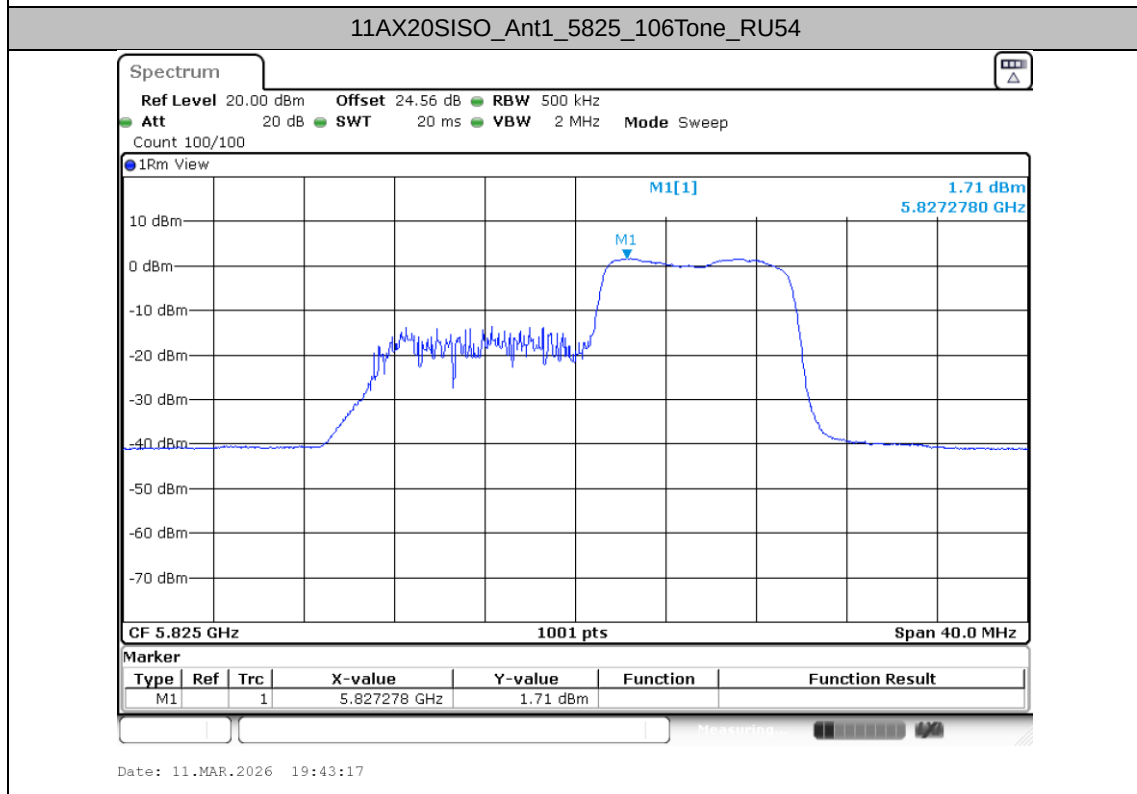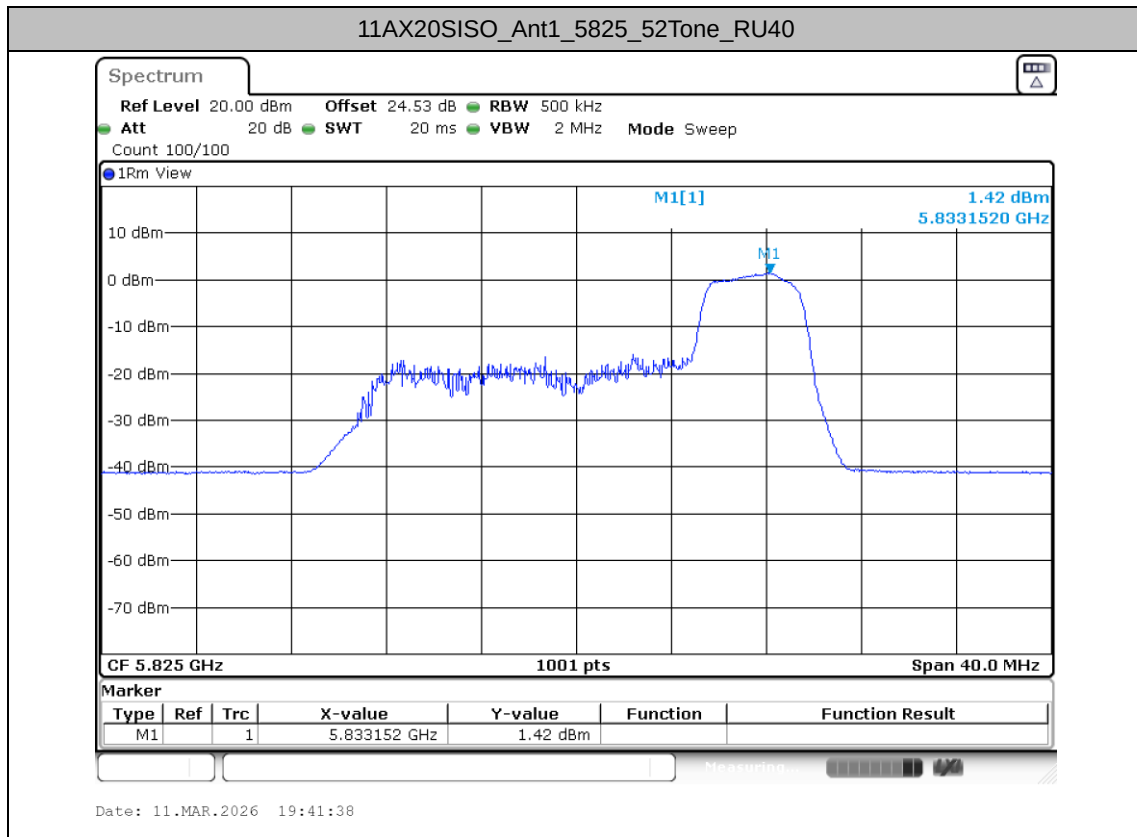


Appendix B. AC Conducted Emission Test Results

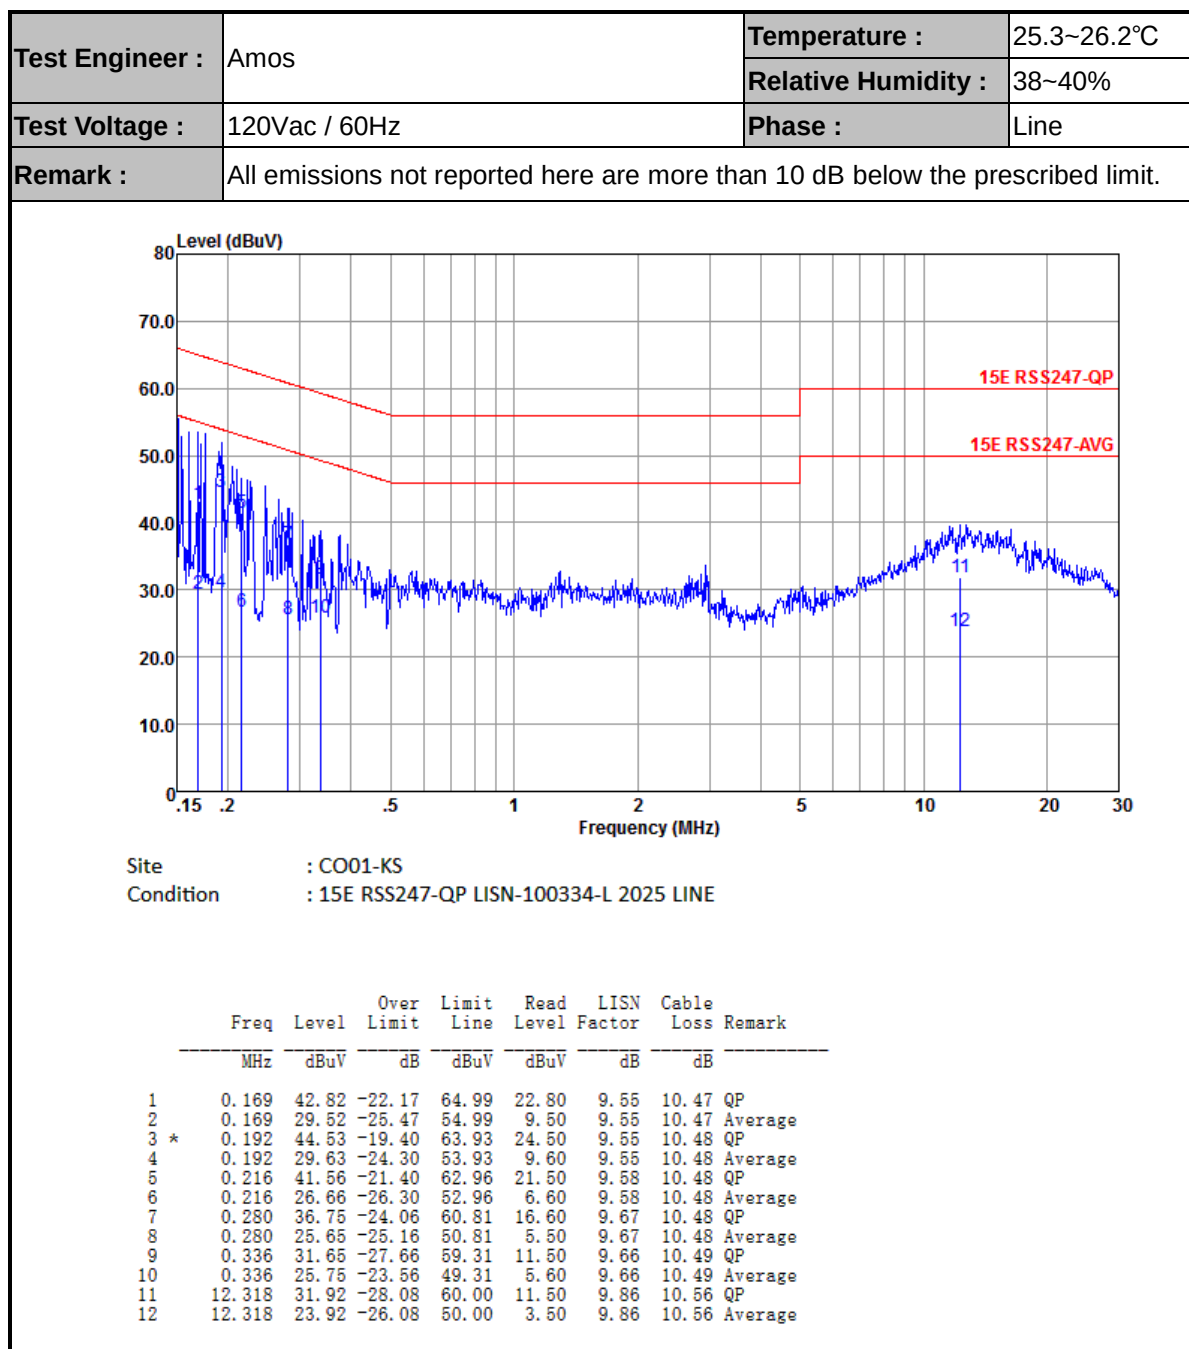



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

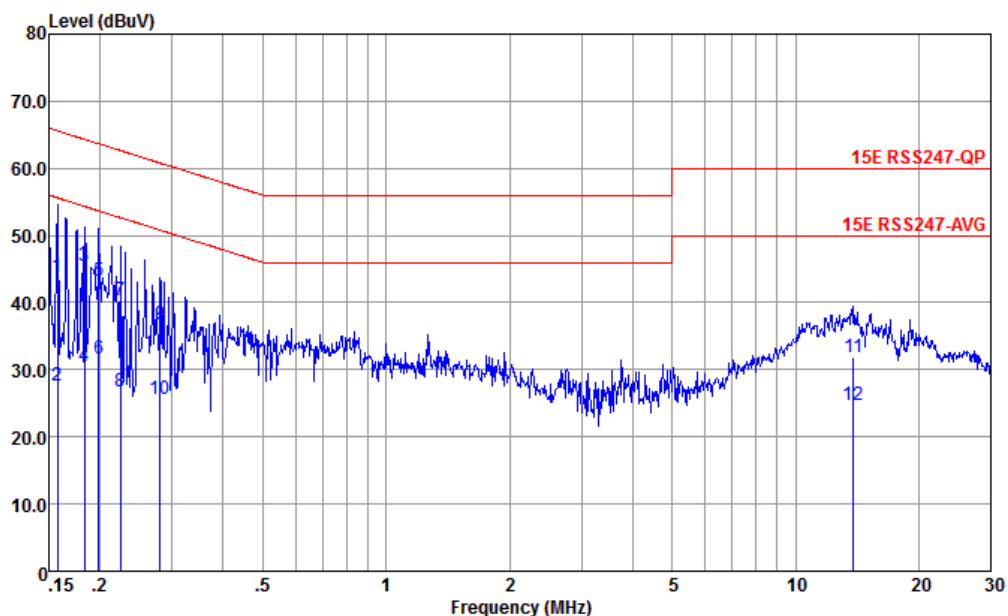

Site : CO01-KS
Condition : 15E RSS247-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.157	43.82	-21.78	65.60	23.80	9.55	10.47	QP
2	0.157	27.62	-28.08	55.60	7.50	9.55	10.47	Average
3 *	0.183	45.55	-18.78	64.33	25.50	9.57	10.48	QP
4	0.183	30.55	-23.78	54.33	10.50	9.57	10.48	Average
5	0.199	43.28	-20.39	63.67	23.20	9.60	10.48	QP
6	0.199	31.58	-22.09	53.67	11.50	9.60	10.48	Average
7	0.224	40.31	-22.35	62.66	20.20	9.63	10.48	QP
8	0.224	26.71	-25.95	52.66	6.60	9.63	10.48	Average
9	0.280	36.71	-24.10	60.81	16.60	9.63	10.48	QP
10	0.280	25.61	-25.20	50.81	5.50	9.63	10.48	Average
11	13.841	31.81	-28.19	60.00	11.51	9.73	10.57	QP
12	13.841	24.81	-25.19	50.00	4.51	9.73	10.57	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Maven QI	Relative Humidity :	41~ 43%
		Temperature :	20.2 ~ 21.5°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	RU26/0	-
Mode 20	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	RU26/8	-
Mode 21	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	RU26/0	-
Mode 22	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	RU26/8	-
Mode 23	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	RU52/37	-
Mode 24	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	RU52/40	-
Mode 25	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	RU52/37	-
Mode 26	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	RU52/40	-
Mode 27	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	RU106/53	-
Mode 28	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	RU106/54	-
Mode 29	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	RU106/53	-
Mode 30	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	RU106/54	-
Mode 31	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	-	-
Mode 35	U-NII-3	5.725-5.85	1	802.11ax HE20	157	5785	MCS0	-	-
Mode 36	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	RU26/0	-



Mode 38	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	RU26/8	-
Mode 39	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	RU52/37	-
Mode 40	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	RU52/40	-
Mode 41	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	RU106/53	-
Mode 42	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	RU106/54	-
Mode 43	U-NII-2C	5.47-5.85	1	802.11a	144	5720	6Mbps	-	-
Mode 44	U-NII-2C	5.47-5.85	1	802.11ax HE20	144	5720	MCS0	-	-
Mode 45	U-NII-2C	5.47-5.85	2	802.11ax HE20	144	5720	MCS0	-	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.99	50.13	54.00	-3.87	V	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.13	49.39	68.20	-18.81	V	-	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10436.40	49.46	68.20	-18.74	V	-	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	47.10	68.20	-21.10	H	PEAK	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	47.06	68.20	-21.14	V	PEAK	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	10600.00	42.60	54.00	-11.40	V	AVERAGE	Pass	Harmonic
6	802.11a	64	5350.00	48.40	54.00	-5.60	V	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	43.67	54.00	-10.33	V	AVERAGE	Pass	Harmonic
7	802.11a	100	5467.85	59.20	68.20	-9.00	V	PEAK	Pass	Band Edge
7	802.11a	100	11000.00	47.73	54.00	-6.27	V	AVERAGE	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	11160.00	46.31	54.00	-7.69	V	AVERAGE	Pass	Harmonic
9	802.11a	140	5731.20	62.61	68.20	-5.59	V	PEAK	Pass	Band Edge
9	802.11a	140	11400.00	49.67	54.00	-4.33	H	AVERAGE	Pass	Harmonic
10	802.11ax HE20	36	5149.95	47.62	54.00	-6.38	V	AVERAGE	Pass	Band Edge
10	802.11ax HE20	36	10360.00	46.69	68.20	-21.51	V	PEAK	Pass	Harmonic
11	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE20	44	10440.00	46.46	68.20	-21.74	H	PEAK	Pass	Harmonic
12	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
12	802.11ax HE20	48	10480.00	46.82	68.20	-21.38	V	PEAK	Pass	Harmonic
13	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE20	52	10520.00	47.10	68.20	-21.10	H	PEAK	Pass	Harmonic
14	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	60	10600.00	38.15	54.00	-15.85	H	AVERAGE	Pass	Harmonic
15	802.11ax HE20	64	5350.00	47.53	54.00	-6.47	V	AVERAGE	Pass	Band Edge
15	802.11ax HE20	64	10640.00	44.59	54.00	-9.41	V	AVERAGE	Pass	Harmonic
16	802.11ax HE20	100	5459.98	45.97	54.00	-8.03	V	AVERAGE	Pass	Band Edge
16	802.11ax HE20	100	11000.00	49.16	54.00	-4.84	V	AVERAGE	Pass	Harmonic
17	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	116	11160.00	47.19	54.00	-6.81	V	AVERAGE	Pass	Harmonic



18	802.11ax HE20	140	5725.20	62.66	68.20	-5.54	V	PEAK	Pass	Band Edge
18	802.11ax HE20	140	11400.00	50.68	54.00	-3.32	V	AVERAGE	Pass	Harmonic
19	802.11ax HE20	36	5138.05	49.07	54.00	-4.93	V	AVERAGE	Pass	Band Edge
19	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
20	802.11ax HE20	64	5361.75	46.82	54.00	-7.18	V	AVERAGE	Pass	Band Edge
20	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
21	802.11ax HE20	100	5459.05	47.23	54.00	-6.77	V	AVERAGE	Pass	Band Edge
21	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
22	802.11ax HE20	140	5725.72	64.50	68.20	-3.70	V	-	Pass	Band Edge
22	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
23	802.11ax HE20	36	5141.35	49.21	54.00	-4.79	V	AVERAGE	Pass	Band Edge
23	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE20	64	5351.35	47.62	54.00	-6.38	V	AVERAGE	Pass	Band Edge
24	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE20	100	5459.94	45.79	54.00	-8.21	V	AVERAGE	Pass	Band Edge
25	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE20	140	5725.84	60.30	68.20	-7.90	V	PEAK	Pass	Band Edge
26	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE20	36	5149.85	48.21	54.00	-5.79	V	AVERAGE	Pass	Band Edge
27	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
28	802.11ax HE20	64	5351.15	47.68	54.00	-6.32	V	AVERAGE	Pass	Band Edge
28	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
29	802.11ax HE20	100	5469.45	60.40	68.20	-7.80	V	PEAK	Pass	Band Edge
29	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
30	802.11ax HE20	140	5725.76	62.76	68.20	-5.44	V	PEAK	Pass	Band Edge
30	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
31	802.11a	149	5642.00	54.63	68.20	-13.57	H	PEAK	Pass	Band Edge
31	802.11a	149	11490.00	49.94	54.00	-3.76	H	AVERAGE	Pass	Harmonic
32	802.11a	157	-	-	-	-	-	-	-	Band Edge
32	802.11a	157	11570.00	50.71	54.00	-3.29	V	AVERAGE	Pass	Harmonic
33	802.11a	165	5960.00	55.10	68.20	-13.10	H	PEAK	Pass	Band Edge
33	802.11a	165	11650.00	50.20	54.00	-3.80	H	AVERAGE	Pass	Harmonic
34	802.11ax HE20	149	5648.00	54.82	68.20	-13.38	H	PEAK	Pass	Band Edge
34	802.11ax HE20	149	11490.00	46.53	74.00	-27.47	H	PEAK	Pass	Harmonic
35	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
35	802.11ax HE20	157	11570.00	49.77	54.00	-4.23	V	AVERAGE	Pass	Harmonic
36	802.11ax HE20	165	5980.80	55.83	68.20	-12.37	V	PEAK	Pass	Band Edge
36	802.11ax HE20	165	11650.00	51.01	54.00	-3.19	H	AVERAGE	Pass	Harmonic
37	802.11ax HE20	149	5608.80	54.72	68.20	-13.48	H	PEAK	Pass	Band Edge
37	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
38	802.11ax HE20	165	5997.20	54.91	68.20	-13.29	H	PEAK	Pass	Band Edge
38	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
39	802.11ax HE20	149	5626.80	54.62	68.20	-13.58	H	PEAK	Pass	Band Edge
39	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
40	802.11ax HE20	165	5961.20	55.17	68.20	-13.03	V	PEAK	Pass	Band Edge
40	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic

41	802.11ax HE20	149	5637.20	55.33	68.20	-12.87	H	PEAK	Pass	Band Edge
41	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
42	802.11ax HE20	165	5982.80	55.29	68.20	-12.91	V	PEAK	Pass	Band Edge
42	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
43	802.11a	144	-	-	-	-	-	-	-	Band Edge
43	802.11a	144	11440.00	50.94	54.00	-3.06	H	AVERAGE	Pass	Harmonic
44	802.11ax HE20	144	-	-	-	-	-	-	-	Band Edge
44	802.11ax HE20	144	11440.00	50.69	54.00	-3.31	H	AVERAGE	Pass	Harmonic
45	802.11ax HE20	144	-	-	-	-	-	-	-	Band Edge
45	802.11ax HE20	144	11440.00	50.63	54.00	-3.37	V	AVERAGE	Pass	Harmonic

Co-location





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
46	2400-2483.5	2400-2483.5	A1	Bluetooth-LE	39	2480	2Mbps	-	-
	U-NII-2C	5.47-5.85	A1	802.11a	144	5720	6Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
46	Bluetooth-LE	39	4960.00	44.32	74.00	-29.68	V	PEAK	Pass	Harmonic
	802.11a	144	11440.00	50.27	54.00	-3.73	H	AVERAGE	Pass	Harmonic

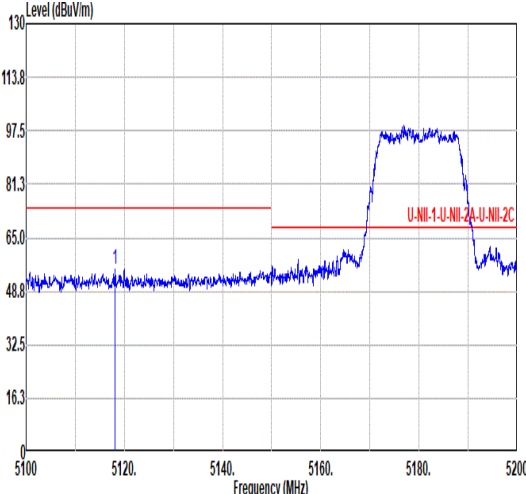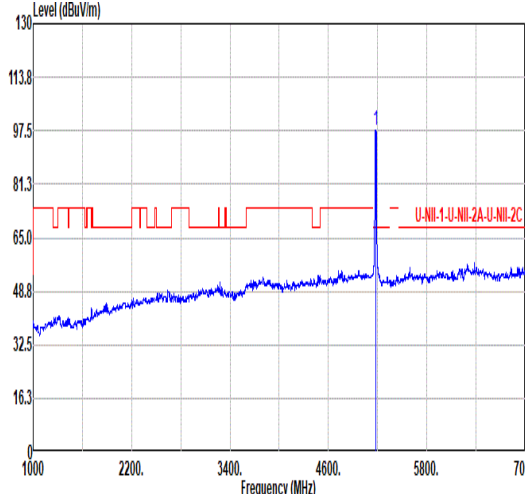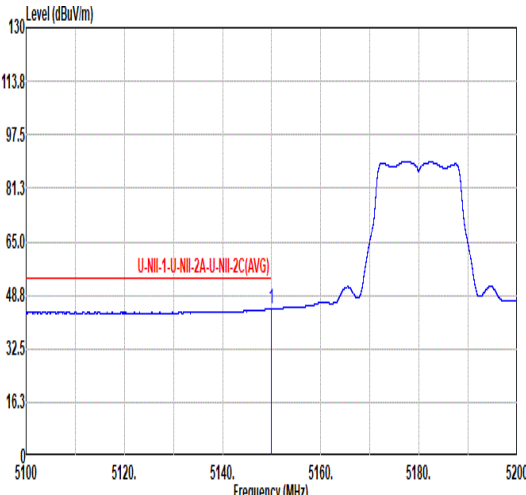
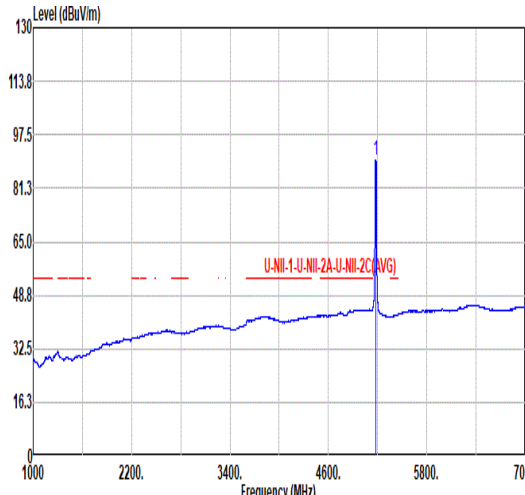


Mode	1																																																																																																				
	Band Edge																																																																																																				
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5118.05</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>40.64</td><td>34.40</td><td>11.89</td><td>31.60</td><td>0.00</td><td>115</td><td>93 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5118.05	55.33	74.00	-18.67	40.64	34.40	11.89	31.60	0.00	115	93 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>97.84</td><td>-----</td><td>-----</td><td>83.06</td><td>34.45</td><td>11.93</td><td>31.60</td><td>0.00</td><td>115</td><td>93 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	97.84	-----	-----	83.06	34.45	11.93	31.60	0.00	115
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5118.05	55.33	74.00	-18.67	40.64	34.40	11.89	31.60	0.00	115	93 PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5180.00	97.84	-----	-----	83.06	34.45	11.93	31.60	0.00	115	93 PEAK																																																																																										
Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.65</td><td>54.00</td><td>-9.35</td><td>29.94</td><td>34.40</td><td>11.91</td><td>31.60</td><td>0.00</td><td>115</td><td>93 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5150.00	44.65	54.00	-9.35	29.94	34.40	11.91	31.60	0.00	115	93 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>89.83</td><td>-----</td><td>-----</td><td>75.05</td><td>34.45</td><td>11.93</td><td>31.60</td><td>0.00</td><td>115</td><td>93 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	89.83	-----	-----	75.05	34.45	11.93	31.60	0.00	115
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5150.00	44.65	54.00	-9.35	29.94	34.40	11.91	31.60	0.00	115	93 AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5180.00	89.83	-----	-----	75.05	34.45	11.93	31.60	0.00	115	93 AVERAGE																																																																																										

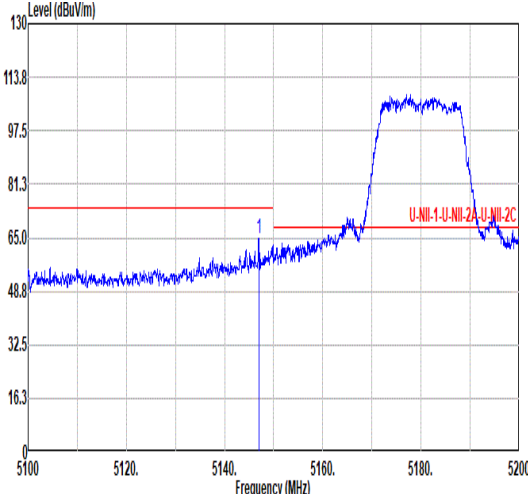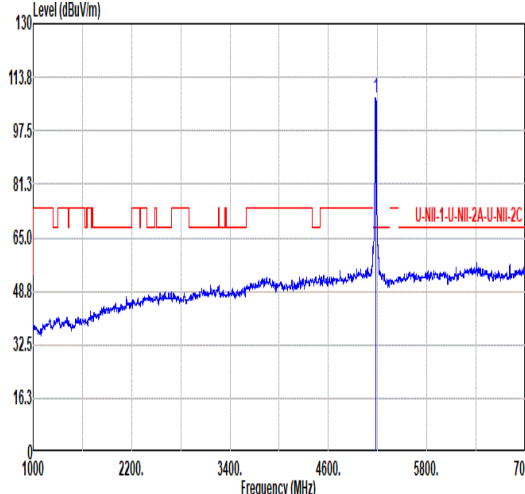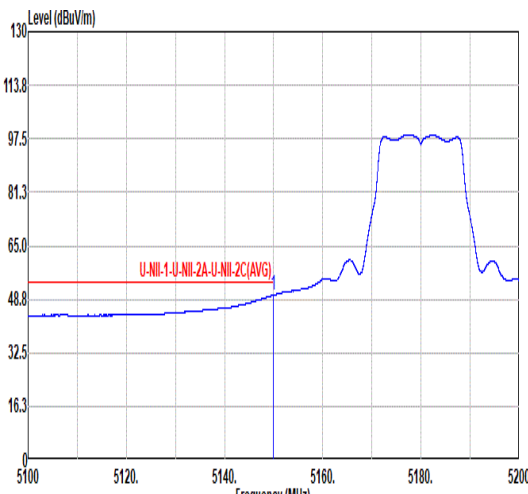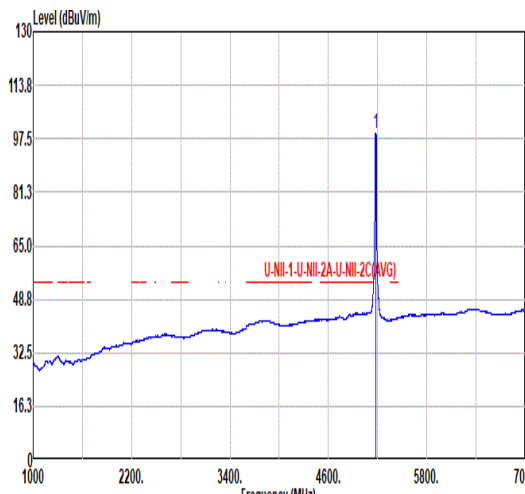

Mode	1																																																																																																				
	Band Edge																																																																																																				
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.95</td><td>64.81</td><td>74.00</td><td>-9.19</td><td>50.10</td><td>34.40</td><td>11.91</td><td>31.60</td><td>0.00</td><td>100</td><td>338 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5146.95	64.81	74.00	-9.19	50.10	34.40	11.91	31.60	0.00	100	338 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>107.44</td><td>-----</td><td>-----</td><td>92.66</td><td>34.45</td><td>11.93</td><td>31.60</td><td>0.00</td><td>100</td><td>338 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	107.44	-----	-----	92.66	34.45	11.93	31.60	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5146.95	64.81	74.00	-9.19	50.10	34.40	11.91	31.60	0.00	100	338 PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5180.00	107.44	-----	-----	92.66	34.45	11.93	31.60	0.00	100	338 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>50.13</td><td>54.00</td><td>-3.87</td><td>35.42</td><td>34.40</td><td>11.91</td><td>31.60</td><td>0.00</td><td>100</td><td>338 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.99	50.13	54.00	-3.87	35.42	34.40	11.91	31.60	0.00	100	338 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>99.11</td><td>-----</td><td>-----</td><td>84.33</td><td>34.45</td><td>11.93</td><td>31.60</td><td>0.00</td><td>100</td><td>338 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	99.11	-----	-----	84.33	34.45	11.93	31.60	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5149.99	50.13	54.00	-3.87	35.42	34.40	11.91	31.60	0.00	100	338 AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	5180.00	99.11	-----	-----	84.33	34.45	11.93	31.60	0.00	100	338 AVERAGE																																																																																										

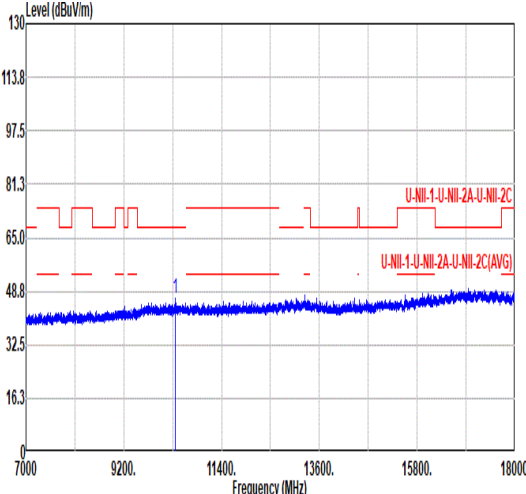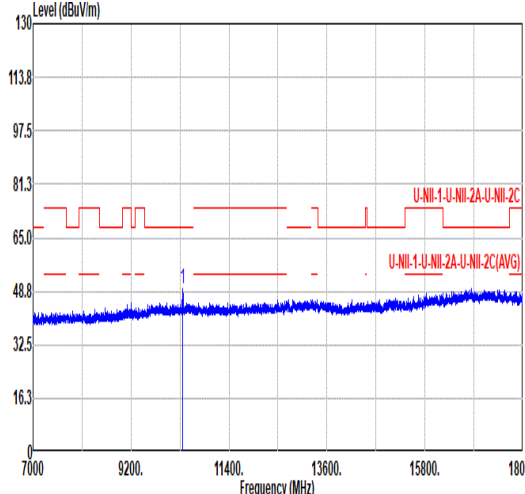

Mode	1																																																																																																				
	Harmonic																																																																																																				
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
	<table><tr><th colspan="2"></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.67</td><td>68.20</td><td>-21.53</td><td>53.57</td><td>37.56</td><td>16.92</td><td>61.38</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>								Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10360.00	46.67	68.20	-21.53	53.57	37.56	16.92	61.38	0.00	--	PEAK	<table><tr><th colspan="2"></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.13</td><td>49.39</td><td>68.20</td><td>-18.81</td><td>56.29</td><td>37.56</td><td>16.92</td><td>61.38</td><td>0.00</td><td>300</td><td>13</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10360.13	49.39	68.20	-18.81	56.29	37.56	16.92	61.38	0.00	300	13
			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	10360.00	46.67	68.20	-21.53	53.57	37.56	16.92	61.38	0.00	--	PEAK																																																																																										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																										
1	10360.13	49.39	68.20	-18.81	56.29	37.56	16.92	61.38	0.00	300	13																																																																																										