FCC CFR47 CERTIFICATION

TEST REPORT

FOR

NOTEBOOK PC

MODEL NUMBER: NP-Q1u & Q1u

FCC ID: A3L-NP-Q1U

REPORT NUMBER: 07I10887-1, REVISION B

ISSUE DATE: APRIL 3, 2007

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
416 MAETAN 3- DONG, YEONGTONG-GU
SUWON-SI, GYEONGGI-DO 443-742
KOREA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, USA
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	03/23/07	Initial Issue	T. Chan
B	04/03/07	Revised to correct antenna gain info.	S. Radecki

This report shall not be reproduced except in full, without the written approval of CCS.

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 4

2. TEST METHODOLOGY 5

3. FACILITIES AND ACCREDITATION 5

4. CALIBRATION AND UNCERTAINTY 5

4.1. MEASURING INSTRUMENT CALIBRATION 5

4.2. MEASUREMENT UNCERTAINTY 5

5. EQUIPMENT UNDER TEST 6

5.1. DESCRIPTION OF EUT 6

5.2. DESCRIPTION OF AVAILABLE ANTENNAS 6

5.3. MAXIMUM OUTPUT POWER 6

5.4. SOFTWARE AND FIRMWARE 7

5.5. WORST-CASE CONFIGURATION AND MODE 7

5.6. DESCRIPTION OF TEST SETUP 8

6. TEST AND MEASUREMENT EQUIPMENT 10

7. LIMITS AND RESULTS 11

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND 11

7.1.1. 6 dB BANDWIDTH 11
7.1.2. 99% BANDWIDTH 18
7.1.3. PEAK OUTPUT POWER 25
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE 33
7.1.5. AVERAGE POWER 36
7.1.6. PEAK POWER SPECTRAL DENSITY 36
7.1.7. CONDUCTED SPURIOUS EMISSIONS 44

7.2. RADIATED EMISSIONS 57

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS 57
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND 60
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz 96

7.3. POWERLINE CONDUCTED EMISSION 104

8. SETUP PHOTOS 108

This report shall not be reproduced except in full, without the written approval of CCS.

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416 MAETAN 3- DONG, YEONGTONG-GU
SUWON-SI, GYEONGGI-DO 443-742 KOREA

EUT DESCRIPTION: NOTEBOOK PC

MODEL TESTED: NP-Q1u

SERIAL NUMBER: 785L93BP200008R with FOXCONN ANTENNA
785L93BP200077N with WNC ANTENNA

DATE TESTED: MARCH 09 – MARCH 15, 2007

APPLICABLE STANDARDS	
STANDARD	**TEST RESULTS**
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:

VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

This report shall not be reproduced except in full, without the written approval of CCS.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at http://www.ccsemc.com.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

This report shall not be reproduced except in full, without the written approval of CCS.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a notebook PC with 802.11b/g transceiver and BT module installed.
The WLAN transceiver radio module is manufactured by Atheros.
The BT radio module is manufactured by Broadcom.It is already certified under FCC ID: QDS-BRCM1018.
EUT for NP-Q1u and Q1u are same, the difference is just for the marketing purpose.

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

The WLAN radio utilizes either one of the following antennas:

Main antenna
1/ HON HAI PRECISION IND. CO., LTD (Foxconn)/ WDAN-M1MA1001-DF, peak gain with cable loss: 1.03dBi (2400-2500MHz)
2/ Wistron Neweb Corporation/ 81.EER15.001, peak gain with cable loss: -1.08dBi (2400-2500MHz)

Aux antenna
1/ HON HAI PRECISION IND. CO., LTD (Foxconn) / WDAN-M1MA1002-DF, peak gain with cable loss: -1.82dBi (2400-2500MHz)
2/ Wistron Neweb Corporation/ 81.EER15.002, peak gain with cable loss: -6.74dBi (2400-2500MHz).

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	20.23	105.44
2412 - 2462	802.11g	24.00	251.19

This report shall not be reproduced except in full, without the written approval of CCS.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was art id=7105

The test utility software used during testing was Atheros ART 5.3.Build #11

5.5. WORST-CASE CONFIGURATION AND MODE

EUT was tested in three orthogonal orientations to find out the worst orientation, the worst orientations were found out to be:
_With Foxconn antenna: Y orientation for 11b mode, Z orientation for 11g mode.
_With WNC antenna: X orientation for 11b mode, Z orientation for 11g mode.

For the frequency range of 30 MHz to 25 GHz, radiated emissions, Low, Mid and High channels for both 11b and 11g modes were tested. Low channel was at 2412 MHz, Mid channel was at 2437 MHz, and high channel was at 2462 MHz.

For 11b mode, 1 Mbps data rate was selected. For 11g mode, 6 Mbps data rate was selected.

This report shall not be reproduced except in full, without the written approval of CCS.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Serial Number**	**FCC ID**
AC/DC Adapter	Li Shin	AD-6019	CNBA4400238AD2VH7-1N6593	DoC

I/O CABLES

I/O CABLE LIST						
Cable No.	**Port**	**# of Identical Ports**	**Connector Type**	**Cable Type**	**Cable Length**	**Remarks**
1	AC	1	AC	Unshielded	1m	N/A
2	DC	1	DC	Unshielded	1.8m	Ferrite on Notebook End

This report shall not be reproduced except in full, without the written approval of CCS.

SETUP DIAGRAM FOR TESTS

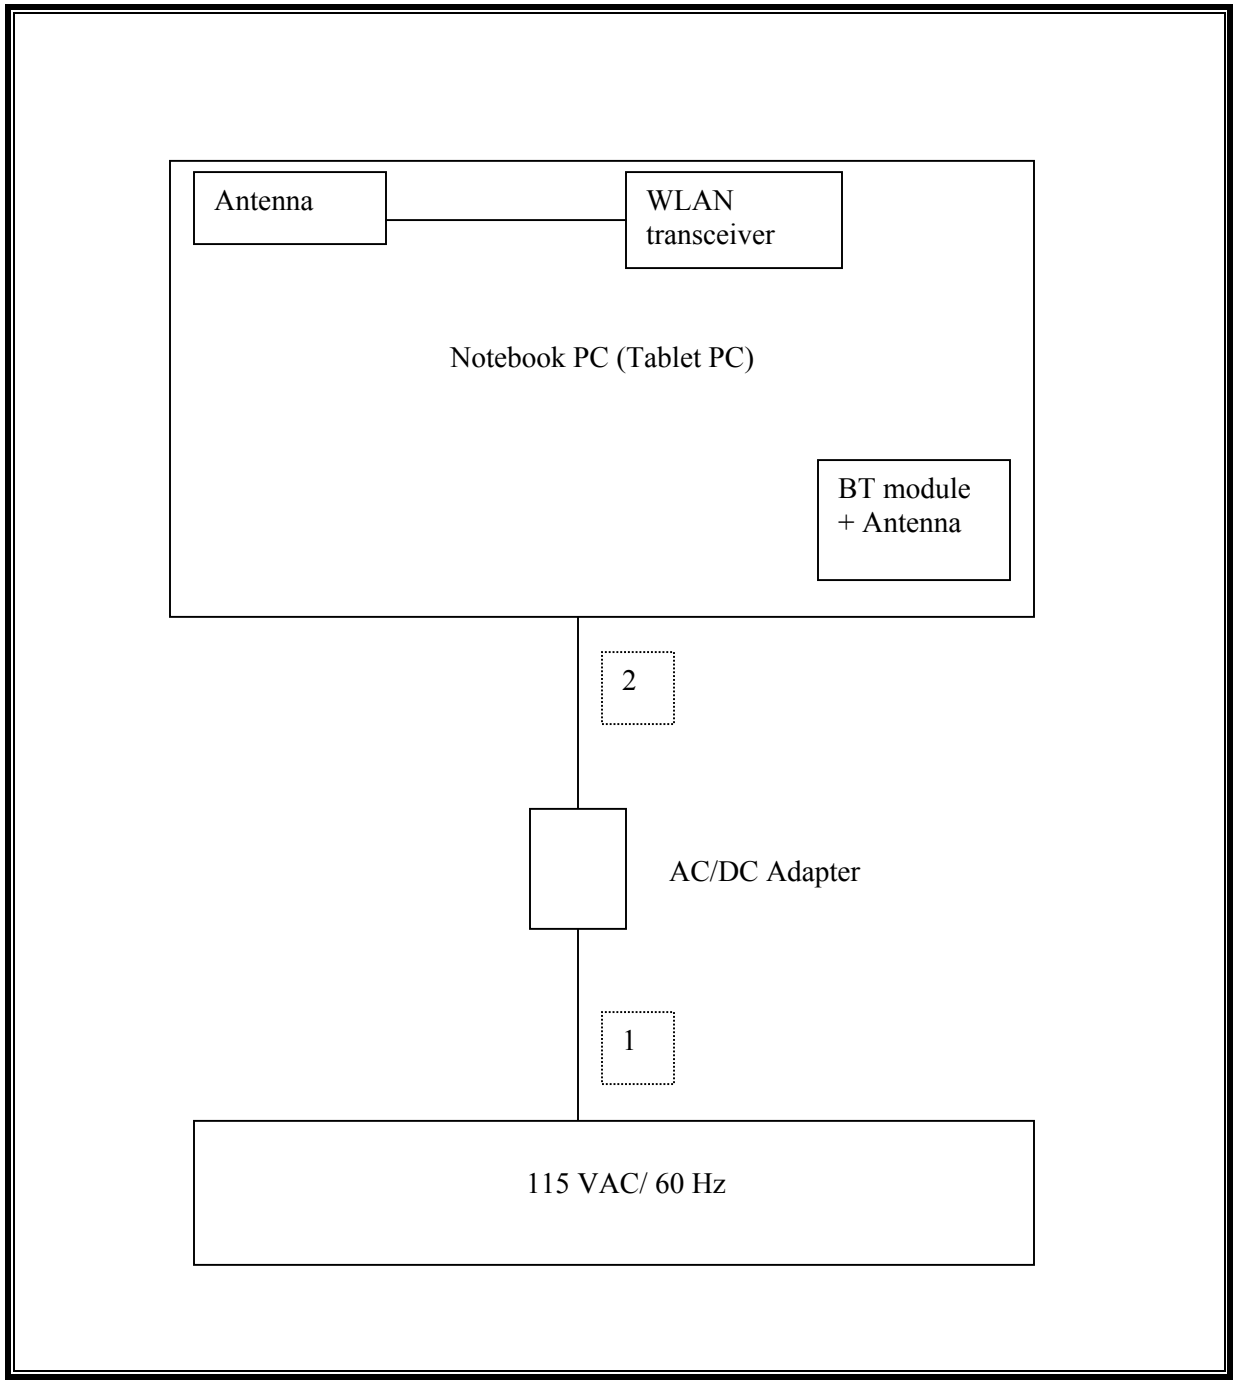

This report shall not be reproduced except in full, without the written approval of CCS.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	**Manufacturer**	**Model**	**Serial Number**	**Cal Due**
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	US42070220	11/26/07
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29310	04/22/07
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00561	10/03/07
2.4-2.5 GHz Reject Filter	Micro-Tronics	BRM50702	1	CNR
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/02/07
Quasi-Peak Adaptor	Agilent / HP	85650A	3145A01654	01/21/08
SA Display Section 2	Agilent / HP	85662A	2816A16696	04/07/08
SA RF Section, 1.5 GHz	Agilent / HP	85680B	2814A04227	01/07/08
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A0022704	08/13/07
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	09/15/07
EMI Test Receiver	R & S	ESHS 20	827129/006	11/03/07
Preamplifier, 1300 MHz	Agilent / HP	8447D	1937A02062	01/23/08

This report shall not be reproduced except in full, without the written approval of CCS.

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12500	500	12000
Middle	2437	12000	500	11500
High	2462	12500	500	12000

802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16580	500	16080
Middle	2437	16420	500	15920
High	2462	16580	500	16080

This report shall not be reproduced except in full, without the written approval of CCS.

6 dB BANDWIDTH (802.11b MODE)

6 dB BANDWIDTH LOW CH (802.11b mode)

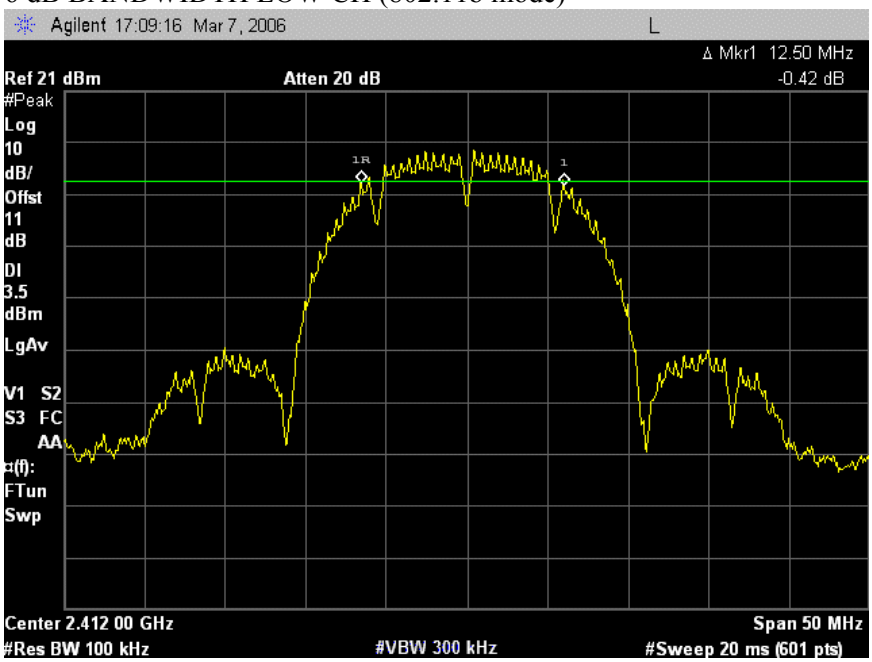

This report shall not be reproduced except in full, without the written approval of CCS.

6 dB BANDWIDTH MID CH (802.11b mode)

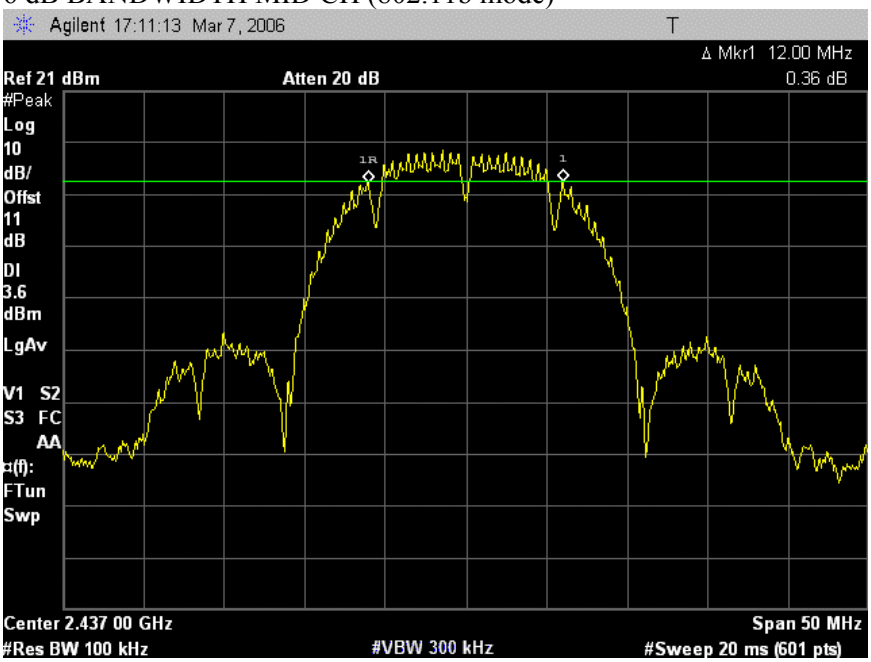

This report shall not be reproduced except in full, without the written approval of CCS.

6 dB BANDWIDTH HIGH CH (802.11b mode)

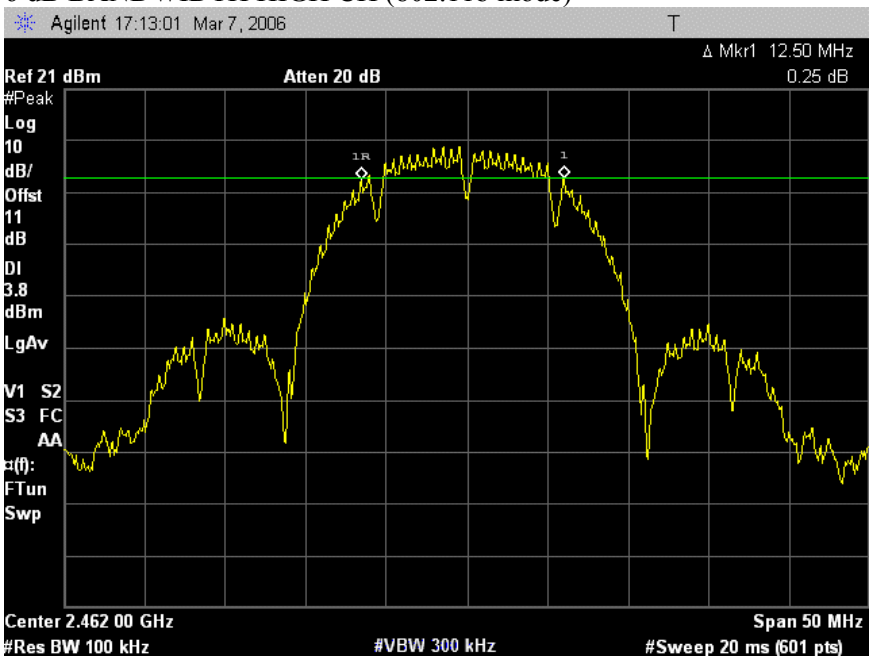

This report shall not be reproduced except in full, without the written approval of CCS.

6 dB BANDWIDTH (802.11g MODE)

6 dB BANDWIDTH LOW CH (802.11g mode)

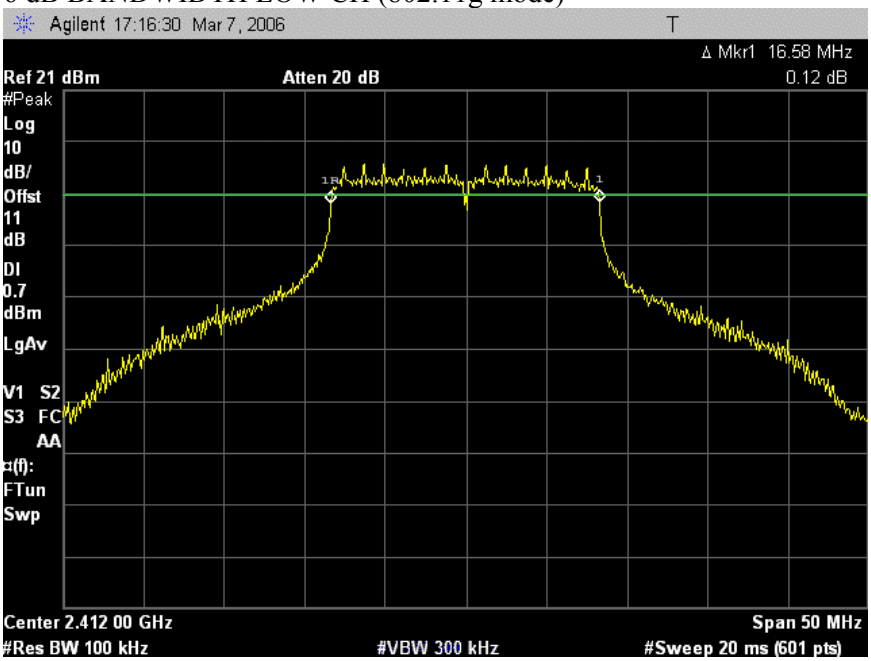

This report shall not be reproduced except in full, without the written approval of CCS.

6 dB BANDWIDTH MID CH (802.11g mode)

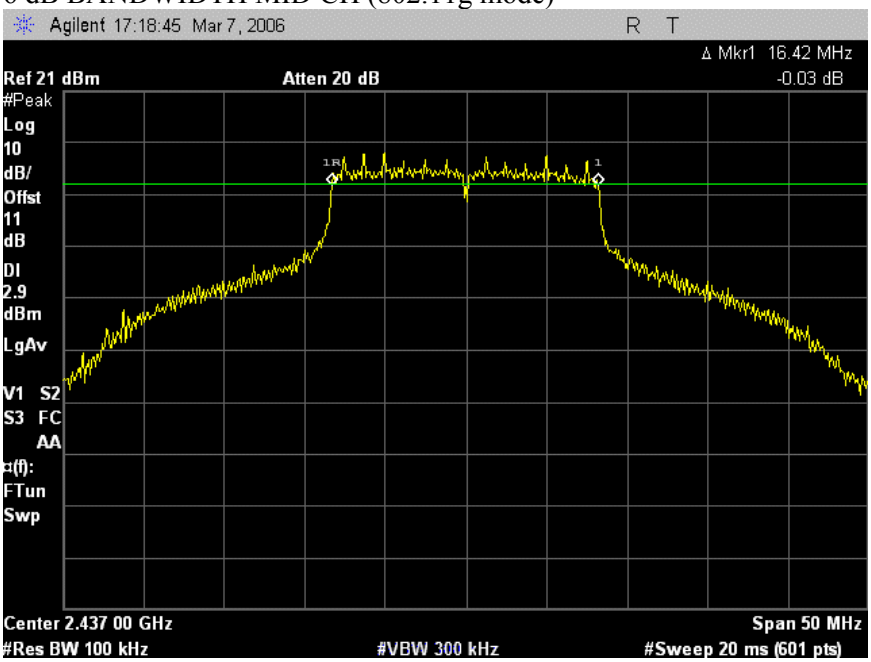

This report shall not be reproduced except in full, without the written approval of CCS.

6 dB BANDWIDTH HIGH CH (802.11g mode)

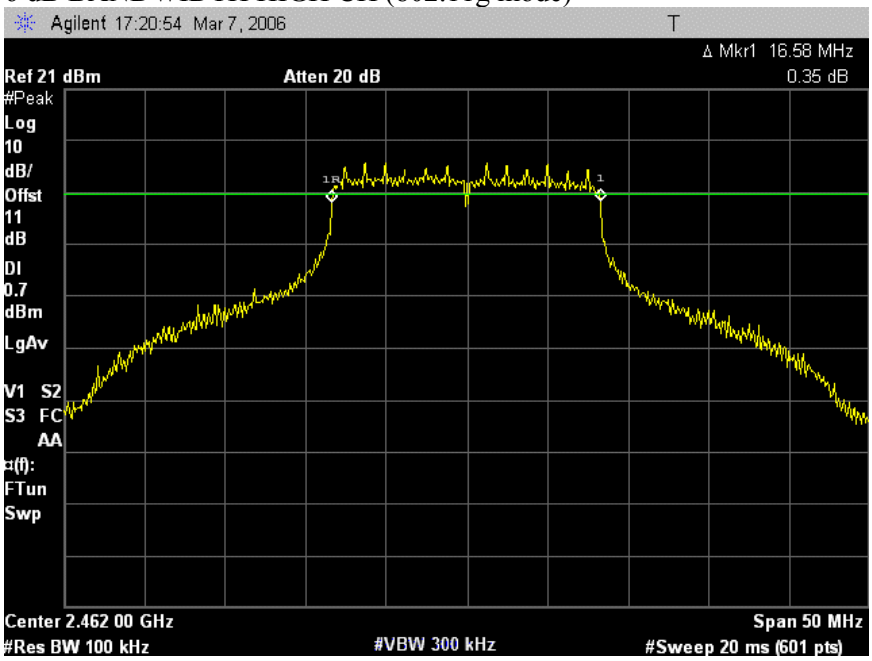

This report shall not be reproduced except in full, without the written approval of CCS.

7.1.2. 99% BANDWIDTH

LIMIT

None: for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.8487
Middle	2437	15.5474
High	2462	15.6003

802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5068
Middle	2437	16.5947
High	2462	16.5288

This report shall not be reproduced except in full, without the written approval of CCS.

99% BANDWIDTH (802.11b MODE)

99% BANDWIDTH LOW CH (802.11b mode)

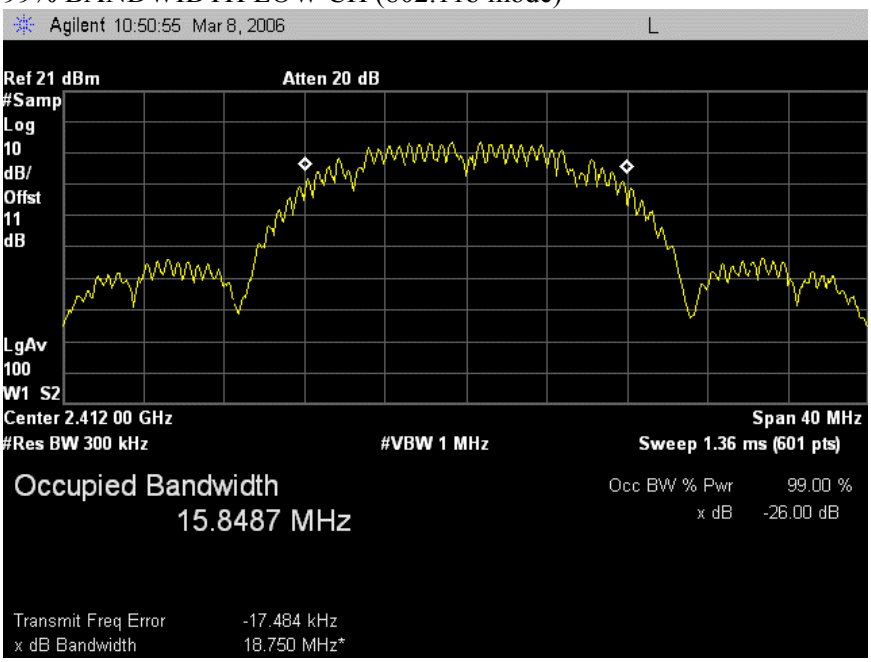

This report shall not be reproduced except in full, without the written approval of CCS.

99% BANDWIDTH MID CH (802.11b mode)

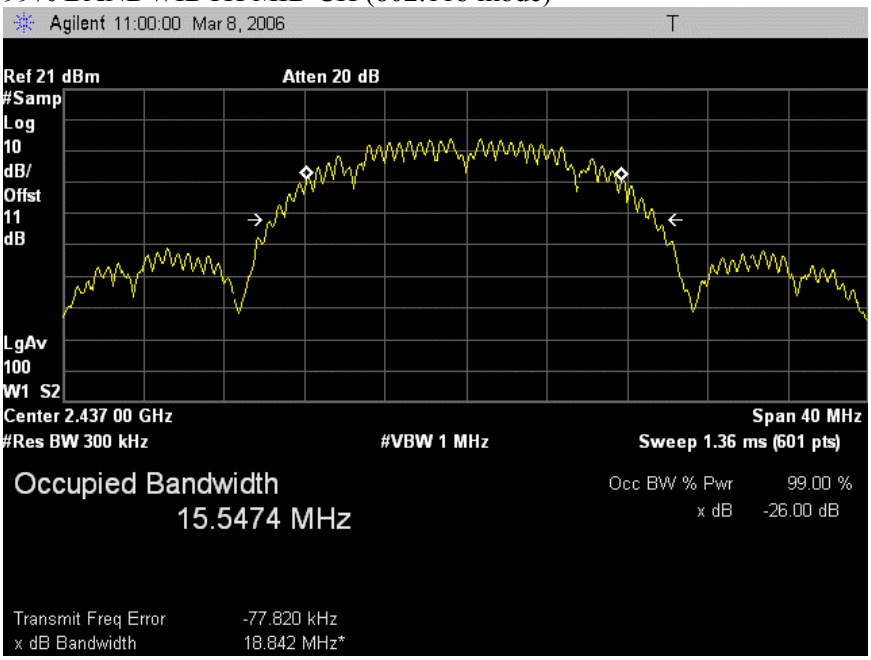

This report shall not be reproduced except in full, without the written approval of CCS.

99% BANDWIDTH HIGH CH (802.11b mode)

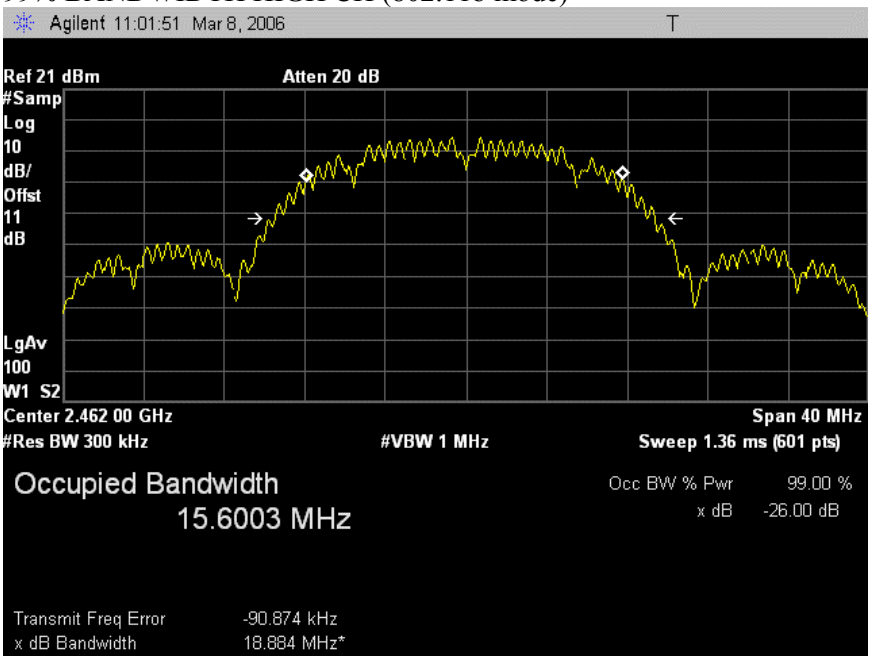

This report shall not be reproduced except in full, without the written approval of CCS.

99% BANDWIDTH (802.11g MODE)

99% BANDWIDTH LOW CH (802.11g mode)

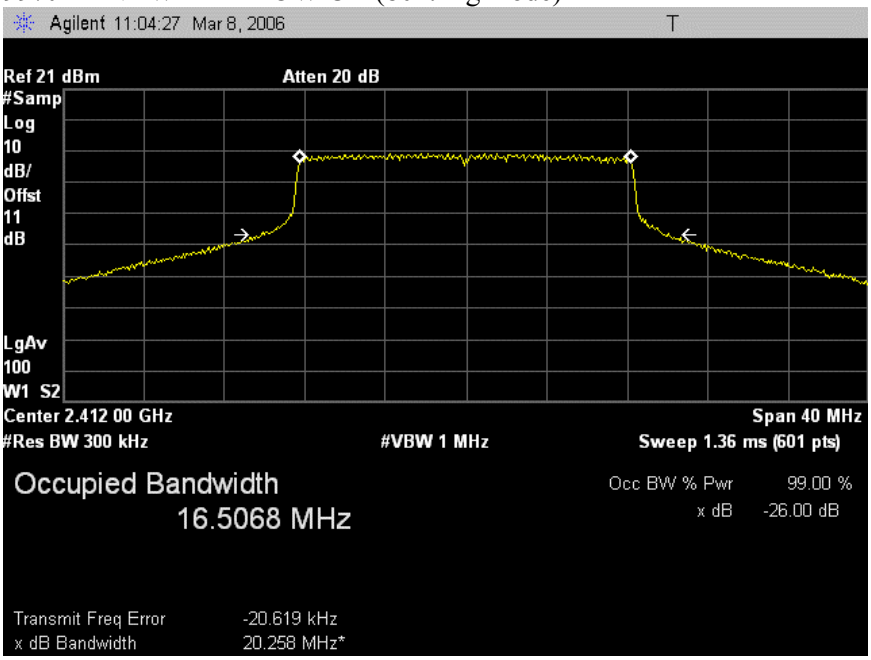

This report shall not be reproduced except in full, without the written approval of CCS.

99% BANDWIDTH MID CH (802.11g mode)

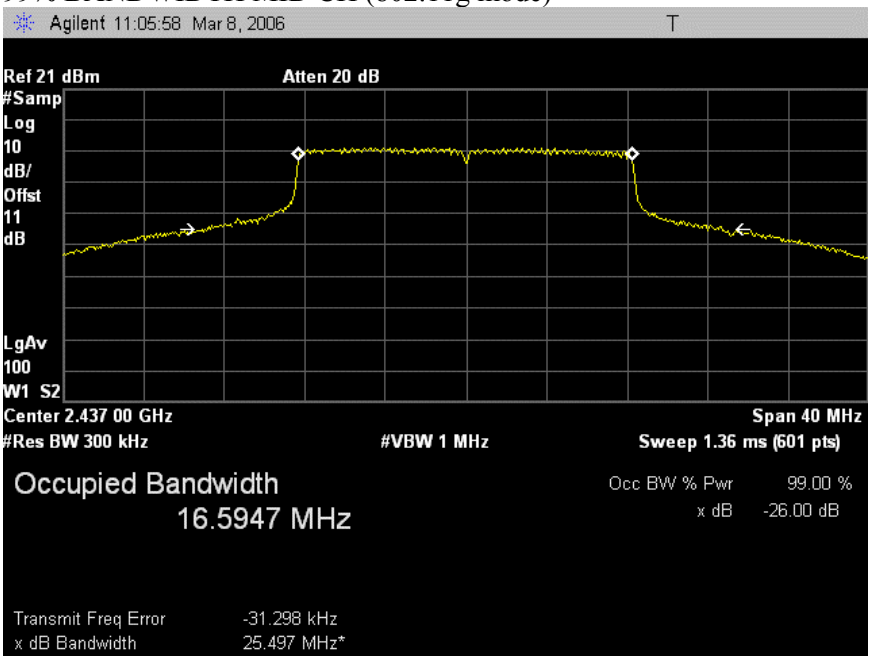

This report shall not be reproduced except in full, without the written approval of CCS.

99% BANDWIDTH HIGH CH (802.11g mode)

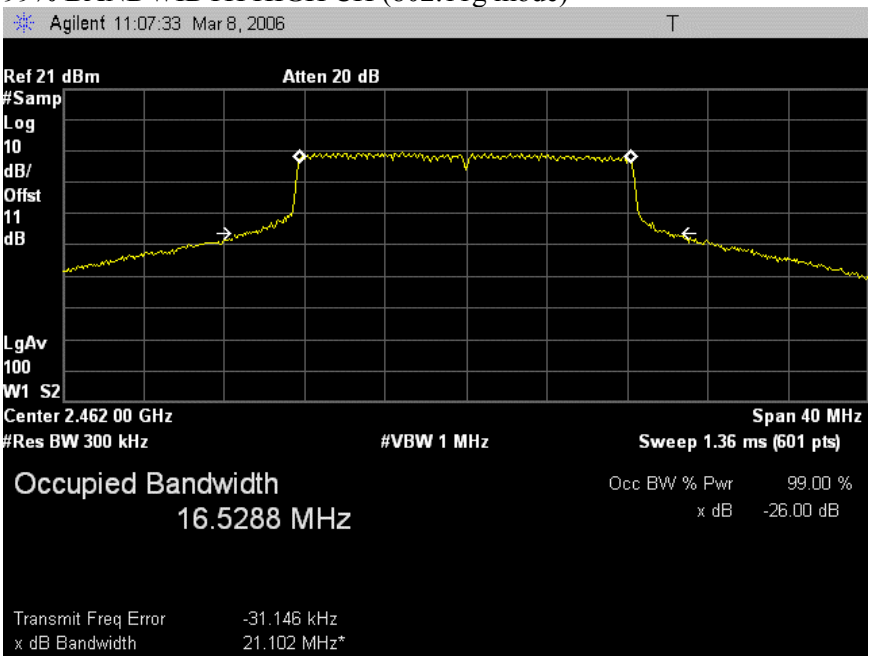

This report shall not be reproduced except in full, without the written approval of CCS.

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

This report shall not be reproduced except in full, without the written approval of CCS.

RESULTS

The maximum antenna gain is 1.03 dBi for other than fixed, point-to-point operations; therefore the limit is 30 dBm.

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	18.65	30	-11.35
Middle	2437	20.08	30	-9.92
High	2462	20.23	30	-9.77

802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	22.91	30	-7.09
Middle	2437	23.84	30	-6.16
High	2462	24.00	30	-6.00

This report shall not be reproduced except in full, without the written approval of CCS.

OUTPUT POWER (802.11b MODE)

PEAK POWER LOW CH (802.11b mode)

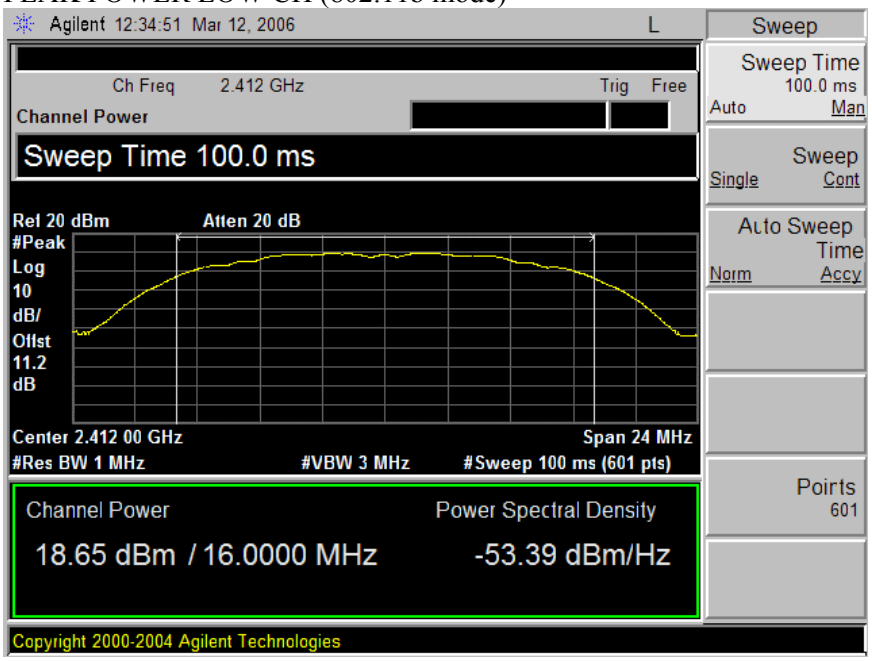

This report shall not be reproduced except in full, without the written approval of CCS.

PEAK POWER MID CH (802.11b mode)

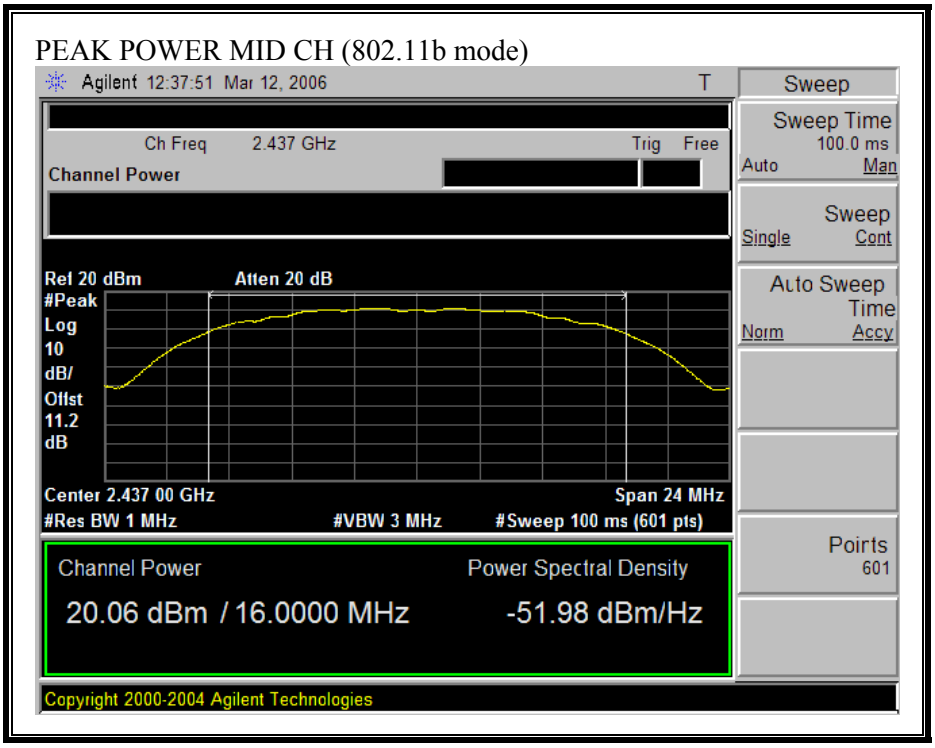

This report shall not be reproduced except in full, without the written approval of CCS.

PEAK POWER HIGH CH (802.11b mode)

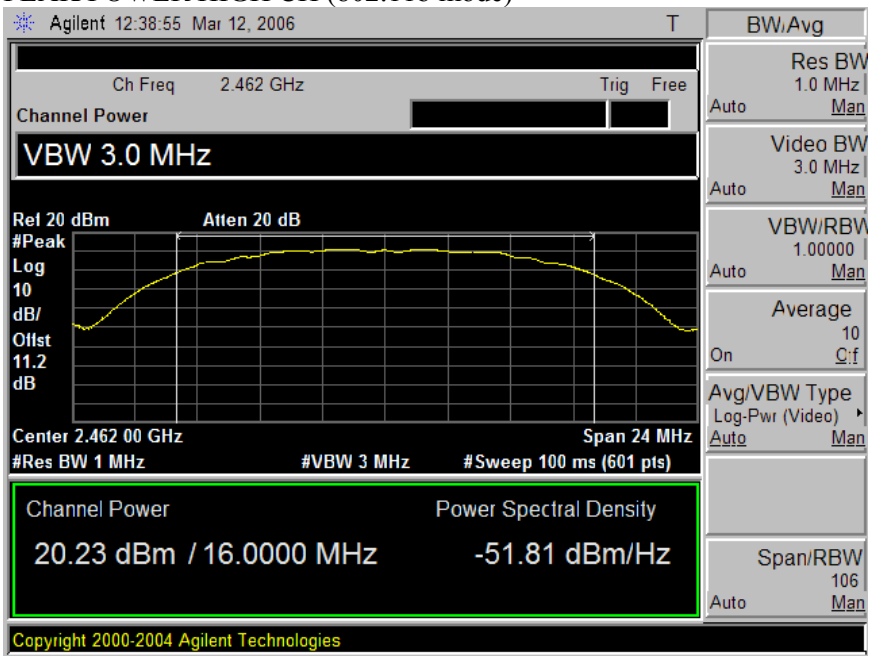

This report shall not be reproduced except in full, without the written approval of CCS.

OUTPUT POWER (802.11g MODE)

PEAK POWER LOW CH (802.11g mode)

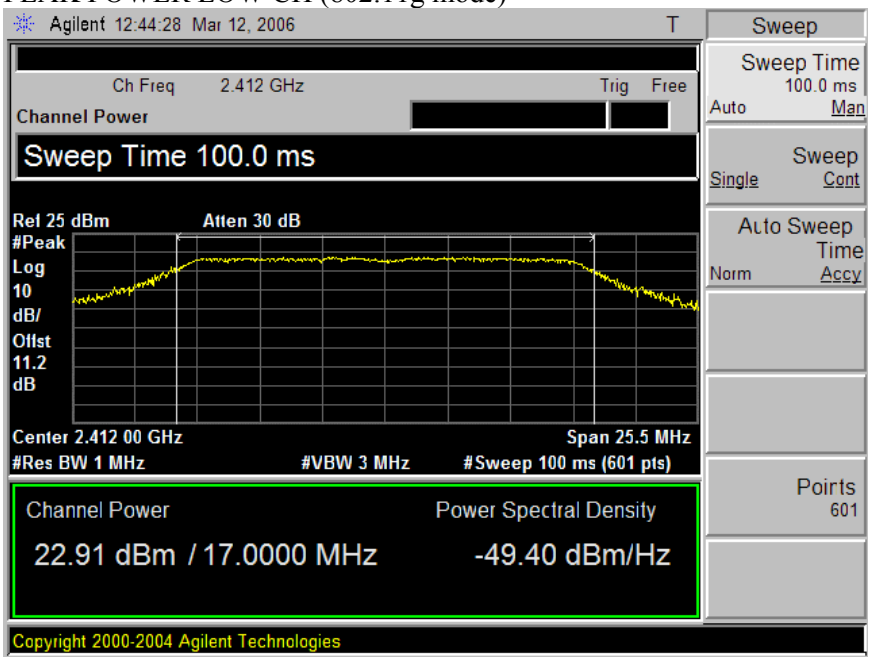

This report shall not be reproduced except in full, without the written approval of CCS.

PEAK POWER MID CH (802.11g mode)

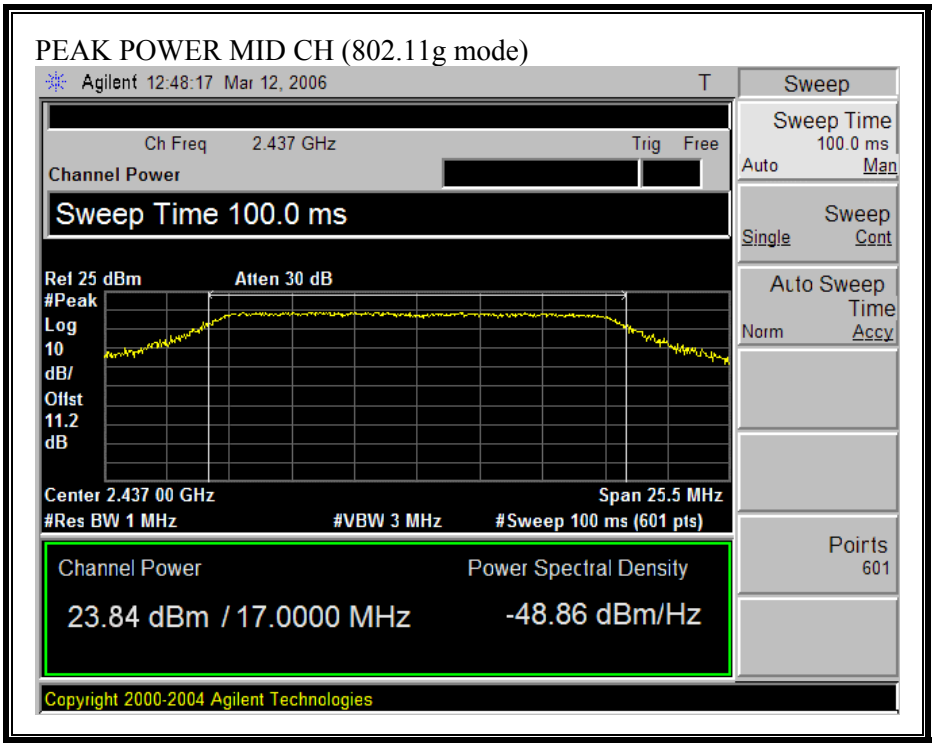

This report shall not be reproduced except in full, without the written approval of CCS.

PEAK POWER HIGH CH (802.11g mode)

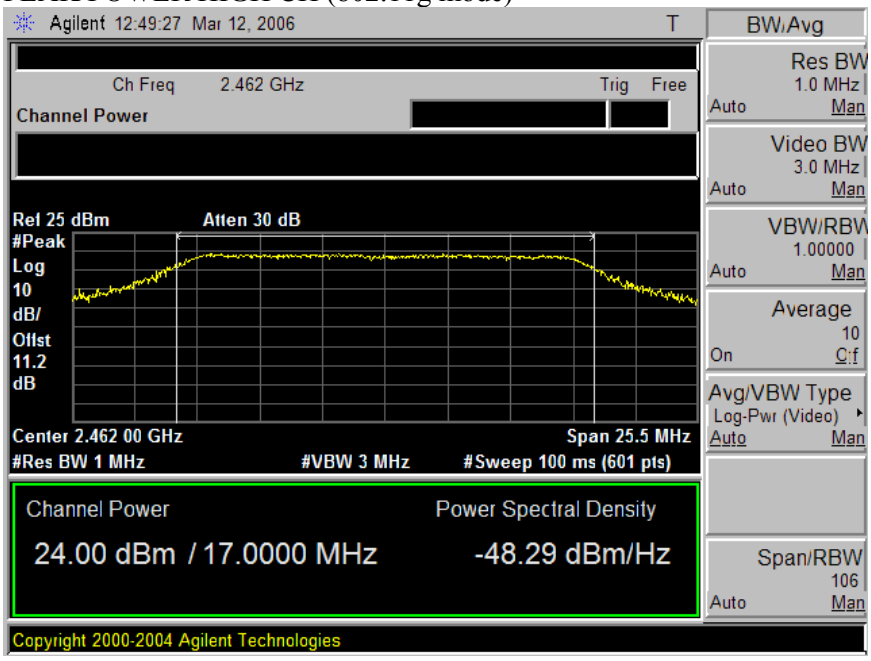

This report shall not be reproduced except in full, without the written approval of CCS.

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm^2)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f^2)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f^2)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm^2)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz
* = Plane-wave equivalent power density
NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.
NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

This report shall not be reproduced except in full, without the written approval of CCS.

CALCULATIONS

Given

$E = \sqrt{(30 * P * G)} / d$

and

$S = E ^ 2 / 3770$

where

E = Field Strength in Volts/meter
P = Power in Watts
G = Numeric antenna gain
d = Distance in meters
S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$d = \sqrt{((30 * P * G) / (3770 * S))}$

Changing to units of Power to mW and Distance to cm, using:

P (mW) = P (W) / 1000 and
d (cm) =100 * d (m)

yields

$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$
$d = 0.282 * \sqrt{(P * G / S)}$

where

d = distance in cm
P = Power in mW
G = Numeric antenna gain
S = Power Density in mW/cm^2

Substituting the logarithmic form of power and gain using:

P (mW) = 10 ^ (P (dBm) / 10) and
G (numeric) = 10 ^ (G (dBi) / 10)

yields

$d = 0.282 * 10 ^ ((P + G) / 20) / \sqrt{S}$

where

d = MPE distance in cm
P = Power in dBm
G = Antenna Gain in dBi
S = Power Density Limit in mW/cm^2

Rearranging terms to calculate the power density at a specific distance yields

$S = 0.0795 * 10 ^ ((P + G) / 10) / (d^2)$

This report shall not be reproduced except in full, without the written approval of CCS.

LIMITS

From §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm^2

RESULTS

No non-compliance noted: (MPE distance equals 20 cm)

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm^2)
802.11b	20.0	20.23	1.03	0.03
802.11g	20.0	24.00	1.03	0.06

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

This report shall not be reproduced except in full, without the written approval of CCS.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None: for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	14.99
Middle	2437	16.64
High	2462	16.95

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	15.56
Middle	2437	17.14
High	2462	16.21

This report shall not be reproduced except in full, without the written approval of CCS.

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-9.80	8	-17.80
Middle	2437	-4.77	8	-12.77
High	2462	-2.98	8	-10.98

802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.70	8	-13.70
Middle	2437	-2.51	8	-10.51
High	2462	-5.73	8	-13.73

This report shall not be reproduced except in full, without the written approval of CCS.

PEAK POWER SPECTRAL DENSITY (802.11b MODE)

PPSD LOW CH (802.11b mode)

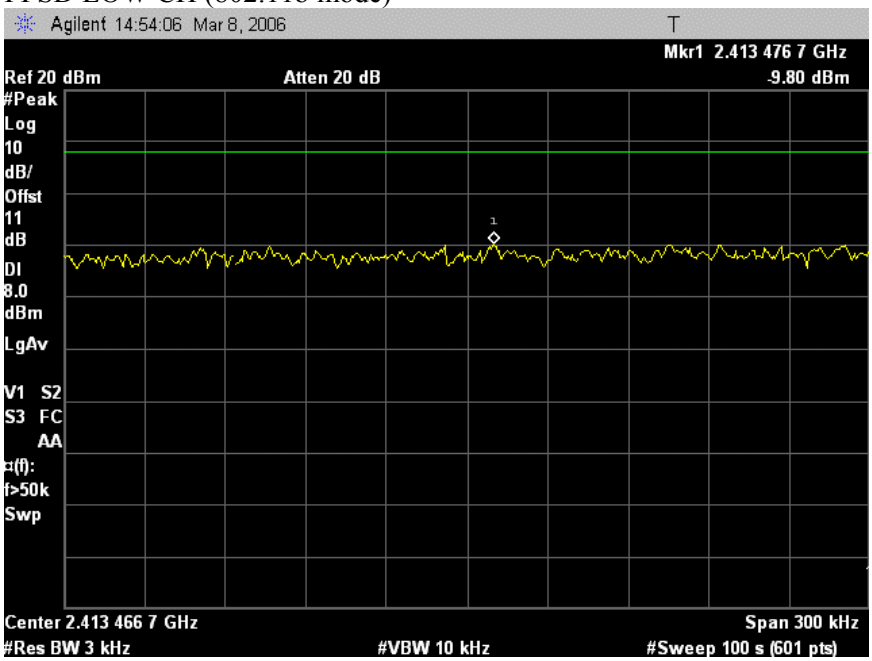

This report shall not be reproduced except in full, without the written approval of CCS.

PPSD MID CH (802.11b mode)

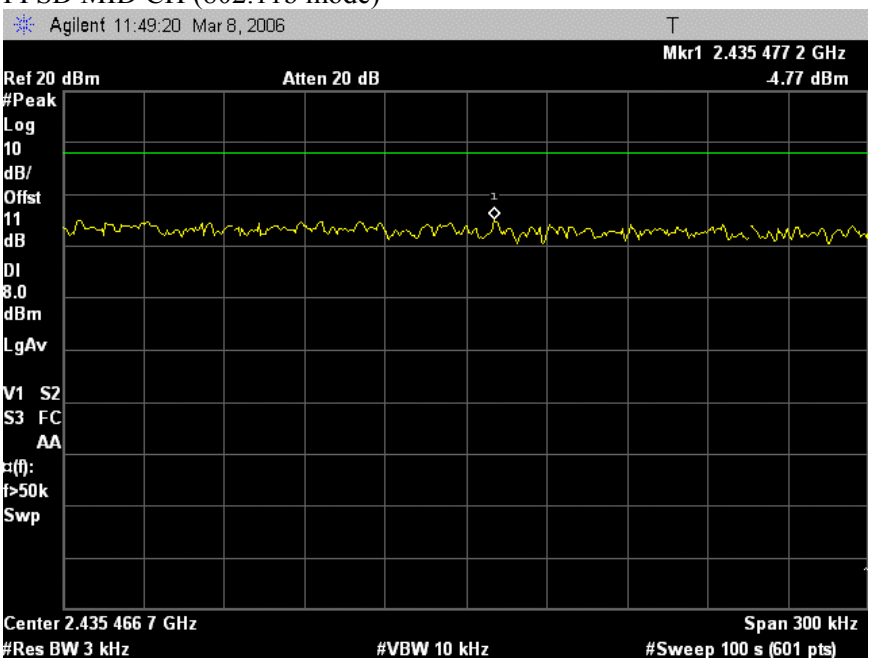

This report shall not be reproduced except in full, without the written approval of CCS.

PPSD HIGH CH (802.11b mode)

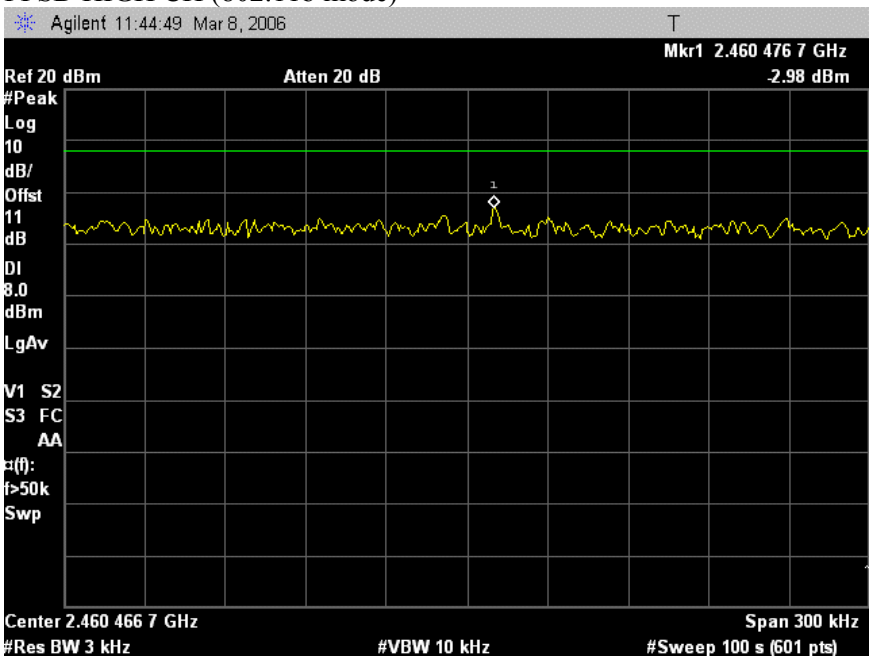

This report shall not be reproduced except in full, without the written approval of CCS.

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

PPSD LOW CH (802.11g mode)

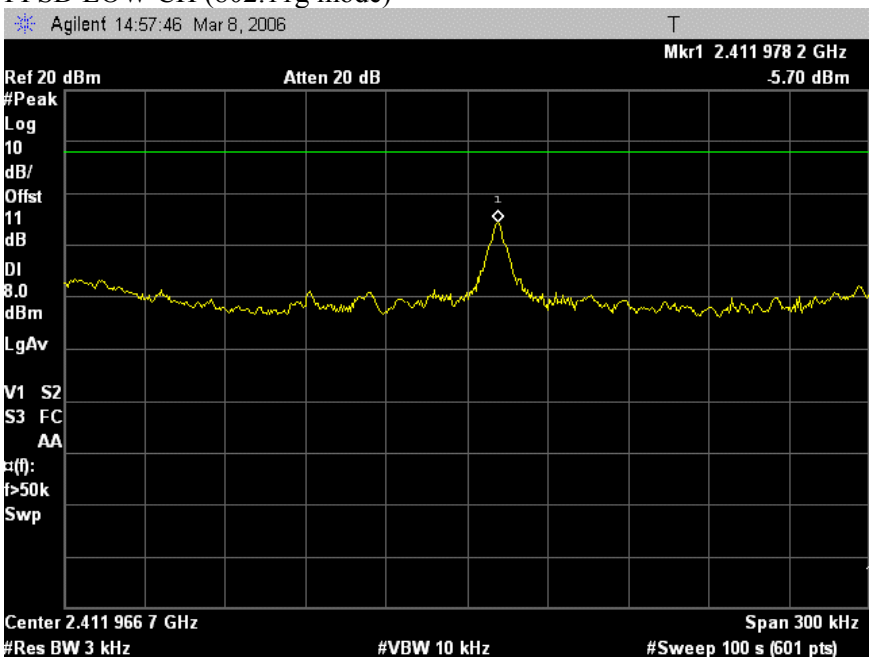

This report shall not be reproduced except in full, without the written approval of CCS.

PPSD MID CH (802.11g mode)

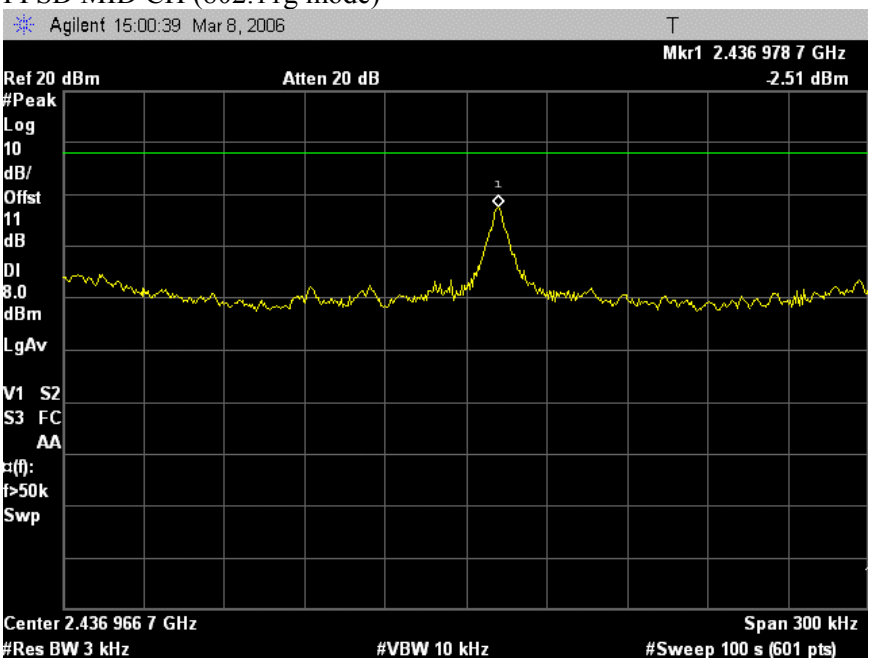

This report shall not be reproduced except in full, without the written approval of CCS.

PPSD HIGH CH (802.11g mode)

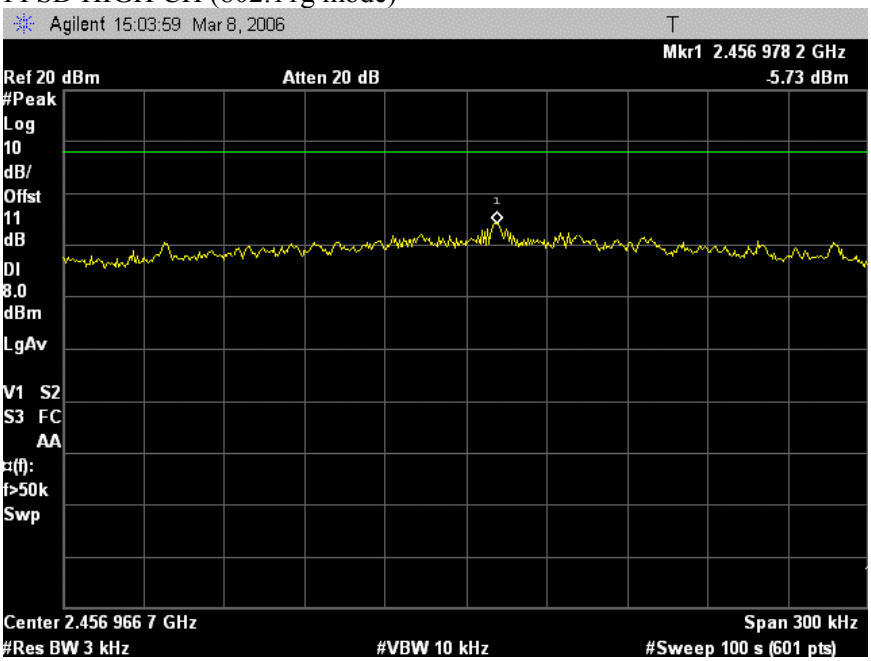

This report shall not be reproduced except in full, without the written approval of CCS.

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Conducted power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS

No non-compliance noted:

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

LOW CH BANDEDGE (802.11b mode)

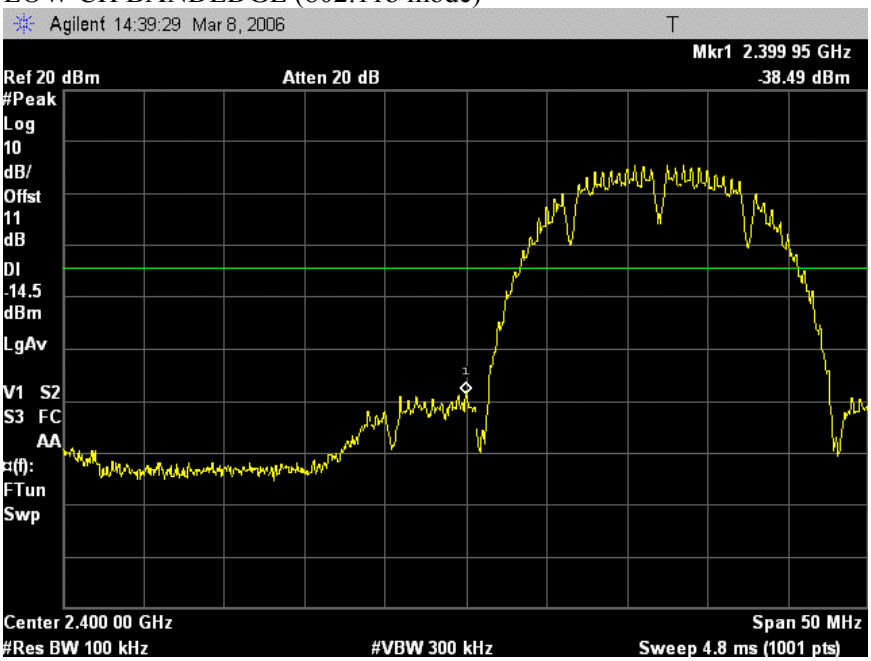

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11b mode)

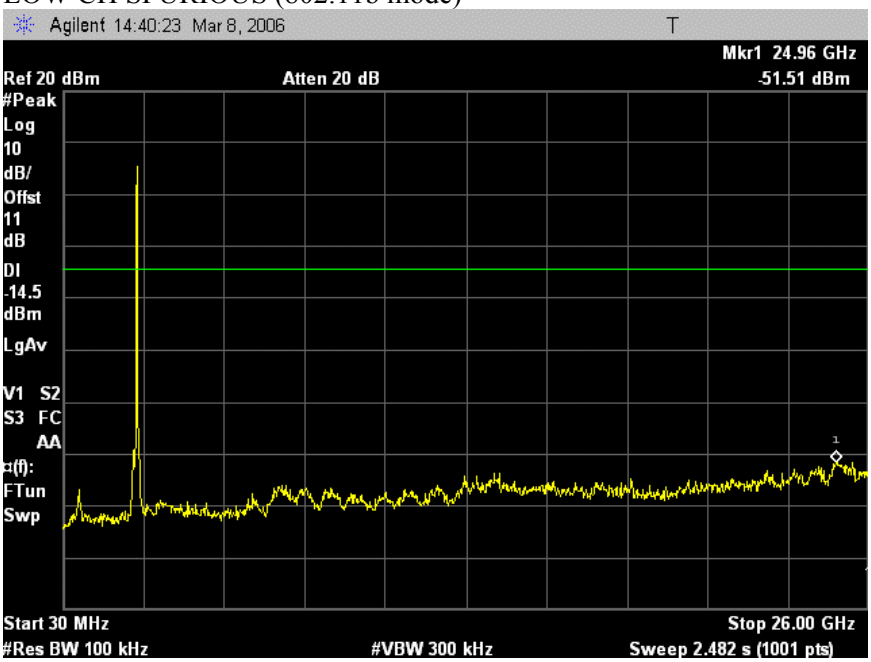

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

MID CH REFERENCE (802.11b mode)

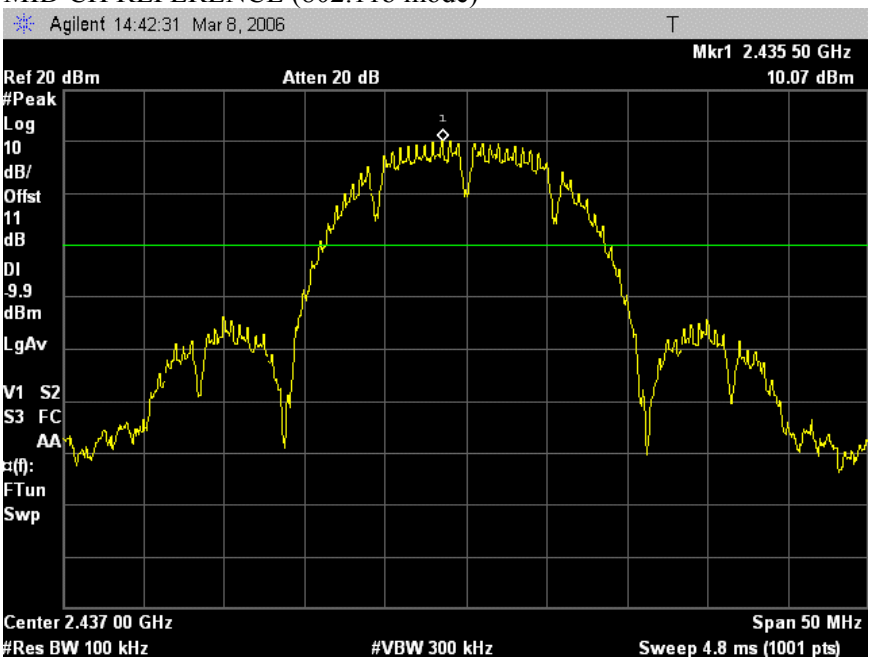

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH SPURIOUS (802.11b mode)

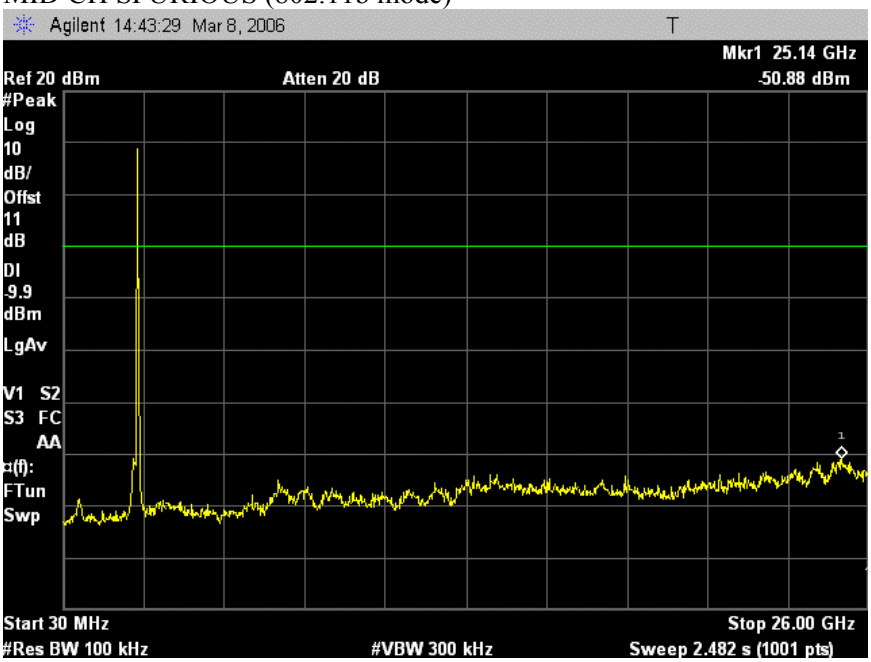

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

HIGH CH BANDEDGE (802.11b mode)

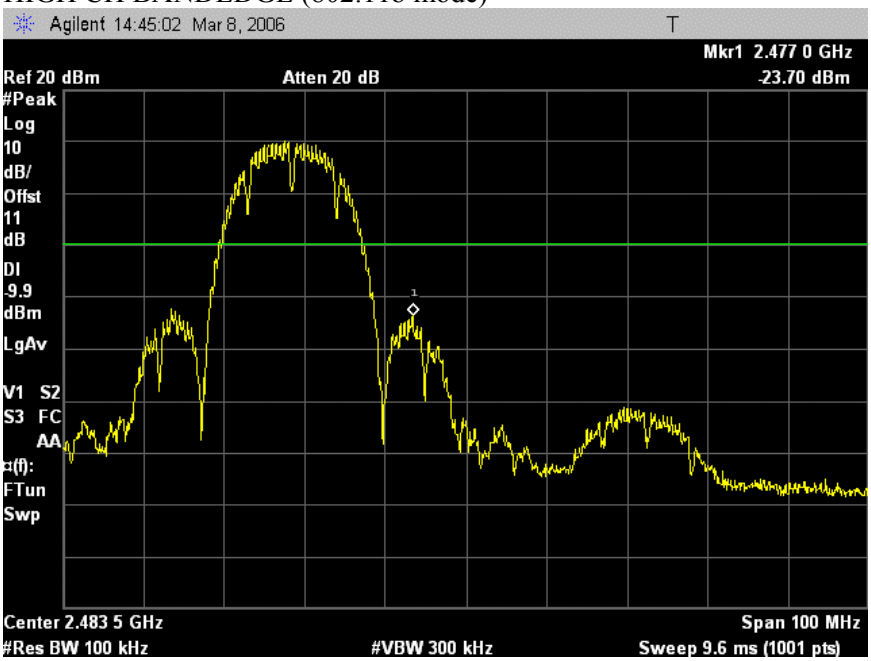

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11b mode)

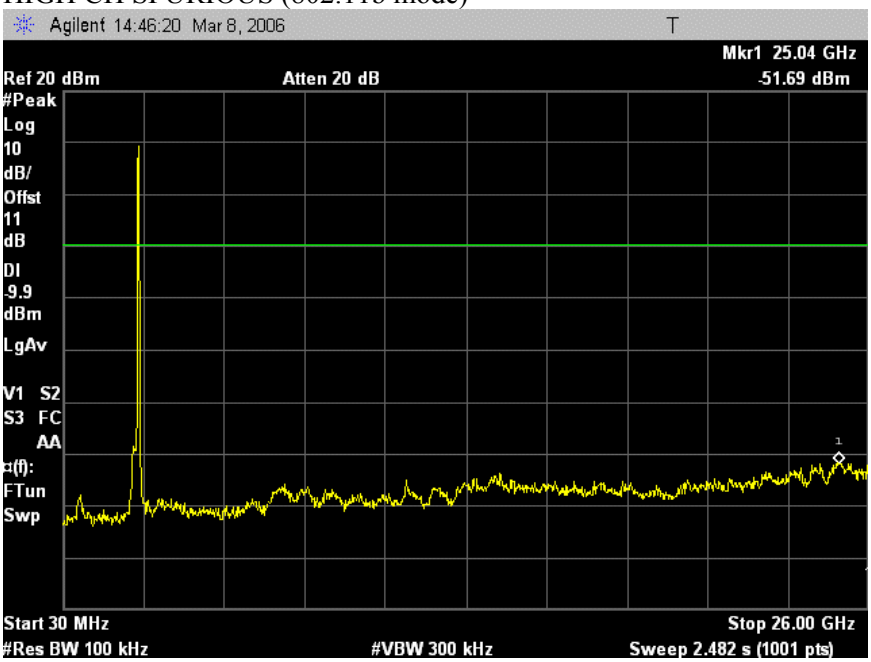

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

LOW CH BANDEDGE (802.11g mode)

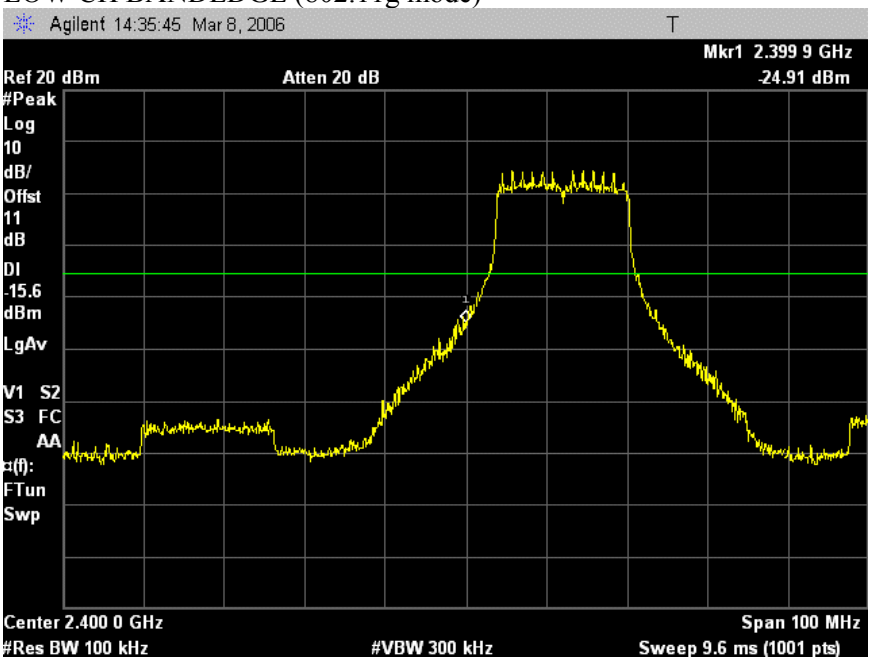

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH SPURIOUS (802.11g mode)

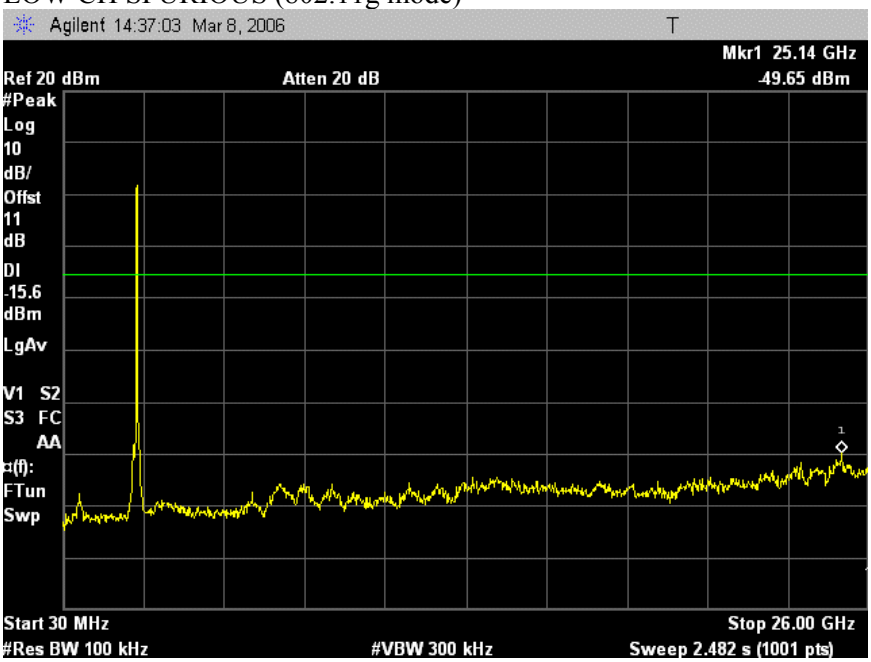

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

MID CH REFERENCE (802.11g mode)

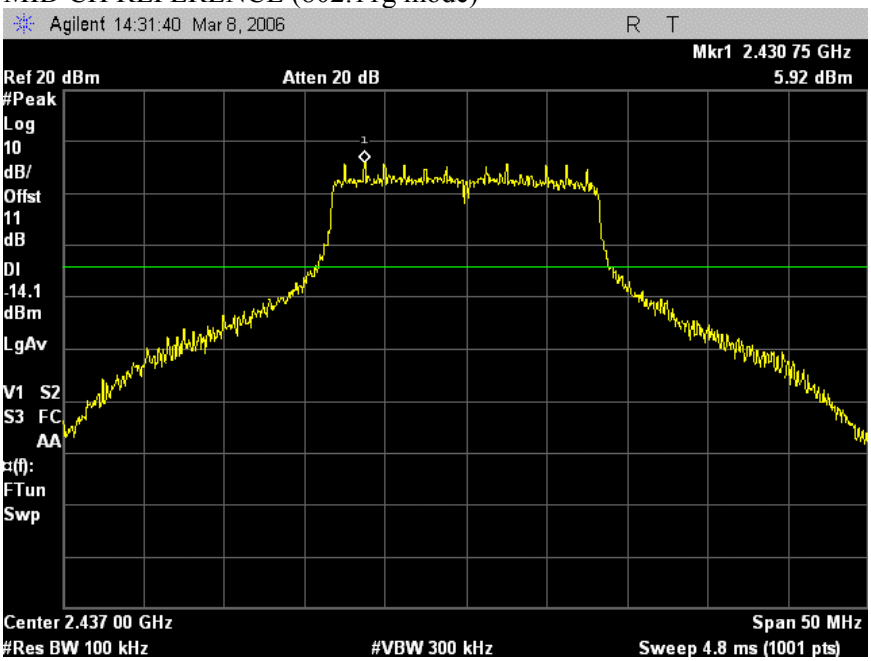

This report shall not be reproduced except in full, without the written approval of CCS.

MID CH SPURIOUS (802.11g mode)

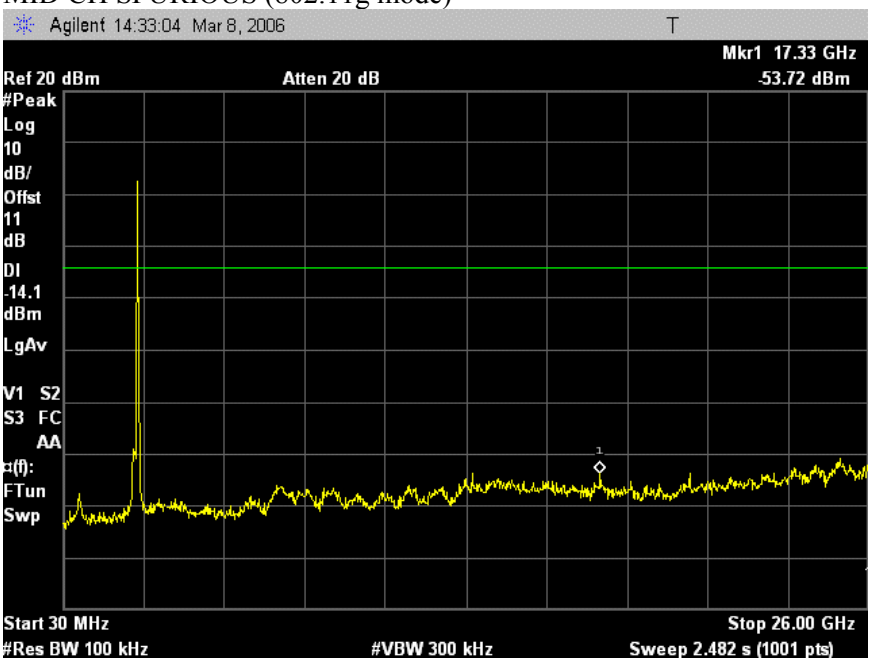

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

HIGH CH BANDEDGE (802.11g mode)

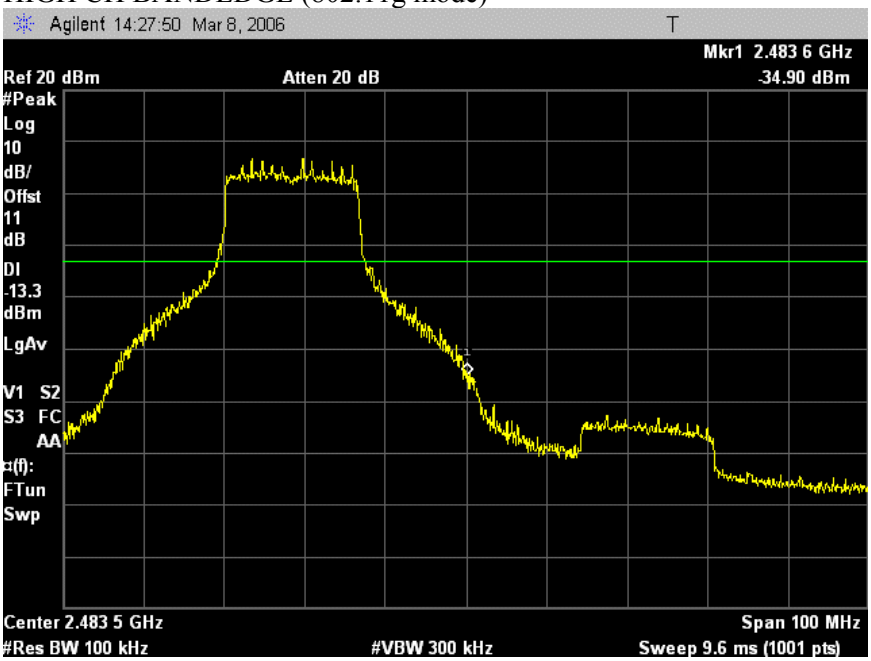

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH SPURIOUS (802.11g mode)

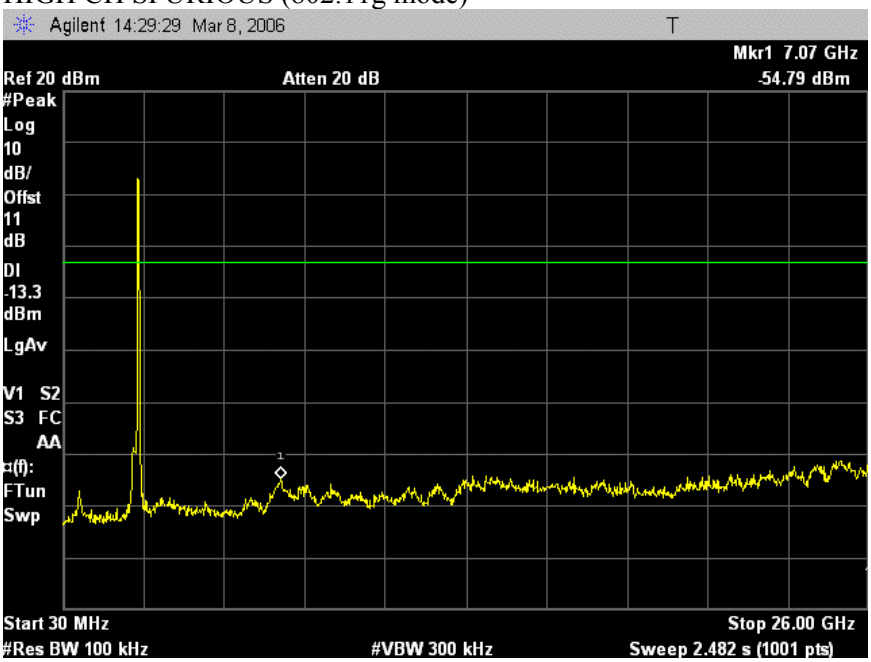

This report shall not be reproduced except in full, without the written approval of CCS.

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
[1]0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	([2])
13.36 - 13.41			

[1] Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
[2] Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

This report shall not be reproduced except in full, without the written approval of CCS.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

This report shall not be reproduced except in full, without the written approval of CCS.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

This report shall not be reproduced except in full, without the written approval of CCS.

7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND

EUT WITH FOXCONN ANTENNA

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Horizontal)

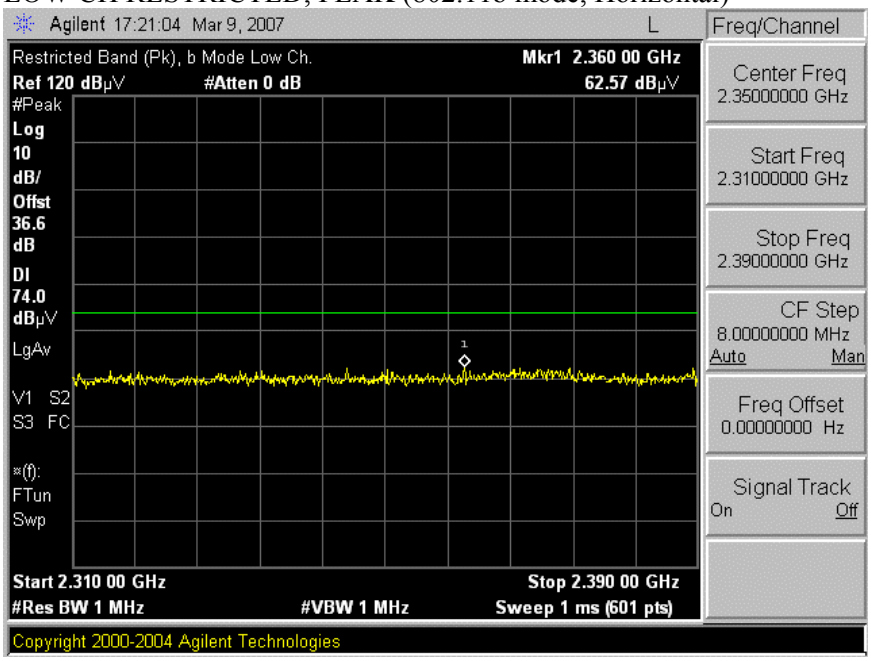

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH RESTRICTED, AVG (802.11b mode, Horizontal)

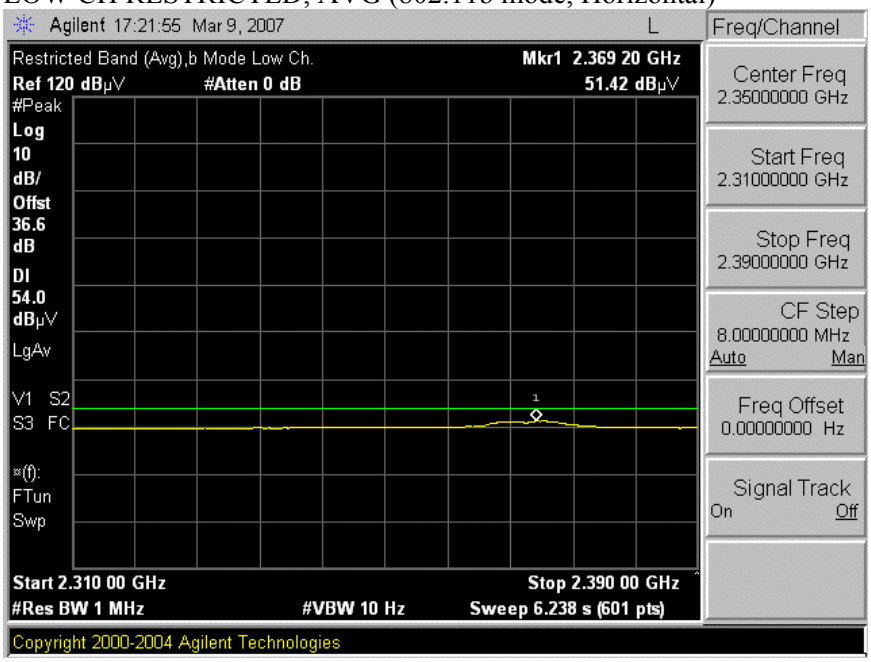

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Vertical)

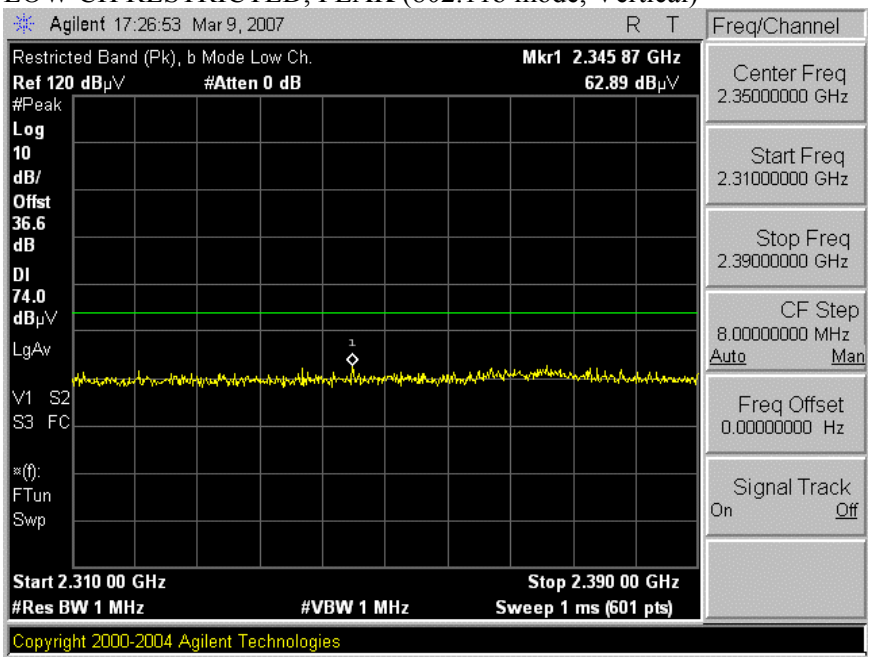

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH RESTRICTED, AVG (802.11b mode, Vertical)

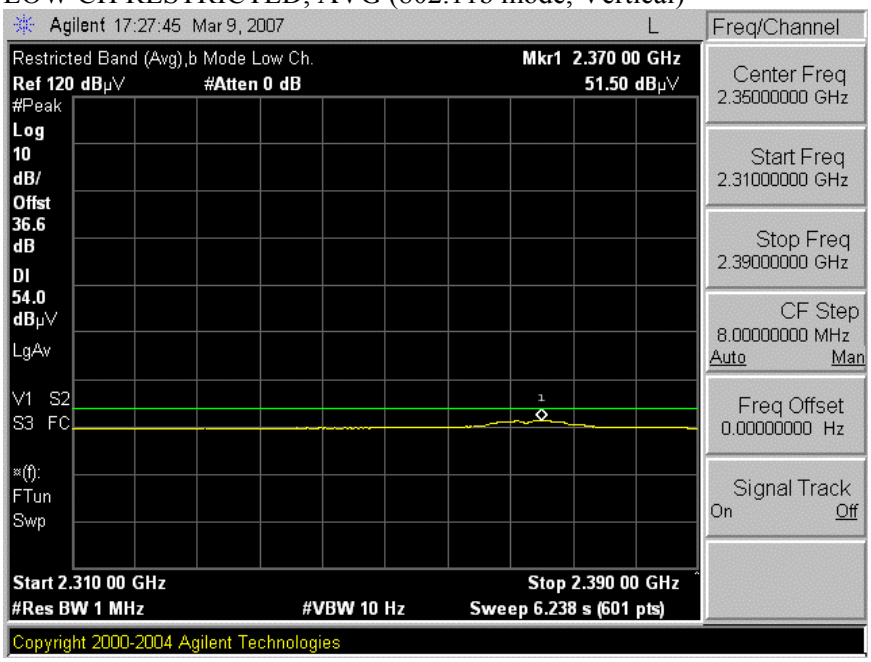

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Horizontal)

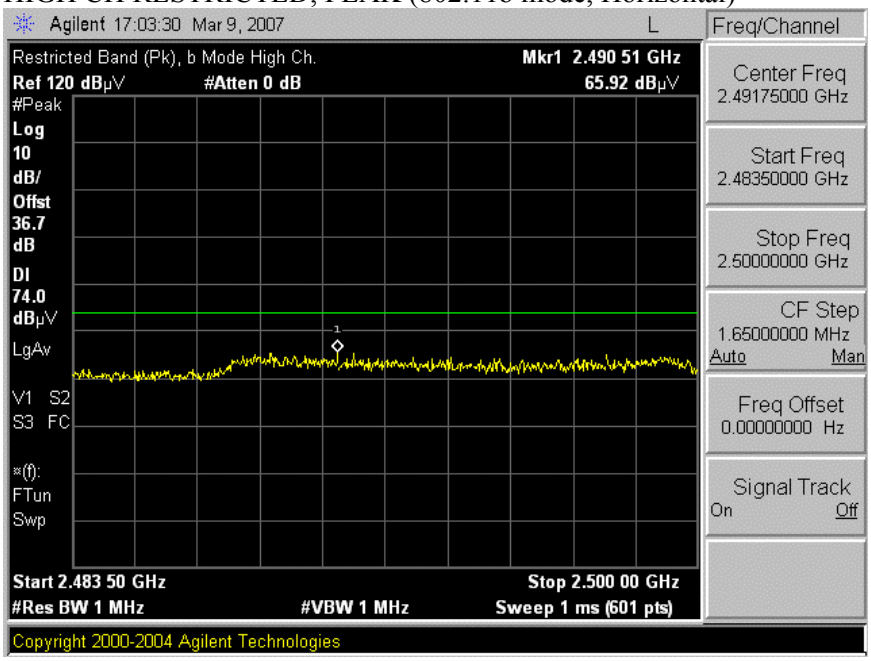

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH RESTRICTED, AVG (802.11b mode, Horizontal)

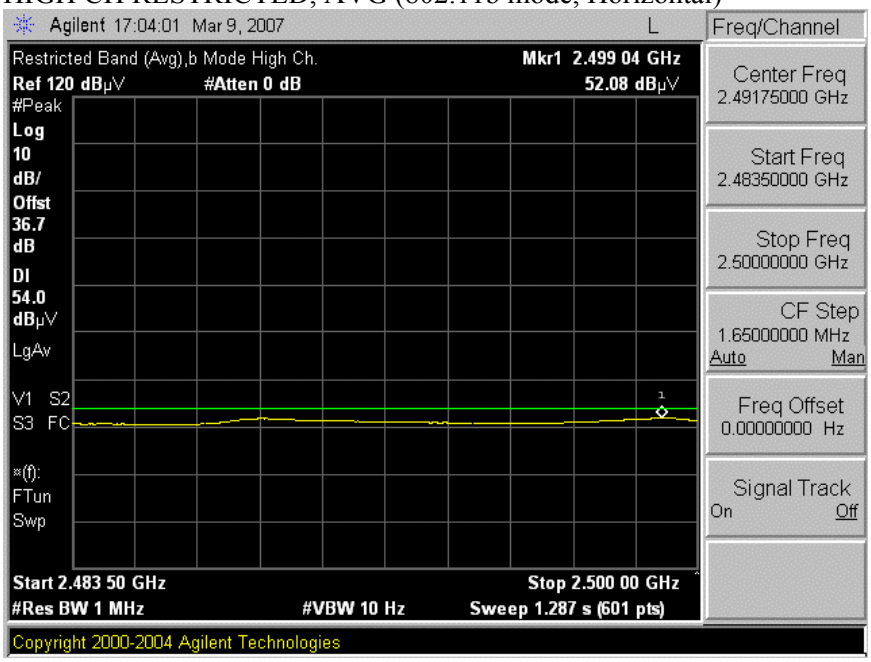

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Vertical)

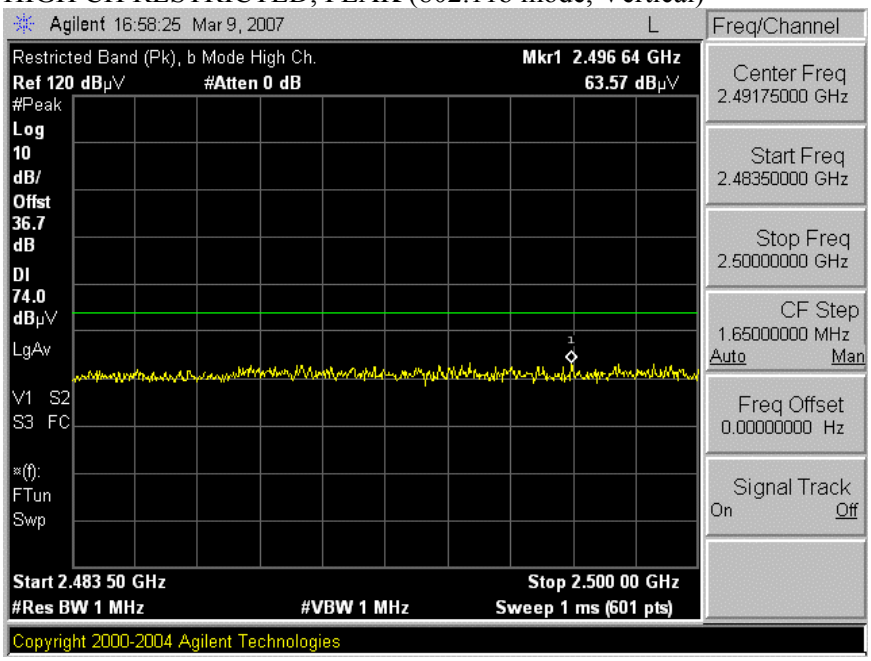

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH RESTRICTED, AVG (802.11b mode, Vertical)

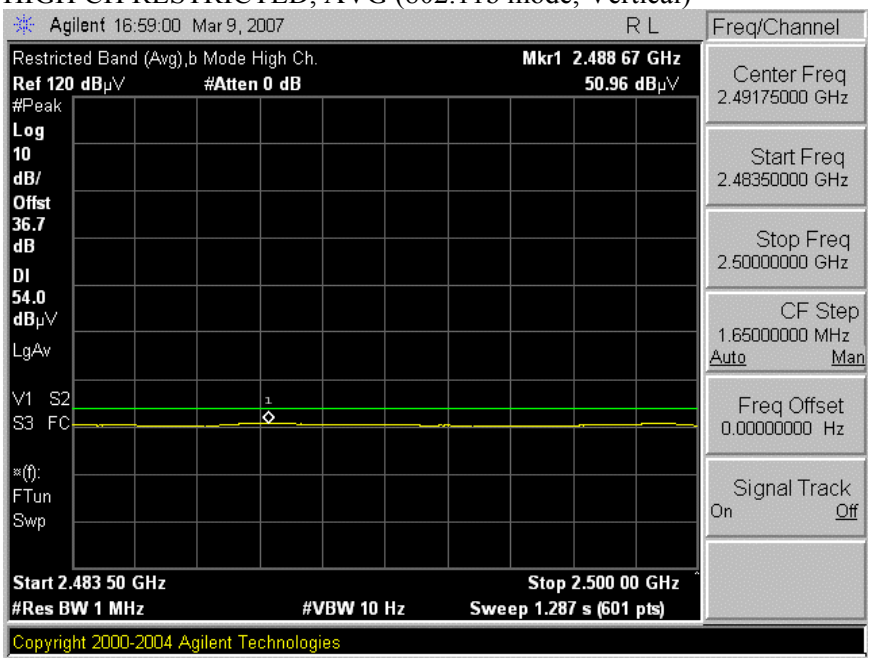

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

03/09/07 **High Frequency Measurement**
Compliance Certification Services, Fremont B-5m Chamber

Test Engr:William Zhuang
Project #:7I10887
Company:SAMSUNG ELECTRONICS CO. LTD.
EUT Descrip.:Notbook PC
EUT M/N:NP-Q1-U
Test Target:FCC 15C-WLAN
Mode Oper:Tx On, b Mode, Antenna: Foxconn

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
b Mode Low Ch. Art set: 15 dBm															
4.824	3.0	37.9	27.8	33.7	7.4	-34.8	0.0	0.6	44.8	34.7	74.0	54.0	-29.2	-19.3	V
4.824	3.0	37.2	25.9	33.7	7.4	-34.8	0.0	0.6	44.1	32.9	74.0	54.0	-29.9	-21.1	H
7.236	3.0	37.2	25.2	35.2	9.0	-34.1	0.0	0.6	47.8	35.8	74.0	54.0	-26.2	-18.2	H
7.236	3.0	37.3	25.2	35.2	9.0	-34.1	0.0	0.6	47.9	35.8	74.0	54.0	-26.1	-18.2	V
b Mode Mid Ch. Art set: 16.5 dBm															
4.874	3.0	39.4	31.8	33.7	7.5	-34.8	0.0	0.6	46.4	38.8	74.0	54.0	-27.6	-15.2	V
4.874	3.0	37.3	27.5	33.7	7.5	-34.8	0.0	0.6	44.4	34.5	74.0	54.0	-29.6	-19.5	H
7.311	3.0	36.9	25.6	35.2	9.0	-34.1	0.0	0.6	47.5	36.2	74.0	54.0	-26.5	-17.8	H
7.311	3.0	37.8	27.2	35.2	9.0	-34.1	0.0	0.6	48.5	37.9	74.0	54.0	-25.5	-16.1	V
b Mode High Ch. Art set:16.5 dBm															
4.924	3.0	39.7	31.6	33.8	7.5	-34.8	0.0	0.6	46.8	38.7	74.0	54.0	-27.2	-15.3	V
4.924	3.0	38.7	29.8	33.8	7.5	-34.8	0.0	0.6	45.8	36.9	74.0	54.0	-28.2	-17.1	H
7.386	3.0	37.3	26.2	35.2	9.0	-34.1	0.0	0.6	48.0	37.0	74.0	54.0	-26.0	-17.0	H
7.386	3.0	37.2	25.2	35.2	9.0	-34.1	0.0	0.6	48.0	35.9	74.0	54.0	-26.0	-18.1	V

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Horizontal)

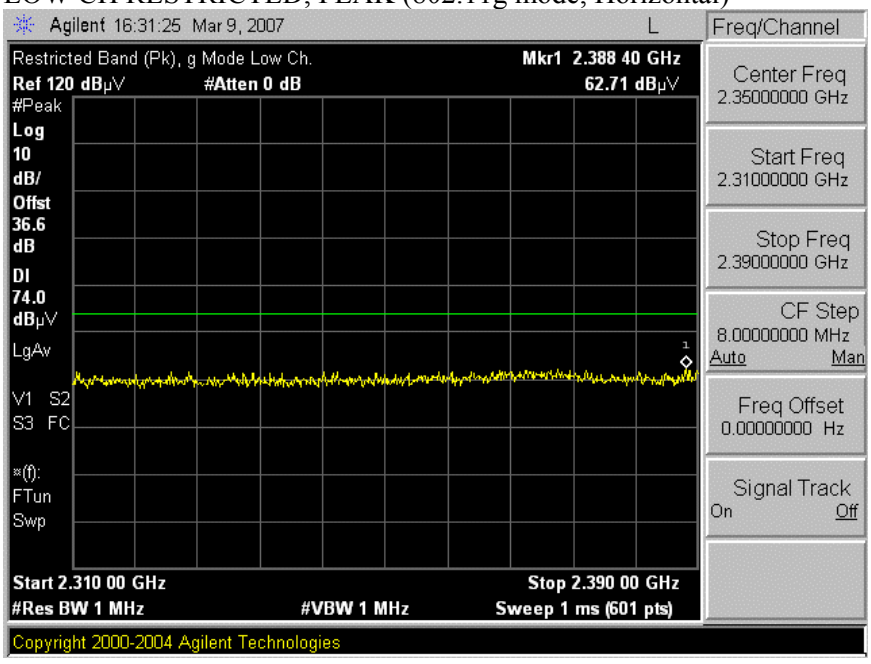

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH RESTRICTED, AVG (802.11g mode, Horizontal)

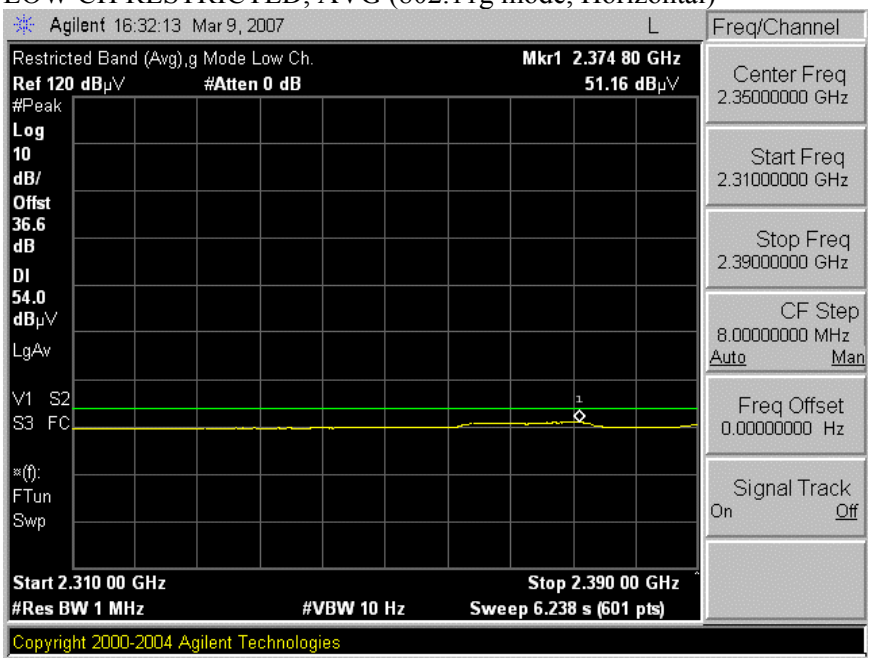

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Vertical)

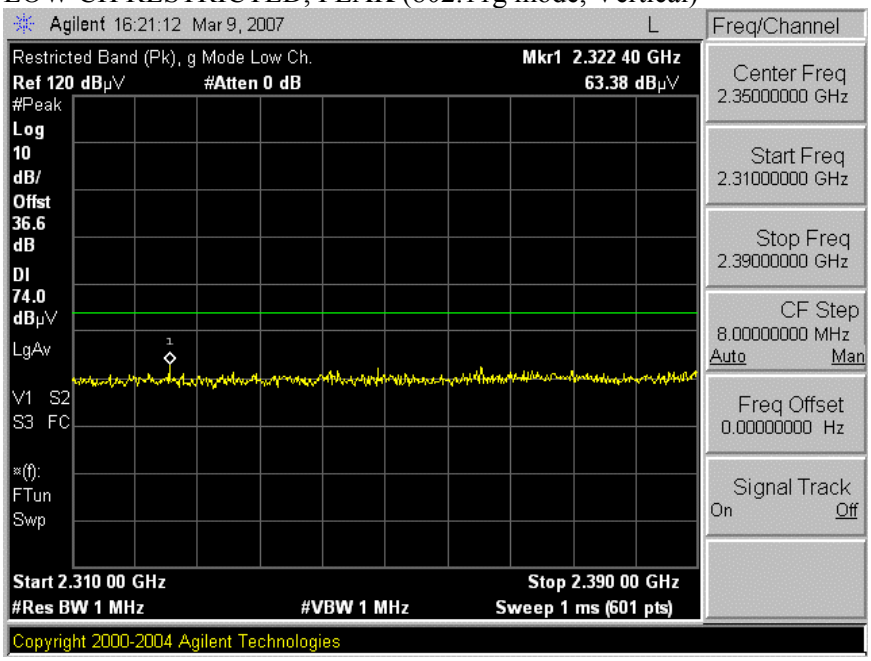

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH RESTRICTED, AVG (802.11g mode, Vertical)

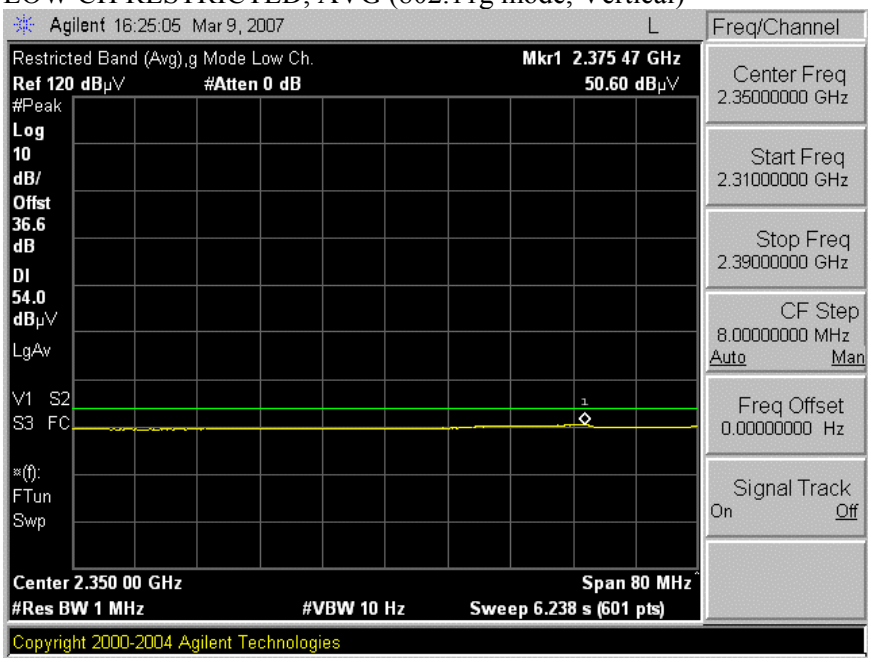

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Horizontal)

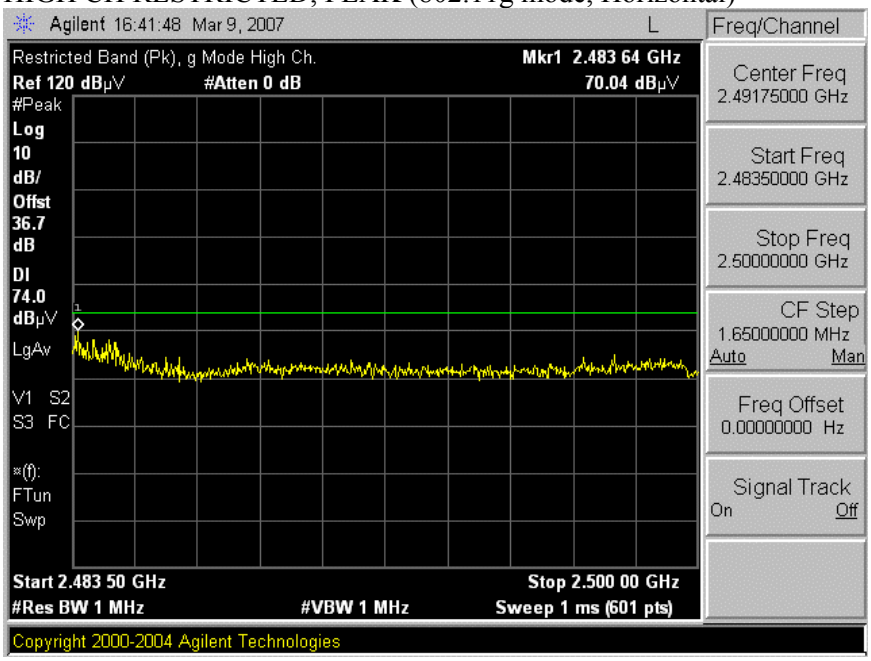

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH RESTRICTED, AVG (802.11g mode, Horizontal)

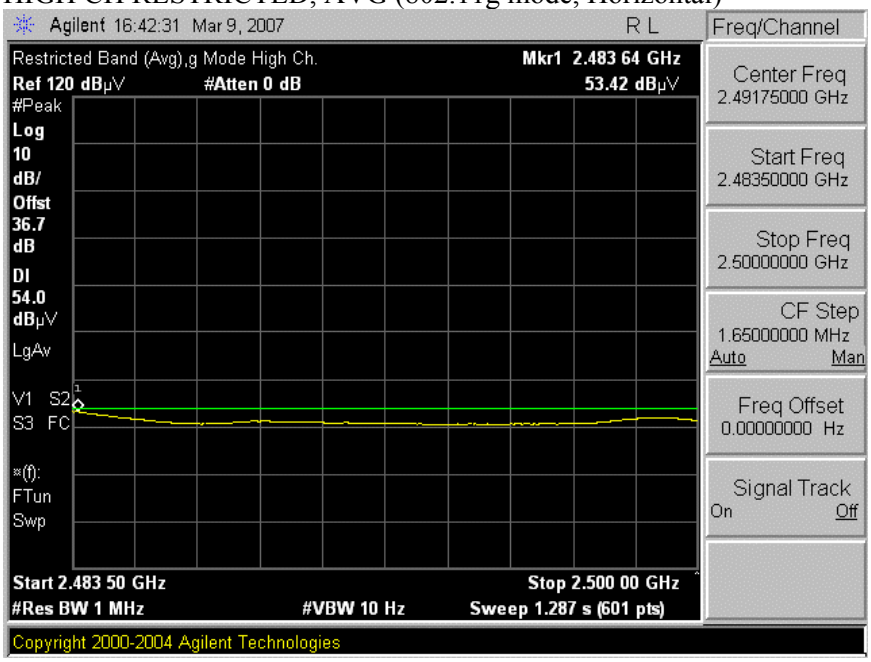

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Vertical)

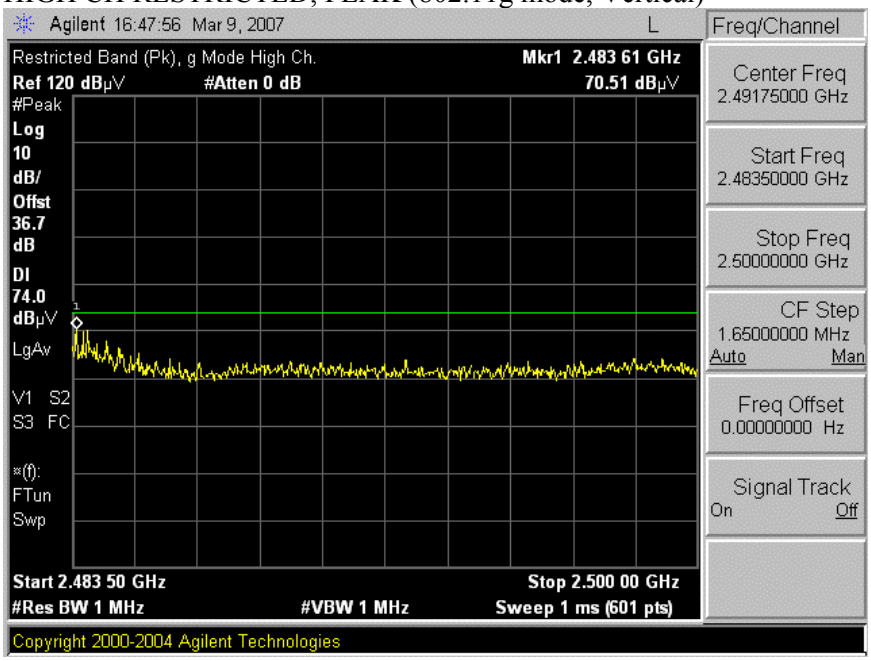

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH RESTRICTED, AVG (802.11g mode, Vertical)

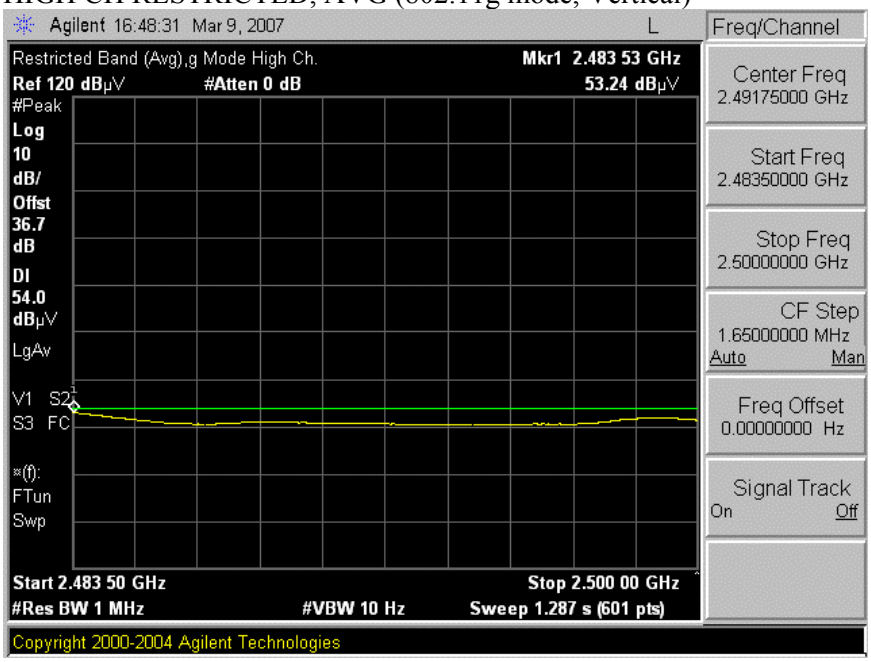

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

03/09/07 **High Frequency Measurement**
Compliance Certification Services, Fremont B-5m Chamber

Test Engr:William Zhuang
Project #:7I10887
Company:SAMSUNG ELECTRONICS CO. LTD.
EUT Descrip.:Notbook PC
EUT M/N:NP-Q1-U
Test Target:FCC 15C-WLAN
Mode Oper:Tx On, g Mode, Antenna: Foxconn

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
g Mode, Low Ch. Art set: 15 dBm															
4.824	3.0	37.4	25.4	33.7	7.4	-34.8	0.0	0.6	44.3	32.3	74.0	54.0	-29.7	-21.7	V
4.824	3.0	37.3	25.4	33.7	7.4	-34.8	0.0	0.6	44.2	32.3	74.0	54.0	-29.8	-21.7	H
7.236	3.0	37.8	24.9	35.2	9.0	-34.1	0.0	0.6	48.4	35.5	74.0	54.0	-25.6	-18.5	H
7.236	3.0	37.2	24.8	35.2	9.0	-34.1	0.0	0.6	47.8	35.4	74.0	54.0	-26.2	-18.6	V
g Mode Mid Ch. Art set: 16.5 dBm															
4.874	3.0	37.9	25.8	33.7	7.5	-34.8	0.0	0.6	44.9	32.8	74.0	54.0	-29.1	-21.2	V
4.874	3.0	37.6	25.5	33.7	7.5	-34.8	0.0	0.6	44.6	32.5	74.0	54.0	-29.4	-21.5	H
7.311	3.0	41.3	28.3	35.2	9.0	-34.1	0.0	0.6	51.9	38.9	74.0	54.0	-22.1	-15.1	H
7.311	3.0	38.0	26.3	35.2	9.0	-34.1	0.0	0.6	48.7	36.9	74.0	54.0	-25.3	-17.1	V
g Mode High Ch. Art set: 15.5 dBm															
4.924	3.0	37.4	25.5	33.8	7.5	-34.8	0.0	0.6	44.5	32.7	74.0	54.0	-29.5	-21.3	V
4.924	3.0	37.6	25.8	33.8	7.5	-34.8	0.0	0.6	44.7	32.9	74.0	54.0	-29.3	-21.1	H
7.386	3.0	36.8	25.1	35.2	9.0	-34.1	0.0	0.6	47.5	35.8	74.0	54.0	-26.5	-18.2	H
7.386	3.0	38.0	25.5	35.2	9.0	-34.1	0.0	0.6	48.7	36.2	74.0	54.0	-25.3	-17.8	V

This report shall not be reproduced except in full, without the written approval of CCS.

EUT WITH WNC ANTENNA

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Horizontal)

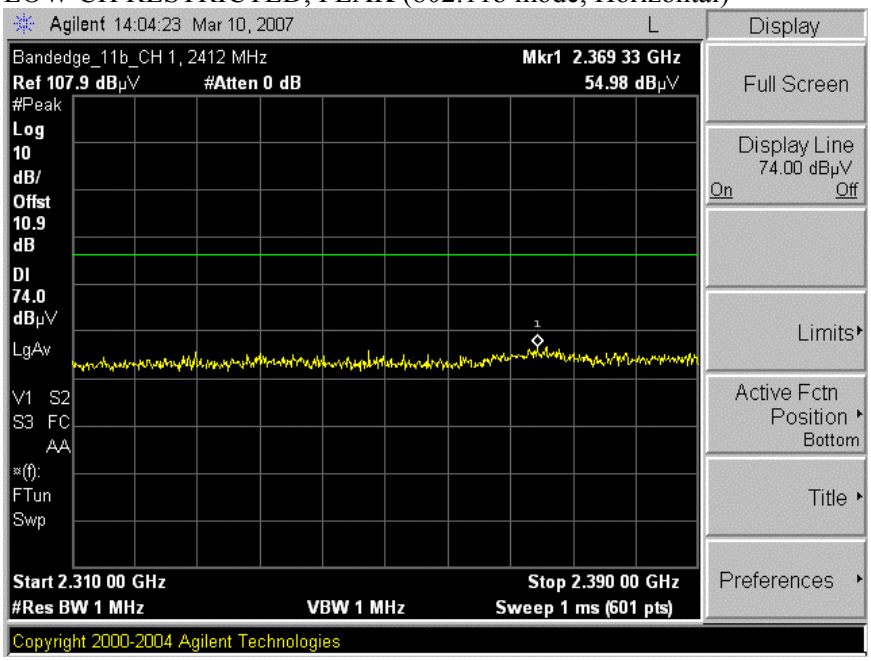

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH RESTRICTED, AVG (802.11b mode, Horizontal)

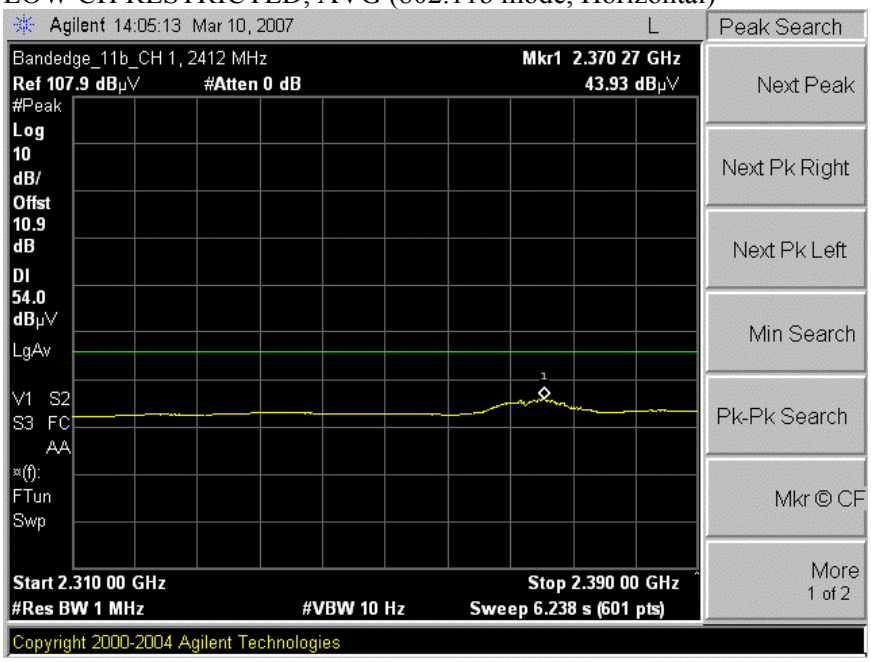

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11b mode, Vertical)

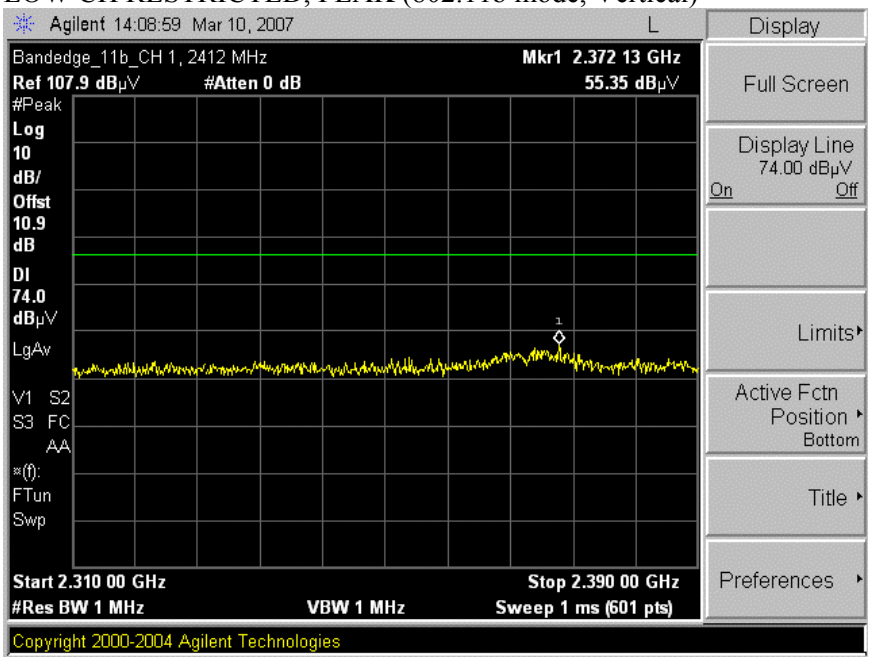

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH RESTRICTED, AVG (802.11b mode, Vertical)

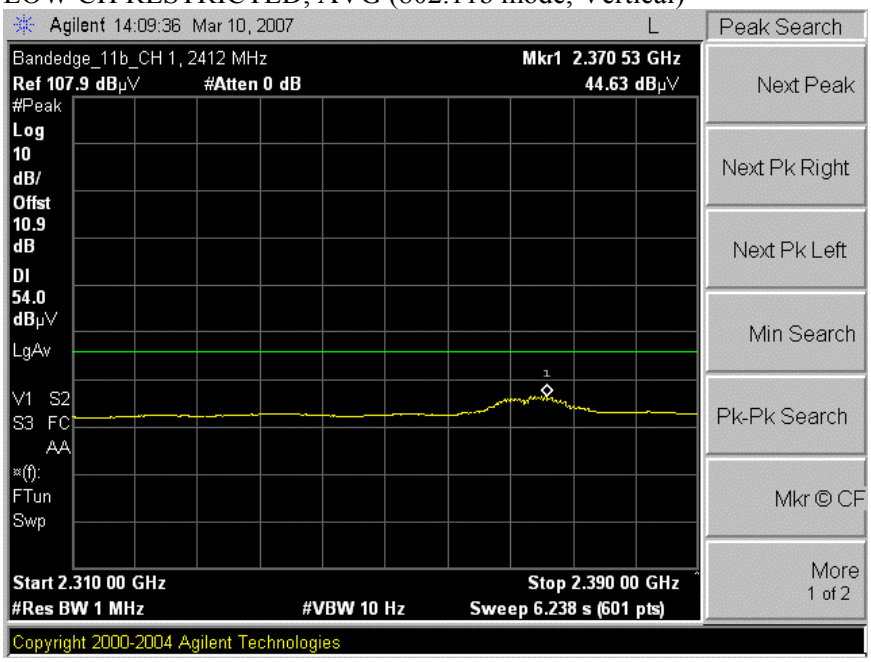

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Horizontal)

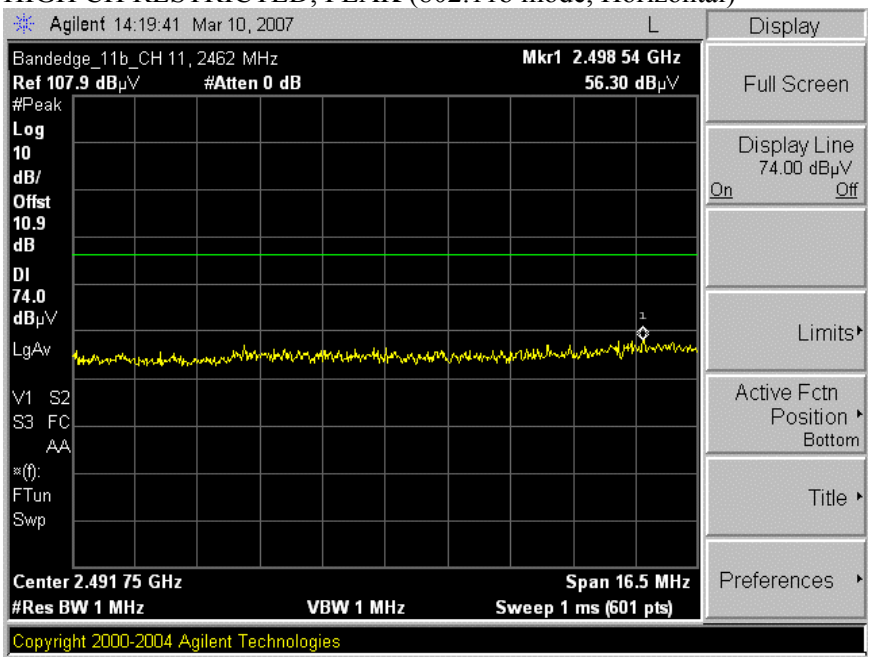

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH RESTRICTED, AVG (802.11b mode, Horizontal)

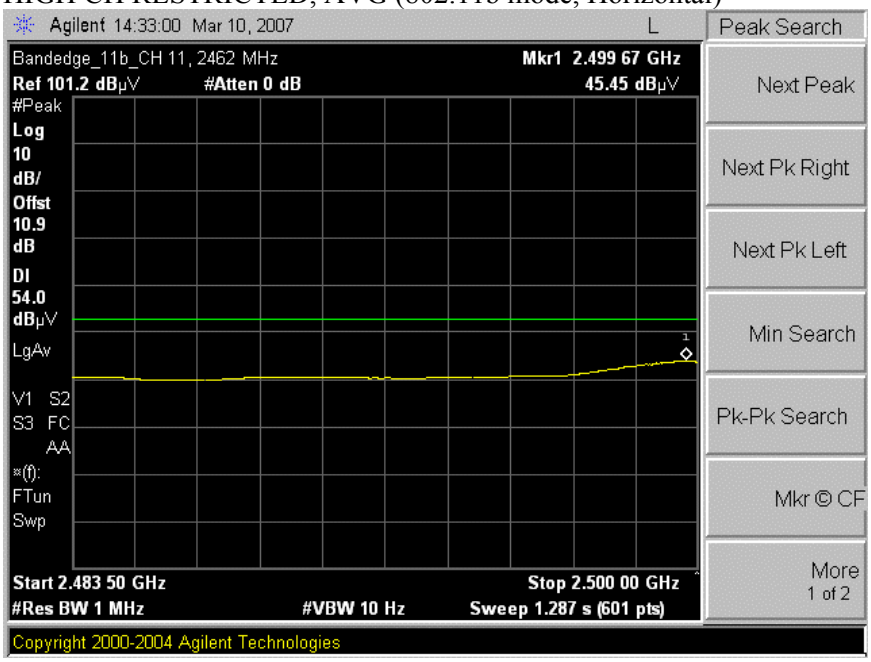

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11b mode, Vertical)

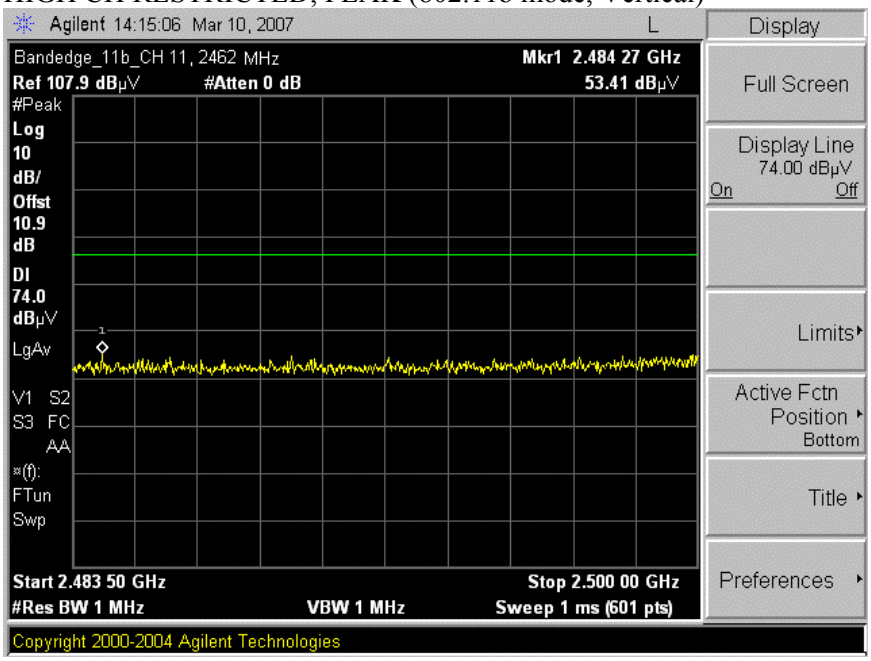

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH RESTRICTED, AVG (802.11b mode, Vertical)

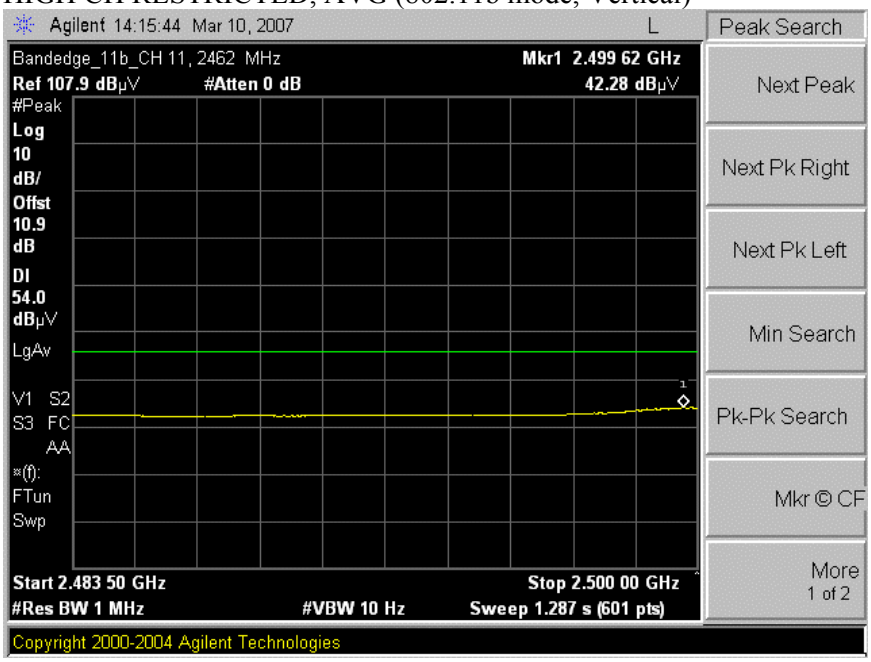

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

High Frequency Measurement
Compliance Certification Services, Fremont B-5m Chamber

Test Engr: Vien Tran
Project #: 7I10887
Company: SAMSUNG ELECTRONICS CO. LTD.
EUT Descrip.: Notebook PC
EUT M/N: NP-Q1u
Test Target: FCC 15C-WLAN
Mode Oper: Tx On, 11b Mode, Antenna: WNC

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn >18GHz	Limit
T119; S/N: 29301 @3m	T34 HP 8449B			FCC 15.205

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
Thanh 177079008		Gordon 203134001	HPF_4.0GHz	

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CH, 2412 MHz															
4.824	3.0	40.1	29.5	33.7	7.4	-34.8	0.0	0.6	47.0	36.4	74	54	-27.0	-17.6	V
4.824	3.0	39.8	28.9	33.7	7.4	-34.8	0.0	0.6	46.7	35.8	74	54	-27.3	-18.2	H
MID CH, 2437 MHz															
4.874	3.0	42.8	34.1	33.7	7.5	-34.8	0.0	0.6	49.8	41.1	74	54	-24.2	-12.9	V
7.311	3.0	40.4	29.9	35.2	9.0	-34.1	0.0	0.6	51.1	40.6	74	54	-22.9	-13.4	V
4.874	3.0	41.6	31.8	33.7	7.5	-34.8	0.0	0.6	48.6	38.8	74	54	-25.4	-15.2	H
7.311	3.0	39.8	29.9	35.2	9.0	-34.1	0.0	0.6	50.5	40.6	74	54	-23.5	-13.4	H
HI CH, 2462 MHz															
4.924	3.0	43.5	34.9	33.8	7.5	-34.8	0.0	0.6	50.6	42.0	74	54	-23.4	-12.0	V
7.386	3.0	41.5	30.3	35.2	9.0	-34.1	0.0	0.6	52.2	41.1	74	54	-21.8	-12.9	V
4.924	3.0	42.8	32.9	33.8	7.5	-34.8	0.0	0.6	49.9	40.0	74	54	-24.1	-14.0	H
7.386	3.0	40.2	29.7	35.2	9.0	-34.1	0.0	0.6	50.9	40.4	74	54	-23.1	-13.6	H
No other emission were detected above system noise floor															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Horizontal)

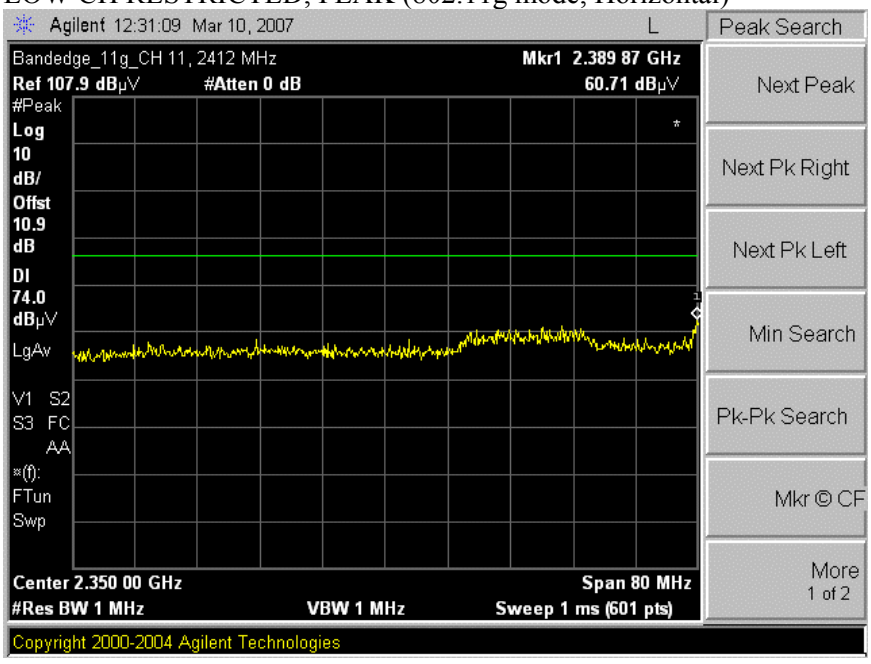

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH RESTRICTED, AVG (802.11g mode, Horizontal)

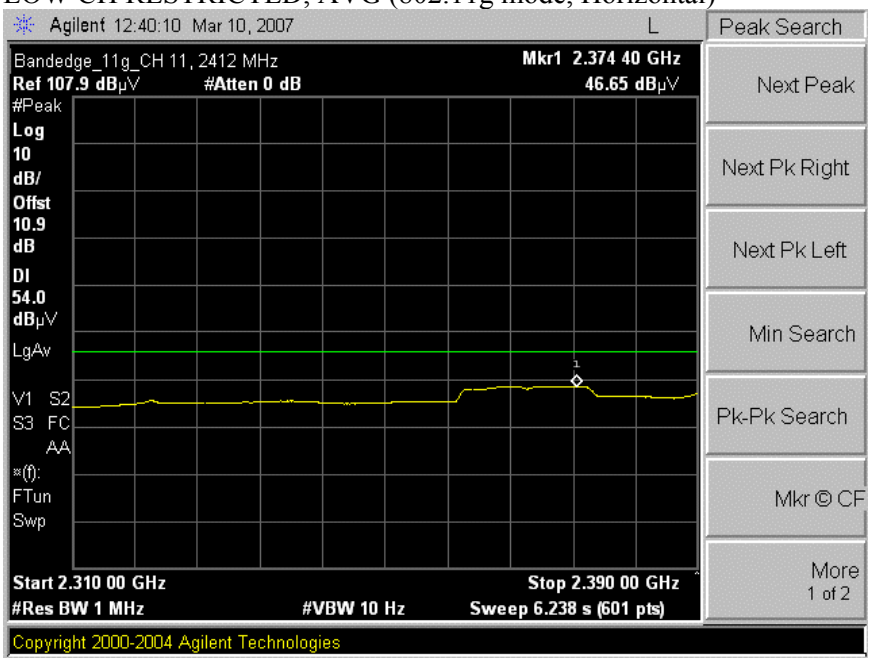

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

LOW CH RESTRICTED, PEAK (802.11g mode, Vertical)

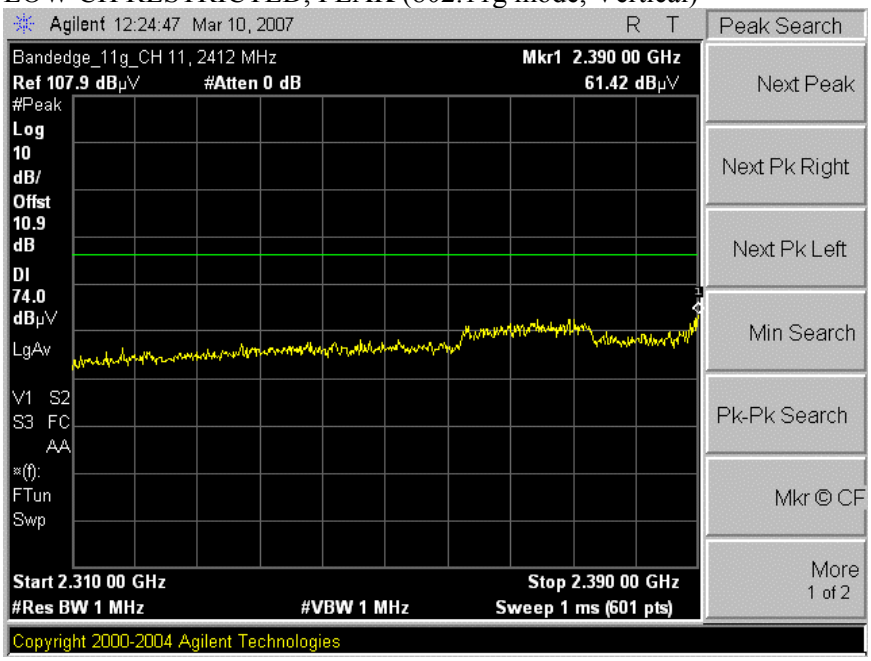

This report shall not be reproduced except in full, without the written approval of CCS.

LOW CH RESTRICTED, AVG (802.11g mode, Vertical)

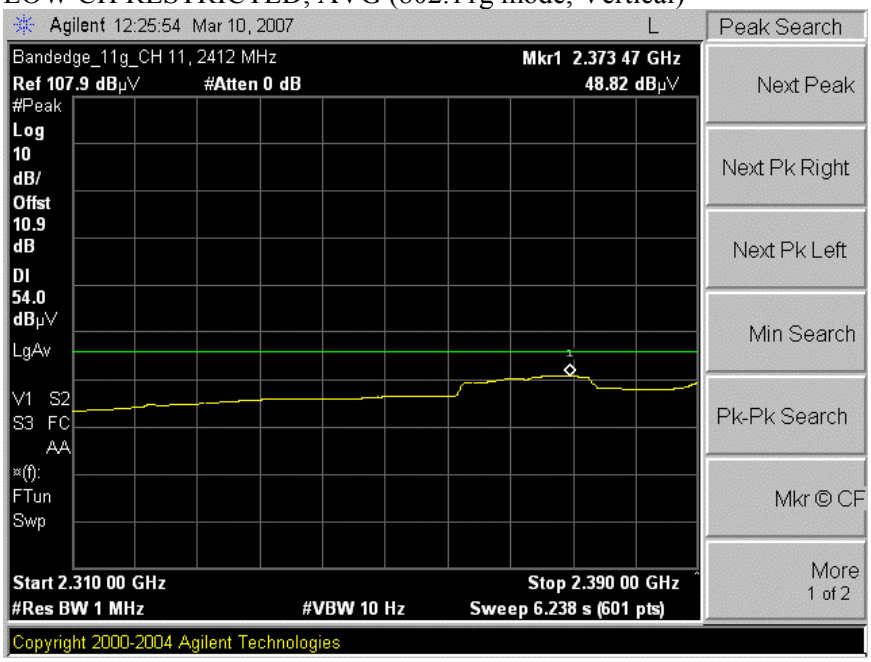

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Horizontal)

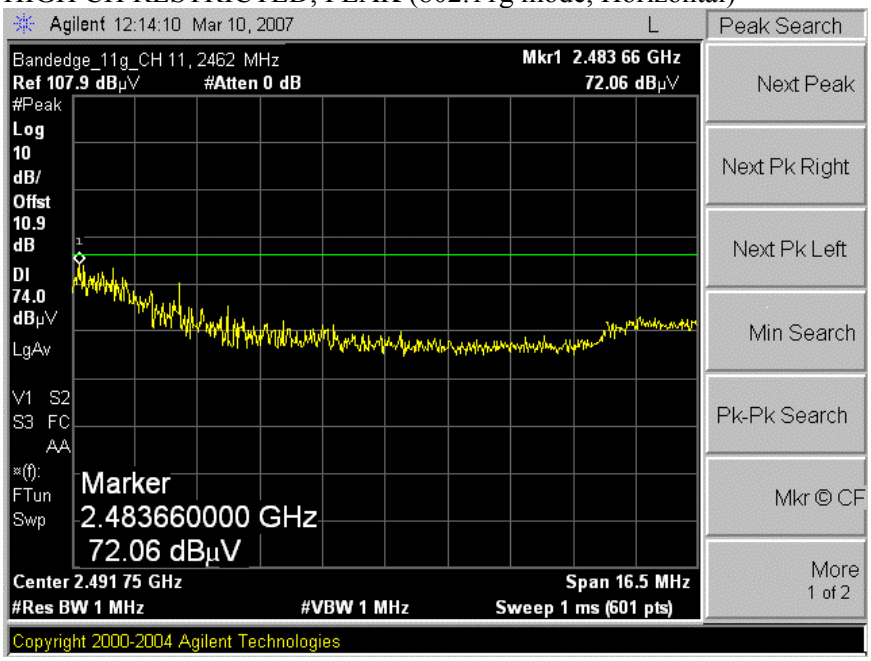

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH RESTRICTED, AVG (802.11g mode, Horizontal)

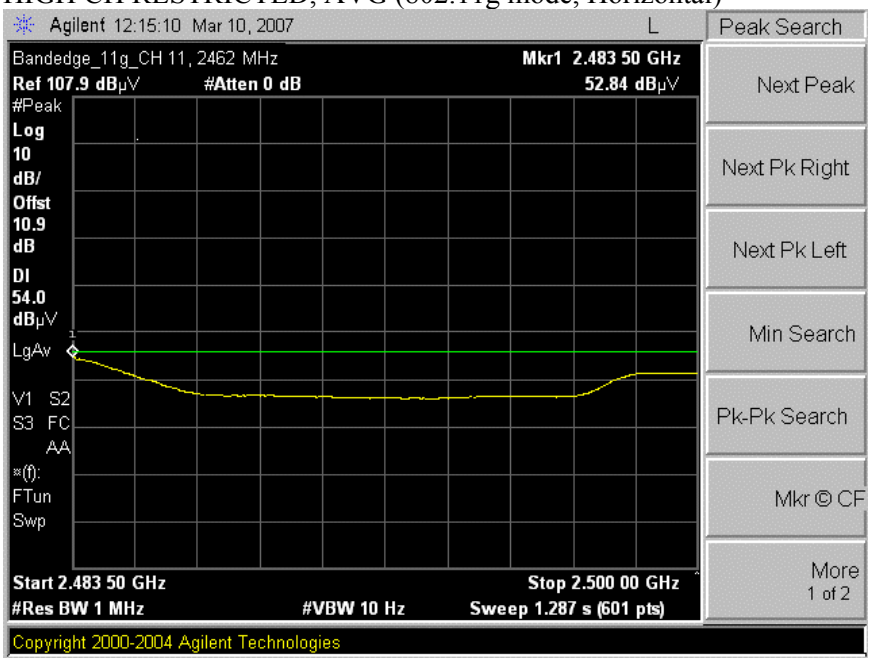

This report shall not be reproduced except in full, without the written approval of CCS.

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

HIGH CH RESTRICTED, PEAK (802.11g mode, Vertical)

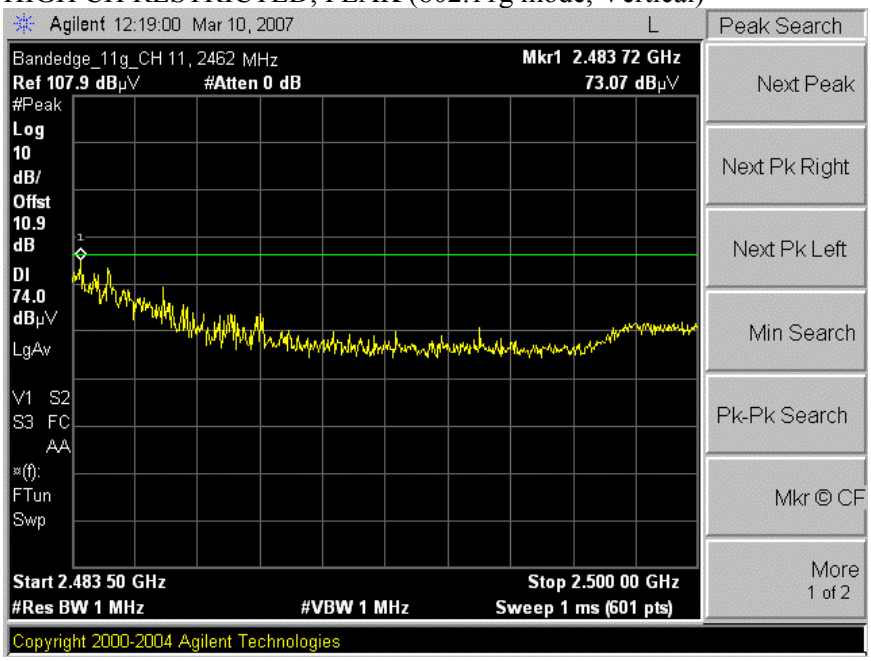

This report shall not be reproduced except in full, without the written approval of CCS.

HIGH CH RESTRICTED, AVG (802.11g mode, Vertical)

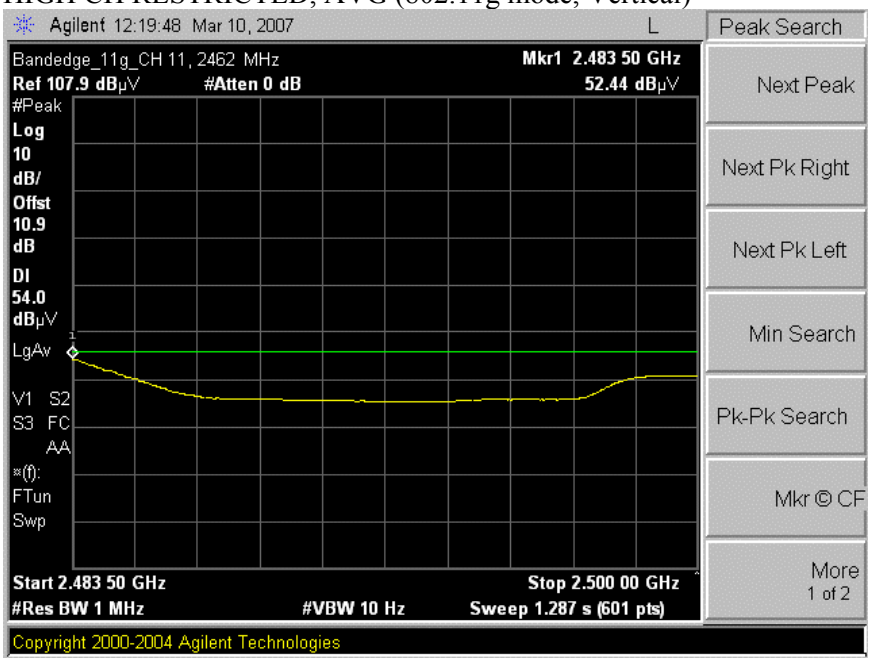

This report shall not be reproduced except in full, without the written approval of CCS.

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

High Frequency Measurement
Compliance Certification Services, Fremont B-5m Chamber

Test Engr: Vien Tran
Project #: 7I10887
Company: SAMSUNG ELECTRONICS CO. LTD.
EUT Descrip.: Notebook PC
EUT M/N: NP-Q1u
Test Target: FCC 15C-WLAN
Mode Oper: Tx On, 11g Mode, Antenna: WNC

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn >18GHz	Limit
T119; S/N: 29301 @3m	T34 HP 8449B			FCC 15.205

Hi Frequency Cables

2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
Thanh 177079008		Gordon 203134001	HPF_4.0GHz	

Peak Measurements
RBW=VBW=1MHz
Average Measurements
RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CH, 2412 MHz															
4.824	3.0	41.6	29.9	33.7	7.4	-34.8	0.0	0.6	48.5	36.8	74	54	-25.5	-17.2	V
4.824	3.0	38.7	28.7	33.7	7.4	-34.8	0.0	0.6	45.6	35.6	74	54	-28.4	-18.4	H
MID CH, 2437 MHz															
4.874	3.0	40.8	29.7	33.7	7.5	-34.8	0.0	0.6	47.8	36.7	74	54	-26.2	-17.3	V
7.311	3.0	42.6	33.1	35.2	9.0	-34.1	0.0	0.6	53.3	43.8	74	54	-20.7	-10.2	V
4.874	3.0	40.8	29.9	33.7	7.5	-34.8	0.0	0.6	47.8	36.9	74	54	-26.2	-17.1	H
7.311	3.0	41.0	30.5	35.2	9.0	-34.1	0.0	0.6	51.7	41.2	74	54	-22.3	-12.8	H
HI CH, 2462 MHz															
4.924	3.0	40.8	29.5	33.8	7.5	-34.8	0.0	0.6	47.9	36.6	74	54	-26.1	-17.4	V
7.386	3.0	43.4	31.8	35.2	9.0	-34.1	0.0	0.6	54.1	42.5	74	54	-19.9	-11.5	V
4.924	3.0	41.0	30.5	33.8	7.5	-34.8	0.0	0.6	48.1	37.6	74	54	-25.9	-16.4	H
7.386	3.0	43.6	32.1	35.2	9.0	-34.1	0.0	0.6	54.3	42.8	74	54	-19.7	-11.2	H
No other emission were detected above system noise floor															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

This report shall not be reproduced except in full, without the written approval of CCS.

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

EUT WITH FOXCONN ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

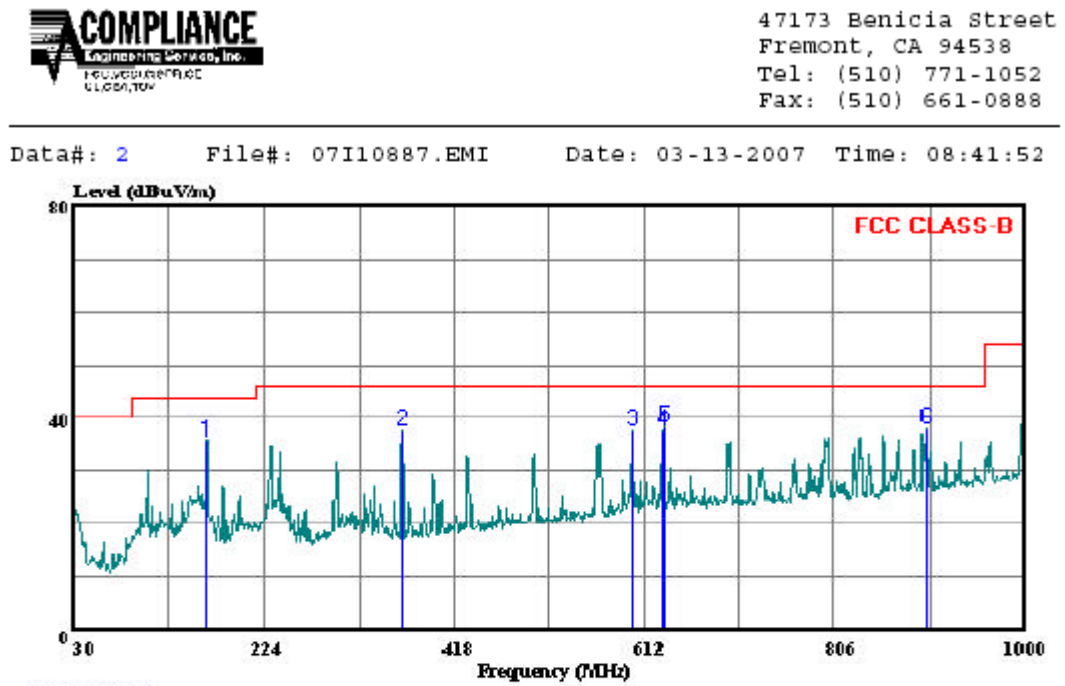

This report shall not be reproduced except in full, without the written approval of CCS.

HORIZONTAL DATA

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	164.830	53.60	12.44	1.34	31.67	35.71	43.50	-7.79	Peak
2	365.620	51.80	15.33	2.06	31.53	37.66	46.00	-8.34	Peak
3	599.390	47.70	19.27	2.69	31.88	37.78	46.00	-8.22	Peak
4	630.430	47.50	19.69	2.79	32.06	37.92	46.00	-8.08	Peak
5	633.340	47.80	19.73	2.76	31.83	38.46	46.00	-7.54	Peak
6	900.090	42.80	22.74	3.49	31.00	38.03	46.00	-7.97	Peak

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT

COMPLIANCE Engineering Services, Inc.
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1052
Fax: (510) 661-0888

Data#: 4 File#: 07I10887.EMI Date: 03-13-2007 Time: 08:55:38

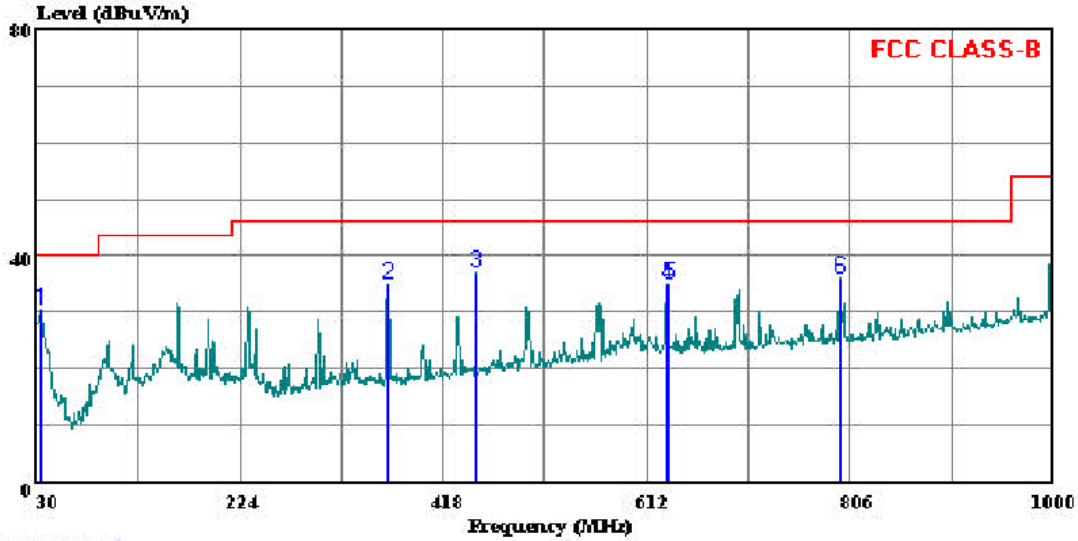

Trace: 3 Ref Trace:

Condition: FCC CLASS-B 3m A-5M CHAMBER 012007 VERTICAL
Test Operator: : Vien Tran
Company: : Samsung
Project #: : 07I10887
Configuration: : EUT Alone
Mode of Operation:: TX 11g Mid Channel
Target: : FCC Class B
: Foxconn Antenna

This report shall not be reproduced except in full, without the written approval of CCS.

VERTICAL DATA

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	33.880	42.00	19.78	0.62	31.81	30.59	40.00	-9.41	Peak
2	365.620	49.10	15.33	2.06	31.53	34.96	46.00	-11.04	Peak
3	449.040	49.50	17.03	2.32	31.69	37.16	46.00	-8.84	Peak
4	630.430	44.50	19.69	2.79	32.06	34.92	46.00	-11.08	Peak
5	633.340	44.20	19.73	2.76	31.83	34.86	46.00	-11.14	Peak
6	796.300	43.00	21.66	3.17	31.77	36.06	46.00	-9.94	Peak

This report shall not be reproduced except in full, without the written approval of CCS.

EUT WITH WNC ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1052
Fax: (510) 661-0888

Data#: 4 File#: 07i10887.emi Date: 03-14-2007 Time: 09:54:10

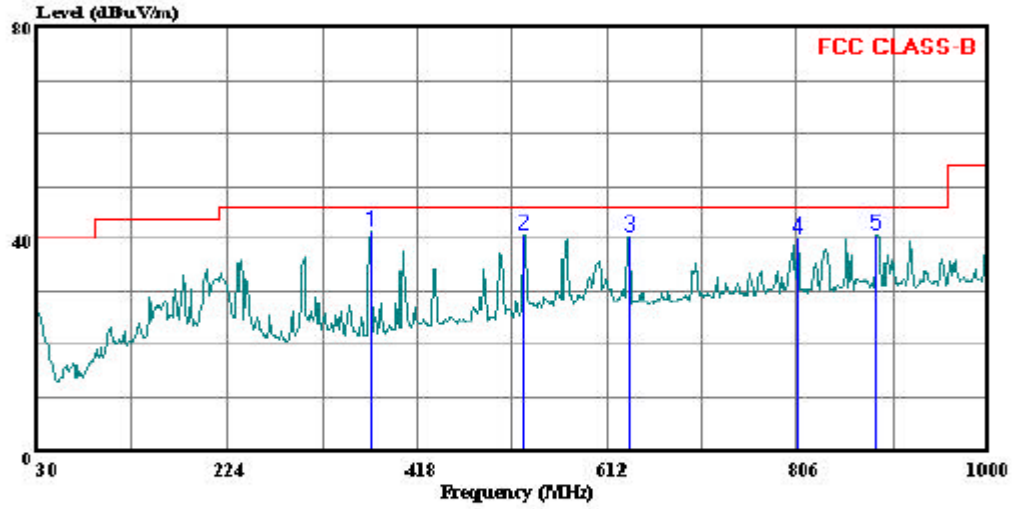

Trace: 3 Ref Trace:

Condition: FCC CLASS-B 3m B-5M CHAMBER 012007 HORIZONTAL
Test Operator: : Vien Tran
Company: : Samsung
Project #: : 07I10887
Configuration: : EUT with WNC Antenna
Mode of Operation:: Tx Worst Case
Target: : FCC B

This report shall not be reproduced except in full, without the written approval of CCS.

HORIZONTAL DATA

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	371.440	52.14	15.45	2.07	28.05	41.61	46.00	-4.39	Peak
2	526.640	47.77	18.36	2.45	27.68	40.90	46.00	-5.10	Peak
3	635.280	45.26	19.75	2.78	27.24	40.55	46.00	-5.45	Peak
4	807.940	42.14	21.79	3.20	26.98	40.15	46.00	-5.85	Peak
5	887.480	42.02	22.62	3.40	27.21	40.83	46.00	-5.17	Peak

This report shall not be reproduced except in full, without the written approval of CCS.

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT

47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1052
Fax: (510) 661-0888

Data#: 2 File#: 07i10887.emi Date: 03-14-2007 Time: 09:41:09

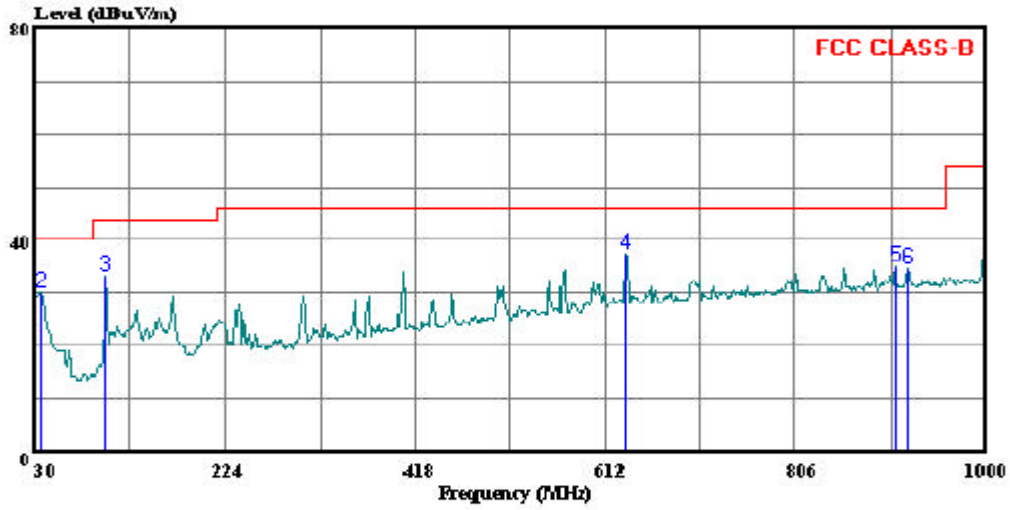

Trace: 1 Ref Trace:

Condition: FCC CLASS-B 3m B-5M CHAMBER 012007 VERTICAL
Test Operator: : Vien Tran
Company: : Samsung
Project #: : 07I10887
Configuration: : EUT Alone with WNC Antenna
Mode of Operation:: Tx Worst Case
Target: : FCC B

This report shall not be reproduced except in full, without the written approval of CCS.

VERTICAL DATA

Page: 1

	Freq	Read Level	Probe Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	30.970	35.34	22.03	0.62	28.41	29.58	40.00	-10.42	Peak
2	36.790	40.42	17.62	0.64	28.42	30.26	40.00	-9.74	Peak
3	101.780	50.09	10.39	1.06	28.27	33.27	43.50	-10.23	Peak
4	633.340	42.00	19.73	2.76	27.25	37.23	46.00	-8.77	Peak
5	906.880	35.97	22.81	3.43	27.29	34.92	46.00	-11.08	Peak
6	921.430	35.68	22.95	3.50	27.37	34.76	46.00	-11.24	Peak

This report shall not be reproduced except in full, without the written approval of CCS.

7.3. POWERLINE CONDUCTED EMISSION

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

This report shall not be reproduced except in full, without the written approval of CCS.

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	55.25	--	22.77	0.00	66.00	56.00	-10.75	-33.23	L1
0.19	49.25	--	41.68	0.00	63.91	53.91	-14.66	-12.23	L1
0.47	44.77	--	42.10	0.00	56.50	46.50	-11.73	-4.40	L1
0.19	49.15	--	41.38	0.00	63.86	53.86	-14.71	-12.48	L2
0.47	45.17	--	38.27	0.00	56.50	46.50	-11.33	-8.23	L2
0.51	43.99	--	41.75	0.00	56.00	46.00	-12.01	-4.25	L2
6 Worst Data									

This report shall not be reproduced except in full, without the written approval of CCS.

LINE 1 RESULTS

Compliance Certification Services
561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0885
Fax: (408) 463-0888

Data#: 21 File#: 07i10887.emi Date: 03-14-2007 Time: 19:01:31

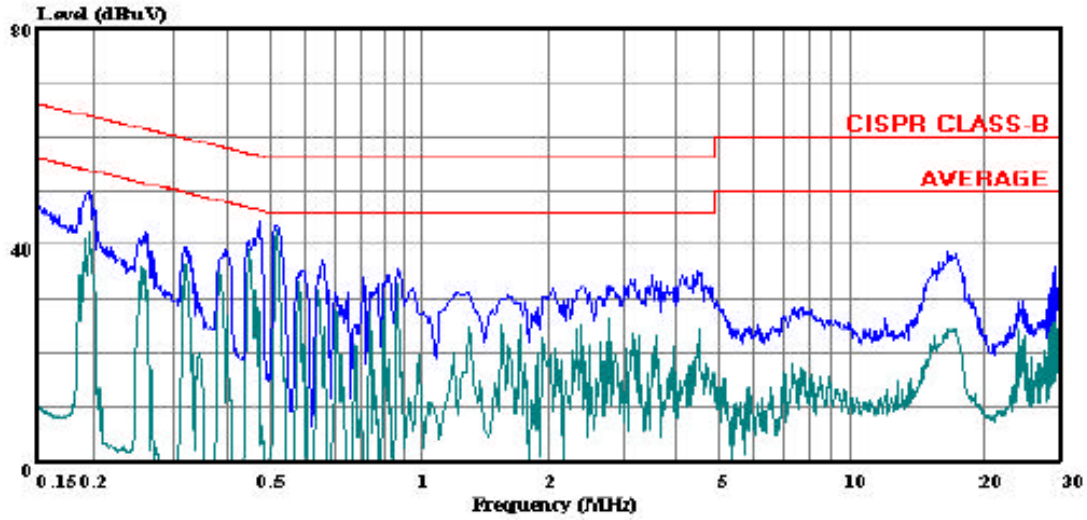

Trace: 19 Ref Trace:

Condition: CISPR CLASS-B
Test Operator: : Vien Tran
Project #: : 07I10887
Company: : Samsung
EUT: : Notebook PC
Configuration: : EUT in host with WNC Antenna
Mode of Operation:: Normal
Standard: : FCC Class B
: 115VAC/60Hz
: Line 1: Peak(Blue), Average(Green)

This report shall not be reproduced except in full, without the written approval of CCS.

LINE 2 RESULTS

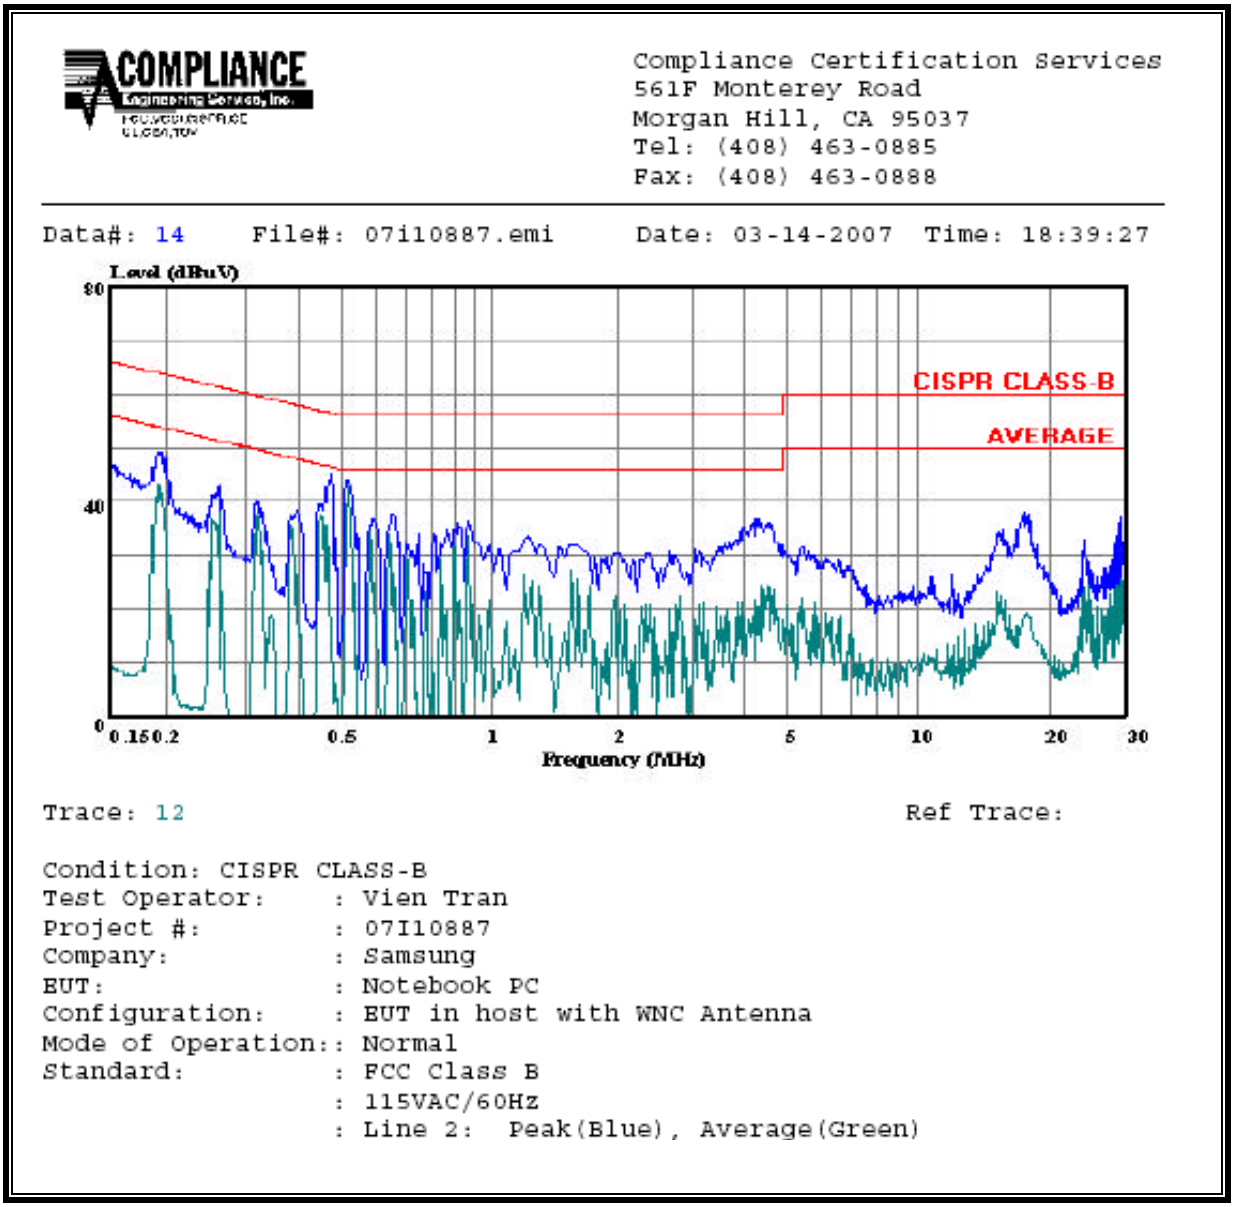

This report shall not be reproduced except in full, without the written approval of CCS.