

EMC TEST REPORT

According to FCC CFR47 Part 18 Subpart C

JOB Number : E1-02-0057

1. This test reports does not constitute an endorsement by NIST/NVLAP or U.S Government.
 2. This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 18 CFR47 Subpart C Intentional Radiators.
- All tests necessary to show compliance to the requirements were and these results met the specifications requirement.

*This laboratory is registered by the NIST/NVLAP, U.S.A.
The test reported herein have been performed in accordance
with its terms of registration.*



1. Applicant Name : SAMSUNG ELECTRONICS CO., LTD.
416 Maetan 3 Dong, Paldal-Ku, Suwon City, Kyungki Do, Korea, 442-742

2. Identification of tested device

2.1 FCC ID : A3LBT3000
2.2 Device Name : MICROWAVE OVEN
2.3 Trade Name : SAMSUNG Electronics Co.,Ltd.
2.4 Model Number : BT3000BS
2.5 RF Output Power : 1000 W

3. Test Procedure and Items

3.1 FCC/OST MP-5 : 1986

4. Issued Date : March 13, 2002

Tested by:

Jay Yong, PARK / Test Engineer

Reviewed by:

Yang Soo, KIM / Manager of EMC Lab.

Authorised by:

Kyu Baek, CHUNG / Chief of EMC Lab.

TABLE OF CONTENTS

1. Product Description

2. Test Facility

3. Accreditation and Listing

4. Radio Noise Emission Measurement Procedures/Results

4.1 Radiation Hazard Measurement

4.2 Input Power Measurement

4.3 RF Output Power Measurement

4.4 Operation Frequency Measurement

4.4.1 Variation in Operating Frequency with Time Measurement

4.4.2 Variation in Operating Frequency with Voltage Measurement

4.4.3 Variation in Operating Frequency with Time Plot

4.4.4 Variation in Operating Frequency with Voltage Plot(96Vac)

4.4.5 Variation in Operating Frequency with Voltage Plot(120Vac)

4.4.6 Variation in Operating Frequency with Voltage Plot(150Vac)

4.5 Radiated Emission Measurement

4.5.1 Radiated Emission Measurement Procedure

4.5.2 Radiated Emission Measurement Configuration

4.5.3 Radiated Emission Measurement Data(30 - 1000MHz)

4.5.4 Radiated Emission Measurement Data(1 - 25GHz)

5. Measurement Equipment List

1. Product Description

The equipment under test is a microwave oven sold for consumer use.

Model : BT3000BS is a 1000 W microwave oven with digital controls.

Installation Type: Over-the range

< Magnetron >

Model : OM-75P manufactured by Samsung Electronic Co., Ltd.

2. Test Facility

The Semi-anechoic chamber and Conducted measurement facilities used to collect the radiated data are located at 416 Maetan 3 Dong, Paldal-Ku, Suwon City, Kyungki Do, Korea.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

3. Accreditation and Listing

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific of accreditation under Lab Code: 200447-0 to perform Electromagnetic Interference tests according to FCC PART 15 and CISPR 22 requirements.

No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission(Registration Number:98856, Anechoic Chamber #1).

4. Radio Noise Emission Measurement Procedures/Results

4.1 Radiation Hazard Measurement

A 700-ml water load was placed in the center of the oven.

The power setting was set to maximum power.

While the oven was operating, the Microwave Survey Meter probe was moved slowly around the door seams to check for leakage.

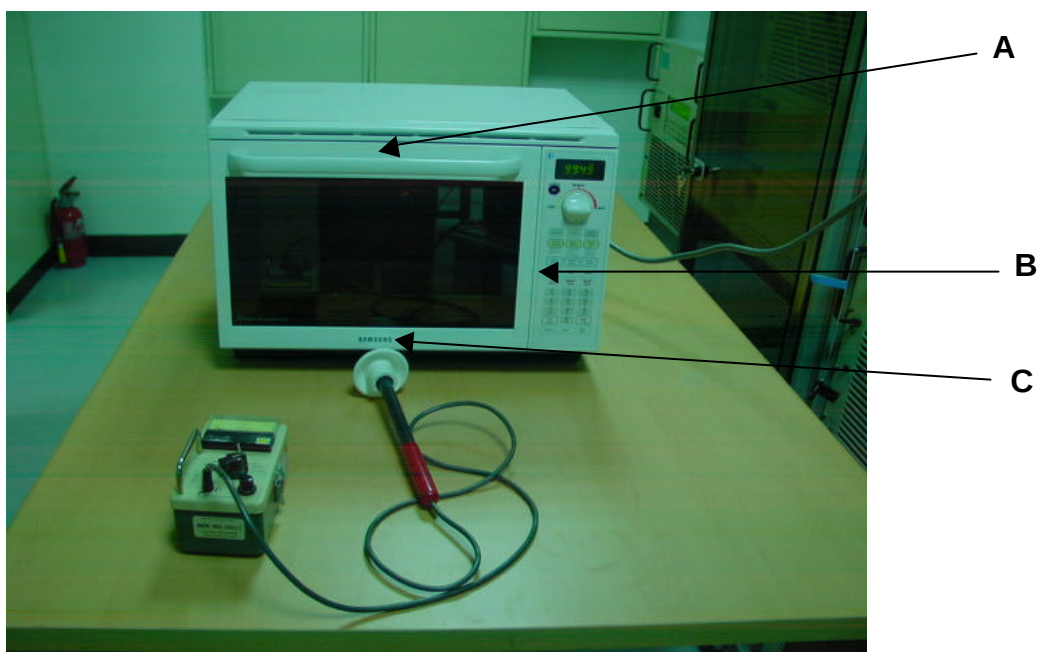


Fig. 1 Test Setup and the locations of maximum leakage

The results of this test are as follows.

Probe Location	Maximum Leakage [mW/Cm2]	Limit [mW/Cm2]
A	0.10	1.0
B	0.10	1.0
C	0.10	1.0
All others	0.05	1.0

4.2 Input Power Measurement

Input power and current were measured using a Power Analyzer.
A 700ml water load was placed in the center of the oven and the oven set to maximum power. A 700 ml water load was chosen for its compatibility. Manufacturers to determine their input ratings commonly use this procedure.



Fig. 2 Test Setup for Input power

The results of this test are as follows.

Input Voltage [Vac]	Input Current [amps]	Measured Input power [watts]	EUT Spec. Input power [watts]
120	13.7	1585	1550

Based on the measured input power, the EUT was found to be operating within the intended specifications.

4.3 RF Output Power Measurement

The Caloric Method was used to determine maximum output power. The initial temperature of a 1000-ml water load was measured. The water load was placed in the center of the oven. The oven was operated at maximum output power for 120 seconds. Then the temperature of the water re-measured.

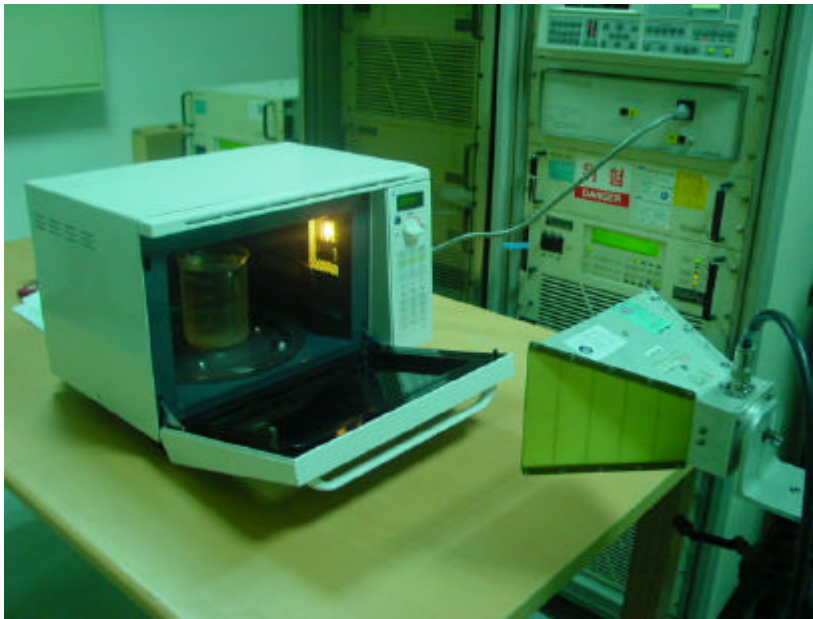


Fig.3 Test Setup for RF output power

Quantity of water [ml]	Starting Temperature [centigrade]	Final Temperature [centigrade]	Elapsed Time [seconds]	RF Power [watts]
1000	10	32.9	123	779.5
1000	10	32.2	123	755.7
1000	10	32.3	123	759.1
Average RF Power of 3 Trials				764.7799458

$$\text{Power} = \frac{(4.187 \text{ Joules/Cal}) \times (\text{Volume in ml}) \times (\text{Temp. Rise})}{\text{Time in seconds}}$$

The measured output was found to be **ABOVE 500Watts**. Therefore, in accordance with section 18.305 of Subpart C, the measured out-of-band emissions were compared to the $25 \times \text{SQRT}(\text{power}/500) [\mu\text{V/m}]$ @ 300M limit.

4.4 Operation Frequency Measurement

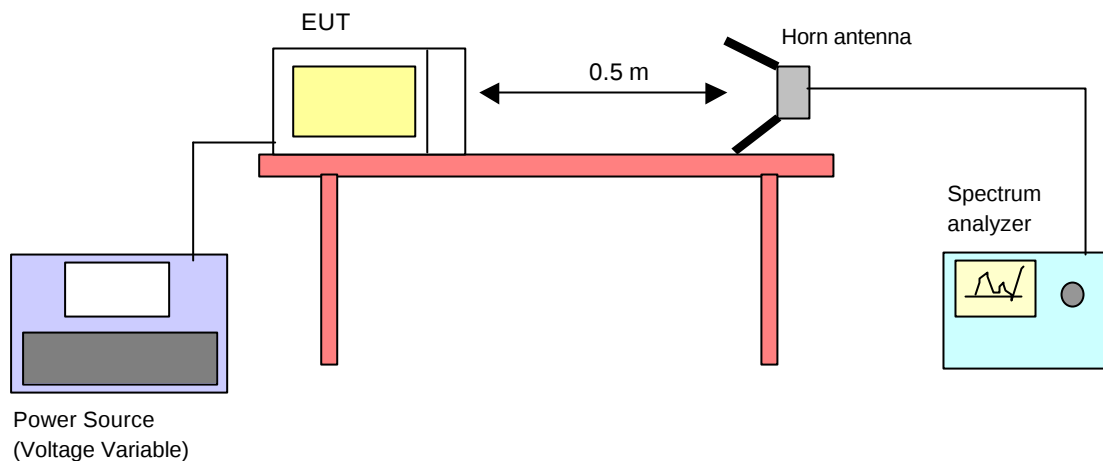


Fig. 4 Operating Frequency Measurements Configuration

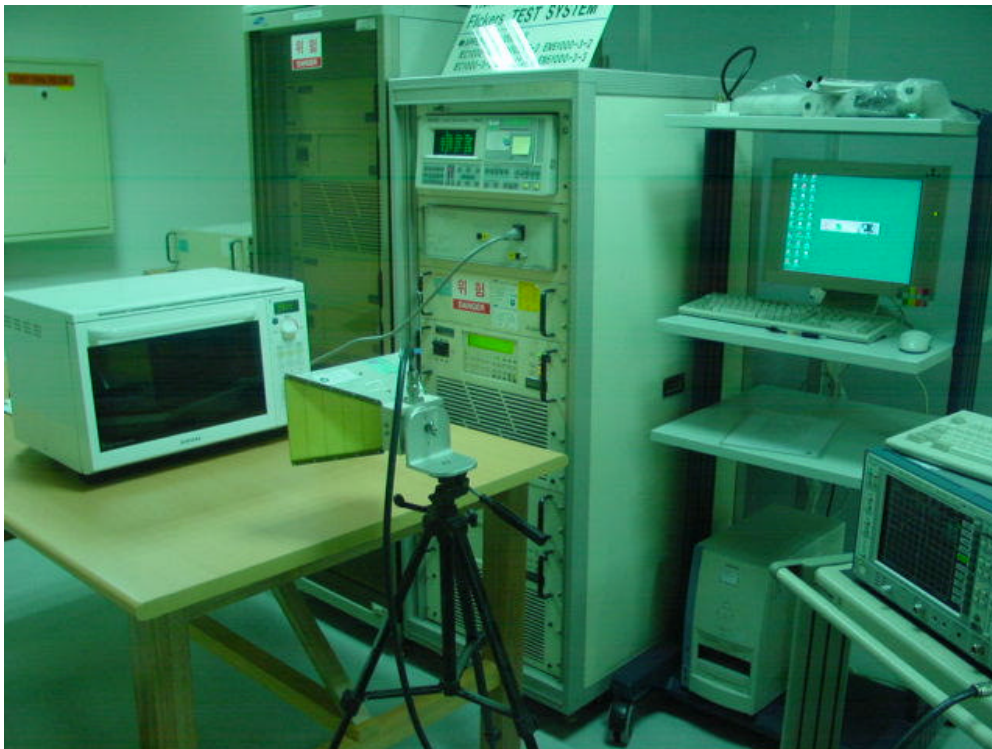


Fig. 5 Test Setup for Operating Frequency Measurements

4.4.1 Variation in Operating Frequency with Time Measurement

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000-ml water load was placed in the center of the oven and oven was operated at maximum output power.

The fundamental operating frequency was monitor until the water load was reduced to 20% of the original load.

The results of this test are as follows.

Initial load : 1000 ml

Load at completion of test : 200 ml

Minimum frequency observed : **2368** MHz

Minimum frequency allowed : 2400 MHz

Maximum frequency observed : **2485** MHz

Maximum frequency allowed : 2500 MHz

Refer to spectrum analyzer plot under ATTACHMENTS:

Variation in Operating Frequency with Time Plot for details of frequency variation with operating time.

4.4.2 Variation in Operating Frequency with Voltage Measurement

Following the above test, after operating the oven long enough to assure that stable operating temperature were obtained, the operating frequency was monitored as the input voltage was varied between 80 to 125 percent of the nominal rating.


The water load was maintained at 200 ml for the duration of the test.

The results of this test are as follows.

Line voltage varied from 96Vac to 150Vac.


96Vac	Minimum frequency observed :	2366 MHz
	Minimum frequency allowed :	2400 MHz
	Maximum frequency observed :	2481 MHz
	Maximum frequency allowed :	2500 MHz
120Vac	Minimum frequency observed :	2368 MHz
	Minimum frequency allowed :	2400 MHz
	Maximum frequency observed :	2485 MHz
	Maximum frequency allowed :	2500 MHz
150Vac	Minimum frequency observed :	2392 MHz
	Minimum frequency allowed :	2400 MHz
	Maximum frequency observed :	2480 MHz
	Maximum frequency allowed :	2500 MHz

4.4.3 Variation in Operating Frequency with Time Plot

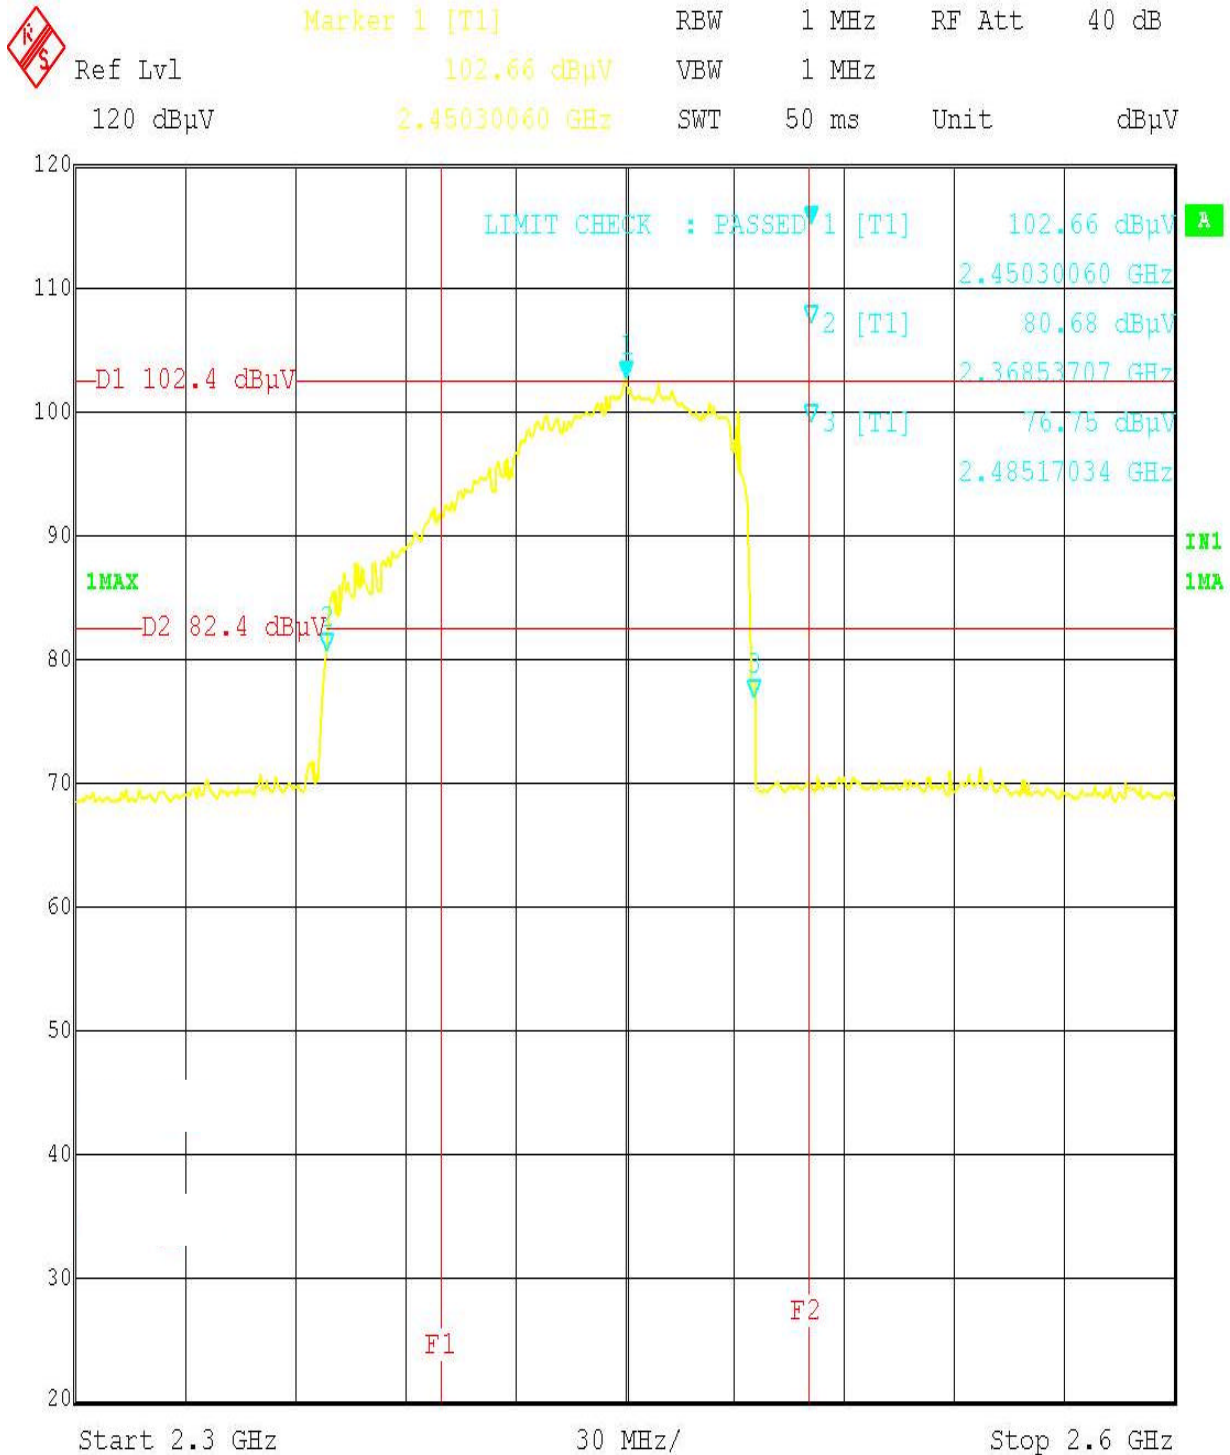


Date: 11.MAR.2002 08:55:59

This reports shall not be reproduced except in full, without the written approval of SEC EMC Testing laboratory.

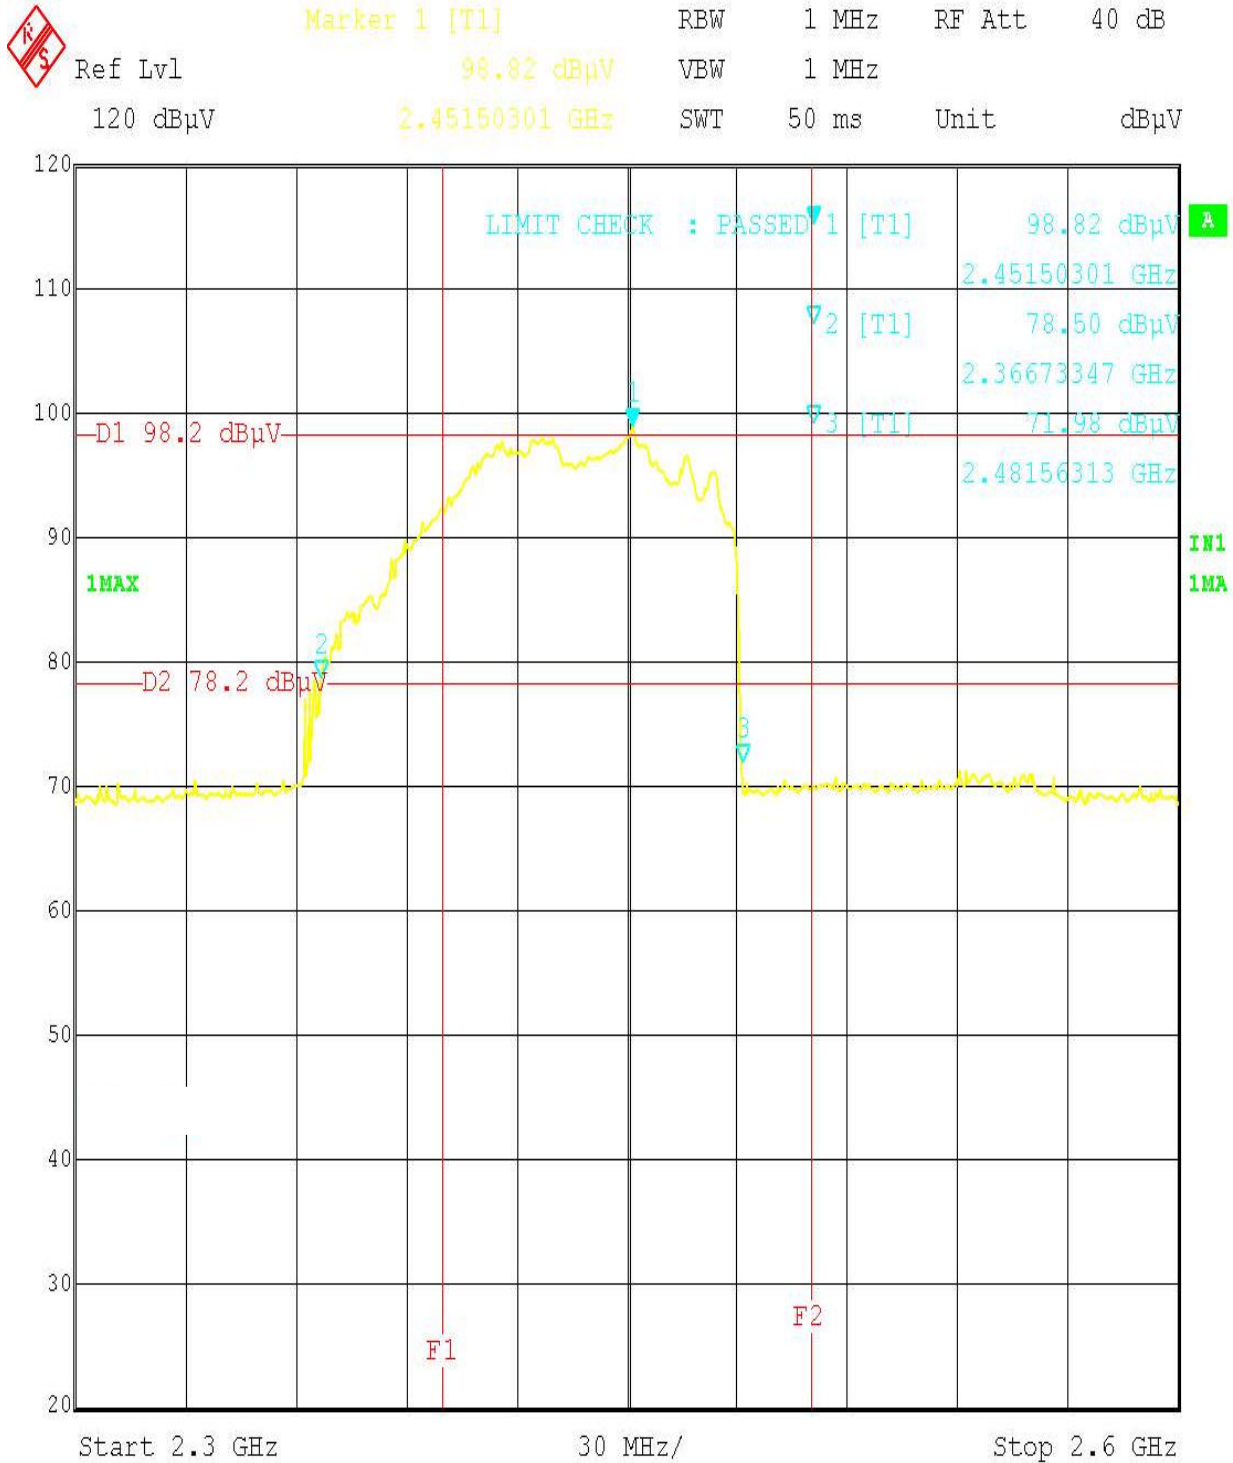4.4.4 Variation in Operating Frequency with Voltage Plot(96Vac)


Date: 11.MAR.2002 11:25:42

This reports shall not be reproduced except in full, without the written approval of SEC EMC Testing laboratory.

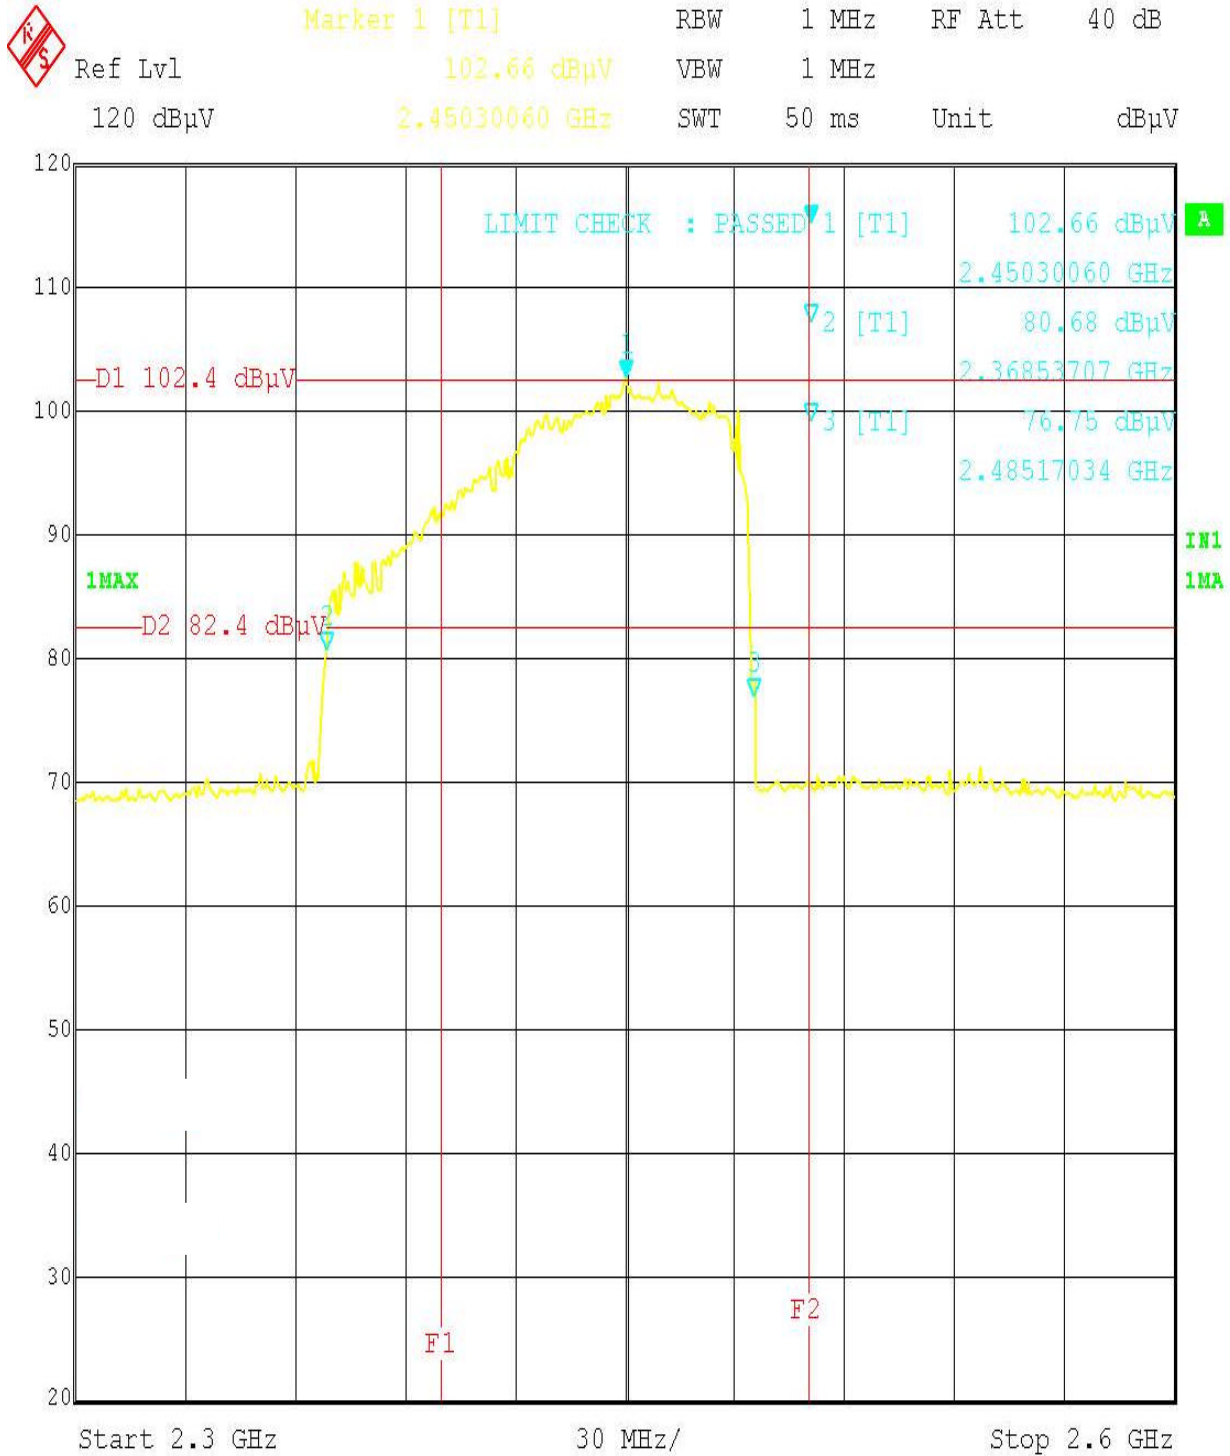4.4.5 Variation in Operating Frequency with Voltage Plot(120Vac)

Date: 11.MAR.2002 08:55:59

This reports shall not be reproduced except in full, without the written approval of SEC EMC Testing laboratory.

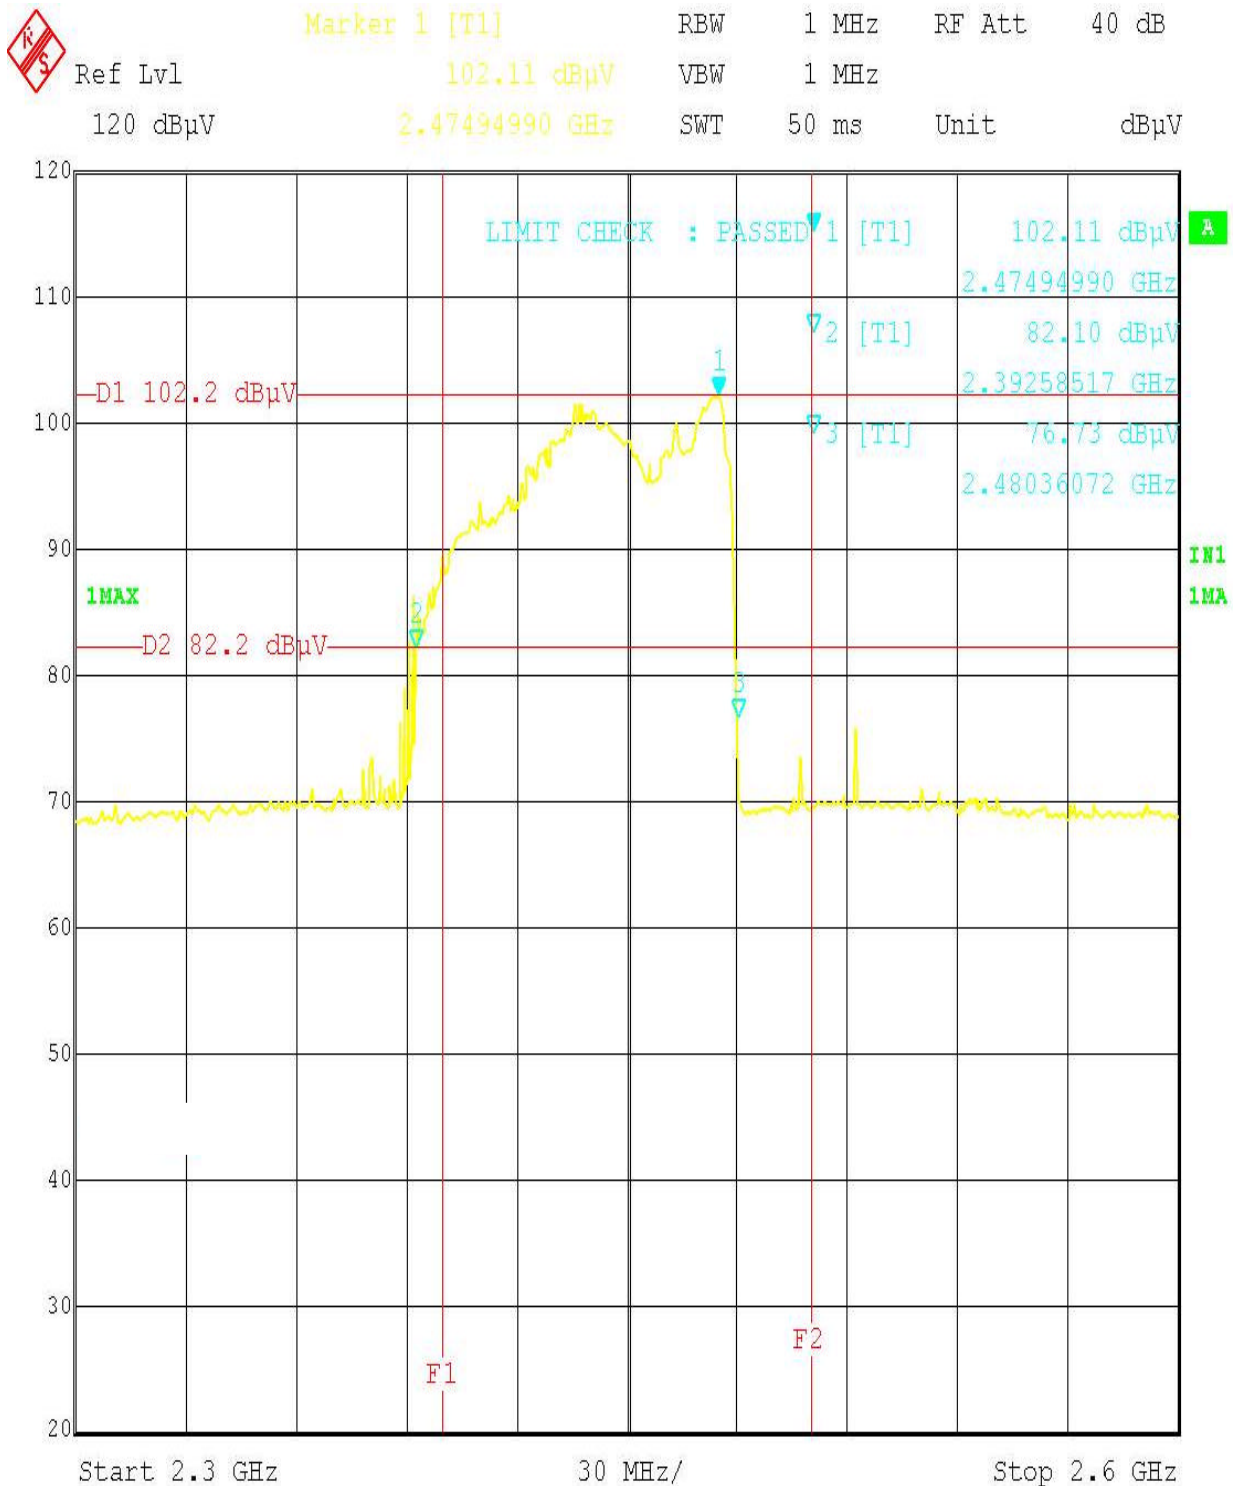4.4.6 Variation in Operating Frequency with Voltage Plot(150Vac)

Date: 11.MAR.2002 10:01:44

This reports shall not be reproduced except in full, without the written approval of SEC EMC Testing laboratory.

4.5 Radiated Emission Measurement

4.5.1 Radiated Emission Measurement Procedure

Radiated emission were measured over an inclusive frequency range to 30MHz through the tenth harmonic of the operating frequency. For this test, a 0.8-meter high wooden table in a semi-anechoic chamber supported the device under test. The table was placed on a turntable.

The measurement antenna was placed 3 meters for measurement from 30 to 1,000MHz and 1 meter for measurement from 1 - 25GHz, respectively, for the device under test. The indicated frequency range was swept as device under test was rotated along its vertical axis in 90 degree increments.

During the preliminary tests, the load consisted of 700-ml tap water placed in the center of the oven. The emissions were observed while the device under test was operated at maximum output power.

The level of the emissions near the edge of the designated ISM frequency band was measured. For this test, the load consisted of 700-ml water load located in the center of the oven.

The level of the second and third harmonic were measured inclusively with a 300-ml and 700-ml water load alternately placed in the center and side(or right front corner) of the oven.

The data obtained during these tests is contained on this report.

All other out-of-band emissions were measured while a 700-ml load was placed in the center of the oven. Maximum readings were recorded after variations in antenna polarizations, height, device orientation, load position, and size.

For frequencies above 1GHz, the test receiver detecting mode was set to average detection mode(Model no.:ESI , Rohde & Schwarz).

For all emissions the equivalent 300 meters intensity was calculated assuming linear decrease in the described, there were no over-limit emissions discovered.

4.5.2 Radiated Emission Measurement Configuration

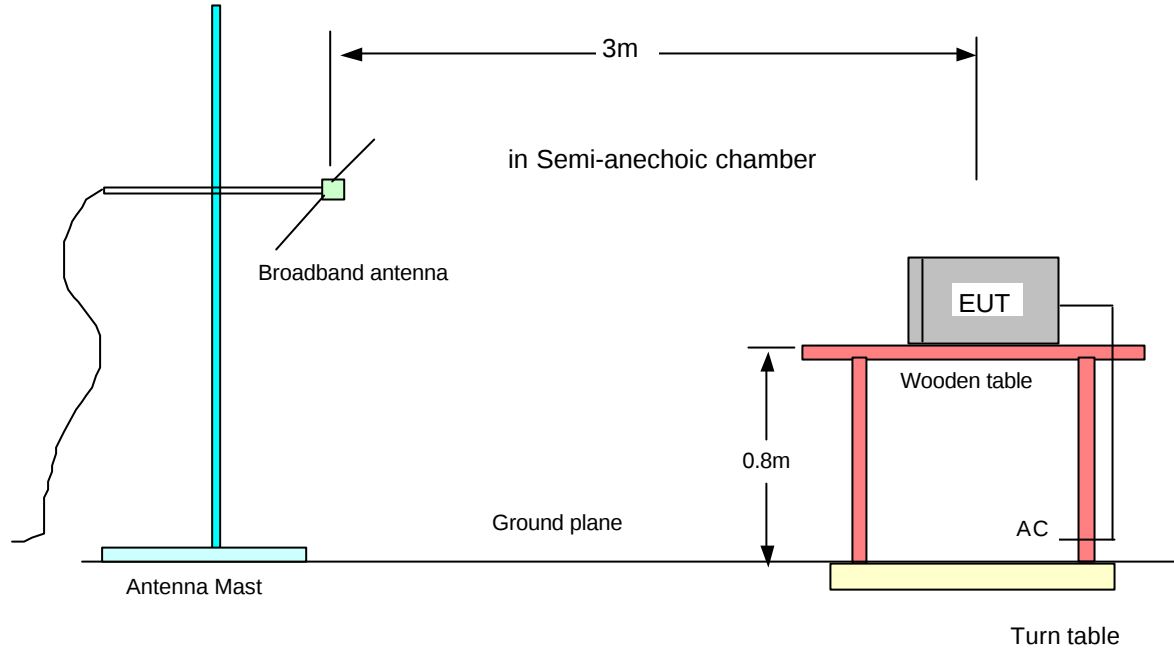


Fig. 6 Radiated Emission Configuration(30 - 1000MHz)

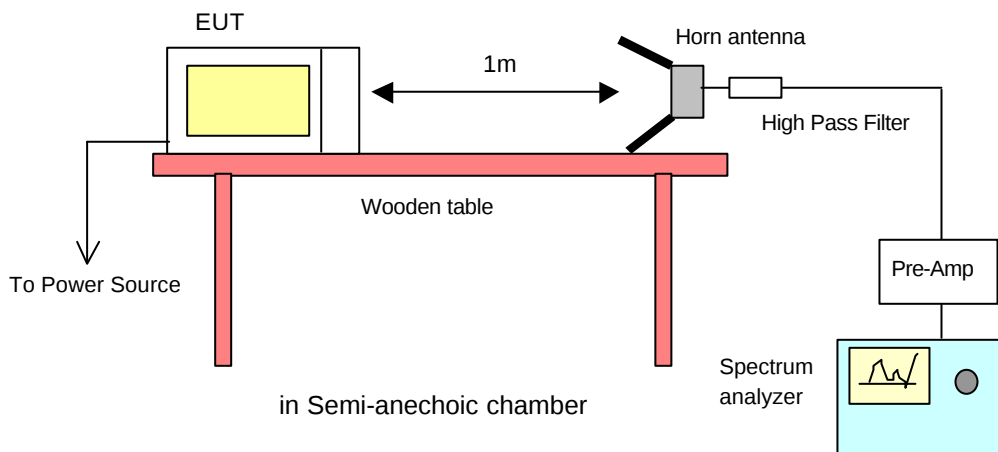


Fig. 7 Radiated Emission Configuration(1 - 25GHz)

4.5.3 Radiated Emission Measurement Data(30 - 1000MHz)

Tested Frequency [MHz]	Meter Reading [A] [dBuV]	Total Loss [B] [dB]	Results [A+B] [dBuV/m]	Limits at 3m [dBuV/m]	ANT Pol.	Margin (Result-Limit) [dB]	Antenna Height [Cm]	Turn table Degree [Deg]
	Pk		Pk			Pk		
38.90	25.8	14.76	40.6	69.80	V	-29.24	132	110
61.25	34.9	6.88	41.8	69.80	V	-28.02	100	100
69.50	25.3	6.95	32.3	69.80	H	-37.55	350	111
95.80	35.2	12.06	47.3	69.80	V	-22.54	100	115
258.00	34.9	15.9	50.8	69.80	H	-19.00	330	110
275.30	35.8	15.8	51.6	69.80	H	-18.20	250	105
523.00	18.0	22.51	40.5	69.80	V	-29.29	100	100
771.00	15.1	25.81	40.9	69.80	V	-28.90	100	95
960.00	13.2	27.74	40.9	69.80	V	-28.86	100	90

[NOTE]

* $f_0 = 2450\text{MHz}$

* Test distance : 3m

* Results = Meter Reading + Total Loss(Antenna factor + Cable loss)

* Distance Correction factor : $20 \times \log(d1/d2)$ [dBuV/m]

$$20 \times \log(300/3) = + 40\text{dBuV/m}$$

* The limit at 300 meters is 29.80 dBuV/m.

Add 40dB to 29.80 dBuV/m gives a 69.80 dBuV/m @ 3 meters.

* Spectrum analyzer setting

Peak(Pk) : Resolution Bandwidth(1MHz), Video Bandwidth(1MHz)

4.5.4 Radiated Emission Measurement Data(1 - 25GHz)

Tested Frequency	Meter Reading	Total Loss	AMP	DIST	HPF	Results [A+B]	Limits at 1m	ANT Pol.	Margin
[MHz]	[dBuV]	[dB]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]		[dB]
	Av					Av	Av		Av
1.48	31.9	31.18	31.25	49.54	0	-17.69	29.75	H	-47.45
2.30	47.9	34.50	31.25	49.54	0	1.56	29.80	H	-28.25
2.54	47.4	36.50	31.25	49.54	0	3.06	29.80	H	-26.75
4.95	34.2	45.26	31.25	49.54	0	-1.33	29.77	H	-31.10
5.43	35.0	47.11	31.25	49.54	0	1.27	29.80	H	-28.54
6.31	38.2	48.50	31.25	49.54	0	5.91	29.80	H	-23.90
7.39	36.9	51.20	31.25	49.54	1	8.31	29.80	H	-21.50

[NOTE]

* $f_0 = 2450\text{MHz}$

* **DIST**: Correction to extrapolate reading to 300m specification distance

* **Total Loss**: Antenna Factor+ Cable Loss, **HPF**: High Pass Filter(4.5GHz)

* **AMP**: Pre-amplifier

* Distance Correction factor : $20 \times \log(d1/d2)[\text{dBuV/m}]$

$$20 \times \log(300/1) = + 49.542\text{dBuV/m}$$

* The limit at 300 meters is 29.80 dBuV/m @ 1 meters.

* Results = Meter Reading +Total Loss-AMP-DIST+HPF

* Margin = Result-Limit

5. Measurement Equipment List

Equipment	Model No.	Serial No.	Makers	Calibration Last calibration and Interval
Spectrum analyzer	8566B	H/P	2611A02672	01/ 07/ 06, 12Months
Quasi-peak adapter	85650A	H/P	2521A00687	01/10/ 09, 12Months
RF Preselector	85685A	H/P	3506A01500	01/ 10/ 10, 12Months
Pre-Amplifier	8449B	3008A00705	H.P	01/07/ 03, 12Months
Field strength meter	ESI	832692/002	R & S	01/06/13, 12Months
	ESVP	R/S	860688/015	02/ 02/28, 12Months
Double Ridged Guide Antenna	3115	9505-4441	EMCO	01/ 05/23, 12Months
Double Ridged Guide Antenna	3116	2202	EMCO	01/ 05/23, 12Months
Microwave Survey Meter	HI-1501	93661	H.I	01/10/02, 12Months
High Pass Filter	3H10-4500	2	K & L	01/11/23, 12Months
Bi-Log Antenna	CBL6112B	SCHAFFNER	2767	01/05/23, 12Months

EUT Photograph



EUT Photograph





HOUSEHOLD MICROWAVE OVEN
416 MAETANDONG, SUWON, KOREA

MODEL NO. BT3000BB	SERIAL NO.	120Vac 1.55 kW MICROWAVE	60Hz 1.75 kW HEATER
MANUFACTURED : MAY-2002		MADE IN KOREA	
FCC ID : A3LBT3000		SEC	

LISTED
725F

THIS PRODUCT COMPLIES WITH DHHS RULES 21 CFR SUBCHAPTER J.

CAUTION THIS DEVICE IS TO BE SERVICED ONLY BY PROPERLY QUALIFIED SERVICE PERSONNEL. CONSULT THE SERVICE MANUAL FOR PROPER SERVICE PROCEDURES TO ASSURE CONTINUED COMPLIANCE WITH THE FEDERAL PERFORMANCE STANDARD FOR MICROWAVE OVENS AND FOR PRECAUTIONS TO BE TAKEN TO AVOID POSSIBLE EXPOSURE TO EXCESSIVE MICROWAVE ENERGY.

WARNING • TO ENSURE CONTINUED PROTECTION AGAINST ELECTRIC SHOCK HAZARD CONNECT TO PROPERLY GROUNDED OUTLETS ONLY.
• DISCONNECT APPLIANCE BEFORE SERVICING REMOVAL OF OUTER CASE WITH PRODUCT ENERGIZED MAY EXPOSE SERVICEMAN TO HAZARDOUS HIGH VOLTAGE POTENTIALS.

WARNING CERTAIN INTERNAL PARTS ARE INTENTIONALLY NOT GROUNDED AND MAY PRESENT A RISK OF ELECTRICAL SHOCK ONLY DURING SERVICING. SERVICE PERSONNEL- DO NOT CONTACT THE FOLLOWING PARTS WHILE THE APPLIANCE IS ENERGIZED : FAN MOTOR, LOW VOLTAGE TRANSFORMER (TOUCH CONTROL TYPE), TIMER & TIMER MOUNTING BRACKET (MECHANICAL TYPE).



WARNING RISK OF ELECTRIC SHOCK. NON-REMOVABLE FASTENERS ARE PROVIDED BECAUSE OF INTERNAL HIGH VOLTAGES. DO NOT REMOVE FASTENERS.

NOT FOR BUILT-IN INSTALLATION

EUT Photograph



EUT Photograph

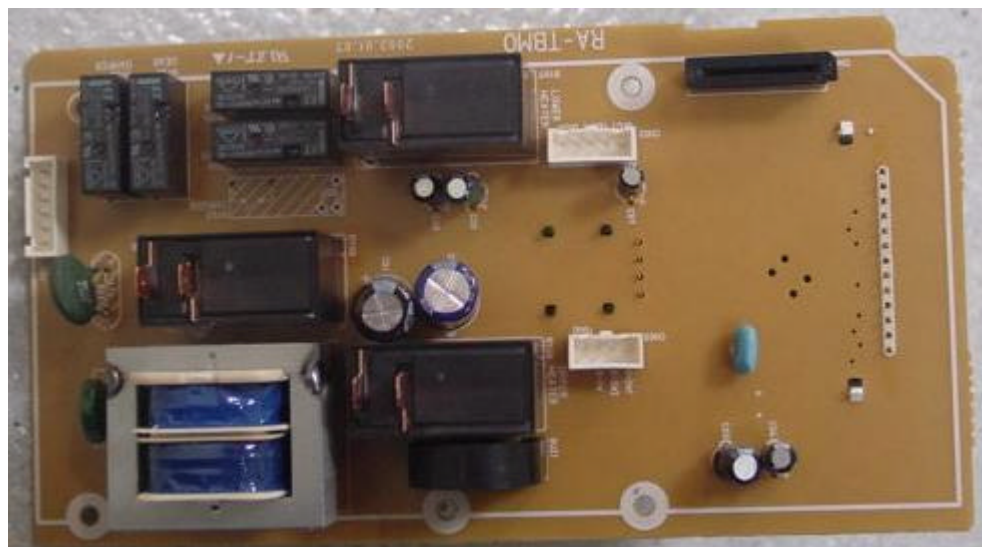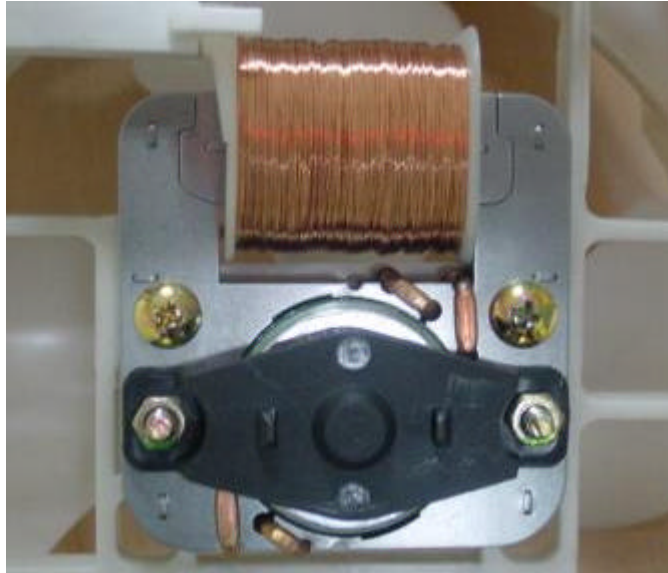

EUT Photograph

