


	1	2	3	4	5	6	7	8
A			Rev. No					
B								
C								
D								
E								
F								
G	Technical Description 1. Use 'FILM' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Put 'release paper' on the back side after the adhesive. 4. No blur and spread for letter 5. Proceed with manufacturing process after the approval of R&D Group 6. The spec. of product must be based on approved limit samples. 7. Stock on as a ROLL 8. Follow drawing instruction above for CE or WEEE mark 9. Unify material and color as one color (blue) for glassine paper							
H								
I								
J	MAT. White polypropylene 80μ				FIN. Semitransparency OPP Lamination + UVP Coating			
K	TITLE GT-E2230L				LABEL(R)-MAIN-LTN-CHINA			
L	UNIT mm		DESIGNED	CHECKED	APPROVED	PROJECTION		
	TOLERANCE +0.0 / -0.1		jukyun Kim	kyeonghwan jo	junesop kim	SHEET NO		1/1
	SCALE N / S		11-07-08	11-07-08	11-07-08	SHEET NO		1/1
	Manufacture HANSUNG P&I		11-07-08	11-07-08	11-07-08	SHEET NO		1/1
			Doc. CODE	GH68-35303B				

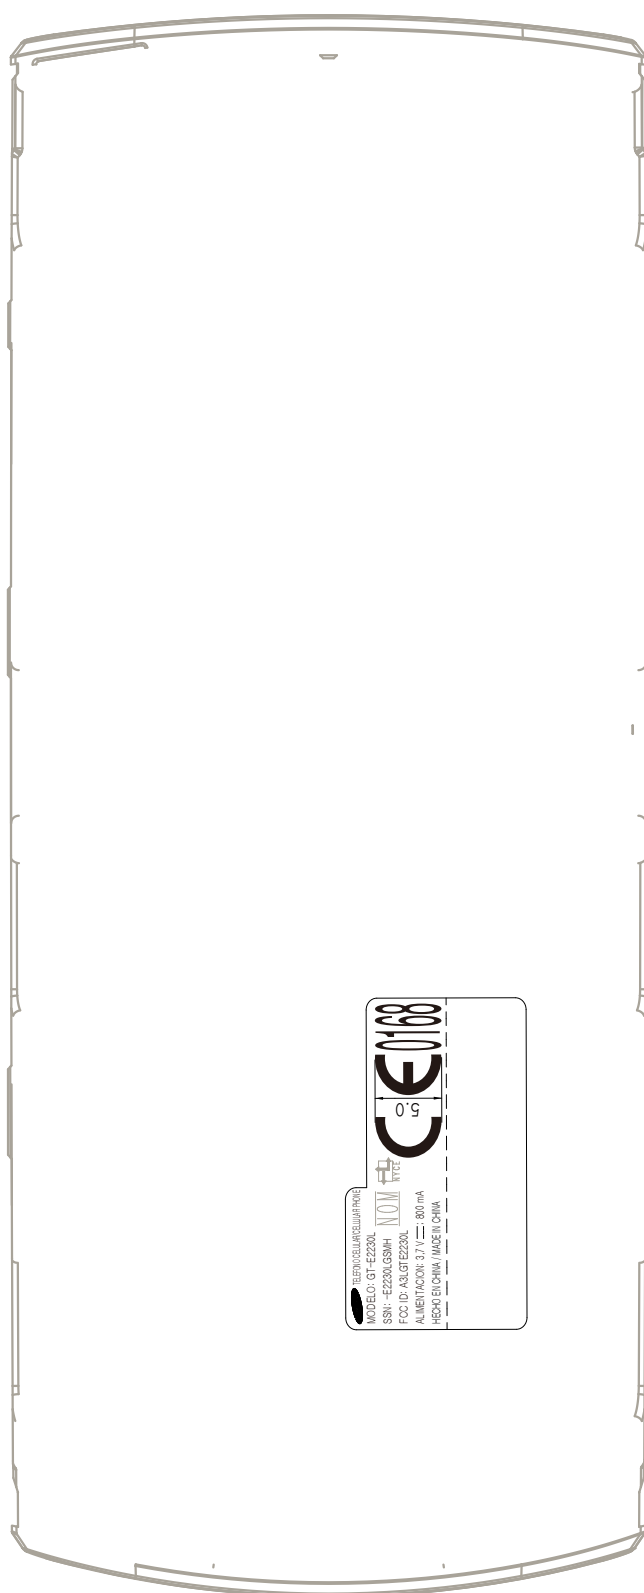

The label is placed inside the battery compartment