



**FCC OET BULLETIN 65 SUPPLEMENT C 01-01
IEEE Std 1528-2003 and IEEE Std 1528a-2005**

SAR EVALUATION REPORT

For

**802.11 b/g/n 1x1 HT20, + BT3.0+EDR+ GSM850/1900
Bar phone, Wi-Fi, and hotspot on 2.4G**

**Model: GT-I8262
FCC ID: A3LGTI8262**

**Report Number: 13I14989-1B
Issue Date: 5/3/2013**

Prepared for

**Samsung Electronics Co., Ltd.
416, Maetan 3-Dong, Yeongtong-Gu
Suwon-City, Gyeonggi-Do 443-742, South Korea**

Prepared by

**UL Verification Services Inc.
47173 Benicia Street,
Fremont, CA 94538, U.S.A.
Tel: (510) 771-1000
Fax: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	4/30/2013	Initial Issue	--
A	5/2/2013	Section 9.2 – Corrected target power table. Section 12.2 – Corrected measured power and scaled SAR values . Section 12.4 – Corrected Bluetooth target power. Section 14 – Updated simultaneous transmission tables with corrected scaled SAR and Bluetooth estimated SAR values.	Dave Weaver
B	5/3/2013	Sections 12.2.1 and 14.1 – corrected GSM 1900 VoIP SAR data Section 15.2 – Corrected GSM 1900 VoIP plot Section 1 – Corrected simultaneous transmission DTS result. Section 4.2 – Added measurement uncertainty statement. Section 14.3 – Corrected GSM 850 SAR values	Dave Weaver

Table of Contents

1. Attestation of Test Results.....	5
2. Test Methodology	6
3. Facilities and Accreditation	6
4. Calibration and Uncertainty	7
4.1. Measuring Instrument Calibration	7
4.2. Measurement Uncertainty	7
5. Measurement System Description and Setup.....	8
6. SAR Measurement Procedure.....	9
6.1. Normal SAR Measurement Procedure.....	9
6.2. Volume Scan Procedures	11
7. Device Under Test.....	12
7.1. General Information	12
7.2. Wireless Technology.....	12
7.3. Simultaneous Transmission Condition	13
8. RF Exposure Conditions	14
8.1. Head Exposure Conditions	14
8.2. Body-worn Accessory Exposure Conditions.....	14
8.3. Hotspot Mode Exposure Conditions.....	14
9. RF Output Power Measurement.....	15
9.1. GSM850	15
9.2. GSM1900	16
9.3. Wi-Fi (2.4 GHz Band).....	17
9.4. Bluetooth	18
10. Tissue Dielectric Properties	19
10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests	20
10.2. Tissue Dielectric Parameter Check Results.....	21
11. System Performance Check	22
11.1. System Performance Check Measurement Conditions.....	22
11.2. Reference SAR Values for System Performance Check.....	22
11.3. System Performance Check Results	23
12. SAR Test Results	24

12.1.	GSM850.....	24
12.1.1.	Head Exposure Conditions.....	24
12.1.2.	Body-worn Accessory Exposure Conditions.....	25
12.1.3.	Hotspot Mode Exposure Conditions.....	25
12.2.	GSM1900.....	26
12.2.1.	Head Exposure Conditions.....	26
12.2.2.	Body-worn Accessory Exposure Conditions.....	27
12.2.3.	Hotspot Mode Exposure Conditions.....	27
12.3.	Wi-Fi (2.4 GHz Band).....	28
12.3.1.	Head Exposure Conditions.....	28
12.3.2.	Body-worn Accessory and Hot-Spot Exposure Conditions.....	28
12.4.	Bluetooth.....	29
12.4.1.	Standalone SAR Test Exclusion Considerations.....	29
12.4.2.	Estimated SAR.....	29
13.	SAR Measurement Variability.....	30
13.1.	<i>The Highest Measured SAR Configuration in Each Frequency Band.....</i>	<i>30</i>
14.	Simultaneous Transmission SAR Analysis.....	31
14.1.	<i>Head Exposure Conditions.....</i>	<i>32</i>
14.2.	<i>Body-worn Accessory Exposure Conditions.....</i>	<i>33</i>
14.3.	<i>Hotspot Mode Exposure Conditions.....</i>	<i>34</i>
15.	Appendixes.....	35
15.1.	<i>System Performance Check Plots.....</i>	<i>35</i>
15.2.	<i>Worst Case SAR Test Plots.....</i>	<i>35</i>
15.3.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3885.....</i>	<i>35</i>
15.4.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3901.....</i>	<i>35</i>
15.5.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3686.....</i>	<i>35</i>
15.6.	<i>Calibration Certificate for D835V2 - SN 4d002.....</i>	<i>35</i>
15.7.	<i>Calibration Certificate for D1900V2 - SN 5d043.....</i>	<i>35</i>
15.8.	<i>Calibration Certificate for D2450V2 - SN 899.....</i>	<i>35</i>
16.	External Photos.....	36
17.	Antenna Dimensions & Separation Distances.....	38
18.	Setup Photos.....	39

1. Attestation of Test Results

Applicant	Samsung Electronics Co., Ltd.			
DUT description	802.11 b/g/n 1x1 HT20, + BT3.0+EDR+ WiFi + GSM850/1900			
Model	GT-I8262			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	4/10/2013 – 4/17/2013			
The highest reported SAR values	RF exposure condition	Licensed	DTS	UNII
	Head	0.31 W/kg	0.10 W/kg	N/A W/kg
	Body-worn Accessory	0.85 W/kg	0.10 W/kg	N/A W/kg
	Wireless Router	0.94 W/kg	0.10 W/kg	N/A W/kg
	Simultaneous Transmission	1.05 W/kg	1.05 W/kg	N/A W/kg
Applicable Standards	OET Bulletin 65 Supplement C IEEE Std 1528-2003 and IEEE Std 1528a-2005 FCC Published RF exposure KDB procedures, and TCB workshop updates			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released For UL Verification Services Inc. by:



Dave Weaver
Program Manager
UL Verification Services Inc.

Prepared by:



Xuanmai Nguyen
SAR Engineer
UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C Edition 01-01, IEEE STD 1528-2003, IEEE Std 1528a-2005 and the following FCC Published RF exposure KDB procedures:

- 447498 D01 General RF Exposure Guidance v05
- 648474 D04 SAR Handsets Multi Xmitter and Ant v01
- 941225 D01 SAR test for 3G devices v02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D06 Hot Spot SAR v01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01
- 865664 D02 SAR Reporting v01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
S-Parameter Network Analyzer	Agilent	8753ES	MY40001647	6	27	2013
Dielectronic Probe kit	SPEAG	SM DAK 040 CA	1082	9	18	2013
Dielectronic Probe kit	HP	85070E	594	N/A		
Synthesized Signal Generator	HP	8665B	3744A01084	5	3	2013
Power Meter	HP	438A	3513U04320	9	17	2013
Power Sensor A	HP	8481A	2237A31744	8	17	2013
Power Sensor B	HP	8481A	3318A95392	8	17	2013
Amplifier	MITEQ	4D00400600-50-30P	1622052	N/A		
Directional coupler	Werlatone	C8060-102	2149	N/A		
Synthesized Signal Generator	HP	8665B	3744A01084	5	3	2013
Power Meter	HP	438A	2822A05684	10	7	2013
Power Sensor A	HP	8481A	2702A66876	8	1	2013
Power Sensor B	HP	8482A	2349A08568	4	14	2013
Amplifier	MITEQ	4D00400600-50-30P	1620606	N/A		
Directional coupler	Werlatone	C8060-102	2141	N/A		
Base Station Simulator	R & S	CMU200	106301	6	6	2013
Base Station Simulator	R & S	CMU200	118339	5	20	2013
Thermometer	TRACEABLE	4242	122529162	9	19	2013
E-Field Probe	SPEAG	EX3DV4	3885	10	9	2013
E-Field Probe	SPEAG	EX3DV4	3749	1	15	2014
Data Acquisition Electronics	SPEAG	DAE4	1352	10	8	2013
Data Acquisition Electronics	SPEAG	DAE4	1343	8	20	2013
System Validation Dipole	SPEAG	D835V2	4d002	10	24	2013
System Validation Dipole	SPEAG	D1900V2	5d043	11	6	2013
System Validation Dipole	SPEAG	D2450V2	899	10	5	2013
Power Meter	Agilent	N1912A	MY52310061	7	5	2013
Power Sensor Ch A	Agilent	N1921A	MY52260009	7	5	2013
Power Sensor Ch B	Agilent	N1921A	MY52270022	7	21	2013

4.2. Measurement Uncertainty

Per KDB 865664, when no measured SAR values exceed 1.5 W/kg, measurement uncertainty analysis does not need to be provided in the test report.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

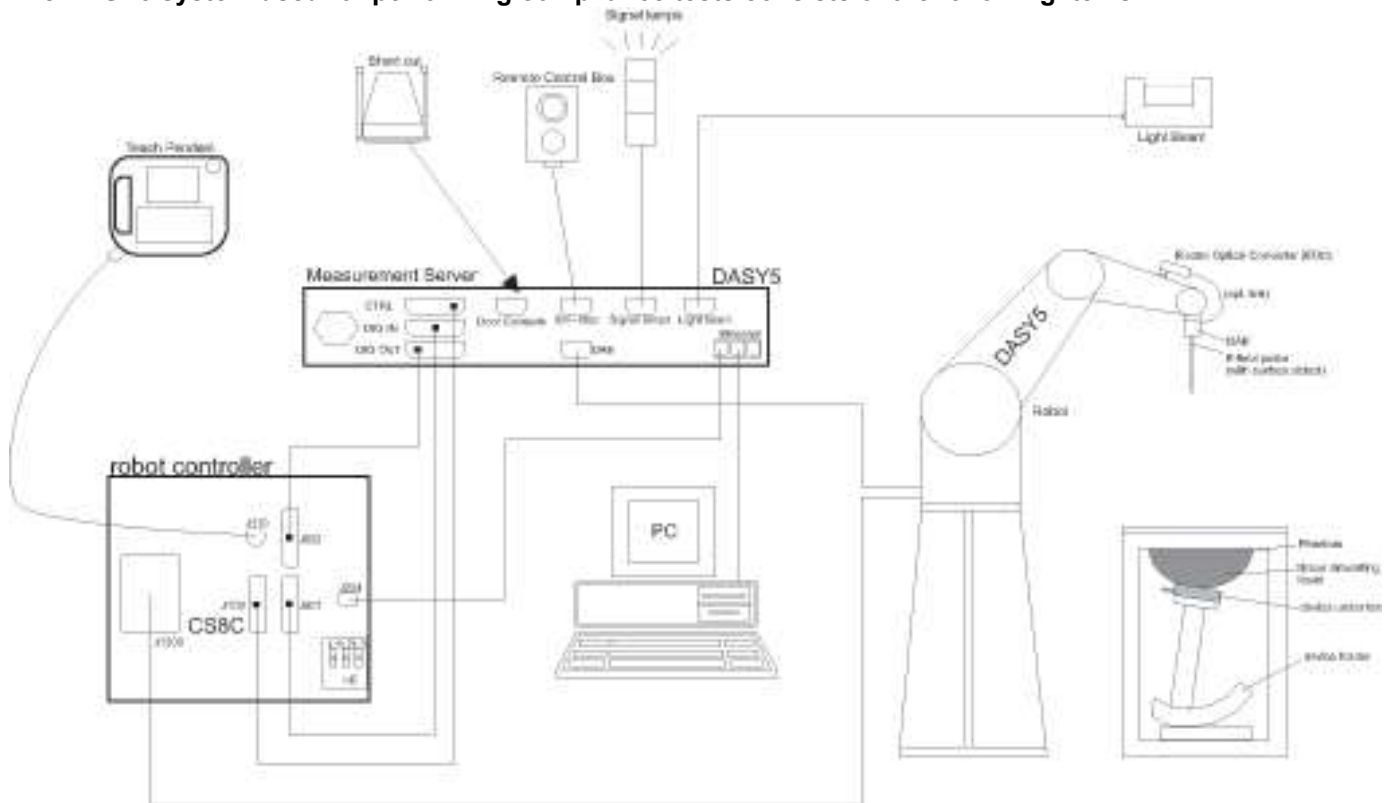

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01 (Draft)

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

Model: GT-I8262 802.11 b/g/n 1x1 HT20, + BT3.1+EDR+ GSM850/1900 Bar phone, Wi-Fi direct, hotspot on 2.4G	
Operating Configuration(s)	Held to head, Body-worn (Voice call)
RF Exposure Condition(s)	Head, Body-worn Accessory, Hotspot (wireless router) - Wi-Fi Hotspot mode permits the device to share its cellular data connection with other 2.4 GHz WiFi-enabled devices (channels 1 - 11).
Device dimension (L x W)	12.9 cm x 6.8 cm
Accessory	Headset

7.2. Wireless Technology

Wireless Mode and Frequency Bands	GSM850/GSM1900, WiFi 802.11b/g/n, Bluetooth 2.4 GHz
Modulation	GSM (GMSK) / GPRS (GMSK) / EGPRS (8PSK), Wi-Fi 802.11b/g/n HT20, Bluetooth Ver. 3.0
Duty Cycle	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%; 3 Slots: 37.5%; 4 Slots: 50% Wi-Fi 802.11b/g/n: 100%
GPRS Multi-Slot Class	☐ Class 8 - One Up ☐ Class 10 - Two Up ☒ Class 12 - Four Up
Mobile Phone Capability	☐ Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. ☒ Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. ☐ Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
VOIP	Supported

7.3. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	GSM850/1900 MHz Voice + Wi-Fi 2.4 GHz
Body-worn Accessory	GSM850/1900 MHz Voice + Wi-Fi 2.4 GHz GSM850/1900 MHz Data + BT 2.4 GHz (VoIP)
Hotspot	GPRS850/1900 MHz Data + Wi-Fi 2.4 GHz
Note: Wi-Fi 2.4 GHz and Bluetooth cannot transmit simultaneously.	

8. RF Exposure Conditions

Refer to Section 17 “Antenna Dimensions and Separation Distances” for the specific details of the antenna-to-antenna, antenna-to-edge(s) distances, and device orientation description.

8.1. Head Exposure Conditions

For WWAN and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	

8.3. Hotspot Mode Exposure Conditions

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	
Edge 1	110 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 2	35 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 3	5 mm	Yes	
Edge 4	7 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	
Edge 1	3 mm	Yes	
Edge 2	28 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 3	118 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 4	27 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01

9. RF Output Power Measurement

9.1. GSM850

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance (dBm)	Voice	GPRS 1 slot	GPRS 2 slots	GPRS 3 slots	GPRS 4 slots
Max	32.7	33.0	29.8	28.1	26.9
Target	32.2	32.5	29.3	27.6	26.4
Min	30.7	31.0	27.8	26.1	24.9

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	32.1
	190	836.6	32.2
	251	848.8	32.2

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	32.1	23.1	29.1	23.1	27.4	23.1	26.0	23.0
	190	836.6	32.2	23.2	29.2	23.2	27.5	23.2	26.1	23.1
	251	848.8	32.2	23.2	29.3	23.3	27.5	23.2	26.2	23.2

EGPRS: RX only

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above

9.2. GSM1900

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance (dBm)	Voice	GPRS 1 slot	GPRS 2 slots	GPRS 3 slots	GPRS 4 slots
Max	29.4	29.4	26.9	24.6	23.3
Target	28.9	28.9	26.4	24.1	22.8
Min	27.4	27.4	24.9	22.6	21.3

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
1900	512	1850.2	28.8
	661	1880.0	28.5
	810	1909.8	28.4

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	28.8	19.8	26.3	20.3	24.0	19.7	22.7	19.7
	661	1880.0	28.5	19.5	25.9	19.9	23.6	19.3	22.3	19.3
	810	1909.8	28.4	19.4	25.8	19.8	23.4	19.1	22.1	19.1

EGPRS (8PSK) - Coding Scheme: MCS5

This mode is Rx only

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above

9.3. Wi-Fi (2.4 GHz Band)

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	IEEE 802.11 (dBm)		
	b	g	n (HT20)
Max	16.5	13.5	11.5
Target	16.0	13.0	11.0
Min	15.5	12.5	10.5

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	▽
		2.437	6	√	▽
		2.462	11 [#]	√	▽

Notes:

√ = "default test channels"

▽ = possible 802.11g channels with maximum average output $\frac{1}{4}$ dB $\geq$ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Band (MHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Note
2.4	802.11b	1	2412	16.3	
		6	2437	16.4	
		11	2462	16.3	
	802.11g	1	2412	13.3	
		6	2437	13.4	
		11	2462	13.5	
	802.11n (HT20)	1	2412	11.4	
		6	2437	11.0	
		11	2462	11.1	

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

9.4. Bluetooth

Maximum tune-up tolerance limit is 5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing. Refer to Section 14.1. Standalone SAR Test Exclusion Considerations

10. Tissue Dielectric Properties

IEEE Std 1528-2003 Table 2

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC OET Bulletin 65 Supplement C 01-01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
4/9/2013	Head 835	e'	40.6700	mittivity (ϵ_r):	40.67	41.50	-2.00	5
		e''	19.6000	ductivity (σ):	0.91	0.90	1.11	5
	Head 820	e'	40.8600	mittivity (ϵ_r):	40.86	41.60	-1.78	5
		e''	19.6000	ductivity (σ):	0.89	0.90	-0.54	5
	Head 850	e'	40.4900	mittivity (ϵ_r):	40.49	41.50	-2.43	5
		e''	19.4800	ductivity (σ):	0.92	0.92	0.62	5
4/9/2013	Head 1900	e'	39.2200	mittivity (ϵ_r):	39.22	40.00	-1.95	5
		e''	13.3800	ductivity (σ):	1.41	1.40	0.97	5
	Head 1850	e'	39.4800	mittivity (ϵ_r):	39.48	40.00	-1.30	5
		e''	13.2400	ductivity (σ):	1.36	1.40	-2.72	5
	Head 1910	e'	39.1900	mittivity (ϵ_r):	39.19	40.00	-2.03	5
		e''	13.4100	ductivity (σ):	1.42	1.40	1.73	5
4/9/2013	Body 2450	e'	51.2300	mittivity (ϵ_r):	51.23	52.70	-2.79	5
		e''	14.3200	ductivity (σ):	1.95	1.95	0.04	5
	Body 2410	e'	51.4000	mittivity (ϵ_r):	51.40	52.76	-2.58	5
		e''	14.1600	ductivity (σ):	1.90	1.91	-0.52	5
	Body 2475	e'	51.1900	mittivity (ϵ_r):	51.19	52.67	-2.81	5
		e''	14.4900	ductivity (σ):	1.99	1.99	0.45	5
4/11/2013	Body 835	e'	53.6200	mittivity (ϵ_r):	53.62	55.20	-2.86	5
		e''	21.5200	ductivity (σ):	1.00	0.97	3.00	5
	Body 820	e'	53.7300	mittivity (ϵ_r):	53.73	55.28	-2.80	5
		e''	21.6000	ductivity (σ):	0.98	0.97	1.69	5
	Body 850	e'	53.4500	mittivity (ϵ_r):	53.45	55.16	-3.10	5
		e''	21.5200	ductivity (σ):	1.02	0.99	3.03	5
4/11/2013	Body 1900	e'	51.8000	mittivity (ϵ_r):	51.80	53.30	-2.81	5
		e''	14.6400	ductivity (σ):	1.55	1.52	1.75	5
	Body 1850	e'	52.0100	mittivity (ϵ_r):	52.01	53.30	-2.42	5
		e''	14.5000	ductivity (σ):	1.49	1.52	-1.87	5
	Body 1910	e'	51.7710	mittivity (ϵ_r):	51.77	53.30	-2.87	5
		e''	14.6300	ductivity (σ):	1.55	1.52	2.22	5
4/16/2013	Head 2450	e'	38.2300	mittivity (ϵ_r):	38.23	39.20	-2.47	5
		e''	13.6000	ductivity (σ):	1.85	1.80	2.93	5
	Head 2410	e'	38.4000	mittivity (ϵ_r):	38.40	39.28	-2.24	5
		e''	13.4600	ductivity (σ):	1.80	1.76	2.46	5
	Head 2475	e'	38.1500	mittivity (ϵ_r):	38.15	39.17	-2.60	5
		e''	13.6500	ductivity (σ):	1.88	1.83	2.82	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm $\pm$ 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm $\pm$ 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D835V2	4d002	10/24/12	835	1g	9.58	9.48
				10g	6.28	6.26
D1900V2	5d043	11/6/12	1900	1g	39.9	40.9
				10g	20.9	21.6
D2450V2	899	10/05/12	2450	1g	53.6	51.7
				10g	25.0	24.3

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

Date Tested	System Dipole		T.S. Liquid		Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio ±3 %	Plot No.
	Type	Serial #			Area Scan	Zoom Scan	Normalize to 1 W				
4/9/2013	D1900V2	5d043	Head	1g	4.26	4.11	41.10	39.90	3.01	3.52	1
				10g	2.18	2.12	21.20	20.90	1.44		
4/9/2013	D835V2	4d002	Head	1g	1.05	1.02	10.20	9.58	6.47	2.86	3
				10g	0.71	0.66	6.64	6.28	5.73		
4/9/2013	D2450V2	899	Body	1g	5.38	5.43	54.30	51.70	5.03	-0.93	5
				10g	2.30	2.52	25.20	24.30	3.70		
4/11/2013	D835V2	4d002	Body	1g	1.03	1.01	10.10	9.48	6.54	1.94	7
				10g	0.69	0.67	6.69	6.26	6.87		
4/11/2013	D1900V2	5d043	Body	1g	3.99	3.99	39.90	40.90	-2.44	0.00	9
				10g	2.01	2.10	21.00	21.60	-2.78		
4/16/2013	D2450V2	899	Head	1g	5.72	5.64	56.40	53.60	5.22	1.40	11
				10g	2.49	2.55	25.50	25.00	2.00		

12. SAR Test Results

12.1. GSM850

12.1.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Voice	128	824.2						1
		190	836.6	32.7	32.2	0.051	0.057		
		251	848.8						1
Left Tilt (15°)	Voice	128	824.2						1
		190	836.6	32.7	32.2	0.042	0.047		
		251	848.8						1
Right Touch	Voice	128	824.2						1
		190	836.6	32.7	32.2	0.051	0.057		
		251	848.8						1
Right Tilt (15°)	Voice	128	824.2						1
		190	836.6	32.7	32.2	0.046	0.052		
		251	848.8						1

Head Exposure Conditions for VoIP Mode

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	GPRS 2 Slots	128	824.2						1
		190	836.6	29.8	29.2	0.056	0.064	1	
		251	848.8						1
Left Tilt (15°)	GPRS 2 Slots	128	824.2						1
		190	836.6	29.8	29.2	0.045	0.052		
		251	848.8						1
Right Touch	GPRS 2 Slots	128	824.2						1
		190	836.6	29.8	29.2	0.048	0.055		
		251	848.8						1
Right Tilt (15°)	GPRS 2 Slots	128	824.2						1
		190	836.6	29.8	29.2	0.043	0.049		
		251	848.8						1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.1.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Voice	10	128	824.2						
			190	836.6	32.7	32.2	0.184	0.206	2	
			251	848.8						1
Front	Voice	10	128	824.2						1
			190	836.6	32.7	32.2	0.086	0.096		
			251	848.8						1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.1.3. Hotspot Mode Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	GPRS 2 slots	10	128	824.2						1
			190	836.6	29.8	29.2	0.170	0.195	3	
			251	848.8						1
Front	GPRS 2 slots	10	128	824.2						1
			190	836.6	29.8	29.2	0.081	0.093		
			251	848.8						1
Edge 3	GPRS 2 slots	10	128	824.2						1
			190	836.6	29.8	29.2	0.030	0.034		
			251	848.8						1
Edge 4	GPRS 2 slots	10	128	824.2						1
			190	836.6	29.8	29.2	0.059	0.068		
			251	848.8						1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.2. GSM1900

12.2.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Voice	512	1850.2						1
		661	1880.0	29.4	28.5	0.245	0.301		
		810	1909.8						1
Left Tilt (15°)	Voice	512	1850.2						1
		661	1880.0	29.4	28.5	0.095	0.117		
		810	1909.8						1
Right Touch	Voice	512	1850.2						1
		661	1880.0	29.4	28.5	0.249	0.306		
		810	1909.8						1
Right Tilt (15°)	Voice	512	1850.2						1
		661	1880.0	29.4	28.5	0.091	0.112		
		810	1909.8						1

Head Exposure Conditions for VoIP Mode

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	GPRS 2 Slots	512	1850.2						1
		661	1880.0	26.9	25.9	0.216	0.272		
		810	1909.8						1
Left Tilt (15°)	GPRS 2 Slots	512	1850.2						1
		661	1880.0	26.9	25.9	0.119	0.150		
		810	1909.8						1
Right Touch	GPRS 2 Slots	512	1850.2						1
		661	1880.0	26.9	25.9	0.244	0.307	4	
		810	1909.8						1
Right Tilt (15°)	GPRS 2 Slots	512	1850.2						1
		661	1880.0	26.9	25.9	0.094	0.118		
		810	1909.8						1

Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.2.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Voice	10	512	1850.2						1
			661	1880.0	29.4	28.5	0.693	0.853	5	
			810	1909.8						1
Front	Voice	10	512	1850.2						1
			661	1880.0	29.4	28.5	0.304	0.374		
			810	1909.8						1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.2.3. Hotspot Mode Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	GPRS 2 slots	10	512	1850.2						1
			661	1880.0	26.9	25.9	0.748	0.942	6	
			810	1909.8						1
Front	GPRS 2 slots	10	512	1850.2						1
			661	1880.0	26.9	25.9	0.340	0.428		
			810	1909.8						1
Edge 3	GPRS 2 slots	10	512	1850.2						1
			661	1880.0	26.9	25.9	0.310	0.390		
			810	1909.8						1
Edge 4	GPRS 2 slots	10	512	1850.2						1
			661	1880.0	26.9	25.9	0.125	0.157		
			810	1909.8						1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.3. Wi-Fi (2.4 GHz Band)

12.3.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	802.11b	1	2412						1
		6	2437	16.5	16.4	0.080	0.082		
		11	2462						1
Left Tilt (15°)	802.11b	1	2412						1
		6	2437	16.5	16.4	0.088	0.090		
		11	2462						1
Right Touch	802.11b	1	2412						1
		6	2437	16.5	16.4	0.098	0.100	7	
		11	2462						1
Right Tilt (15°)	802.11b	1	2412						1
		6	2437	16.5	16.4	0.098	0.100		
		11	2462						1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.3.2. Body-worn Accessory and Hot-Spot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	802.11b	10	1	2412						1
			6	2437	16.5	16.4	0.102	0.104	8	
			11	2462						1
Front	802.11b	10	1	2412						1
			6	2437	16.5	16.4	0.018	0.018		
			11	2462						1
Edge 1	802.11b	10	1	2412						1
			6	2437	16.5	16.4	0.031	0.032		
			11	2462						1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.4. Bluetooth

12.4.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
5.0	3	10	2.480	0.5

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

12.4.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	3	10	2.480	0.063

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Head Exposure Condition

Not Applicable. Highest measured SAR is < 0.80 W/kg.

Body-worn Accessory Exposure Condition

Not Applicable. Highest measured SAR is < 0.80 W/kg.

Hotspot Mode Exposure Condition

Not Applicable. Highest measured SAR is < 0.80 W/kg.

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05 requires the following equation for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas in millimeters. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Head Exposure Conditions

Sum of the SAR for WWAN & WiFi 2.4 GHz Band

Voice

Test Position	Voice		Data	Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	WiFi 2.4 GHz	
Left Touch	0.057		0.082	0.139
		0.301	0.082	0.383
Left Tilt	0.047		0.090	0.137
		0.117	0.090	0.207
Right Touch	0.057		0.100	0.157
		0.306	0.100	0.406
Right Tilt	0.052		0.100	0.152
		0.112	0.100	0.212

VoIP

Test Position	GSM 850	GSM 1900	WiFi 2.4 GHz	Σ 1-g SAR (mW/g)
Left Touch	0.064		0.082	0.146
		0.272	0.082	0.354
Left Tilt	0.052		0.090	0.142
		0.150	0.090	0.240
Right Touch	0.055		0.100	0.155
		0.307	0.100	0.407
Right Tilt	0.049		0.100	0.149
		0.118	0.100	0.218

Sum of the SAR with Scaled Values for the Worst-case Configuration

As the SAR for these configurations were measured at the maximum of tune-up tolerance limit, SAR scaling does not need to be applied.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.2. Body-worn Accessory Exposure Conditions

Sum of the SAR for WWAN, WiFi 2.4 GHz Band, and Bluetooth

Test Position	Voice		Data		Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	WiFi 2.4 GHz	Bluetooth 2.4 GHz	
Rear	0.206		0.104		0.310
		0.853	0.104		0.957
	0.206			0.063	0.269
		0.853		0.063	0.916
Front	0.096		0.018		0.114
		0.374	0.018		0.392
	0.096			0.063	0.159
		0.374		0.063	0.437

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.3. Hotspot Mode Exposure Conditions

Sum of the SAR for WWAN & WiFi 2.4 GHz Band

Test Position	Data			Σ 1-g SAR (mW/g)
	GSM 850	GSM 1900	WiFi 2.4 GHz	
Rear	0.195		0.104	0.299
		0.942	0.104	1.046
Front	0.093		0.018	0.111
		0.428	0.018	0.446

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. System Performance Check Plots**
- 15.2. Worst Case SAR Test Plots**
- 15.3. Calibration Certificate for E-Field Probe EX3DV4 - SN 3885**
- 15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3901**
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3686**
- 15.6. Calibration Certificate for D835V2 - SN 4d002**
- 15.7. Calibration Certificate for D1900V2 - SN 5d043**
- 15.8. Calibration Certificate for D2450V2 - SN 899**