

2. Sample Label


	1	2	3	4	5	6	7	8
A			Rev. No					
B	C2.0		36		36		30	
C					1:1 dxf파일			
D								
E								
F								
G								
H								
I								
J								
K								
L								

Technical Description

1. Use 'FILM' provided by 'SAMSUNG' for letter and contents
2. Background color is 'WHITE', letter color is 'BLACK'
(reverse for SAMSUNG LOGO)
3. Put 'release paper' on the back side after the adhesive.
4. No blur and spread for letter
5. Proceed with manufacturing process after the approval of R&D Group
6. The spec. of product must be based on approved limit samples.
7. Stock on as a ROLL
8. Follow drawing instruction above for CE or WEEE mark
9. Unify material and color as one color (blue) for glassine paper

ROLLING

MAT.	White polypropylene 80 μ		FIN.	Semitransparency OPP Lamination + UVP Coating	
TITLE	GT-I9108				
LABEL (R) - MAIN - EU					
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION
TOLERANCE	+0.0 -0.1	AN DAE GEUN	kyeonghwan jo	junesop kim	
SCALE	N/S				
Manufacture	HANSUNG P&I	110315	110315	110315	SHEET NO 1/1
		Doc. CODE	GH68-1		

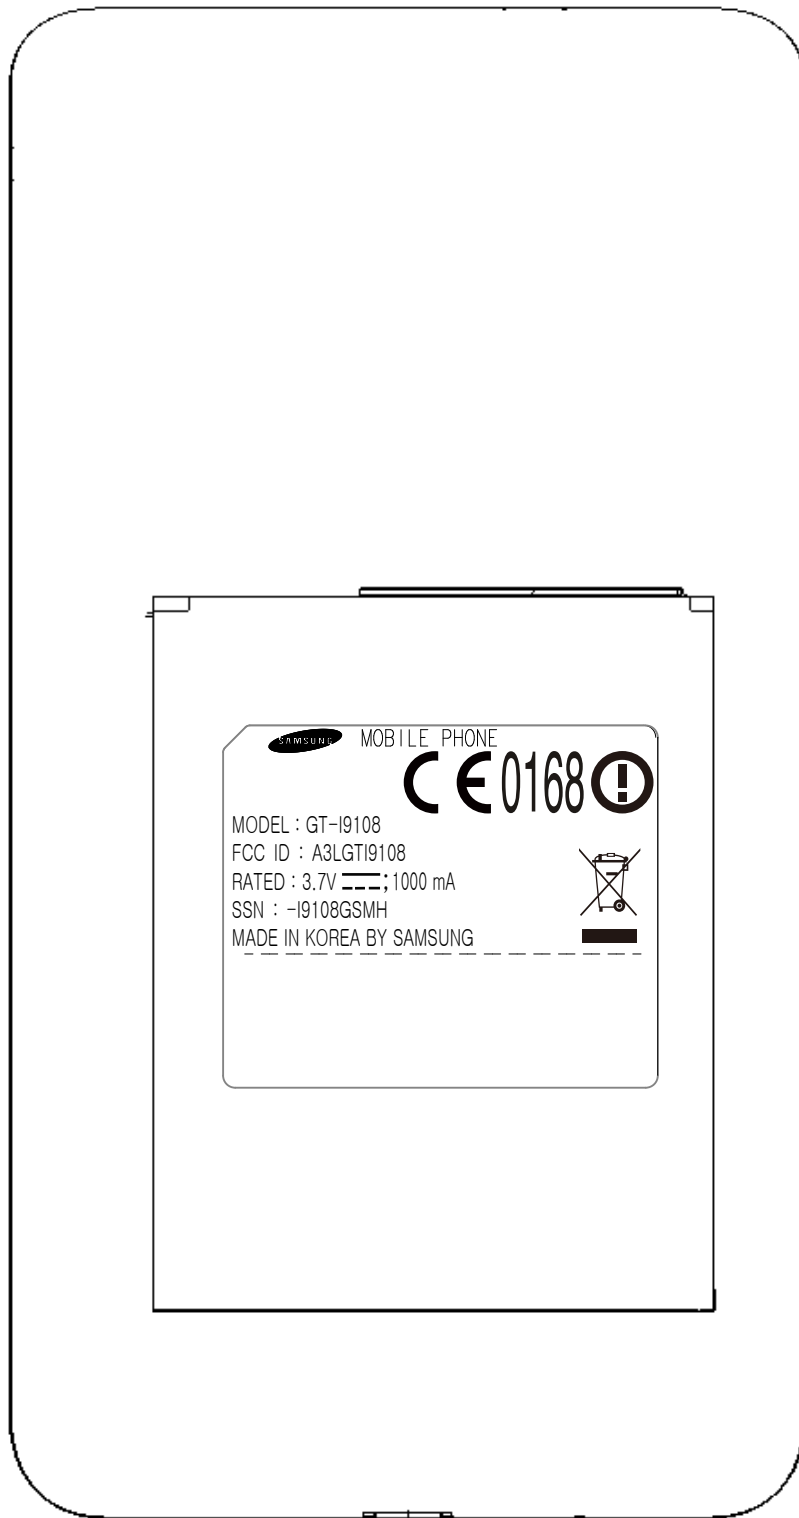

The label is placed inside the battery compartment