

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
416, Maetan 3-dong, Yeongtong-gu, Suwon-si,
Gyeonggi-do 443-742, Korea

Date of Issue:

September 26, 2012

Test Site/Location:

HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,
Icheon-si, Kyunggi-Do, Korea

Report No.: HCTR1209FR21

HCT FRN: 0005866421

FCC ID : A3LGTN7102

APPLICANT : SAMSUNG Electronics Co., Ltd.

FCC Model(s): GT-N7102

EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN

Max. RF Output Power: Wi-Fi 802.11a (5180~5240) (13.73 dBm)/ Wi-Fi 802.11a (5260~5320) (14.65 dBm)/
Wi-Fi 802.11a (5500~5700) (14.45 dBm)/ Wi-Fi 802.11n_20 MHz BW (5180~5240) (11.49 dBm)/
Wi-Fi 802.11n_20 MHz BW(5260~5320)(11.10 dBm)/ Wi-Fi 802.11n_20 MHz BW(5500~5700)(11.59 dBm)/
Wi-Fi 802.11n_40 MHz BW(5190~5230) (11.36 dBm)/ Wi-Fi 802.11n_40 MHz BW (5270~5310) (11.31 dBm)/
Wi-Fi 802.11n_40 MHz BW (5510~5670) (11.38 dBm)

Frequency Range: 20 MHz Bandwidth
5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2)/
5500 MHz - 5700 MHz (UNII 3)

40 MHz Bandwidth
5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2)/
5510 MHz - 5670 MHz (UNII 3)

Modulation type OFDM

FCC Classification: Unlicensed National Information Infrastructure(UNII)

FCC Rule Part(s): Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by
: Jong Seok Lee
Test engineer of RF Team



Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1209FR21	September 26, 2012	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. SUMMARY OF TEST RESULTS	8
8. TEST RESULT	9
8.1 26 dB BANDWIDTH MEASUREMENT	9
8.2 OUTPUT POWER MEASUREMENT	2 7
8.3 POWER SPECTRAL DENSITY	1 3 8
8.4 PEAK EXCURSION RATIO.....	1 5 6
8.5 FREQUENCY STABILITY.	1 7 2
8.6 RADIATED MEASUREMENT.....	1 7 8
8.6.1 RADIATED SPURIOUS EMISSIONS.....	1 7 8
8.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	1 9 9
8.7 POWERLINE CONDUCTED EMISSIONS	2 0 3
9. LIST OF TEST EQUIPMENT	2 0 8



1. GENERAL INFORMATION

Applicant: SAMSUNG Electronics Co., Ltd.
Address: 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea
FCC ID: A3LGTN7102
EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN
Model name(s): GT-N7102
Date(s) of Tests: September 11, 2012 ~ September 20, 2012
Place of Tests: HCT Co., Ltd.
 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	
FCC Model Name	GT-N7102	
Power Supply	DC 3.7 V	
Frequency Range	TX: 20 MHz BW: 5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2)/ 40 MHz BW: 5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2)/ 5510 MHz - 5670 MHz (UNII 3) RX: 20 MHz BW: 5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2)/ 40 MHz BW: 5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2)/ 5510 MHz - 5670 MHz (UNII 3)	
Max. RF Output Power:	Wi-Fi 802.11a (5180~5240) (13.73 dBm)/ Wi-Fi 802.11a (5260~5320) (14.65 dBm)/ Wi-Fi 802.11a (5500~5700) (14.45 dBm)/ Wi-Fi 802.11n_20 MHz BW (5180~5240) (11.49 dBm)/ Wi-Fi 802.11n_20 MHz BW(5260~5320)(11.10 dBm)/ Wi-Fi 802.11n_20 MHz BW(5500~5700)(11.59 dBm)/ Wi-Fi 802.11n_40 MHz BW(5190~5230) (11.36 dBm)/ Wi-Fi 802.11n_40 MHz BW (5270~5310) (11.31 dBm)/ Wi-Fi 802.11n_40 MHz BW (5510~5670) (11.38 dBm)	
Modulation Type	OFDM(802.11a, 802.11n_20 MHz, 802.11n_40 MHz)	
Antenna Specification	Manufacturer: Partron Antenna type: FPCB Antenna Peak Gain : -0.51 dBi(5.2 GHz Band)	

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009) and FCC KDB 789033 D01 General UNII Test Procedures v01r01 dated March 05, 2012 entitled “ Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2009) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10. (Version: 2009)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

7. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
TRANSMITTER MODE(TX)				
26dB Bandwidth	NA	NA	CONDUCTED	PASS
Maximum Conducted Output Power	§15.407(a)(1)	$< 4+10 \log_{10} (BW) \text{ dBm}$ (5150-5250 MHz) $< 11+10 \log_{10} (BW) \text{ dBm}$ (5250-5350 MHz) $< 11+10 \log_{10} (BW) \text{ dBm}$ (5470-5725 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1), (5)	$< 4 \text{ dBm/ MHz}$ (5150-5250) $< 11 \text{ dBm/ MHz}$ (5250-5350) $< 11 \text{ dBm/ MHz}$ (5470-5725)		PASS
Peak Excursion	§15.407(a)(6)	$< 13 \text{ dB/ MHz}$ maximum difference		PASS
Frequency Stability	§15.407(g)	NA		PASS
Undesirable Emissions	§15.407(b)(1), (2), (3)	$< -27 \text{ dBm/ MHz EIRP}$ (5150-5350 MHz, 5470-5725 MHz)	RADIATED	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 5.407(b)(1), (5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	$< \text{FCC 15.207 limits}$	LINE CONDUCTED	PASS


8. TEST RESULT

8.1 26 dB BANDWIDTH MEASUREMENT

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

TEST CONFIGURATION

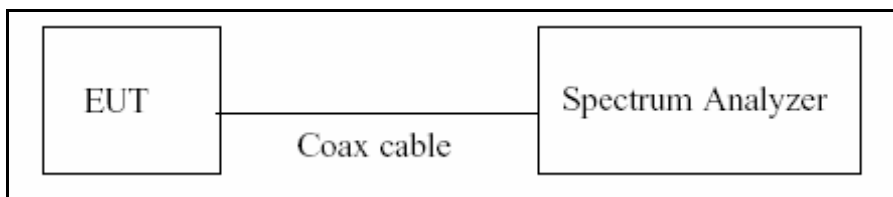

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: approximately 1 % of the emission bandwidth

VBW: >RBW

SPAN: 40 MHz(20 MHz BW) / 60 MHz(40 MHz BW)

Detector = Peak

Trace mode = max hold

TEST RESULTS

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	20.09	N/A	Pass
5200	40	20.75	N/A	Pass
5240	48	20.36	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	20.27	N/A	Pass
5300	60	19.76	N/A	Pass
5320	64	19.87	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	20.12	N/A	Pass
5600	120	19.13	N/A	Pass
5700	140	19.29	N/A	Pass

20 MHz BW

TEST RESULTS

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	19.50	N/A	Pass
5200	40	19.68	N/A	Pass
5240	48	19.43	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	19.54	N/A	Pass
5300	60	19.51	N/A	Pass
5320	64	19.63	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	19.41	N/A	Pass
5600	120	19.61	N/A	Pass
5700	140	19.59	N/A	Pass

40 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	43.64	N/A	Pass
5230	46	44.50	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5270	54	44.33	N/A	Pass
5310	62	43.20	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5510	102	43.93	N/A	Pass
5590	118	43.35	N/A	Pass
5670	134	44.95	N/A	Pass

RESULT PLOTS

26 dB Bandwidth plot (802.11a-CH 36)



26 dB Bandwidth plot (802.11a-CH 40)



26 dB Bandwidth plot (802.11a-CH 48)



26 dB Bandwidth plot (802.11a-CH 52)



26 dB Bandwidth plot (802.11a-CH 60)



26 dB Bandwidth plot (802.11a-CH 64)



26 dB Bandwidth plot (802.11a-CH 100)



26 dB Bandwidth plot (802.11a-CH 120)



26 dB Bandwidth plot (802.11a-CH 140)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

20 MHz BW

26 dB Bandwidth plot (802.11n-CH 36)



26 dB Bandwidth plot (802.11n-CH 40)



26 dB Bandwidth plot (802.11n-CH 48)



26 dB Bandwidth plot (802.11n-CH 52)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

26 dB Bandwidth plot (802.11n-CH 60)



26 dB Bandwidth plot (802.11n-CH 64)



26 dB Bandwidth plot (802.11n-CH 100)



26 dB Bandwidth plot (802.11n-CH 120)



26 dB Bandwidth plot (802.11n-CH 140)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

40 MHz BW

26 dB Bandwidth plot (802.11n-CH 38)



26 dB Bandwidth plot (802.11n-CH 46)



26 dB Bandwidth plot (802.11n-CH 54)



26 dB Bandwidth plot (802.11n-CH 62)



26 dB Bandwidth plot (802.11n-CH 102)



26 dB Bandwidth plot (802.11n-CH 118)



26 dB Bandwidth plot (802.11n-CH 134)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

8.2 OUTPUT POWER MEASUREMENT

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. In the 5.15 – 5.25 GHz band, the maximum permissible conducted output power is the lesser of 50 mW (16.99 dBm) and $4 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$

frequencies. In the 5.25 – 5.35 GHz band, the maximum permissible conducted output power is the lesser of 250 mW (23.98 dBm) and $11 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$

frequencies. In the 5.47 – 5.725 GHz band, the maximum permissible conducted output power is the lesser of 250 mW (23.98 dBm) and $11 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$

Limit : 802.11a_UNII-1 = 16.99 dBm

802.11n(20 MHz BW)_UNII-1 = 16.88 dBm

802.11n(40 MHz BW)_UNII-1 = 16.99 dBm

802.11a_UNII-2 = 23.96 dBm

802.11n(20 MHz BW)_UNII-2 = 23.90 dBm


802.11n(40 MHz BW)_UNII-2 = 23.98 dBm

802.11a_UNII-3 = 23.82 dBm

802.11n(20 MHz BW)_UNII-3 = 23.88 dBm

802.11n(40 MHz BW)_UNII-3 = 23.98 dBm

TEST CONFIGURATION

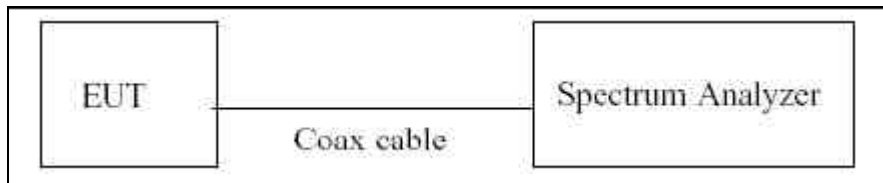

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to Method SA-1 in KDB 789033(issued 3/05/2012).

This EUT TX condition is actual operating mode(not near 100 % duty cycle) by WLAN test program.

The Spectrum Analyzer is set to

- Average Power

RBW = 1 MHz

VBW = 3 MHz

Sweep Point = 1001

SPAN = to encompass the entire EBW of the signal

Sweep Time = auto

Detector Mode = RMS(i.e., power averaging)

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Trace average at least 100 traces in power averaging(RMS) mode
Integrated bandwidth = 26 dB EBW

Sample Calculation

$$\begin{aligned}\text{Output Power} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss}(1 \text{ ea}) \\ &= 10 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} = 20.8 \text{ dBm}\end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	10.26
	5190	10.22
	5200	10.18
	5230	10.19
	5240	10.19
UNII 2	5260	10.18
	5270	10.17
	5300	10.14
	5310	10.11
	5320	10.09
UNII 3	5500	10.20
	5510	10.20
	5590	10.25
	5600	10.27
	5670	10.36
	5700	10.40

(Actual value of loss for the attenuator and cable combination)

TEST RESULTS

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6 Mbps	13.73	16.99
		9 Mbps	13.55	16.99
		12 Mbps	13.48	16.99
		18 Mbps	13.28	16.99
		24 Mbps	13.08	16.99
		36 Mbps	12.72	16.99
		48 Mbps	12.37	16.99
		54 Mbps	12.25	16.99
5200	40	6 Mbps	13.51	16.99
		9 Mbps	13.27	16.99
		12 Mbps	13.21	16.99
		18 Mbps	13.03	16.99
		24 Mbps	12.80	16.99
		36 Mbps	12.39	16.99
		48 Mbps	12.10	16.99
		54 Mbps	12.01	16.99
5240	48	6 Mbps	13.52	16.99
		9 Mbps	13.31	16.99
		12 Mbps	13.31	16.99
		18 Mbps	13.06	16.99
		24 Mbps	12.91	16.99
		36 Mbps	12.54	16.99
		48 Mbps	12.18	16.99
		54 Mbps	12.02	16.99

Conducted Output Power Measurements (802.11a Mode: 5260~5320)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5260	52	6 Mbps	14.61	23.96
		9 Mbps	14.53	23.96
		12 Mbps	14.42	23.96
		18 Mbps	14.15	23.96
		24 Mbps	13.93	23.96
		36 Mbps	13.58	23.96
		48 Mbps	13.29	23.96
		54 Mbps	13.15	23.96
5300	60	6 Mbps	13.71	23.96
		9 Mbps	13.47	23.96
		12 Mbps	13.38	23.96
		18 Mbps	13.14	23.96
		24 Mbps	12.99	23.96
		36 Mbps	12.62	23.96
		48 Mbps	12.28	23.96
		54 Mbps	12.18	23.96
5320	64	6 Mbps	14.65	23.96
		9 Mbps	14.53	23.96
		12 Mbps	14.45	23.96
		18 Mbps	14.20	23.96
		24 Mbps	14.04	23.96
		36 Mbps	13.62	23.96
		48 Mbps	13.31	23.96
		54 Mbps	13.17	23.96

Conducted Output Power Measurements (802.11a Mode: 5500~5700)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5500	100	6 Mbps	14.45	23.82
		9 Mbps	14.29	23.82
		12 Mbps	14.15	23.82
		18 Mbps	13.88	23.82
		24 Mbps	13.72	23.82
		36 Mbps	13.32	23.82
		48 Mbps	13.03	23.82
		54 Mbps	12.93	23.82
5600	120	6 Mbps	13.70	23.82
		9 Mbps	13.67	23.82
		12 Mbps	13.56	23.82
		18 Mbps	13.29	23.82
		24 Mbps	13.07	23.82
		36 Mbps	12.68	23.82
		48 Mbps	12.40	23.82
		54 Mbps	12.31	23.82
5700	140	6 Mbps	13.94	23.82
		9 Mbps	13.87	23.82
		12 Mbps	13.79	23.82
		18 Mbps	13.55	23.82
		24 Mbps	13.37	23.82
		36 Mbps	12.99	23.82
		48 Mbps	12.65	23.82
		54 Mbps	12.49	23.82

20 MHz BW

Conducted Output Power Measurements (802.11n Mode: 5180~5240)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5180	36	6.5 Mbps	11.49	16.88
		13 Mbps	11.24	16.88
		19.5 Mbps	11.09	16.88
		26 Mbps	10.90	16.88
		39 Mbps	10.47	16.88
		52 Mbps	10.14	16.88
		58.5 Mbps	10.09	16.88
		65 Mbps	10.00	16.88
5200	40	6.5 Mbps	11.25	16.88
		13 Mbps	11.01	16.88
		19.5 Mbps	10.81	16.88
		26 Mbps	10.55	16.88
		39 Mbps	10.28	16.88
		52 Mbps	9.96	16.88
		58.5 Mbps	9.87	16.88
		65 Mbps	9.64	16.88
5240	48	6.5 Mbps	11.18	16.88
		13 Mbps	10.87	16.88
		19.5 Mbps	10.66	16.88
		26 Mbps	10.44	16.88
		39 Mbps	10.08	16.88
		52 Mbps	9.81	16.88
		58.5 Mbps	9.62	16.88
		65 Mbps	9.51	16.88

Conducted Output Power Measurements (802.11n Mode: 5260~5320)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5260	52	6.5 Mbps	11.10	23.90
		13 Mbps	10.82	23.90
		19.5 Mbps	10.64	23.90
		26 Mbps	10.41	23.90
		39 Mbps	10.11	23.90
		52 Mbps	9.79	23.90
		58.5 Mbps	9.70	23.90
		65 Mbps	9.54	23.90
5300	60	6.5 Mbps	11.10	23.90
		13 Mbps	10.81	23.90
		19.5 Mbps	10.61	23.90
		26 Mbps	10.41	23.90
		39 Mbps	10.08	23.90
		52 Mbps	9.74	23.90
		58.5 Mbps	9.66	23.90
		65 Mbps	9.49	23.90
5320	64	6.5 Mbps	10.97	23.90
		13 Mbps	10.72	23.90
		19.5 Mbps	10.49	23.90
		26 Mbps	10.27	23.90
		39 Mbps	9.94	23.90
		52 Mbps	9.63	23.90
		58.5 Mbps	9.54	23.90
		65 Mbps	9.39	23.90

Conducted Output Power Measurements (802.11n Mode: 5500~5700)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5500	100	6.5 Mbps	11.20	23.88
		13 Mbps	10.96	23.88
		19.5 Mbps	10.76	23.88
		26 Mbps	10.56	23.88
		39 Mbps	10.22	23.88
		52 Mbps	9.91	23.88
		58.5 Mbps	9.77	23.88
		65 Mbps	9.66	23.88
5600	120	6.5 Mbps	11.59	23.88
		13 Mbps	11.40	23.88
		19.5 Mbps	11.19	23.88
		26 Mbps	11.00	23.88
		39 Mbps	10.66	23.88
		52 Mbps	10.32	23.88
		58.5 Mbps	10.28	23.88
		65 Mbps	10.10	23.88
5700	140	6.5 Mbps	10.87	23.88
		13 Mbps	10.65	23.88
		19.5 Mbps	10.43	23.88
		26 Mbps	10.25	23.88
		39 Mbps	9.94	23.88
		52 Mbps	9.59	23.88
		58.5 Mbps	9.47	23.88
		65 Mbps	9.35	23.88

40 MHz BW

Conducted Output Power Measurements (802.11n Mode: 5190~5230)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5190	38	13.5 Mbps	11.36	16.99
		27 Mbps	10.97	16.99
		40.5 Mbps	10.55	16.99
		54 Mbps	10.29	16.99
		81 Mbps	9.77	16.99
		108 Mbps	9.35	16.99
		121.5 Mbps	9.37	16.99
		135 Mbps	9.09	16.99
5230	46	13.5 Mbps	11.28	16.99
		27 Mbps	10.88	16.99
		40.5 Mbps	10.55	16.99
		54 Mbps	10.23	16.99
		81 Mbps	9.75	16.99
		108 Mbps	9.33	16.99
		121.5 Mbps	9.18	16.99
		135 Mbps	9.05	16.99

Conducted Output Power Measurements (802.11n Mode: 5270~5310)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5270	54	13.5 Mbps	11.31	23.98
		27 Mbps	10.88	23.98
		40.5 Mbps	10.53	23.98
		54 Mbps	10.23	23.98
		81 Mbps	9.73	23.98
		108 Mbps	9.34	23.98
		121.5 Mbps	9.22	23.98
		135 Mbps	9.05	23.98
5310	62	13.5 Mbps	11.24	23.98
		27 Mbps	10.88	23.98
		40.5 Mbps	10.48	23.98
		54 Mbps	10.14	23.98
		81 Mbps	9.69	23.98
		108 Mbps	9.31	23.98
		121.5 Mbps	9.14	23.98
		135 Mbps	8.96	23.98

Conducted Output Power Measurements (802.11n Mode: 5510~5670)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5510	102	13.5 Mbps	11.38	23.98
		27 Mbps	11.02	23.98
		40.5 Mbps	10.70	23.98
		54 Mbps	10.37	23.98
		81 Mbps	9.95	23.98
		108 Mbps	9.52	23.98
		121.5 Mbps	9.44	23.98
		135 Mbps	9.17	23.98
5590	118	13.5 Mbps	10.81	23.98
		27 Mbps	10.32	23.98
		40.5 Mbps	9.96	23.98
		54 Mbps	9.70	23.98
		81 Mbps	9.24	23.98
		108 Mbps	8.79	23.98
		121.5 Mbps	8.72	23.98
		135 Mbps	8.58	23.98
5670	134	13.5 Mbps	10.85	23.98
		27 Mbps	10.43	23.98
		40.5 Mbps	10.05	23.98
		54 Mbps	9.83	23.98
		81 Mbps	9.33	23.98
		108 Mbps	8.91	23.98
		121.5 Mbps	8.76	23.98
		135 Mbps	8.57	23.98

RESULT PLOTS (5180 MHz ~5240 MHz)

Conducted Output Power (802.11a-CH 36) 6 Mbps



Conducted Output Power (802.11a-CH 36) 9 Mbps



Conducted Output Power (802.11a-CH 36) 12 Mbps



Conducted Output Power (802.11a-CH 36) 18 Mbps



Conducted Output Power (802.11a-CH 36) 24 Mbps



Conducted Output Power (802.11a-CH 36) 36 Mbps



Conducted Output Power (802.11a-CH 36) 48 Mbps



Conducted Output Power (802.11a-CH 36) 54 Mbps



Conducted Output Power (802.11a-CH 40) 6 Mbps



Conducted Output Power (802.11a-CH 40) 9 Mbps



Conducted Output Power (802.11a-CH 40) 12 Mbps



Conducted Output Power (802.11a-CH 40) 18 Mbps



Conducted Output Power (802.11a-CH 40) 24 Mbps



Conducted Output Power (802.11a-CH 40) 36 Mbps



Conducted Output Power (802.11a-CH 40) 48 Mbps



Conducted Output Power (802.11a-CH 40) 54 Mbps



Conducted Output Power (802.11a-CH 48) 6 Mbps



Conducted Output Power (802.11a-CH 48) 9 Mbps



Conducted Output Power (802.11a-CH 48) 12 Mbps



Conducted Output Power (802.11a-CH 48) 18 Mbps



Conducted Output Power (802.11a-CH 48) 24 Mbps



Conducted Output Power (802.11a-CH 48) 36 Mbps



Conducted Output Power (802.11a-CH 48) 48 Mbps



Conducted Output Power (802.11a-CH 48) 54 Mbps



RESULT PLOTS (5260 MHz ~5320 MHz)

Conducted Output Power (802.11a-CH 52) 6 Mbps



Conducted Output Power (802.11a-CH 52) 9 Mbps



Conducted Output Power (802.11a-CH 52) 12 Mbps



Conducted Output Power (802.11a-CH 52) 18 Mbps



Conducted Output Power (802.11a-CH 52) 24 Mbps



Conducted Output Power (802.11a-CH 52) 36 Mbps



Conducted Output Power (802.11a-CH 52) 48 Mbps



Conducted Output Power (802.11a-CH 52) 54 Mbps



Conducted Output Power (802.11a-CH 60) 6 Mbps



Conducted Output Power (802.11a-CH 60) 9 Mbps



Conducted Output Power (802.11a-CH 60) 12 Mbps



Conducted Output Power (802.11a-CH 60) 18 Mbps



Conducted Output Power (802.11a-CH 60) 24 Mbps



Conducted Output Power (802.11a-CH 60) 36 Mbps



Conducted Output Power (802.11a-CH 60) 48 Mbps



Conducted Output Power (802.11a-CH 60) 54 Mbps



Conducted Output Power (802.11a-CH 64) 6 Mbps



Conducted Output Power (802.11a-CH 64) 9 Mbps



Conducted Output Power (802.11a-CH 64) 12 Mbps



Conducted Output Power (802.11a-CH 64) 18 Mbps



Conducted Output Power (802.11a-CH 64) 24 Mbps



Conducted Output Power (802.11a-CH 64) 36 Mbps



Conducted Output Power (802.11a-CH 64) 48 Mbps



Conducted Output Power (802.11a-CH 64) 54 Mbps



RESULT PLOTS (5500 MHz ~5700 MHz)

Conducted Output Power (802.11a-CH 100) 6 Mbps



Conducted Output Power (802.11a-CH 100) 9 Mbps



Conducted Output Power (802.11a-CH 100) 12 Mbps



Conducted Output Power (802.11a-CH 100) 18 Mbps



Conducted Output Power (802.11a-CH 100) 24 Mbps



Conducted Output Power (802.11a-CH 100) 36 Mbps



Conducted Output Power (802.11a-CH 100) 48 Mbps



Conducted Output Power (802.11a-CH 100) 54 Mbps



Conducted Output Power (802.11a-CH 120) 6 Mbps



Conducted Output Power (802.11a-CH 120) 9 Mbps



Conducted Output Power (802.11a-CH 120) 12 Mbps



Conducted Output Power (802.11a-CH 120) 18 Mbps



Conducted Output Power (802.11a-CH 120) 24 Mbps



Conducted Output Power (802.11a-CH 120) 36 Mbps



Conducted Output Power (802.11a-CH 120) 48 Mbps



Conducted Output Power (802.11a-CH 120) 54 Mbps



Conducted Output Power (802.11a-CH 140) 6 Mbps



Conducted Output Power (802.11a-CH 140) 9 Mbps



Conducted Output Power (802.11a-CH 140) 12 Mbps



Conducted Output Power (802.11a-CH 140) 18 Mbps



Conducted Output Power (802.11a-CH 140) 24 Mbps



Conducted Output Power (802.11a-CH 140) 36 Mbps



Conducted Output Power (802.11a-CH 140) 48 Mbps



Conducted Output Power (802.11a-CH 140) 54 Mbps



20 MHz BW

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

RESULT PLOTS (5180 MHz ~5240 MHz)

Conducted Output Power (802.11n-CH 36) 6.5 Mbps



Conducted Output Power (802.11n-CH 36) 13 Mbps



Conducted Output Power (802.11n-CH 36) 19.5 Mbps



Conducted Output Power (802.11n-CH 36) 26 Mbps



Conducted Output Power (802.11n-CH 36) 39 Mbps



Conducted Output Power (802.11n-CH 36) 52 Mbps



Conducted Output Power (802.11n-CH 36) 58.5 Mbps



Conducted Output Power (802.11n-CH 36) 65 Mbps



Conducted Output Power (802.11n-CH 40) 6.5 Mbps



Conducted Output Power (802.11n-CH 40) 13 Mbps



Conducted Output Power (802.11n-CH 40) 19.5 Mbps



Conducted Output Power (802.11n-CH 40) 26 Mbps



Conducted Output Power (802.11n-CH 40) 39 Mbps



Conducted Output Power (802.11n-CH 40) 52 Mbps



Conducted Output Power (802.11n-CH 40) 58.5 Mbps



Conducted Output Power (802.11n-CH 40) 65 Mbps



Conducted Output Power (802.11n-CH 48) 6.5 Mbps



Conducted Output Power (802.11n-CH 48) 13 Mbps



Conducted Output Power (802.11n-CH 48) 19.5 Mbps



Conducted Output Power (802.11n-CH 48) 26 Mbps



Conducted Output Power (802.11n-CH 48) 39 Mbps



Conducted Output Power (802.11n-CH 48) 52 Mbps



Conducted Output Power (802.11n-CH 48) 58.5 Mbps



Conducted Output Power (802.11n-CH 48) 65 Mbps



RESULT PLOTS (5260 MHz ~5320 MHz)

Conducted Output Power (802.11n-CH 52) 6.5 Mbps



Conducted Output Power (802.11n-CH 52) 13 Mbps



Conducted Output Power (802.11n-CH 52) 19.5 Mbps



Conducted Output Power (802.11n-CH 52) 26 Mbps



Conducted Output Power (802.11n-CH 52) 39 Mbps



Conducted Output Power (802.11n-CH 52) 52 Mbps



Conducted Output Power (802.11n-CH 52) 58.5 Mbps



Conducted Output Power (802.11n-CH 52) 65 Mbps



Conducted Output Power (802.11n-CH 60) 6.5 Mbps



Conducted Output Power (802.11n-CH 60) 13 Mbps



Conducted Output Power (802.11n-CH 60) 19.5 Mbps



Conducted Output Power (802.11n-CH 60) 26 Mbps



Conducted Output Power (802.11n-CH 60) 39 Mbps



Conducted Output Power (802.11n-CH 60) 52 Mbps



Conducted Output Power (802.11n-CH 60) 58.5 Mbps



Conducted Output Power (802.11n-CH 60) 65 Mbps



Conducted Output Power (802.11n-CH 64) 6.5 Mbps



Conducted Output Power (802.11n-CH 64) 13 Mbps



Conducted Output Power (802.11n-CH 64) 19.5 Mbps



Conducted Output Power (802.11n-CH 64) 26 Mbps



Conducted Output Power (802.11n-CH 64) 39 Mbps



Conducted Output Power (802.11n-CH 64) 52 Mbps



Conducted Output Power (802.11n-CH 64) 58.5 Mbps



Conducted Output Power (802.11n-CH 64) 65 Mbps



RESULT PLOTS (5500 MHz ~5700 MHz)

Conducted Output Power (802.11n-CH 100) 6.5 Mbps



Conducted Output Power (802.11n-CH 100) 13 Mbps



Conducted Output Power (802.11n-CH 100) 19.5 Mbps



Conducted Output Power (802.11n-CH 100) 26 Mbps



Conducted Output Power (802.11n-CH 100) 39 Mbps



Conducted Output Power (802.11n-CH 100) 52 Mbps



Conducted Output Power (802.11n-CH 100) 58.5 Mbps



Conducted Output Power (802.11n-CH 100) 65 Mbps



Conducted Output Power (802.11n-CH 120) 6.5 Mbps



Conducted Output Power (802.11n-CH 120) 13 Mbps



Conducted Output Power (802.11n-CH 120) 19.5 Mbps



Conducted Output Power (802.11n-CH 120) 26 Mbps



Conducted Output Power (802.11n-CH 120) 39 Mbps



Conducted Output Power (802.11n-CH 120) 52 Mbps



Conducted Output Power (802.11n-CH 120) 58.5 Mbps



Conducted Output Power (802.11n-CH 120) 65 Mbps



Conducted Output Power (802.11n-CH 140) 6.5 Mbps



Conducted Output Power (802.11n-CH 140) 13 Mbps



Conducted Output Power (802.11n-CH 140) 19.5 Mbps



Conducted Output Power (802.11n-CH 140) 26 Mbps



Conducted Output Power (802.11n-CH 140) 39 Mbps



Conducted Output Power (802.11n-CH 140) 52 Mbps



Conducted Output Power (802.11n-CH 140) 58.5 Mbps



Conducted Output Power (802.11n-CH 140) 65 Mbps



40 MHz BW

RESULT PLOTS (5190 MHz ~5230 MHz)

Conducted Output Power (802.11n-CH 36) 13.5 Mbps



Conducted Output Power (802.11n-CH 36) 27 Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Conducted Output Power (802.11n-CH 36) 40.5 Mbps



Conducted Output Power (802.11n-CH 36) 54 Mbps



Conducted Output Power (802.11n-CH 36) 81 Mbps



Conducted Output Power (802.11n-CH 36) 108 Mbps



Conducted Output Power (802.11n-CH 36) 121.5 Mbps



Conducted Output Power (802.11n-CH 36) 135 Mbps



Conducted Output Power (802.11n-CH 36) 13.5 Mbps



Conducted Output Power (802.11n-CH 36) 27 Mbps



Conducted Output Power (802.11n-CH 36) 40.5 Mbps



Conducted Output Power (802.11n-CH 36) 54 Mbps



Conducted Output Power (802.11n-CH 36) 81 Mbps



Conducted Output Power (802.11n-CH 36) 108 Mbps



Conducted Output Power (802.11n-CH 36) 121.5 Mbps



Conducted Output Power (802.11n-CH 36) 135 Mbps



RESULT PLOTS (5270 MHz ~5310 MHz)

Conducted Output Power (802.11n-CH 52) 13.5 Mbps



Conducted Output Power (802.11n-CH 52) 27 Mbps



Conducted Output Power (802.11n-CH 52) 40.5 Mbps



Conducted Output Power (802.11n-CH 52) 54 Mbps



Conducted Output Power (802.11n-CH 52) 81 Mbps



Conducted Output Power (802.11n-CH 52) 108 Mbps



Conducted Output Power (802.11n-CH 52) 121.5 Mbps



Conducted Output Power (802.11n-CH 60) 135 Mbps



Conducted Output Power (802.11n-CH 52) 13.5 Mbps



Conducted Output Power (802.11n-CH 52) 27 Mbps



Conducted Output Power (802.11n-CH 52) 40.5 Mbps



Conducted Output Power (802.11n-CH 52) 54 Mbps



Conducted Output Power (802.11n-CH 52) 81 Mbps



Conducted Output Power (802.11n-CH 52) 108 Mbps



Conducted Output Power (802.11n-CH 52) 121.5 Mbps



Conducted Output Power (802.11n-CH 60) 135 Mbps



RESULT PLOTS (5510 MHz ~5670 MHz)

Conducted Output Power (802.11n-CH 100) 13.5 Mbps



Conducted Output Power (802.11n-CH 100) 27 Mbps



Conducted Output Power (802.11n-CH 100) 40.5 Mbps



Conducted Output Power (802.11n-CH 100) 54 Mbps



Conducted Output Power (802.11n-CH 100) 81 Mbps



Conducted Output Power (802.11n-CH 100) 108 Mbps



Conducted Output Power (802.11n-CH 100) 121.5 Mbps



Conducted Output Power (802.11n-CH 100) 135 Mbps



Conducted Output Power (802.11n-CH 100) 13.5 Mbps



Conducted Output Power (802.11n-CH 100) 27 Mbps



Conducted Output Power (802.11n-CH 100) 40.5 Mbps



Conducted Output Power (802.11n-CH 100) 54 Mbps



Conducted Output Power (802.11n-CH 100) 81 Mbps



Conducted Output Power (802.11n-CH 100) 108 Mbps



Conducted Output Power (802.11n-CH 100) 121.5 Mbps



Conducted Output Power (802.11n-CH 100) 135 Mbps



Conducted Output Power (802.11n-CH 100) 13.5 Mbps



Conducted Output Power (802.11n-CH 100) 27 Mbps



Conducted Output Power (802.11n-CH 100) 40.5 Mbps



Conducted Output Power (802.11n-CH 100) 54 Mbps



Conducted Output Power (802.11n-CH 100) 81 Mbps



Conducted Output Power (802.11n-CH 100) 108 Mbps



Conducted Output Power (802.11n-CH 100) 121.5 Mbps




Conducted Output Power (802.11n-CH 100) 135 Mbps



8.3 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 4 dBm/ MHz in the 5.15 GHz – 5.25 GHz band and 11 dBm/ MHz in the 5.25 GHz – 5.35 GHz and 5.47 GHz – 5.725 GHz bands

TEST CONFIGURATION

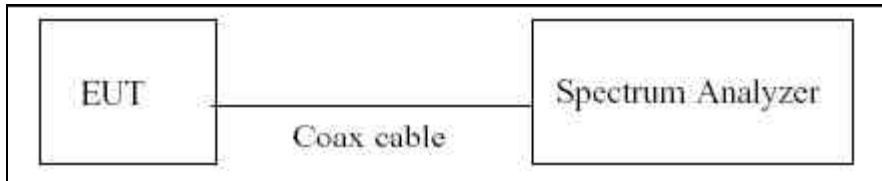

TEST PROCEDURE

The spectrum analyzer is set to :

RBW = 1 MHz

VBW = 3 MHz

SPAN = to encompass the entire EBW of the signal

Sweep Time = auto

Sweep Point = 1001

Detector Mode = Average

Trace average at least 100 traces in power averaging(RMS) mode

Sample Calculation

$$\begin{aligned}
 \text{PSD} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss}(1 \text{ ea}) \\
 &= -5 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} = 15.8 \text{ dBm}
 \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	10.26
	5190	10.22
	5200	10.18
	5230	10.19
	5240	10.19
UNII 2	5260	10.18
	5270	10.17
	5300	10.14
	5310	10.11
	5320	10.09
UNII 3	5500	10.20
	5510	10.20
	5590	10.25
	5600	10.27
	5670	10.36
	5700	10.40

(Actual value of loss for the attenuator and cable combination)

TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			Power Density (dBm)	Limit (dBm)	Pass/Fail
5180	36	802.11a	3.843	4	Pass
5200	40		3.271	4	Pass
5240	48		3.572	4	Pass
5260	52	802.11a	4.699	11	Pass
5300	60		3.583	11	Pass
5320	64		4.521	11	Pass
5500	100	802.11a	4.326	11	Pass
5600	120		3.711	11	Pass
5700	140		3.877	11	Pass

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result		
			Power Density (dBm)	Limit (dBm)	Pass/Fail
5180	36	802.11n_20MHz BW	1.152	4	Pass
5200	40		0.950	4	Pass
5240	48		0.971	4	Pass
5260	52	802.11n_20MHz BW	1.016	11	Pass
5300	60		1.076	11	Pass
5320	64		0.857	11	Pass
5500	100	802.11n_20MHz BW	0.934	11	Pass
5600	120		1.626	11	Pass
5700	140		0.487	11	Pass

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result		
			Power Density (dBm)	Limit (dBm)	Pass/Fail
5190	38	802.11n_40 MHz BW	-2.349	4	Pass
5230	46		-2.376	4	Pass
5270	54	802.11n_40 MHz BW	-2.297	4	Pass
5310	62		-2.409	11	Pass
5510	102	802.11n_40 MHz BW	-2.334	11	Pass
5590	118		-2.988	11	Pass
5670	134		-2.714	11	Pass

RESULT PLOTS

Power Spectral Density (802.11a-CH 36)



Power Spectral Density (802.11a-CH 40)

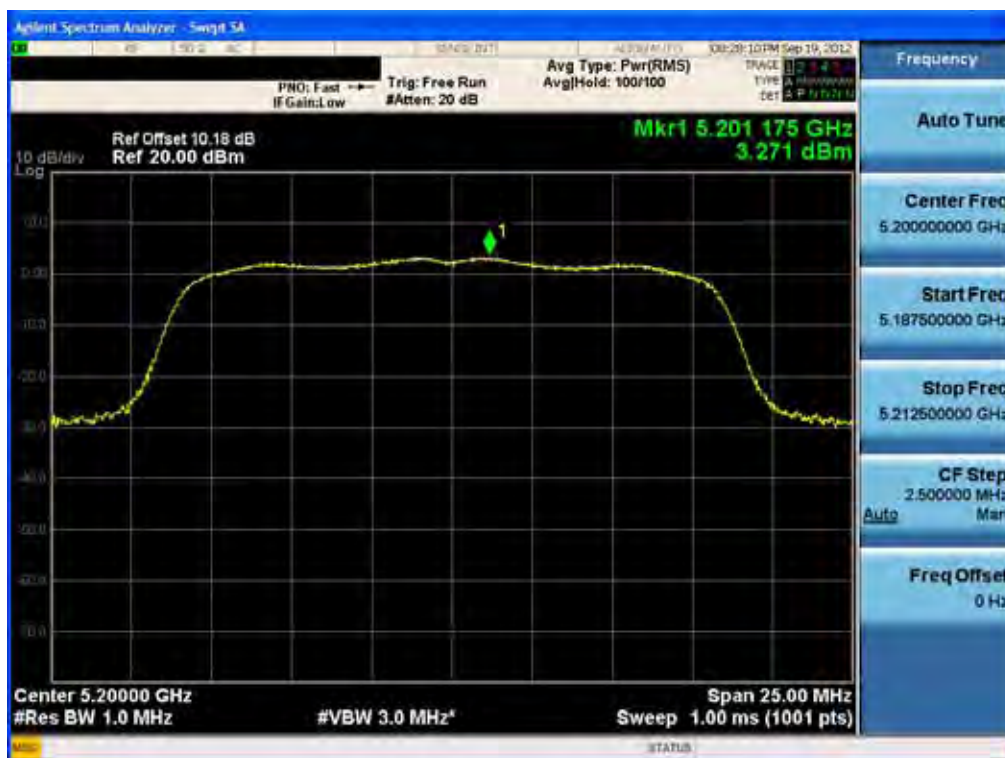

Power Spectral Density (802.11a-CH 48)



Power Spectral Density (802.11a-CH 52)



Power Spectral Density (802.11a-CH 60)



Power Spectral Density (802.11a-CH 64)



Power Spectral Density (802.11a-CH 100)



Power Spectral Density (802.11a-CH 120)



Power Spectral Density (802.11a-CH 140)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Power Spectral Density (802.11n-CH 36)




Power Spectral Density (802.11n-CH 40)



Power Spectral Density (802.11n-CH 48)



Power Spectral Density (802.11n-CH 52)

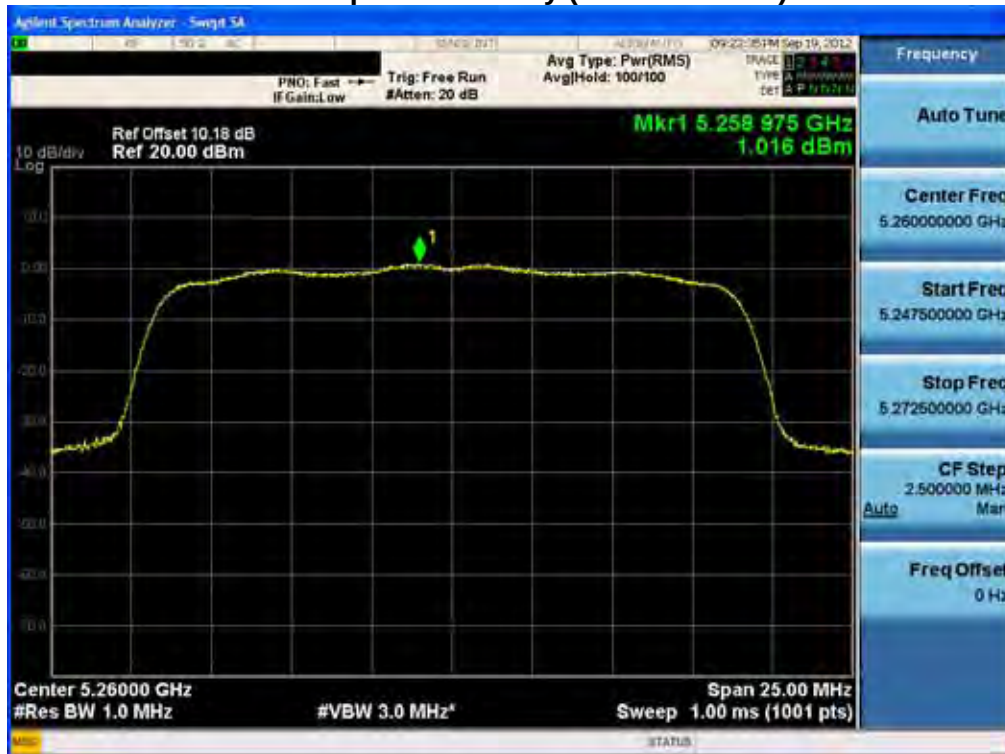

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Power Spectral Density (802.11n-CH 60)



Power Spectral Density (802.11n-CH 64)



Power Spectral Density (802.11n-CH 100)



Power Spectral Density (802.11n-CH 120)



Power Spectral Density (802.11n-CH 140)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Power Spectral Density (802.11n-CH 38)



Power Spectral Density (802.11n-CH 46)



Power Spectral Density (802.11n-CH 54)



Power Spectral Density (802.11n-CH 62)



Power Spectral Density (802.11n-CH 102)



Power Spectral Density (802.11n-CH 118)



Power Spectral Density (802.11n-CH 134)




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

8.4 PEAK EXCURSION RATIO

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. The largest permissible difference between the modulation envelope(measured using a peak hold function) and the maximum conducted output power 13 dB/MHz.

TEST CONFIGURATION

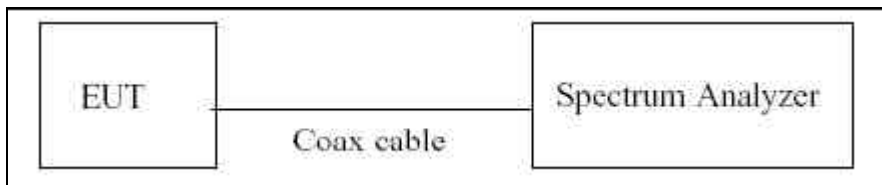

TEST PROCEDURE

We tested according to KDB 789033(issued 03/05/2012).

The spectrum analyzer is set to :

1. Span = Set the span to view the entire emission bandwidth.
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Sweep = Auto couple
5. Detector Mode = Peak
6. Trace Mode = Max hold
7. Use the procedure to measure the PPSD
8. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

Note :

1. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	10.26
	5190	10.22
	5200	10.18
	5230	10.19
	5240	10.19
UNII 2	5260	10.18
	5270	10.17
	5300	10.14
	5310	10.11
	5320	10.09
UNII 3	5500	10.20
	5510	10.20
	5590	10.25
	5600	10.27
	5670	10.36
	5700	10.40


(Actual value of loss for the attenuator and cable combination)

RESULT PLOTS

Peak Excursion Ratio (802.11a-CH 36)




Peak Excursion Ratio (802.11a-CH 40)

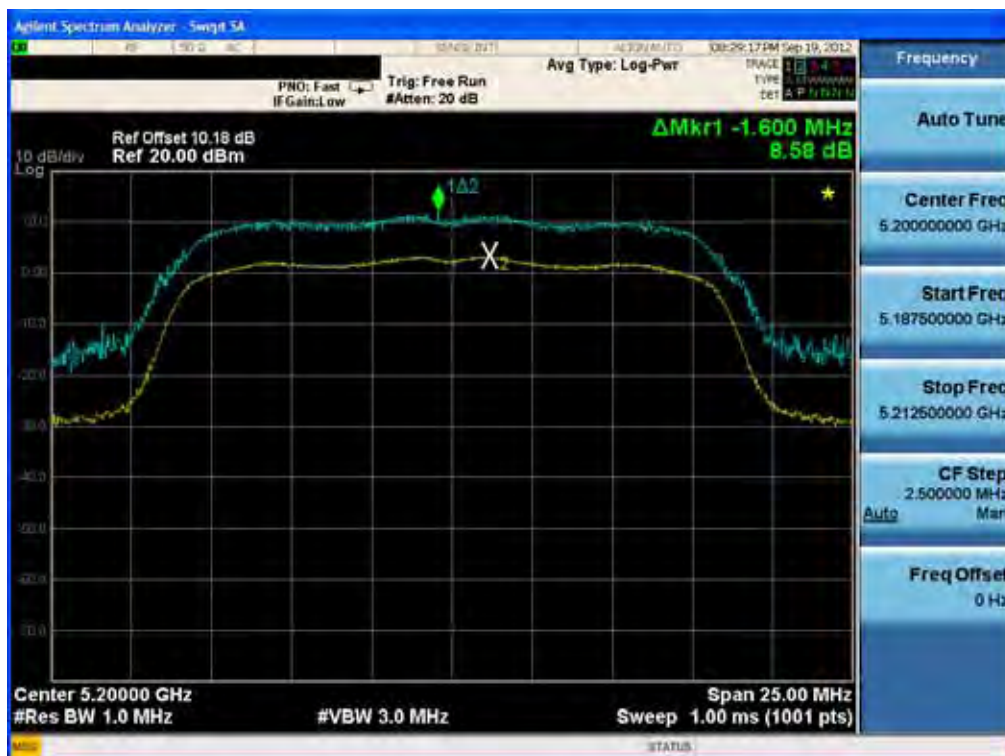

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Peak Excursion Ratio (802.11a-CH 48)

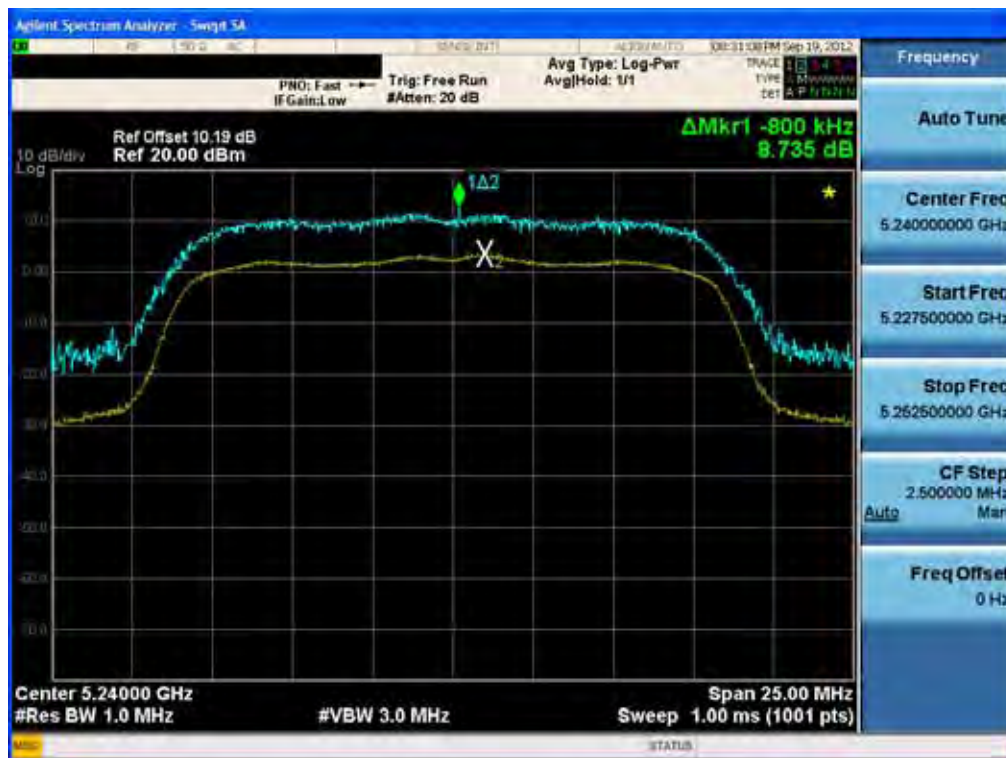

Peak Excursion Ratio (802.11a-CH 52)




Peak Excursion Ratio (802.11a-CH 60)




Peak Excursion Ratio (802.11a-CH 64)



Peak Excursion Ratio (802.11a-CH 100)

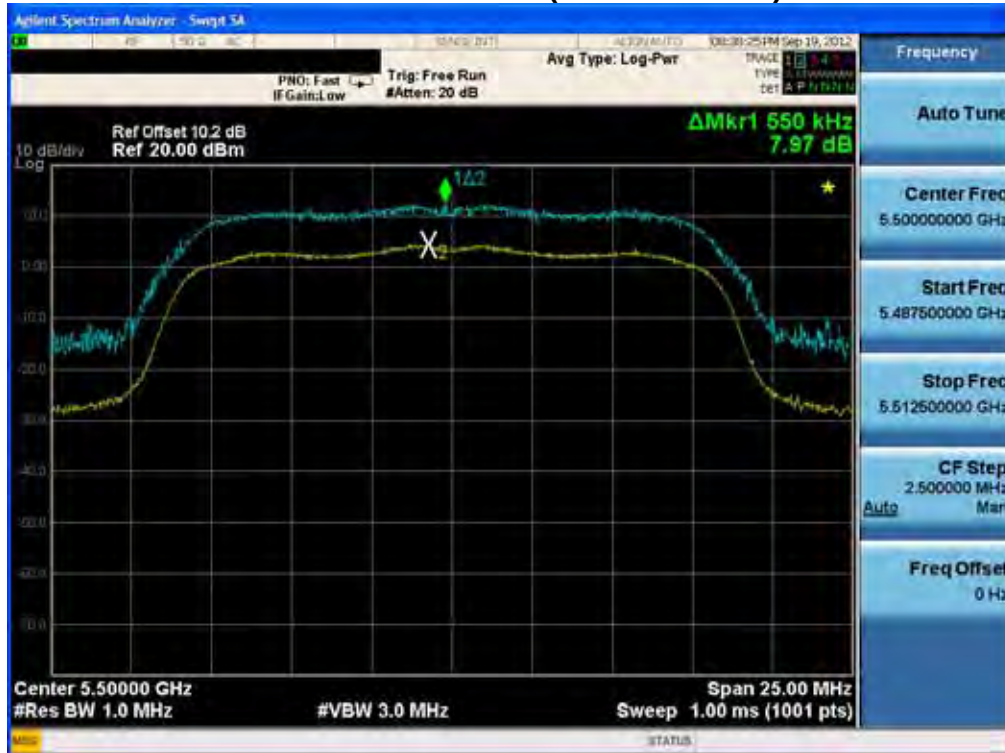

Peak Excursion Ratio (802.11a-CH 120)

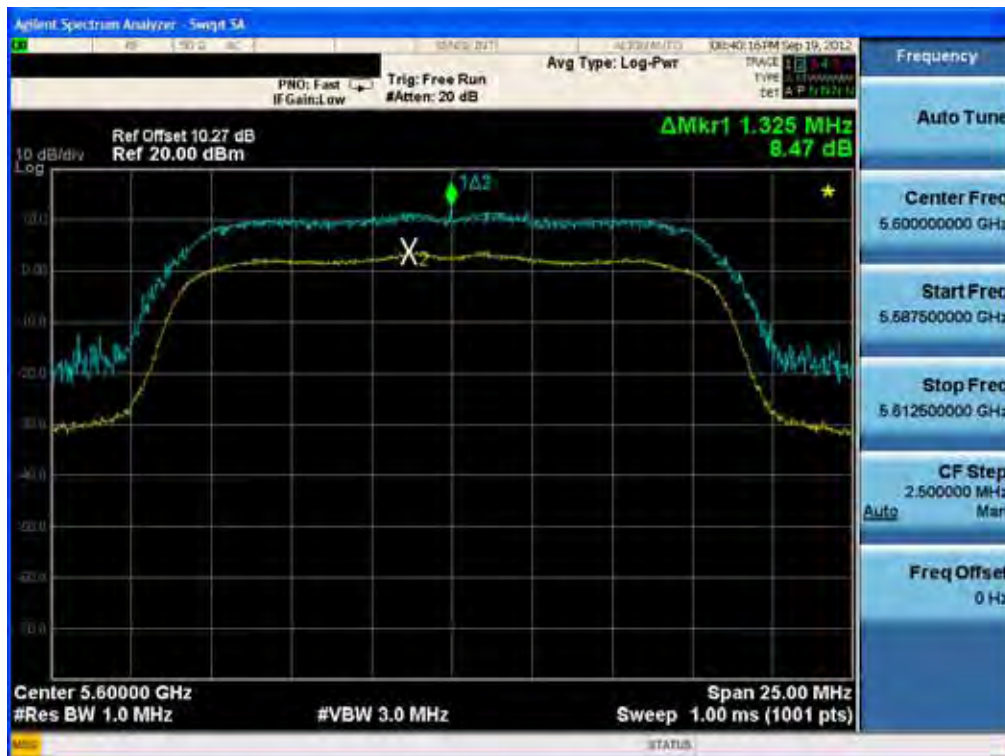

Peak Excursion Ratio (802.11a-CH 140)




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

20 MHz BW

Peak Excursion Ratio (802.11n-CH 36)



Peak Excursion Ratio (802.11n-CH 40)

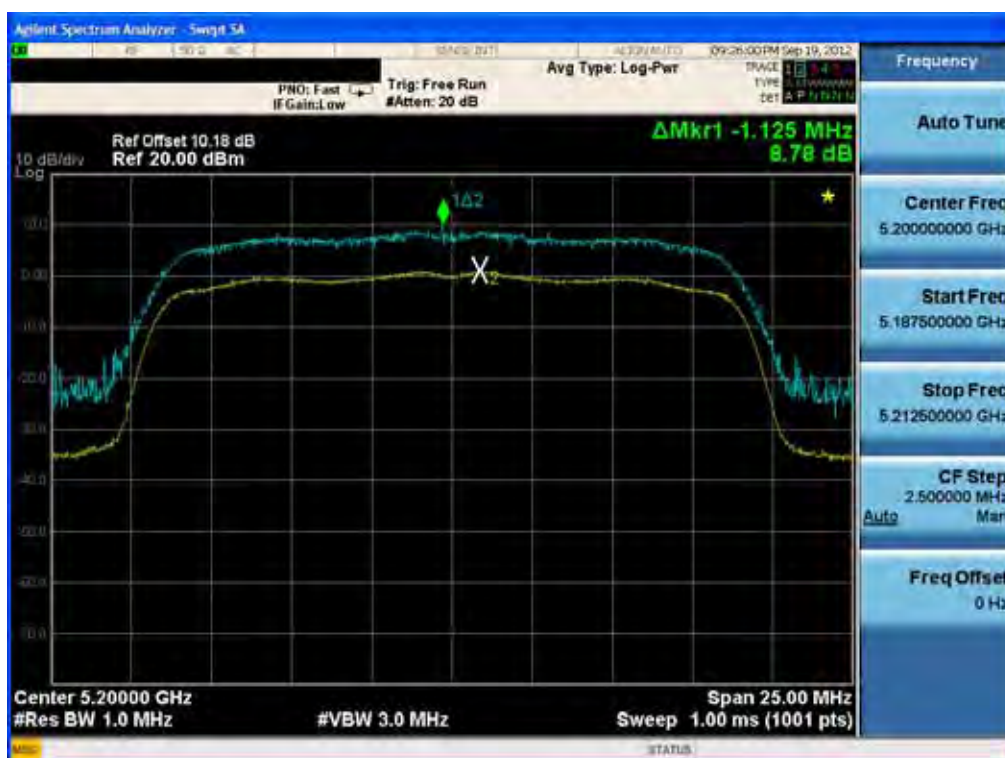

Peak Excursion Ratio (802.11n-CH 48)



Peak Excursion Ratio (802.11n-CH 52)



Peak Excursion Ratio (802.11n-CH 60)



Peak Excursion Ratio (802.11n-CH 64)



Peak Excursion Ratio (802.11n-CH 100)



Peak Excursion Ratio (802.11n-CH 120)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102


Peak Excursion Ratio (802.11n-CH 140)




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

40 MHz BW

Peak Excursion Ratio (802.11n-CH 38)

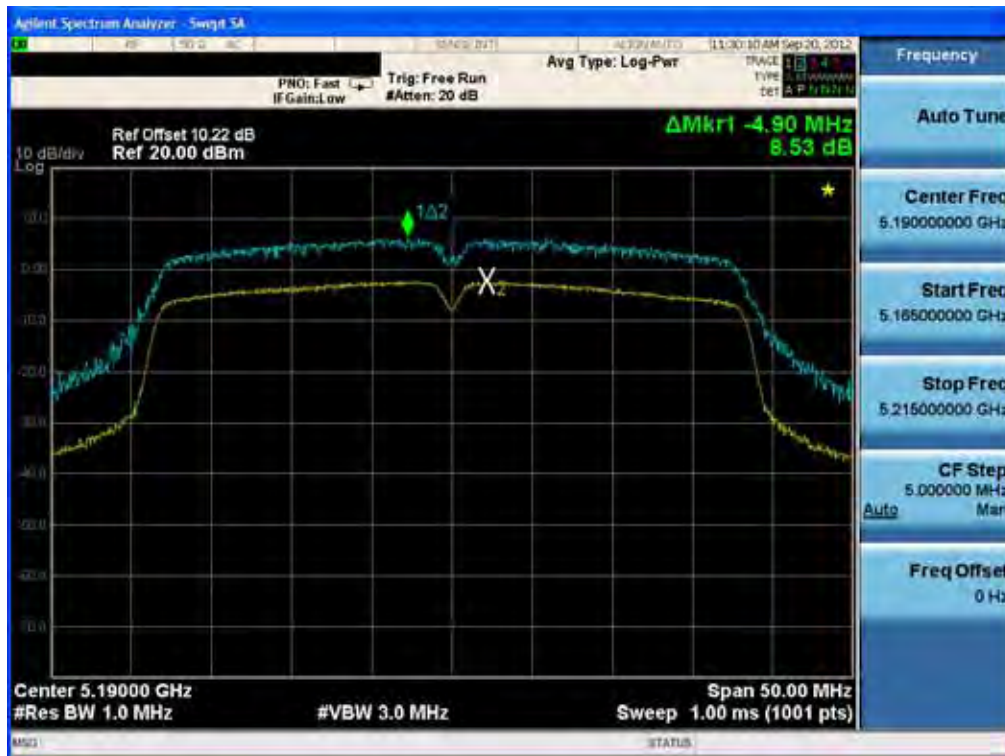

Peak Excursion Ratio (802.11n-CH 46)

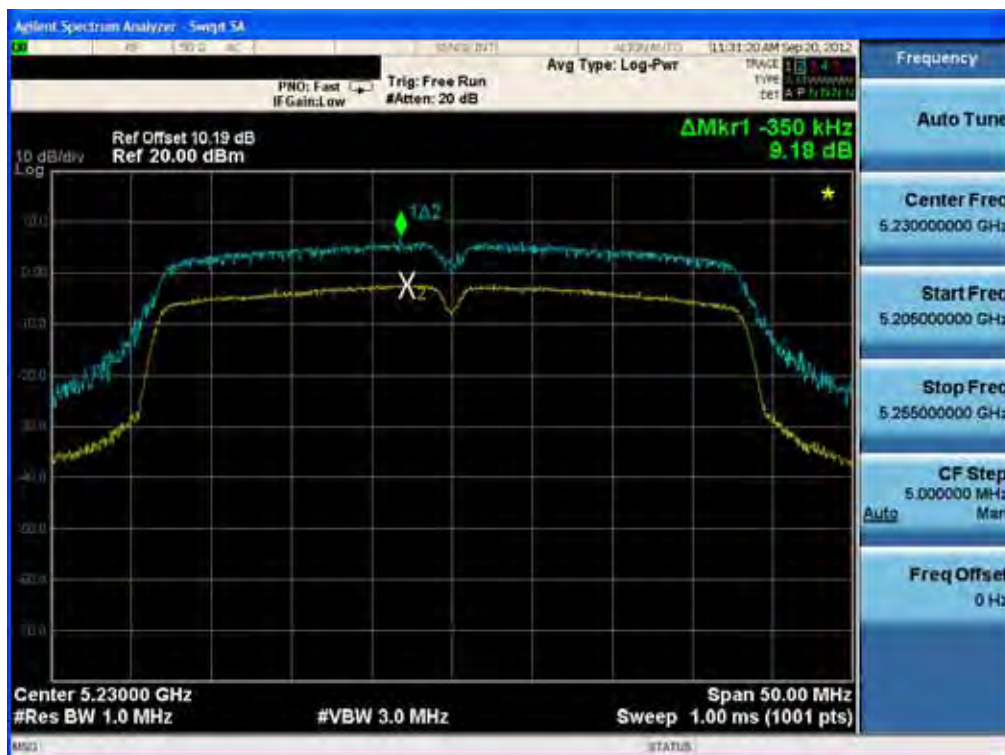

Peak Excursion Ratio (802.11n-CH 54)




Peak Excursion Ratio (802.11n-CH 62)




Peak Excursion Ratio (802.11n-CH 102)



Peak Excursion Ratio (802.11n-CH 118)

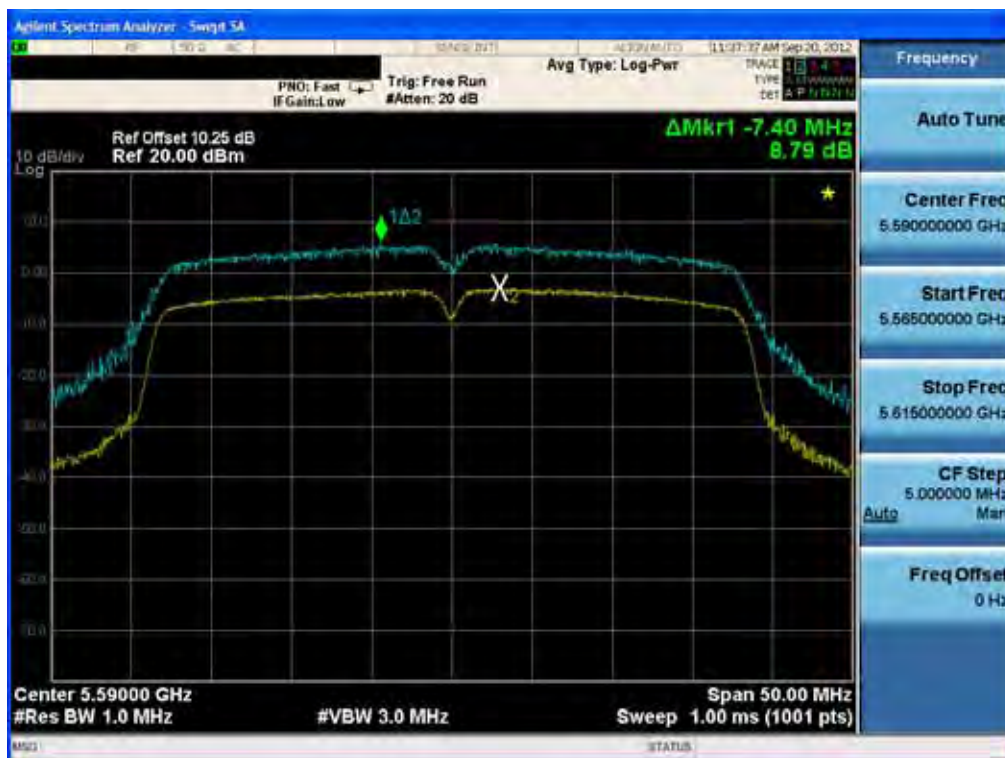

Peak Excursion Ratio (802.11n-CH 134)

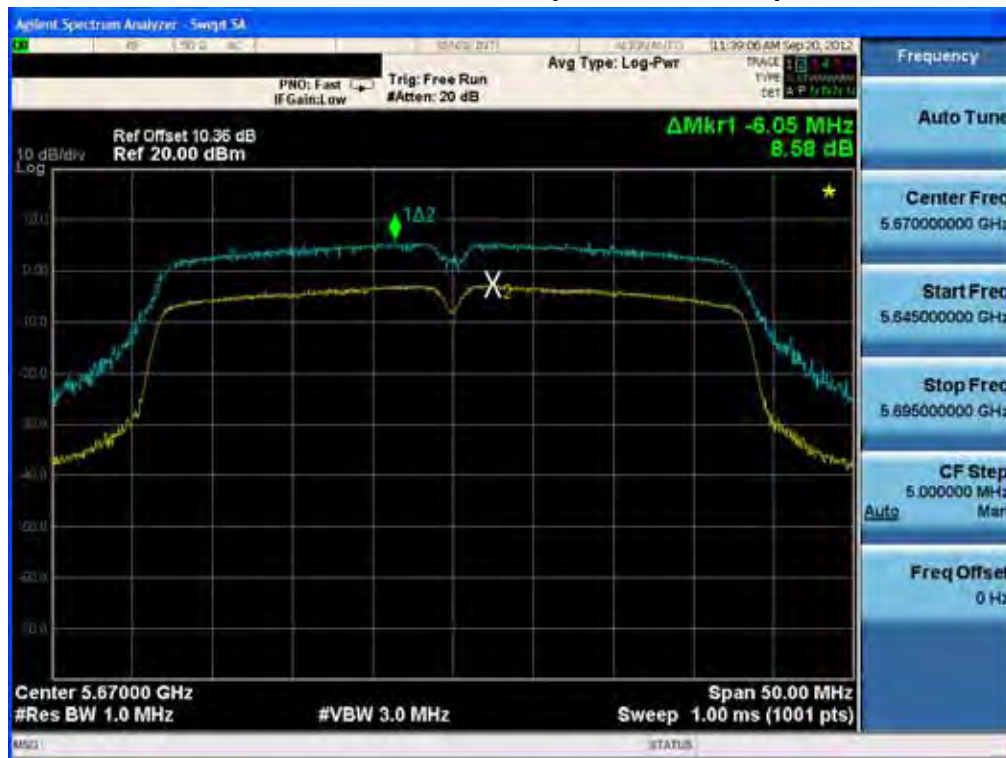

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

8.5 FREQUENCY STABILITY.

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 and 50 . The temperature was incremented by 10 intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

OPERATING FREQUENCY: 5,200,000,000 Hz
 CHANNEL: 40
 REFERENCE VOLTAGE: 3.7 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.7	+20(Ref)	5 199 948	-52.0
100%		-30	5 199 950	-50.2
100%		-20	5 200 054	53.9
100%		-10	5 199 953	-47.3
100%		0	5 200 060	60.3
100%		+10	5 199 964	-36.4
100%		+30	5 199 944	-56.3
100%		+40	5 200 058	57.7
100%		+50	5 200 057	57.4
115%	3.3	+20	5 199 944	-56.2
Batt. Endpoint	4.7	+20	5 200 055	55.0

OPERATING FREQUENCY: 5,300,000,000 Hz
 CHANNEL: 60
 REFERENCE VOLTAGE: 3.7 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.7	+20(Ref)	5 299 944	-56.0
100%		-30	5 299 956	-43.9
100%		-20	5 300 054	54.2
100%		-10	5 299 944	-56.1
100%		0	5 299 939	-61.3
100%		+10	5 300 061	61.0
100%		+30	5 299 956	-44.2
100%		+40	5 300 054	54.0
100%		+50	5 300 048	48.0
115%	3.3	+20	5 299 948	-52.3
Batt. Endpoint	4.7	+20	5 299 940	-60.1

OPERATING FREQUENCY: 5,600,000,000 Hz

CHANNEL: 120

REFERENCE VOLTAGE: 3.7 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.7	+20(Ref)	5 599 939	-61.0
100%		-30	5 600 056	56.0
100%		-20	5 600 057	56.7
100%		-10	5 599 952	-48.2
100%		0	5 600 059	58.7
100%		+10	5 599 959	-41.2
100%		+30	5 599 948	-51.6
100%		+40	5 600 056	56.0
100%		+50	5 599 958	-41.8
115%	3.3	+20	5 600 057	57.0
Batt. Endpoint	4.7	+20	5 599 945	-55.4

40 MHz BW

OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 3.7 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.7	+20(Ref)	5 189 946	-54.0
100%		-30	5 190 052	52.0
100%		-20	5 190 054	54.3
100%		-10	5 189 952	-48.0
100%		0	5 190 059	59.0
100%		+10	5 190 041	41.0
100%		+30	5 189 942	-58.0
100%		+40	5 189 941	-59.0
100%		+50	5 189 941	-59.2
115%	3.3	+20	5 190 057	57.0
Batt. Endpoint	4.7	+20	5 189 944	-56.0

OPERATING FREQUENCY: 5,270,000,000 Hz

CHANNEL: 54

REFERENCE VOLTAGE: 3.7 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.7	+20(Ref)	5 269 943	-57.0
100%		-30	5 270 044	44.2
100%		-20	5 269 944	-56.3
100%		-10	5 270 056	56.0
100%		0	5 270 062	62.0
100%		+10	5 270 062	62.4
100%		+30	5 270 047	47.0
100%		+40	5 269 943	-57.3
100%		+50	5 269 951	-49.0
115%	3.3	+20	5 269 947	-53.2
Batt. Endpoint	4.7	+20	5 269 937	-62.6

OPERATING FREQUENCY: 5,590,000,000 Hz

CHANNEL: 118

REFERENCE VOLTAGE: 3.7 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.7	+20(Ref)	5 589 939	-61.0
100%		-30	5 589 943	-57.0
100%		-20	5 590 058	57.6
100%		-10	5 589 951	-49.0
100%		0	5 589 942	-57.6
100%		+10	5 590 043	43.0
100%		+30	5 590 053	53.4
100%		+40	5 589 944	-55.6
100%		+50	5 589 958	-42.2
115%	3.3	+20	5 590 054	54.0
Batt. Endpoint	4.7	+20	5 589 941	-58.8

8.6 RADIATED MEASUREMENT.

8.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.407


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

§15.407, KDB 789033


All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBµV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBµV/m.

Test Configuration


Below 30 MHz

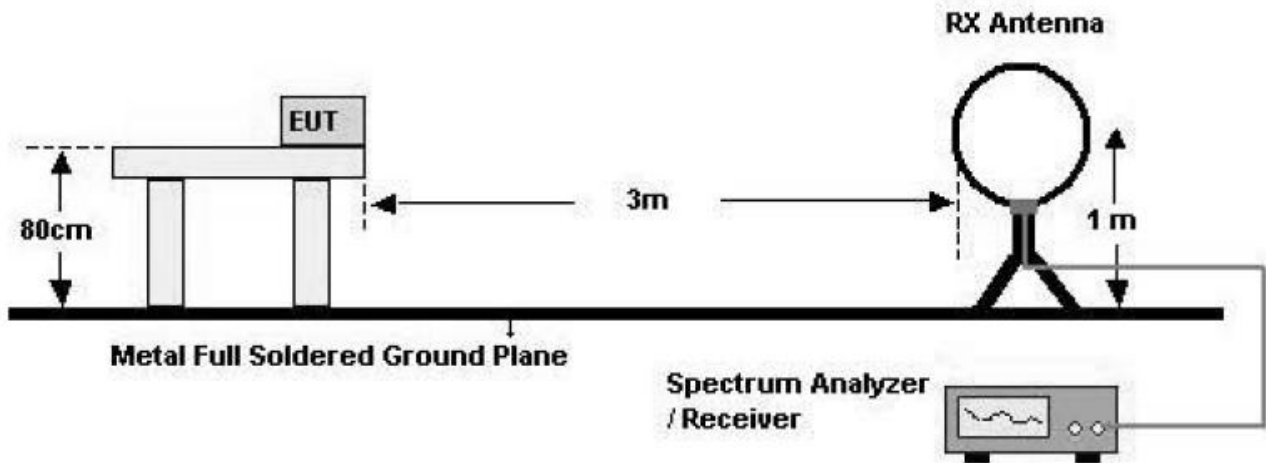

30 MHz - 1 GHz

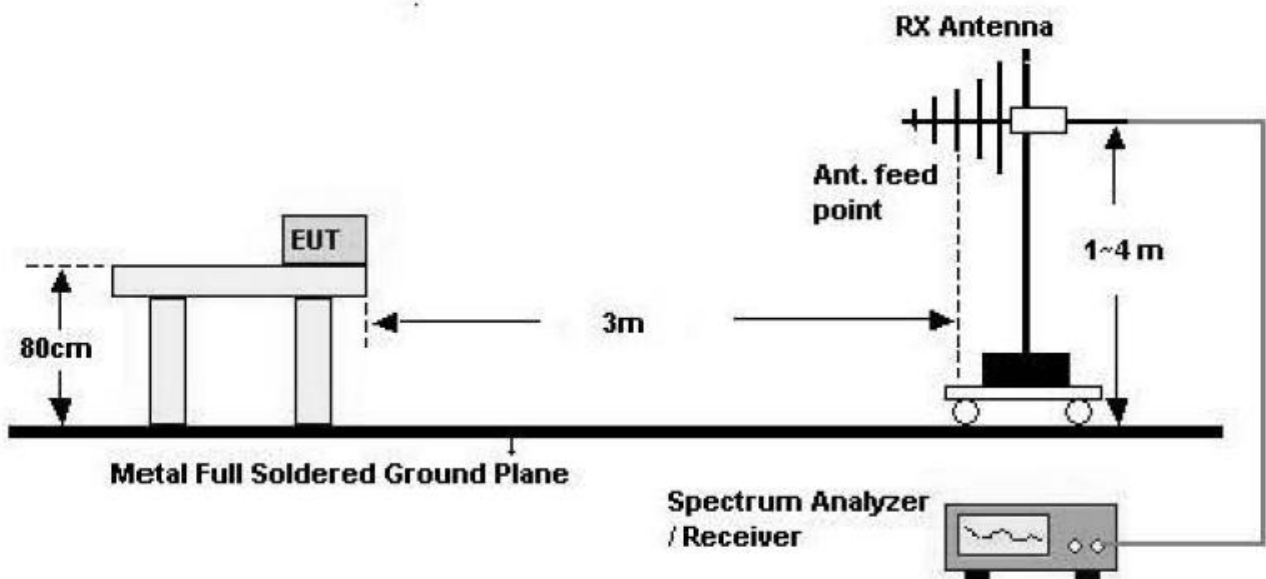

Above 1 GHz

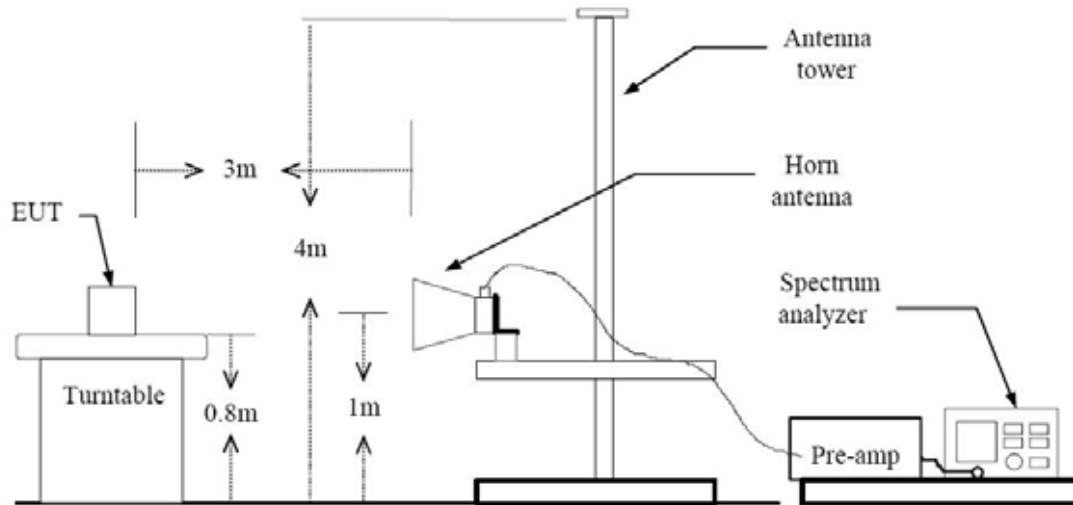

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Above 1 GHz

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10360	48.70	9.33	V	58.03	68.2	10.17	PK
10360	33.46	9.33	V	42.79	54.0	11.21	AV
15540	44.81	14.61	V	59.42	74.0	14.58	PK
15540	31.27	14.61	V	45.88	54.0	8.12	AV
10360	45.83	9.33	H	55.16	68.2	13.04	PK
10360	32.45	9.33	H	41.78	54.0	12.22	AV
15540	44.64	14.61	H	59.25	74.0	14.75	PK
15540	31.54	14.61	H	46.15	54.0	7.85	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10400	47.90	10.13	V	58.03	68.2	10.17	PK
10400	33.97	10.13	V	44.10	54.0	9.90	AV
15600	44.80	14.60	V	59.40	74.0	14.60	PK
15600	31.56	14.60	V	46.16	54.0	7.84	AV
10400	46.52	10.13	H	56.65	68.2	11.55	PK
10400	32.43	10.13	H	42.56	54.0	11.44	AV
15600	45.12	14.60	H	59.72	74.0	14.28	PK
15600	31.54	14.60	H	46.14	54.0	7.86	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10480	48.70	10.20	V	58.90	68.2	9.30	PK
10480	34.83	10.20	V	45.03	54.0	8.97	AV
15720	45.33	13.47	V	58.80	74.0	15.20	PK
15720	32.42	13.47	V	45.89	54.0	8.11	AV
10480	47.39	10.20	H	57.59	68.2	10.61	PK
10480	33.38	10.20	H	43.58	54.0	10.42	AV
15720	45.95	13.47	H	59.42	74.0	14.58	PK
15720	33.44	13.47	H	46.91	54.0	7.09	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (i.e.: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10380	42.81	9.70	V	52.51	68.2	15.69	PK
10380	27.81	9.70	V	37.51	54.0	16.49	AV
15570	44.54	14.62	V	59.16	74.0	14.84	PK
15570	30.89	14.62	V	45.51	54.0	8.49	AV
10380	39.52	9.70	H	49.22	68.2	18.98	PK
10380	26.56	9.70	H	36.26	54.0	17.74	AV
15570	44.49	14.62	H	59.11	74.0	14.89	PK
15570	30.83	14.62	H	45.45	54.0	8.55	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1209FR21	Date of Issue: September 26, 2012	EUT Type: 850/1900 GSM/GPRS/EDGE Phone with Bluetooth and WLAN	FCC ID: A3LGTN7102

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10460	41.73	10.26	V	51.99	68.2	16.21	PK
10460	28.13	10.26	V	38.39	54.0	15.61	AV
15690	45.66	14.33	V	59.99	74.0	14.01	PK
15690	32.00	14.33	V	46.33	54.0	7.67	AV
10460	41.77	10.26	H	52.03	68.2	16.17	PK
10460	27.33	10.26	H	37.59	54.0	16.41	AV
15690	45.72	14.33	H	60.05	74.0	13.95	PK
15690	31.99	14.33	H	46.32	54.0	7.68	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10520	49.25	10.38	V	59.63	68.2	8.57	PK
10520	35.09	10.38	V	45.47	54.0	8.53	AV
15780	45.84	14.38	V	60.22	74.0	13.78	PK
15780	32.78	14.38	V	47.16	54.0	6.84	AV
10520	48.39	10.38	H	58.77	68.2	9.43	PK
10520	33.70	10.38	H	44.08	54.0	9.92	AV
15780	45.21	14.38	H	59.59	74.0	14.41	PK
15780	33.15	14.38	H	47.53	54.0	6.47	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10600	48.23	10.39	V	58.62	68.2	9.58	PK
10600	34.09	10.39	V	44.48	54.0	9.52	AV
15900	44.41	14.00	V	58.41	74.0	15.59	PK
15900	31.00	14.00	V	45.00	54.0	9.00	AV
10600	45.67	10.39	H	56.06	68.2	12.14	PK
10600	31.46	10.39	H	41.85	54.0	12.15	AV
15900	45.97	14.00	H	59.97	74.0	14.03	PK
15900	32.35	14.00	H	46.35	54.0	7.65	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10640	49.25	10.50	V	59.75	74	14.25	PK
10640	34.90	10.50	V	45.40	54	8.60	AV
15960	45.78	14.27	V	60.05	74	13.95	PK
15960	31.85	14.27	V	46.12	54	7.88	AV
10640	46.78	10.50	H	57.28	74	16.72	PK
10640	33.30	10.50	H	43.80	54	10.20	AV
15960	47.64	14.27	H	61.91	74	12.09	PK
15960	33.87	14.27	H	48.14	54	5.86	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10540	43.97	10.55	V	54.52	68.2	13.68	PK
10540	29.15	10.55	V	39.70	54.0	14.30	AV
15810	45.22	14.26	V	59.48	74.0	14.52	PK
15810	31.54	14.26	V	45.80	54.0	8.20	AV
10540	43.55	10.55	H	54.10	68.2	14.10	PK
10540	29.02	10.55	H	39.57	54.0	14.43	AV
15810	45.32	14.26	H	59.58	74.0	14.42	PK
15810	31.58	14.26	H	45.84	54.0	8.16	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 2
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
10620	43.30	10.25	V	53.55	68.2	14.65	PK
10620	28.34	10.25	V	38.59	54.0	15.41	AV
15930	43.75	13.62	V	57.37	74.0	16.63	PK
15930	30.18	13.62	V	43.80	54.0	10.20	AV
10620	42.39	10.25	H	52.64	68.2	15.56	PK
10620	27.93	10.25	H	38.18	54.0	15.82	AV
15930	43.59	13.62	H	57.21	74.0	16.79	PK
15930	30.22	13.62	H	43.84	54.0	10.16	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11000	41.45	11.28	V	52.73	74.0	21.27	PK
11000	28.01	11.28	V	39.29	54.0	14.71	AV
16500	47.07	14.19	V	61.26	68.2	6.94	PK
16500	33.75	14.19	V	47.94	54.0	6.06	AV
11000	41.15	11.28	H	52.43	74.0	21.57	PK
11000	27.69	11.28	H	38.97	54.0	15.03	AV
16500	45.51	14.19	H	59.70	68.2	8.50	PK
16500	32.32	14.19	H	46.51	54.0	7.49	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5600 MHz
Channel No.	120 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11200	43.43	14.63	V	58.06	74.0	15.94	PK
11200	29.71	14.63	V	44.34	54.0	9.66	AV
16800	45.14	19.16	V	64.30	68.2	3.90	PK
16800	31.47	19.16	V	50.63	54.0	3.37	AV
11200	42.22	14.63	H	56.85	74.0	17.15	PK
11200	27.84	14.63	H	42.47	54.0	11.53	AV
16800	45.15	19.16	H	64.31	68.2	3.89	PK
16800	31.83	19.16	H	50.99	54.0	3.01	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5700 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11400	44.66	10.97	V	55.63	74.0	18.37	PK
11400	30.58	10.97	V	41.55	54.0	12.45	AV
17100	44.70	17.82	V	62.52	68.2	5.68	PK
17100	32.16	17.82	V	49.98	54.0	4.02	AV
11400	44.16	10.97	H	55.13	74.0	18.87	PK
11400	29.90	10.97	H	40.87	54.0	13.13	AV
17100	46.00	17.82	H	63.82	68.2	4.38	PK
17100	33.05	17.82	H	50.87	54.0	3.13	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done 802.11a, 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11020	39.61	11.28	V	50.89	74.0	23.11	PK
11020	26.02	11.28	V	37.30	54.0	16.70	AV
16530	44.92	8.83	V	53.75	68.2	14.45	PK
16530	31.25	8.83	V	40.08	54.0	13.92	AV
11020	38.28	11.28	H	49.56	74.0	24.44	PK
11020	25.27	11.28	H	36.55	54.0	17.45	AV
16530	44.65	8.83	H	53.48	68.2	14.72	PK
16530	31.27	8.83	H	40.10	54.0	13.90	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5590 MHz
Channel No.	118 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11180	39.20	11.12	V	50.32	74.0	23.68	PK
11180	25.54	11.12	V	36.66	54.0	17.34	AV
16770	44.59	16.52	V	61.11	68.2	7.09	PK
16770	31.51	16.52	V	48.03	54.0	5.97	AV
11180	38.36	11.12	H	49.48	74.0	24.52	PK
11180	24.63	11.12	H	35.75	54.0	18.25	AV
16770	44.96	16.52	H	61.48	68.2	6.72	PK
16770	31.56	16.52	H	48.08	54.0	5.92	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 3
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5670 MHz
Channel No.	134 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11340	38.98	10.86	V	49.84	74.0	24.16	PK
11340	25.96	10.86	V	36.82	54.0	17.18	AV
17010	44.07	18.15	V	62.22	68.2	5.98	PK
17010	30.87	18.15	V	49.02	54.0	4.98	AV
11340	37.76	10.86	H	48.62	74.0	25.38	PK
11340	25.01	10.86	H	35.87	54.0	18.13	AV
17010	44.49	18.15	H	62.64	68.2	5.56	PK
17010	30.97	18.15	H	49.12	54.0	4.88	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
6. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.6.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5150	62.02	3.63	H	65.65	74	8.35	PK
5150	42.15	3.63	H	45.78	54	8.22	AV
5150	64.10	3.63	V	67.73	74	6.27	PK
5150	43.99	3.63	V	47.62	54	6.38	AV

Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5350	60.72	4.45	H	65.17	74	8.83	PK
5350	39.66	4.45	H	44.11	54	9.89	AV
5350	63.57	4.45	V	68.02	74	5.98	PK
5350	41.41	4.45	V	45.86	54	8.14	AV

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5460	50.94	5.54	H	56.48	68.2	11.72	PK
5460	37.17	5.54	H	42.71	54.0	11.29	AV
5460	52.70	5.54	V	58.24	68.2	9.96	PK
5460	37.88	5.54	V	43.42	54.0	10.58	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
3. We have done 802.11a and 802.11n_20 MHz BW test. Worst case is 6 Mbps in 802.11a.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5150	66.52	-0.51	H	66.01	74	7.99	PK
5150	47.64	-0.51	H	47.13	54	6.87	AV
5150	69.45	-0.51	V	68.94	74	5.06	PK
5150	50.02	-0.51	V	49.51	54	4.49	AV

Band :	UNII 2
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5350	64.25	-0.19	H	64.06	74	9.94	PK
5350	43.86	-0.19	H	43.67	54	10.33	AV
5350	69.54	-0.19	V	69.35	74	4.65	PK
5350	46.98	-0.19	V	46.79	54	7.21	AV

Band :	UNII 3
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
5460	54.16	0.38	H	54.54	74	19.46	PK
5460	40.43	0.38	H	40.81	54	13.19	AV
5460	56.67	0.38	V	57.05	74	16.95	PK
5460	41.71	0.38	V	42.09	54	11.91	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. Spectrum setting:
 - a. Peak Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 3 MHz.
 - b. AV Setting 1 GHz – 40 GHz, RBW = 1 MHz, VBW = 10 Hz.
3. We have done all data rate in 802.11n_40 MHz BW mode test. Worst case of EUT is 13.5 Mbps in 802.11n_40 MHz BW.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for 6 Mbps, Ch.64 and 802.11a mode in UNII 2. Because 802.11a mode in UNII 2 is worst case.

RESULT PLOTS

Conducted Emissions (Line 1)

HCT

EMC


```

EUT: 07-N7102
Manufacturer: SAMSUNG
Operating Condition: WLAN MODE(UR1)
Test Site: SHIELD ROOM
Operator: JS LEE
Test Specification: FCC PART 15 B
Comment: 8

```

SCAN TABLE: "FCC PART 15 B(H)"

Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	MaxPeak	10.0 ms	9 kHz	None
		Average			
500.0 kHz	5.0 MHz	MaxPeak	10.0 ms	9 kHz	None
		Average			
5.0 MHz	30.0 MHz	MaxPeak	10.0 ms	9 kHz	None
		Average			

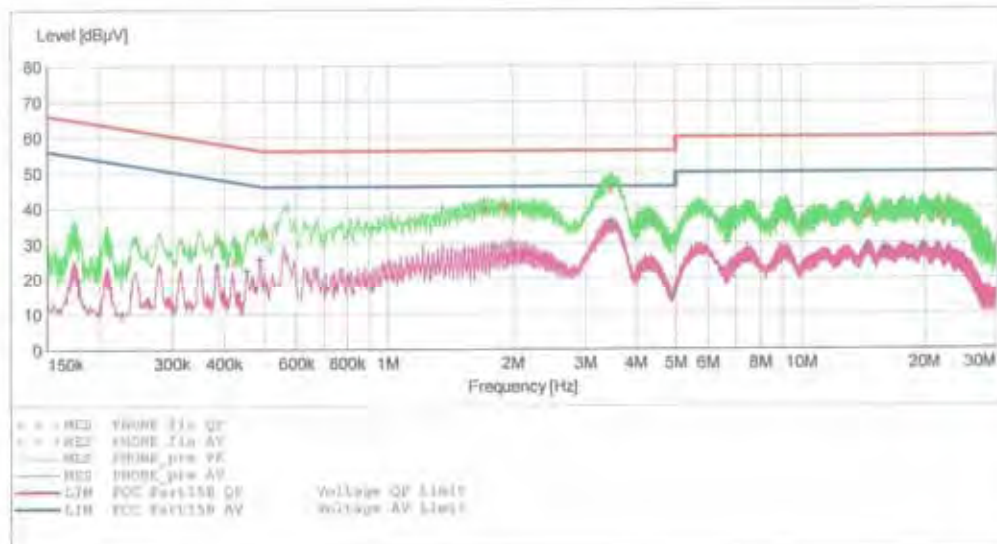

MEASUREMENT RESULT: "PHONE fin QP"

9/11/2012 11:09PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.385010	31.20	9.8	58	27.0	---	---
0.423010	25.10	9.8	57	32.3	---	---
0.500000	33.10	9.8	56	22.9	---	---
1.700000	39.50	9.9	56	16.5	---	---
1.912000	40.20	9.9	56	15.8	---	---
3.472000	45.40	10.1	56	10.6	---	---
14.368000	38.00	10.9	60	22.0	---	---
14.420000	37.90	10.9	60	22.1	---	---
21.732000	37.70	11.8	60	22.3	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

9/11/2012 11:09PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	FE
0.384010	23.50	9.8	46	24.7	---	---
0.452010	22.30	9.6	47	24.6	---	---
0.487010	25.50	9.8	46	20.7	---	---
1.804000	28.80	9.9	46	17.2	---	---
1.980000	29.20	9.9	46	16.8	---	---
3.480000	35.60	10.1	46	10.4	---	---
14.428000	28.80	10.9	50	21.2	---	---
15.920000	27.50	11.1	50	22.5	---	---
19.700000	28.50	11.7	50	21.5	---	---

Conducted Emissions (Line 2)


HCT

EMC

EUT: GT-N7102
 Manufacturer: SAMSUNG
 Operating Condition: WLAN MODE (UNII)
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART 15 CLASS B
 Comment: N

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:			FCC PART 15 CLASS B			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

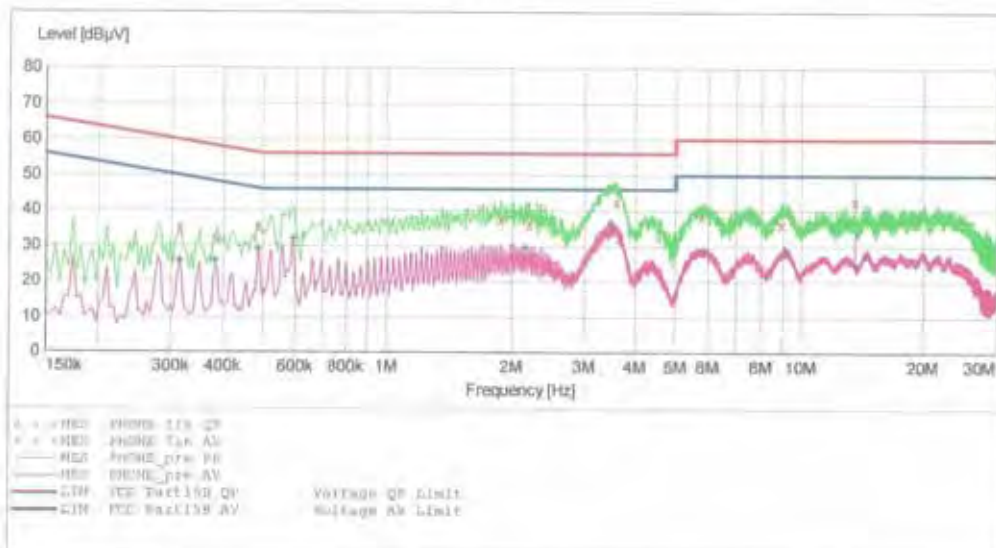

MEASUREMENT RESULT: "PHONE_fin QP"

9/11/2012 11:04PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.314010	34.70	9.9	60	25.2	---	---
0.386010	31.80	10.0	58	26.4	---	---
0.486010	35.50	10.0	56	20.7	---	---
1.876000	37.80	10.1	56	18.2	---	---
2.204000	36.30	10.1	56	19.7	---	---
3.596000	42.60	10.3	56	13.4	---	---
5.788000	38.40	10.4	60	21.6	---	---
8.968000	36.30	10.6	60	23.7	---	---
13.560000	42.80	11.1	60	17.2	---	---

MEASUREMENT RESULT: "PHONE_Fin AV"

9/11/2012 11:04PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	FE
0.324010	25.90	9.9	50	24.0	---	---
0.382010	26.00	10.0	48	22.2	---	---
0.486010	28.90	10.0	46	17.3	---	---
0.592000	32.00	10.0	46	14.0	---	---
2.152000	29.50	10.1	46	16.5	---	---
3.508000	36.30	10.3	46	9.7	---	---
5.892000	29.00	10.4	50	21.0	---	---
9.160000	29.00	10.6	50	21.0	---	---
13.560000	24.80	11.1	50	25.2	---	---

9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	Annual	02/09/2013	100073
Schwarzbeck	VULB 9168/ TRILOG Antenna	Biennial	02/09/2013	200
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	05/03/2013	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	05/02/2013	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	07/31/2013	MY51110020
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/11/2013	10094
MITEQ	AMF-6B-180265-35-10P / POWER AMP	Annual	04/16/2013	667624
CERNEX	CBL26405040 / POWER AMP	Annual	04/16/2013	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	10/17/2013	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/26/2012	BBHA9170342
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/09/2013	839117/011
Agilent	E4416A /Power Meter	Annual	11/07/2012	GB41291412
Agilent	E9327A /POWER SENSOR	Annual	05/02/2013	MY4442009
Wainwright Instrument	WHF3.3/18G-10EF / High Pass Filter	Annual	05/02/2013	1
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	Annual	05/02/2013	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	Annual	05/02/2013	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	05/02/2013	1
Hewlett Packard	11636B/Power Divider	Annual	11/07/2012	11377
Hewlett Packard	11667B / Power Splitter	Annual	06/05/2013	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	11/07/2012	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/07/2012	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	11/14/2012	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	05/02/2013	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/11/2014	9009-2536
Agilent	8493C / Attenuator(10 dB)	Annual	07/30/2013	76649
WEINSCHEL	2-3 / Attenuator(3 dB)	Annual	11/07/2013	BR0617
CERNEX	CBLU1183540 / POWER AMP	Annual	07/27/2013	21691