



EMI TEST REPORT

Test Report No. : 32FE0253-HO-D

Applicant : SAMSUNG ELECTRONICS CO., LTD.
Type of Equipment : Tablet with 802.11bgn, BT3.0+EDR
Model No. : GT-P5110
Test regulation : FCC Part 15 Subpart B: 2012 Class B
FCC ID : A3LGTP5110
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: February 16 and 17, 2012

Representative test engineer:

T. Shimada

Takumi Shimada
Engineer of WiSE Japan,
UL Verification Service

Approved by:

T. Hatakedo

Takahiro Hatakedo
Leader of WiSE Japan,
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing	7
SECTION 5: Conducted Emission	9
SECTION 6: Radiated Emission	10
APPENDIX 1: Data of EMI test	11
Conducted Emission	11
Radiated Emission	13
APPENDIX 2: Test instruments	17
APPENDIX 3: Photographs of test setup.....	18
Conducted Emission	18
Radiated Emission	20
Worst Case Position (Horizontal: X-axis/ Vertical:X-axis)	22

SECTION 1: Customer information

Company Name : SAMSUNG ELECTRONICS CO., LTD.
Address : 416, MAETAN 3-DONG, YEONGTONG-GU SUWON-CITY,
GYEONGGI-DO 443-742, SOUTH KOREA

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Tablet with 802.11bgn, BT3.0+EDR
Model No. : GT-P5110
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC5.0V
Receipt Date of Sample : February 13, 2012
Modification of EUT : No Modification by the test lab

2.2 Product Description

Maximum frequency generated or used by the EUT: 26MHz (oscillator), 1GHz (processor)

Radio Specification

Bluetooth

Equipment Type	Transceiver
Frequency of Operation	2402-2480MHz
Type of Modulation	FHSS
Bandwidth & Channel spacing	1MHz & 1MHz
Antenna Type	PIFA
Antenna Gain	-0.31 dBi (MAX)

WLAN (IEEE802.11b/g/n-20)

Equipment Type	Transceiver
Frequency of Operation	2412-2462MHz
Type of Modulation	DSSS, OFDM
Bandwidth & Channel spacing	20MHz & 5MHz
Antenna Type	PIFA
Antenna Gain	-0.31 dBi (MAX)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test Specification : FCC Part 15 Subpart B: 2012, final revised on February 1, 2012

Title : FCC 47CFR Part15 Radio Frequency Device
Subpart B Unintentional Radiators

3.2 Procedures and results

Item	Test Procedure	Limits	Deviation	Worst margin	Result
Conducted emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Class B	N/A	[QP] 13.1dB 0.19160MHz, L [AV] 17.5dB 7.90273MHz, L	Complied
Radiated emission	ANSI C63.4: 2003 8. Radiated emission measurements	Class B	N/A	5.5dB 30.000MHz, QP Vertical	Complied
*Note: UL Japan, Inc's EMI Work Procedure 13-EM-W0420.					

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Conducted emission (+dB)
	150kHz-30MHz
No.1	3.5dB
No.2	3.6dB
No.3	3.6dB
No.4	3.6dB

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	4.2dB	5.0dB	5.1dB	4.7dB	5.7dB	4.4dB	4.3dB
No.2	4.1dB	5.2dB	5.1dB	4.8dB	5.6dB	4.3dB	4.2dB
No.3	4.5dB	5.0dB	5.2dB	4.8dB	5.6dB	4.5dB	4.2dB
No.4	4.7dB	5.2dB	5.2dB	4.8dB	5.6dB	5.1dB	4.2dB

*3m/1m/0.5m = Measurement distance

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Data of EMI, Test instruments, and Test set up

Refer to APPENDIX.


SECTION 4: Operation of E.U.T. during testing

4.1 Operating modes


Mode	Remarks
Charge mode	-
USB mode	-

4.2 Configuration and peripherals

Charge mode



USB mode

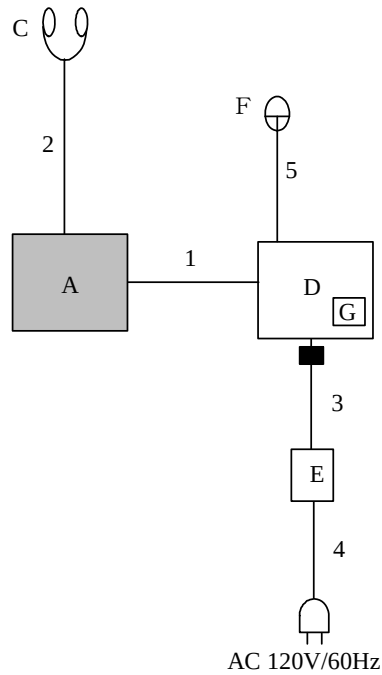

■ : Ferrite Core (Standard Attachment)

*Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Tablet with 802.11bgn, BT3.0+EDR	GT-P5110	R32C200S12B	SAMSUNG	EUT
B	AC Adaptor	ETA-P11X	-	SAMSUNG	EUT
C	Ear phone	-	-	SAMSUNG	-
D	Laptop PC	T61	L3R2056	Lenovo	-
E	AC Adaptor	92P1160	11S92P1160Z1ZBGH7B99A8	Lenovo	-
F	Mouse	M-UB48	LZE02601001	Logitech	-
G	PC Card	PCFDC IV-ADP	CT41098540TD	IO DATA	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Cable	1.0	Shielded	Shielded	-
2	Ear phone Cable	1.2	Unshielded	Unshielded	-
3	DC Cable	1.8	Unshielded	Unshielded	-
4	AC Cable	0.9	Unshielded	Unshielded	-
5	Mouse Cable	0.75	Shielded	Shielded	-
6	AC Cable	0.9	Unshielded	Unshielded	-

SECTION 5: Conducted Emission

5.1 Operating environment

Test place : No.4 semi anechoic chamber.
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT and its peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from the LISN/AMN. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/AMN to the input power source. All unused 50 ohm connectors of the LISN/AMN were resistivity terminated in 50 ohm when not connected to the measuring equipment. Photographs of the set up are shown in Appendix 3.

Frequency range : 0.15 MHz-30MHz
EUT position : Table top
EUT operation mode : See Clause 4.1

5.3 Test procedure

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT within a semi anechoic chamber. The EUT was connected to a Line Impedance Stabilization Network (LISN)/ Artificial Mains network (AMN). An overview sweep with peak detection has been performed. The measurements have been performed with a quasi-peak detector and if required, with an average detector.

The conducted emission measurements were made with the following detector function of the test receiver.

Detector Type : Quasi-Peak and Average
IF Bandwidth : 9 kHz

5.4 Test result

Summary of the test results: Pass

Date: February 17, 2012

Test engineer: Takumi Shimada

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Radiated Emission

6.1 Operating environment

Test place : No.4 semi anechoic chamber
Temperature : See data
Humidity : See data

6.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The EUT was set on the edge of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 3.

6.3 Test conditions

Frequency range : 30MHz-300MHz (Biconical antenna) / 300MHz-1000MHz (Logperiodic antenna)
1000MHz -10000MHz (Horn antenna)
Test distance : 3m
EUT position : Table top
EUT operation mode : See Clause 4.1

6.4 Test procedure

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The radiated emission measurements were made with the following detector function of the test receiver and the Spectrum analyzer.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
IF Bandwidth	QP: BW 120kHz	PK: RBW:1MHz/VBW: 3MHz AV *1): RBW:1MHz/VBW:10Hz

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

- The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at representative X-axis since no difference was found among each position.

6.5 Test result

Summary of the test results: Pass

Date: February 16 and 17, 2012

Test engineer: Takumi Shimada

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

APPENDIX 1: Data of EMI test

Conducted Emission Charge mode

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.4 Semi Anechoic Chamber
Date : 2012/02/17

Report No. : 32FE0253-HO

Temp./Humi. : 23 deg. C / 32% RH
Engineer : Takumi Shimada

Mode / Remarks : Charge mode

LIMIT : FCC15.107(a) QP ClassB
FCC15.107(a) AV ClassB

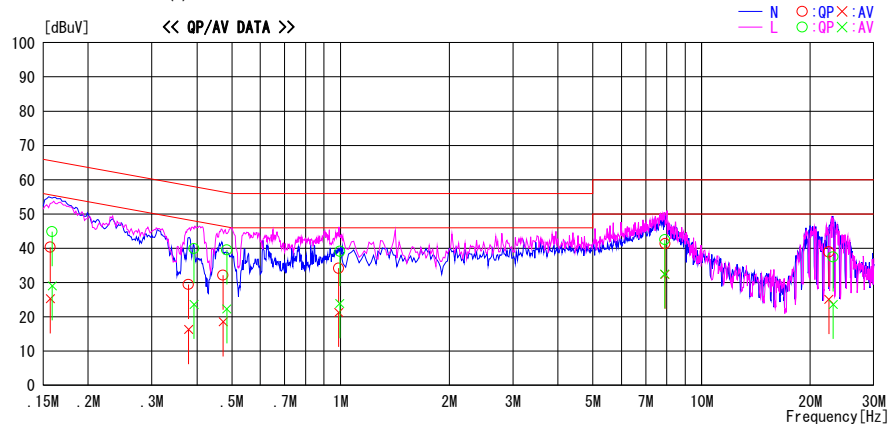

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15720	27.0	12.0	13.3	40.3	25.3	65.6	55.6	25.3	30.3	N	
0.37888	16.1	3.0	13.3	29.4	16.3	58.3	48.3	28.9	32.0	N	
0.47288	18.8	5.2	13.3	32.1	18.5	56.5	46.5	24.4	28.0	N	
0.98760	20.9	8.0	13.3	34.2	21.3	56.0	46.0	21.8	24.7	N	
7.92310	27.3	18.4	14.0	41.3	32.4	60.0	50.0	18.7	17.6	N	
22.50231	24.1	10.3	14.8	38.9	25.1	60.0	50.0	21.1	24.9	N	
0.15896	31.6	15.8	13.3	44.9	29.1	65.5	55.5	20.6	26.4	L	
0.39258	26.6	10.3	13.3	39.9	23.6	58.0	48.0	18.1	24.4	L	
0.48370	26.2	9.0	13.3	39.5	22.3	56.3	46.3	16.8	24.0	L	
0.99582	25.8	10.6	13.3	39.1	23.9	56.0	46.0	16.9	22.1	L	
7.90273	28.5	18.5	14.0	42.5	32.5	60.0	50.0	17.5	17.5	L	
23.13131	22.7	8.8	14.8	37.5	23.6	60.0	50.0	22.5	26.4	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Conducted Emission USB Mode

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.4 Semi Anechoic Chamber
Date : 2012/02/17

Report No. : 32FE0253-H0

Temp./Humi. : 23 deg. C / 32% RH
Engineer : Takumi Shimada

Mode / Remarks : USB mode

LIMIT : FCC15.107(a) QP ClassB
FCC15.107(a) AV ClassB

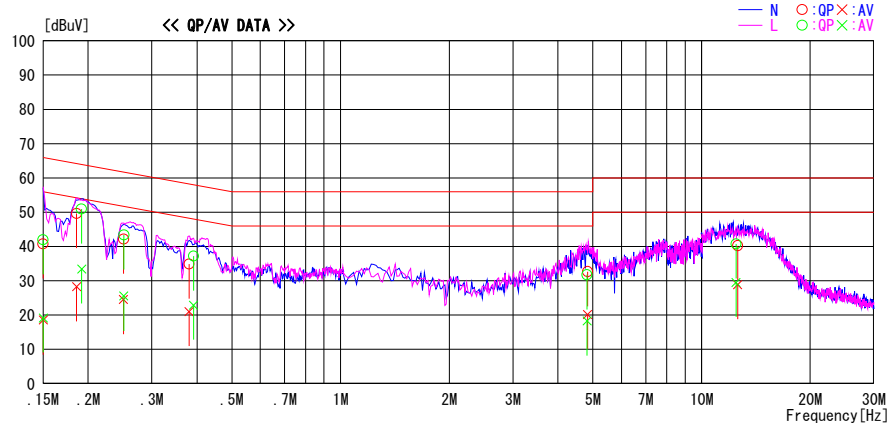

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15000	27.4	5.2	13.3	40.7	18.5	66.0	56.0	25.3	37.5	N	
0.18580	36.3	14.9	13.3	49.6	28.2	64.2	54.2	14.6	26.0	N	
0.25076	28.8	11.2	13.3	42.1	24.5	61.7	51.7	19.6	27.2	N	
0.38014	21.6	7.7	13.3	34.9	21.0	58.3	48.3	23.4	27.3	N	
4.83469	18.9	6.5	13.7	32.6	20.2	56.0	46.0	23.4	25.8	N	
12.59760	25.9	14.6	14.3	40.2	28.9	60.0	50.0	19.8	21.1	N	
0.15000	28.6	5.9	13.3	41.9	19.2	66.0	56.0	24.1	36.8	L	
0.19160	37.6	20.1	13.3	50.9	33.4	64.0	54.0	13.1	20.6	L	
0.25128	30.0	12.2	13.3	43.3	25.5	61.7	51.7	18.4	26.2	L	
0.39134	23.9	9.6	13.3	37.2	22.9	58.0	48.0	20.8	25.1	L	
4.81736	18.0	4.5	13.7	31.7	18.2	56.0	46.0	24.3	27.8	L	
12.45500	26.4	15.2	14.3	40.7	29.5	60.0	50.0	19.3	20.5	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission Charge mode

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.4 Semi Anechoic Chamber
Date : 2012/02/17

Report No. : 32FE0253-H0

Temp./Humi. : 23 deg. C / 32% RH
Engineer : Takumi Shimada

Mode / Remarks : Charge mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
All other spurious emissions were less than 20dB for the limit.

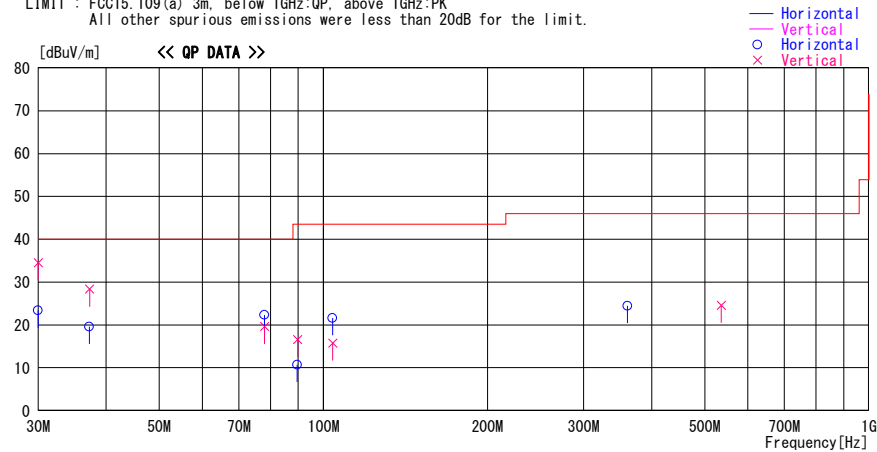

Frequency	Reading	DET	Antenna Factor	Loss& Gain	Level	Angle	Height	Polar.	Limit	Margin	Comment
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
30.000	29.4	QP	18.9	-24.9	23.4	295	268	Hori.	40.0	16.6	
30.000	40.5	QP	18.9	-24.9	34.5	31	100	Vert.	40.0	5.5	
37.260	37.4	QP	15.8	-24.9	28.3	355	100	Vert.	40.0	11.7	
37.226	28.7	QP	15.8	-24.9	19.6	288	324	Hori.	40.0	20.4	
78.006	40.0	QP	6.5	-24.2	22.3	62	223	Hori.	40.0	17.7	
78.013	37.3	QP	6.5	-24.2	19.6	137	100	Vert.	40.0	20.4	
89.772	32.4	QP	8.3	-24.2	16.5	181	100	Vert.	43.5	27.0	
89.550	26.7	QP	8.2	-24.2	10.7	68	239	Hori.	43.5	32.8	
104.004	34.8	QP	10.8	-24.0	21.6	273	314	Hori.	43.5	21.9	
104.010	28.9	QP	10.8	-24.0	15.7	4	100	Vert.	43.5	27.8	
360.680	29.2	QP	17.0	-21.8	24.4	0	100	Hori.	46.0	21.6	
535.985	25.6	QP	19.6	-20.7	24.5	348	100	Vert.	46.0	21.5	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission USB mode

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2012/02/17

Report No. : 32FE0253-H0

Temp./Humi. : 23 deg.C / 32% RH
Engineer : Takumi Shimada

Mode / Remarks : USB mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
All other spurious emissions were less than 20dB for the limit.

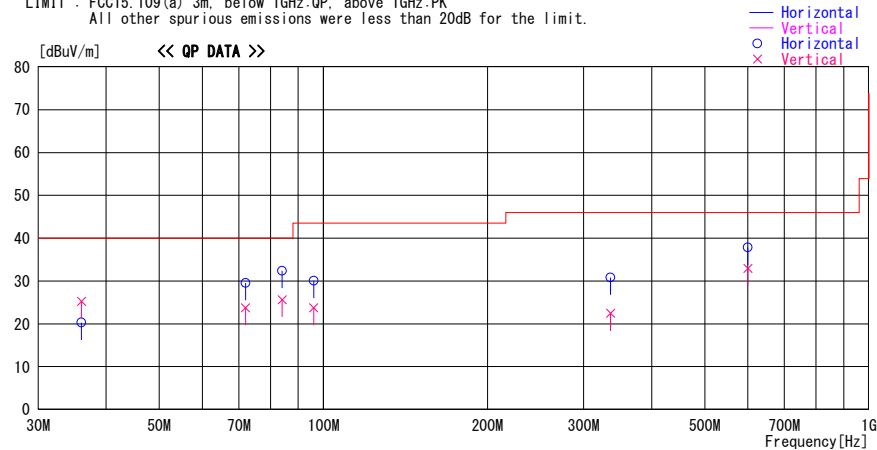

Frequency	Reading	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]				
36.020	29.0	QP	16.2	-24.9	20.3	276	238	Hori.	40.0	19.7	
36.024	34.0	QP	16.2	-24.9	25.3	304	100	Vert.	40.0	14.7	
72.013	47.3	QP	6.6	-24.4	29.5	242	245	Hori.	40.0	10.5	
72.017	41.5	QP	6.6	-24.4	23.7	346	243	Vert.	40.0	16.3	
84.040	42.5	QP	7.2	-24.1	25.6	282	137	Vert.	40.0	14.4	
84.044	49.2	QP	7.2	-24.1	32.3	263	206	Hori.	40.0	7.7	
96.048	38.3	QP	9.5	-24.1	23.7	252	100	Vert.	43.5	19.8	
96.054	44.7	QP	9.5	-24.1	30.1	256	173	Hori.	43.5	13.4	
335.999	36.0	QP	16.7	-21.9	30.8	130	100	Hori.	46.0	15.2	
336.010	27.6	QP	16.7	-21.9	22.4	202	100	Vert.	46.0	23.6	
600.000	37.7	QP	20.6	-20.5	37.8	202	100	Hori.	46.0	8.2	
600.006	32.8	QP	20.6	-20.5	32.9	165	123	Vert.	46.0	13.1	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission Charge mode

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2012/02/16

Report No. : 32FE0253-H0

Temp./Humi. : 23 deg.C / 32% RH
Engineer : Takumi Shimada

Mode / Remarks : Charge mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

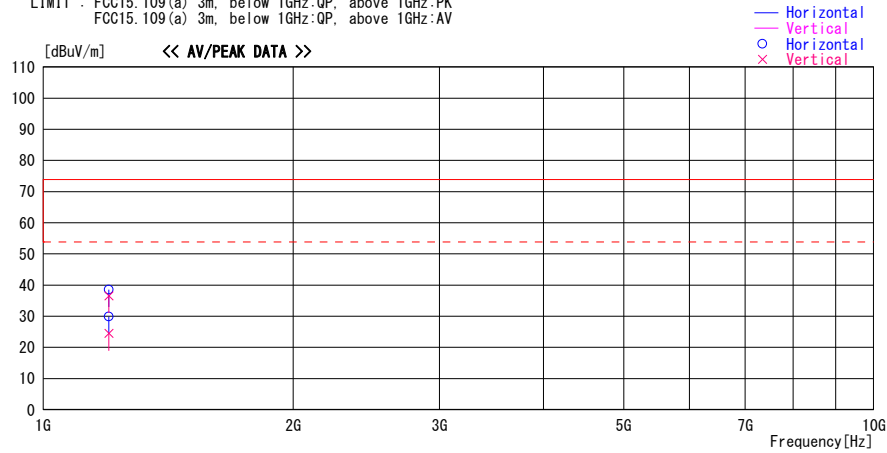

Frequency	Reading	DET	Antenna Factor	Loss & Gain	Level	Angle	Height	Polar.	Limit	Margin	Comment
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1200.000	46.5	PK	24.5	-32.4	38.6	72	100	Hori.	73.9	35.4	
1200.000	44.4	PK	24.5	-32.4	36.5	0	100	Vert.	73.9	37.4	
1200.000	37.8	AV	24.5	-32.4	29.9	72	100	Hori.	53.9	24.0	
1200.000	32.4	AV	24.5	-32.4	24.5	0	100	Vert.	53.9	29.4	

CHART: WITH FACTOR ANT TYPE: ~30MHz: LOOP, 30~300MHz: BICONICAL, 300MHz~1000MHz: LOGPERIODIC, 1000MHz~: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission USB mode

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2012/02/17

Report No. : 32FE0253-H0

Temp./Humi. : 23 deg.C / 32% RH
Engineer : Takumi Shimada

Mode / Remarks : USB mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

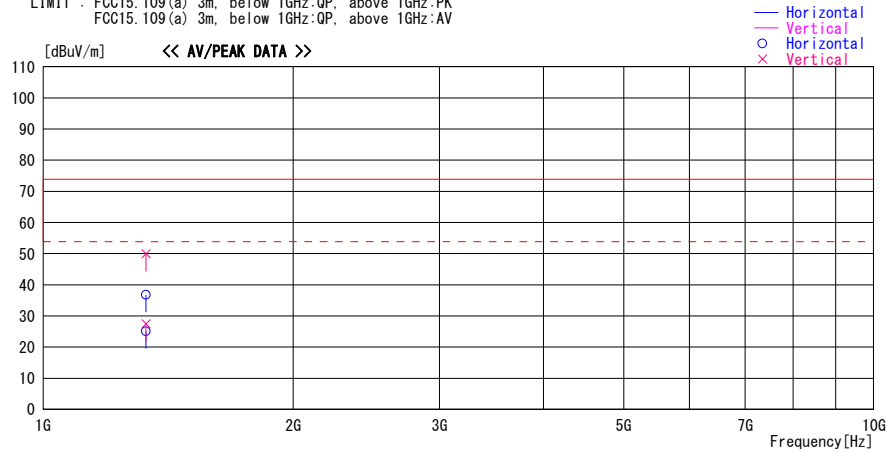

Frequency	Reading	DET	Antenna Factor	Loss& Gain	Level	Angle	Height	Polar.	Limit	Margin	Comment
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1329.700	43.9	PK	24.8	-31.9	36.8	0	100	Hori.	73.9	37.1	
1329.700	57.0	PK	24.8	-31.9	49.9	0	100	Vert.	73.9	24.0	
1329.700	32.3	AV	24.8	-31.9	25.2	0	100	Hori.	53.9	28.7	
1329.700	34.6	AV	24.8	-31.9	27.5	0	100	Vert.	53.9	26.4	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

APPENDIX 2: Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE/CE	2011/03/01 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	-	RE/CE	2012/02/06 * 12
MJM-07	Measure	PROMART	SEN1955	-	RE/CE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE/CE	-
MRENT-95	Spectrum Analyzer	Agilent	E4440A	MY46185823	RE/CE	2011/06/30 * 12
MTR-07	Test Receiver	Rohde & Schwarz	ESCI	100635	RE/CE	2011/10/19 * 12
MBA-05	Biconical Antenna	Schwarzbeck	BBA9106	1302	RE	2011/11/16 * 12
MLA-08	Logperiodic Antenna	Schwarzbeck	UKLP9140-A	N/A	RE	2011/11/16 * 12
MCC-50	Coaxial Cable	UL Japan	-	-	RE	2011/03/25 * 12
MAT-32	Attenuator(6dB)	TME	UFA-01	-	RE	2011/03/02 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2011/03/04 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2011/08/11 * 12
MCC-56	Microwave Cable	Suhner	SUCOFLEX104	270875/4(1m) / 284655(5m)	RE	2011/03/02 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	MY39500780	RE	2011/03/10 * 12
MHF-06	High Pass Filter 3.5-24GHz	TOKIMEC	TF323DCA	601	RE	2011/05/16 * 12
MHA-17	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	RE	2011/06/17 * 12
MLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	8127363	CE(EUT)	2012/02/06 * 12
MTA-31	Terminator	TME	CT-01	-	CE	2012/01/11 * 12
MAT-67	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2012/01/28 * 12
MCC-113	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W(10m)/SFM141(5m)/421-010(1m)/sucoform141-PE(1m)/RFM-E121(Switcher)	-/04178	CE	2011/07/04 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

CE: Conducted emission

RE: Radiated emission

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124