



SAMSUNG ELECTRONICS Co., Ltd.,
Regulatory Compliance Group
IT R&D Center
416 Maetan3-Dong,
Yeongtong-gu, Suwon city,
Gyeonggi-Do, Korea 443-742

FCC CFR47 PART 22 SUBPART CERTIFICATION REPORT

Model Tested:	GT-S5302B
FCC ID (Requested):	A3LGTS5302B
Report No:	FJ-155-R2
Job No:	FJ-155
Date issued:	May 15, 2012

- Abstract -

All measurement reported here in accordance with FCC Rules, 47CFR
Part2, Part22

Prepared By

HK LEE - Test Engineer

Authorized By

WT JANG - Technical Manager

© Copyright SAMSUNG Electronics 2012

TABLE OF CONTENT

MEASUREMENT REPORT	Page
1. FCC Certification Information.....	3
1.1 §2.1033 General Information	3
2. INTRODUCTION	4
2.1 General	4
3. MEASURING INSTRUMENT CALIBRATION	5
4. TEST EQUIPMENT LIST.....	6
5. FCC 3G MEASUREMENT PROCEDURES	7
5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power	8
5.2 Radiated Spurious & Harmonic Emission	9
5.3 Peak-Average Ratio.....	10
5.4 Occupied Bandwidth.....	11
5.5 Spurious and Harmonic Emissions at Antenna Terminal	11
5.5.1 Occupied Bandwidth Emission Limits	11
5.5.2 Conducted Spurious Emission	13
5.6 Frequency Stability / Temperature Variation	14
6. TEST DATA	15
6.1 Effective Radiated Power(E.R.P.)	15
6.3 Cellular WCDMA Radiated Spurious & Harmonic measurement.....	16
6.4 Cellular WCDMA Radiated Spurious & Harmonic Conversion Table.....	17
6.5 Frequency Stability	18
6.5.1 Cellular WCDMA Frequency Stability Table	18
6.5.2 Cellular WCDMA Frequency Stability Graph	19
7. SAMPLE CALCULATION	21
7.1 Emission Designator	21
8. CONCLUSION.....	22
9. TEST PLOT	23

MEASUREMENT REPORT

1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.

1.1 §2.1033 General Information

- Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
- Address: 416 Maetan3-Dong, Yeongtong-gu, Suwon City
Gyeonggi-Do, Korea 443-742
- FCC ID: A3LGTS5302B
- Model: GT-S5302B
- Quantity: Quantity production is planned
- Emission Designators: 4M23F9W(Cellular WCDMA)
- Tx Freq. Range: 826.4 - 846.6 MHz (Cellular WCDMA)
- Rx Freq. Range: 871.4 - 891.6 MHz (Cellular WCDMA)
- Max. Power Rating: 0.026 W Cellular WCDMA (14.13 dBm)
- FCC Classification(s): Licensed Non-Broadcast Transmitter Held to Ear(TNE)
- Equipment (EUT) Type: 850/1900 GSM/GPRS and Cellular WCDMA/HSDPA Phone
with Bluetooth, EDGE Rx only and WLAN
- Modulation(s): WCDMA
- Frequency Tolerance: $\pm 0.00025\%$ (2.5ppm)
- FCC Rule Part(s): §22(H), §2.
- Dates of Test: May 28-29, 2012
- Place of Test: SAMSUNG Lab,
- Test Report S/N: FJ-155-R2

2. INTRODUCTION

2.1 General

These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**.
 The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742
 The site have 1 Fully-anechoic chamber and measurement facility.



Figure1. Map of the Suwon City area.

Measurement Procedure

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.



Figure2. Photograph of 3m Fully-Anechoic Chamber

3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

- End of page -

4. TEST EQUIPMENT LIST

Name Of Equipment	Model	Serial No.	Due Date
Spectrum Analyzer	ESI26	836119/010	2012-10-25
	E4440A(3Hz~26.5GHz)	MY46187454	2013-03-14
	E4440A(3Hz~26.5GHz)	MY41000236	2013-04-26
Signal Generator	SMR20	835197/030	2012-12-01
Network Analyzer	8753E	JP38160590	2012-06-21
Pre-Amplifier	8449B	3008A00691	2012-12-09
Communication test set	8960	MY47510060	2013-03-05
	8960	GB42360886	2012-09-02
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2013-09-05
	BBHA9120	9120D-636	2012-07-14
Dipole Antenna	UHA 9105	9105-2412	2013-09-09
	UHA 9105	9105-2413	2012-07-15
Receive Antenna	HL040	353255/019	2013-09-05
Power Supply	E3640A	MY40003594	2012-06-21
	E3640A	MY40003595	2013-05-16
	E3632A	MY40022438	2013-03-02
Divider	11636B	51946	2012-07-04
	11636B	51942	2012-07-05
	11636B	56918	2012-09-28
High Pass Filter	WHK/3.0/18G-10SS	492	2013-04-09
	WHK/3.5/18G-10SS	4	2013-04-09
Environmental Chamber	SH-241	92000549	2012-11-14
	SH-241	92000548	2012-11-14
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

5. FCC 3G MEASUREMENT PROCEDURES

The maximum output power is a measure of the maximum power the UE can transmit (i.e. the actual power as would be measured assuming no measurement error) in a band width of at least $(1+\alpha)$ times the chip rate of the radio access mode

The default test configuration is configure an established radio link between the UE and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. Maximum output is verified according to 3GPP TS 34.121 Section 5.2

1. Configure TCP (Transmit Power Control) set to "All 1"s.
2. RMC and AMR connections at 12.2kbps are measured under 3.4kbps SRB (signaling radio bearer)
3. Measure the mean power of the UE in a bandwidth of at least $(1+\alpha)$ times the chip rate of the radio access mode. The mean power shall be averaged over at least one timeslot.

5.1 Effective Radiated Power / Equivalent Isotropic Radiated Power

Test Set-up for the ERP/EIRP TEST

Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

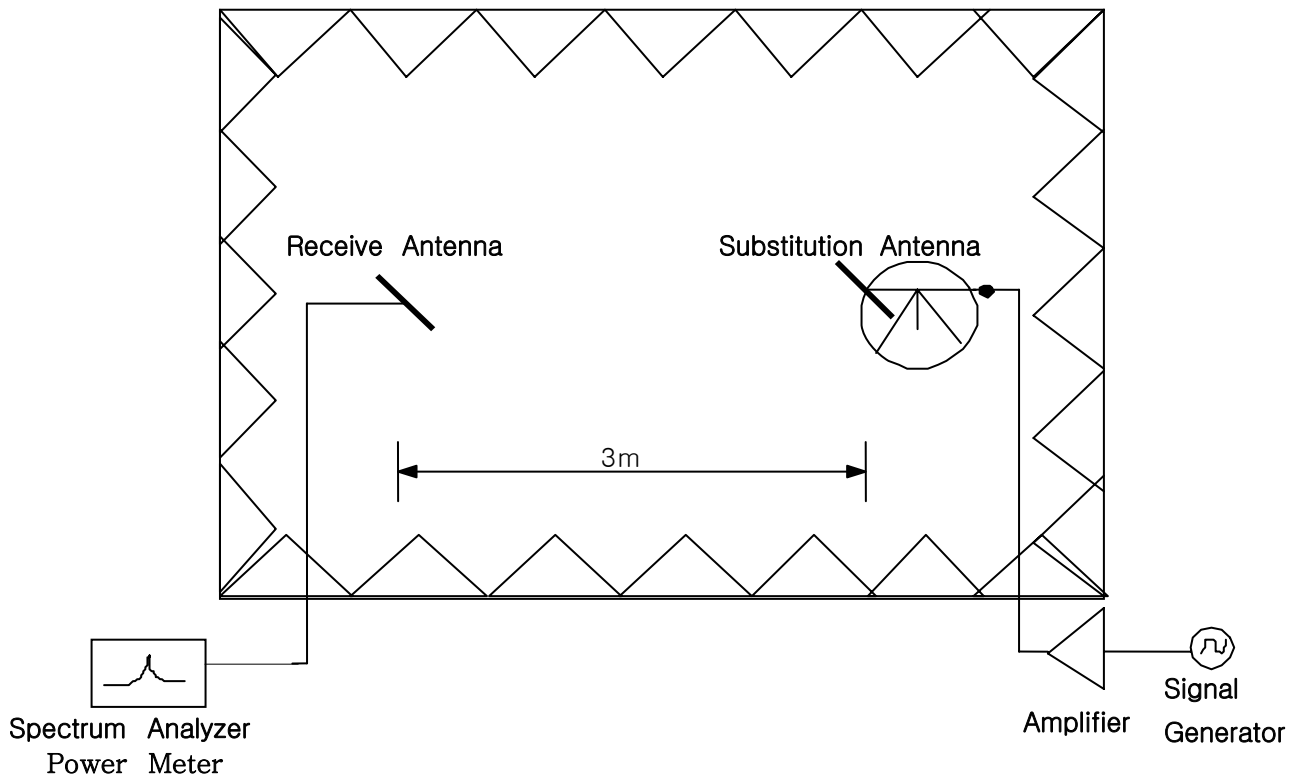


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA signals, an average detector is used, with RBW=VBW=5MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

5.2 Radiated Spurious & Harmonic Emission

Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

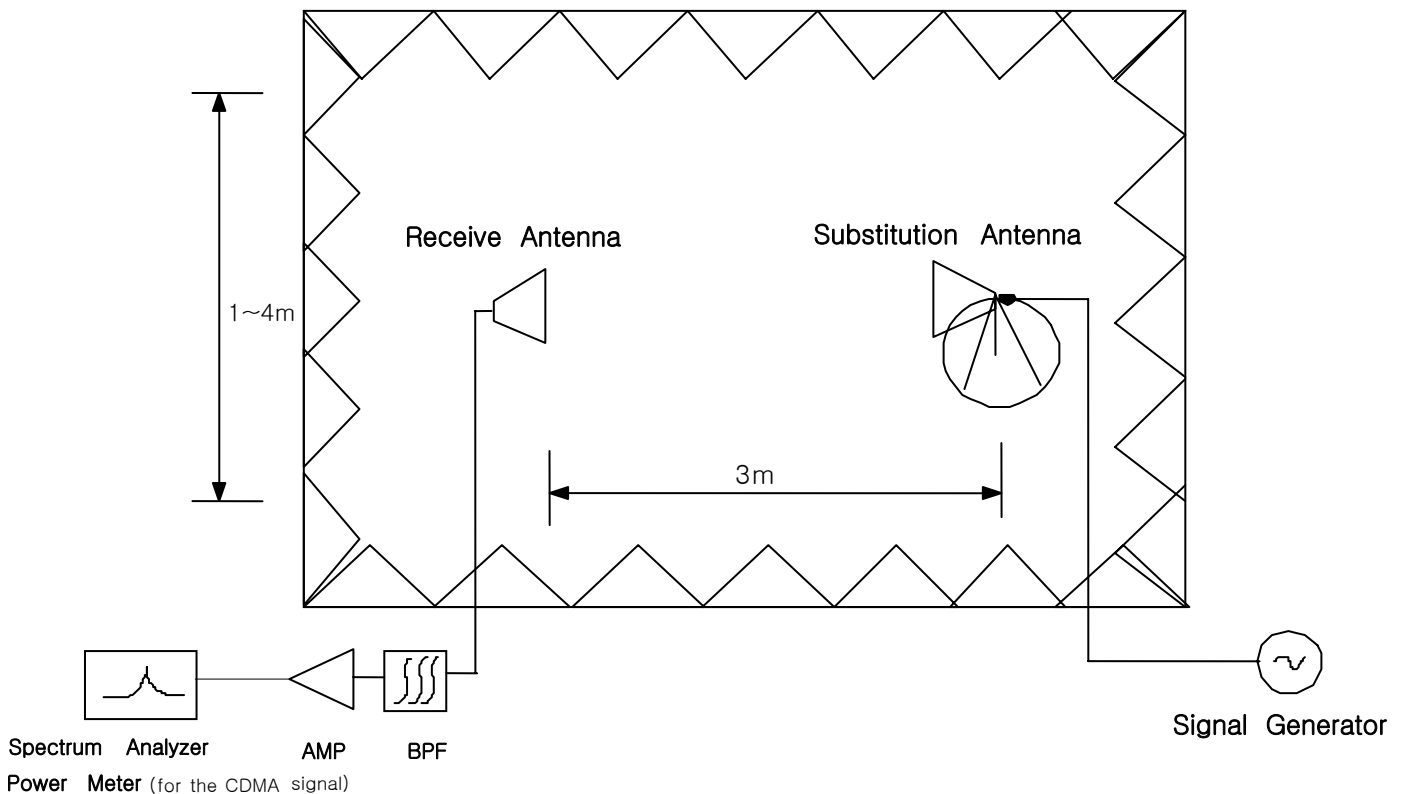


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna and tested in 3 orthogonal planes. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10th Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

SAMPLE CALCULATION

Example: Channel 600 PCS Mode 2nd Harmonic(3760MHz)


The receive analyzer reading at 3meters with the EUT on the turntable was -81.0dBm . The gain of the substituted antenna is 8.1dBi . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0dB at 3760MHz . So 6.1dB is added to the signal generator reading of -30.9dBm yielding -24.8dBm . The fundamental EIRP was 25.5dBm so this harmonic was $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$.

5.3 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function(CCDF) measurement profile is used to determine the largest deviation between the An average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

- End of page -

Test set-up

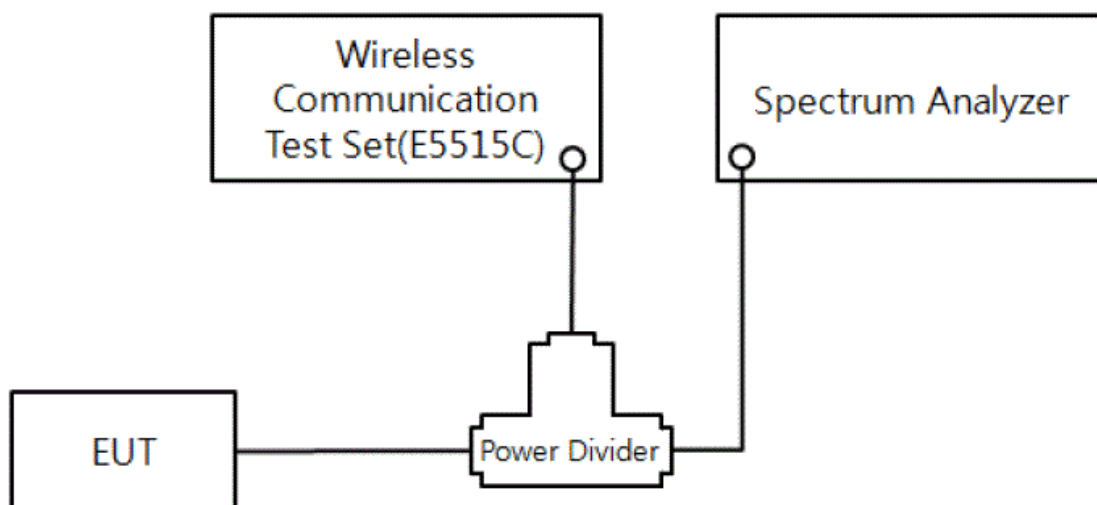

(Configuration of conducted Emission measurement)

5.4 Occupied Bandwidth

Test Procedure

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution and video bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. Video averaging is not permitted. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth. These measurements were performed on Agilent E4440A Spectrum Analyzer, and use analyzer's bandwidth measurement function.

5.5 Spurious and Harmonic Emissions at Antenna Terminal

5.5.1 Occupied Bandwidth Emission Limits

Part 24

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.

Part 22

- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

Table 1. Broadband PCS Service Frequency Blocks

BLOCK	Freq. Range (MHz) Transmitter (Tx)	Freq. Range (MHz) Receiver (Rx)
A* Low + A	824 – 835	869 – 880
B	835 – 845	880 – 890
A* High	845 – 846.5	890 – 891.5
B*	846.5 – 849	891.5 – 894

Table 2. Cellular Service Frequency Blocks

5.5.2 Conducted Spurious Emission

Minimum standard:

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least $43+10\log (P)$ dB. Limit equivalent to -13 dBm, calculation shown below.

$$43 + 10\log (0.333 \text{ W}) = 38.22\text{dB}$$
$$25.22 \text{ dBm} - 38.22 \text{ dB} = -13 \text{ dBm}$$

Test Procedure:

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13 dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (PCS Mode : 10MHz to 20GHz). A display line was placed at -13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

5.6 Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +50°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.

- End of page -

6. TEST DATA

6.1 Effective Radiated Power(E.R.P.)

Supply Voltage : 3.7VDC

Modulation : Cellular WCDMA

■ Result

Frequency (MHz)	Tested level [dBm]	Substitute Level [dBm]	Antenna Gain [dBd]	Polarization [H/V]	ERP [dBm]	ERP [W]	Battery
826.4	-23.12	14.41	-1.95	H	12.46	0.018	Standard
836.6	-24.30	13.79	-1.72	H	12.07	0.016	Standard
846.6	-24.51	15.71	-1.58	H	14.13	0.026	Standard

NOTE : Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

Radiated measurements at 3 meters by Substitution Method

6.3 Cellular WCDMA Radiated Spurious & Harmonic measurement

Operating Frequency : 826.4 MHz(Low), 836.6 MHz(Middle), 846.6 MHz(High)

Measured Output Power : 14.13 dBm = 0.026 W

Modulation Signal : CDMA

$$\text{Limit : } 43 + 10\log_{10}(P) = 27.13\text{dBc}$$

■ Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	POL (H/V)	Result (dBc)
4132	2	1652.80	-64.60	H	66.14
	3	2479.20	-67.02	H	63.32
	4	3305.60	-67.13	V	59.56
	5	4132.00	-	-	-
	6	4958.40	-	-	-
	7	5784.80	-	-	-
4183	2	1673.20	-64.84	H	66.13
	3	2509.80	-67.13	H	63.22
	4	3346.40	-66.21	V	58.73
	5	4183.00	-	-	-
	6	5019.60	-	-	-
	7	5856.20	-	-	-
4233	2	1693.20	-65.70	H	65.71
	3	2539.80	-66.79	H	63.43
	4	3386.40	-67.16	V	59.54
	5	4233.00	-	-	-
	6	5079.60	-	-	-
	7	5926.20	-	-	-

NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10th harmonic and All modes of operation were investigated, and the worst-case results are reported..

Radiated Spurious Emission measurements at 3 meters by Substitution Method

6.4 Cellular WCDMA Radiated Spurious & Harmonic Conversion Table

Date : May 29, 2012

Test Engineer : HK LEE

- ① Tx Cable loss
- ② Tx Horn Ant Gain
- ③ Tx Level to radiate -13dBm
- ④ ESI Level received from Tx with-13dBm
- ⑤ Tested Level from EUT
- ⑥ = ERP+ 2.15 - (-13 + ⑤ - ④)

CH	Har	Frequency (MHz)	① Tx C/L dB	②Tx Horn Gain dBi	③Tx Level dBm	④ ESI Level : H dBm	④ ESI Level : V dBm	⑤Test ed EUT Level : H dBm	⑤Test ed EUT Level : V dBm	⑥ Result EUT : H (dBc)	⑥ Result EUT : V (dBc)
4357	2	1652.80	-8.77	9.40	-13.60	-27.73	-27.03	-64.60	-66.25	66.14	68.49
	3	2479.20	-11.12	10.60	-12.50	-32.97	-32.23	-67.02	-67.32	63.32	64.36
	4	3305.60	-12.19	12.00	-12.80	-36.08	-36.84	-66.80	-67.13	59.99	59.56
	5	4132.00	-13.85	12.60	-11.80	-39.75	-39.33	-	-	-	-
	6	4958.40	-15.03	12.70	-10.70	-42.44	-42.28	-	-	-	-
	7	5784.80	-17.11	13.10	-9.00	-44.12	-44.43	-	-	-	-
4408	2	1673.20	-8.83	9.40	-13.60	-27.98	-27.21	-64.84	-66.27	66.13	68.33
	3	2509.80	-11.24	10.60	-12.40	-33.18	-32.42	-67.13	-67.01	63.22	63.86
	4	3346.40	-12.13	12.00	-12.90	-36.09	-36.75	-66.82	-66.21	60.00	58.73
	5	4183.00	-14.18	12.60	-11.40	-39.47	-39.56	-	-	-	-
	6	5019.60	-15.91	12.70	-9.80	-42.07	-42.44	-	-	-	-
	7	5856.20	-17.15	13.10	-9.00	-45.07	-44.94	-	-	-	-
4458	2	1693.20	-8.88	9.40	-13.50	-29.26	-28.45	-65.70	-64.96	65.71	65.78
	3	2539.80	-11.22	10.60	-12.40	-32.63	-32.85	-66.79	-67.40	63.43	63.82
	4	3386.40	-12.28	12.00	-12.70	-36.60	-36.89	-67.32	-67.16	59.99	59.54
	5	4233.00	-14.15	12.60	-11.50	-39.36	-39.77	-	-	-	-
	6	5079.60	-16.16	12.70	-9.50	-42.73	-42.38	-	-	-	-
	7	5926.20	-17.34	13.10	-8.80	-45.37	-45.34	-	-	-	-

6.5 Frequency Stability

6.5.1 Cellular WCDMA Frequency Stability Table

Operating Frequency : 836,600,000 Hz

Channel : 4183

Reference Voltage : 3.7VDC


Deviation Limit : ± 0.00025 % or 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	-19.70	836,599,980	-0.000002	-0.024
100%		-30	17.60	836,600,018	0.000002	0.021
100%		-20	-46.70	836,599,953	-0.000006	-0.056
100%		-10	-27.40	836,599,973	-0.000003	-0.033
100%		0	-26.80	836,599,973	-0.000003	-0.032
100%		+10	27.90	836,600,028	0.000003	0.033
100%		+20	-19.70	836,599,980	-0.000002	-0.024
100%		+30	0.20	836,600,000	0.000000	0.000
100%		+40	42.60	836,600,043	0.000005	0.051
100%		+50	-3.10	836,599,997	0.000000	-0.004
115%	4.26	+20	28.80	836,600,029	0.000003	0.034
Batt. Endpoint	3.35	+20	-34.50	836,599,966	-0.000004	-0.041

Note : The temperature is varied from -30 °C to +50 °C using an environmental chamber.


The EUT is tested down to the battery end point

6.5.2 Cellular WCDMA Frequency Stability Graph

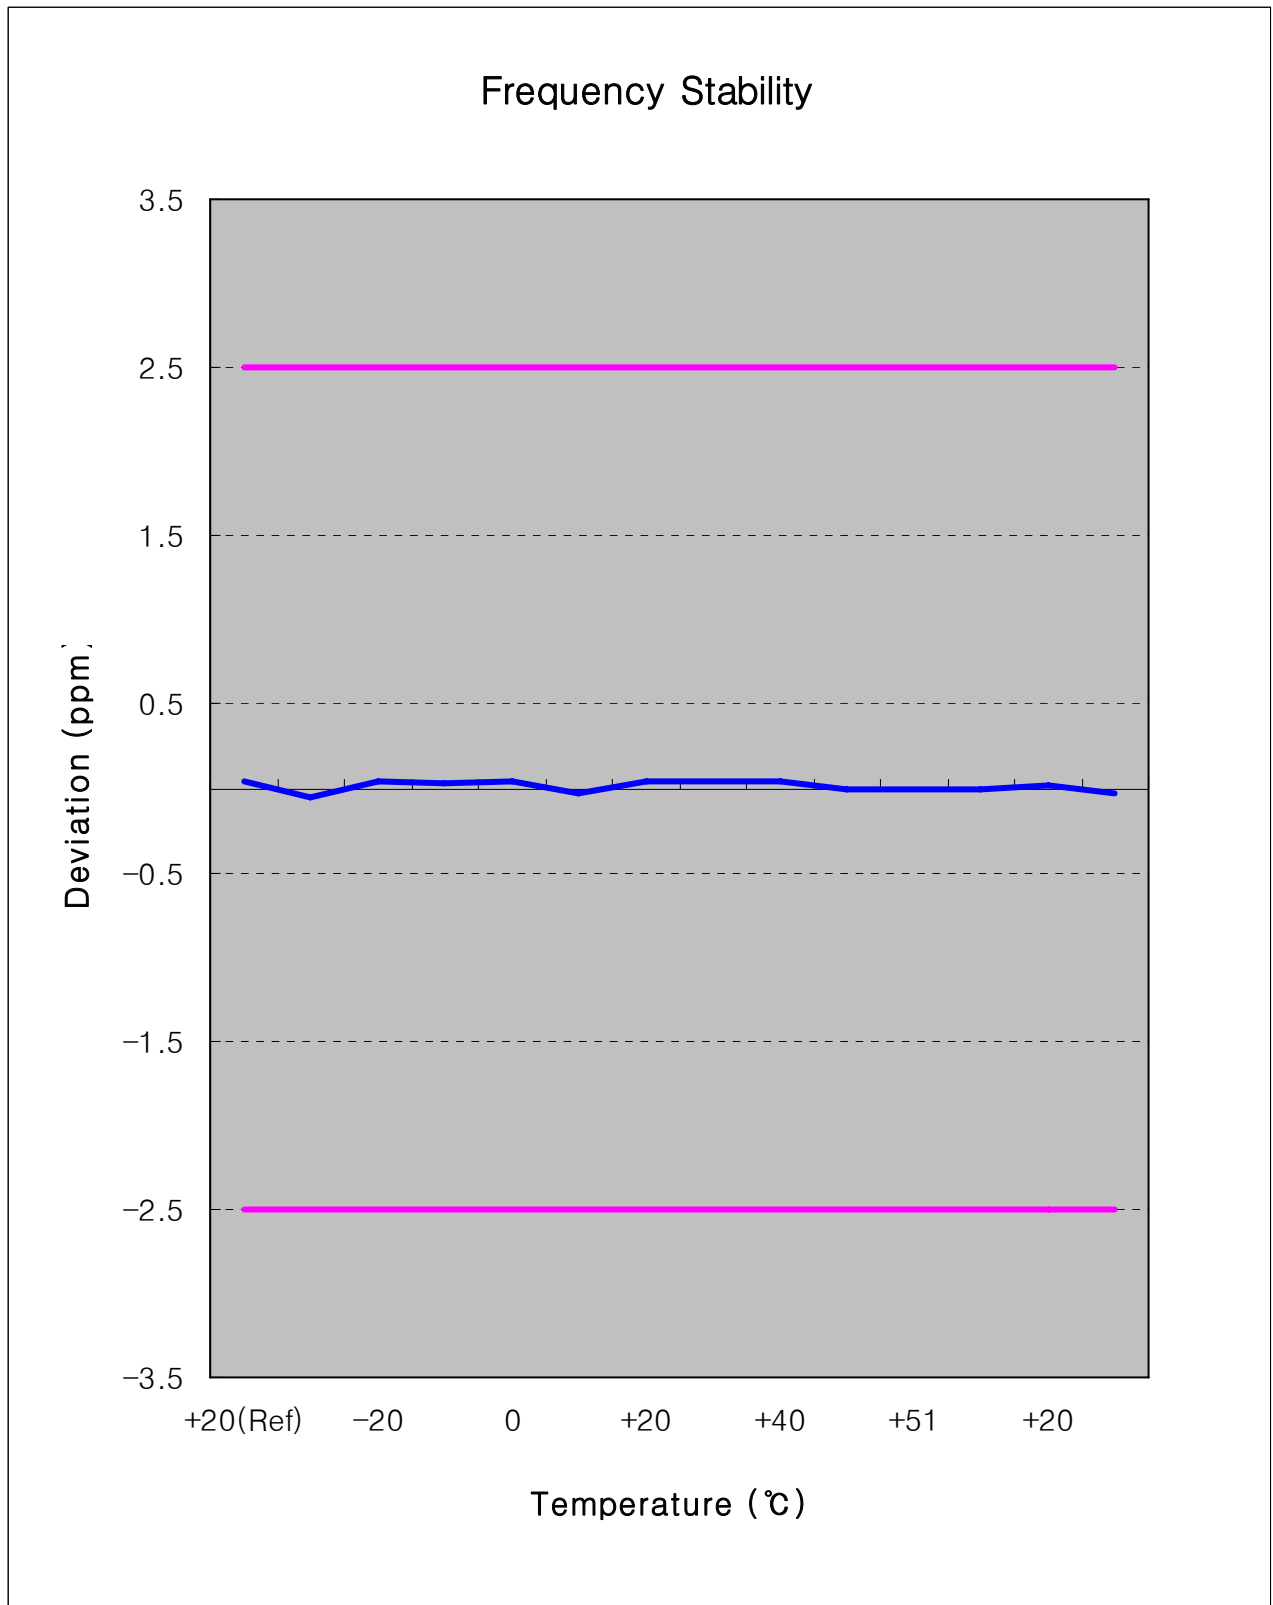

- End of page -

Zoom In

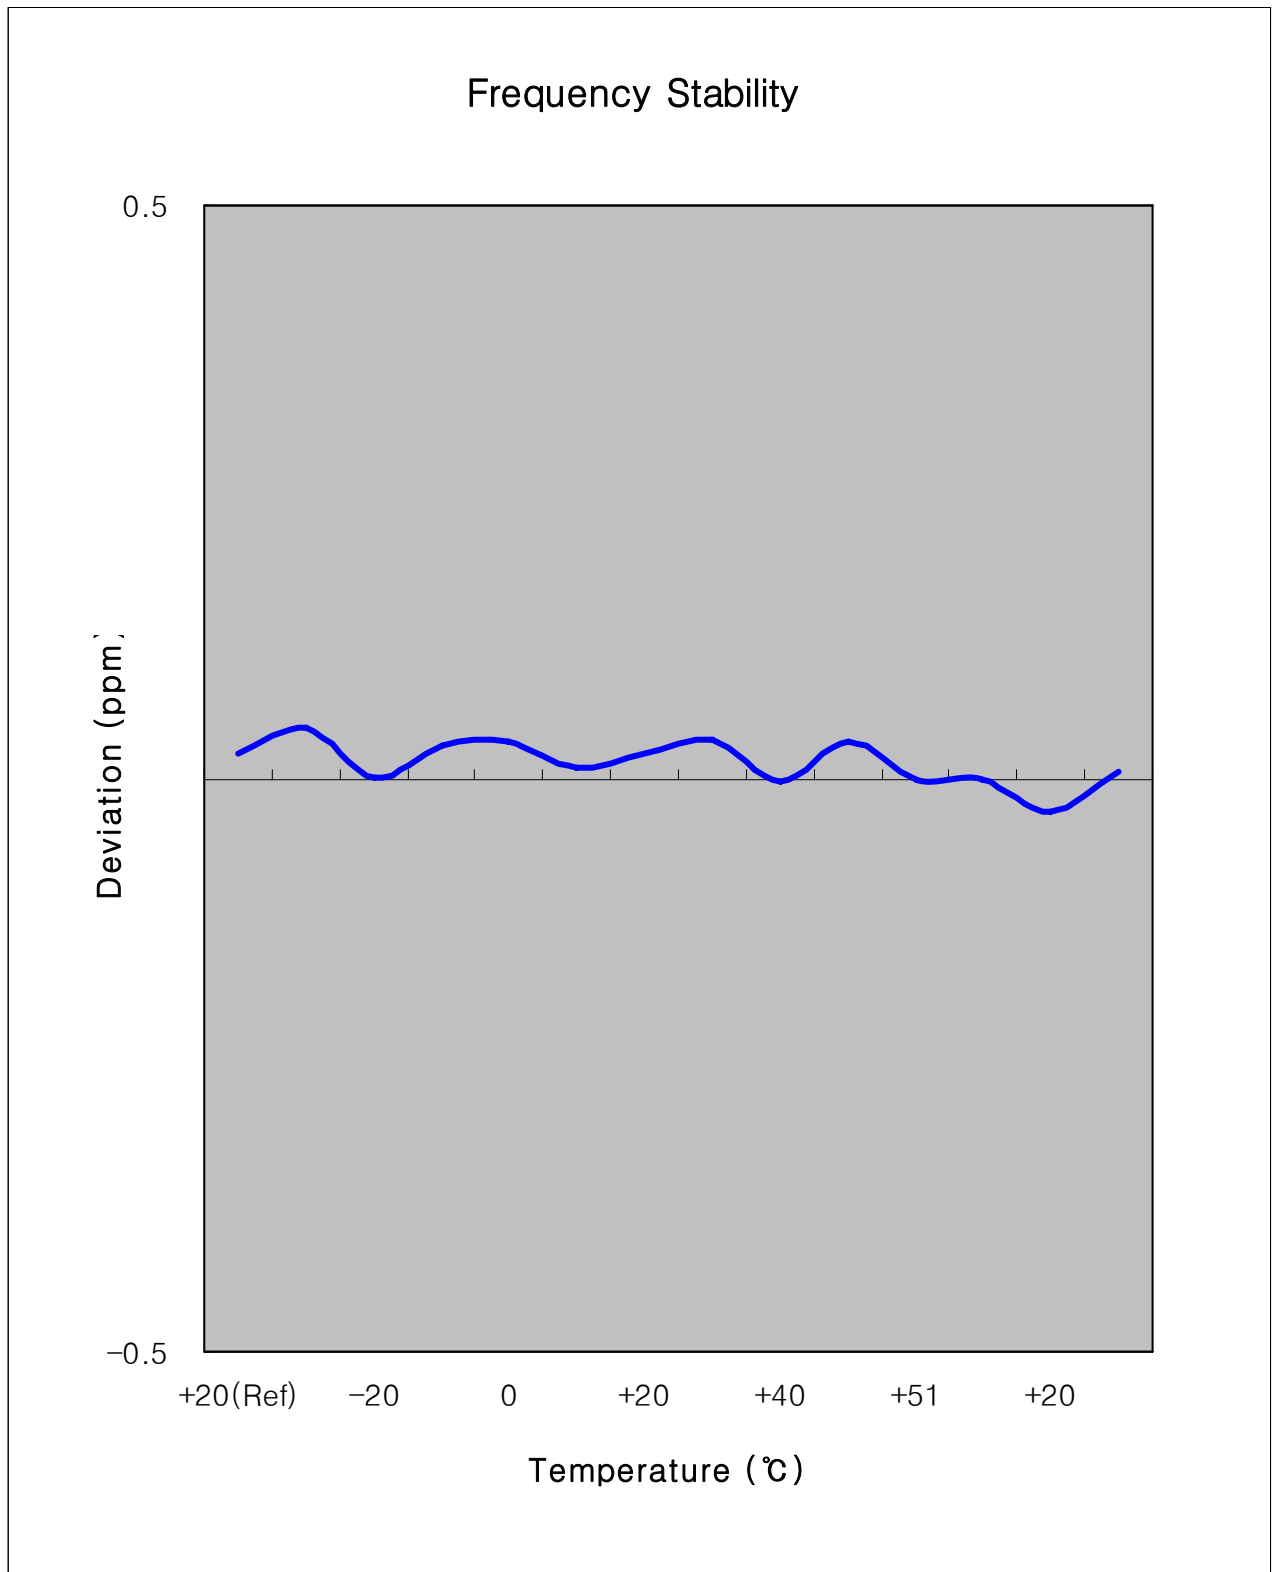

- End of page -

-
-

7. SAMPLE CALCULATION

7.1 Emission Designator

Emission Designator = 4M19F9W

CDMA BW = 4.19MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination(Audio/Data)

(Measured at the 99.75% power bandwidth)

– End of page –

8. CONCLUSION

The data collected shows that the SAMSUNG 850/1900 GSM/GPRS and Cellular WCDMA/HSDPA Phone with Bluetooth, EDGE Rx only and WLAN.

FCC ID : A3LGTS5302B complies with all the requirements of Parts 2, 22 of the FCC Rules.

- End of page -

9. TEST PLOT

※ For above 5GHz, we measure Ref. offset every 1GHz. And we tested the plots with worst offset of all offset.

1. Spectrum Offset(dB) = Cable loss(dB) + Power divider(dB)
2. Ref Offset at 836.6 MHz = 7.94dBm

Agilent

R T

Freq/Channel

Base Ch Freq 826.4 MHz Trig Free
Occupied Bandwidth #3GPP W-CDMA Averages: 10

FCC ID:A3LGTS5302B 0BW Ch.4357

Ref 25 dBm Atten 30 dB

#Samp

Log


10

dB/

Offst

7.94

dB

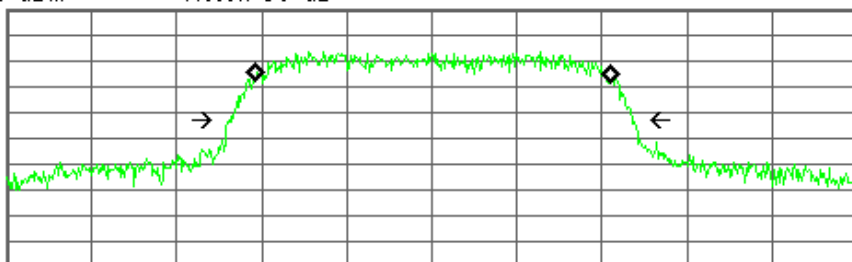

Center 826.40 MHz

Span 10 MHz

#Res BW 100 kHz

#VBW 1 MHz

Sweep 2.92 ms (601 pts)

Occupied Bandwidth

4.1517 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error

-12.337 kHz

x dB Bandwidth

4.701 MHz*

Center Freq
826.400000 MHz

Start Freq
821.400000 MHz

Stop Freq
831.400000 MHz

CF Step
1.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

Base Ch Freq 836.6 MHz Trig Free
Occupied Bandwidth #3GPP W-CDMA Averages: 10

FCC ID:A3LGTS5302B 0BW Ch.4408

Ref 25 dBm Atten 30 dB

#Samp

Log


10

dB/

Offst

7.94

dB

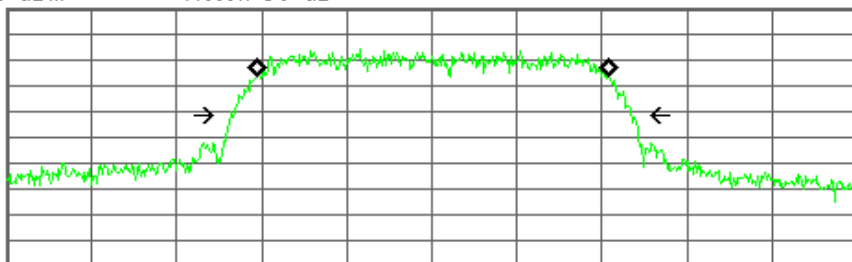

Center 836.60 MHz

Span 10 MHz

#Res BW 100 kHz

#VBW 1 MHz

Sweep 2.92 ms (601 pts)

Occupied Bandwidth

4.1415 MHz

Occ BW % Pwr 99.00 %

x dB -26.00 dB

Transmit Freq Error

10.154 kHz

x dB Bandwidth

4.737 MHz*

Center Freq
836.600000 MHz

Start Freq
831.600000 MHz


Stop Freq
841.600000 MHz

CF Step
1.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

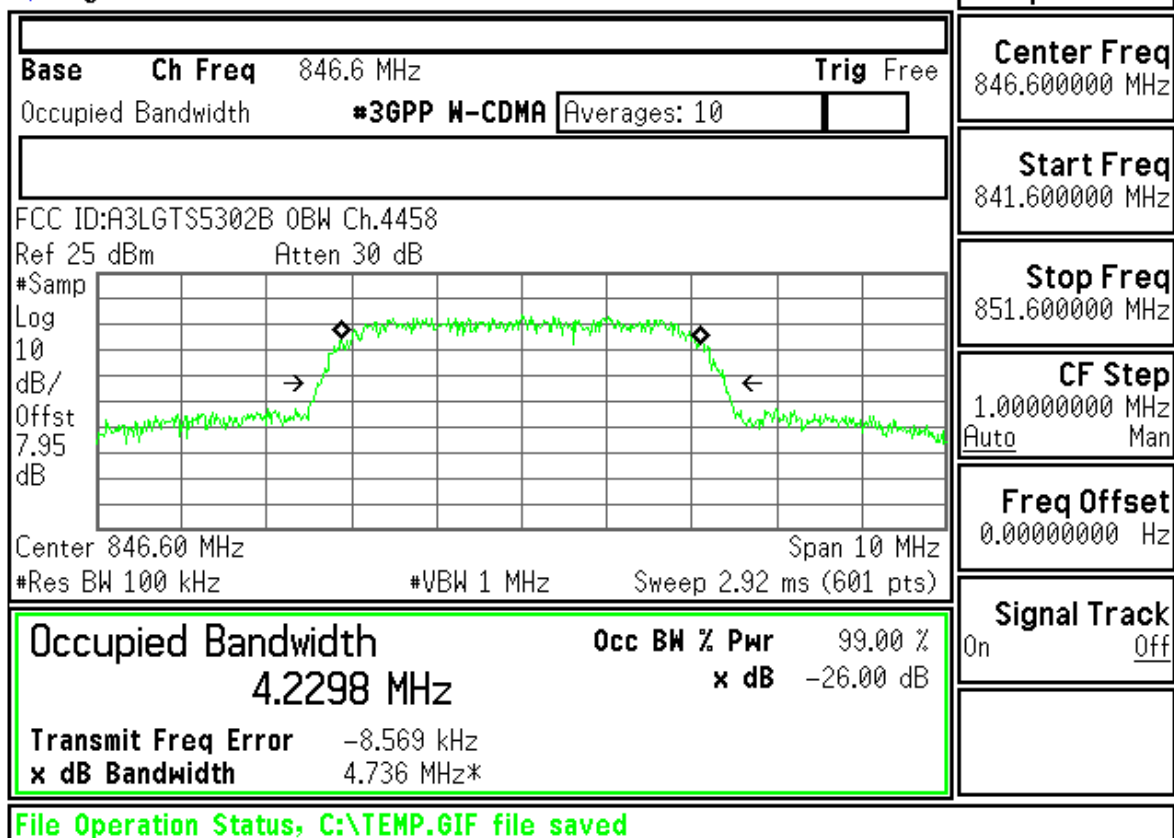

Agilent

R T

Freq/Channel

FCC ID:A3LGT55302B Cond Spur Ch.4357

Ref 25 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7.94

dB

DI

-13.0

dBm

LgAv

M1 S2


S3 FC

AA

E(f):

FTun

Swp

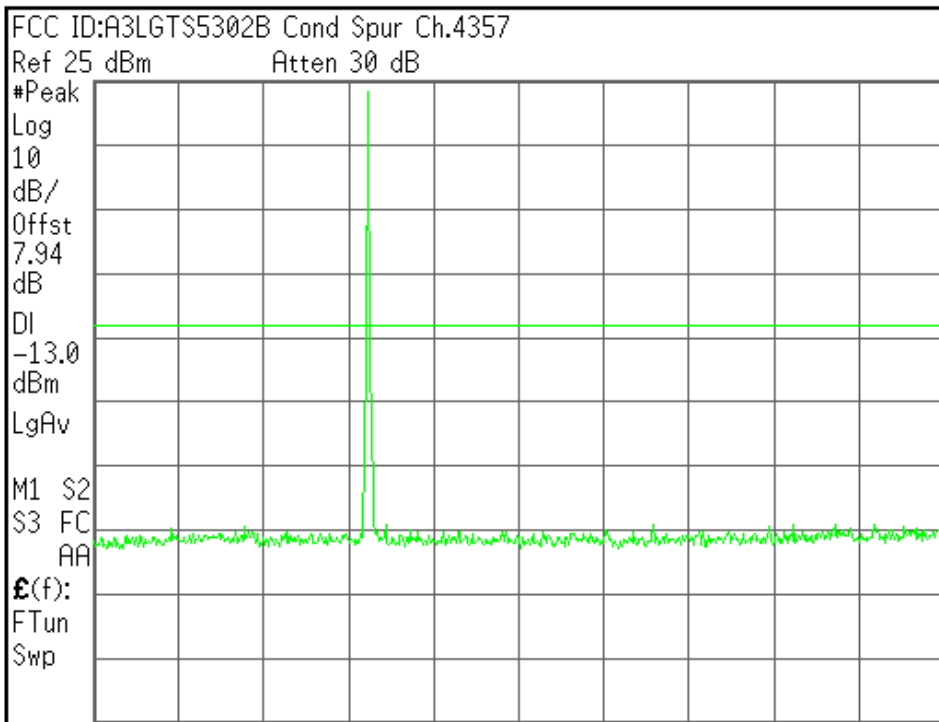

Center 1.265 GHz

Span 2.47 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.12 ms (601 pts)

Center Freq
1.26500000 GHz

Start Freq
30.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
247.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55302B Cond Spur Ch.4357

Mkr1 816.4 MHz

Ref 25 dBm

Atten 30 dB

-35.88 dBm

#Peak

Log

10

dB/

Offst

7.94

dB

DI

-13.0

dBm

LgAv

M1 S2


S3 FC

AA

E(f):

FTun

Swp

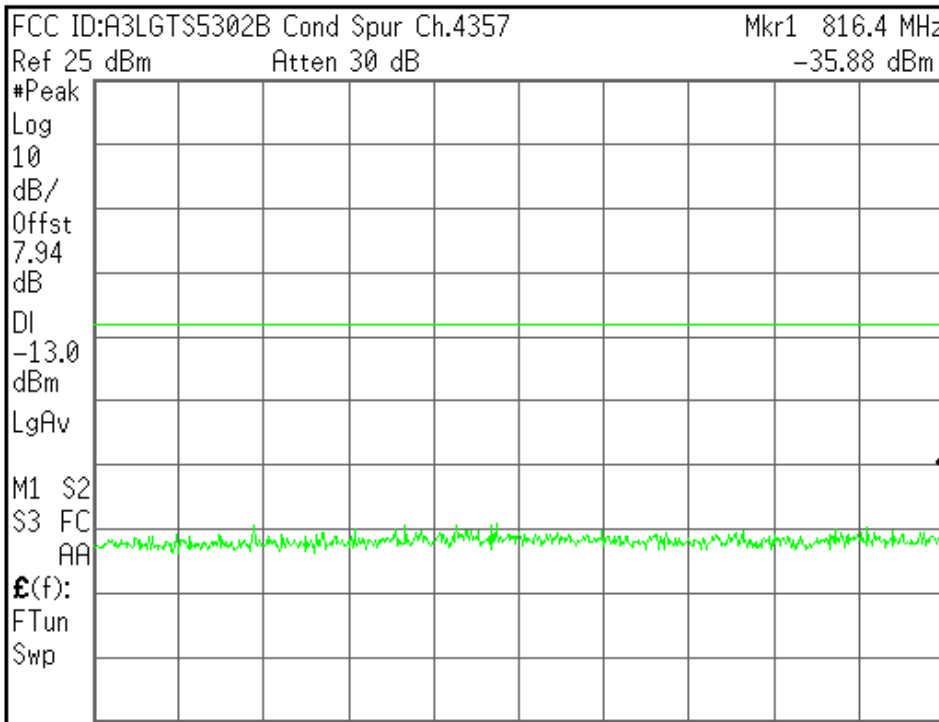

Center 423.2 MHz

Span 786.4 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.32 ms (601 pts)

Center Freq
423.200000 MHz

Start Freq
30.0000000 MHz



Stop Freq
816.400000 MHz

CF Step
78.6400000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

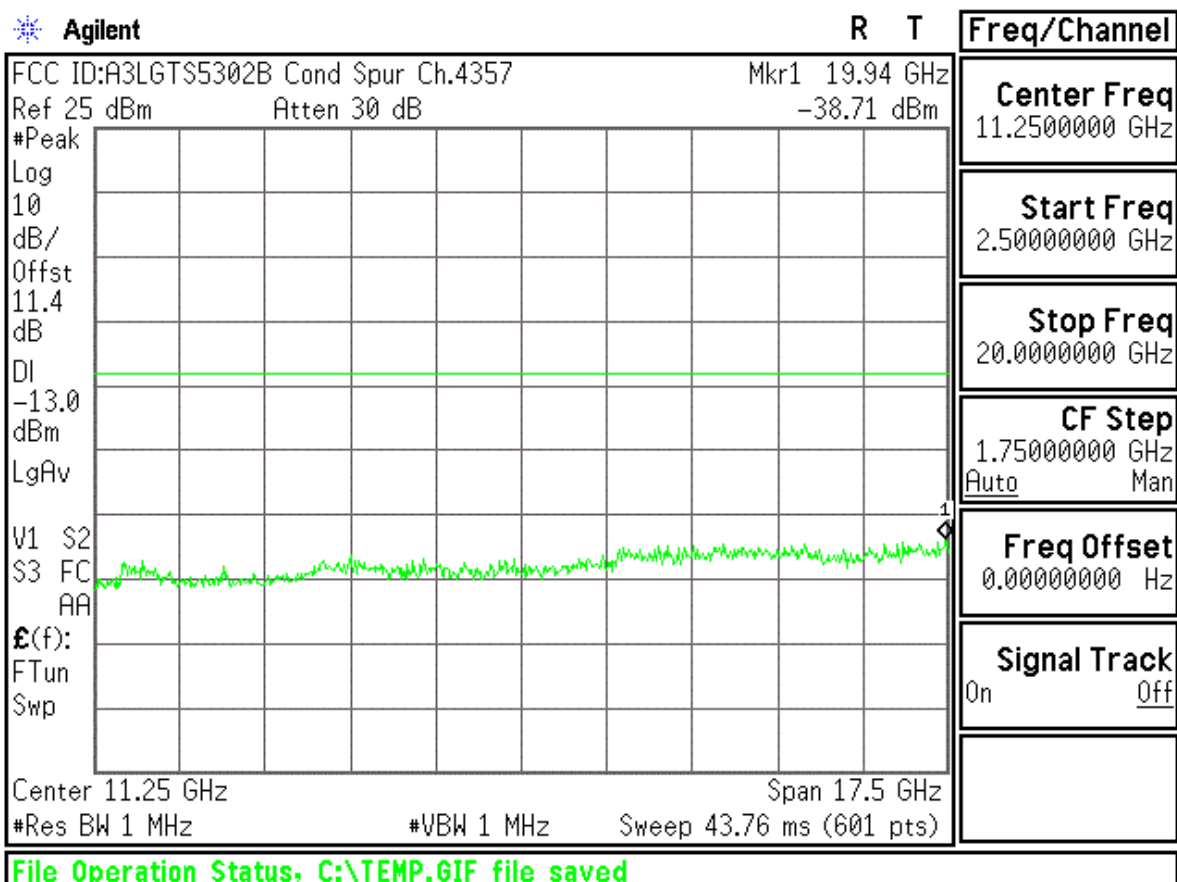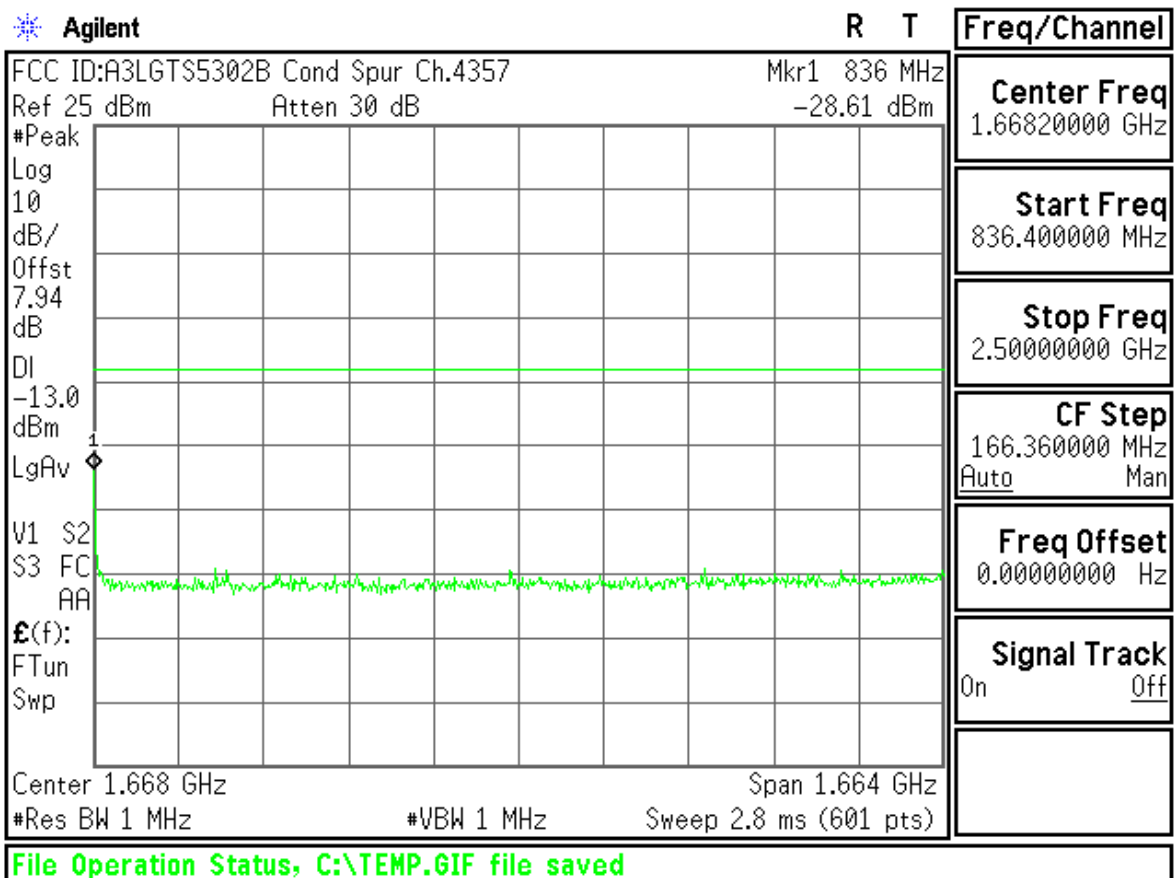

Agilent

R T

Freq/Channel

FCC ID:A3LGT55302B Cond Spur Ch.4408

Ref 25 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7.94

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

AA

$E(f)$:

FTun

Swp

Center 1.265 GHz

Span 2.47 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.12 ms (601 pts)

Center Freq
1.26500000 GHz

Start Freq
30.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
247.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55302B Cond Spur Ch.4408

Mkr1 826.6 MHz

Ref 25 dBm

Atten 30 dB

-31.97 dBm

#Peak

Log

10

dB/

Offst

7.94

dB

DI

-13.0

dBm

LgAv

V1 S2

S3 FC

AA

$E(f)$:

FTun

Swp

Center 428.3 MHz

Span 796.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.36 ms (601 pts)

Center Freq
428.300000 MHz

Start Freq
30.0000000 MHz



Stop Freq
826.600000 MHz

CF Step
79.6600000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

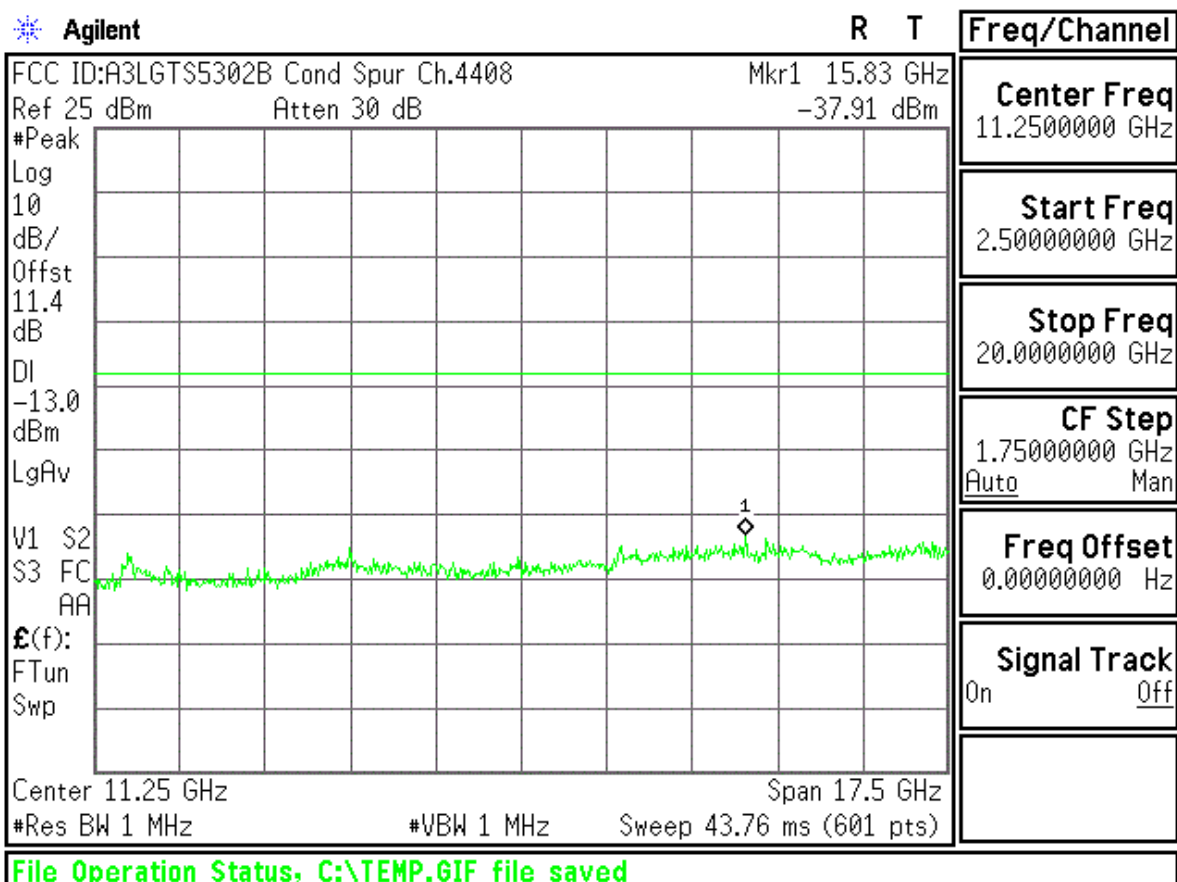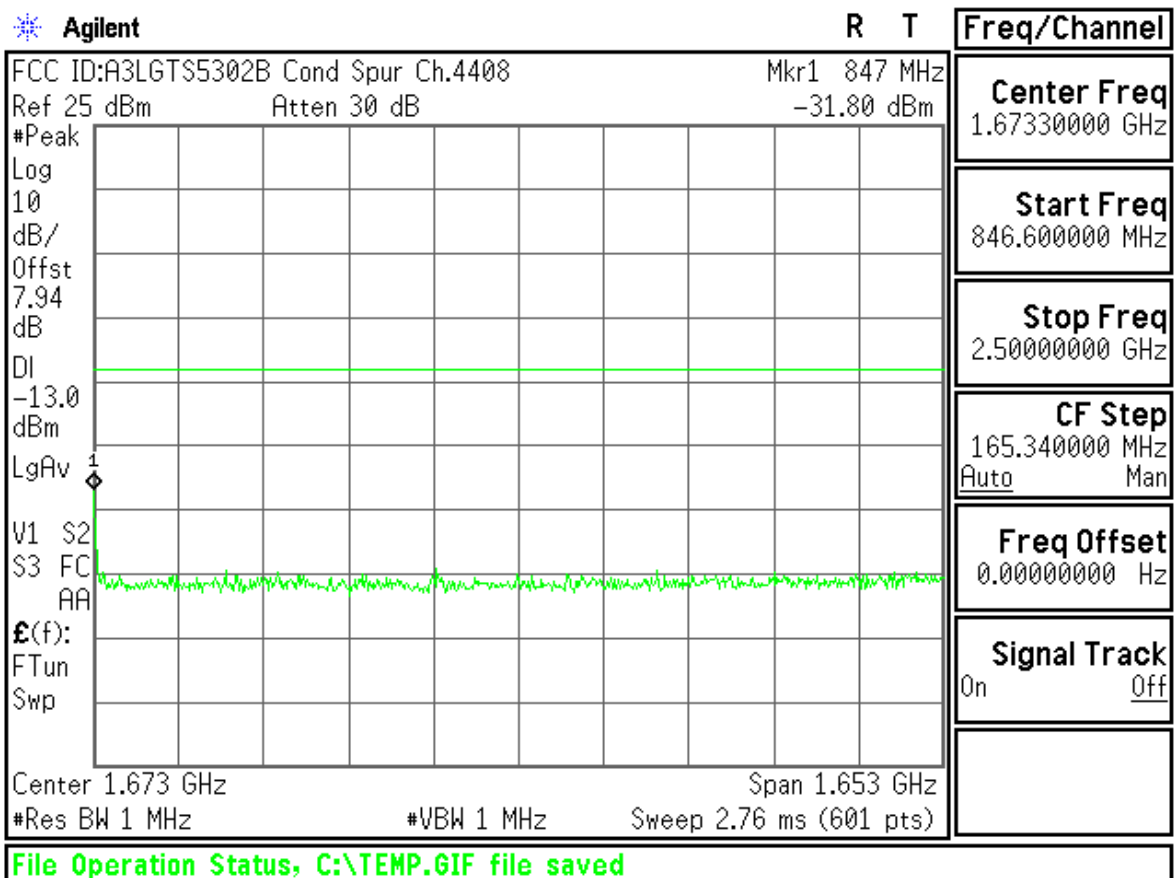

Agilent

R T

Freq/Channel

FCC ID:A3LGT55302B Cond Spur Ch.4458

Ref 25 dBm

Atten 30 dB

#Peak

Log

10

dB/

Offst

7.95

dB

DI

-13.0

dBm

LgAv

M1 S2


S3 FC

AA

$E(f)$:

FTun

Swp

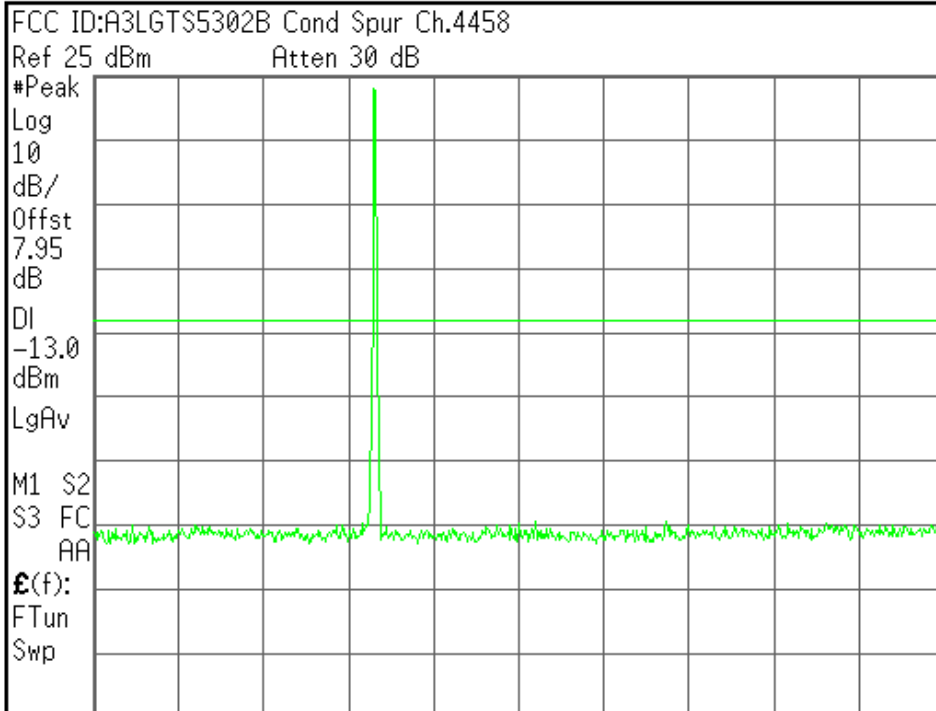

Center 1.265 GHz

Span 2.47 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.12 ms (601 pts)

Center Freq
1.26500000 GHz

Start Freq
30.0000000 MHz

Stop Freq
2.50000000 GHz

CF Step
247.000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

FCC ID:A3LGT55302B Cond Spur Ch.4458

Mkr1 836.6 MHz

Ref 25 dBm

Atten 30 dB

-30.10 dBm

#Peak

Log

10

dB/

Offst

7.95

dB

DI

-13.0

dBm

LgAv

V1 S2


S3 FC

AA

$E(f)$:

FTun

Swp

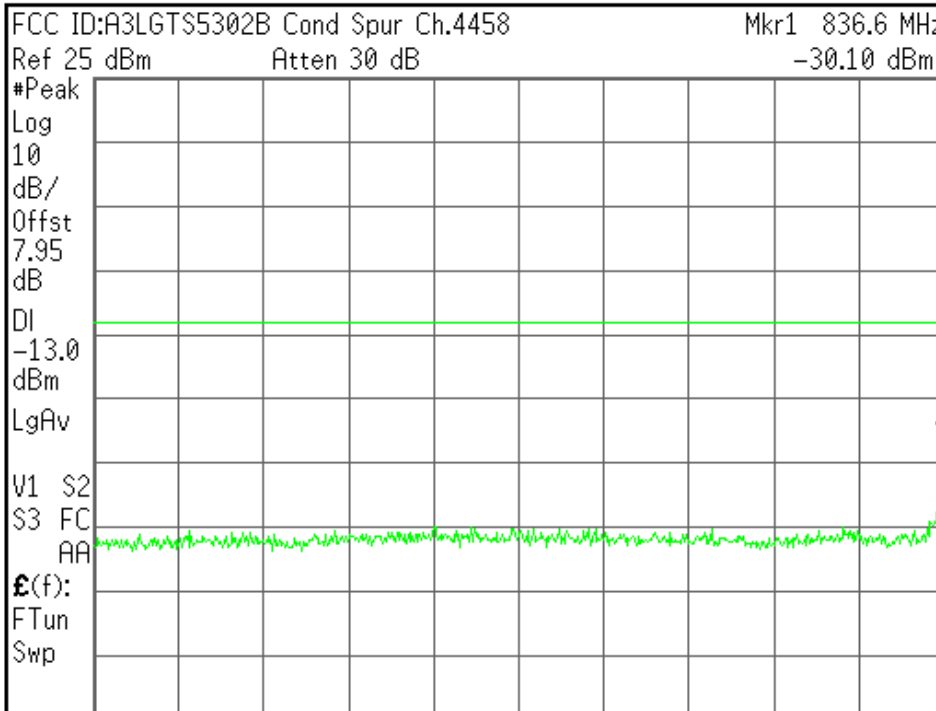

Center 433.3 MHz

Span 806.6 MHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1.36 ms (601 pts)

Center Freq
433.300000 MHz

Start Freq
30.0000000 MHz



Stop Freq
836.600000 MHz

CF Step
80.6600000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off


File Operation Status, C:\TEMP.GIF file saved

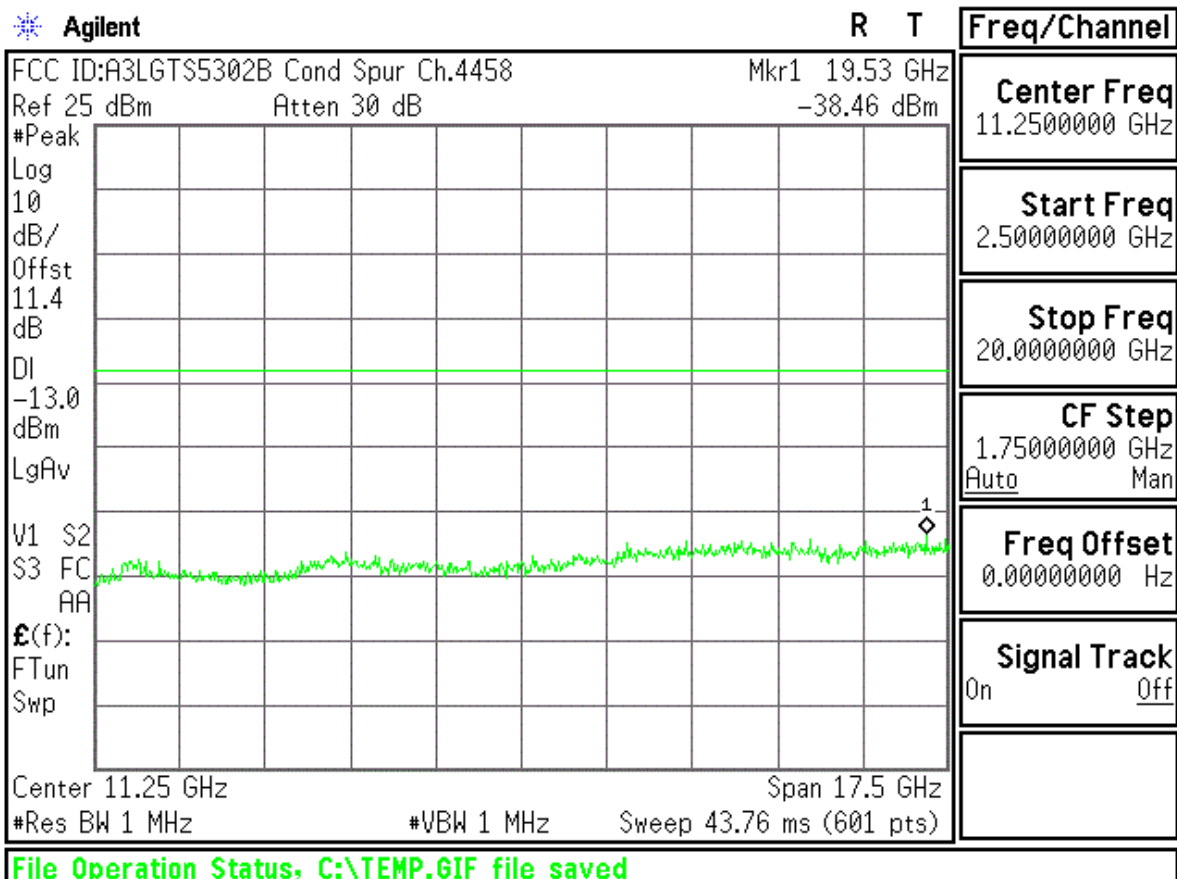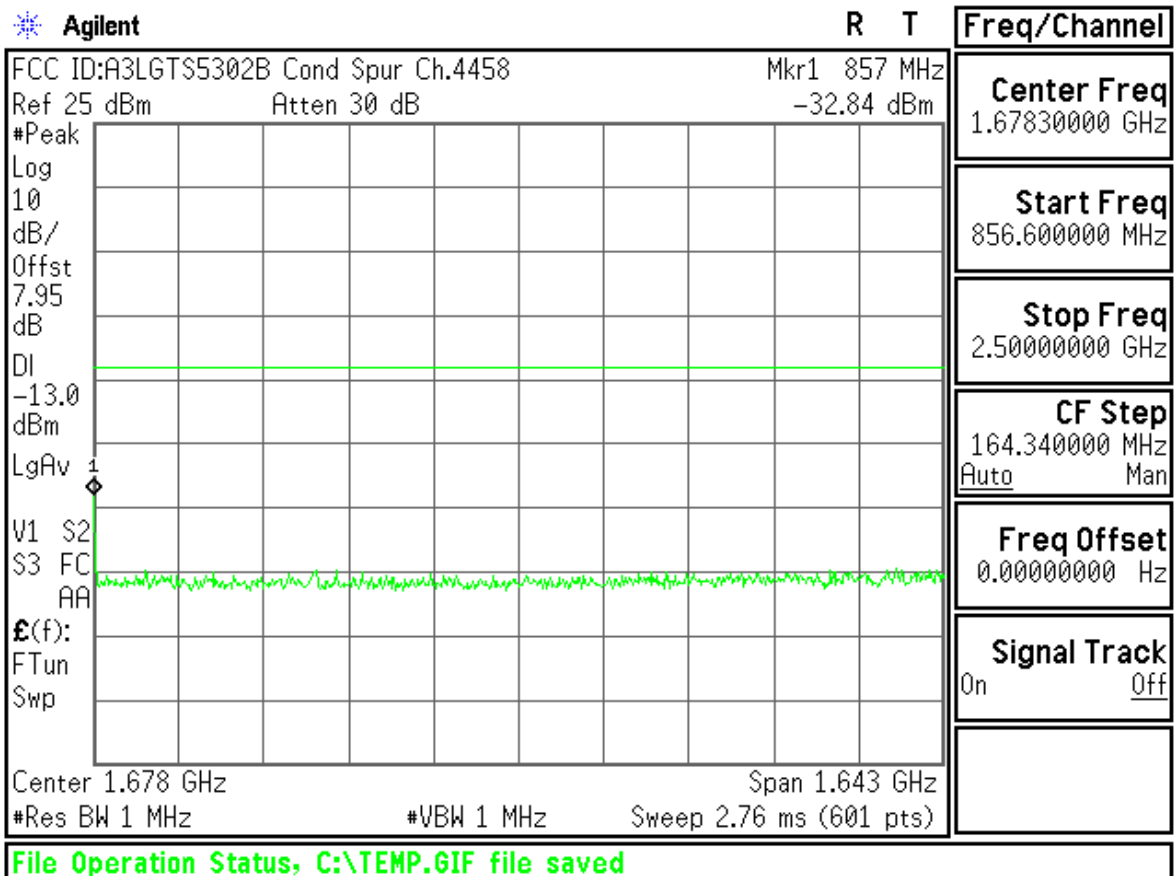

Agilent

R T

Freq/Channel

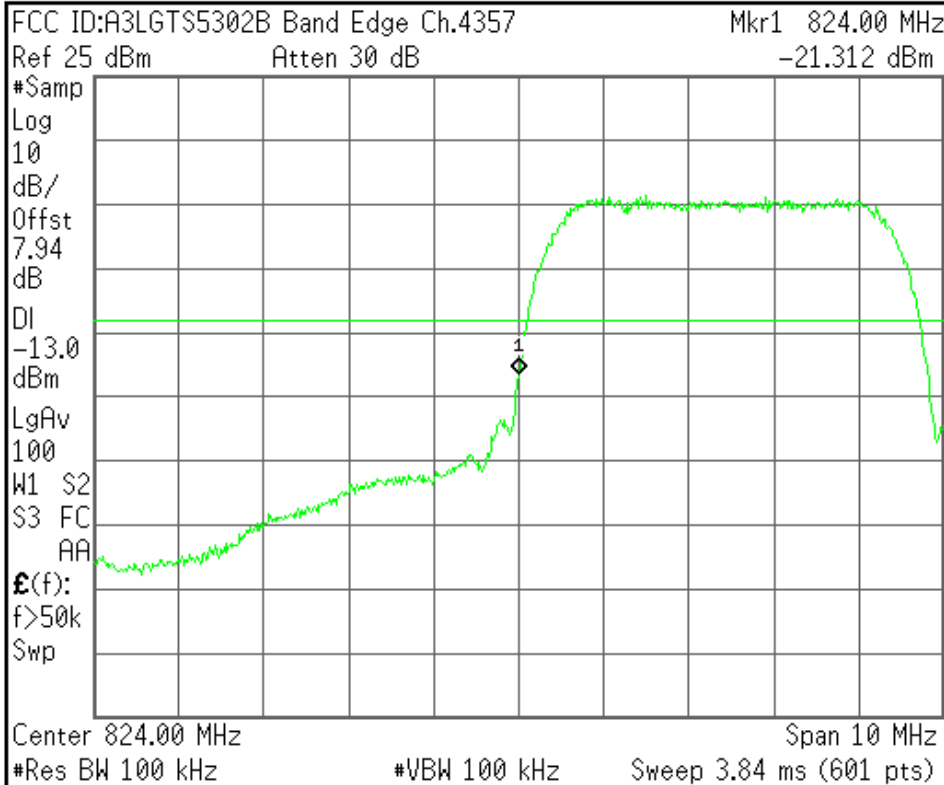

Center Freq
824.000000 MHz

Start Freq
819.000000 MHz

Stop Freq
829.000000 MHz

CF Step
1.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

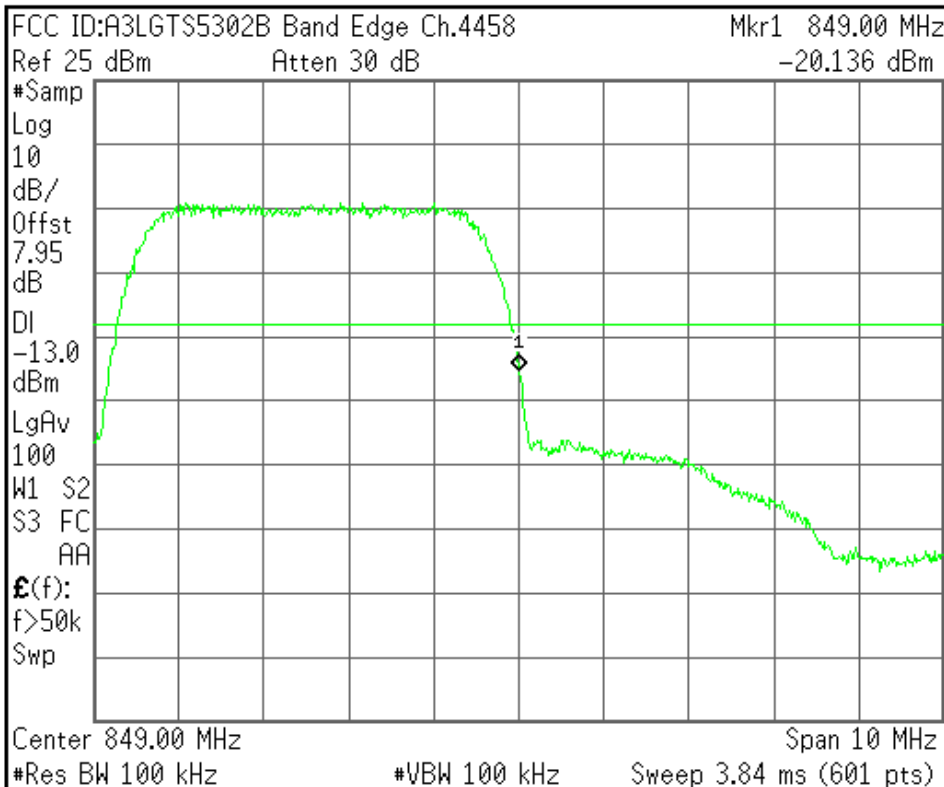

Center Freq
849.000000 MHz

Start Freq
844.000000 MHz

Stop Freq
854.000000 MHz

CF Step
1.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

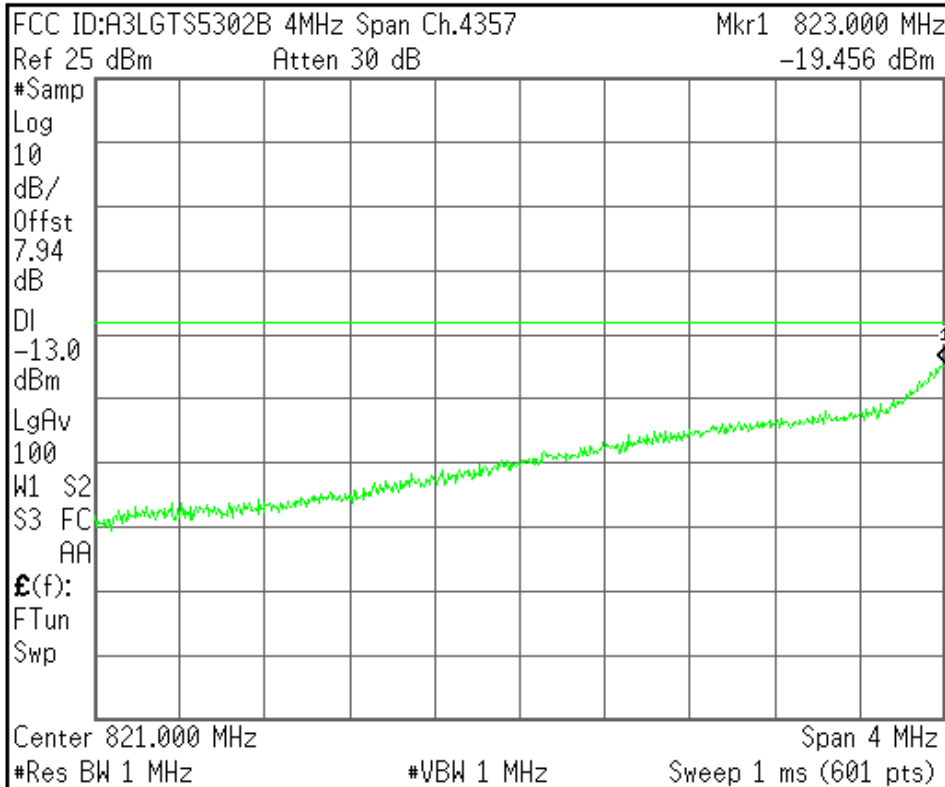

Center Freq
 821.000000 MHz

Start Freq
 819.000000 MHz

Stop Freq
 823.000000 MHz

CF Step
 400.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz


Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

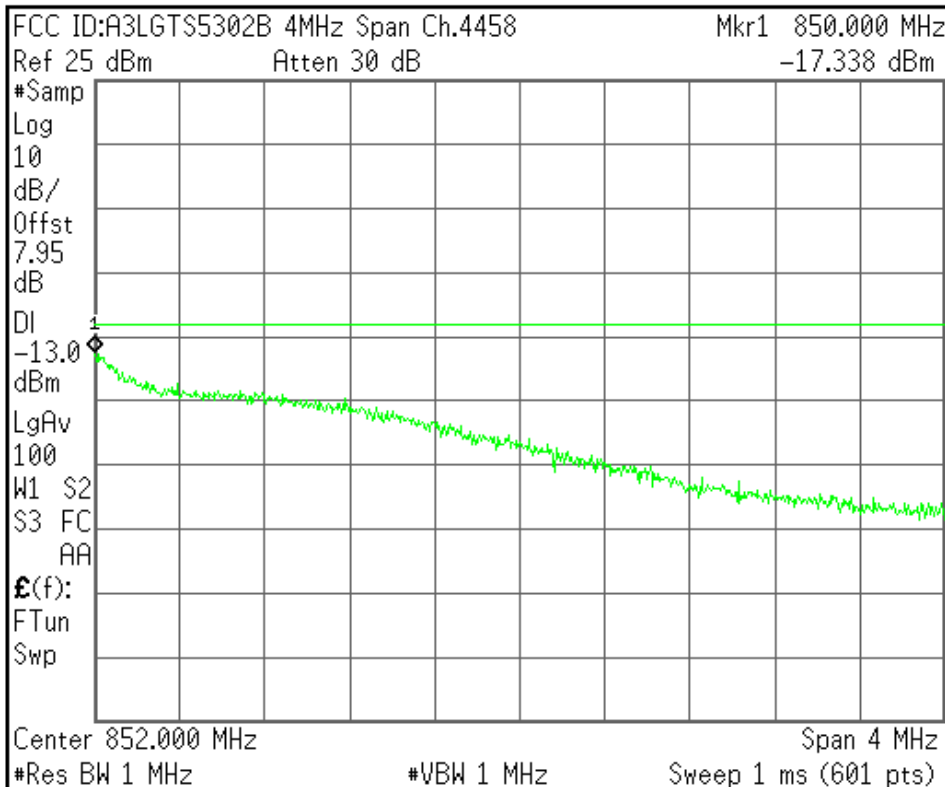

Center Freq
 852.000000 MHz

Start Freq
 850.000000 MHz

Stop Freq
 854.000000 MHz

CF Step
 400.000000 kHz
 Auto Man

Freq Offset
 0.00000000 Hz

Signal Track
 On Off

File Operation Status, C:\TEMP.GIF file saved