


	1	2	3	4	5	6	7	8																																																
A			Rev. No																																																					
B																																																								
C																																																								
D																																																								
E																																																								
F																																																								
G	Technical Description 1. Use 'AI / PDF' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Back side should be attached to release paper once adhesive is applied. 4. No letter should be blur/smeared 5. The production must be proceed after the approval of R&D Group 6. The product must be within approved sample's specification tolerance. 7. The product must be finished in a ROLL 8. Release paper must be unifiedn for material and color(blue) 9. Do not contain any substances which are specified in (OQA-2049).																																																							
H																																																								
I																																																								
J	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">MAT.</td> <td style="width: 45%;">WHITE POLYPROPYLENE 80μ</td> <td style="width: 15%;">FIN.</td> <td style="width: 25%;">Semi transparency OPP Laminating + UVP Coating</td> </tr> </table>								MAT.	WHITE POLYPROPYLENE 80μ	FIN.	Semi transparency OPP Laminating + UVP Coating																																												
MAT.	WHITE POLYPROPYLENE 80μ	FIN.	Semi transparency OPP Laminating + UVP Coating																																																					
K	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">TITLE</td> <td colspan="7"> GT-S5363 LABEL-MAIN </td> </tr> <tr> <td>UNIT</td> <td>mm</td> <td>DESIGNED</td> <td>CHECKED</td> <td>APPROVED</td> <td>PROJECTION</td> <td colspan="2"></td> </tr> <tr> <td>TOLERANCE</td> <td>+0.0 -0.1</td> <td>Hong Mun Ki</td> <td>Jo Kyeong Hwan</td> <td>Kim June Sop</td> <td></td> <td colspan="2"></td> </tr> <tr> <td>SCALE</td> <td>N/S</td> <td></td> <td></td> <td></td> <td>SHEET NO</td> <td colspan="2">1/1</td> </tr> <tr> <td>Vendor</td> <td>HSINS</td> <td>110303</td> <td>110303</td> <td>110303</td> <td colspan="3"></td> </tr> <tr> <td colspan="2" style="text-align: center;"> </td> <td>Doc. CODE</td> <td colspan="5">GH68-00000A</td> </tr> </table>								TITLE	GT-S5363 LABEL-MAIN							UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION			TOLERANCE	+0.0 -0.1	Hong Mun Ki	Jo Kyeong Hwan	Kim June Sop				SCALE	N/S				SHEET NO	1/1		Vendor	HSINS	110303	110303	110303						Doc. CODE	GH68-00000A				
TITLE	GT-S5363 LABEL-MAIN																																																							
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION																																																			
TOLERANCE	+0.0 -0.1	Hong Mun Ki	Jo Kyeong Hwan	Kim June Sop																																																				
SCALE	N/S				SHEET NO	1/1																																																		
Vendor	HSINS	110303	110303	110303																																																				
		Doc. CODE	GH68-00000A																																																					
L																																																								

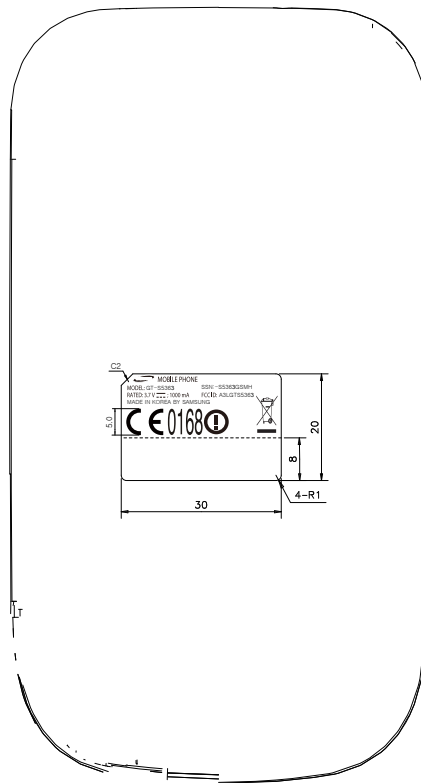

The label is placed inside the battery compartment