

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: April 15, 2013
Address: 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 443-742 Rep. of Korea	Test Site/Location: HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea
	Report No.: HCTR1304FR12
	HCT FRN: 0005866421

FCC ID: A3LGTS6310T

APPLICANT: SAMSUNG Electronics Co., Ltd.

FCC Model(s):	GT-S6310T
EUT Type:	850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §2
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900)
Max. RF Output Power:	0.497 W ERP GSM850 (26.96 dBm)/ 0.728 W EIRP GSM1900 (28.62 dBm)/ 0.087 W ERP WCDMA850 (19.41 dBm)
Emission Designator(s):	247 KGXW (GSM850)/ 248 KGXW (GSM1900)/ 4M19F9W (WCDMA850)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by
: Jae Chul Shin
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1304FR12	April 15, 2013	First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION.....	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	6
3.2 PEAK- TO- AVERAGE RATIO	6
3.3 OCCUPIED BANDWIDTH.	7
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	8
3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	9
4. LIST OF TEST EQUIPMENT	10
5. SUMMARY OF TEST RESULTS	11
6. SAMPLE CALCULATION	12
7. TEST DATA	13
7.1 EFFECTIVE RADIATED POWER OUTPUT (GSM / WCDMA)	13
7.2 EQUIVALENT ISOTROPIC RADIATED POWER (GSM)	14
7.3 RADIATED SPURIOUS EMISSIONS.....	15
7.3.1 RADIATED SPURIOUS EMISSIONS (GSM850).....	15
7.3.2 RADIATED SPURIOUS EMISSIONS (GSM1900).....	16
7.3.3 RADIATED SPURIOUS EMISSIONS (WCDMA850).....	17
7.4 PEAK-TO-AVERAGE RATIO	18
7.5 OCCUPIED BANDWIDTH	18
7.6 CONDUCTED SPURIOUS EMISSIONS	19
7.6.1 BAND EDGE.....	19
7.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	20
7.7.1 FREQUENCY STABILITY (GSM850)	20
7.7.2 FREQUENCY STABILITY (GSM1900)	21
7.7.3 FREQUENCY STABILITY (WCDMA850)	22
8. TEST PLOTS.....	23

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: SAMSUNG Electronics Co., Ltd.

Address: 129, Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 443-742 Rep. of Korea

FCC ID: A3LGTS6310T

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §22, §24, §2

EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only

FCC Model(s): GT-S6310T

Tx Frequency: 824.20 - 848.80 MHz (GSM850),
826.40 - 846.60 MHz (WCDMA850),
1 850.20 - 1 909.80 MHz (GSM1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850),
871.40 - 891.60 MHz (WCDMA850),
1 930.20 - 1 989.80 MHz (GSM1900)

Max. RF Output Power: 0.497 W ERP GSM850 (26.96 dBm)/ 0.728 W EIRP GSM1900 (28.62 dBm)/
0.087 W ERP WCDMA850 (19.41 dBm)

Emission Designator(s): 247 KGXW (GSM850)/ 248 KGXW (GSM1900)/
4M19F9W (WCDMA850)

Date(s) of Tests: April 05, 2013 ~ April 15, 2013

Antenna Specification Manufacturer: GALTRONICS Co, Ltd
Antenna type: Internal antenna
Peak Gain: GSM850/WCDMA850 : -14.35 dBi
GSM1900 : -0.19 dBi

2. INTRODUCTION

2.1. EUT DESCRIPTION

The SAMSUNG Electronics Co., Ltd. GT-S6310T 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only consists of GSM850, GSM1900, WCDMA850 and GPRS Class12.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri , Majang-Myeon, Icheon-si, 467-811, KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.


The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

3.2 PEAK- TO- AVERAGE RATIO

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

3.3 OCCUPIED BANDWIDTH.

Test set-up

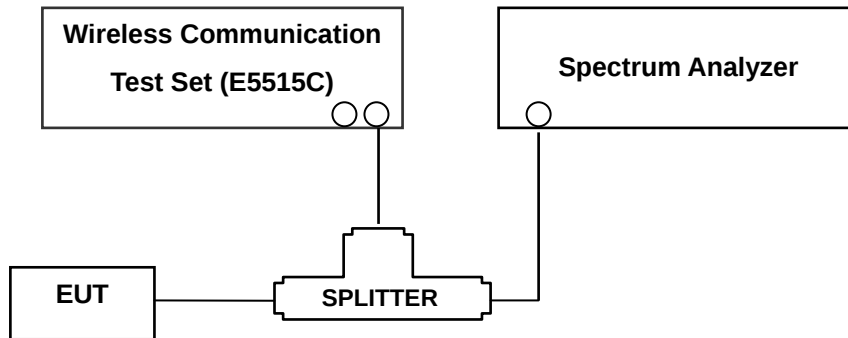

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The RBW settings used in the testing are greater than 1 % of the occupied bw. The 1 MHz RBW was used to scan from 30 MHz to 26 GHz. A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Measurements of all out of band are made on RBW = 1MHz and VBW $\geq$ 3 MHz in the worst case despite RBW = 100 kHz and VBW $\geq$ 300 kHz upon 1 GHz.

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto
- Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

- Band Edge Requirement : According to FCC 22.917 , 24.238(a) specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The center frequency of spectrum is the band edge frequency and span is 1MHz RB of the spectrum is 3KHz and VB of the spectrum is 3KHz (GSM)

The center frequency of spectrum is the band edge frequency and span is 5MHz RB of the spectrum is 100KHz and VB of the spectrum is 100KHz(WCDMA)


NOTES: The analyzer plot offsets were determined by below conditions.

- For GSM850/WCDMA850, total offset 28.0 dBm
= 20 dBm attenuator + 6 dBm Divider + 2.0 dBm RF cables.
- For GSM1900, total offset 29.4 dBm = 20 dBm attenuator + 6 dBm Divider + 3.4 dBm RF cables.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	FCC ID: A3LGTS6310T

3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

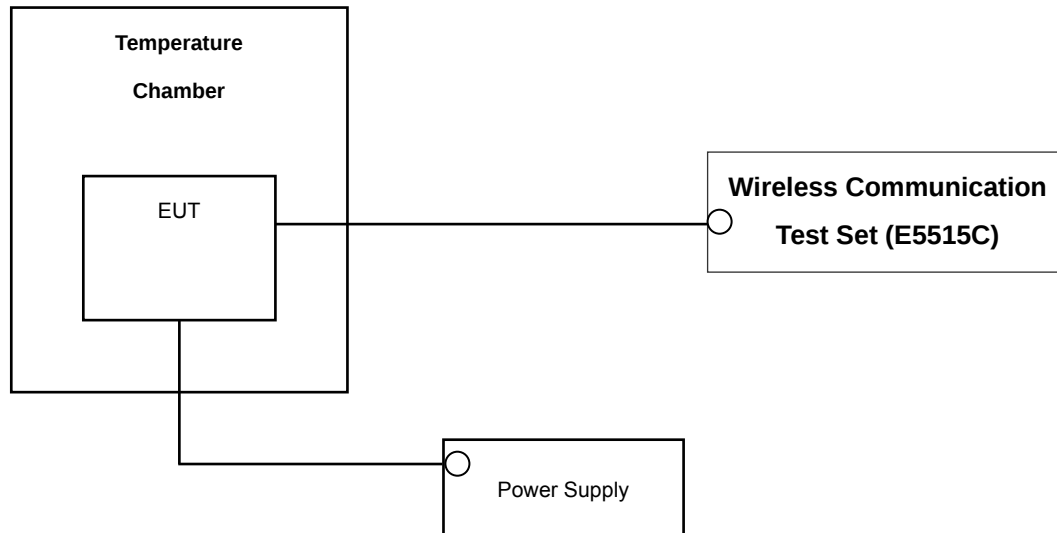

* Nominal Operating Voltage

Test Procedure

The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	E9327A/ Power Sensor	MY4442009	Annual	05/02/2013
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/11/2013
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	05/02/2013
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	05/02/2013
Hewlett Packard	11667B / Power Splitter	10126	Annual	11/07/2013
Digital	EP-3010/ Power Supply	3110117	Annual	11/07/2013
Schwarzbeck	UHA9105/ Dipole Antenna	91052371	Biennial	05/30/2013
Schwarzbeck	UHA9105/ Dipole Antenna	91052372	Biennial	05/30/2013
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	Annual	11/07/2013
Schwarzbeck	BBHA 9120D/ Horn Antenna	296	Biennial	02/20/2014
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	05/02/2013
WEINSCHTEL	ATTENUATOR	BR0592	Annual	11/07/2013
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/11/2013
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/14/2014

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS
2.1046	Conducted Output Power	-		PASS
24.232(d)	Peak- to- Average Ratio	$< 13 \text{ dB}$		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	$< 2.5 \text{ ppm}$		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	$< 7 \text{ Watts max. ERP}$	RADIATED	PASS
	Equivalent Isotropic Radiated Power	$< 2 \text{ Watts max. EIRP}$		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions		PASS

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER OUTPUT (GSM / WCDMA)

(GSM850 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
128	824.20	-21.89	37.88	-10.61	0.95	H	0.429	26.32
190	836.60	-21.72	38.46	-10.54	0.96	H	0.497	26.96
251	848.80	-21.96	38.46	-10.47	1.10	V	0.489	26.89

(WCDMA850 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	ERP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBd)			W	dBm
4132	826.40	-28.80	30.95	-10.59	0.95	H	0.087	19.41
4183	836.60	-30.61	29.57	-10.54	0.96	H	0.064	18.07
4233	846.60	-29.83	30.52	-10.48	1.11	V	0.078	18.93

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM850 (y plane ch 251) and WCDMA850 (y plane ch 4233) mode. Also worst case of detecting Antenna is horizontal polarization in GSM850 (vertical polarization) and WCDMA850 (vertical polarization) mode.

7.2 EQUIVALENT ISOTROPIC RADIATED POWER (GSM)

(GSM1900 Mode)

Ch./ Freq.		Measured	Substitute	Ant. Gain	C.L	Pol.	EIRP	
channel	Freq.(MHz)	Level(dBm)	LEVEL (dBm)	(dBi)			W	dBm
512	1,850.20	-12.59	19.44	10.02	1.41	H	0.638	28.05
661	1,880.00	-12.28	20.03	10.04	1.45	H	0.728	28.62
810	1,909.80	-12.27	19.98	10.05	1.44	H	0.723	28.59

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is in x plane in GSM1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 mode.

7.3 RADIATED SPURIOUS EMISSIONS

7.3.1 RADIATED SPURIOUS EMISSIONS (GSM850)

☐ MEASURED OUTPUT POWER: 26.96 dBm = 0.497 W
☐ MODULATION SIGNAL: GSM850
☐ DISTANCE: 3 meters
☐ LIMIT: $-(43 + 10 \log_{10}(W)) =$ - 39.96 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-34.79	7.05	-41.63	1.18	V	-35.76	-62.72
	2,472.60	-48.47	7.90	-52.22	1.57	V	-45.89	-72.85
	3,296.80	-	-	-	-	-	-	-
190 (836.6)	1,673.20	-38.61	7.22	-45.61	1.20	H	-39.59	-66.55
	2,509.80	-48.91	8.51	-52.70	1.65	V	-45.84	-72.80
	3,346.40	-51.56	10.09	-55.95	2.00	H	-47.86	-74.82
251 (848.8)	1,697.60	-40.08	7.34	-47.10	1.20	H	-40.96	-67.92
	2,546.40	-51.11	8.61	-54.65	1.65	V	-47.69	-74.65
	3,395.20	-54.91	10.22	-59.44	1.99	H	-51.21	-78.17

NOTES:

1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.3.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

■ MEASURED OUTPUT POWER: 28.62 dBm = 0.728 W
 ■ MODULATION SIGNAL: GSM1900
 ■ DISTANCE: 3 meters
 ■ LIMIT: - (43 + 10 log₁₀ (W)) = - 41.62 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-47.60	12.27	-52.34	2.19	H	-42.26	-70.88
	5,550.60	-43.05	13.40	-42.72	2.88	H	-32.20	-60.82
	7,400.80	-56.10	11.37	-45.81	3.29	H	-37.73	-66.35
661 (1880.0)	3,760.00	-45.91	12.31	-50.46	2.11	H	-40.26	-68.88
	5,640.00	-43.96	13.41	-43.29	2.92	H	-32.80	-61.42
	7,520.00	-55.52	11.55	-46.00	3.34	V	-37.79	-66.41
810 (1909.8)	3,819.60	-47.26	12.37	-51.74	2.14	V	-41.51	-70.13
	5,729.40	-41.80	13.42	-40.36	3.02	V	-29.96	-58.58
	7,639.20	-50.09	11.70	-40.33	3.13	V	-31.76	-60.38

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.3.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

☒ MEASURED OUTPUT POWER: 19.41 dBm = 0.087 W
☒ MODULATION SIGNAL: WCDMA850
☒ DISTANCE: 3 meters
☒ LIMIT: - (43 + 10 log₁₀ (W)) = - 32.41 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-54.20	7.11	-61.13	1.20	V	-55.22	-74.63
	2,479.20	-	-	-	-	-	-	-
	3,305.60	-49.31	9.95	-53.49	1.99	V	-45.53	-64.94
4,183 (836.6)	1,673.20	-	-	-	-	-	-	-
	2,509.80	-	-	-	-	-	-	-
	3,346.40	-53.96	10.09	-58.35	2.00	H	-50.26	-69.67
4,233 (846.6)	1,693.20	-	-	-	-	-	-	-
	2,539.80	-	-	-	-	-	-	-
	3,386.40	-49.77	10.19	-54.20	1.98	V	-45.99	-65.40

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5th Harmonic for all channel.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

7.4 PEAK-TO-AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown Page 27.

7.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	243.7815
	190	836.60	246.0280
	251	848.80	247.2102
GSM1900	512	1850.20	247.9162
	661	1880.00	244.0218
	810	1909.80	246.7160
WCDMA850	4132	826.40	4.1660
	4183	836.60	4.1742
	4233	846.60	4.1848

- Plots of the EUT's Occupied Bandwidth are shown Page 24 ~ 26, 27 ~ 28.

7.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	4.850650	-27.53
	190	4.204050	-27.70
	251	4.975400	-27.78
GSM1900	512	6.492150	-23.84
	661	6.992930	-23.81
	810	10.895510	-23.86
WCDMA850	4132	4.832760	-27.93
	4183	4.593700	-26.76
	4233	4.952040	-27.48

- Plots of the EUT's Conducted Spurious Emissions are shown Page 35 ~ 43.

7.6.1 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 29 ~ 34.

7.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.7.1 FREQUENCY STABILITY (GSM850)

- ☐ OPERATING FREQUENCY: 836,600,000 Hz
☐ CHANNEL: 190
☐ REFERENCE VOLTAGE: 3.7 VDC
☐ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 600 028	0	0.000 000	0.000
100%		-30	836 599 995	-32.58	-0.000 004	-0.039
100%		-20	836 599 995	-33.11	-0.000 004	-0.040
100%		-10	836 599 994	-34.17	-0.000 004	-0.041
100%		0	836 599 997	-31.20	-0.000 004	-0.037
100%		+10	836 599 998	-30.20	-0.000 004	-0.036
100%		+30	836 599 997	-30.90	-0.000 004	-0.037
100%		+40	836 599 994	-34.12	-0.000 004	-0.041
100%		+50	836 599 996	-32.00	-0.000 004	-0.038
115%	4.255	+20	836 599 993	-34.63	-0.000 004	-0.041
Batt. Endpoint	3.400	+20	836 599 993	-34.66	-0.000 004	-0.041

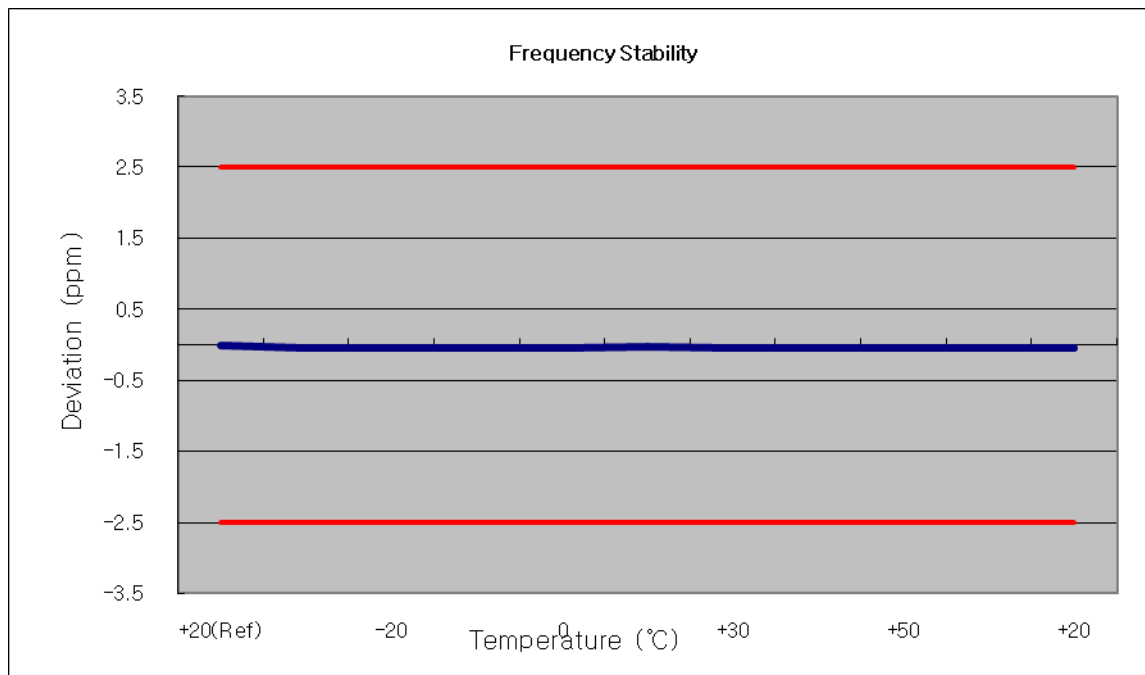

7.7.2 FREQUENCY STABILITY (GSM1900)

☐ OPERATING FREQUENCY: 1880,000,000 Hz
☐ CHANNEL: 661
☐ REFERENCE VOLTAGE: 3.7 VDC
☐ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	1880 000 032	0	0.000 000	0.000
100%		-30	1879 999 999	-32.86	-0.000 002	-0.017
100%		-20	1879 999 998	-33.46	-0.000 002	-0.018
100%		-10	1880 000 001	-30.90	-0.000 002	-0.016
100%		0	1879 999 995	-36.46	-0.000 002	-0.019
100%		+10	1880 000 000	-31.84	-0.000 002	-0.017
100%		+30	1879 999 999	-32.83	-0.000 002	-0.017
100%		+40	1880 000 000	-32.13	-0.000 002	-0.017
100%		+50	1880 000 002	-30.06	-0.000 002	-0.016
115%	4.255	+20	1879 999 999	-32.56	-0.000 002	-0.017
Batt. Endpoint	3.400	+20	1879 999 998	-33.30	-0.000 002	-0.018

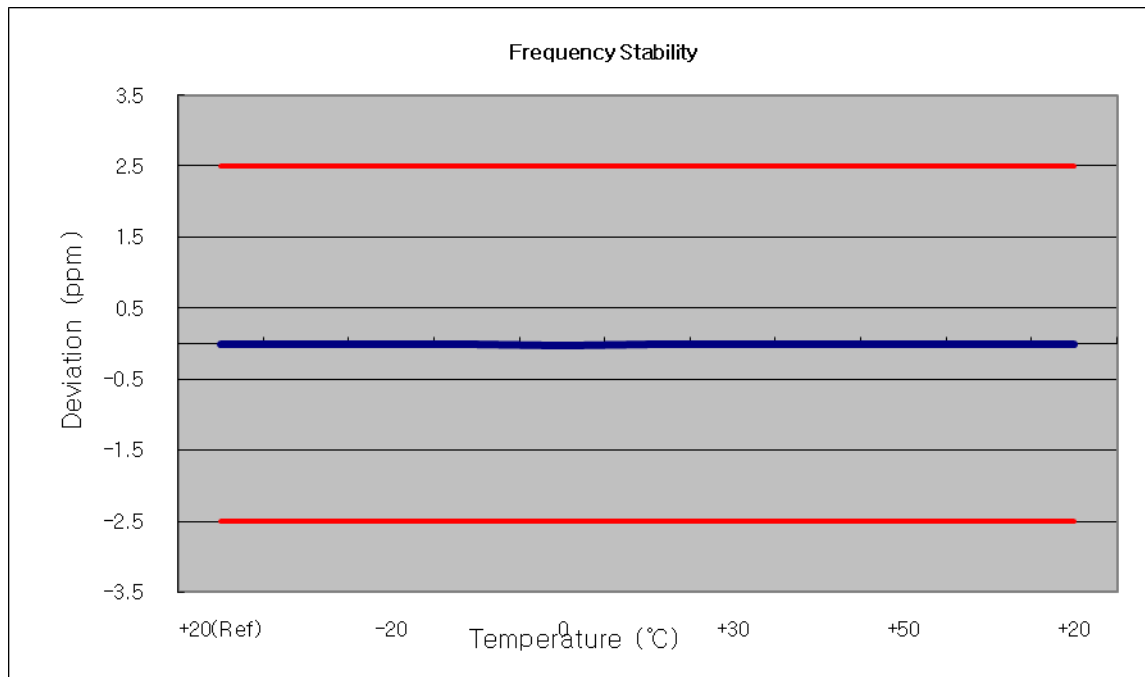

7.7.3 FREQUENCY STABILITY (WCDMA850)

■ OPERATING FREQUENCY: 836,600,000 Hz
 ■ CHANNEL: 4183
 ■ REFERENCE VOLTAGE: 3.7 VDC
 ■ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.700	+20(Ref)	836 599 975	0	0.000 000	0.000
100%		-30	836 600 020	19.94	0.000 002	0.024
100%		-20	836 600 021	20.66	0.000 002	0.025
100%		-10	836 600 015	15.07	0.000 002	0.018
100%		0	836 600 016	16.25	0.000 002	0.019
100%		+10	836 600 022	22.19	0.000 003	0.027
100%		+30	836 600 023	22.87	0.000 003	0.027
100%		+40	836 599 986	-13.55	-0.000 002	-0.016
100%		+50	836 600 024	24.17	0.000 003	0.029
115%	4.255	+20	836 599 984	-16.11	-0.000 002	-0.019
Batt. Endpoint	3.400	+20	836 599 990	-10.05	-0.000 001	-0.012

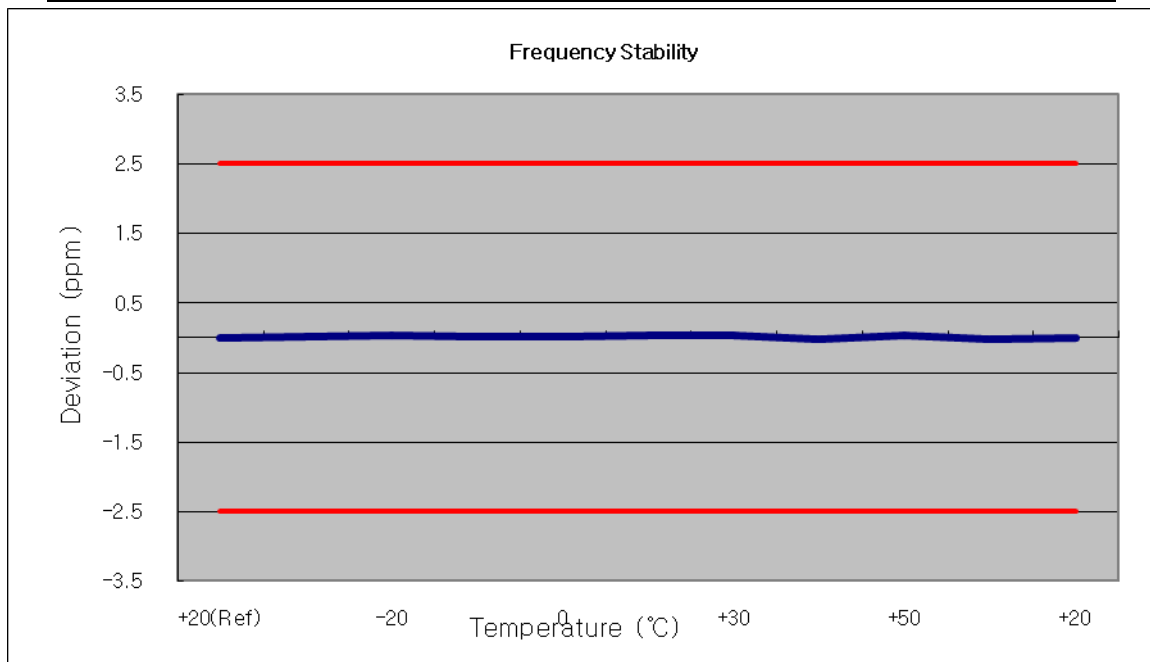


8. TEST PLOTS

■ GSM850 MODE (128 CH.) Occupied Bandwidth




■ GSM850 MODE (190 CH.) Occupied Bandwidth

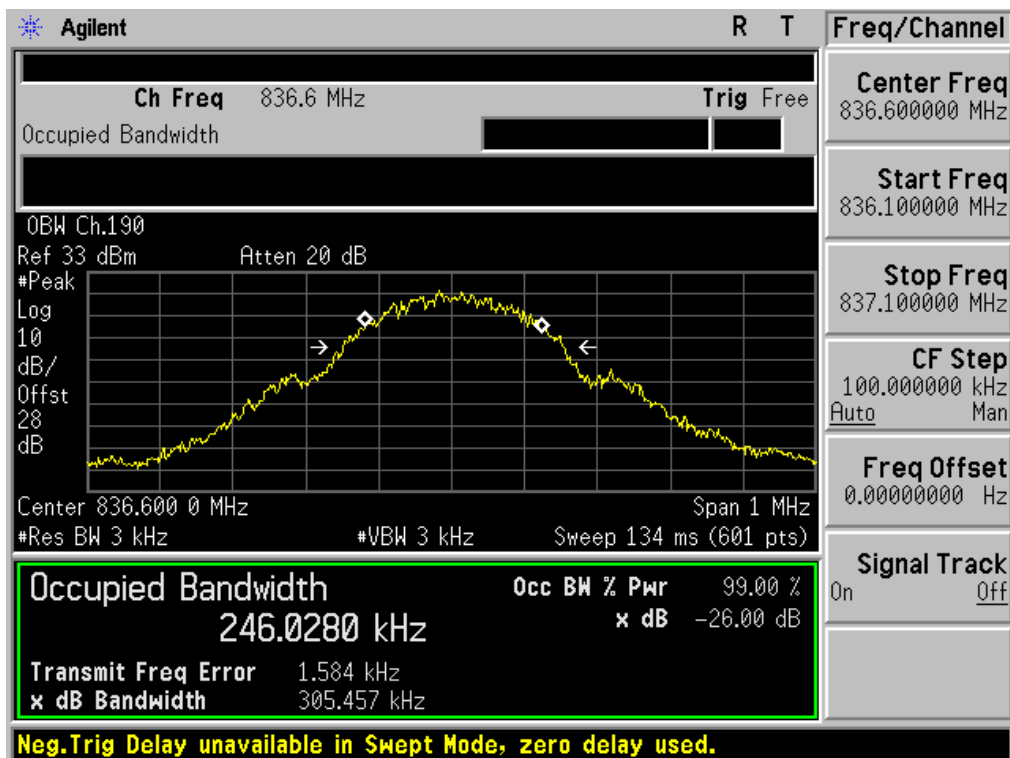


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM850 MODE (251 CH.) Occupied Bandwidth

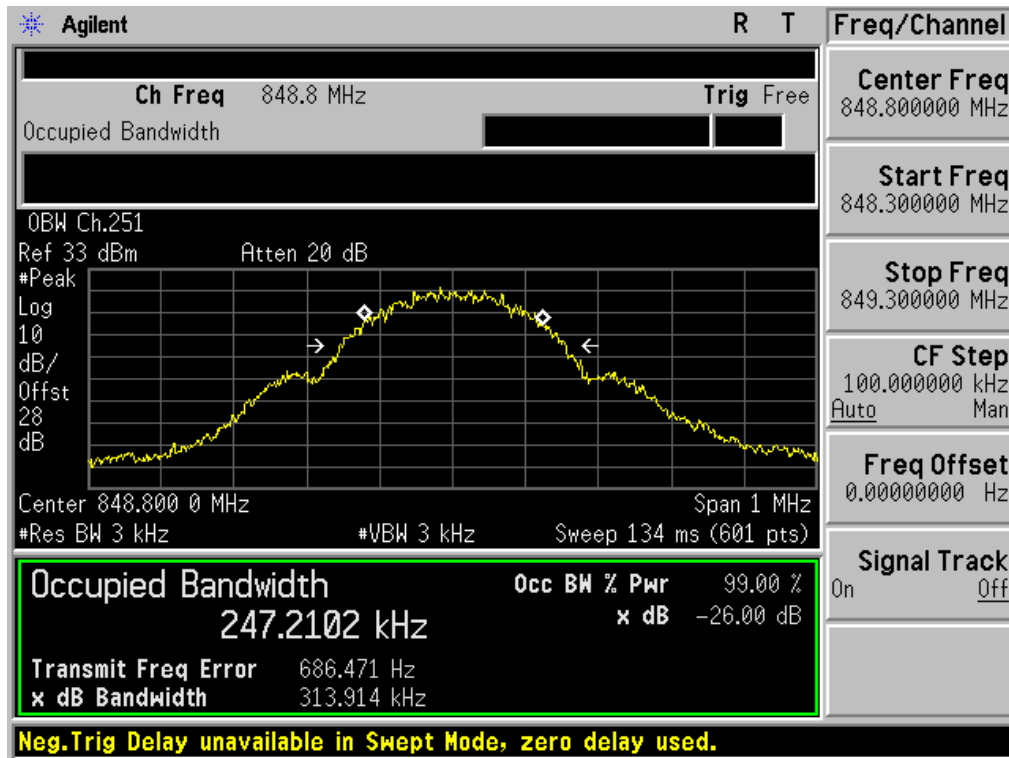


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

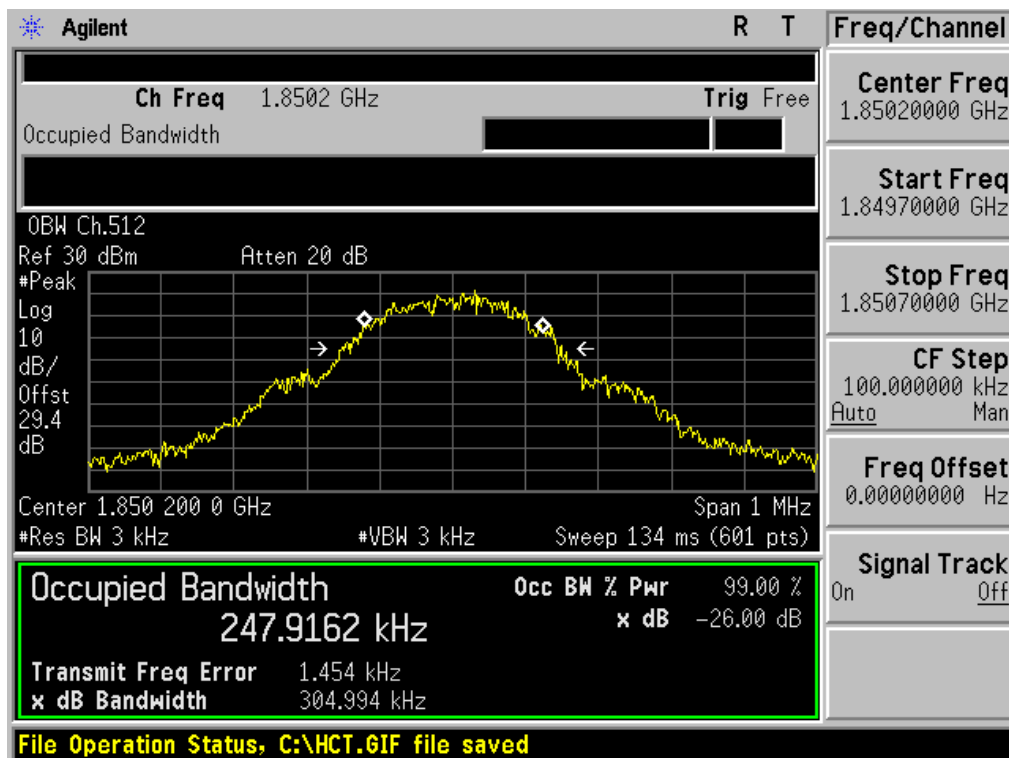


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM1900 MODE (661 CH.) Occupied Bandwidth

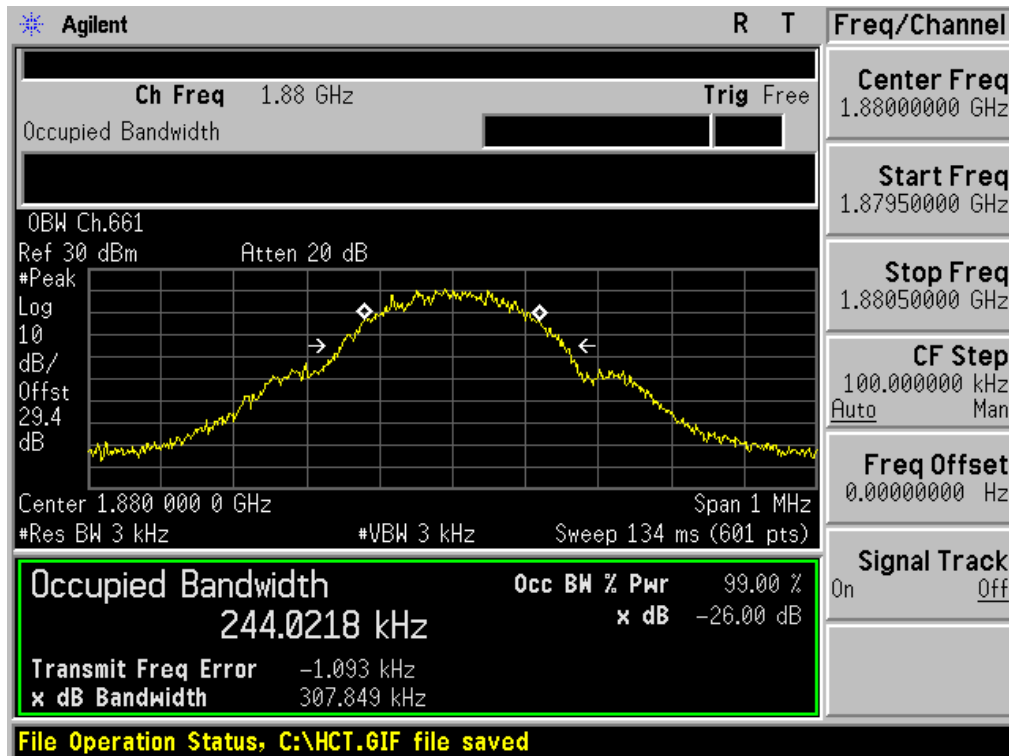


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

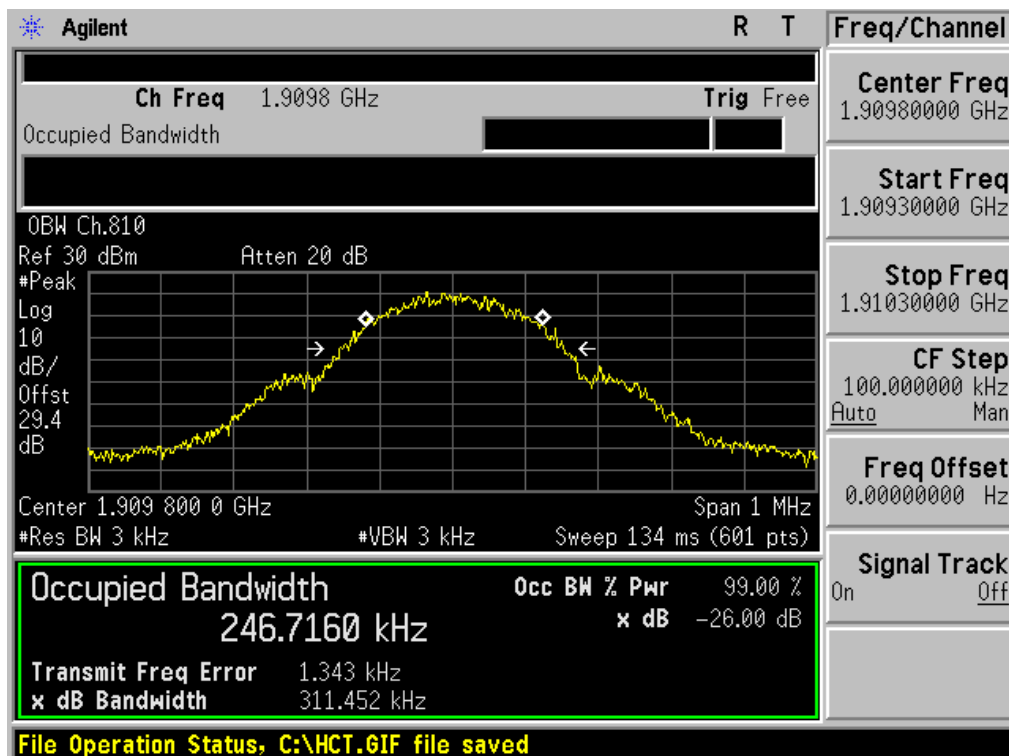


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio

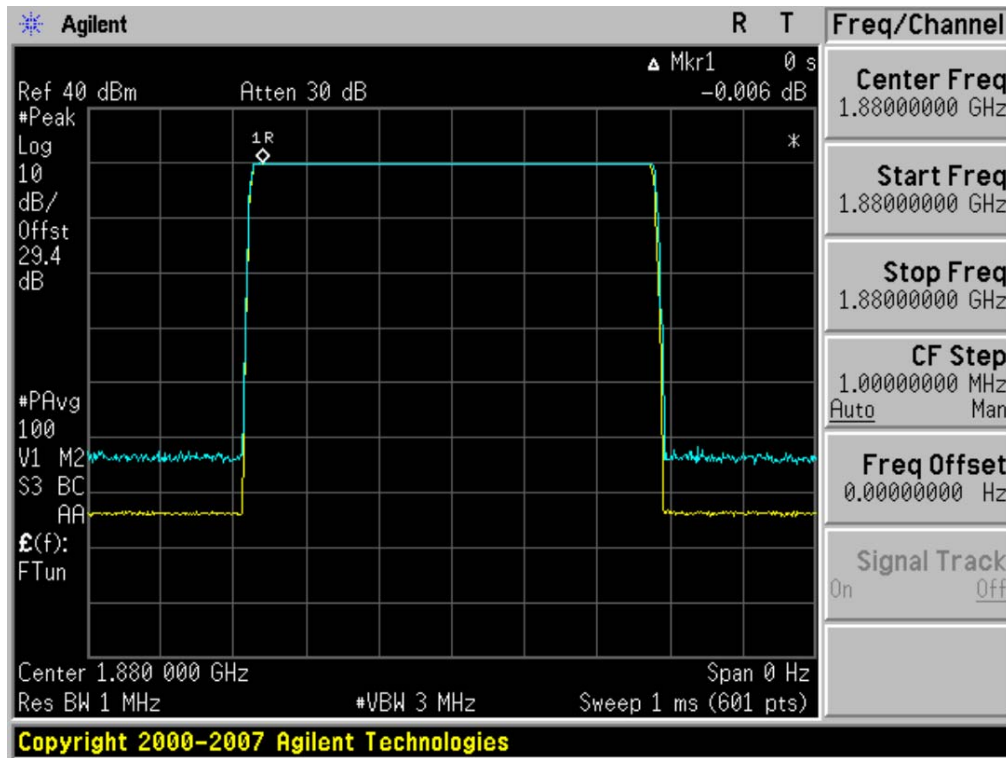


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

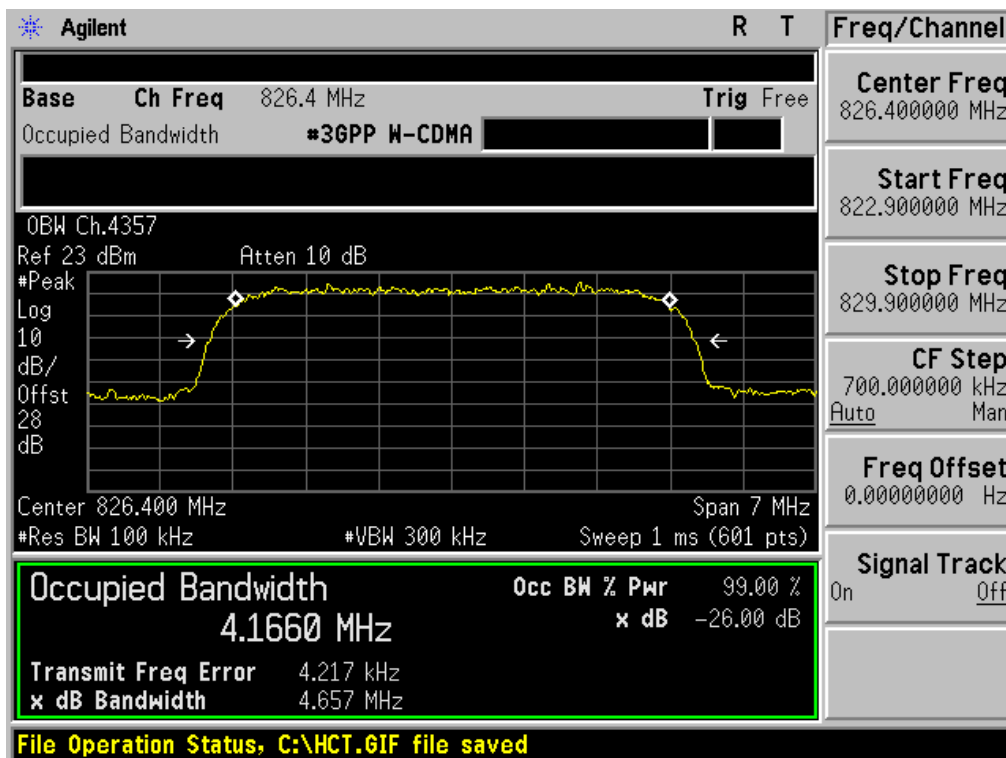


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

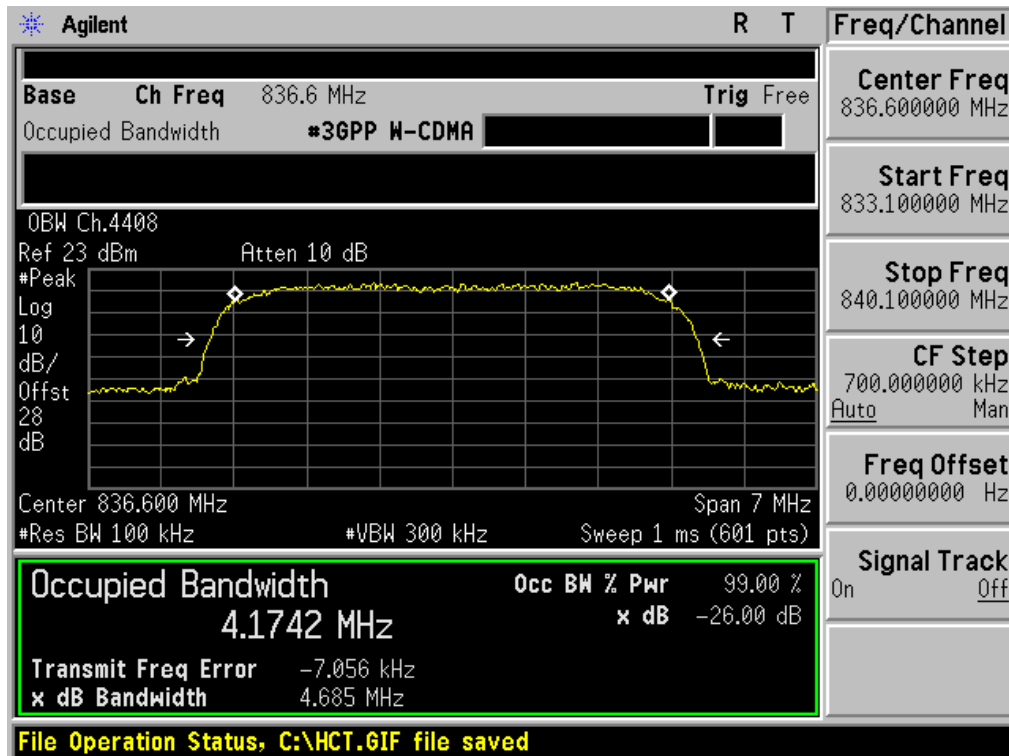


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

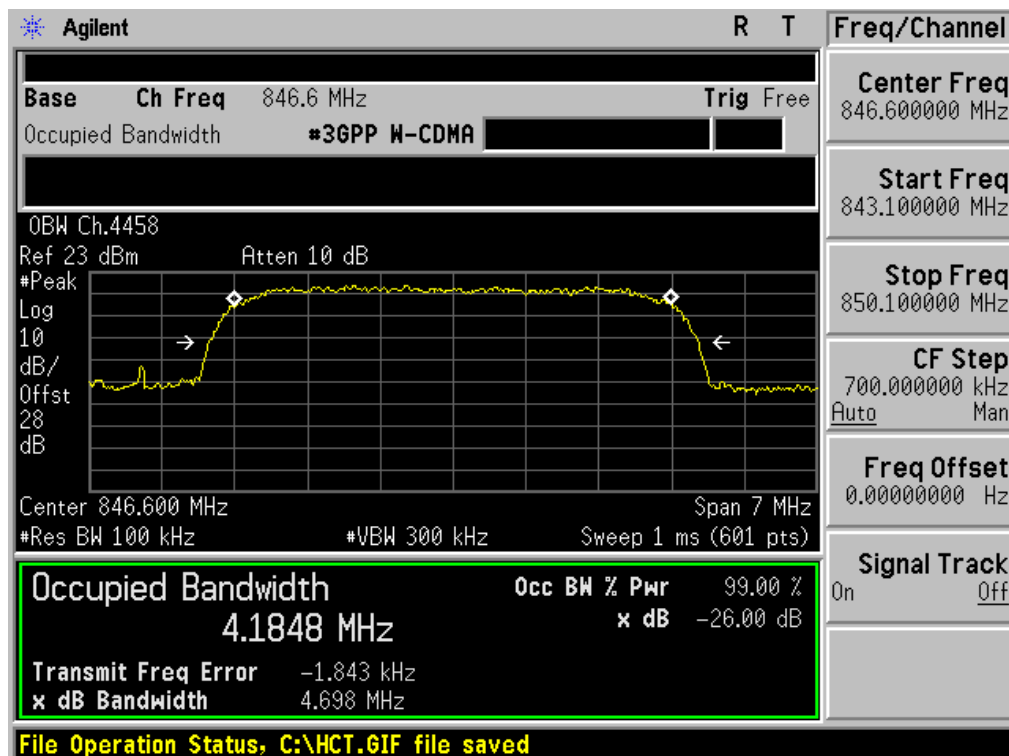


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr
			FCC ID: A3LGTS6310T

■ GSM850 MODE (128 CH.) Block Edge 1

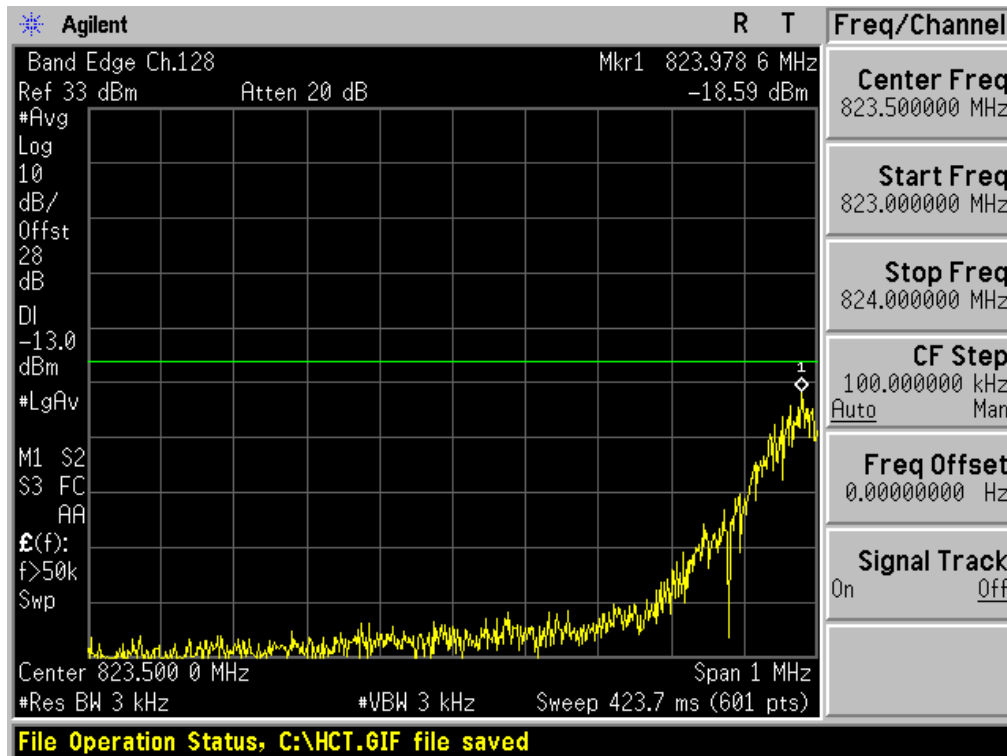


■ GSM850 MODE (128 CH.) Block Edge 2

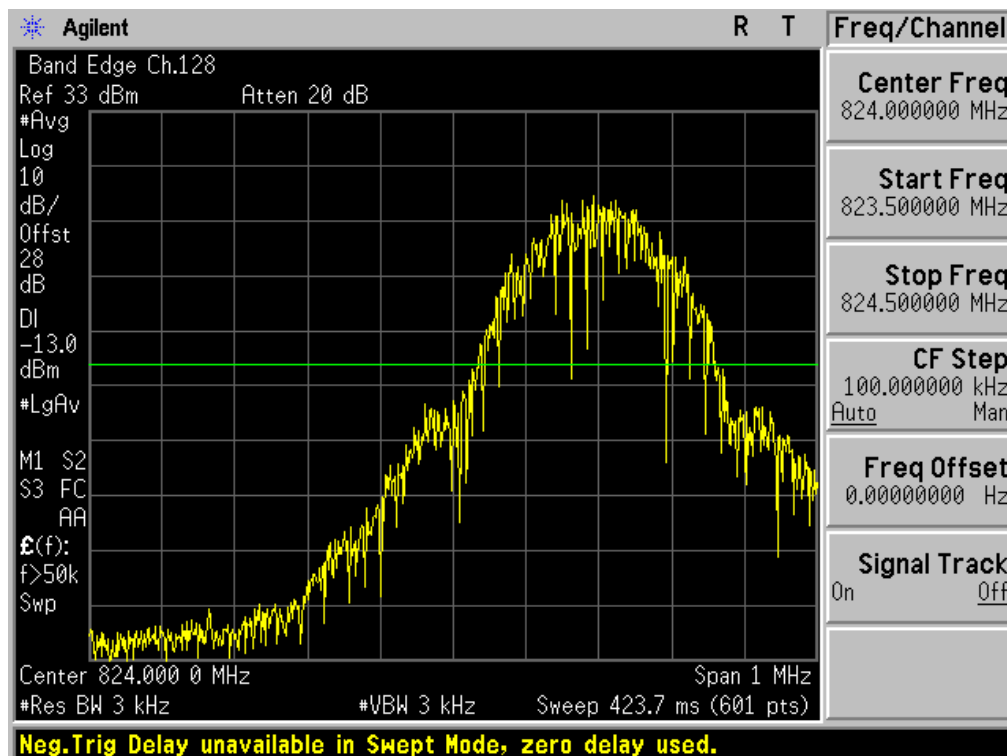


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM850 MODE (251 CH.) Block Edge 1

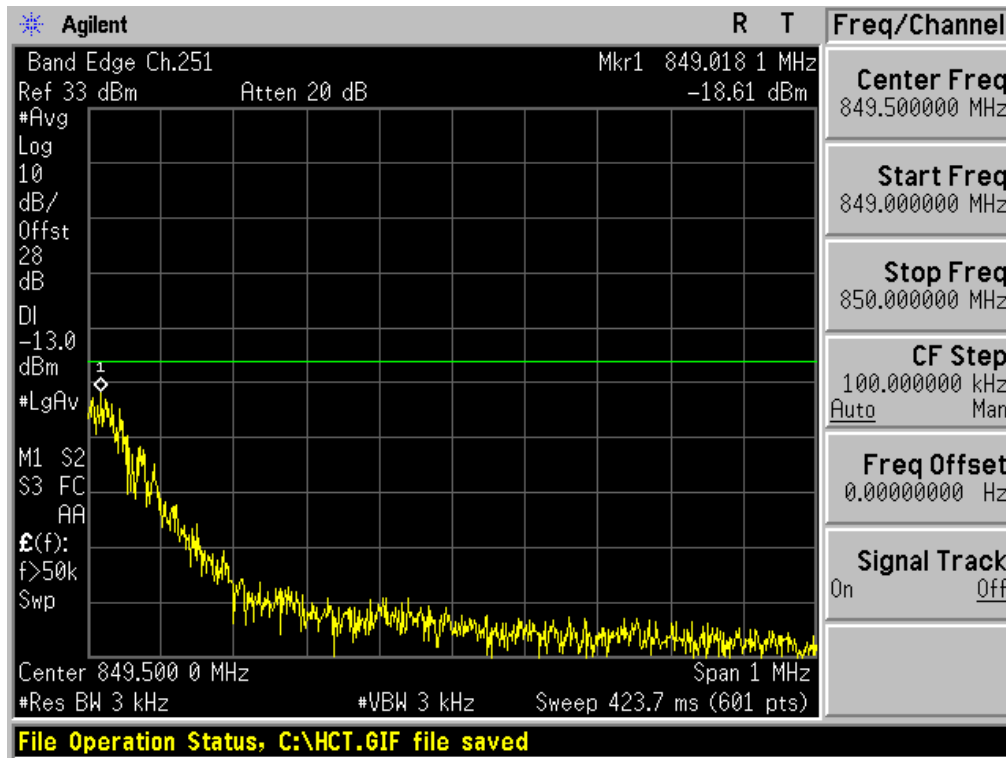


■ GSM850 MODE (251 CH.) Block Edge 2

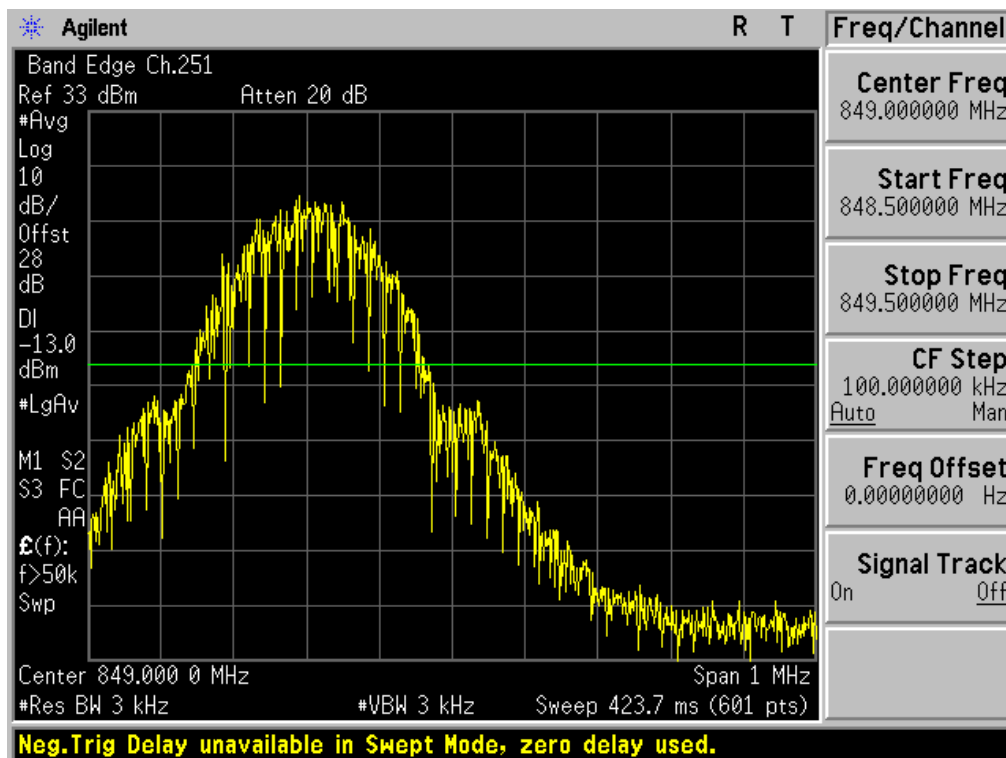


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM1900 MODE (512 CH.) Block Edge 1

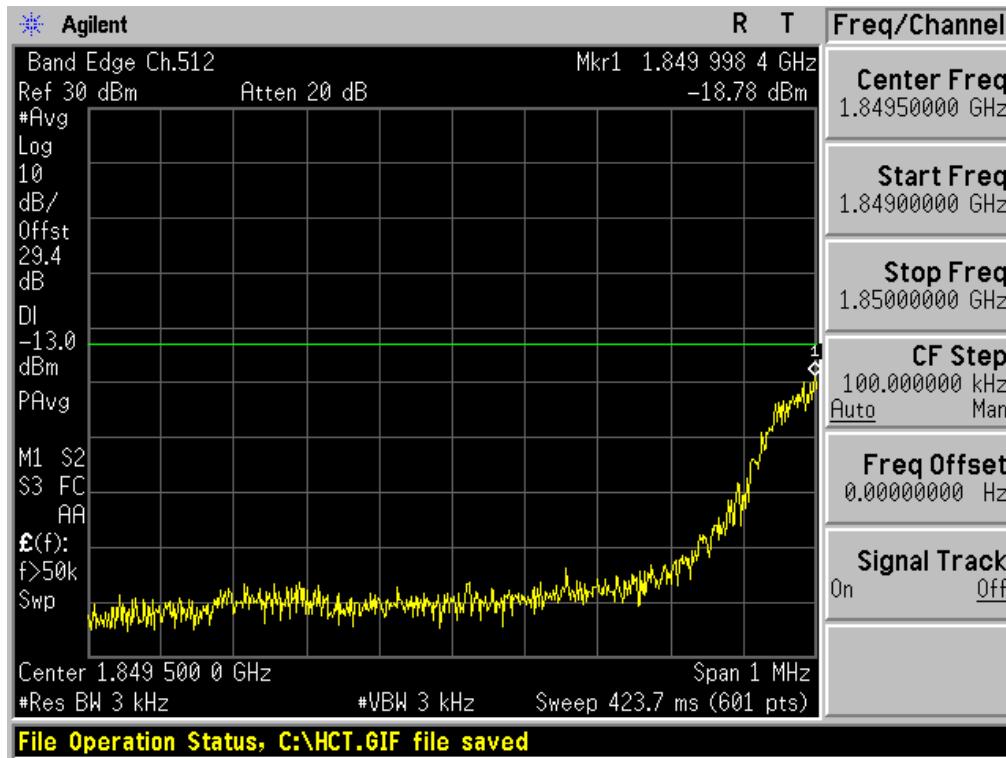


■ GSM1900 MODE (512 CH.) Block Edge 2

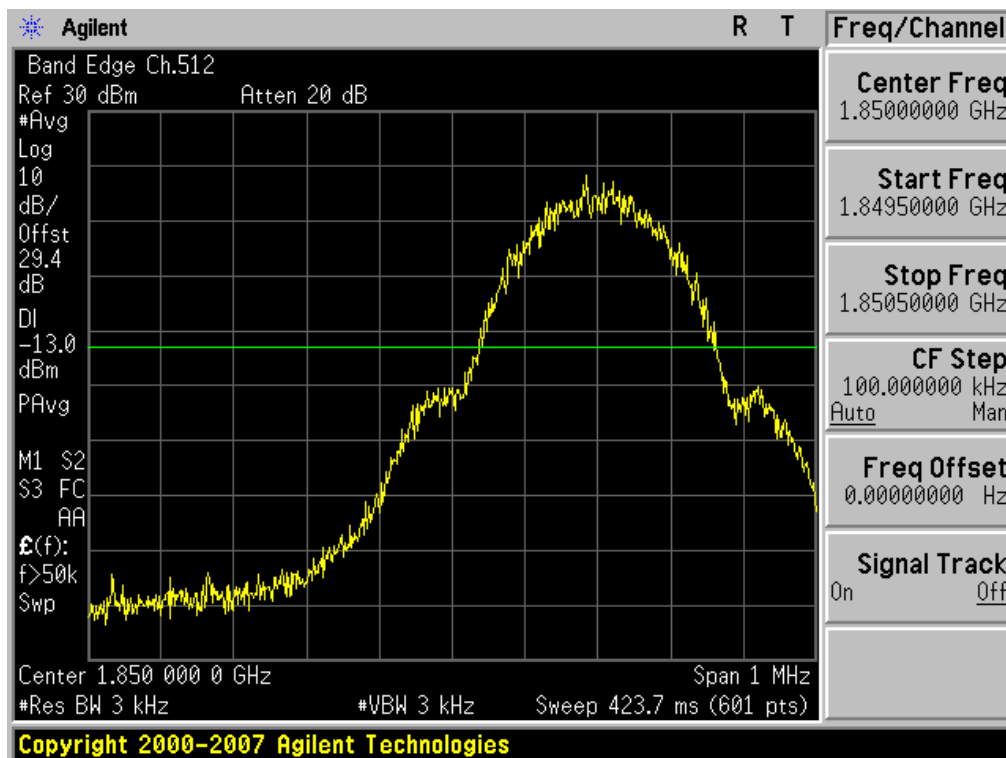


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM1900 MODE (810 CH.) Block Edge 1

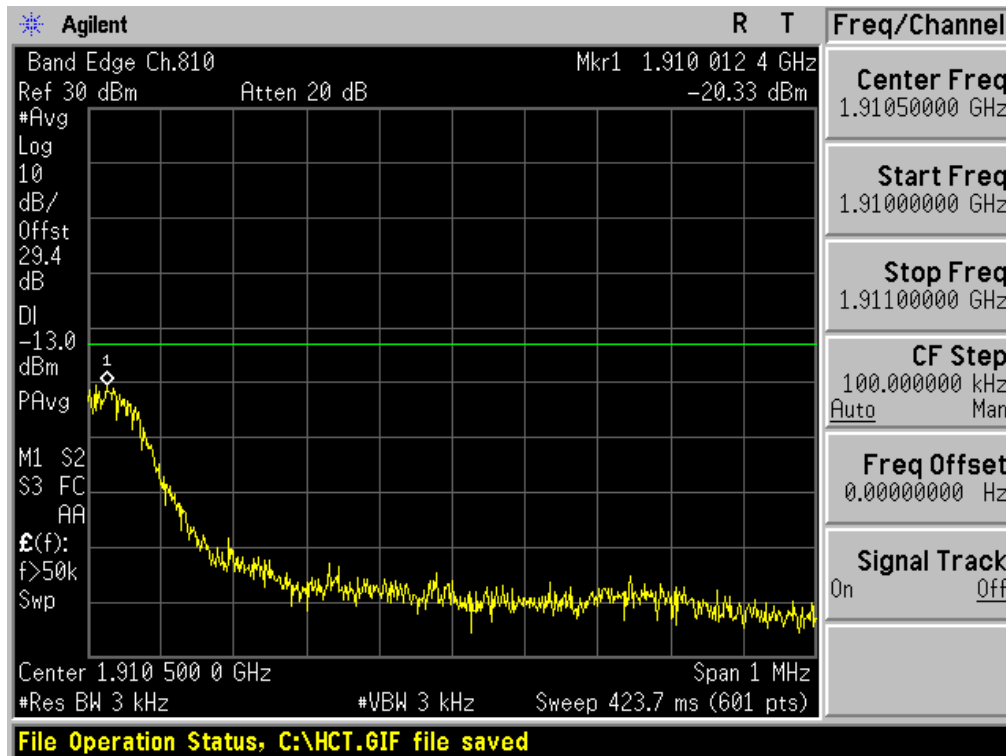


■ GSM1900 MODE (810 CH.) Block Edge 2

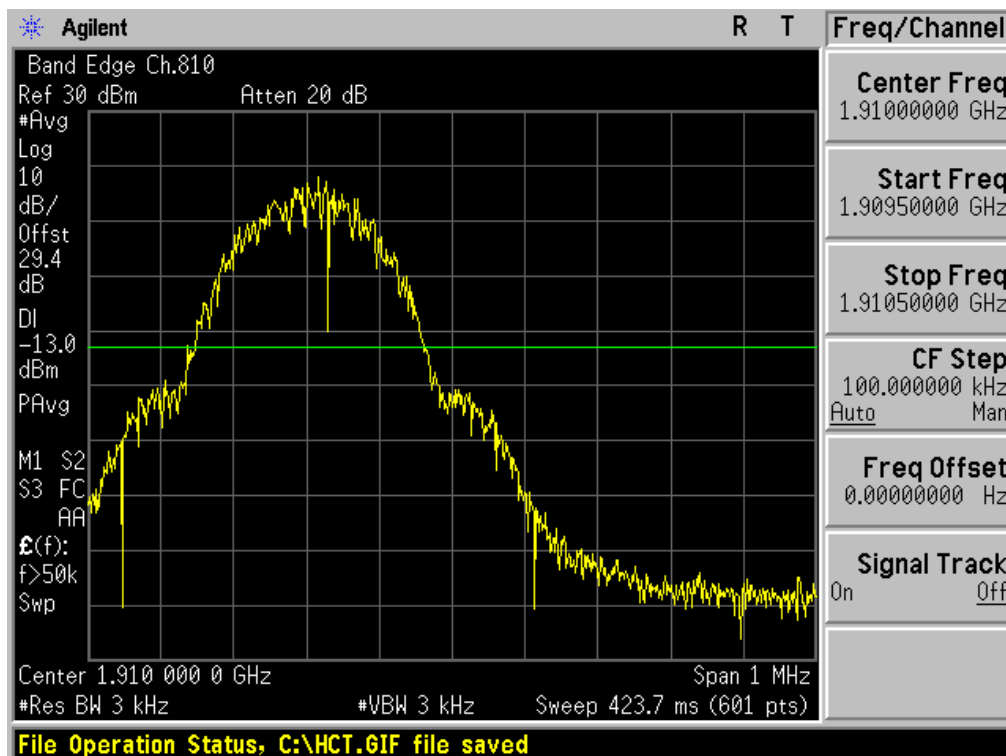


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ WCDMA850 MODE (4132 CH.) Block Edge

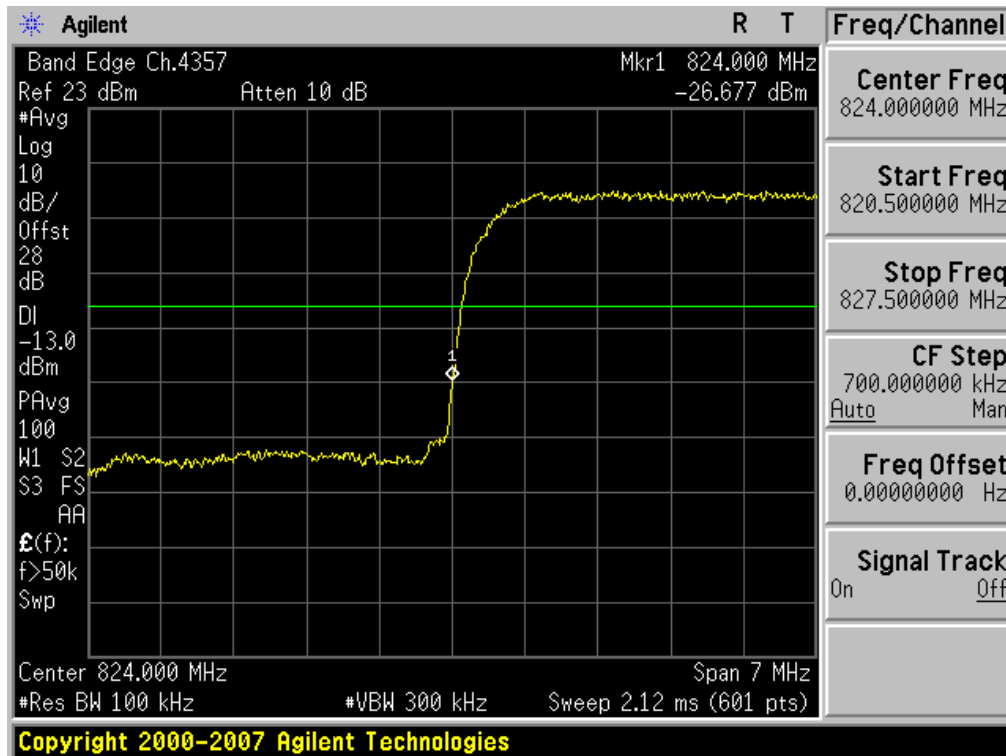


■ WCDMA850MODE (4233 CH.) Block Edge

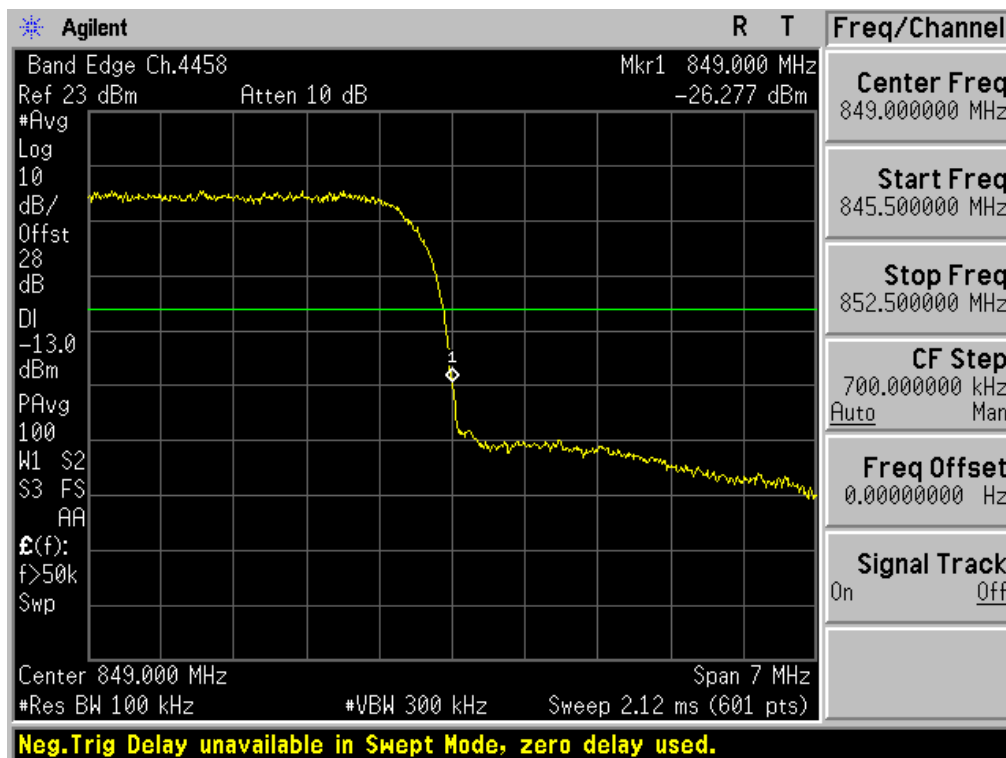


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ WCDMA850 MODE (4132 CH.) – 4 MHz Span

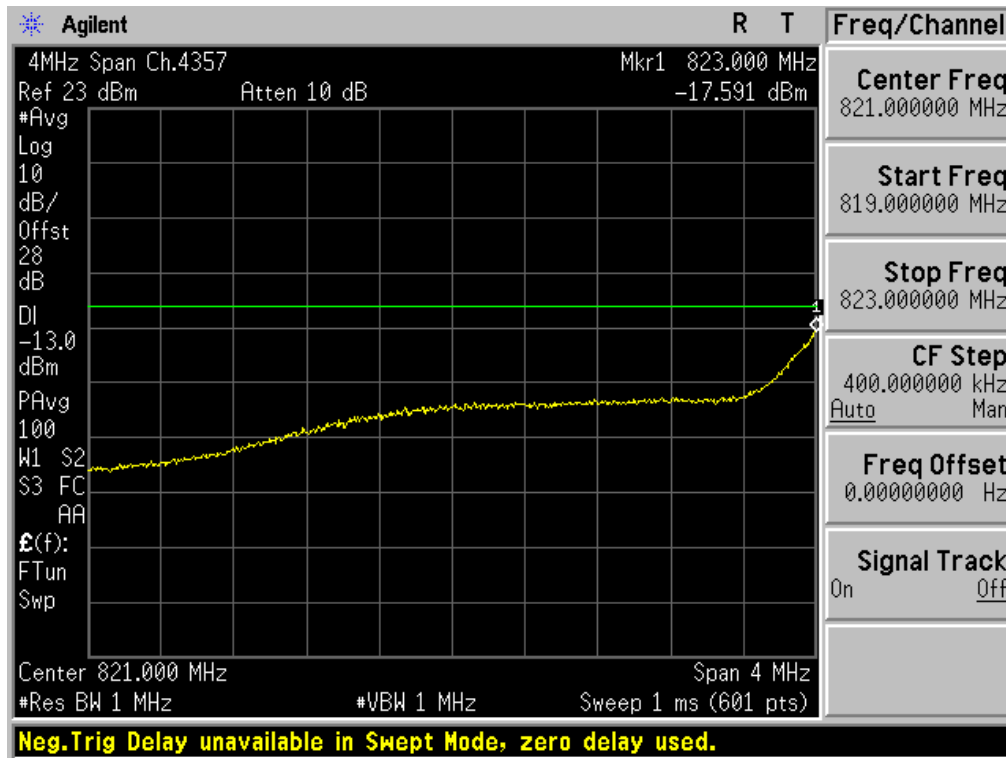


■ WCDMA850MODE (4233 CH.) – 4 MHz Span

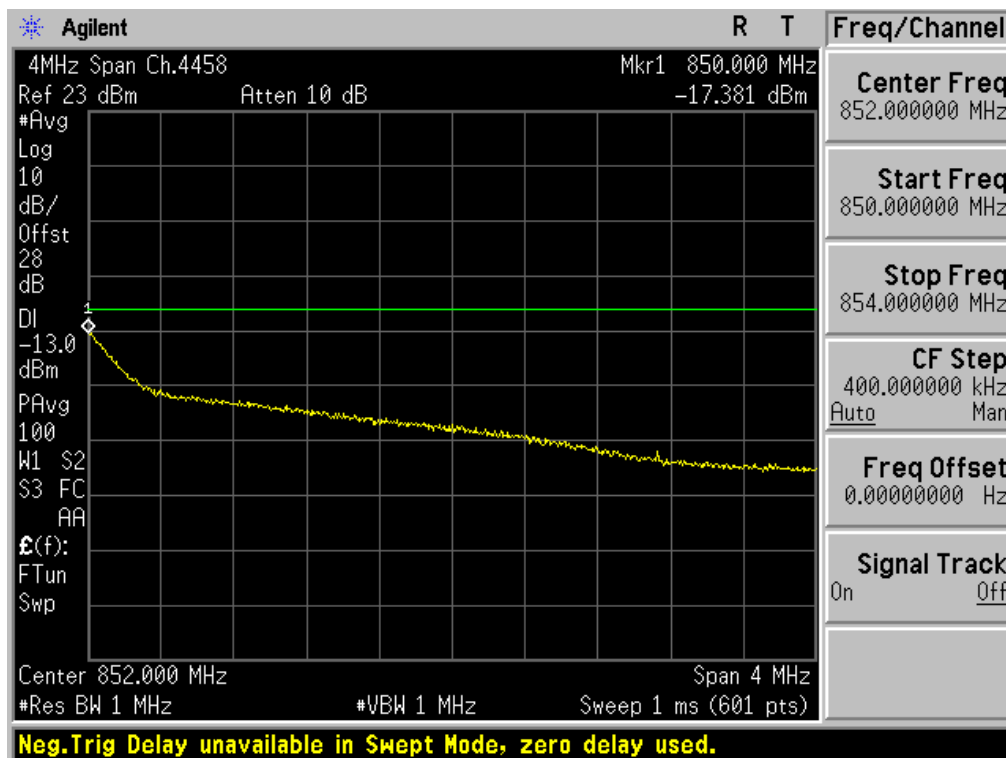

FCC CERTIFICATION REPORT


Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

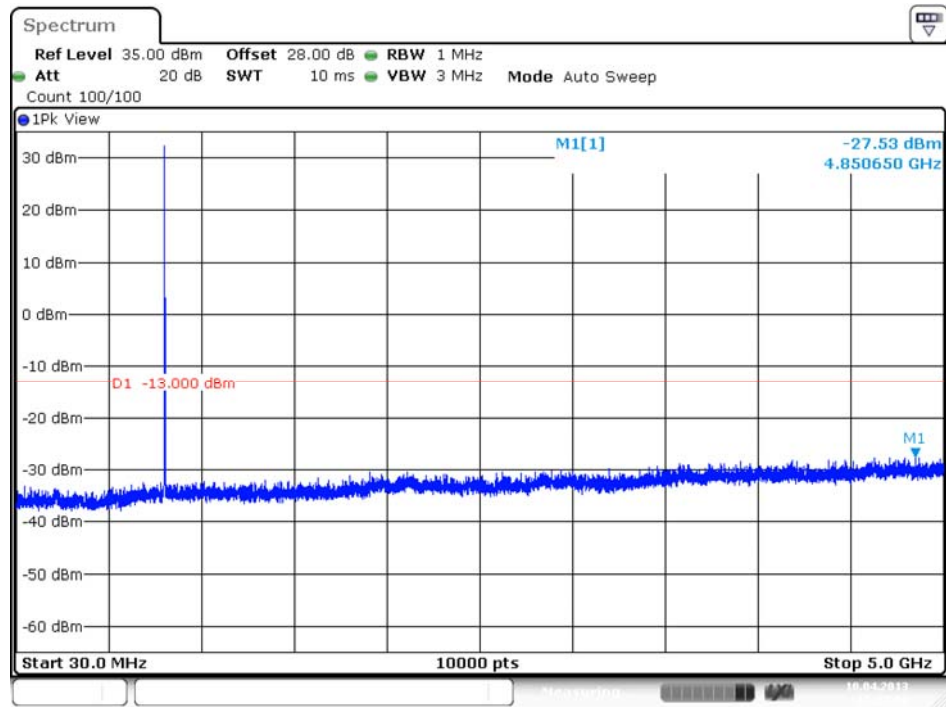

Date: 10.APR.2013 15:21:01

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

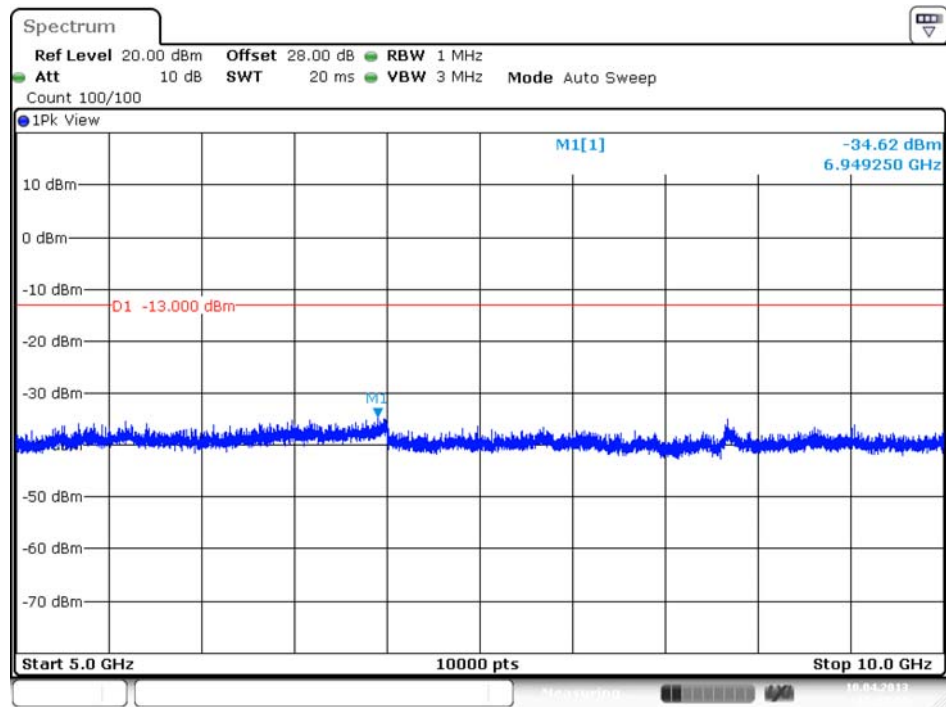


Date: 10.APR.2013 15:21:17


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

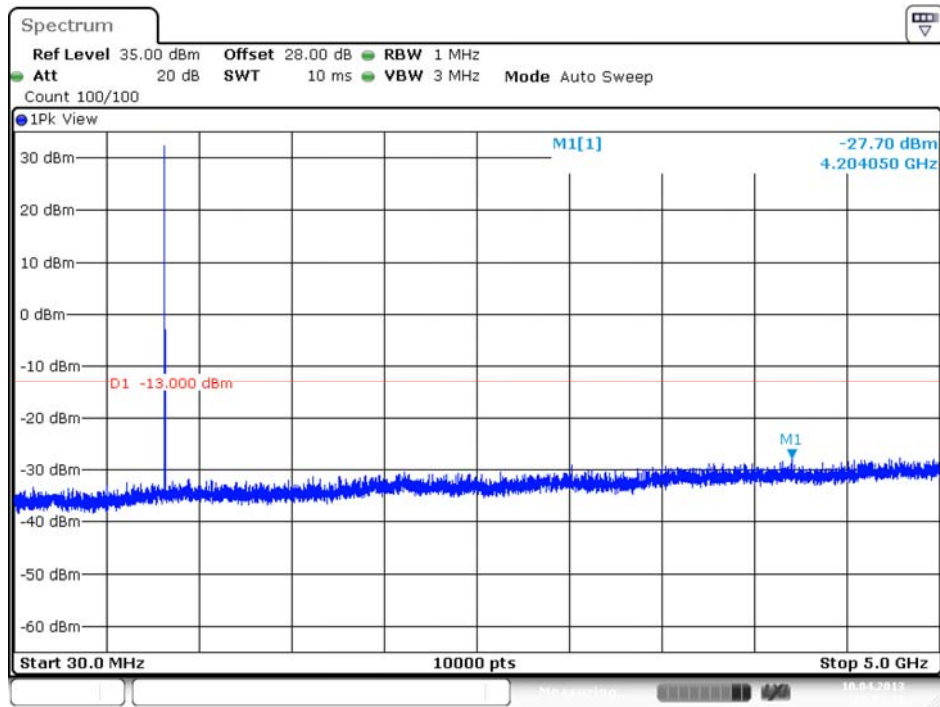


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2

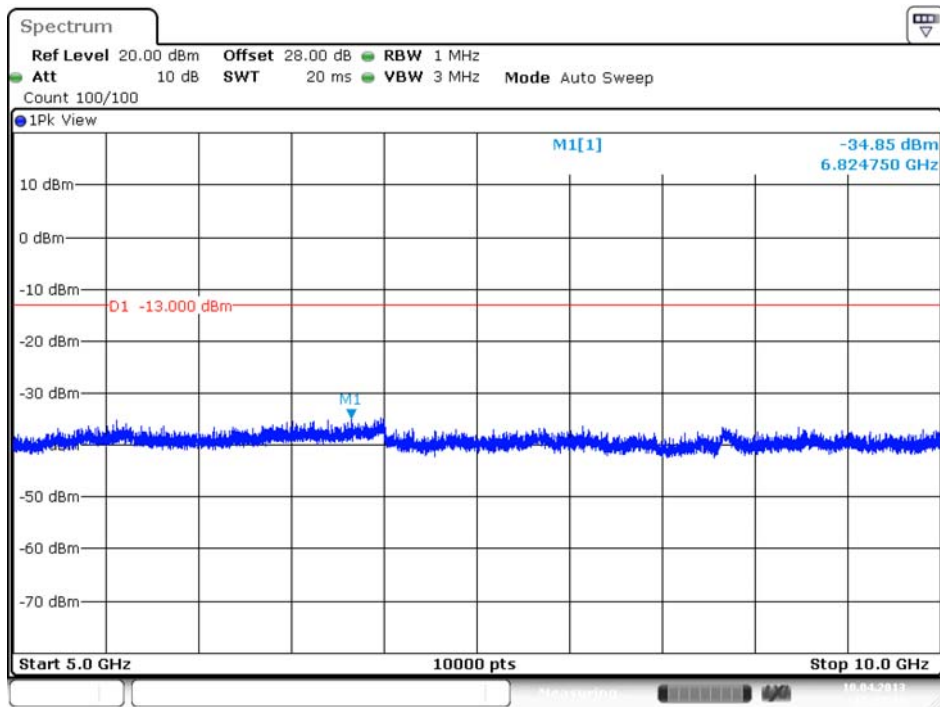


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

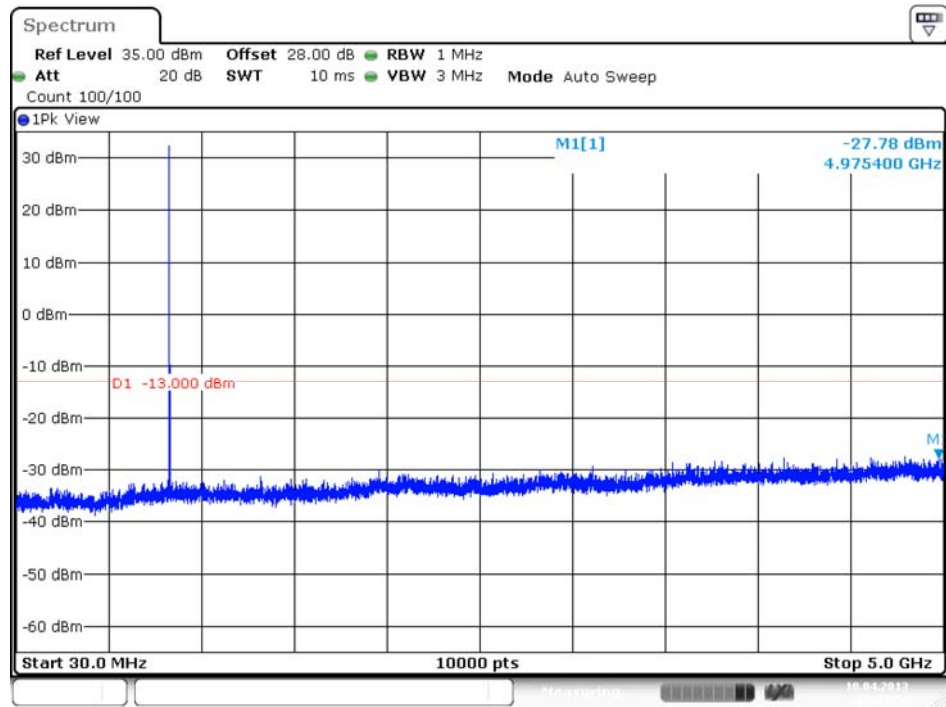


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

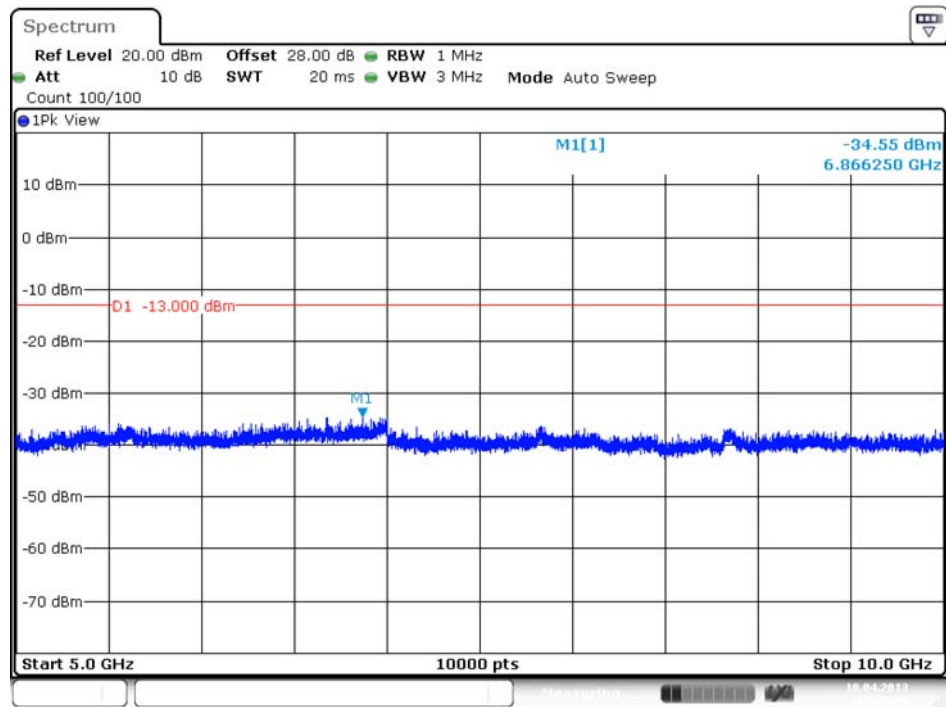


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

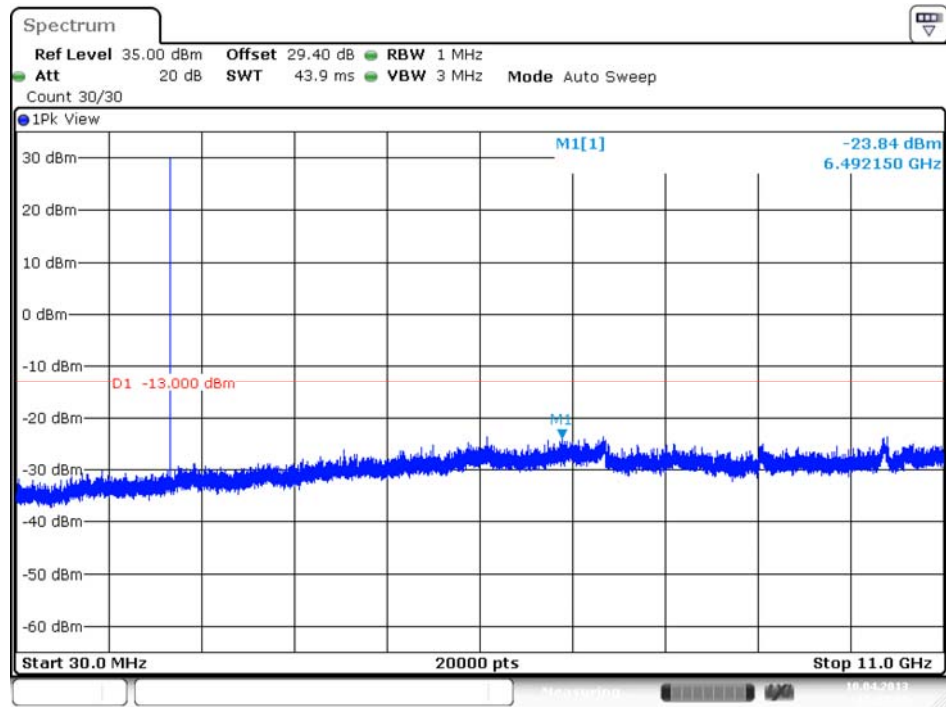


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

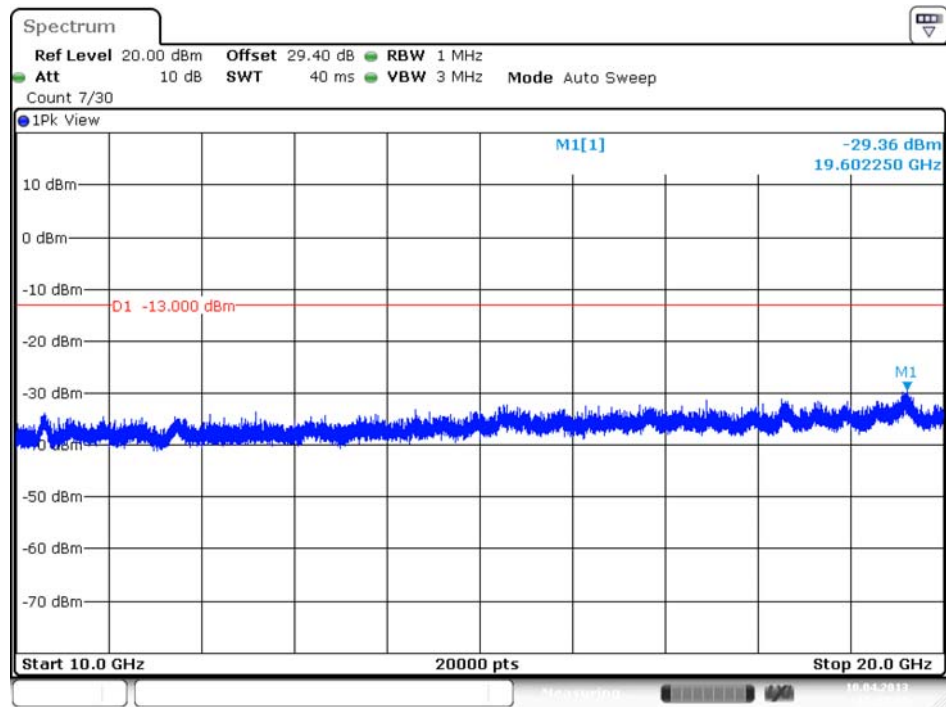


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

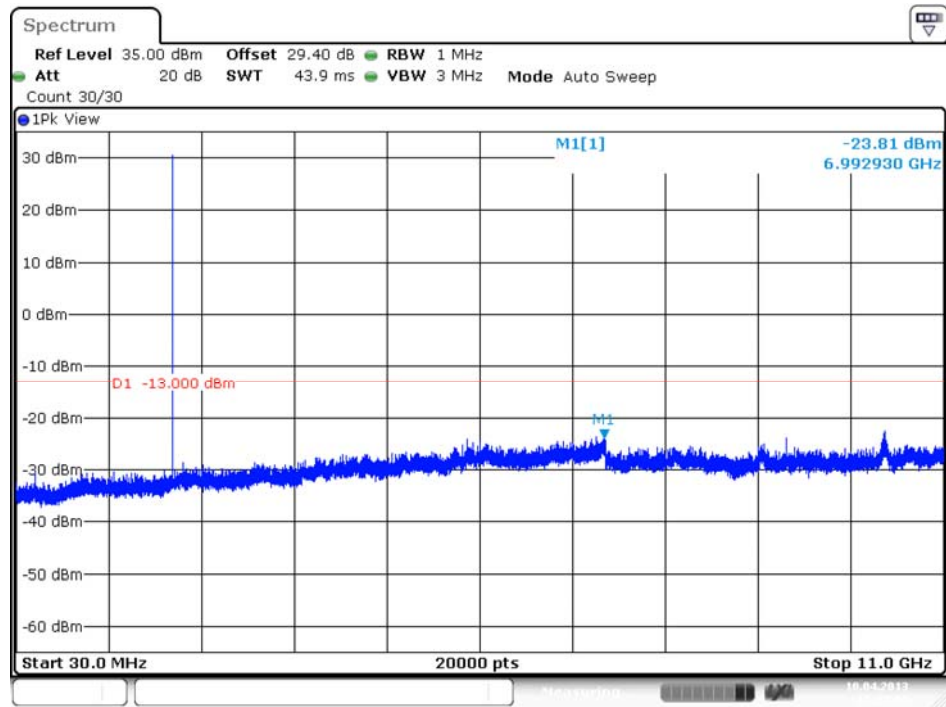


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

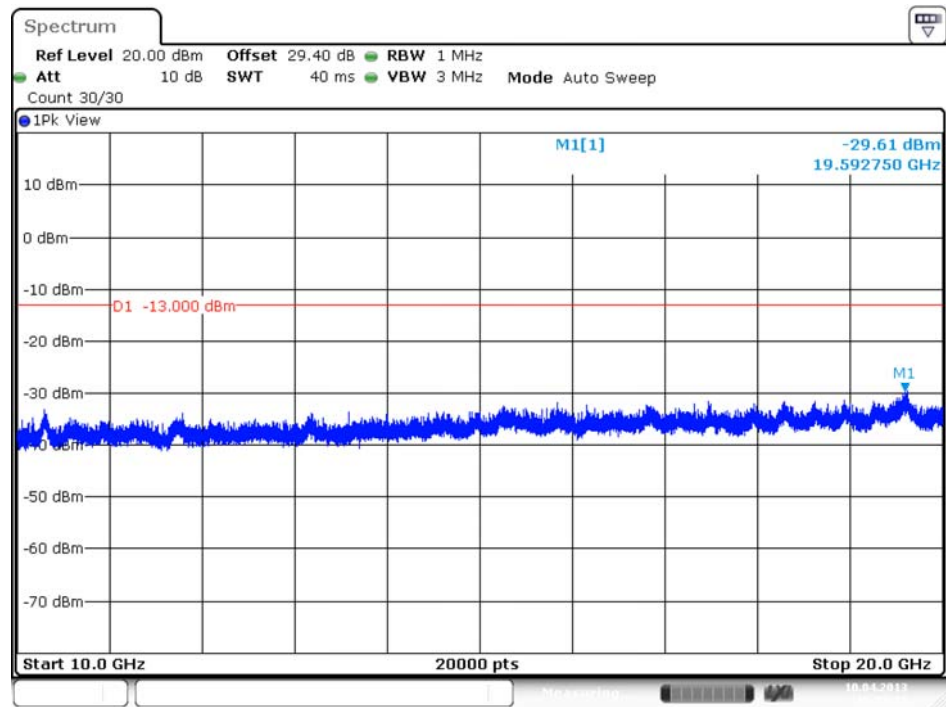


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

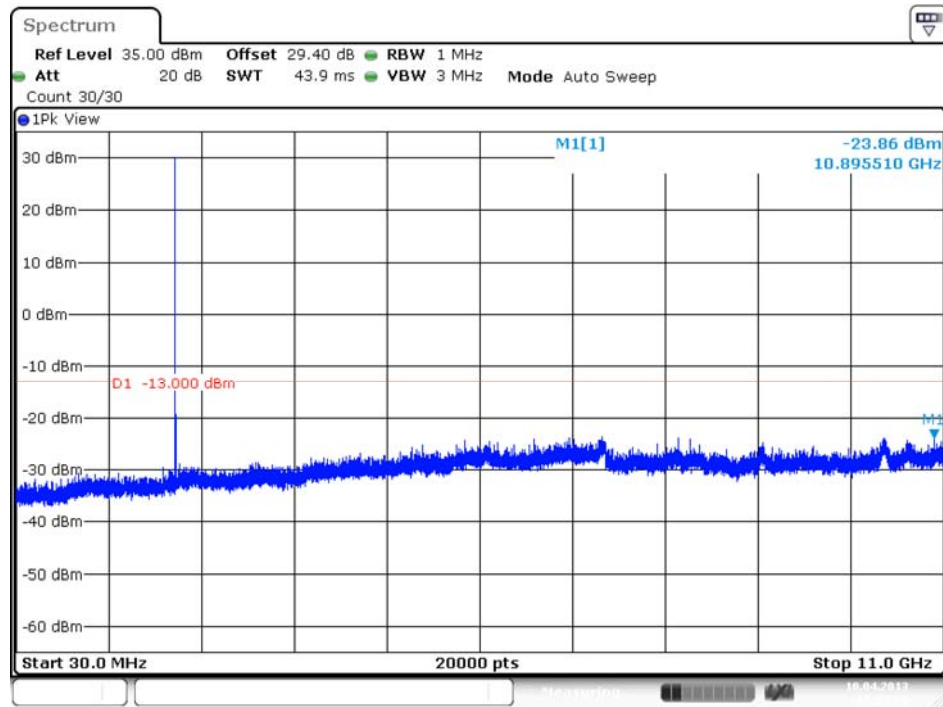


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

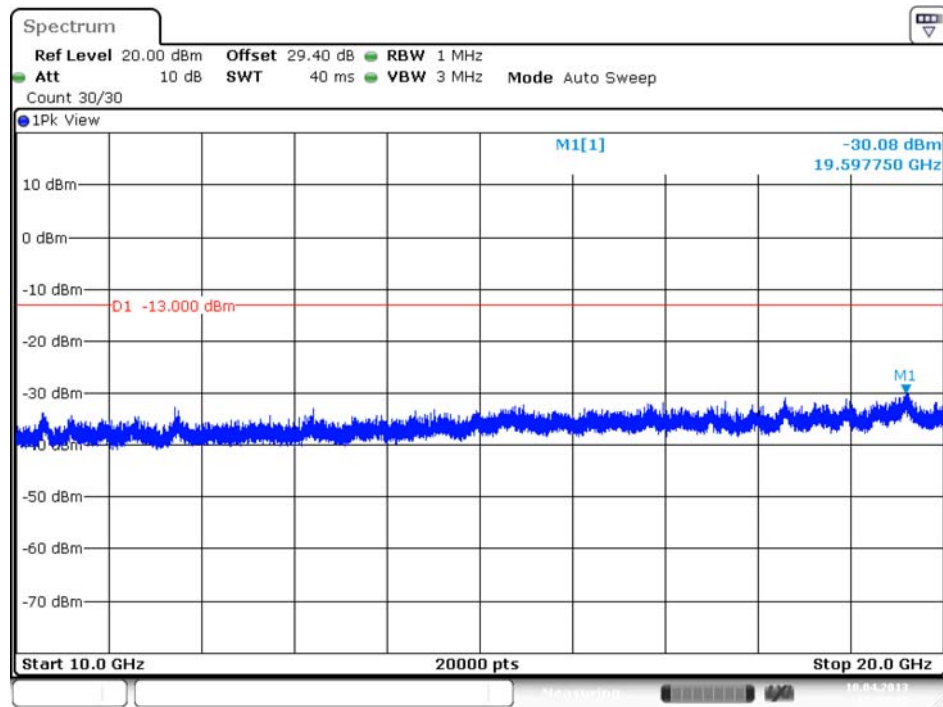


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions1

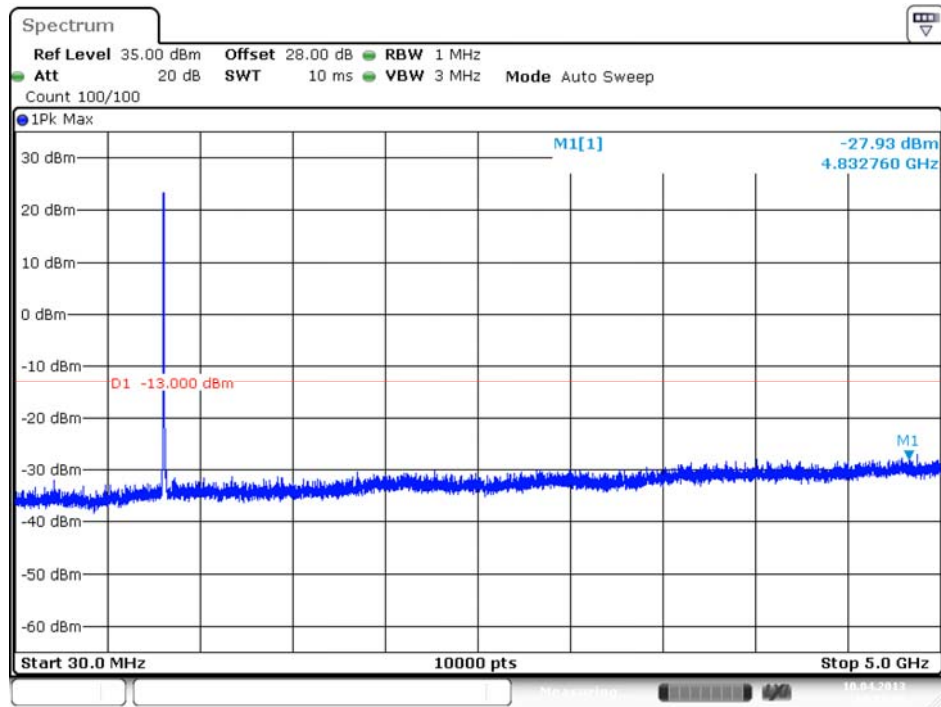


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions2

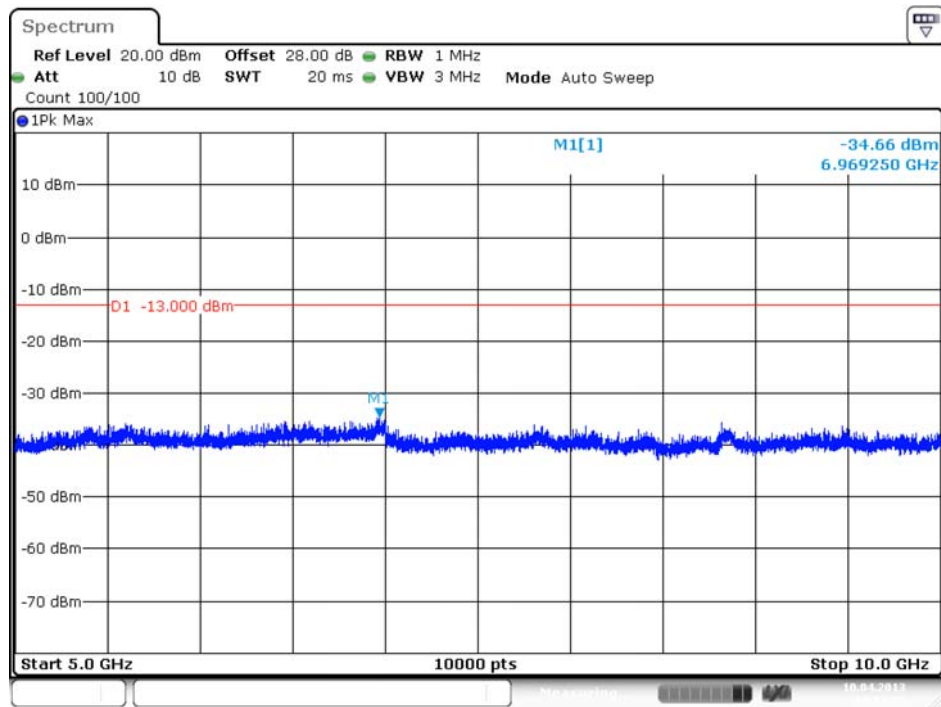


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions1

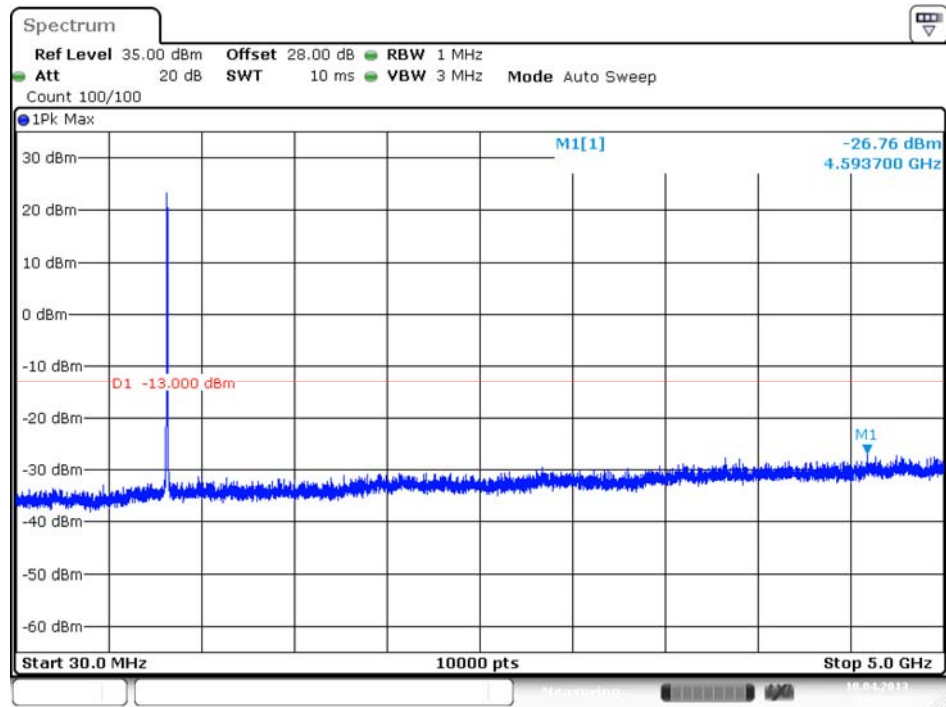


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions2

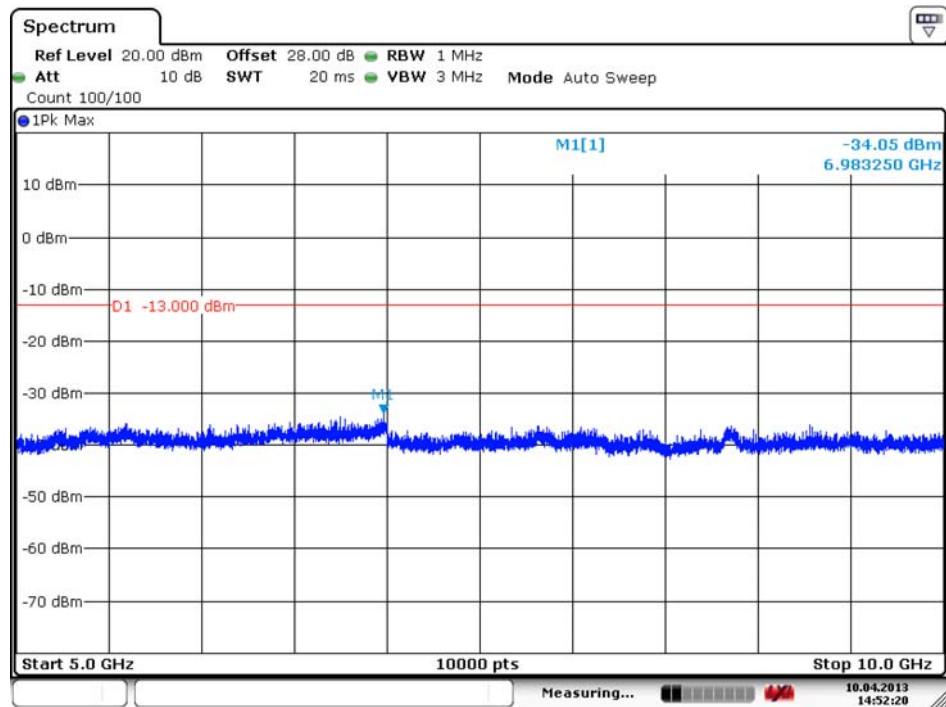


FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions1

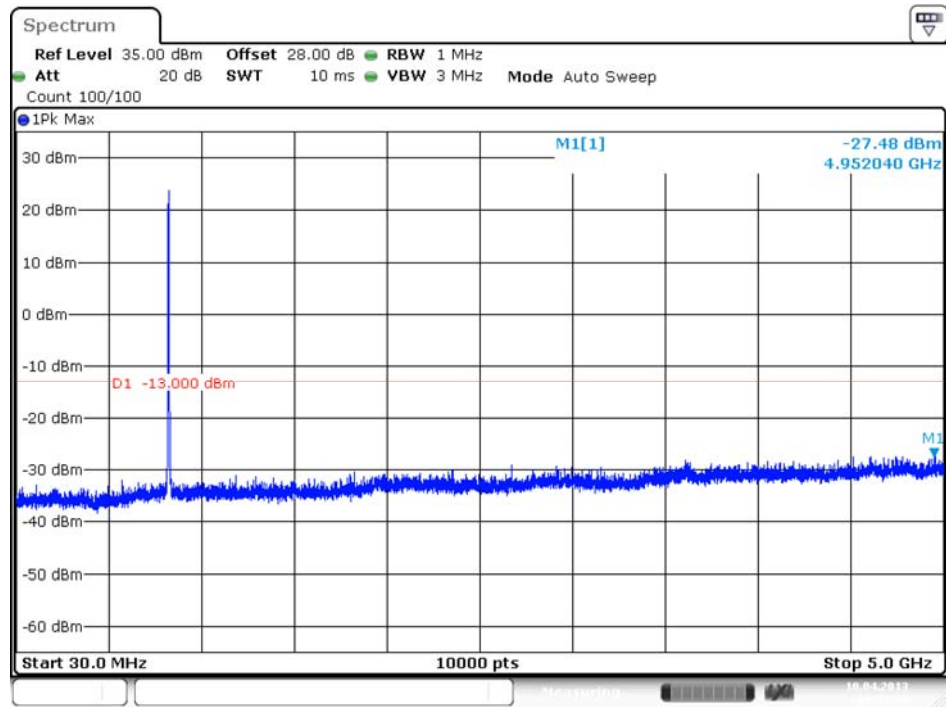

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions2

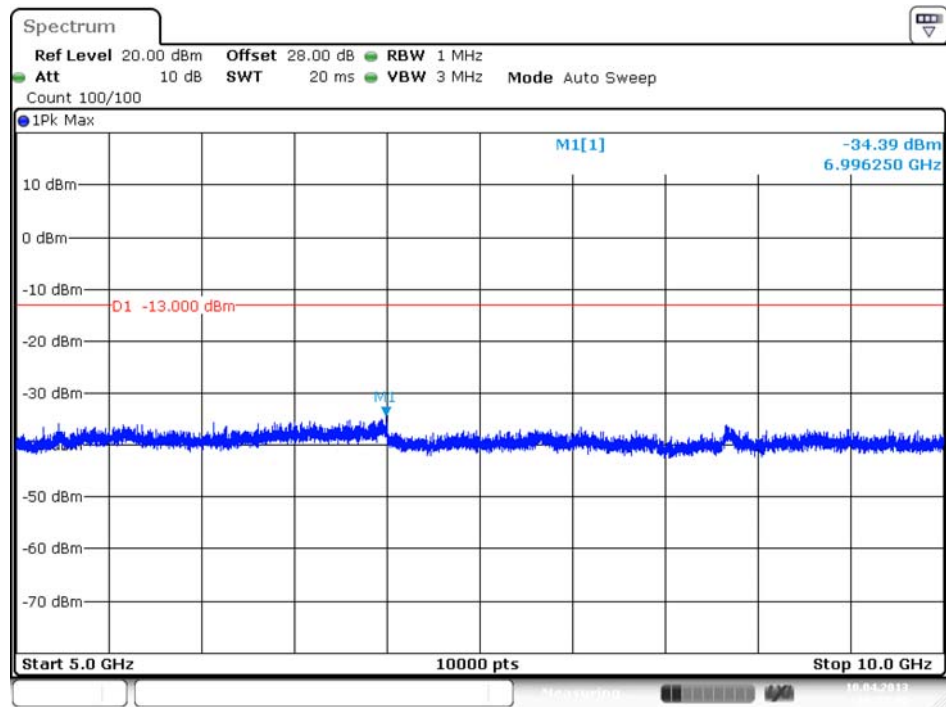

FCC CERTIFICATION REPORT

Test Report No. HCTR1304FR12	Date of Issue: April 15, 2013	EUT Type: 850/1900 GSM/GPRS and 850 WCDMA/HSDPA/HSUPA Phone with Bluetooth v3.0+EDR, WLAN 2.4GHz and Hotspot and EDGE Rx only	www.hct.co.kr FCC ID: A3LGTS6310T
---------------------------------	----------------------------------	---	--