

RF TEST REPORT

Test item : Zigbee Touch pen
Model No. : IWB-P1
Order No. : 1012-01377
Date of receipt : 2010-12-09
Test duration : 2011-03-15 ~ 2011-03-26
Date of issue : 2011-09-06
Use of report : FCC Original Grant


Applicant : Samsung Electronics Co., Ltd.
416, Maetan 3-Dong, Yeongtong-Gu, Suwon-City, Gyeonggi-Do, 443-742, Korea

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : FCC Part 15 Subpart C 247
Test environment : See appended test report
Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer
S.K. Ryu

Witnessed by:

N/A

Reviewed by:



Manager
W.J. Lee

CONTENTS

1. Equipment information.....	3
1.1 Equipment description.....	3
1.2 Ancillary equipment	3
2. Information about test items.....	4
2.1 Test mode	4
2.2 Auxiliary equipment	4
2.3 Tested frequency	4
2.4 Tested environment	4
2.5 EMI Suppression Device(s)/Modifications	4
3. Test Report	5
3.1 Summary of tests	5
3.2 Transmitter requirements	6
3.2.1 6 dB Bandwidth	6
3.2.2 Peak Output Power	9
3.2.3 Out of Band Emissions / Band Edge.....	12
3.2.4 Out of band Emission – Radiated	23
3.2.5 Transmitter Power Spectral Density	25
3.2.6 AC Conducted Emissions.....	28
3.2.7 Antenna Requirements.....	29
APPENDIX.....	30

1. Equipment information

1.1 Equipment description

FCC Equipment Class	Digital Transmission System (DTS)
Equipment type	Zigbee Touch pen
Equipment model name	IWB-P1
Equipment add model name	N/A
Equipment serial no.	Identical prototype
Frequency band	2405 ~ 2480 MHz
Modulation type	O-QPSK
Spread Spectrum	DSSS
Channel Spacing	5.0 MHz
Antenna type	Internal Type: Chip Antenna (Max. peak gain: 1.44 dBi)
Power Supply	DC 3.7 V

1.2 Ancillary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2. Information about test items

2.1 Test mode

This device was tested in continuous transmitting mode at maximum power.

Test Case 1	-
Test Case 2	-

2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2.3 Tested frequency

	TX Frequency (MHz)	RX Frequency (MHz)
Lowest Channel	2405	2405
Middle Channel	2445	2445
Highest Channel	2480	2480

2.4 Tested environment

Temperature	: 22 ~ 23 °C
Relative humidity content	: 35 ~ 38 % R.H.
Details of power supply	: DC 3.7 V

2.5 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
→ None

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit (Using in 2400 ~ 2483.5MHz)	Test Condition	Status Note 1
I. Test Items				
15.247(a)(2)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)(3)	Transmitter Output Power	< 1Watt		C
15.247(c)	Out of Band Emissions / Band Edge	20dBc in any 100kHz BW		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm / 3kHz		C
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	<FCC 15.209 Limits	Radiated	C
15.207	AC Conducted Emissions	EN 55022	AC Line Conducted	C
15.203	Antenna Requirements	FCC 15.203	-	C
Note 1: C =Comply NC =Not Comply NT =Not Tested NA =Not Applicable				

The sample was tested according to the following specification:
ANSI C-63.4-2003, DA00-705

3.2 Transmitter requirements

3.2.1 6 dB Bandwidth

- Procedure:

The bandwidth at 6 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level.

The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest Frequencies

Span = 50 MHz (Greater than EBW)

RBW = 100 kHz

VBW = $\geq$ RBW

Trace = max hold

Sweep = auto

Detector function = peak

- Measurement Data: **Comply**

Test Mode	Frequency	Test Results (MHz)
N/A	Lowest	1.35
	Middle	1.33
	Highest	1.32


Note 1: See next pages for actual measured spectrum plots.

- Minimum Standard:

The minimum 6 dB bandwidth shall be at least 500 kHz


6 dB Bandwidth

Lowest Frequency

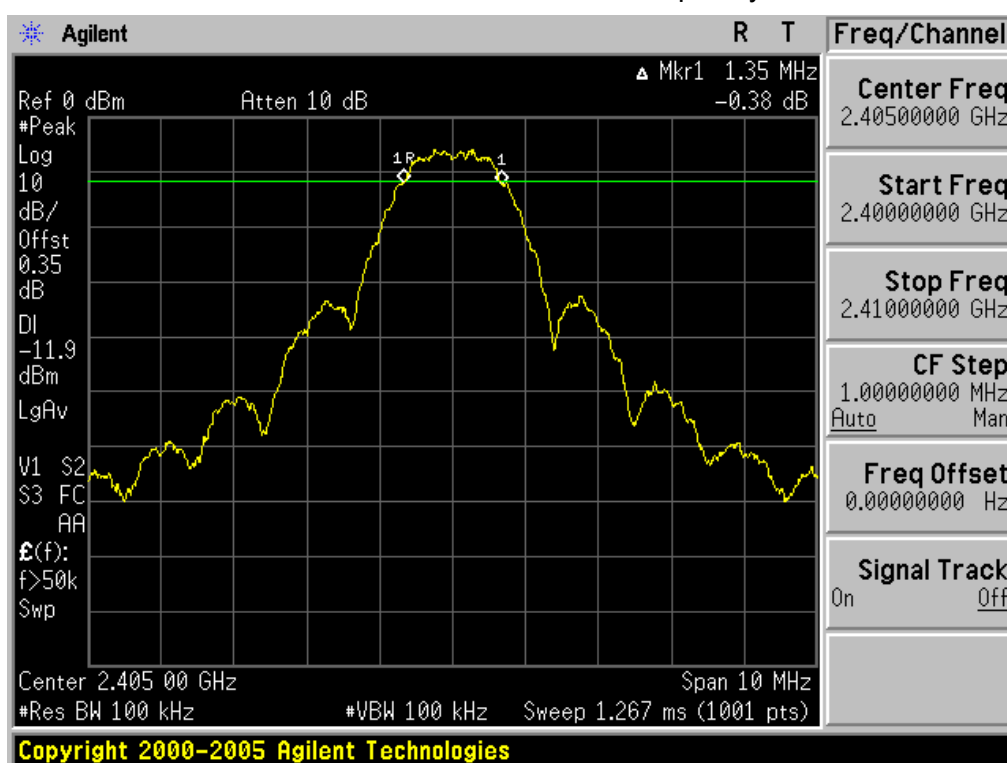


6 dB Bandwidth

Middle Frequency

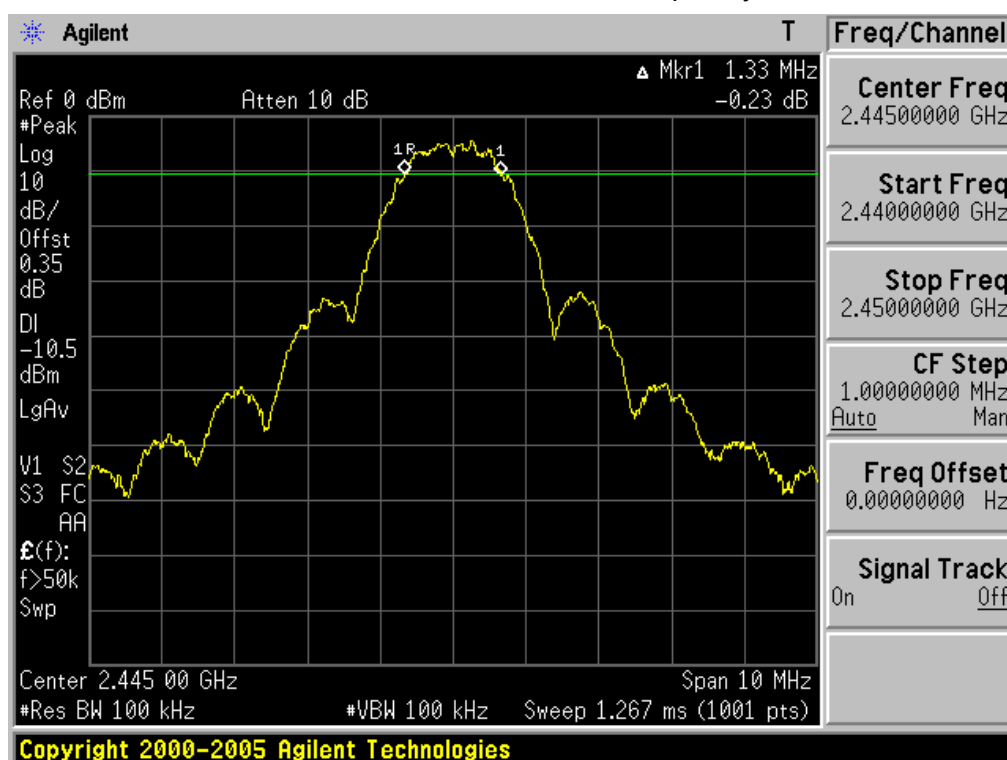

6 dB Bandwidth

Test case 1 & Highest Frequency

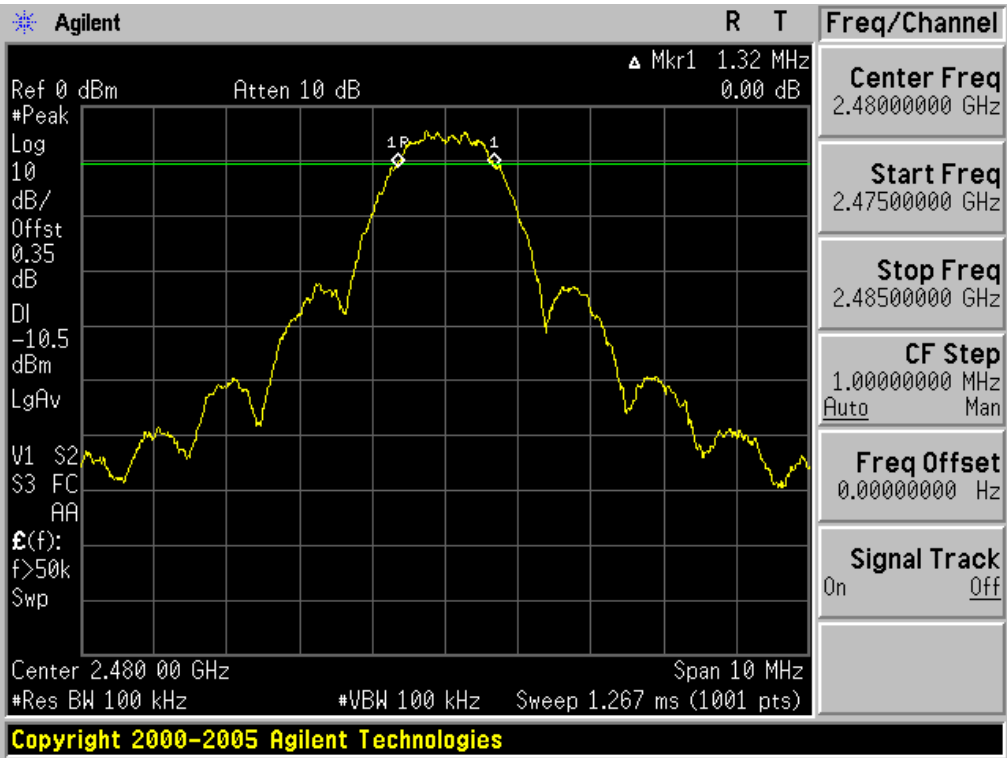

3.2.2 Peak Output Power

- Test Procedure and Spectrum Analyzer setting:

This is an RF conducted test. Use a direct connection between the antenna port of the transmitter and the spectrum analyzer, through suitable attenuation. Power Output Option 1 is a peak measurement. Power Output Option 2 is the same procedure used for UNII output power measurements. Either option can be used for DTS devices.

This test items was used Power Output Option 1.

- Measurement Data: Comply


Test Mode	Frequency	Test Results	
		dBm	W
Test case 1	Lowest	-3.01	0.000500
	Middle	-2.46	0.000568
	Highest	-2.94	0.000508

Note 1: See next pages for actual measured spectrum plots.

Minimum Standard:	< 1W
-------------------	------


Peak Output Power

Lowest Frequency

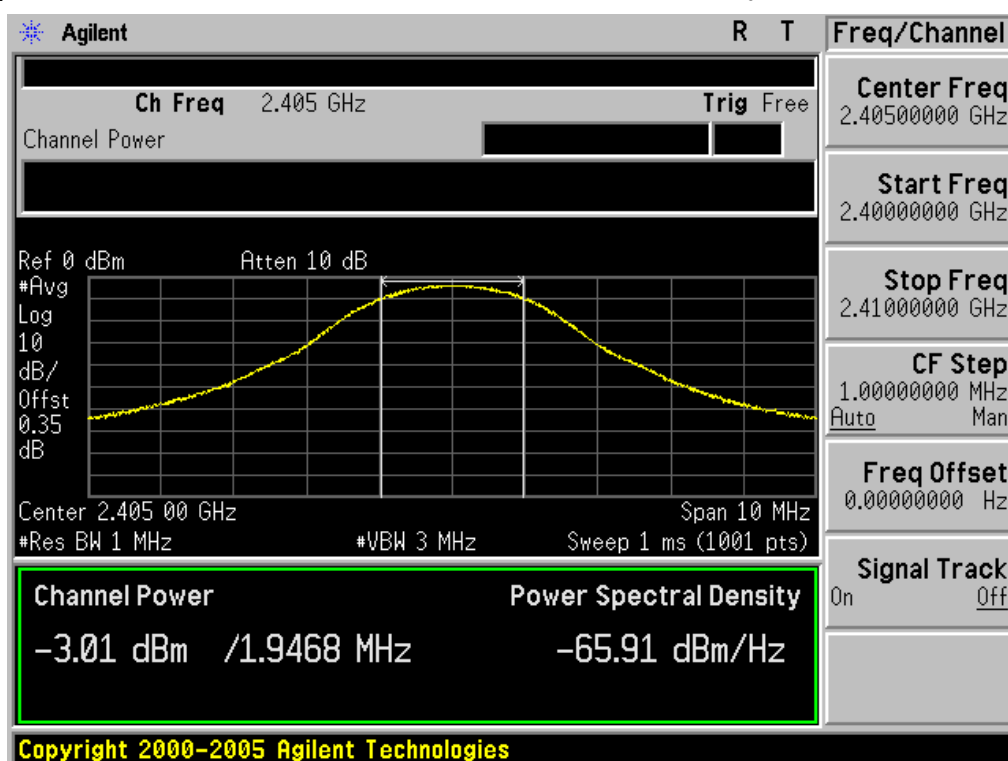


Peak Output Power

Middle Frequency

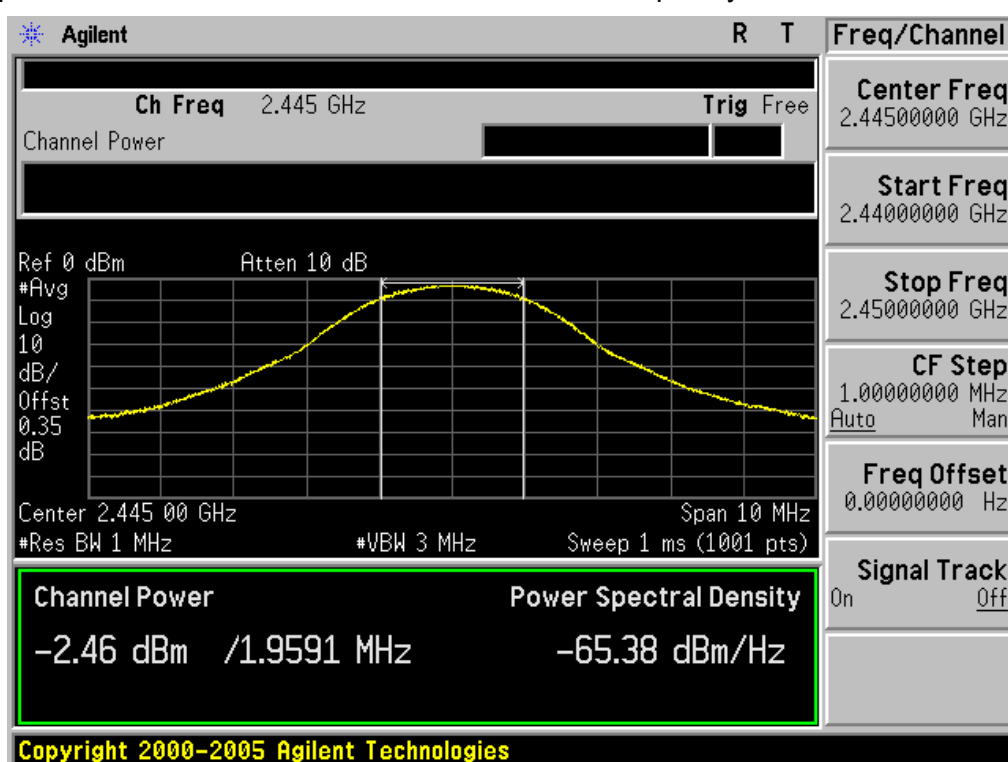

Peak Output Power

Highest Frequency

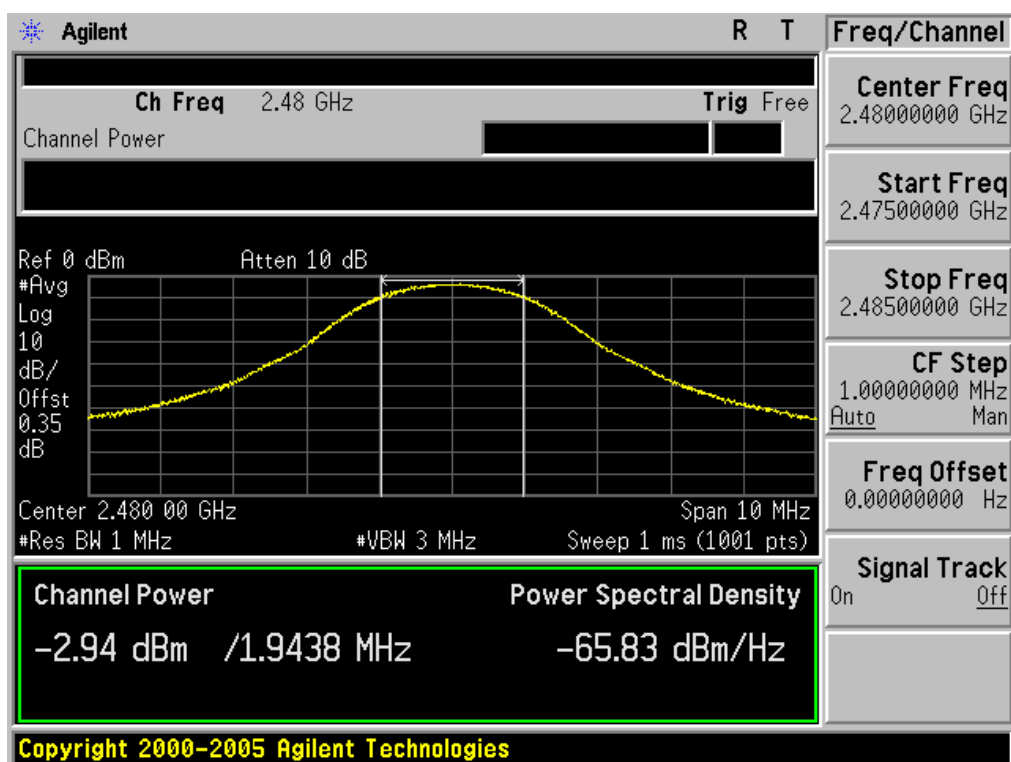

3.2.3 Out of Band Emissions / Band Edge

- Procedure:

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.

For Band-edge testing the spectrum analyzer is set to:

Tested frequency = the highest and the lowest Frequencies

Center frequency = 2400MHz, 2483.5MHz

Span = 100MHz

Detector function = peak

RBW = 1% of the span

VBW = 100 kHz

Trace = max hold

Sweep = auto

For spurious testing the spectrum analyzer is set to:

Tested frequency = the highest, middle and the lowest Frequencies

RBW = 100 kHz

VBW = 100 kHz

Detector function = peak

Sweep = auto

Trace = max hold


- Measurement Data: **Comply**

Note 1: See next pages for actual measured spectrum plots.


Minimum Standard:	> 30 dBc
-------------------	----------

Low Band-edge at 30 dB blow


Lowest Frequency

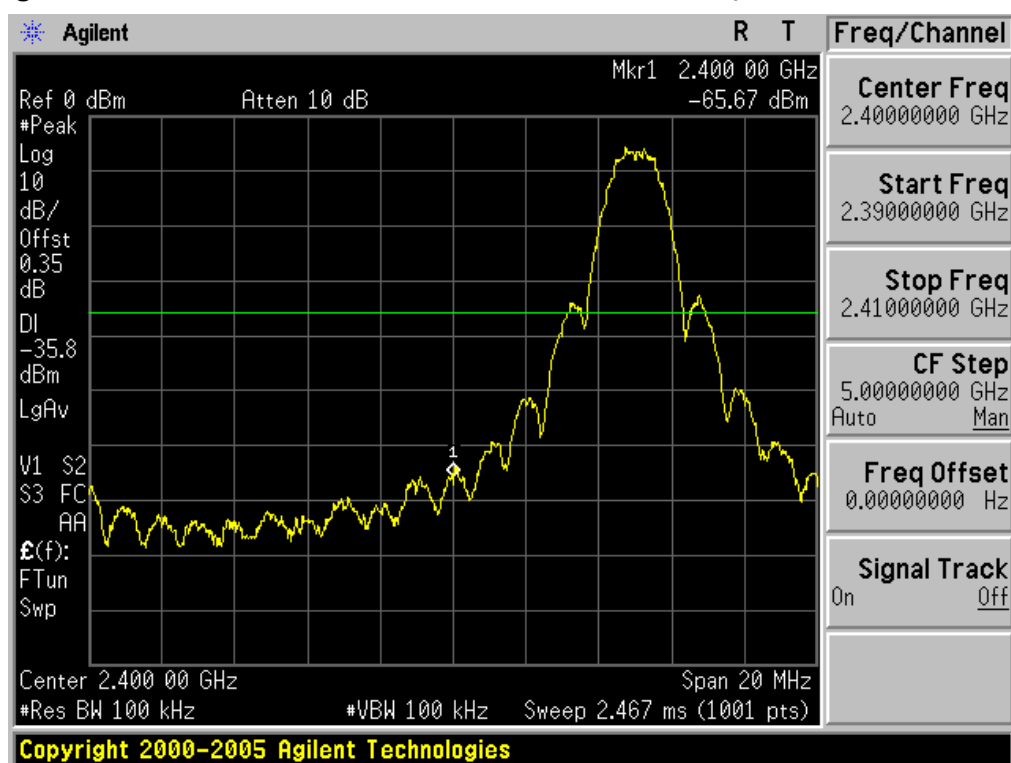


30MHz ~ 5GHz Conducted Spurious Emissions Lowest Frequency

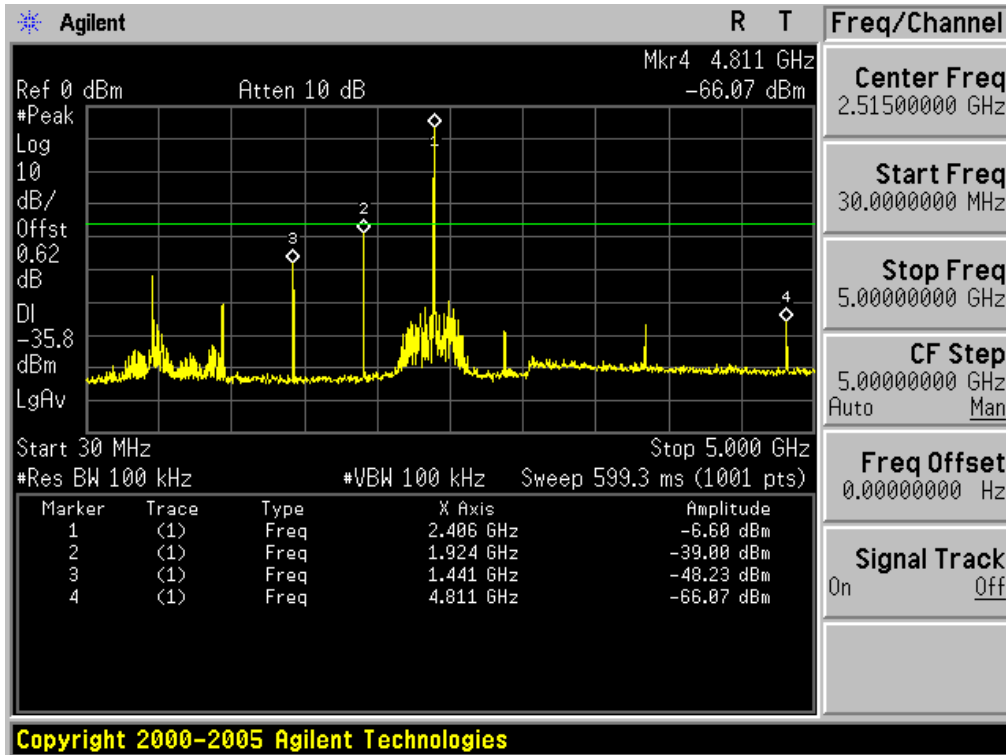


5GHz ~ 10GHz Conducted Spurious Emissions Lowest Frequency

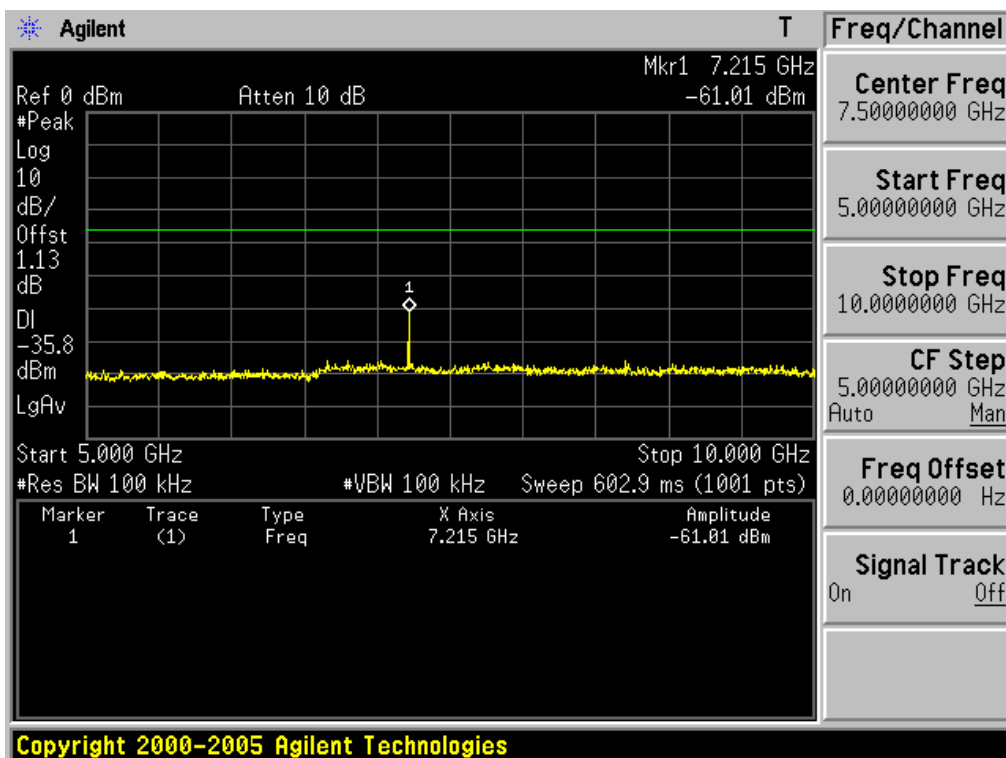


10GHz ~ 15GHz Conducted Spurious Emissions Lowest Frequency

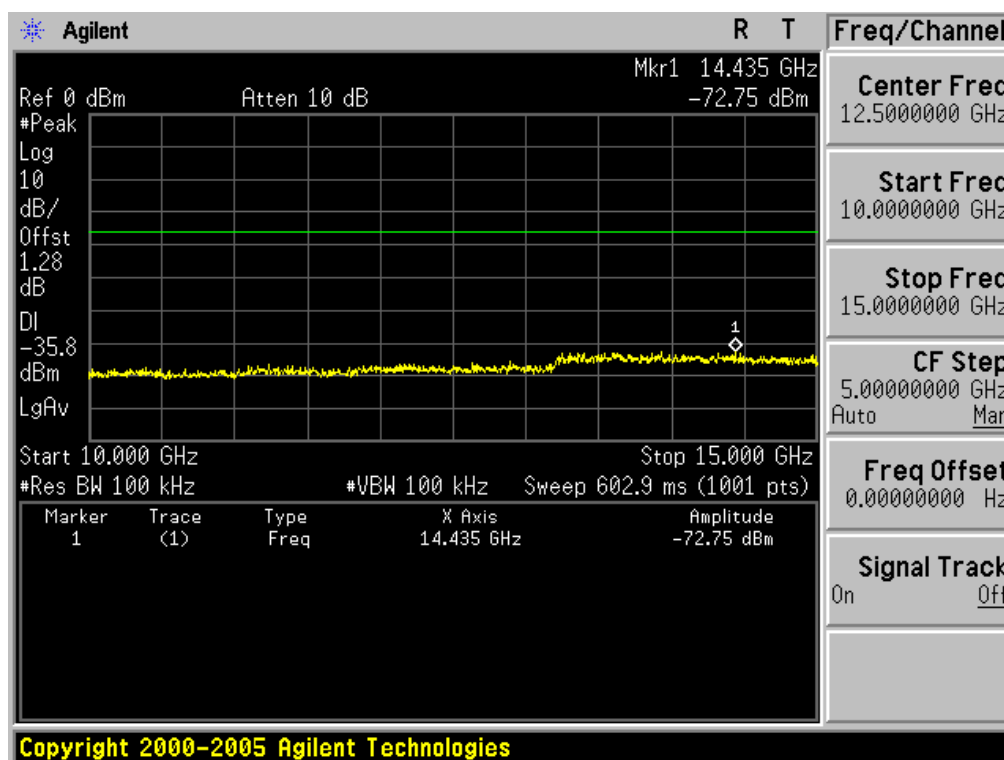

15GHz ~ 20GHz Conducted Spurious Emissions Lowest Frequency

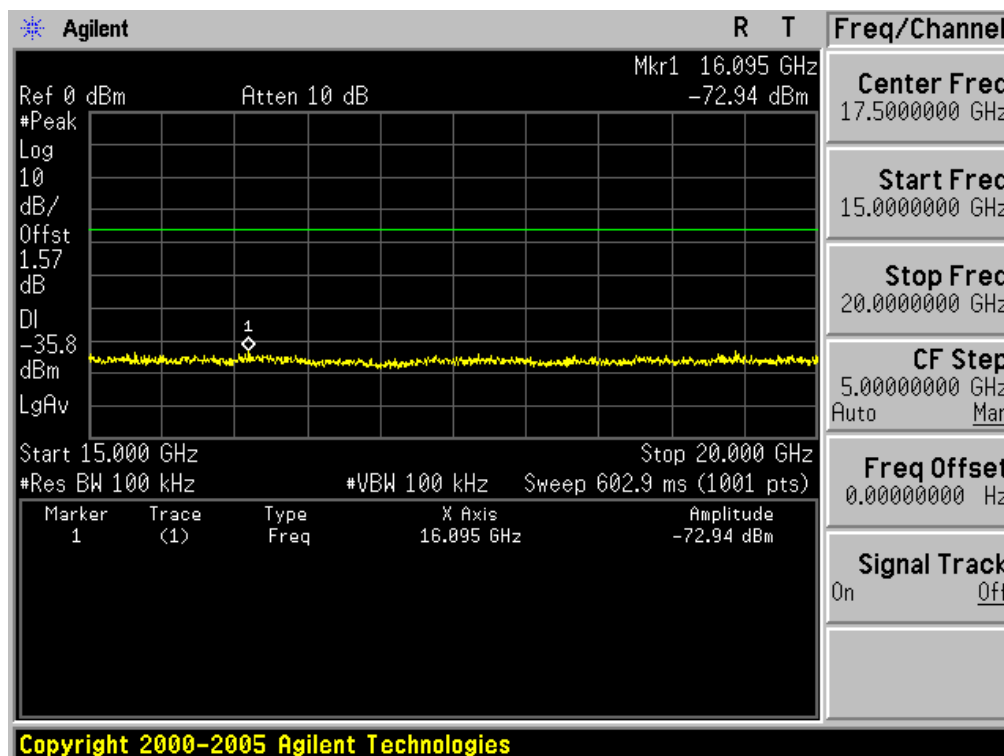


20GHz ~ 25GHz Conducted Spurious Emissions Lowest Frequency

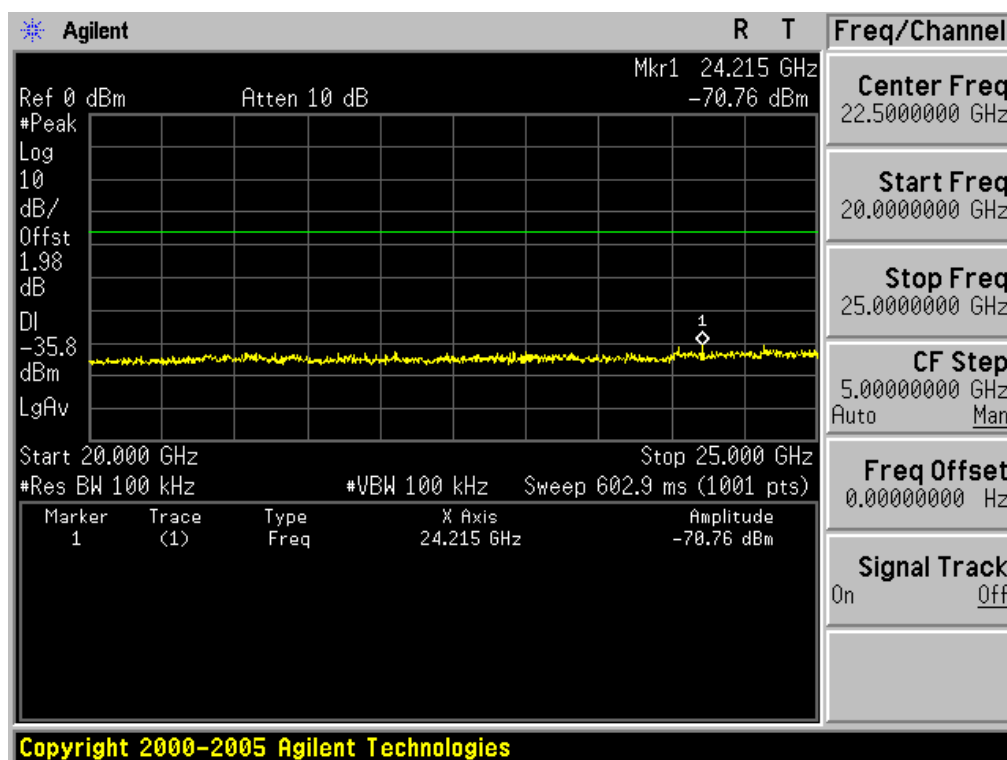


Reference for limit

Middle Frequency

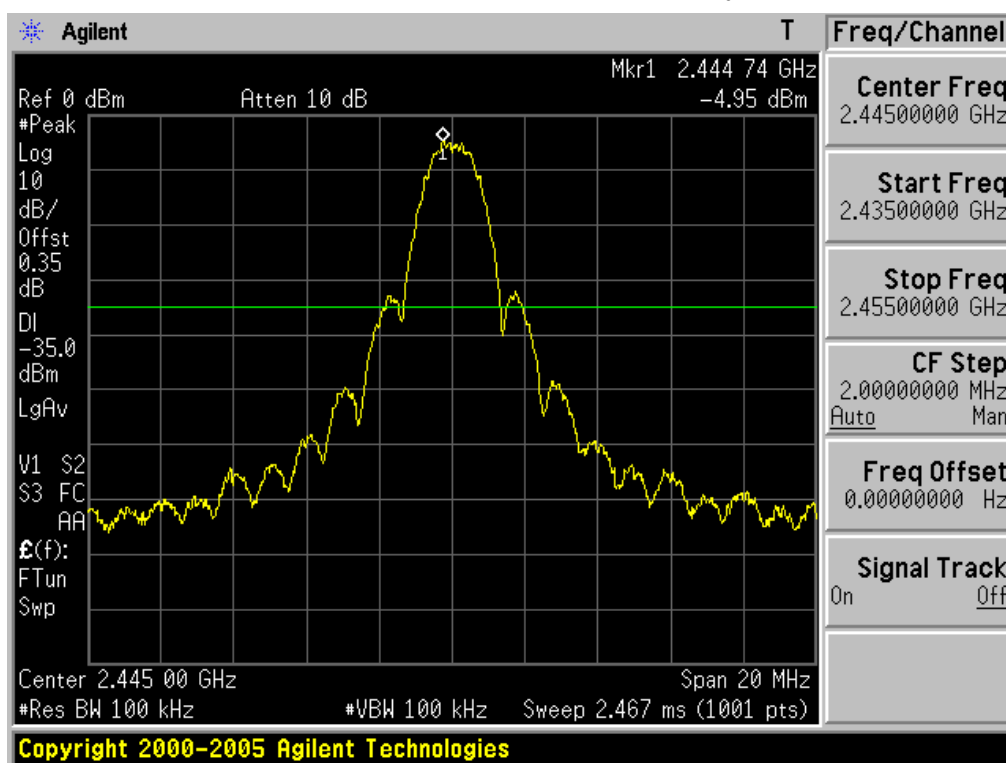


Conducted Spurious Emissions

Middle Frequency

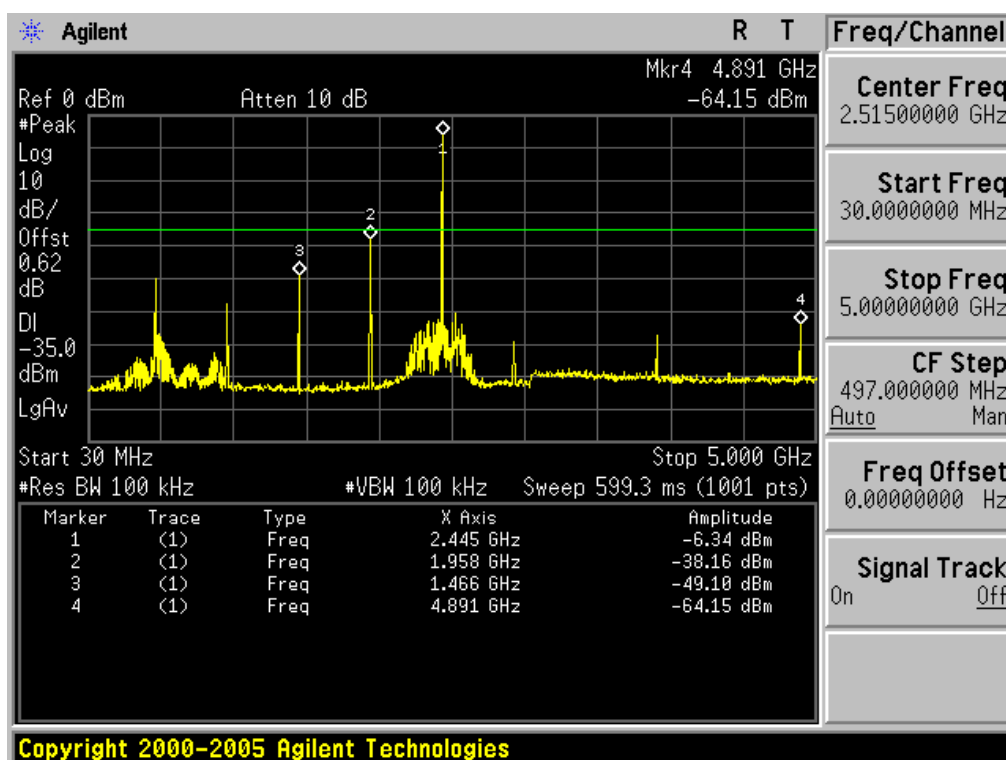


5GHz ~ 10GHz Conducted Spurious Emissions

Middle Frequency

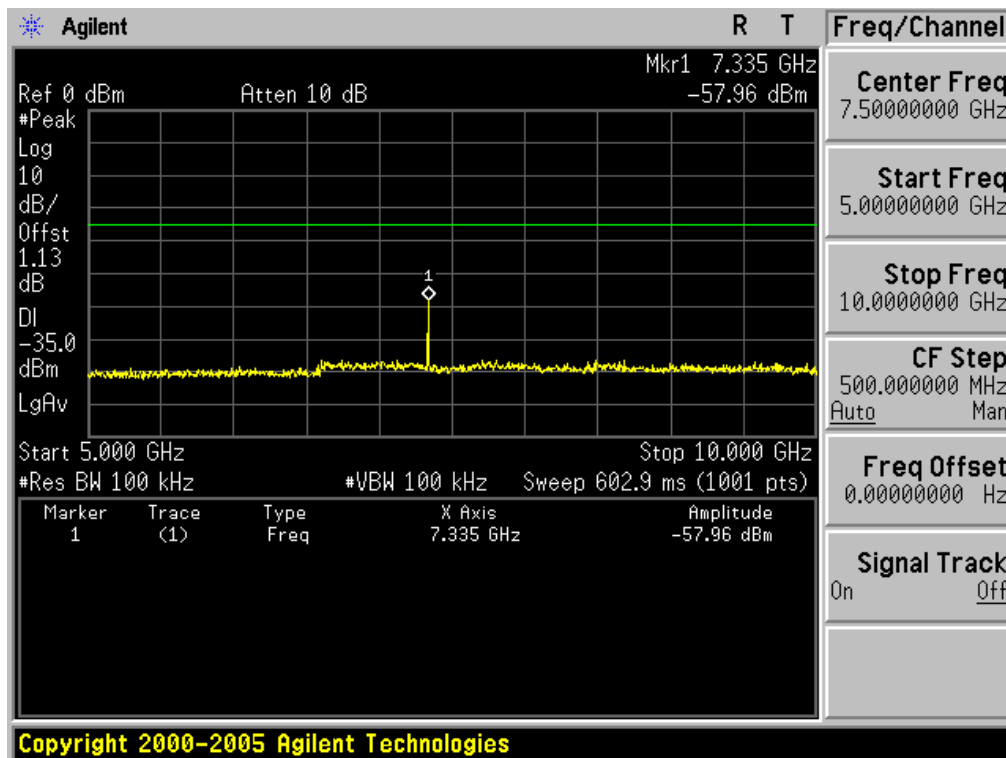


10GHz ~ 15GHz Conducted Spurious Emissions


Middle Frequency

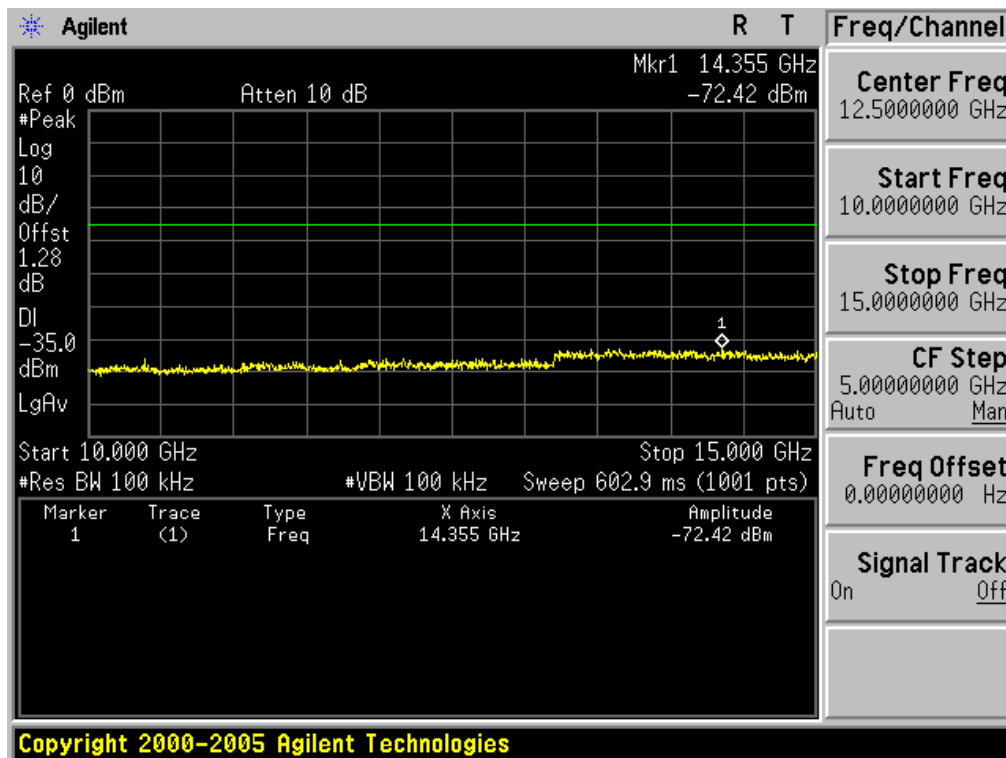

15GHz ~ 20GHz Conducted Spurious Emissions Middle Frequency

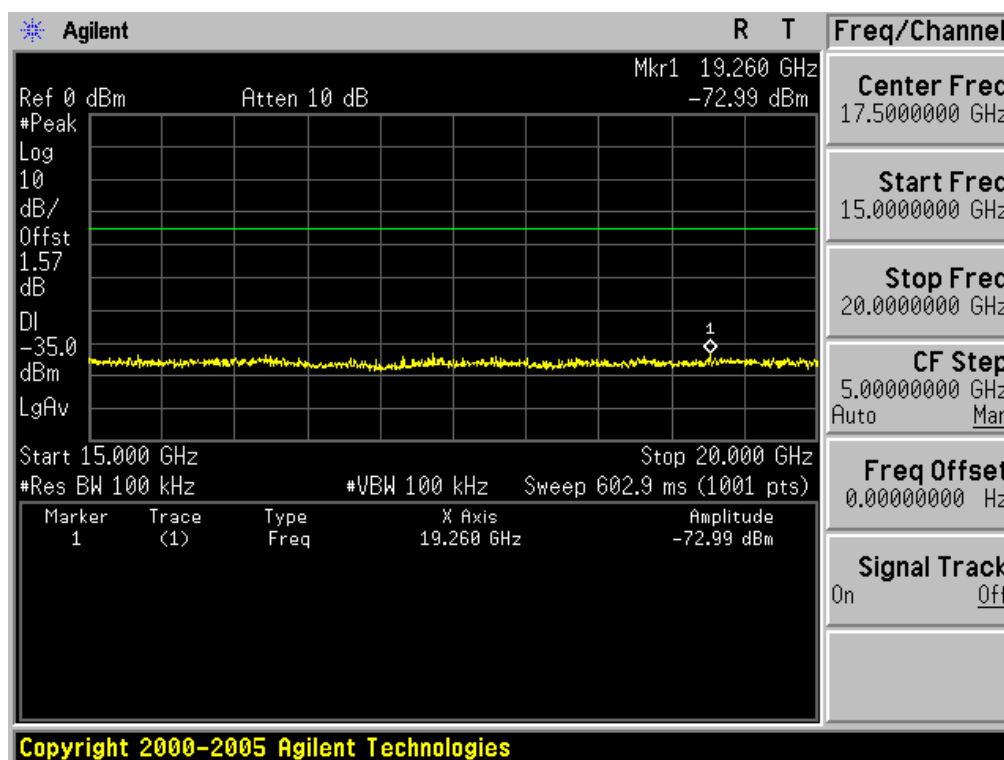


20GHz ~ 25GHz Conducted Spurious Emissions Middle Frequency

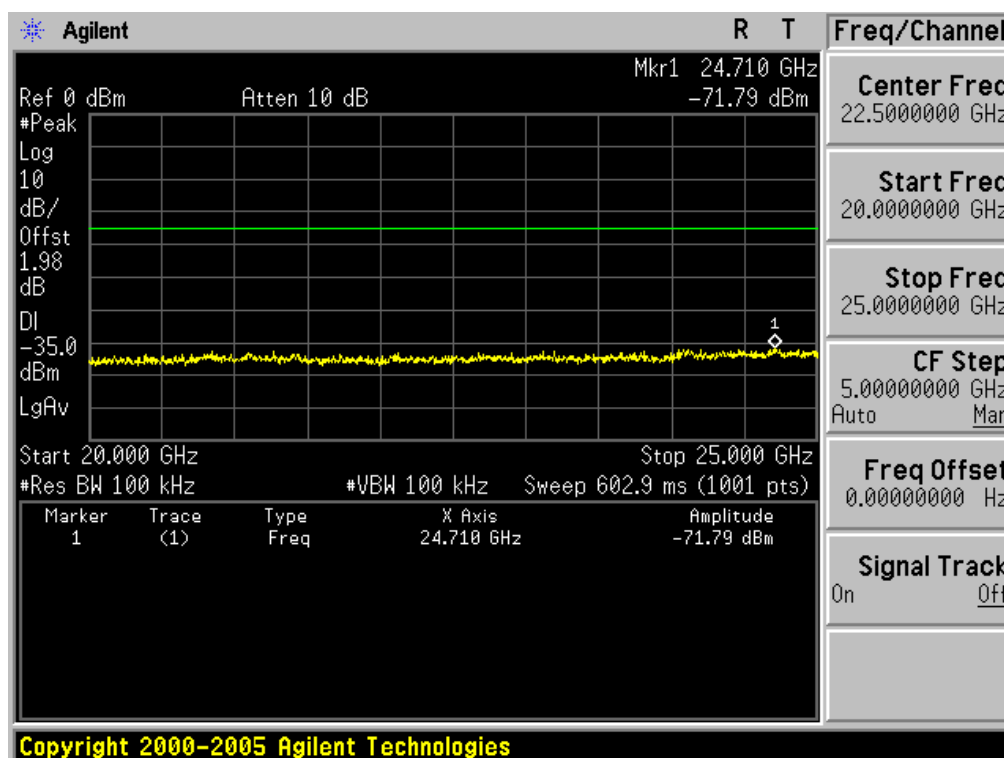


High Band-edge at 30 dB blow

Highest Frequency

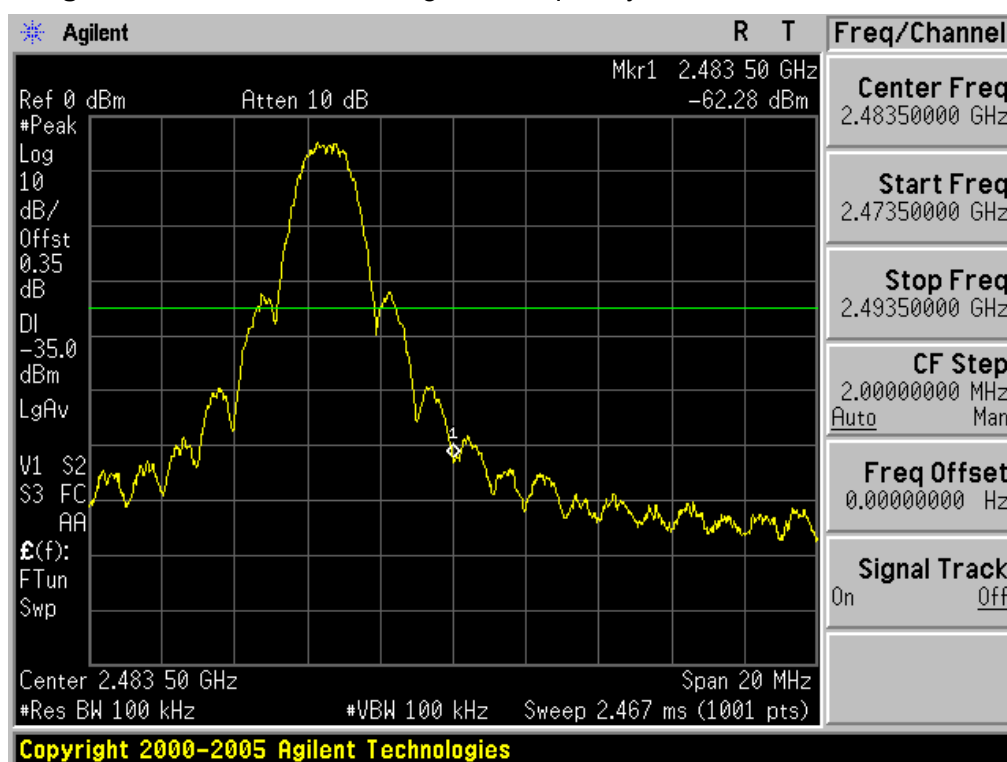


Conducted Spurious Emissions

Highest Frequency

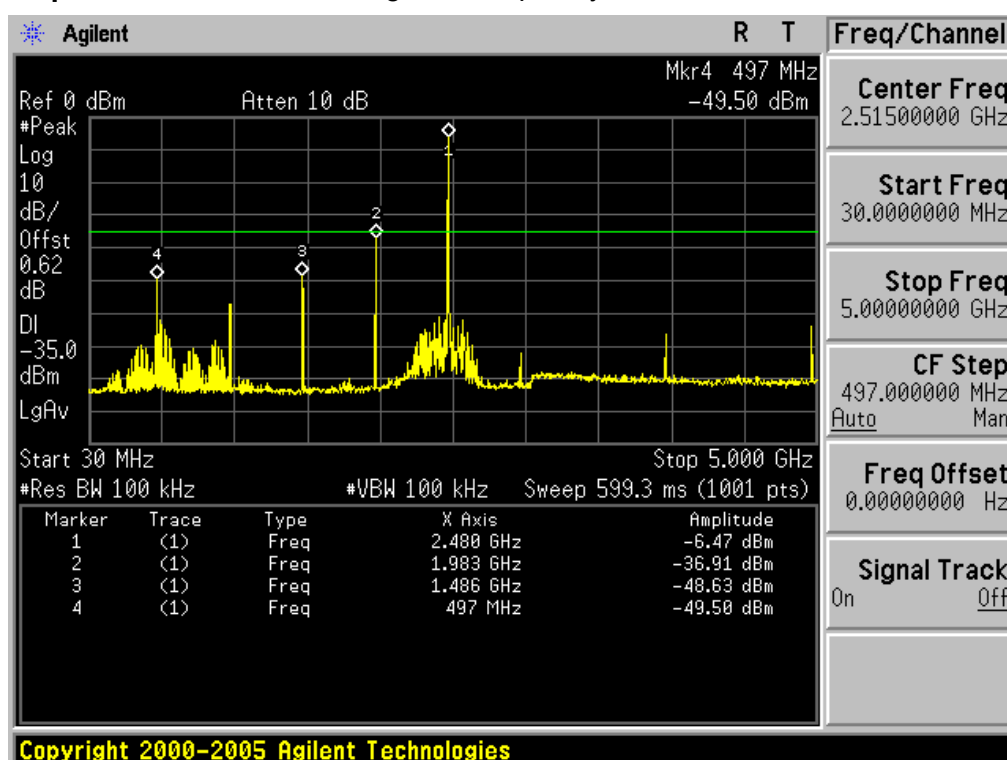


5GHz ~ 10GHz Conducted Spurious Emissions

Highest Frequency

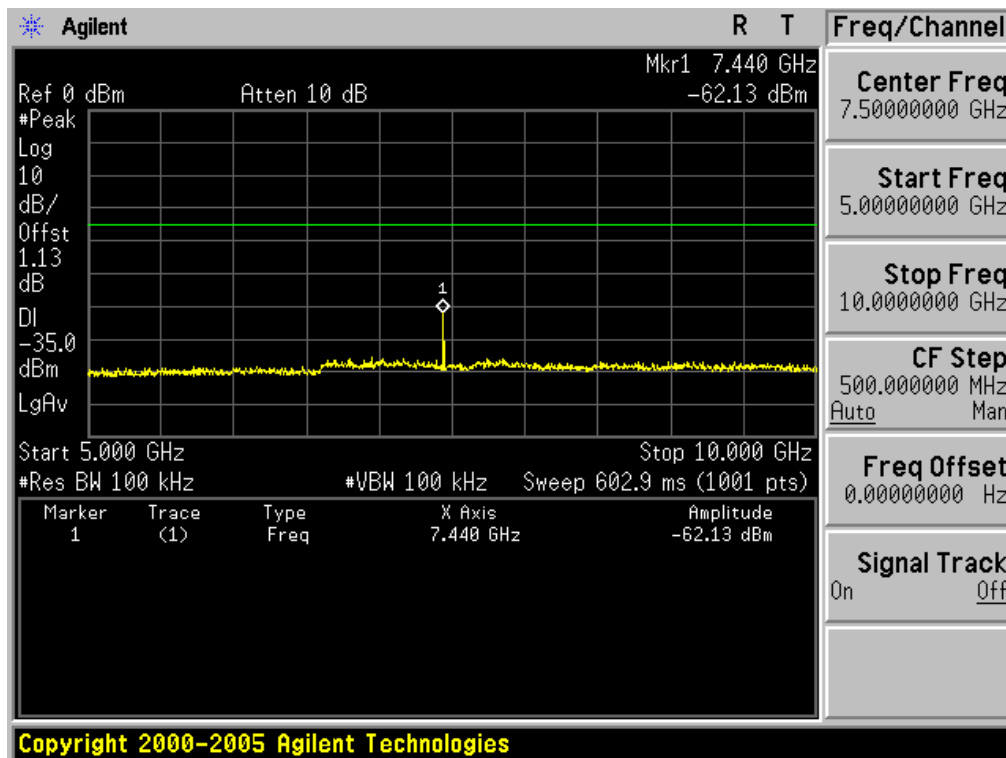


10GHz ~ 15GHz Conducted Spurious Emissions


Highest Frequency

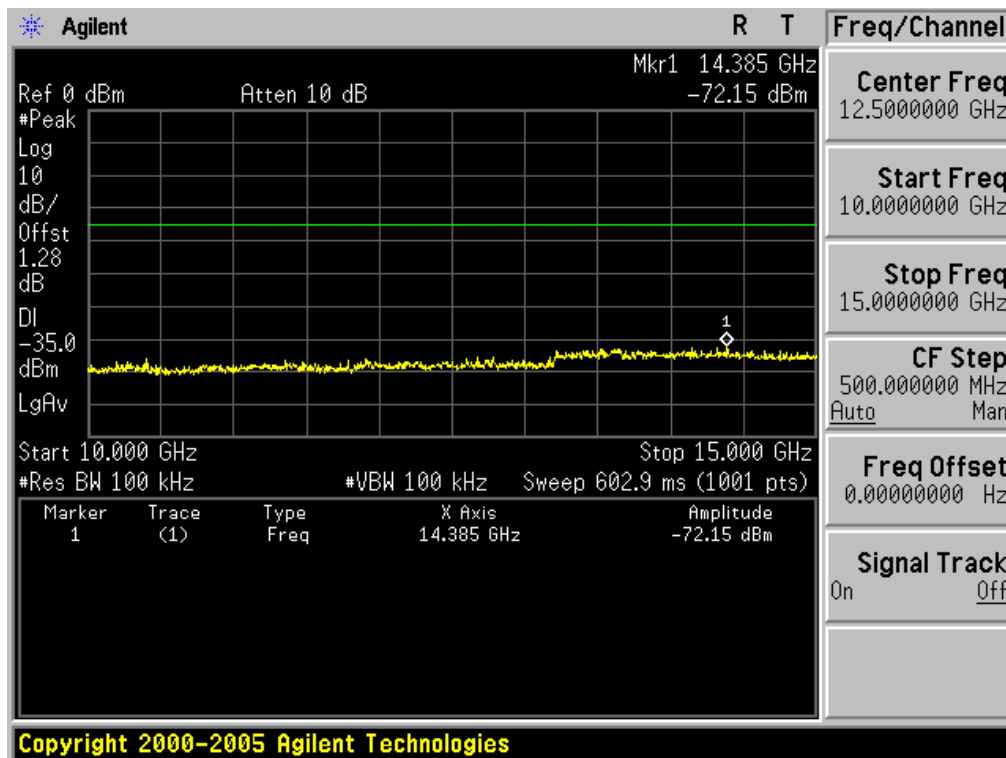

15GHz ~ 20GHz Conducted Spurious Emissions Highest Frequency

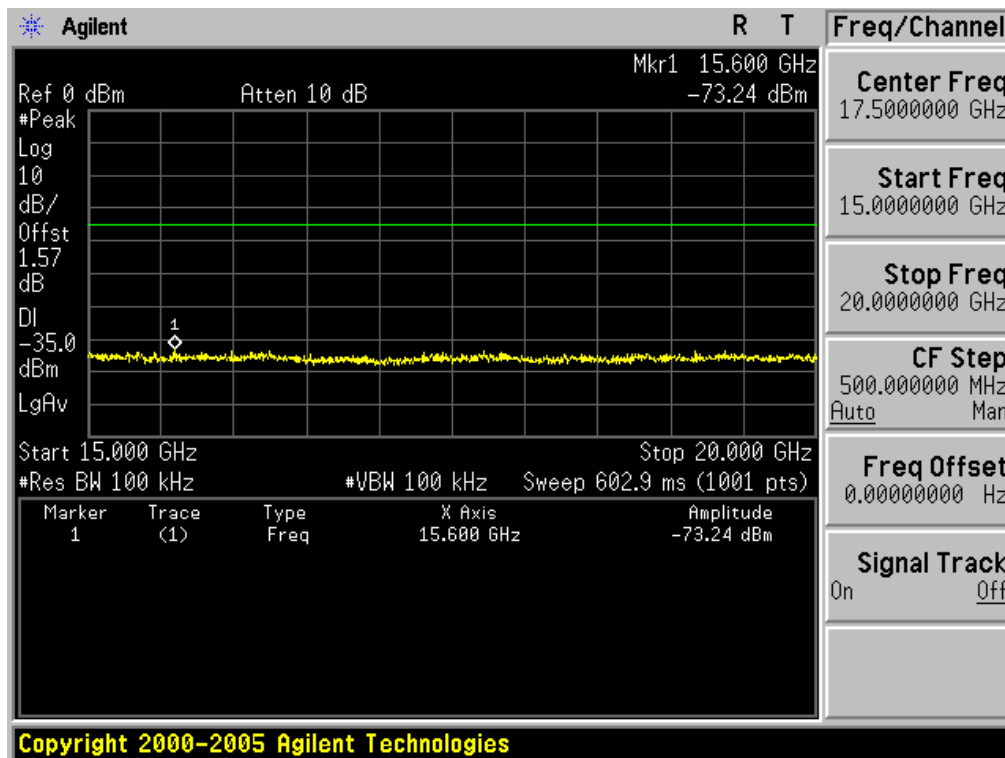

20GHz ~ 25GHz Conducted Spurious Emissions Highest Frequency

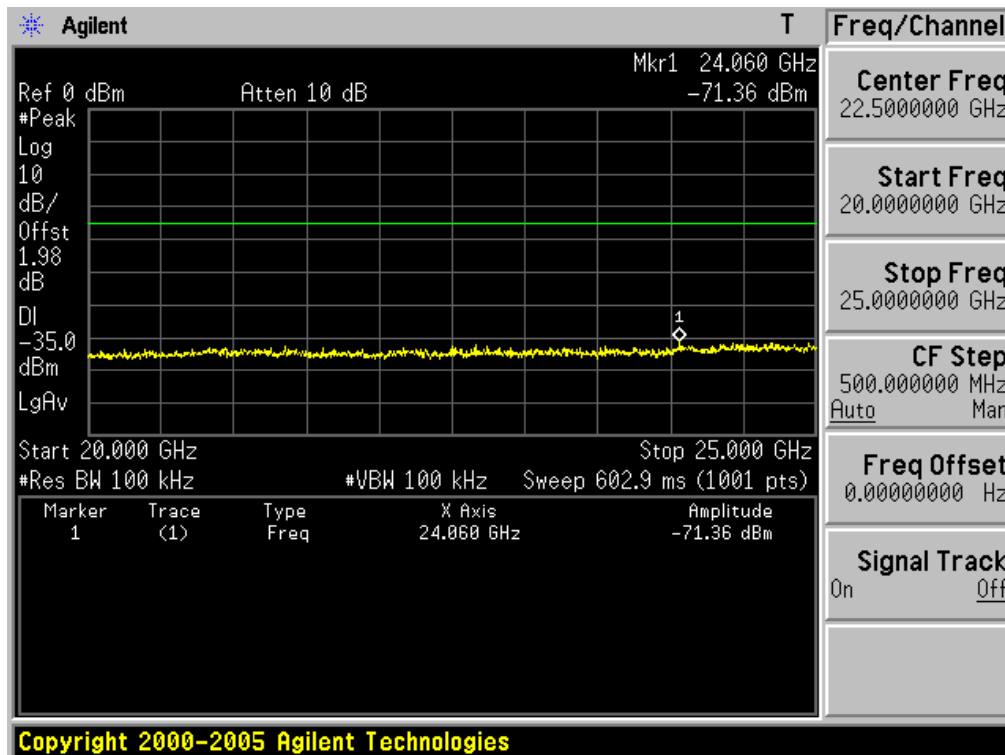

3.2.4 Out of band Emission – Radiated

- Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Tested frequency = Low, Middle, High Frequencies

Frequency Range = 30 MHz ~ 10th harmonic.

RBW and VBW = 1. Frequency range: 30MHz ~ 1GHz

RBW = 120KHz / VBW = $\geq$ RBW

2. Frequency range: 1GHz ~ 10th harmonics

Peak mode: RBW = 1MHz / VBW = $\geq$ RBW

Average mode: RBW = 1MHz / VBW = 10Hz

Detector function = Peak

Sweep = auto

Trace = max hold

- Measurement Data: **Comply**

Note 1: See next pages for actual measured spectrum plots and data.

- Minimum Standard:

• FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240			
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

30MHz ~ 25GHz Radiated Spurious Emissions

▪ Lowest Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
928.500	H	Z Axis	QP	18.85	0.92	19.77	46.00	26.23
1924.030	H	X	PK	57.37	-6.31	51.06	74.00	22.94
1923.870	H	X	AV	48.04	-6.31	41.73	54.00	12.27
2383.760	V	X Axis	PK	56.20	-2.81	53.39	74.00	20.61
2373.040	V	X Axis	AV	45.97	-2.81	43.16	54.00	10.84
4809.130	H	Y Axis	PK	51.74	5.21	56.95	74.00	17.05
4810.435	H	Y Axis	AV	42.37	5.21	47.58	54.00	6.42

▪ Middle Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
940.940	V	Z Axis	QP	19.04	1.13	20.17	46.00	25.83
1956.000	H	X	PK	58.16	-6.18	51.98	74.00	22.02
1956.230	H	X	AV	48.87	-6.18	42.69	54.00	11.31
4899.970	V	Z Axis	PK	45.87	5.32	51.19	74.00	22.81
4889.570	V	Z Axis	AV	33.55	5.32	38.87	54.00	15.13

▪ Highest Channel

Freq. (MHz)	ANT Pol	The worst case EUT Position	Detector Mode	Reading (dBuV)	T.F (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
872.549	V	Z Axis	QP	19.97	0.26	20.23	46.00	25.77
1983.810	H	X	PK	59.68	-6.04	53.64	74.00	20.36
1983.990	H	X	AV	50.11	-6.04	44.07	54.00	9.93
2483.582	H	X Axis	PK	61.68	-2.47	59.21	74.00	14.79
2483.500	H	X Axis	AV	52.10	-2.47	49.63	54.00	4.37
4959.235	H	Y Axis	PK	46.21	5.90	52.11	74.00	21.89
4960.850	H	Y Axis	AV	33.85	5.90	39.75	54.00	14.25

Note.

- No other spurious and harmonic emissions were detected greater than listed emissions on above table.
- Sample Calculation.
 $\text{Margin} = \text{Limit} - \text{Result}$ / $\text{Result} = \text{Reading} + \text{T.F}$ / $\text{T.F} = \text{AF} + \text{CL} - \text{AG}$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

3.2.5 Transmitter Power Spectral Density

- Procedure:

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used. Use PSD Option 1 if Power output Option 1 was used. Use PSD Option 2 if power output Option 2 was used.

This test item was used PSD Option 1.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest Frequencies

Span = 900KHz

RBW = 3KHz

VBW = $\geq$ RBW

Sweep = 300s

Trace = max hold

- Measurement Data: **Comply**

Test Mode	Frequency	Test Results (dBm)
Test case 1	Lowest	-15.400
	Middle	-16.150
	Highest	-16.030


Note 1: See next pages for actual measured spectrum plots.

- Minimum Standard:

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3kHz BW.


Transmitter Power Spectral Density

Lowest Frequency

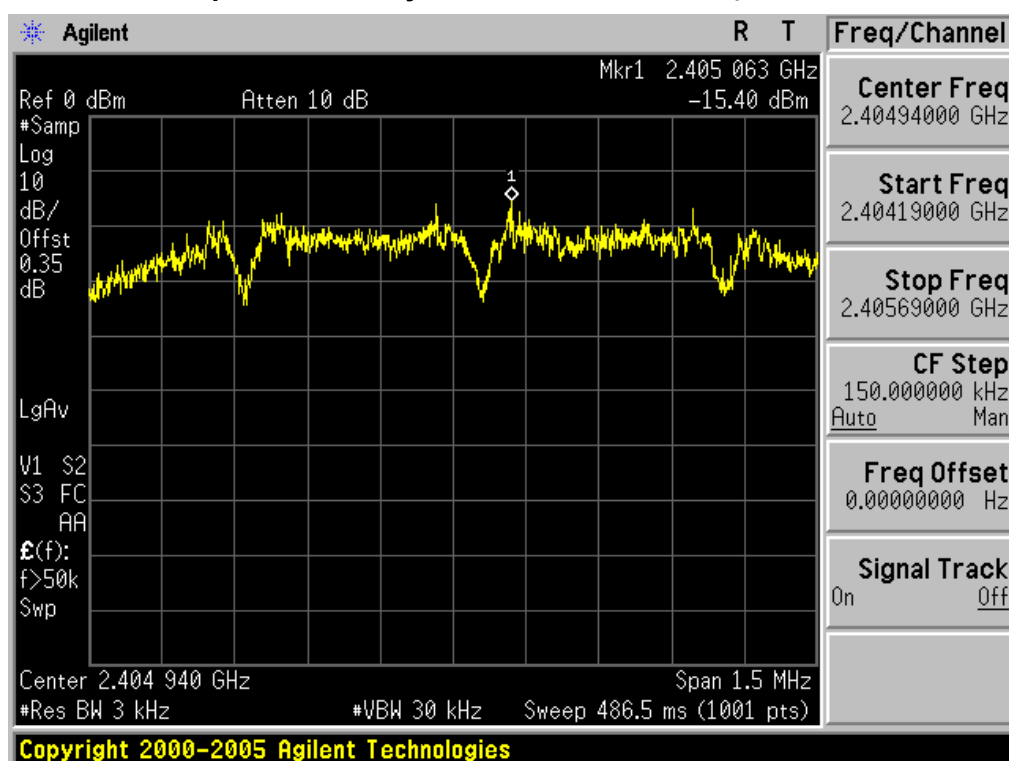


Transmitter Power Spectral Density

Middle Frequency

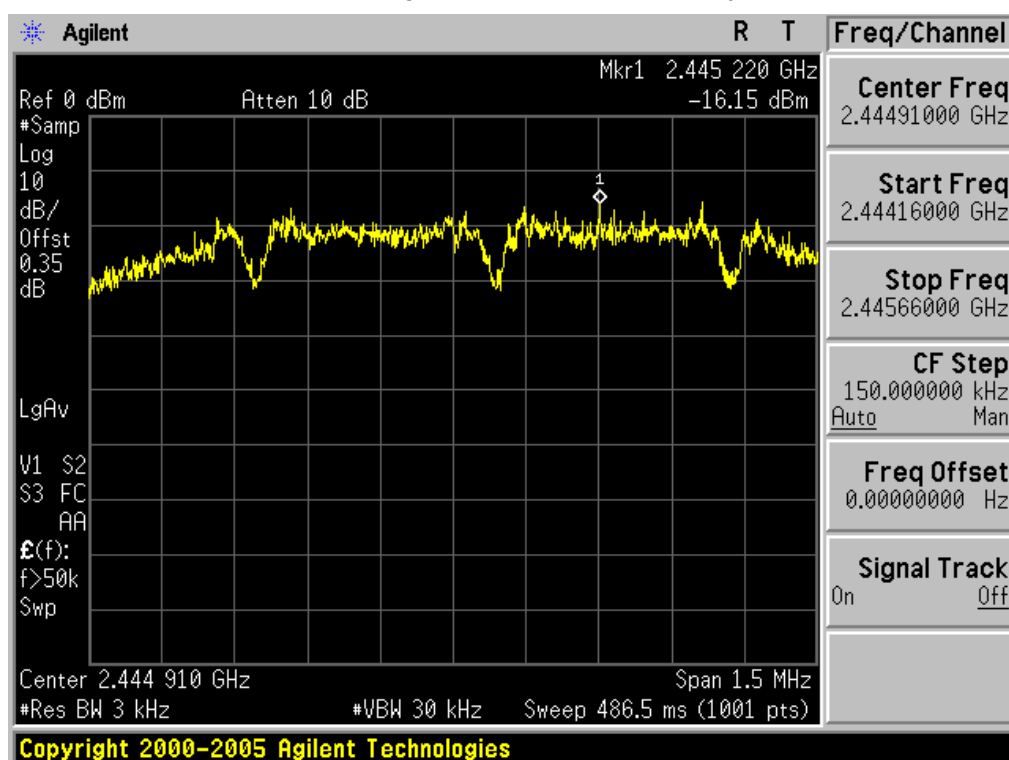

Transmitter Power Spectral Density

Highest Frequency

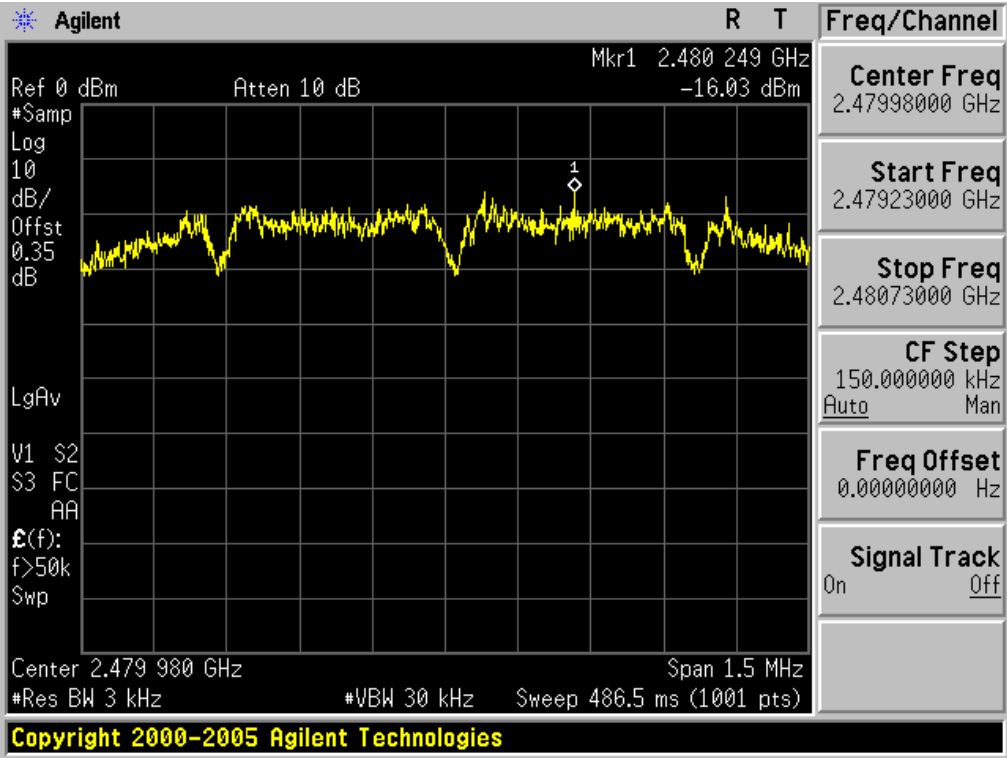

3.2.6 AC Conducted Emissions

- Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) and average mode (AV) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

- Measurement Data: N/A

- Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

3.2.7 Antenna Requirements

- Procedure:

Describe how the EUT complies with the requirement that either its antenna is permanently attached, or that it employs a unique antenna connector, for every antenna proposed for use with the EUT.

- Conclusion: Comply

The antenna is permanently attached by soldering. (Refer to Internal Photo file.)

- Minimum Standard:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions.

APPENDIX

TEST EQUIPMENT FOR TESTS

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment.

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
☒	Spectrum Analyzer	Agilent	E4440A	10/09/30	11/09/30	MY45304199
☐	Spectrum Analyzer	Rohde Schwarz	FSQ26	11/01/11	12/01/11	200445
☐	Spectrum analyzer	Agilent	E4404B	11/03/08	12/03/08	US41061134
☐	Spectrum Analyzer(RE)	H.P	8563E	10/10/04	11/10/04	3551A04634
☐	MXA Signal Analyzer	Agilent Technologies, Inc	N9020A	11/01/07	12/01/07	MY49100833
☐	Power Meter	H.P	EPM-442A	11/07/01	12/07/01	GB37170413
☐	Power Sensor	H.P	8481A	11/07/01	12/07/01	3318A96332
☐	Wideband Power Sensor	Rohde Schwarz	NRP-Z81	11/06/04/	12/06/04	1137.9009.02-101001
☐	Power Divider	Agilent	11636B	10/10/05	11/10/05	56471
☐	4-Way Power Divider	ET Industries	D-0526-4	10/12/24	11/12/24	210195001
☐	Power Splitter	Anritsu	K241B	10/10/05	11/10/05	020611
☐	Power Splitter	Anritsu	K241B	11/07/01	12/07/01	017060
☐	Power Splitters & Dividers	Aeroflex/Weinschel	1594	11/02/21	12/02/21	1177
☐	Frequency Counter	H.P	5342A	11/07/01	12/07/01	2119A04450
☐	TEMP & HUMIDITY Chamber	JISCO	KR-100/J-RHC2	10/10/04	11/10/04	30604493/021031
☒	Digital Multimeter	H.P	34401A	11/03/07	12/03/07	3146A13475, US36122178
☐	Multifunction Synthesizer	HP	8904A	10/10/11	11/10/11	3633A08404
☒	Signal Generator	Rohde Schwarz	SMR20	11/03/08	12/03/08	101251
☐	Signal Generator	H.P	ESG-3000A	11/07/01	12/07/01	US37230529
☐	Vector Signal Generator	Rohde Schwarz	SMJ100A	11/01/11	12/01/11	100148
☐	Vector Signal Generator	Rohde Schwarz	SMBV100A	11/01/11	12/01/11	255571
☐	Audio Analyzer	H.P	8903B	11/07/02	12/07/02	3011A09448
☐	Modulation Analyzer	H.P	8901B	11/07/01	12/07/01	3028A03029
☐	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	11/03/07	12/03/07	GB43461134
☐	Universal Radio communication Tester	Rohde Schwarz	CMU200	11/03/07	12/03/07	106760
☐	Bluetooth Tester	TESCOM	TC-3000B	11/07/01	12/07/01	3000B640046
☐	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-3
☒	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-2
☐	Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-4
☐	AC Power supply	DAEKWANG	5KVA	11/03/08	12/03/08	20060321-1
☒	DC Power Supply	HP	6622A	11/03/07	12/03/07	3448A03760
☐	DC Power Supply	HP	6633A	11/03/07	12/03/07	3524A06634
☐	DC Power Supply	Protek	PWS-3010D	10/10/04	11/10/04	4072702
☐	DC Power Supply	SM techno	SDP30-5D	11/05/20	12/05/20	305DKA013
☐	BAND Reject Filter	Microwave Circuits	N0308372	10/10/05	11/10/05	3125-01DC0352
☐	BAND Reject Filter	Wainwright	WRCG1750	10/10/05	11/10/05	2
☐	High-Pass Filter	ANRITSU	MP526D	10/10/04	11/10/04	M27756
☐	High-pass filter	Wainwright	WHNX2.1	N/A	N/A	1
☒	High-pass filter	Wainwright	WHNX3.0	N/A	N/A	9
☐	High-pass filter	Wainwright	WHNX5.0	N/A	N/A	8

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
☐	High-Pass Filter	Wainwright	WHKX8.5	N/A	N/A	1
☐	High-Pass Filter	Wainwright	D82346	N/A	N/A	9
☐	Tunable Notch Filter	Wainwright	WRCT800.0 /960.0-0.2/40-8SSK	N/A	N/A	32
☐	Tunable Notch Filter	Wainwright	WRCD1700.0 /2000.0-0.2/40-10SSK	N/A	N/A	53
☐	Tunable Notch Filter	Wainwright	WRCT1900.0/ 2200.0-5/40-10SSK	N/A	N/A	30
☒	HORN ANT	ETS	3115	10/10/04	11/10/04	21097
☐	HORN ANT	ETS	3115	11/03/22	12/03/22	6419
☒	HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
☐	HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	155
☐	HORN ANT	SCHWARZBECK	BBHA9120A	10/04/13	12/04/13	322
☐	Dipole Antenna	Schwarzbeck	VHA9103	10/11/29	11/11/29	2116
☐	Dipole Antenna	Schwarzbeck	VHA9103	10/11/29	11/11/29	2117
☐	Dipole Antenna	Schwarzbeck	UHA9105	10/11/29	11/11/29	2261
☐	Dipole Antenna	Schwarzbeck	UHA9105	10/11/29	11/11/29	2262
☐	LOOP Antenna	ETS	6502	10/11/29	11/11/29	3471
☐	Coaxial Fixed Attenuators	Agilent	8491B	11/07/02	12/07/02	MY39260700
☒	Attenuator (3dB)	WEINSCHEL	56-3	10/10/05	11/10/05	Y2342
☐	Attenuator (3dB)	WEINSCHEL	56-3	10/10/05	11/10/05	Y2370
☐	Attenuator (10dB)	WEINSCHEL	23-10-34	10/10/01	11/10/01	BP4386
☐	Attenuator (10dB)	WEINSCHEL	23-10-34	11/01/11	12/01/11	BP4387
☐	Attenuator (10dB)	WEINSCHEL	86-10-11	10/10/05	11/10/05	446
☐	Attenuator (10dB)	WEINSCHEL	86-10-11	10/10/05	11/10/05	408
☐	Attenuator (20dB)	WEINSCHEL	86-20-11	10/10/05	11/10/05	432
☐	Attenuator (30dB)	JFW	50FH-030-300	11/03/07	12/03/07	060320-1
☐	Attenuator (40dB)	WEINSCHEL	57-40-33	10/10/01	11/10/01	NN837
☐	Termination	H.P	HP-909D	11/07/02	12/07/02	02750
☐	Termination	H.P	HP-909D	11/07/02	12/07/02	02702
☐	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0088CAN	11/07/01	12/07/01	788
☐	Type N Coaxial CIRCULATOR	NOVA MICROWAVE	0185CAN	11/07/01	12/07/01	790
☒	Amplifier (30dB)	Agilent	8449B	11/03/07	12/03/07	3008A01590
☐	Amplifier (30dB)	H.P	8449B	11/03/07	12/03/07	3008A00370
☐	Amplifier	EMPOWER	BBS3Q7ELU	10/10/04	11/10/04	1020
☐	RF Power Amplifier	OPHIRRF	5069F	11/07/01	12/07/01	1006
☐	EMI TEST RECEIVER	R&S	ESU	11/01/20	12/01/20	100014
☐	BILOG ANTENNA	SCHAFFNER	CBL6112B	10/07/14	12/07/14	2737
☐	Amplifier (22dB)	H.P	8447E	11/01/11	12/01/11	2945A02865
☒	EMI TEST RECEIVER	R&S	ESCI	11/03/08	12/03/08	100364

	Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
☒	BICONICAL ANT.	Schwarzbeck	VHA 9103	10/11/29	11/11/29	91032789
☒	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/11/29	12/11/29	1098
☐	BICONICAL ANT.	Schwarzbeck	VHA 9103	10/12/21	12/12/21	91031946
☐	LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A1	10/07/07	12/07/07	0590
☐	Low Noise Pre Amplifier	TSJ	MLA-100K01-B01-2	11/03/07	12/03/07	1252741
☐	Low Noise Pre Amplifier	TSJ	MLA-00108-B02-36	11/01/11	12/01/11	1518831
☒	Amplifier (25dB)	Agilent	8447D	11/03/07	12/03/07	2944A10144
☐	Amplifier (25dB)	Agilent	8447D	11/07/01	12/07/01	2648A04922
☐	Spectrum Analyzer(CE)	H.P	8591E	11/03/07	12/03/07	3649A05889
☐	LISN	Kyoritsu	KNW-407	11/01/11	12/01/11	8-317-8
☐	LISN	Kyoritsu	KNW-242	11/07/02	12/07/02	8-654-15
☐	CVCF	NF Electronic	4420	11/03/08	12/03/08	304935/337980
☐	50 ohm Terminator	HME	CT-01	11/01/11	12/01/11	N/A
☐	RFI/FIELD Intensity Meter	Kyoritsu	KNM-2402	11/07/02	12/07/02	4N-170-3
☐	Wideband Radio Communication Tester	R&S	CMW500	10/10/21	11/10/21	100988