


NOTE: CIRCUIT SHOWN WITH DOOR IS OPENED POSITION.
 NOTE: FOR SERVICE REPLACEMENT USE 16 GA 105°C
 THERMOPLASTIC COVERED WIRE EXCEPT
 FOR HIGH VOLTAGE LEADS OR AS NOTED ON SPECIAL LEADS.

WARNING

POWER MUST BE DISCONNECTED
 BEFORE SERVICING THIS APPLIANCE

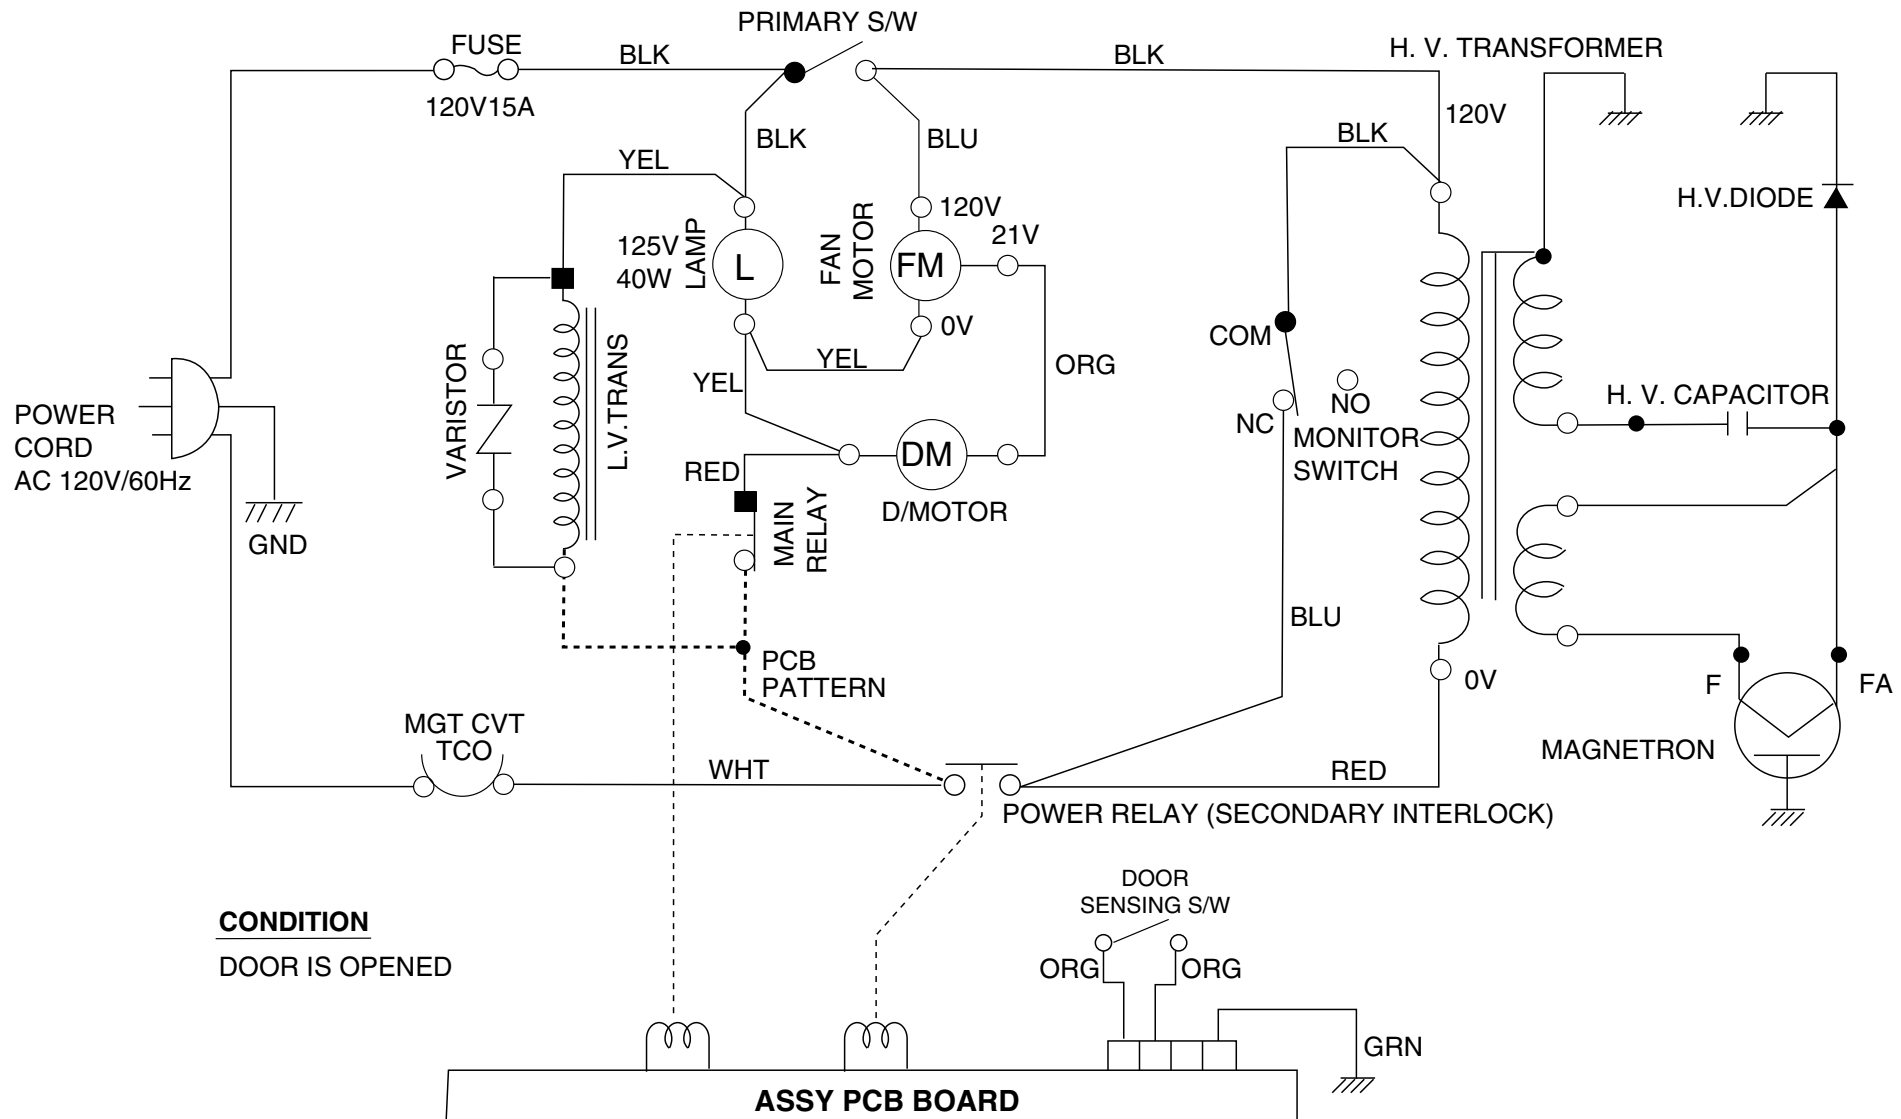

CONDITION

DOOR IS OPENED