


SCHEMATIC DIAGRAM

WARNING

POWER MUST BE DISCONNECTED
BEFORE SERVICING THIS APPLIANCE

OTR7
MODEL NO. : JVM1660, JVM1650, JVM1640, JVM1630

COLOR	SYMBOL
GRAY	GR
WHITE	W
BLACK	B
RED	R
BLUE	BL
ORANGE	O
YELLOW	Y
GREEN	G
PINK	P
AZURE	A
VIOLET	V

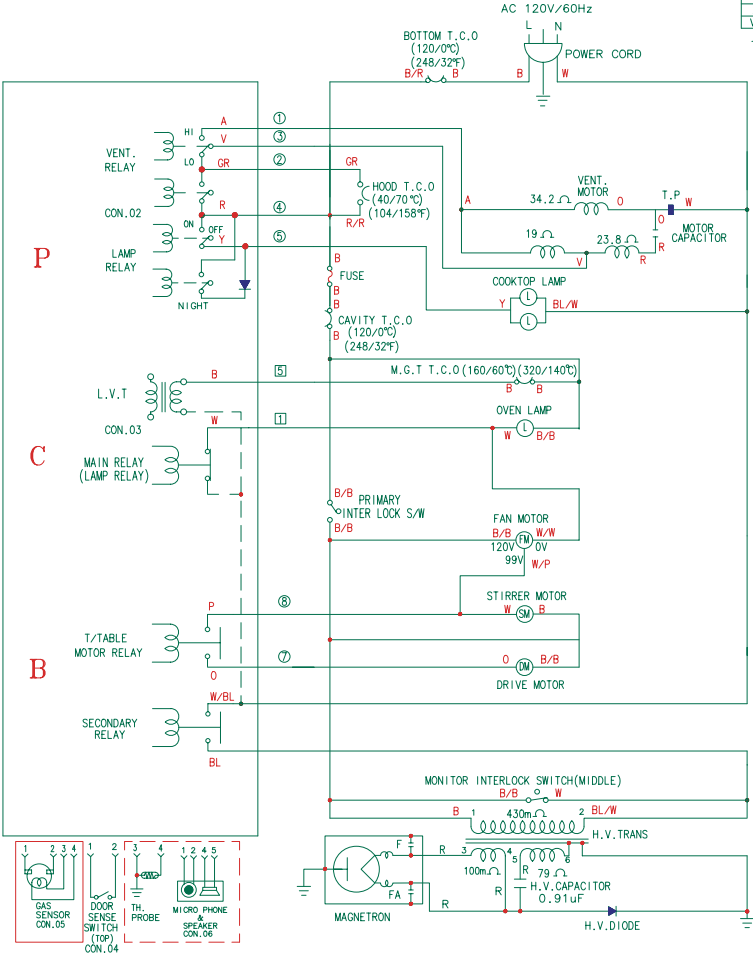

[] : Used in JVM1660
[] : Used in JVM1650

NOTE: DOOR IS OPEN.
PROBE SWITCH IS CLOSED.


WIRING DIAGRAM

WARNING

POWER MUST BE DISCONNECTED
BEFORE SERVICING THIS APPLIANCE

OTR7
MODEL NO. : JVM1660, JVM1650, JVM1640, JVM1630

COLOR	SYMBOL
GRAY	GR
WHITE	W
BLACK	B
RED	R
BLUE	BL
ORANGE	O
YELLOW	Y
GREEN	G
PINK	P
AZURE	A
VIOLET	V

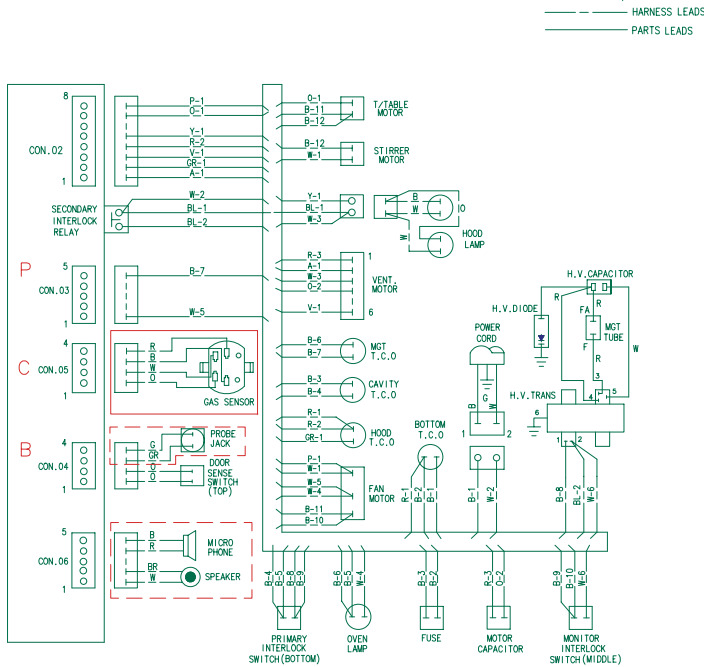

NOTE: FOR SERVICING REPLACEMENT USE 16GA, 105 °C
THERMOPLASTIC COVERED WIRE EXCEPT FOR
HIGH VOLTAGE LEADS OR AS NOTED ON SPECIAL LEADS.

[] : Used in JVM1660
[] : Used in JVM1650