

# EMC TEST REPORT

According to FCC CFR47 Part 18 Subpart C

**JOB Number : SE-01-0482**

1. This test reports does not constitute an endorsement by NIST/NVLAP or U.S Government.
2. This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 18 CFR47 Subpart C Intentional Radiators.  
All tests necessary to show compliance to the requirements were and these results met the specifications requirement.

*This laboratory is registered by the NIST/NVLAP, U.S.A.*

*The test reported herein have been performed in accordance with its terms of registration.*



**1. Applicant Name** : SAMSUNG ELECTRONICS CO., LTD.  
416 Maetan 3 Dong, Paldal-Ku, Suwon City, Kyungki Do, Korea, 442-742

**2. Identification of tested device**

2.1 FCC ID : A3LOTR9ST  
2.2 Device Name : MICROWAVE OVEN  
2.3 Trade Name : SAMSUNG Electronics Co.,Ltd.  
2.4 Model Number : JVM1860WF  
2.5 RF Output Power : 1100 W

**3. Test Procedure and Items**

3.1 FCC/OST MP-5 : 1986

**4. Issued Date** : October 13, 2001

**Tested by:**

Jay Yong, PARK / Test Engineer

**Reviewed by:**

Seung Kyu, CHA / Manager of EMC Lab.

**Authorised by:**

Kyu Baek, CHUNG / Chief of EMC Lab.

## **TABLE OF CONTENTS**

### **1. Product Description**

### **2. Test Facility**

### **3. Accreditation and Listing**

### **4. Radio Noise Emission Measurement Procedures/Results**

#### **4.1 Radiation Hazard Measurement**

#### **4.2 Input Power Measurement**

#### **4.3 RF Output Power Measurement**

#### **4.4 Operation Frequency Measurement**

##### **4.4.1 Variation in Operating Frequency with Time Measurement**

##### **4.4.2 Variation in Operating Frequency with Voltage Measurement**

##### **4.4.3 Variation in Operating Frequency with Time Plot**

##### **4.4.4 Variation in Operating Frequency with Voltage Plot(96Vac)**

##### **4.4.5 Variation in Operating Frequency with Voltage Plot(120Vac)**

##### **4.4.6 Variation in Operating Frequency with Voltage Plot(150Vac)**

#### **4.5 Radiated Emission Measurement**

##### **4.5.1 Radiated Emission Measurement Procedure**

##### **4.5.2 Radiated Emission Measurement Configuration**

##### **4.5.3 Radiated Emission Measurement Data(30 - 1000MHz)**

##### **4.5.4 Radiated Emission Measurement Data(1 - 25GHz)**

### **5. Measurement Equipment List**

## 1. Product Description

The equipment under test is a microwave oven sold for consumer use.

Model : JVM1860WF is a 1100 W microwave oven with digital controls.

Installation Type: Over-the range

### < Magnetron >

Model : OM-75P manufactured by Samsung Electronic Co., Ltd.

## 2. Test Facility

The Semi-anechoic chamber and Conducted measurement facilities used to collect the radiated data are located at 416 Maetan 3 Dong, Paldal-Ku, Suwon City, Kyungki Do, Korea.


The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

## 3. Accreditation and Listing


The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific of accreditation under Lab Code: 200447-0 to perform Electromagnetic Interference tests according to FCC PART 15 and CISPR 22 requirements.

No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission(Registration Number:98856, Anechoic Chamber #1).

#### 4.4 Operation Frequency Measurement

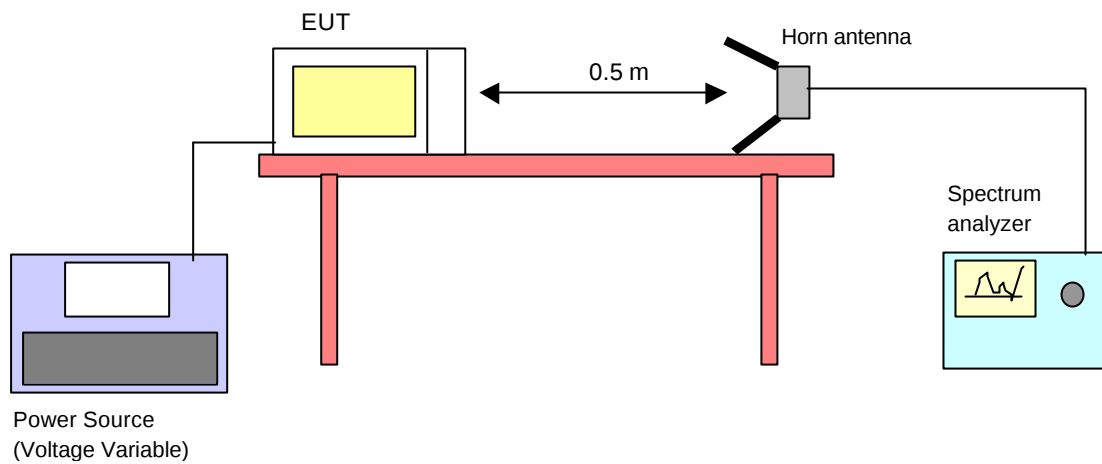

**Fig. 4 Operating Frequency Measurements Configuration**

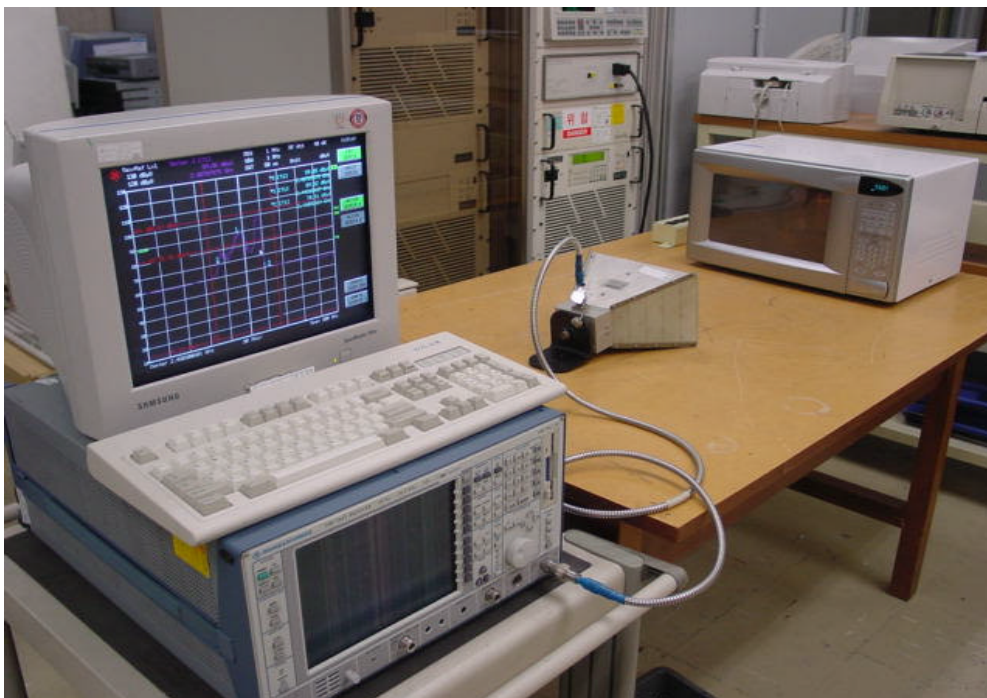

**Fig. 5 Test Setup for Operating Frequency Measurements**

#### 4.4.1 Variation in Operating Frequency with Time Measurement

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000-ml water load was placed in the center of the oven and oven was operated at maximum output power.

The fundamental operating frequency was monitor until the water load was reduced to 20% of the original load.

The results of this test are as follows.

Initial load : 1000 ml

Load at completion of test : 200 ml

Minimum frequency observed : **2407** MHz

Minimum frequency allowed : 2400 MHz

Maximum frequency observed : **2488** MHz

Maximum frequency allowed : 2500 MHz

Refer to spectrum analyzer plot under ATTACHMENTS:

**Variation in Operating Frequency with Time Plot** for details of frequency variation with operating time.

#### 4.4.2 Variation in Operating Frequency with Voltage Measurement


Following the above test, after operating the oven long enough to assure that stable operating temperature were obtained, the operating frequency was monitored as the input voltage was varied between 80 to 125 percent of the nominal rating.


The water load was maintained at 200 ml for the duration of the test.

The results of this test are as follows.

Line voltage varied from 96Vac to 150Vac.


|               |                              |                 |
|---------------|------------------------------|-----------------|
| <b>96Vac</b>  | Minimum frequency observed : | <b>2407</b> MHz |
|               | Minimum frequency allowed :  | 2400 MHz        |
|               | Maximum frequency observed : | <b>2487</b> MHz |
|               | Maximum frequency allowed :  | 2500 MHz        |
| <b>120Vac</b> | Minimum frequency observed : | <b>2407</b> MHz |
|               | Minimum frequency allowed :  | 2400 MHz        |
|               | Maximum frequency observed : | <b>2488</b> MHz |
|               | Maximum frequency allowed :  | 2500 MHz        |
| <b>150Vac</b> | Minimum frequency observed : | <b>2408</b> MHz |
|               | Minimum frequency allowed :  | 2400 MHz        |
|               | Maximum frequency observed : | <b>2489</b> MHz |
|               | Maximum frequency allowed :  | 2500 MHz        |

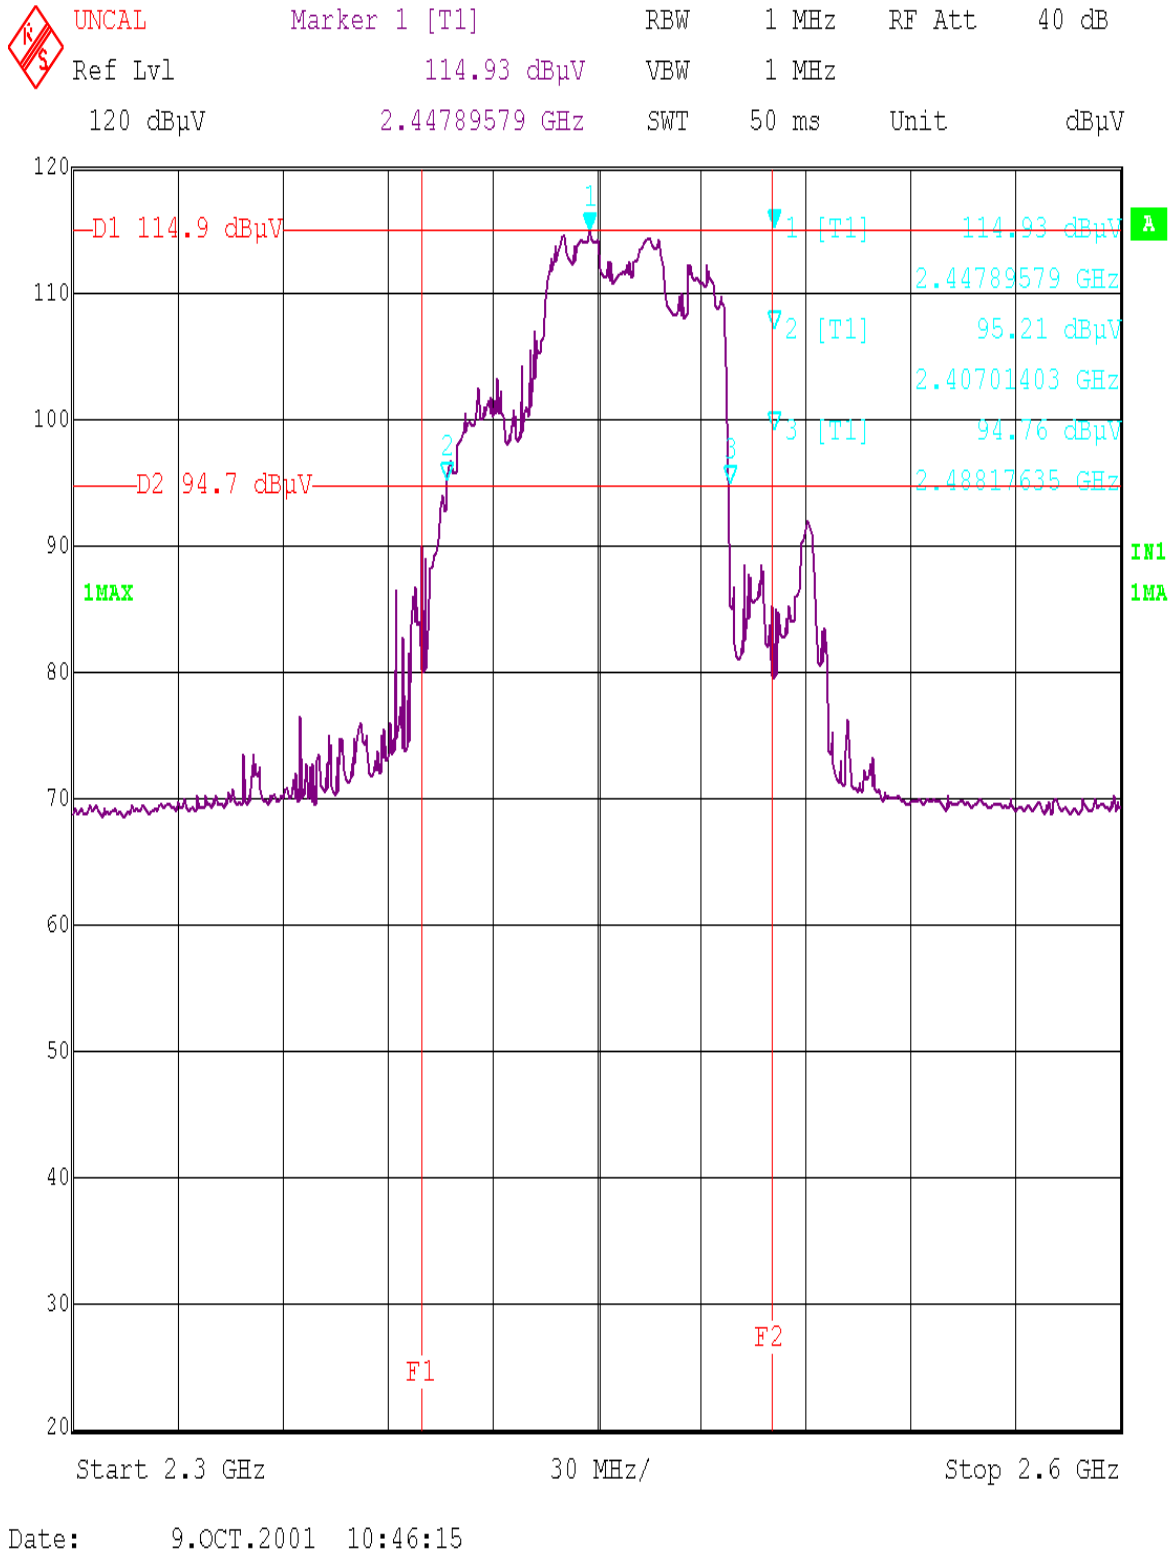**4.4.3 Variation in Operating Frequency with Time Plot**

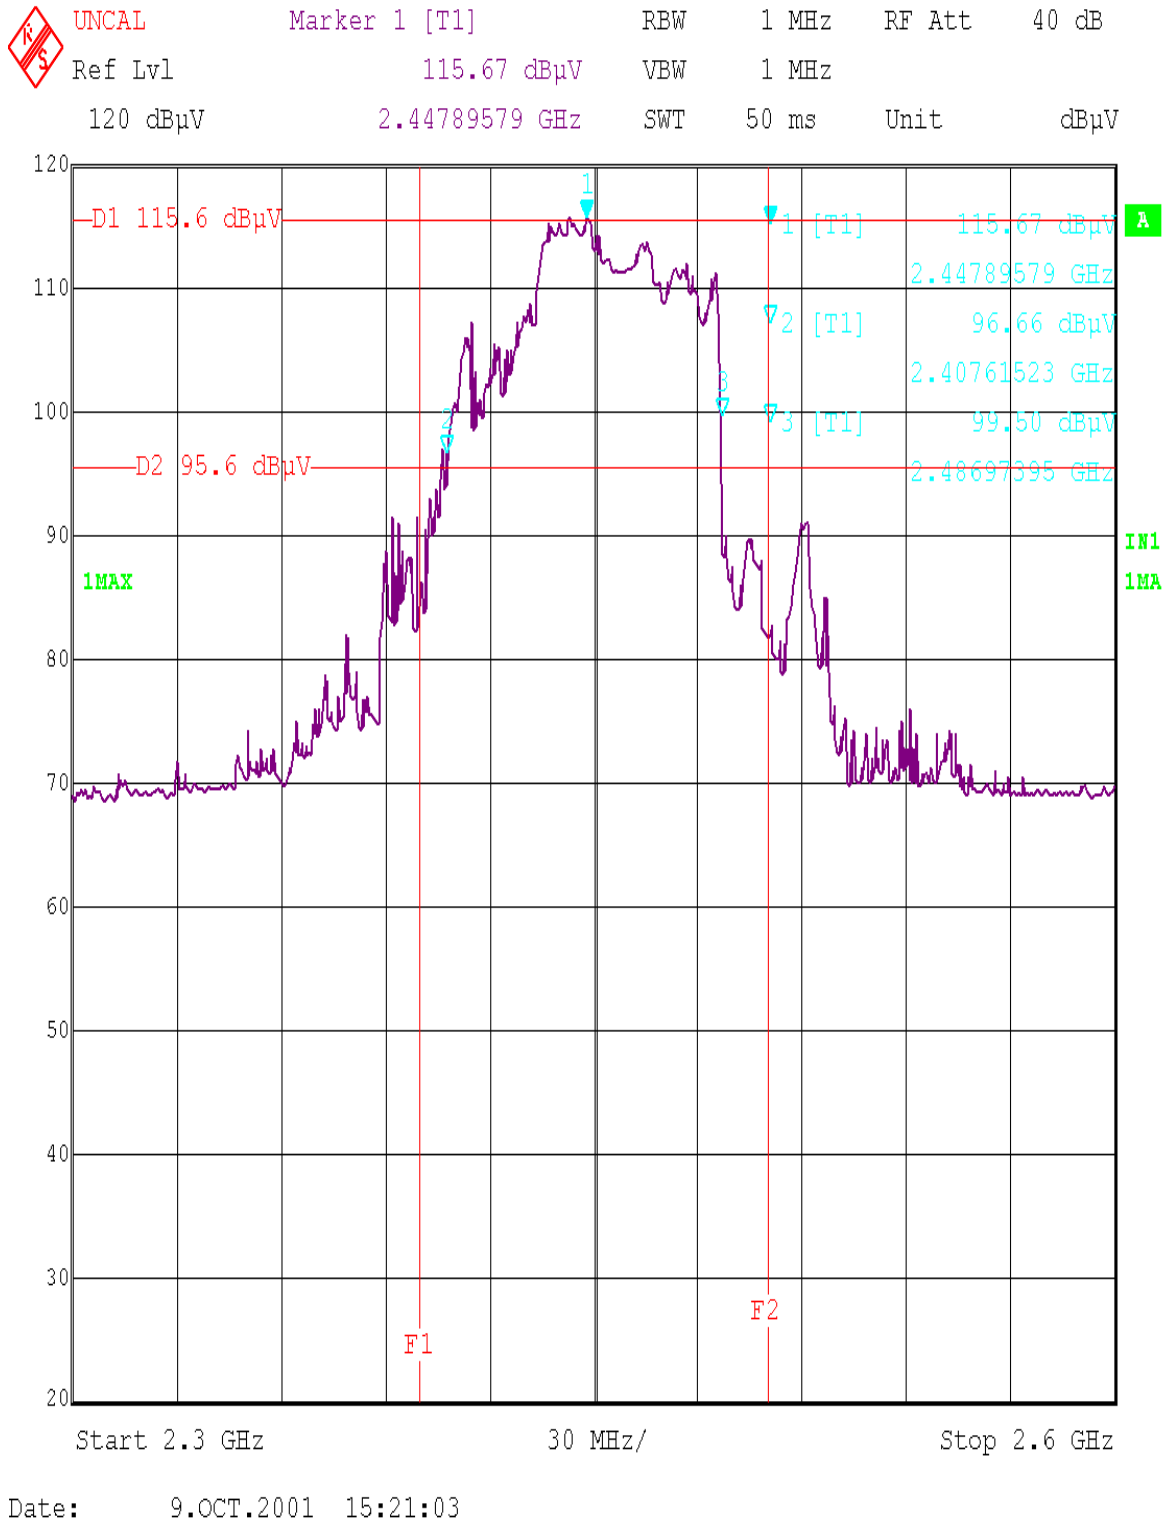**4.4.4 Variation in Operating Frequency with Voltage Plot(96Vac)**


**4.4.5 Variation in Operating Frequency with Voltage Plot(120Vac)**

UNCAL Marker 1 [T1] RBW 1 MHz RF Att 40 dB  
Ref Lvl 114.93 dBμV VBW 1 MHz  
120 dBμV 2.44789579 GHz SWT 50 ms Unit dBμV

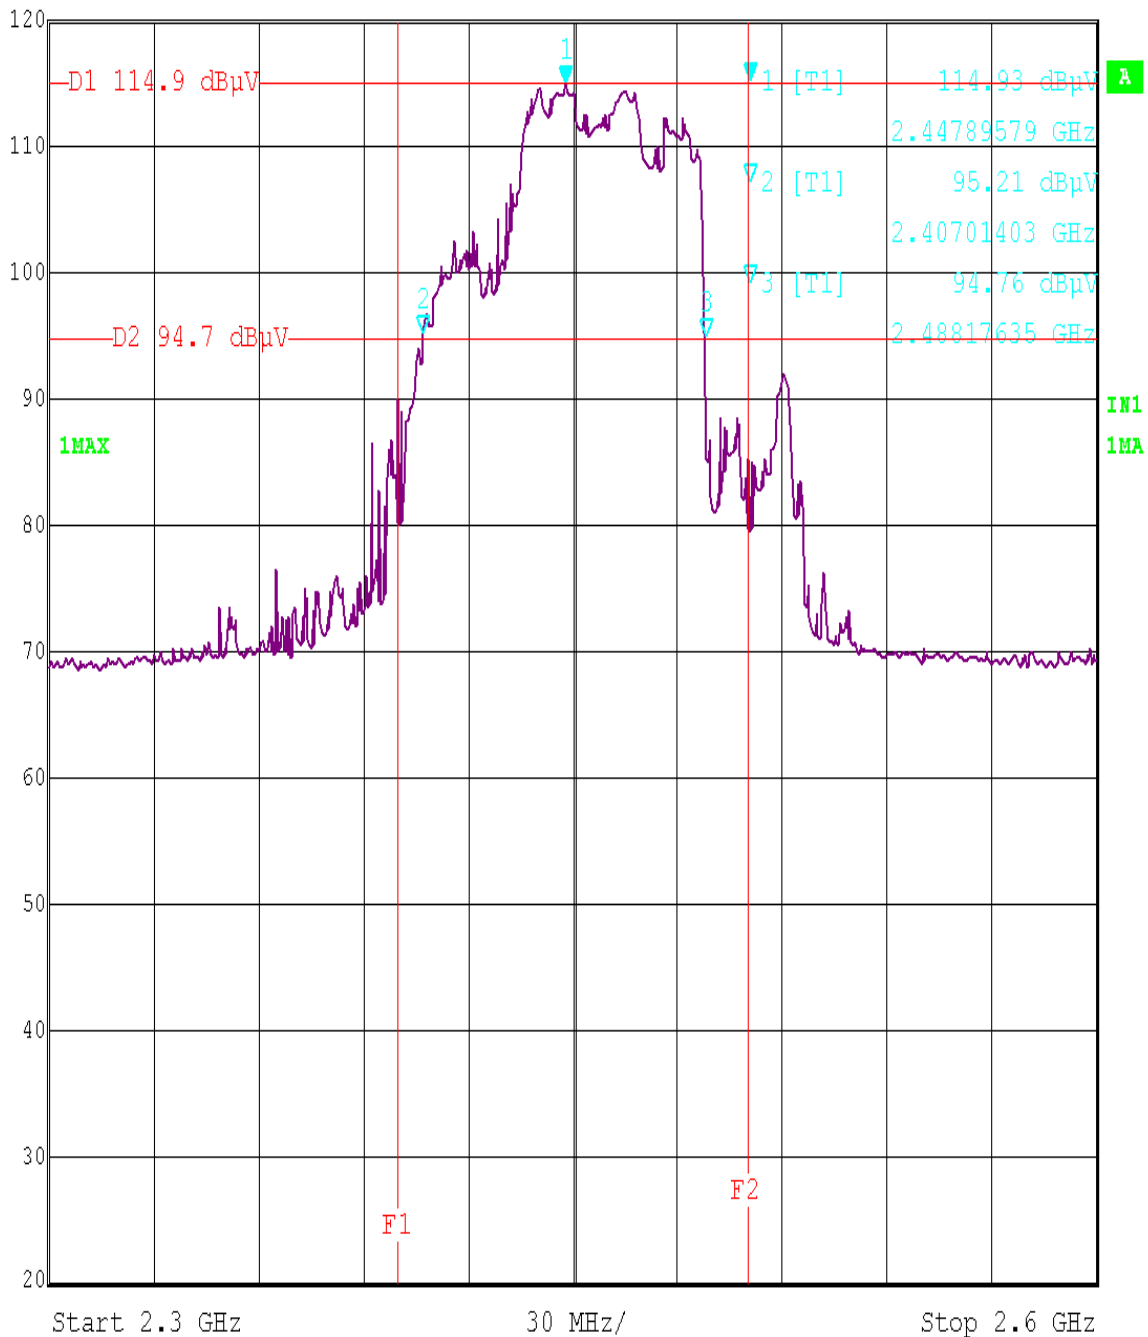

Date: 9.OCT.2001 10:46:15

This reports shall not be reproduced except in full, without the written approval of SEC EMC Testing laboratory.

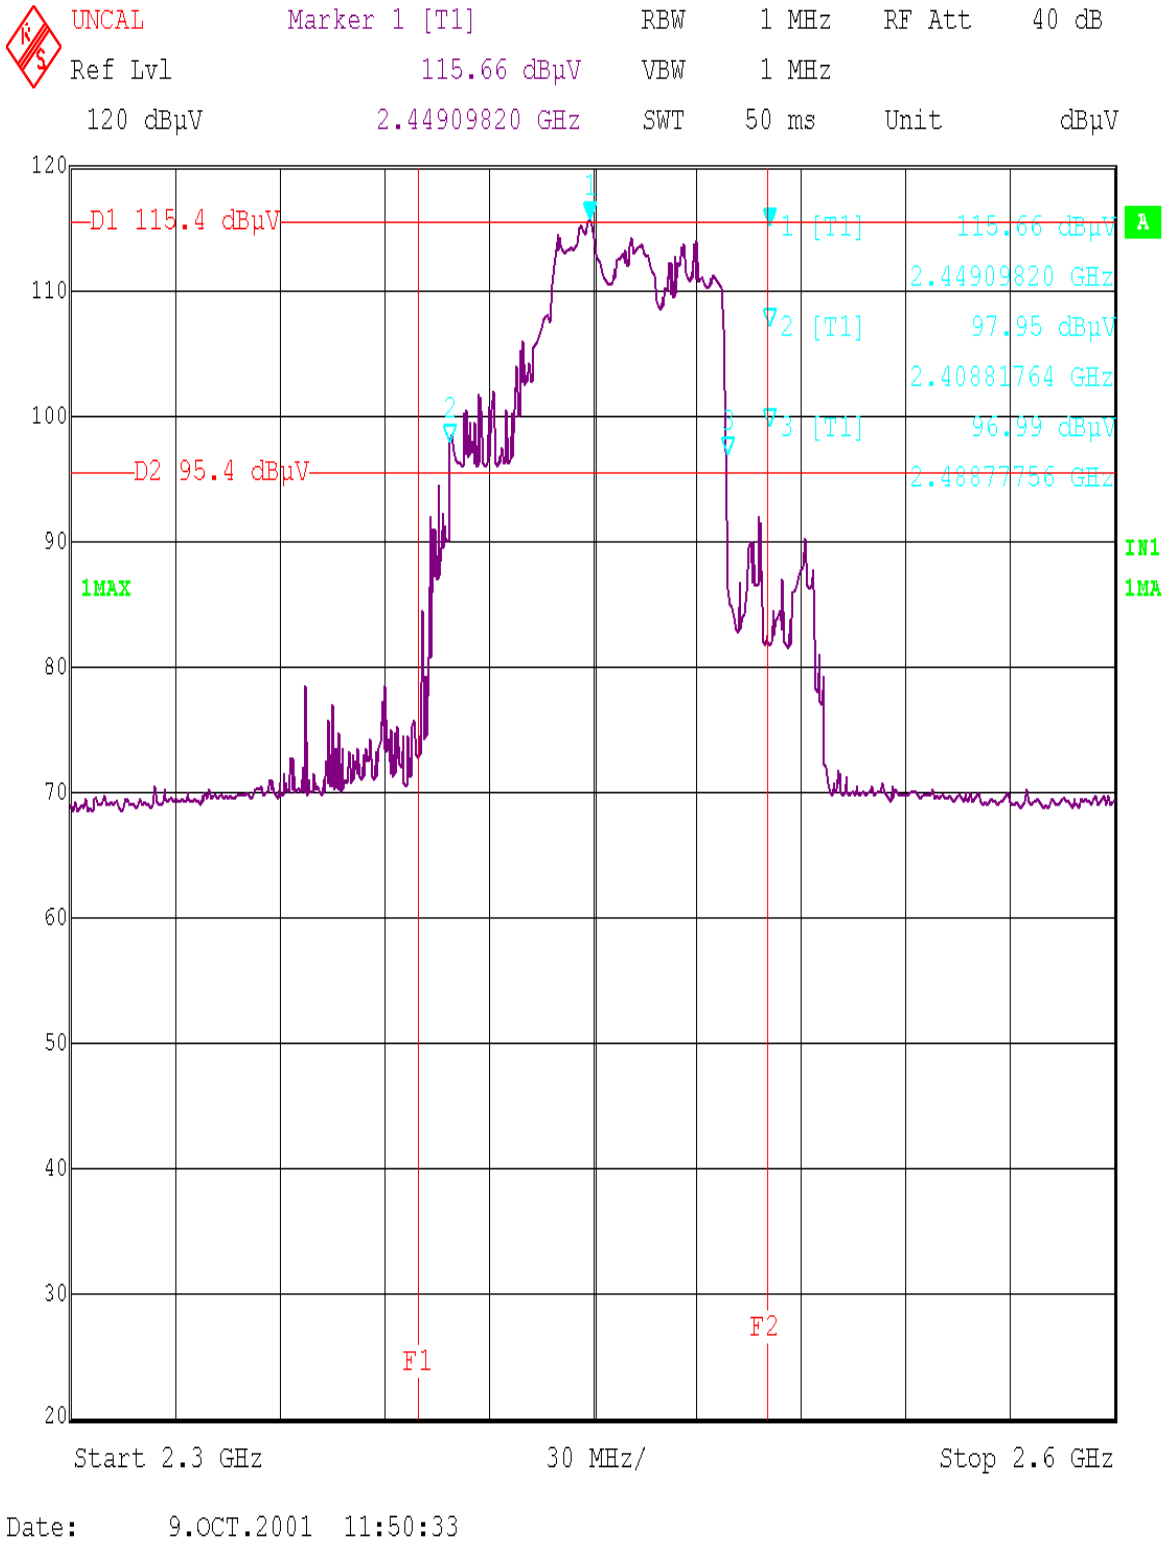**4.4.6 Variation in Operating Frequency with Voltage Plot(150Vac)**

## 4.5 Radiated Emission Measurement

### 4.5.1 Radiated Emission Measurement Procedure

Radiated emission were measured over an inclusive frequency range to 30MHz through the tenth harmonic of the operating frequency. For this test, a 0.8-meter high wooden table in a semi-anechoic chamber supported the device under test. The table was placed on a turntable.

The measurement antenna was placed 3 meters for measurement from 30 to 1,000MHz and 1 meter for measurement from 1 - 25GHz, respectively, for the device under test. The indicated frequency range was swept as device under test was rotated along its vertical axis in 90 degree increments.

During the preliminary tests, the load consisted of 700-ml tap water placed in the center of the oven. The emissions were observed while the device under test was operated at maximum output power.

The level of the emissions near the edge of the designated ISM frequency band was measured. For this test, the load consisted of 700-ml water load located in the center of the oven.

The level of the second and third harmonic were measured inclusively with a 300-ml and 700-ml water load alternately placed in the center and side(or right front corner) of the oven.


The data obtained during these tests is contained on this report.

All other out-of-band emissions were measured while a 700-ml load was placed in the center of the oven. Maximum readings were recorded after variations in antenna polarizations, height, device orientation, load position, and size.


For frequencies above 1GHz, the test receiver detecting mode was set to average detection mode(Model no.:ESI , Rohde & Schwarz).

For all emissions the equivalent 300 meters intensity was calculated assuming linear decrease in the described, there were no over-limit emissions discovered.

#### 4.5.2 Radiated Emission Measurement Configuration

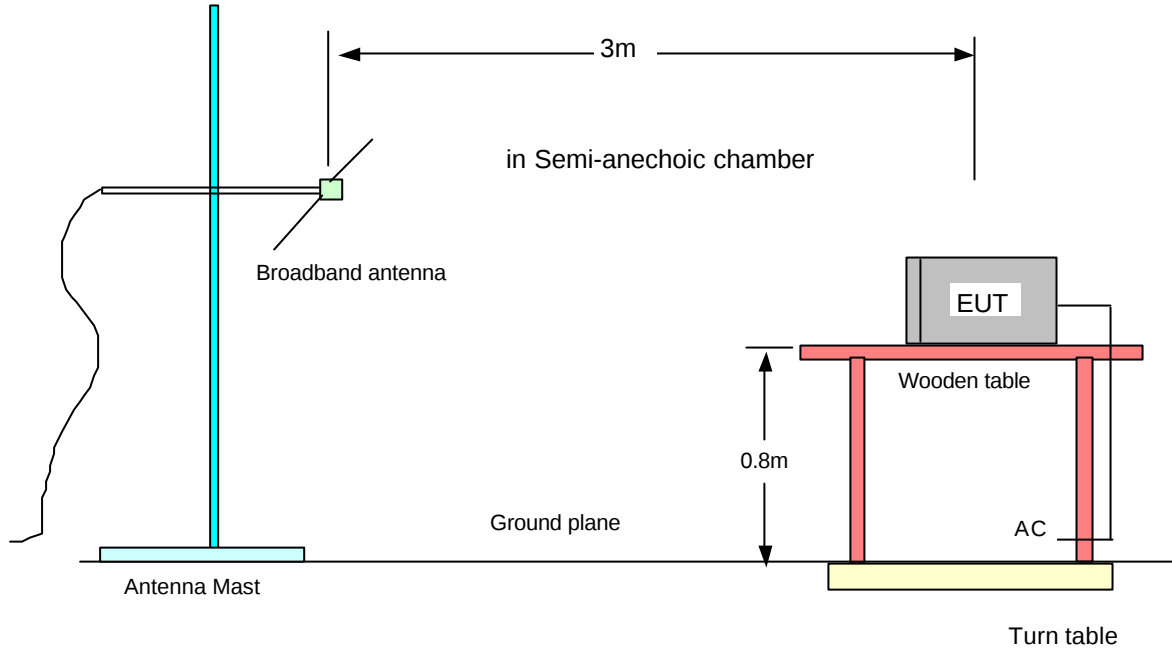

**Fig. 6 Radiated Emission Configuration(30 - 1000MHz)**

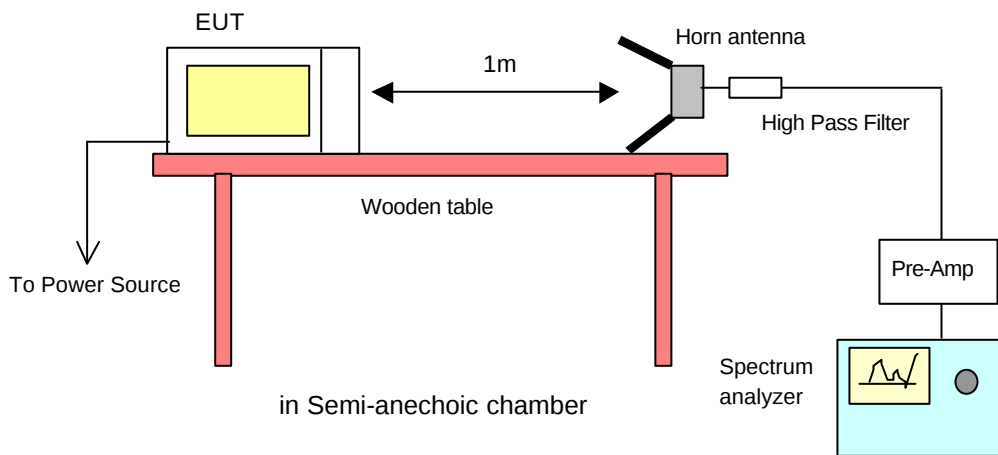

**Fig. 7 Radiated Emission Configuration(1 - 25GHz)**

### 4.5.3 Radiated Emission Measurement Data(30 - 1000MHz)

| Tested<br>Frequency<br>[MHz] | Meter<br>Reading<br>[A]<br>[dBuV] | Total<br>Loss<br>[B]<br>[dB] | Results<br>[A+B]<br>[dBuV/m] | Limits<br>at 3m<br>[dBuV/m] | ANT<br>Pol. | Margin<br>(Result-Limit)<br>[dB] | Antenna<br>Height<br>[Cm] | Turn table<br>Degree<br>[Deg] |
|------------------------------|-----------------------------------|------------------------------|------------------------------|-----------------------------|-------------|----------------------------------|---------------------------|-------------------------------|
|                              | <b>Pk</b>                         |                              | <b>Pk</b>                    |                             |             | <b>Pk</b>                        |                           |                               |
| 37.69                        | 26.7                              | 16.26                        | 43.0                         | 70.48                       | V           | -27.52                           | 132                       | 110                           |
| 64.80                        | 34.8                              | 9.81                         | 44.6                         | 70.48                       | V           | -25.87                           | 125                       | 100                           |
| 128.20                       | 35.3                              | 10.24                        | 45.5                         | 70.48                       | V           | -24.94                           | 120                       | 111                           |
| 356.70                       | 23.2                              | 18.43                        | 41.6                         | 70.48                       | H           | -28.85                           | 350                       | 115                           |
| 530.00                       | 20.5                              | 22.26                        | 42.8                         | 70.48                       | V           | -27.72                           | 100                       | 110                           |
| 978.77                       | 30.7                              | 28.80                        | 59.5                         | 70.48                       | V           | -10.98                           | 100                       | 120                           |

#### [NOTE]

\*  $f_0 = 2450\text{MHz}$

\* Test distance : 3m

\* Results = Meter Reading + Total Loss(Antenna factor + Cable loss)

\* Distance Correction factor :  $20 \times \log(d1/d2)$  [dBuV/m]

$$20 \times \log(300/3) = + 40\text{dBuV/m}$$

\* The limit at 300 meters is 30.48 dBuV/m.

Add 40dB to 30.48 dBuV/m gives a 70.48 dBuV/m @ 3 meters.

\* Spectrum analyzer setting

Peak(Pk) : Resolution Bandwidth(1MHz), Video Bandwidth(1MHz)

## 4.5.4 Radiated Emission Measurement Data(1 - 25GHz)

| Tested<br>Frequency | Meter<br>Reading | Total<br>Loss | AMP   | DIST  | HPF  | Results<br>[A+B] | Limits<br>at 1m | ANT<br>Pol. | Margin    |
|---------------------|------------------|---------------|-------|-------|------|------------------|-----------------|-------------|-----------|
| [MHz]               | [dBuV]           | [dB]          | [dB]  | [dB]  | [dB] | [dBuV/m]         | [dBuV/m]        |             | [dB]      |
|                     | <b>Av</b>        |               |       |       |      | <b>Av</b>        | <b>Av</b>       |             | <b>Av</b> |
| 1.08                | 32.8             | 28.91         | 31.25 | 49.54 | 0    | -19.08           | 30.51           | V           | -49.59    |
| 2.13                | 37.2             | 33.32         | 31.25 | 49.54 | 0    | -10.23           | 30.48           | V           | -40.72    |
| 4.90                | 58.0             | 44.89         | 31.25 | 49.54 | 0    | 22.10            | 30.48           | H           | -8.38     |
| 5.43                | 35.6             | 46.85         | 31.25 | 49.54 | 0    | 1.66             | 30.48           | V           | -28.83    |
| 6.31                | 36.4             | 48.60         | 31.25 | 49.54 | 1    | 5.21             | 30.48           | V           | -25.28    |
| 7.39                | 37.2             | 51.78         | 31.25 | 49.54 | 1    | 9.20             | 30.48           | V           | -21.28    |

**[NOTE]**

\*  $f_o = 2450\text{MHz}$

\* **DIST**: Correction to extrapolate reading to 300m specification distance

\* **Total Loss**: Antenna Factor+ Cable Loss, **HPF**: High Pass Filter(4.5GHz)

\* **AMP**: Pre-amplifier

\* Distance Correction factor :  $20 \times \log(d1/d2)[\text{dBuV/m}]$

$$20 \times \log(300/1) = + 49.542\text{dBuV/m}$$

\* The limit at 300 meters is 30.48 dBuV/m @ 1 meters.

\* Results = Meter Reading +Total Loss-AMP-DIST+HPF

\* Margin = Result-Limit

## 5. Measurement Equipment List

| Equipment                   | Model No. | Serial No. | Makers | Calibration Last calibration and Interval |
|-----------------------------|-----------|------------|--------|-------------------------------------------|
| Spectrum analyzer           | 8566B     | 3340A21744 | H.P    | 01/ 3/15, 12Months                        |
| Spectrum analyzer           | 8563E     | 3623A05349 | H.P    | 01/ 3/15, 12Months                        |
| Quasi-peak adapter          | 85650A    | 3303A01784 | H.P    | 01/01/27, 12Months                        |
| RF Preselector              | 85685A    | 2602A00224 | H.P    | 01/10/10, 12Months                        |
| Pre-Amplifier               | 8449B     | 3008A00705 | H.P    | 01/ 7/ 3, 12Months                        |
| Field strength meter        | ESI       | 832692/002 | R & S  | 01/ 6/13, 12Months                        |
| Field strength meter        | ESS       | 844861/005 | R & S  | 01/ 6/23, 12Months                        |
| Double Ridged Guide Antenna | 3115      | 9505-4441  | EMCO   | 01/ 5/23, 12Months                        |
| Double Ridged Guide Antenna | 3116      | 2202       | EMCO   | 01/ 5/23, 12Months                        |
| Microwave Survey Meter      | HI-1501   | 93661      | H.I    | 01/10/02, 1Months                         |
| High Pass Filter            | 3H10-4500 | 2          | K & L  | 00/11/23, 12Months                        |
| Biconilog Antenna           | 3142      | 1237       | EMCO   | 01/01/02, 12Months                        |