




PCTEST Engineering Laboratory, Inc.

6660-B Dobbin Road · Columbia, MD 21045 · U.S.A.

TEL (410) 290-6652 · FAX (410) 290-6654

<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 22 Certification

SAMSUNG ELECTRONICS CO., LTD.
3351 Michelson Drive, Suite 290
Irvine, CA 92612

Dates of Tests: September 24-25, 2003
Test Report S/N: 22.230924466.A3L
Test Site: PCTEST Lab, Columbia MD

FCC ID

A3LSCHA633

APPLICANT

SAMSUNG ELECTRONICS CO., LTD.


Classification: Non-Broadcast Transmitter Held to Ear (TNE)
FCC Rule Part(s): §22(H), §22.901(d); §2
EUT Type: Single-Mode Cellular Phone (CDMA)
Model: SCH-A633
Tx Frequency Range: 824.70 – 848.31MHz (CDMA)
Rx Frequency Range: 869.70 – 893.31MHz (CDMA)
Max. RF Output Power: 0.228 W ERP CDMA (23.58 dBm)
Max. SAR Measurement: 1.44 W/kg CDMA Head SAR; 0.757 W/kg CDMA Body SAR
Emission Designator(s): 1M25F9W (CDMA)
Test Device Serial No. Identical Prototype [S/N: FA-014-J]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant conditions: Output is ERP. SAR compliance for body-worn operating configuration is based on a separation distance of 1.5 cm between the back of the unit and the body of the user. End-users must be informed of the body-worn operating requirements for satisfying RF exposure compliance. Belt clips or holsters may not contain metallic components. The highest reported SAR values are – Head: 1.44 W/kg; Body-worn: 0.757 W/kg.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Alfred Cirvithian
Vice President Engineering



2 3 0 9 2 4 4 6 6 . A 3 L

PCTEST® PT. 22/24 REPORT	FCC MEASUREMENT REPORT			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 1 of 18


TABLE OF CONTENTS

1.1 SCOPE	3
2.1 INTRODUCTION	4
3.1 INSERTS	5
4.1 DESCRIPTION OF TESTS	6-8
5.1 EFFECTIVE RADIATED POWER OUTPUT	9
6.1 RADIATED MEASUREMENTS	10-12
7.1 FREQUENCY STABILITY	13-14
8.1 PLOTS OF EMISSIONS	15
9.1 LIST OF TEST EQUIPMENT	16
10.1 SAMPLE CALCULATIONS	17
11.1 CONCLUSION	18
APPENDIX A: TEST PLOTS	

PCTEST® PT. 22/24 REPORT		FCC MEASUREMENT REPORT		Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 2 of 18



MEASUREMENT REPORT



1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033 General Information

Applicant Name: SAMSUNG ELECTRONICS CO., LTD.
Address: 3351 Michelson Drive, Suite 290
Irvine, CA 92612

- FCC ID: **A3LSCHA633**
- Quantity: Quantity production is planned
- Emission Designators: 1M25F9W (CDMA)
- Tx Freq. Range: 824.70 – 848.31 MHz (CDMA)
- Rx Freq. Range: 869.70 – 893.31 MHz (CDMA)
- Max. Power Rating: 0.228 W ERP CDMA (23.58 dBm)
- FCC Classification(s): Non-Broadcast Transmitter Held to Ear (TNE)
- Equipment (EUT) Type: Single-Mode Cellular Phone (CDMA)
- Modulation(s): CDMA
- Frequency Tolerance: $\pm 0.00025\%$ (2.5 ppm)
- FCC Rule Part(s): §22(H), §22.901(d)
- Dates of Tests: September 24-25, 2003
- Place of Tests: PCTEST Lab, Columbia, MD U.S.A.
- Test Report S/N: 22.230924466.A3L

PCTEST® PT. 22/24 REPORT	 FCC MEASUREMENT REPORT 			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 3 of 18

2.1 INTRODUCTION

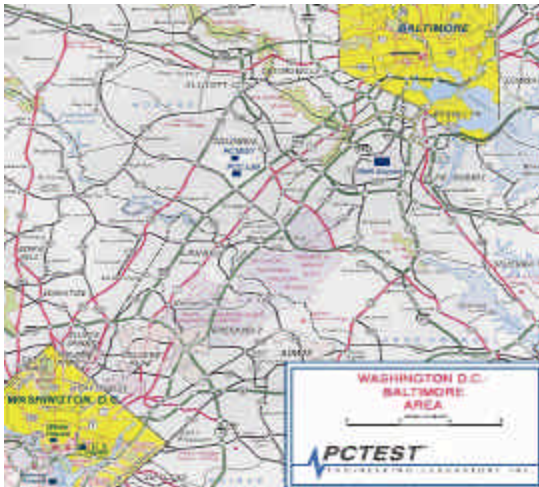


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

These measurement tests were conducted at **PCTEST Engineering Laboratory, Inc.** facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.

Measurement Procedure

The radiated and spurious measurements were made outdoors at a 3-meter test range (see Figure2). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

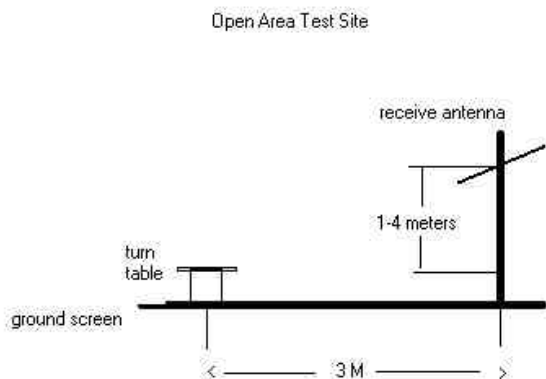


Figure 2. Diagram of 3-meter outdoor test range

PCTEST® PT. 22/24 REPORT		FCC MEASUREMENT REPORT		Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 4 of 18

3.1 INSERTS

Function of Active Devices (Confidential)

Block & Schematic Diagrams (Confidential)

Operating Instructions

Parts List & Tune-Up Procedure (Confidential)

Description of Freq. Stabilization Circuit (Confidential)

Description for Suppression of Spurious Radiation, for Limiting Modulation, and Harmonic Suppression Circuits (Confidential)


PCTEST PT. 22/24 REPORT		FCC MEASUREMENT REPORT		Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 5 of 18

4.1 DESCRIPTION OF TESTS (CONTINUED)

4.2 Occupied Bandwidth Emission Limits

- On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

4.3 Cellular - Base Frequency Blocks

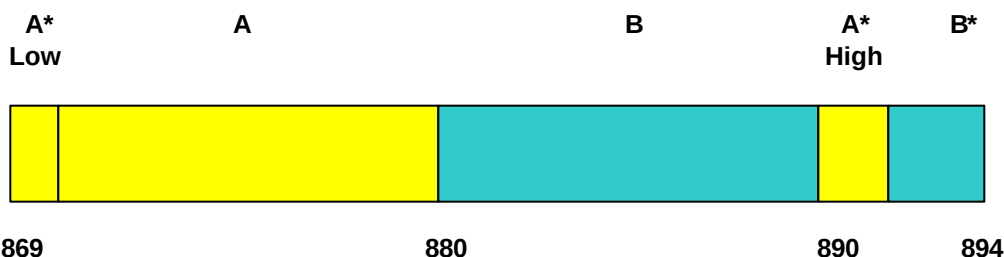


BLOCK 1: 869 – 880 MHz (A* Low + A)

BLOCK 3: 890 – 891.5 MHz (A* High)

BLOCK 2: 880 – 890 MHz (B)

BLOCK 4: 891.5 – 894 MHz (B*)

4.4 Cellular - Mobile Frequency Blocks

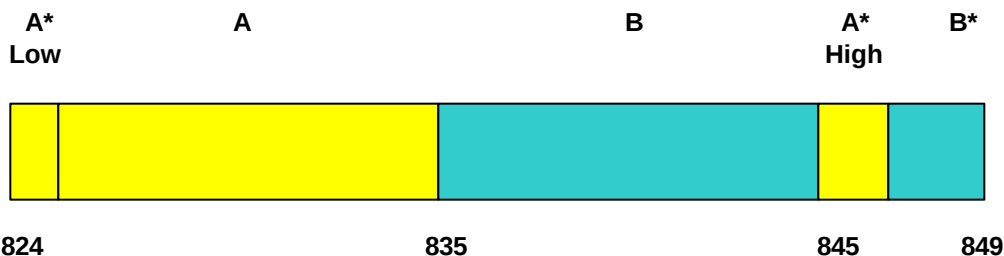

BLOCK 1: 824 – 835 MHz (A* Low + A)

BLOCK 3: 845 – 846.5 MHz (A* High)

BLOCK 2: 835 – 845 MHz (B)

BLOCK 4: 846.5 – 849 MHz (B*)

PCTEST® PT. 22/24 REPORT	FCC MEASUREMENT REPORT			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 6 of 18

4.1 DESCRIPTION OF TESTS (CONTINUED)

4.5 Occupied Bandwidth

The audio signal generator is adjusted to 1kHz. The output level is set to ± 6 kHz deviation. With the level constant, the frequency is set to 2500Hz. Then the audio signal level is increased by 16dB. The occupied bandwidth data is obtained for the SAT (Supervisory Audio Tone), ST (Signaling Tone), WBD (Wideband data), and DTMF (Dual Tone Multi Frequencies). The results are shown on the attached graphs.

Specified Limits:

- On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45kHz, the sideband is at least 26dB below the carrier.
- On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 90kHz, the sideband is at least 45dB below the carrier.
- On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60dB below the carrier or $40 + \log_{10}$ (mean power output in Watts) dB, whichever is the smaller attenuation.

4.6 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to 10 GHz. The transmitter is modulated with a 2500Hz tone at a level of 16dB greater than that required to provide 50% modulation.

At the input terminals of the spectrum analyzer, an isolator (RF circulator with one port terminated with 50 ohms) and an 870 MHz to 890 MHz bandpass filter is connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The rejection of the bandpass filter to signals in the 825 – 845 MHz range is adequate to limit the transmit energy from the test transceiver which appears to a level which will allow the analyzer to measure signals less than -90 dBm. Calibration of the test receiver is performed in the 870 – 890 MHz range to insure accuracy to allow variation in the bandpass filter insertion loss to be calibrated.

4.7 Frequencies

At the input terminals of the spectrum analyzer, an isolator (RF pad) and an high-pass filter are connected between the test transceiver (for conducted tests) or the receive antenna (for radiated tests) and the analyzer. The high-pass filter (signals below 1.6 GHz) is to limit the fundamental frequency from interfering with the measurement of low-level spurious and harmonic emissions and to ensure that the preamplifier is not saturated.

4.8 Radiation Spurious and Harmonic Emissions

Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST® PT. 22/24 REPORT		FCC MEASUREMENT REPORT			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 7 of 18	

5.0 Frequency Stability/Temperature Variation.

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +60°C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ± 0.00025 (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (22°C to 25°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (usually 14-16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE: The EUT is tested down to the battery endpoint.

PCTEST® PT. 22/24 REPORT		FCC MEASUREMENT REPORT			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 8 of 18	

5.1 Test Data

5.2 Effective Radiated Power Output

A. POWER: **High (CDMA Mode)**

Freq. Tuned (MHz)	REF. LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)	BATTERY
824.70	-19.100	H	0.165	22.17	Standard
835.89	-17.850	H	0.228	23.58	Standard
848.31	-18.490	H	0.204	23.09	Standard

Note: Standard batteries are the only options for this phone

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

PCTEST® PT. 22/24 REPORT		FCC MEASUREMENT REPORT		Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 9 of 18

6.1 Test Data

6.2 CELLULAR CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013 (Low)
 MEASURED OUTPUT POWER: 23.580 dBm = 0.228 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.58 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-23.33	6.10	-17.23	H	40.8
2474.10	-37.28	6.70	-30.58	H	54.2
3298.80	-44.58	6.80	-37.78	H	61.4
4123.50	-60.68	6.50	-54.18	H	77.8
4948.20	-53.38	7.00	-46.38	H	70.0

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST® PT. 22/24 REPORT		FCC MEASUREMENT REPORT		Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 10 of 18

6.1 Test Data (Continued)

6.3 CELLULAR CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 835.89 MHz
 CHANNEL: 0363 (Mid)
 MEASURED OUTPUT POWER: 23.580 dBm = 0.228 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.58 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1671.78	-28.78	6.10	-22.68	H	46.3
2507.67	-34.58	6.70	-27.88	H	51.5
3343.56	-46.48	6.80	-39.68	H	63.3
4179.45	-71.78	6.50	-65.28	H	88.9
5015.34	-51.28	7.00	-44.28	H	67.9

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST® PT. 22/24 REPORT	FCC MEASUREMENT REPORT			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 11 of 18

6.1 Test Data (Continued)

6.4 CELLULAR CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 0777 (High)
 MEASURED OUTPUT POWER: 23.580 dBm = 0.228 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 36.58 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-25.68	6.10	-19.58	H	43.2
2544.93	-36.08	6.70	-29.38	H	53.0
3393.24	-42.08	6.80	-35.28	H	58.9
4241.55	-70.38	6.50	-63.88	H	87.5
5089.86	-53.18	7.00	-46.18	H	69.8

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
according to ANSI/TIA/EIA-603-A-2001, Aug. 15, 2001:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

PCTEST® PT. 22/24 REPORT		FCC MEASUREMENT REPORT		Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 12 of 18

7.1 Test Data

7.2 FREQUENCY STABILITY (CDMA)

OPERATING FREQUENCY: 835.890.004 Hz

CHANNEL: 363


REFERENCE VOLTAGE: 3.7 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	3.70	+ 20 (Ref)	835,890,004	0.000000
100 %		- 30	835,889,937	0.000008
100 %		- 20	835,889,971	0.000004
100 %		- 10	835,889,979	0.000003
100 %		0	835,889,962	0.000005
100 %		+ 10	835,889,987	0.000002
100 %		+ 20	835,890,004	0.000000
100 %		+ 25	835,889,971	0.000004
100 %		+ 30	835,890,046	-0.000005
100 %		+ 40	835,890,054	-0.000006
100 %		+ 50	835,890,079	-0.000009
100 %		+ 60	835,890,088	-0.000010
85 %	3.17	+ 20	835,890,004	0.000000
115 %	4.26	+ 20	835,890,004	0.000000
BATT. ENDPOINT	3.12	+ 20	835,890,004	0.000000

7.1 Test Data (Continued)

7.3 FREQUENCY STABILITY (CDMA)

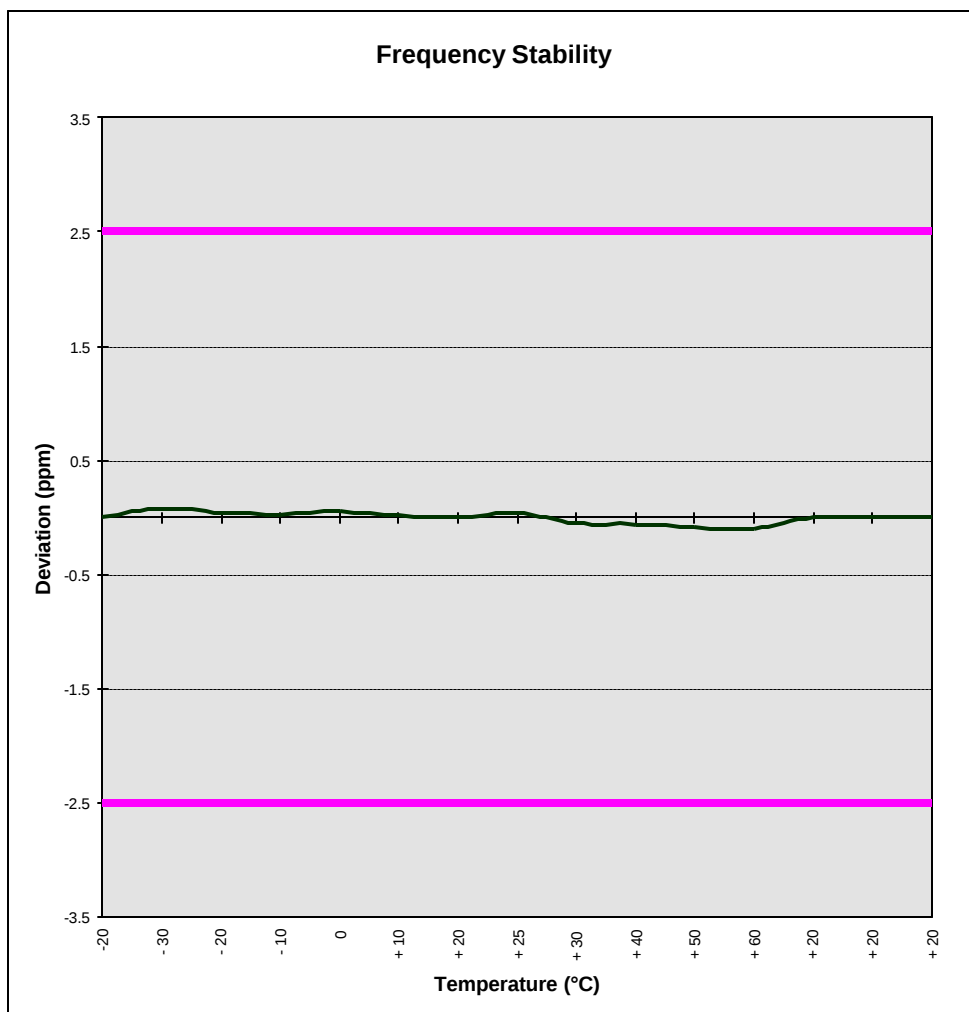

PCTEST® PT. 22/24 REPORT	FCC MEASUREMENT REPORT			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 14 of 18

8.1 PLOT(S) OF EMISSIONS

(SEE APPENDIX A)

PCTEST® PT. 22/24 REPORT	 FCC MEASUREMENT REPORT 			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 15 of 18

10.1 SAMPLE CALCULATIONS

A. Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)



PCTEST® PT. 22/24 REPORT	 FCC MEASUREMENT REPORT			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 17 of 18



11.1 CONCLUSION



The data collected shows that the **SAMSUNG ELECTRONICS CO., LTD. Single-Mode Cellular Phone (CDMA)** **FCC ID: A3LSCHA633** complies with all the requirements of Parts 2 and 22 of the FCC rules.



PCTEST® PT. 22/24 REPORT	 FCC MEASUREMENT REPORT 			Reviewed By: Quality Manager
Test Report S/N: 22.230924466.A3L	Test Dates: September 24-25, 2003	Phone Type: Single-Mode Cellular (CDMA)	FCC ID: A3LSCHA633	Page 18 of 18



APPENDIX A: TEST PLOTS

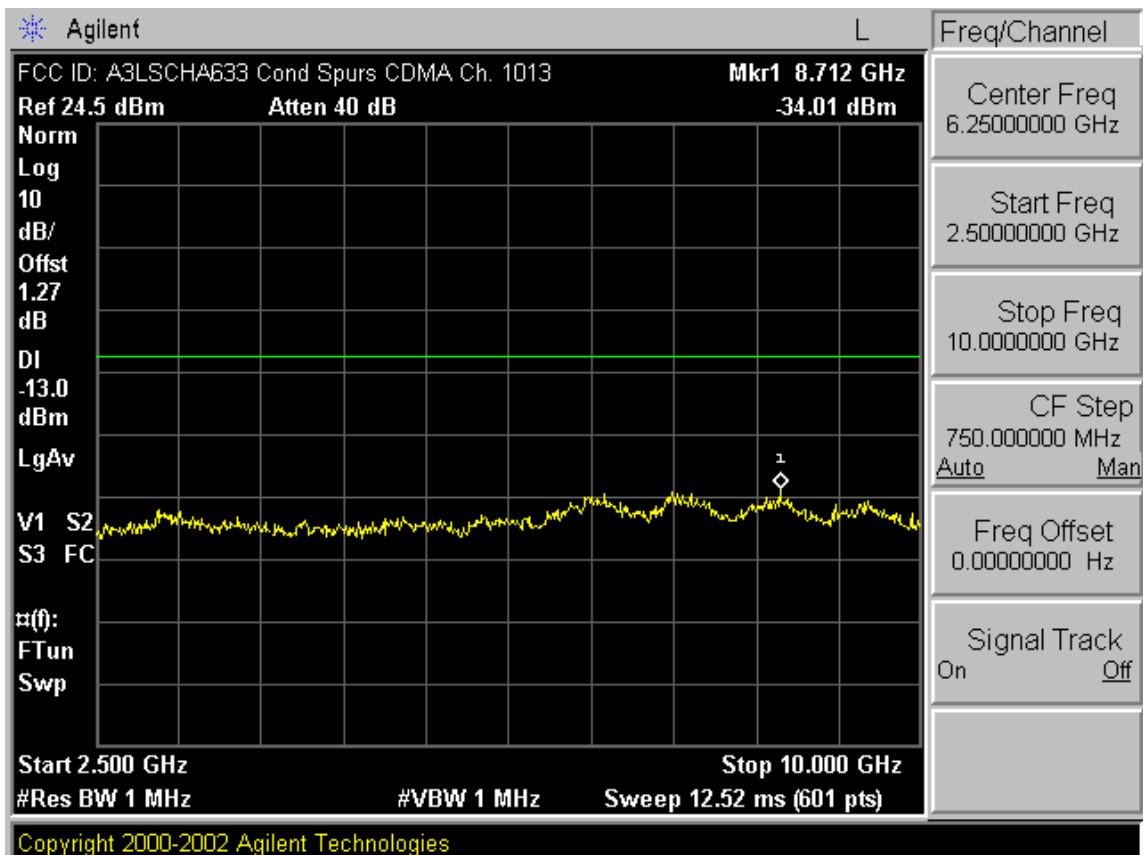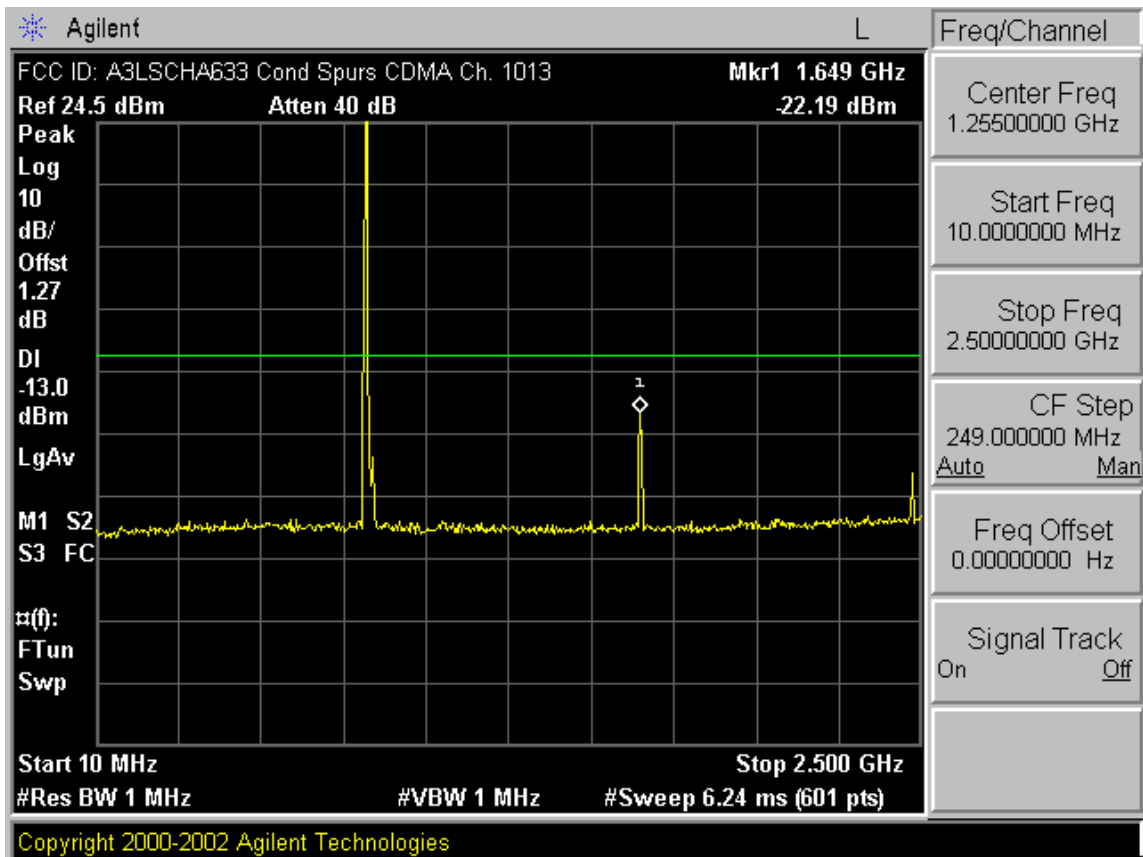


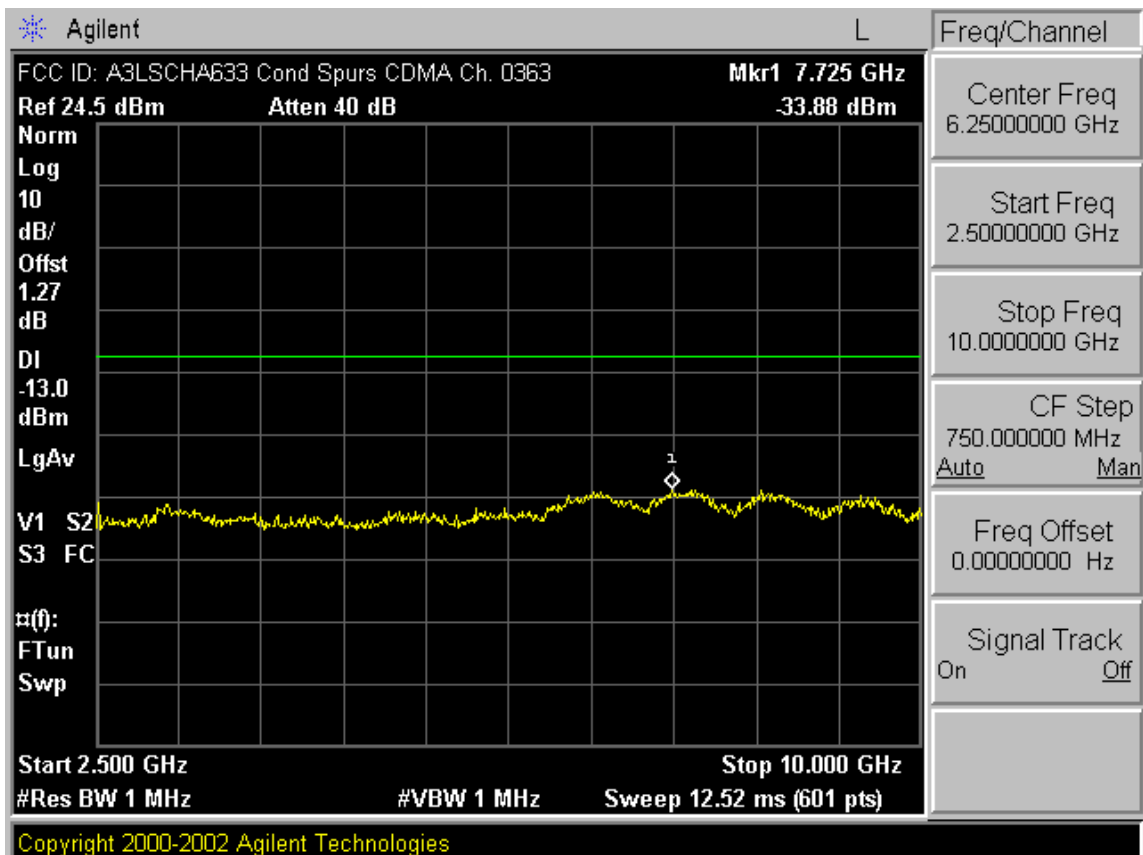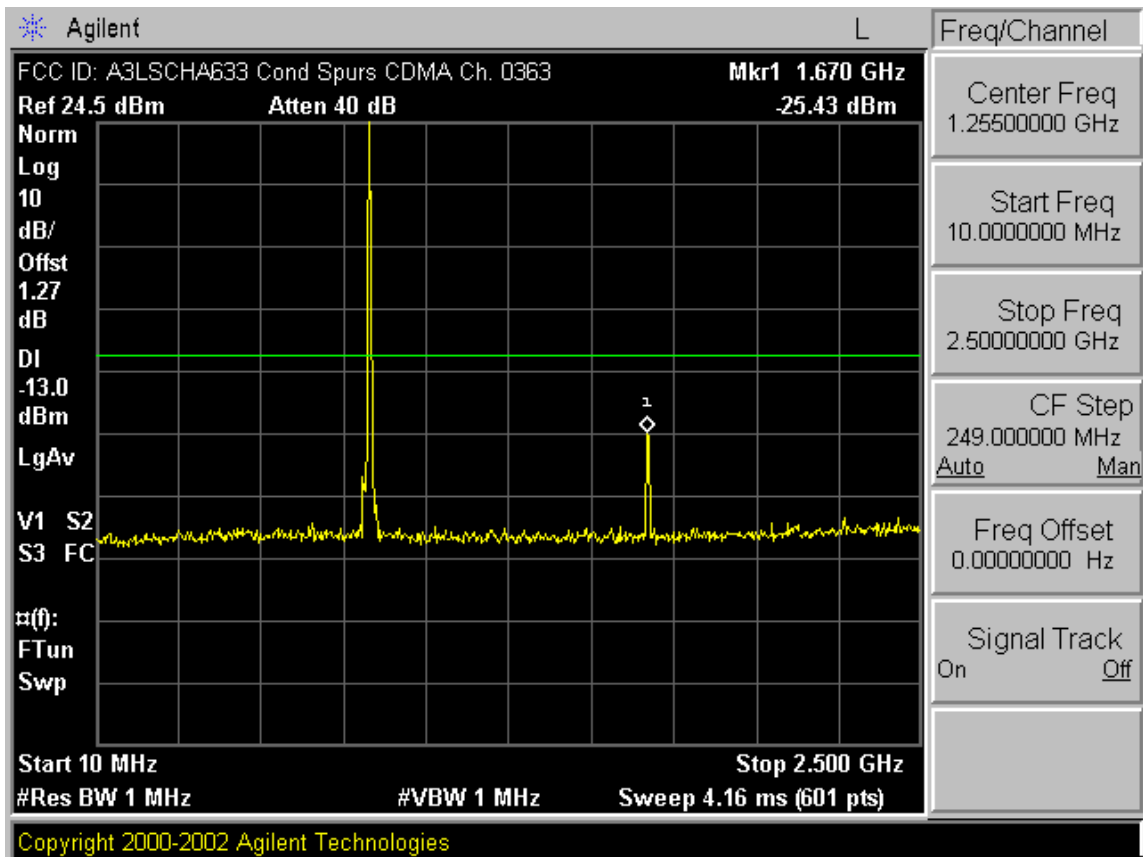

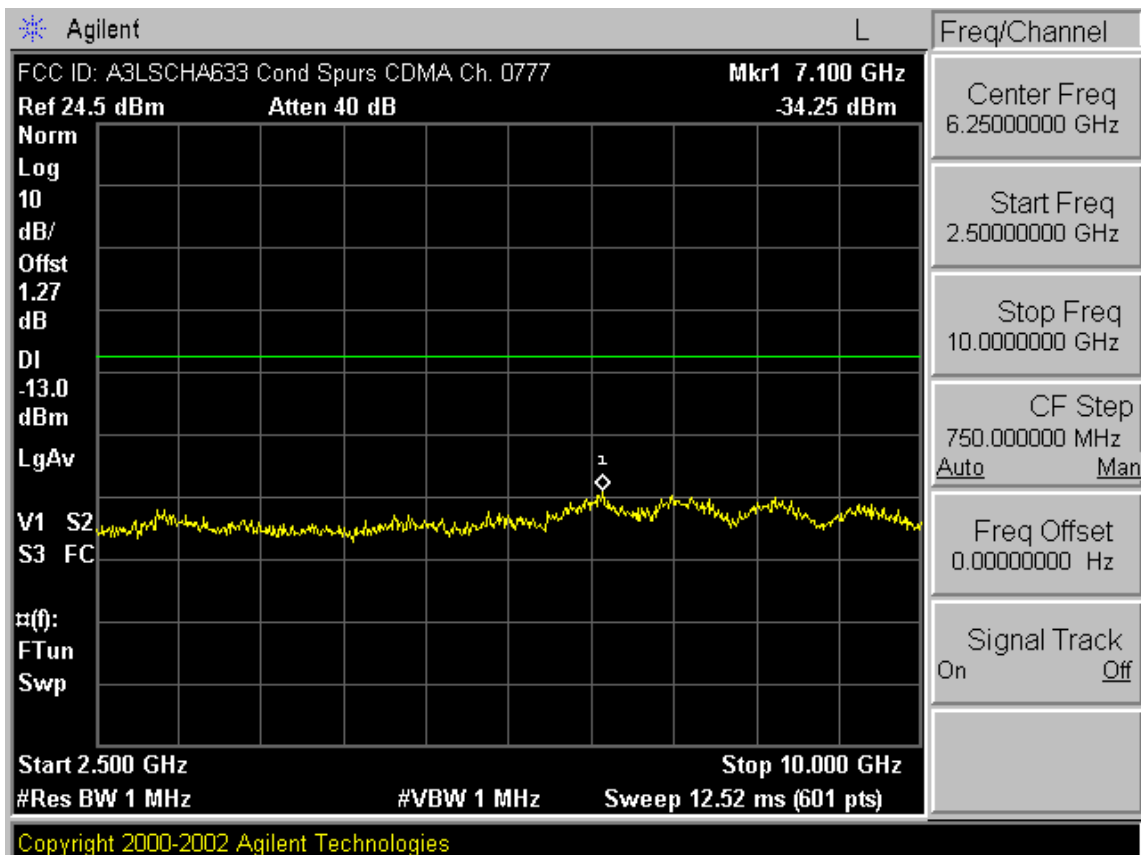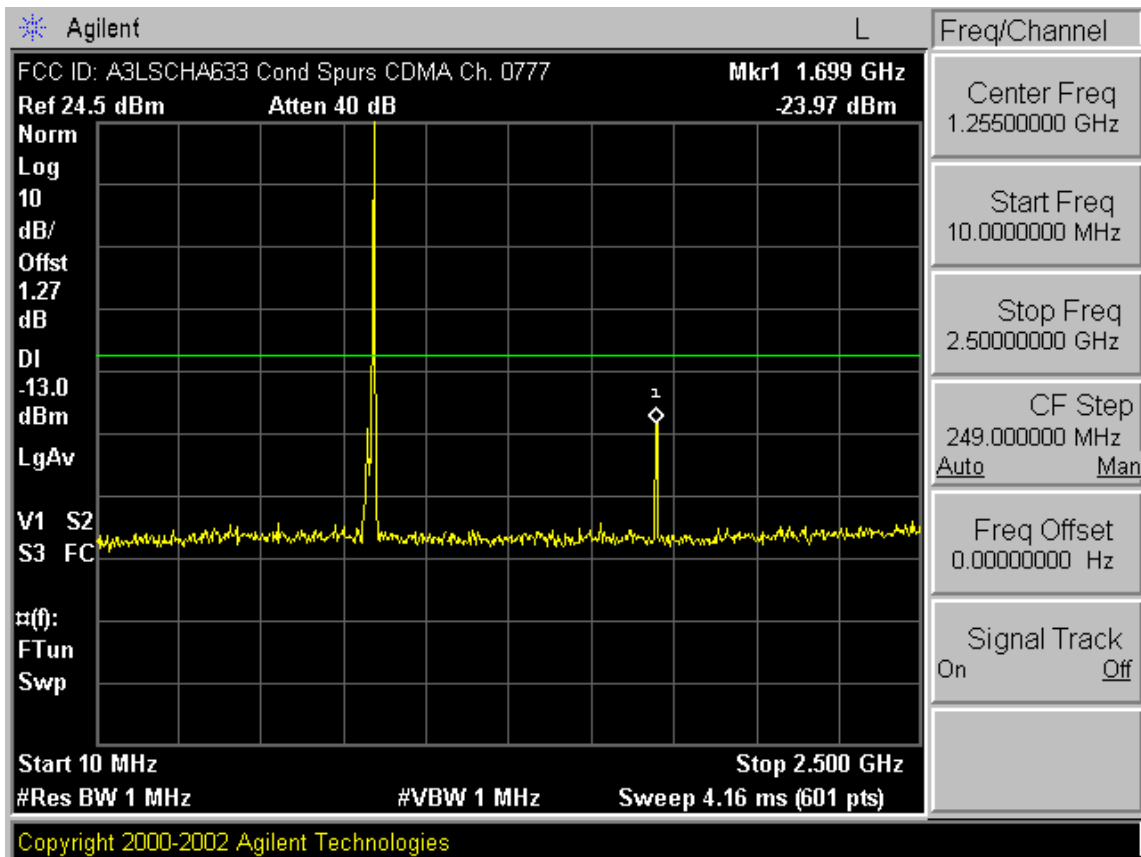

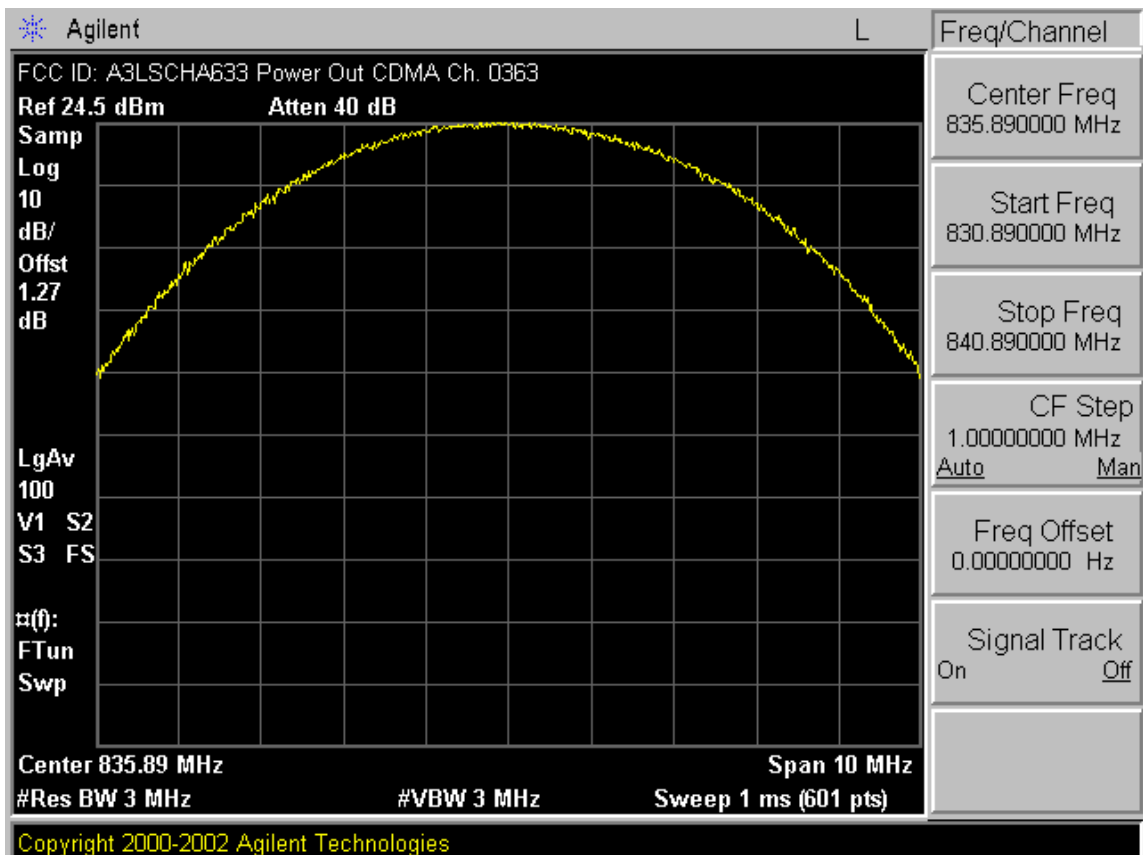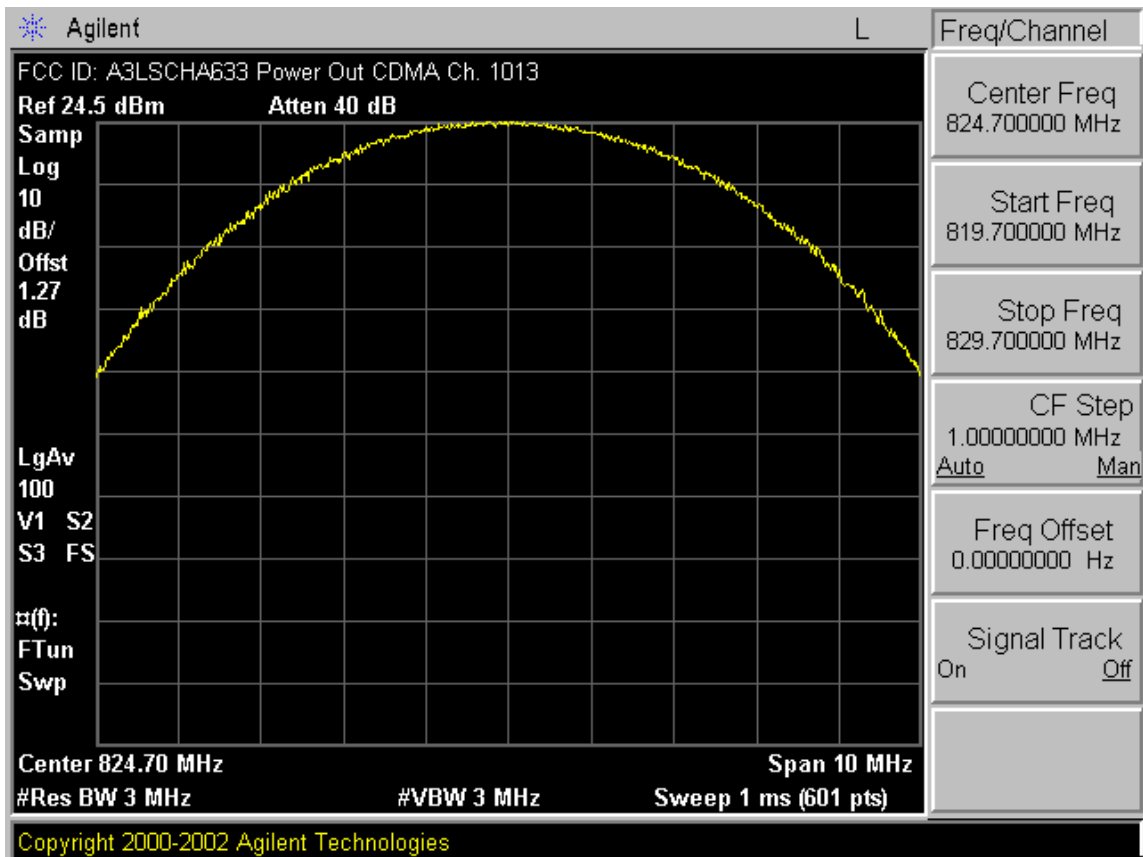


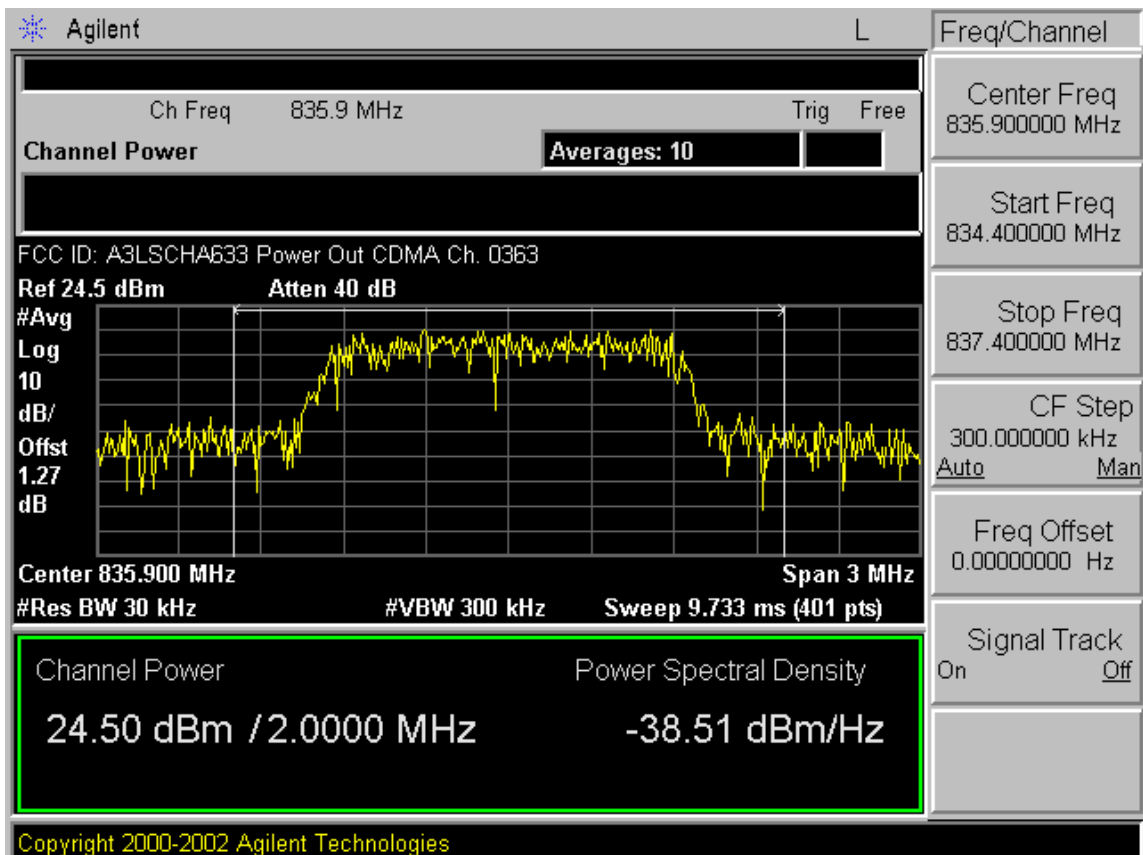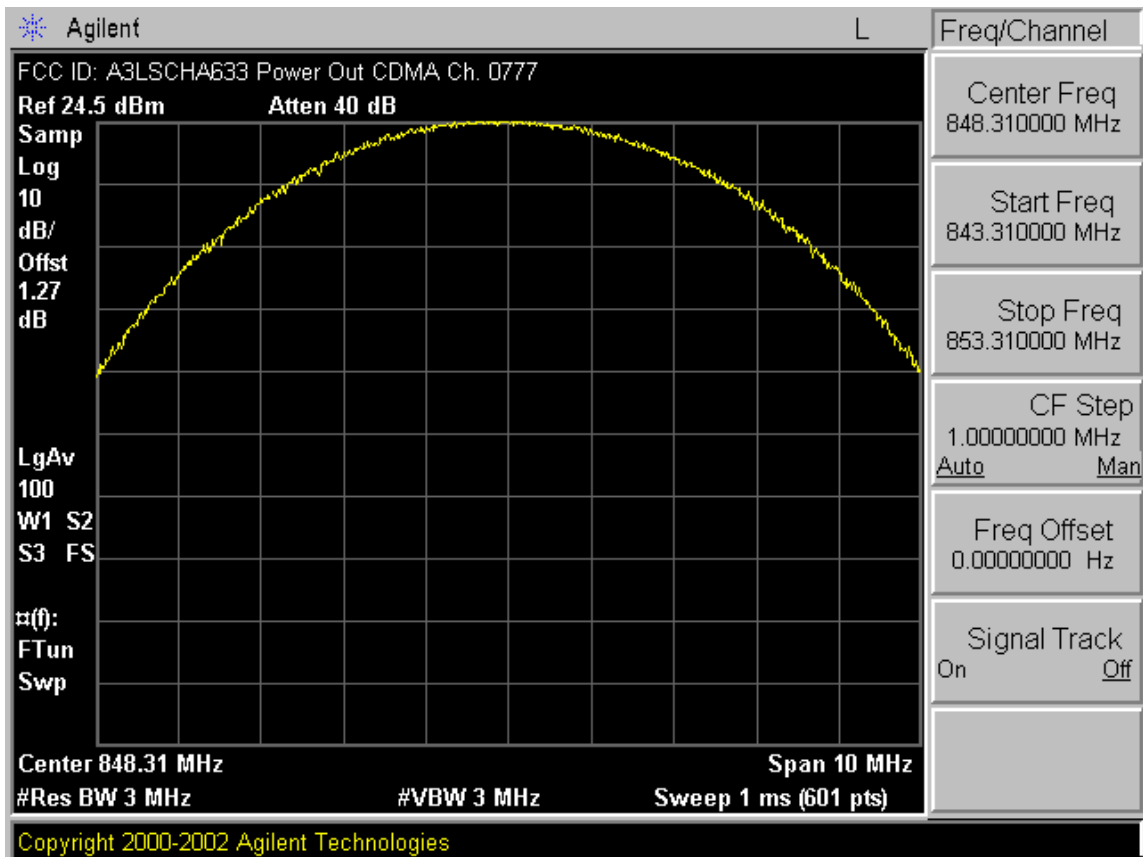

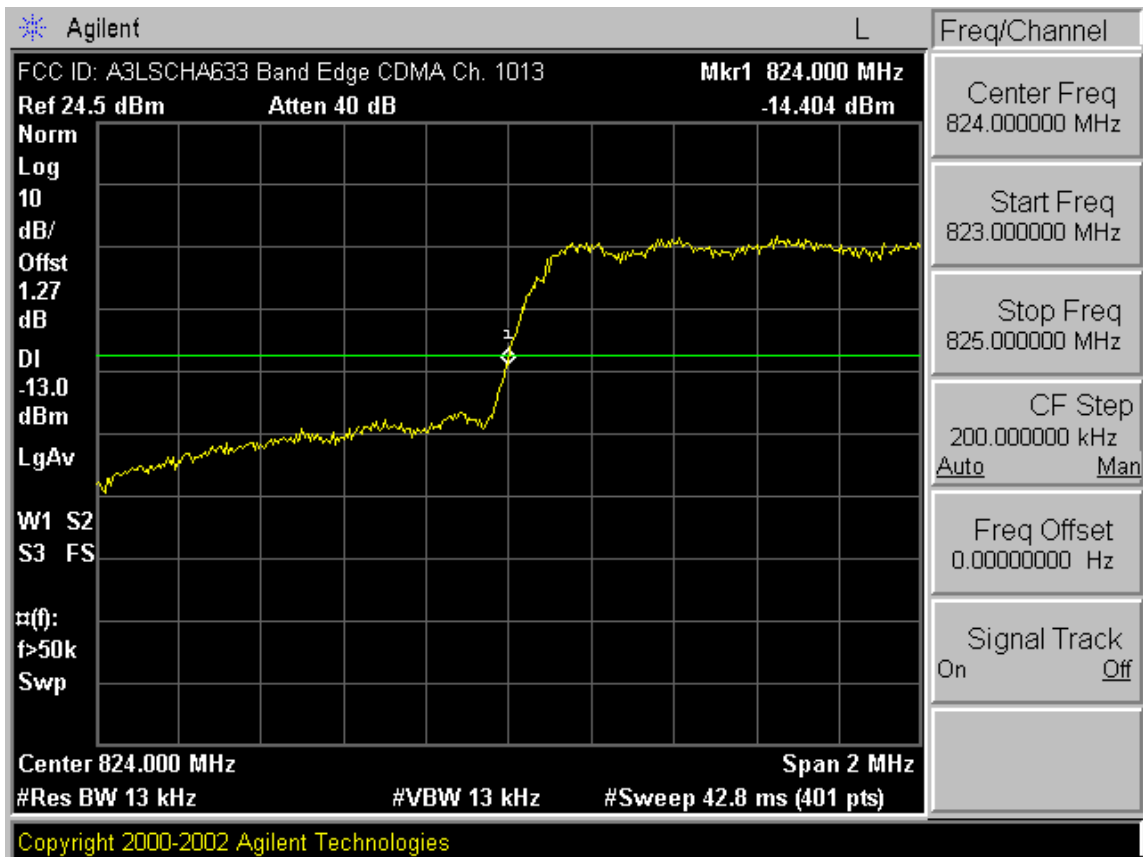



hp FCC ID: A3LSCHA633 CDMA Mode MKR 880.62 MHz
REF -61.0 dBm #ATTEN 10 dB PG 25.0 dB -96.82 dBm

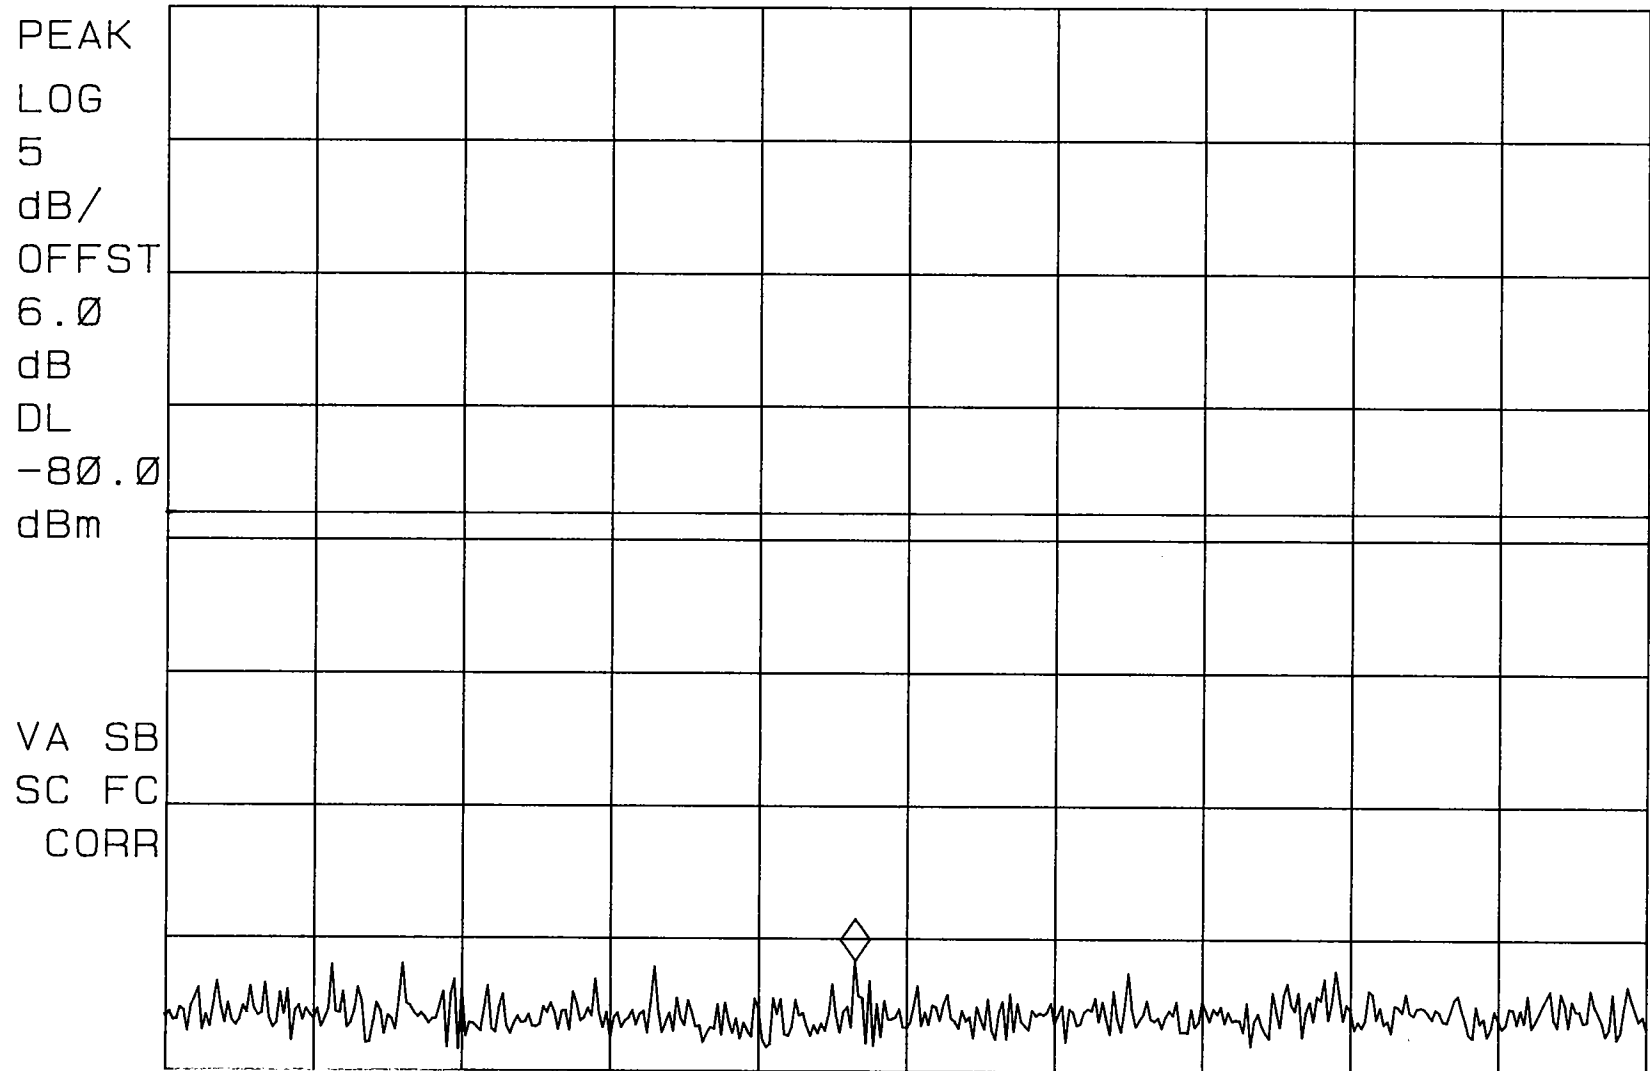

START 869.00 MHz STOP 894.00 MHz
#RES BW 100 kHz #VBW 300 kHz #SWP 20 msec