



CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

APPLICANT NAME & ADDRESS:

SAMSUNG ELECTRONICS CO., LTD.
416 Maetan-3 Dong, Paldal-Ku
Suwon City Kyungki-Do 441-742, KOREA
Attn: Wallace Oh, Engineering Manager
Samsung Electronics America (QA Lab)

DATE & LOCATION OF TESTING:

Dates of Tests: April 4-5, 2002
Test Report S/N: SAR.220401146.A3L
Test Site: PCTEST Lab, Columbia MD

FCC ID:**A3LSCHN255****APPLICANT:****SAMSUNG ELECTRONICS CO., LTD.****EUT Type:****Dual-Mode Cellular Phone (AMPS/CDMA)****Tx Frequency:****824.04 – 848.97 MHz (AMPS) / 824.70 – 848.31 MHz (CDMA)****Rx Frequency:****869.04 – 893.97 MHz (AMPS) / 869.70 – 893.31 MHz (CDMA)****Max. RF Output Power:****0.401 W ERP AMPS (26.033 dBm) / 26.0 dBm Conducted****0.314 W ERP CDMA (24.973 dBm) / 25.0 dBm Conducted****Max. SAR Measurement:****1.130W/kg AMPS Head SAR; 1.240W/kg AMPS Body SAR;****0.825W/kg CDMA Head SAR; 0.613W/kg CDMA Body SAR;****Trade Name/Model(s):****SCH-N255****FCC Classification:****Non-Broadcast Transmitter held to ear (TNE)****FCC Rule Part(s):****§2.1093; FCC/OET Bulletin 65 Supplement C [July 2001]****Application Type:****Certification****Test Device Serial No.:****identical prototype**

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC/OET Bulletin 65 Supplement C (2001) and IEEE Std. 1528-200X (Draft 6.4, July 2001).

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.

Alfred Cirwithian
Vice President Engineering



PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 1 of 30

12. SYSTEM VERIFICATION

Tissue Verification

Table 12.1 Simulated Tissue Verification [5]

MEASURED TISSUE PARAMETERS									
Date(s)	04/01/02	835MHz Brain		835MHz Muscle		1900MHz Brain		1900MHz Muscle	
Liquid Temperature (°C)	23.0	Target	Measured	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		41.50	43.50	55.20	55.00	40.00	N/A	53.30	N/A
Conductivity: σ		0.900	0.890	0.970	0.990	1.400	N/A	1.520	N/A

Test System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835MHz and 1900MHz by using the system validation kit(s). (Graphic Plots Attached)

Table 12.2 System Validation [5]

SYSTEM DIPOLE VALIDATION TARGET & MEASURED				
System Validation Kit: D-835V2, S/N: 406	835MHz Brain	Targeted SAR _{1g} (mW/g) 2.375	Measured SAR _{1g} (mW/g) 2.45	Deviation (%) + 3.2

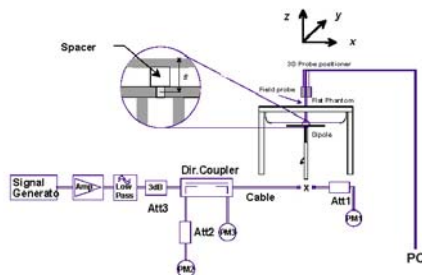


Figure 12.1 Dipole Validation Test Setup

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 16 of 30

13. SAR TEST DATA SUMMARY

See Measurement Result Data Pages

Procedures Used To Establish Test Signal

The handset was placed into simulated call mode (AMPS, Cellular CDMA & PCS CDMA modes) using manufacturers test codes. Such test signals offer a consistent means for testing SAR and are recommended for evaluating SAR [4]. When test modes are not available or inappropriate for testing a handset, the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Conditions

The handset is battery operated. Each SAR measurement was taken with a fully charged battery. In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power. If a conducted power deviation of more than 5% occurred, the test was repeated.

EUT Handset Reference Points

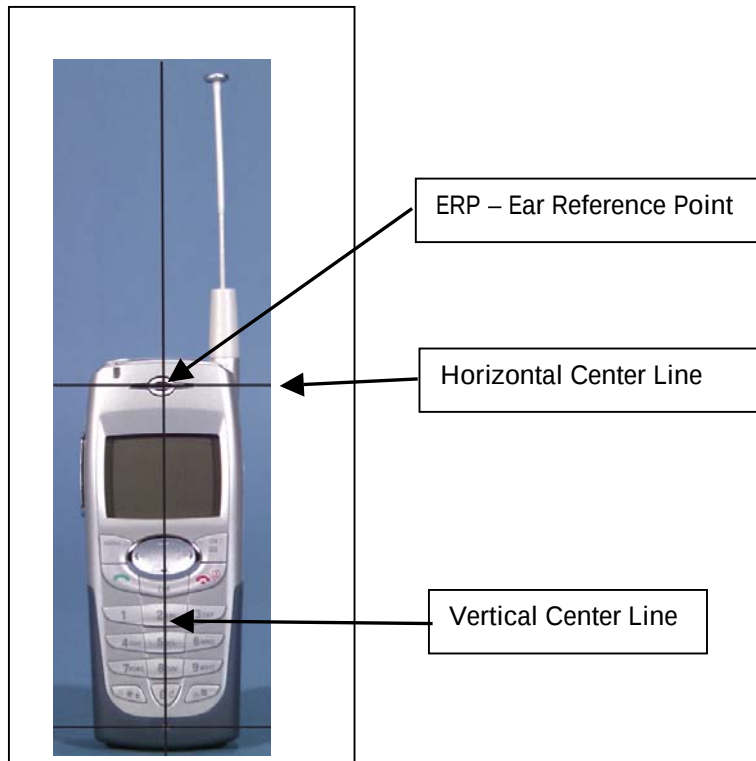


Figure 13.1 Handset Reference Points

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 17 of 30

SAR DATA SUMMARY

Mixture Type: 835MHz Brain


14.1 MEASUREMENT RESULTS (AMPS Right Head SAR – Touch)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.825
824.04	0991	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.930
836.49	0383	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.526
836.49	0383	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.731
848.97	0799	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.787
848.97	0799	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	1.060
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
4. SAR Measurement System
- | | | |
|---|------------------------------|--------------------------|
| ☒ DASY3 | ☐ IDX | ☐ |
|---|------------------------------|--------------------------|
- Phantom Configuration
- | | | |
|------------------------------------|---------------------------------------|--|
| ☐ Left Head | ☐ Flat Phantom | ☒ Right Head |
|------------------------------------|---------------------------------------|--|
5. SAR Configuration
- | | | |
|--|-------------------------------|-------------------------------|
| ☒ Head | ☐ Body | ☐ Hand |
|--|-------------------------------|-------------------------------|
6. Test Signal Call Mode
- | | |
|--|---|
| ☒ Manu. Test Codes | ☐ Base Station Simulator |
|--|---|
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15 cm. ± 0.1



Alfred Cirvithian
Vice President Engineering



**Figure 14.1 Right Head SAR Test Setup
-- Cheek / Touch Position --**

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 18 of 30

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.2 MEASUREMENT RESULTS (AMPS Right Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	In	0.709
824.04	0991	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.853
836.49	0383	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	In	0.473
836.49	0383	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.574
848.97	0799	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	In	0.654
848.97	0799	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.812
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|--|---|--|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
| ☒ DASY3 | ☐ IDX | ☐ |
| ☐ Left Head | ☐ Flat Phantom | ☒ Right Head |
| ☒ Head | ☐ Body | ☐ Hand |
| ☒ Manu. Test Codes | ☐ Base Station Simulator | |
- SAR Measurement System
 - Phantom Configuration
 - SAR Configuration
 - Test Signal Call Mode
 - Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm. ± 0.1



Alfred Cirwithian
Vice President Engineering



Figure 14.2 Right Head SAR Test Setup
-- Ear / 15° Tilt Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 19 of 30

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.3 MEASUREMENT RESULTS (AMPS Left Head SAR - Touch)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.903
824.04	0991	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	1.130
836.49	0383	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.603
836.49	0383	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	0.722
848.97	0799	AMPS	26.0	26.0	Standard	Cheek / Touch	In	0.762
848.97	0799	AMPS	26.0	26.0	Standard	Cheek / Touch	Out	1.040
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured
- | | | |
|--|---|-------------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
| ☒ DASY3 | ☐ IDX | ☐ |
| ☒ Left Head | ☐ Flat Phantom | ☐ Right Head |
| ☒ Head | ☐ Body | ☐ Hand |
| ☒ Manu. Test Codes | ☐ Base Station Simulator | |
- SAR Measurement System
 - Phantom Configuration
 - SAR Configuration
 - Test Signal Call Mode
 - Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm. ± 0.1



Alfred Cirwithian
Vice President Engineering



**Figure 14.3 Left Head SAR Test Setup
-- Cheek / Touch Position --**

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 20 of 30

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.4 MEASUREMENT RESULTS (AMPS Left Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	In	0.699
824.04	0991	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.853
836.49	0383	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	In	0.470
836.49	0383	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.575
848.97	0799	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	In	0.744
848.97	0799	AMPS	26.0	26.0	Standard	Ear / 15° Tilt	Out	0.881
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
- All modes of operation were investigated, and worst-case results are reported.
- Battery is fully charged for all readings.

- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
4. SAR Measurement System
- | | | |
|---|------------------------------|--------------------------|
| ☒ DASY3 | ☐ IDX | ☐ |
|---|------------------------------|--------------------------|
- Phantom Configuration
- | | | |
|---|---------------------------------------|-------------------------------------|
| ☒ Left Head | ☐ Flat Phantom | ☐ Right Head |
|---|---------------------------------------|-------------------------------------|
5. SAR Configuration
- | | | |
|--|-------------------------------|-------------------------------|
| ☒ Head | ☐ Body | ☐ Hand |
|--|-------------------------------|-------------------------------|
6. Test Signal Call Mode
- | | |
|--|---|
| ☒ Manu. Test Codes | ☐ Base Station Simulator |
|--|---|
7. Tissue parameters and temperatures are listed on the SAR plots.
8. Liquid tissue depth is 15 cm. ± 0.1


Alfred Cirwithian
Vice President Engineering



Figure 14.4 Left Head SAR Test Setup
-- Ear / 15° Tilt Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 21 of 30


SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.5 MEASUREMENT RESULTS (CELLULAR CDMA Right Head SAR – Touch)								
FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
848.31	0777	CDMA	25.0	25.0	Standard	Cheek / Touch	Out	0.780
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured ☒ Conducted ☐ ERP ☐ EIRP
 SAR Measurement System ☒ DASY3 ☐ IDX ☐
 Phantom Configuration ☐ Left Head ☐ Flat Phantom ☒ Right Head
 SAR Configuration ☒ Head ☐ Body ☐ Hand
 Test Signal Call Mode ☒ Manu. Test Codes ☐ Base Station Simulator
- Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm. ± 0.1
 - SAR measurements were taken on only one channel because the peak SAR value is less than 85% of the maximum SAR value in AMPS mode.


Alfred Cirwithian
 Vice President Engineering



**Figure 14.5 Right Head SAR Test Setup
-- Cheek / Touch Position --**

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 22 of 30

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.6 MEASUREMENT RESULTS (CELLULAR CDMA Right Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.70	1013	CDMA	25.0	25.0	Standard	Ear / 15° Tilt	Out	0.654
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
- SAR Measurement System

☒ DASY3	☐ IDX	☐
---	------------------------------	--------------------------
 - Phantom Configuration

☐ Left Head	☐ Flat Phantom	☒ Right Head
------------------------------------	---------------------------------------	--
 - SAR Configuration

☒ Head	☐ Body	☐ Hand
--	-------------------------------	-------------------------------
 - Test Signal Call Mode

☒ Manu. Test Codes	☐ Base Station Simulator
--	---
 - Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm. ± 0.1
 - SAR measurements were taken on the channel that produced the highest SAR value in the touch mode.
- The SAR values in the table above are more than 2 dB below the SAR limit.



Alfred Cirwithian
Vice President Engineering



Figure 14.6 Right Head SAR Test Setup
-- Ear / 15° Tilt Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 23 of 30

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.7 MEASUREMENT RESULTS (CELLULAR CDMA Left Head SAR – Touch)								
FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.70	1013	CDMA	25.0	25.0	Standard	Cheek / Touch	Out	0.825
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement System ☒ DASY3 ☐ IDX ☐
- Phantom Configuration ☒ Left Head ☐ Flat Phantom ☐ Right Head
- SAR Configuration ☒ Head ☐ Body ☐ Hand
- Test Signal Call Mode ☒ Manu. Test Codes ☐ Base Station Simulator
- Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm. ± 0.1
 - SAR measurements were taken on only one channel because the peak SAR value is less than 85% of the maximum SAR value in AMPS mode.



Alfred Cirwithian
Vice President Engineering



Figure 14.7 Left Head SAR Test Setup
-- Cheek / Touch Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 24 of 30

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Brain

14.8 MEASUREMENT RESULTS (CELLULAR CDMA Left Head SAR – Tilt)

FREQUENCY		Modulation	Begin / End POWER [‡]			Device Test Position	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
848.31	0777	CDMA	25.0	25.0	Standard	Ear / 15° Tilt	Out	0.689
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Brain 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:


- The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured
- | | | |
|---|------------------------------|-------------------------------|
| ☒ Conducted | ☐ ERP | ☐ EIRP |
|---|------------------------------|-------------------------------|
- SAR Measurement System

☒ DASY3	☐ IDX	☐
---	------------------------------	--------------------------
 - Phantom Configuration

☒ Left Head	☐ Flat Phantom	☐ Right Head
---	---------------------------------------	-------------------------------------
 - SAR Configuration

☒ Head	☐ Body	☐ Hand
--	-------------------------------	-------------------------------
 - Test Signal Call Mode

☒ Manu. Test Codes	☐ Base Station Simulator
--	---
- Tissue parameters and temperatures are listed on the SAR plots.
 - Liquid tissue depth is 15 cm. ± 0.1
 - SAR measurements were taken on the channel that produced the highest SAR value in the touch mode.
- The SAR values in the table above are more than 2 dB below the SAR limit.



Alfred Cirwithian
Vice President Engineering



Figure 14.8 Right Head SAR Test Setup
-- Ear / 15° Tilt Position --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 25 of 30

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Muscle

14.9 MEASUREMENT RESULTS (AMPS Body SAR w/o Holster)

FREQUENCY		Modulation	Begin / End POWER [†]			Separation Distance (cm) ^{††}	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.04	0991	AMPS	26.0	26.0	Standard	1.0 [w/o Holster]	In	1.240
824.04	0991	AMPS	26.0	26.0	Standard	1.0 [w/o Holster]	Out	1.180
836.49	0383	AMPS	26.0	26.0	Standard	1.0 [w/o Holster]	In	1.050
836.49	0383	AMPS	26.0	26.0	Standard	1.0 [w/o Holster]	Out	1.120
848.97	0799	AMPS	26.0	26.0	Standard	1.0 [w/o Holster]	In	0.953
848.97	0799	AMPS	26.0	26.0	Standard	1.0 [w/o Holster]	Out	1.030
ANSI / IEEE C95.1 1992 - SAFETY LIMIT						Muscle 1.6 W/kg (mW/g) averaged over 1 gram		
Spatial Peak								
Uncontrolled Exposure/General Population								

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in atypical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [†]Power Measured ☒ Conducted ☐ ERP ☐ EIRP
^{††}Test Configuration ☒ DASY3 ☐ IDX ☐
 Phantom Configuration ☐ Left Head ☒ Flat Phantom ☐ Right Head
 SAR Configuration ☐ Head ☒ Body ☐ Hand
 Test Signal Call Mode ☒ Manu. Test Codes ☐ Base Station Simulator
 Tissue parameters and temperatures are listed on the SAR plots.
 Both sides of the phone were tested and the worst-case side is reported.
 Liquid tissue depth is 15 cm. ± 0.1



Alfred Cirwithian
Vice President Engineering



Figure 14.9 Body SAR Test Setup
-- w/o Holster --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 26 of 30

SAR DATA SUMMARY (Continued)

Mixture Type: 835MHz Muscle

14.10 MEASUREMENT RESULTS (CELLULAR CDMA Body SAR w/o Holster)

FREQUENCY		Modulation	Begin / End POWER [‡]			Separation Distance (cm) ^{‡‡}	Antenna Position	SAR (W/kg)
MHz	Ch.		(dBm)		Battery			
824.70	1013	CDMA	25.0	25.0	Standard	1.0 [w/o Holster]	In	0.579
824.70	1013	CDMA	25.0	25.0	Standard	1.0 [w/o Holster]	Out	0.613
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						Muscle 1.6 W/kg (mW/g) averaged over 1 gram		

NOTES:

- The test data reported are the worst-case SAR value with the antenna-head position set in atypical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supp.C [July 2001].
 - All modes of operation were investigated, and worst-case results are reported.
 - Battery is fully charged for all readings.
- [‡]Power Measured ☒ Conducted ☐ ERP ☐ EIRP
4. SAR Measurement System ☒ DASY3 ☐ IDX ☐
- Phantom Configuration ☐ Left Head ☒ Flat Phantom ☐ Right Head
5. SAR Configuration ☐ Head ☒ Body ☐ Hand
6. Test Signal Call Mode ☒ Manu. Test Codes ☐ Base Station Simulator
7. ^{‡‡}Test Configuration ☐ With Holster ☒ Without Holster
- Tissue parameters and temperatures are listed on the SAR plots.
 - Both sides of the phone were tested and the worst-case side is reported.
 - Liquid tissue depth is 15 cm. $\pm$ 0.1


Alfred Cirwithian
Vice President Engineering



Figure 14.10 Body SAR Test Setup
-- w/o Holster --

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 27 of 30

15. SAR TEST EQUIPMENT

Equipment Calibration

Table 15.1 Test Equipment Calibration

EQUIPMENT SPECIFICATIONS		
Type	Calibration Date	Serial Number
Stäubli Robot RX60L	February 2002	599131-01
Stäubli Robot Controller	February 2002	PCT592
Stäubli Teach Pendant (Joystick)	February 2002	3323-00161
Micron Computer, 450 MHz Pentium III, Windows NT	February 2002	PCT577
SPEAG EDC3	February 2002	321
SPEAG DAE3	February 2002	330
SPEAG E-Field Probe ET3DV6	February 2002	1560
SPEAG Dummy Probe	February 2002	PCT583
SPEAG SAM Twin Phantom V4.0	February 2002	PCT666
SPEAG Light Alignment Sensor	February 2002	205
SPEAG Validation Dipole D1900V2	February 2002	PCT613
Brain Equivalent Matter (835MHz)	April 2002	PCTBEM101
Brain Equivalent Matter (1900MHz)	April 2002	PCTBEM301
Muscle Equivalent Matter (835MHz)	April 2002	PCTMEM201
Muscle Equivalent Matter (1900MHz)	April 2002	PCTMEM401
Microwave Amp. Model: 5S1G4, (800MHz - 4.2GHz)	January 2002	22332
Gigatronics 8651A Power Meter	January 2002	1835299
HP-8648D (9kHz ~ 4GHz) Signal Generator	January 2002	PCT530
Amplifier Research 5S1G4 Power Amp	January 2002	PCT540
HP-8753E (30kHz ~ 3GHz) Network Analyzer	January 2002	PCT552
HP85070B Dielectric Probe Kit	January 2002	PCT501
Ambient Noise/Reflection, etc.	<12mW/kg/<3%of SAR	January 2002
		Anechoic Room PCT01

NOTE:

The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Validation measurement is performed by PCTEST Lab. before each test. The brain simulating material is calibrated by PCTEST using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

PCTEST™ SAR REPORT	FCC CERTIFICATION			Reviewed by: Quality Manager
SAR Filename: SAR-220401146.A3L	Test Dates: April 4-5, 2002	Phone Type: Dual-Mode	FCC ID: A3LSCHN255	Page 28 of 30

SAMSUNG FCC ID: A3LSCHN255 -- FM Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.89$ mho/m $\epsilon_r = 43.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 1.06 mW/g, SAR (10g): 0.680 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

AMPS Mode, Ch.799 [848.97MHz]; Standard Battery; Ambient Temp. = 22.1°C / Meas. Tissue Temp. = 22.0°C

Conducted Power = 26.0dBm; Right Head SAR, Cheek/Touch position

Test Date -- 04/04/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

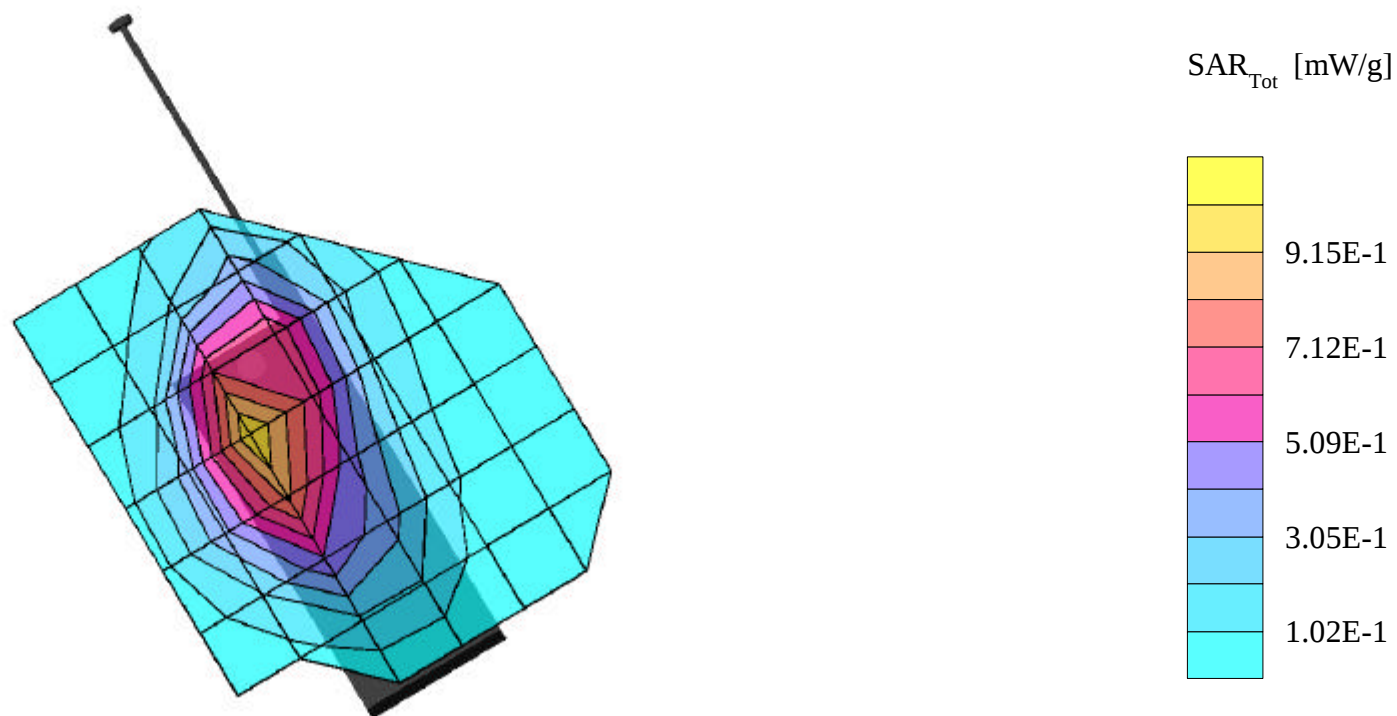

SAMSUNG FCC ID: A3LSCHN255 -- FM Head SAR

SAM Phantom; Right Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.89$ mho/m $\epsilon_r = 43.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.853 mW/g, SAR (10g): 0.555 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

AMPS Mode, Ch.991 [824.04MHz]; Standard Battery; Ambient Temp. = 22.1°C / Meas. Tissue Temp. = 22.0°C

Conducted Power = 26.0dBm; Right Head SAR, Ear/15 degree position

Test Date -- 04/04/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

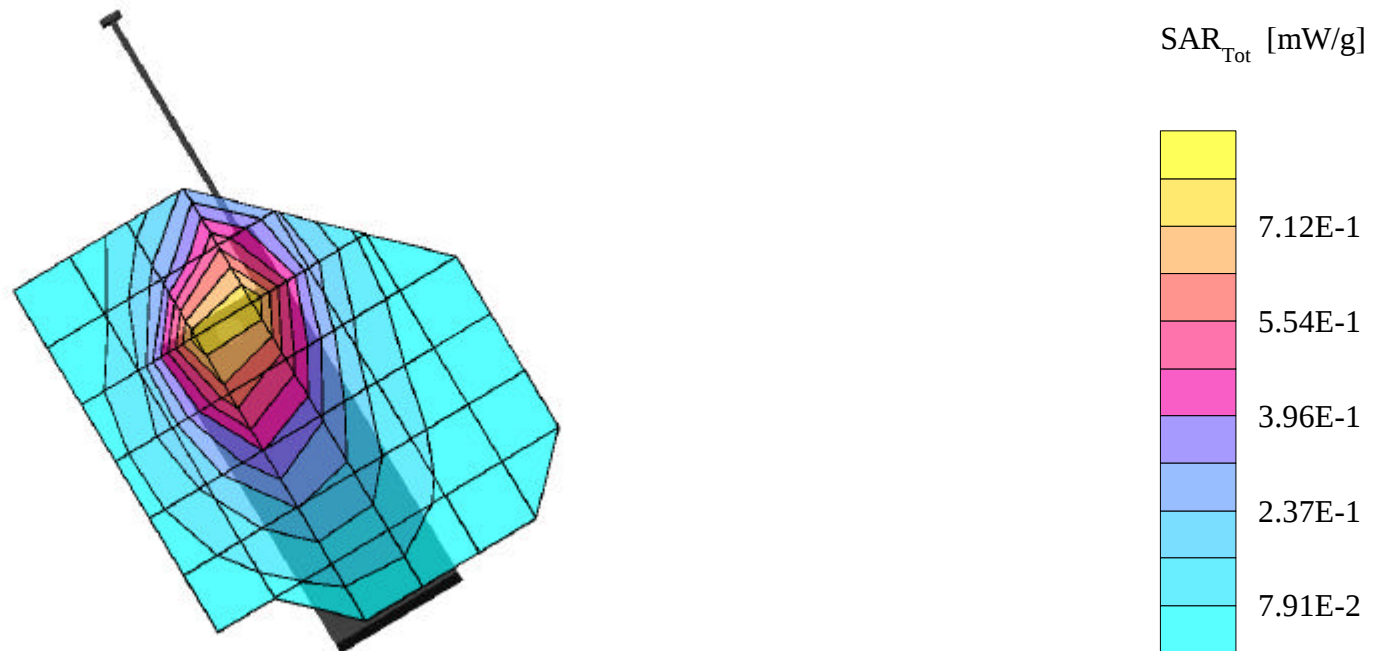

SAMSUNG FCC ID: A3LSCHN255 -- FM Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.89$ mho/m $\epsilon_r = 43.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 1.13 mW/g, SAR (10g): 0.752 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

FM Mode, Ch.991 [824.04MHz]; Standard Battery; Ambient Temp. = 22.1°C / Meas. Tissue Temp. = 22.0°C

Conducted Power = 26.0dBm; Left Head SAR, Cheek/Touch position

Test Date -- 04/04/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

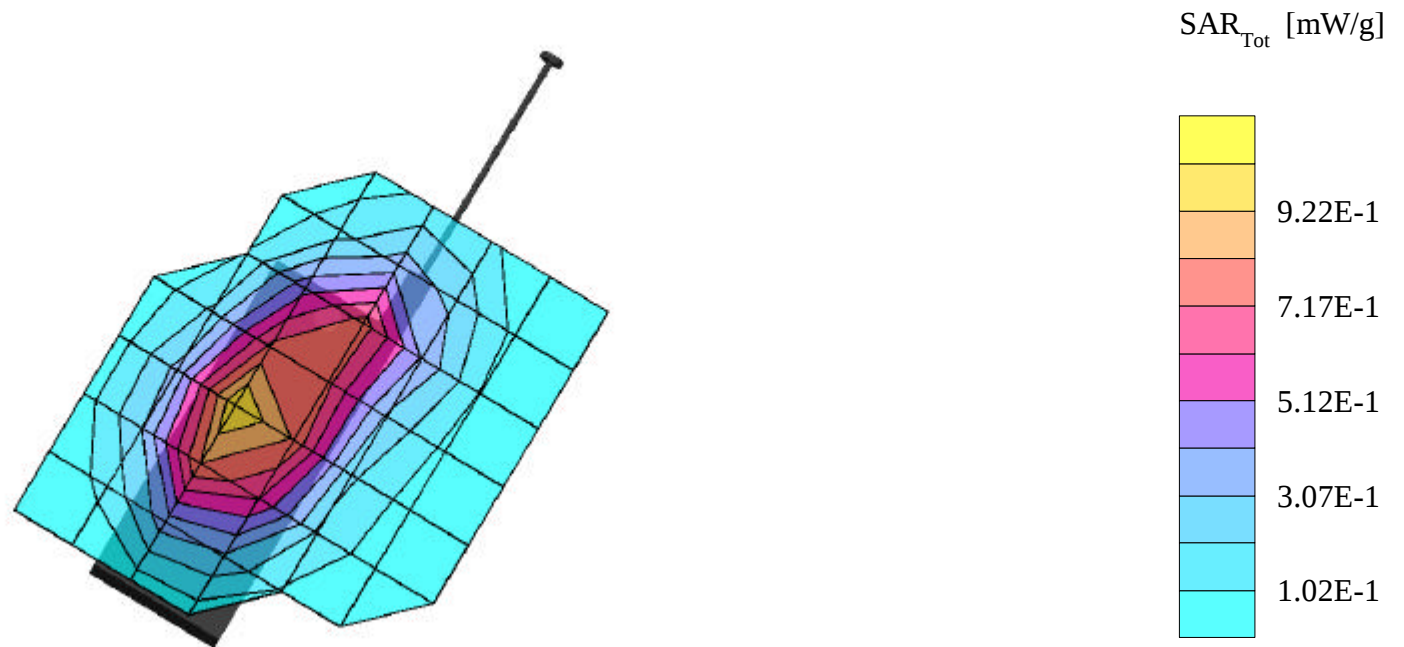

SAMSUNG FCC ID: A3LSCHN255 -- FM Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.89$ mho/m $\epsilon_r = 43.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.881 mW/g, SAR (10g): 0.559 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

AMPS Mode, Ch.799 [848.97MHz]; Standard Battery; Ambient Temp. = 22.1°C / Meas. Tissue Temp. = 22.0°C

Conducted Power = 26.0dBm; Left Head SAR, Cheek/Touch position

Test Date -- 04/04/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

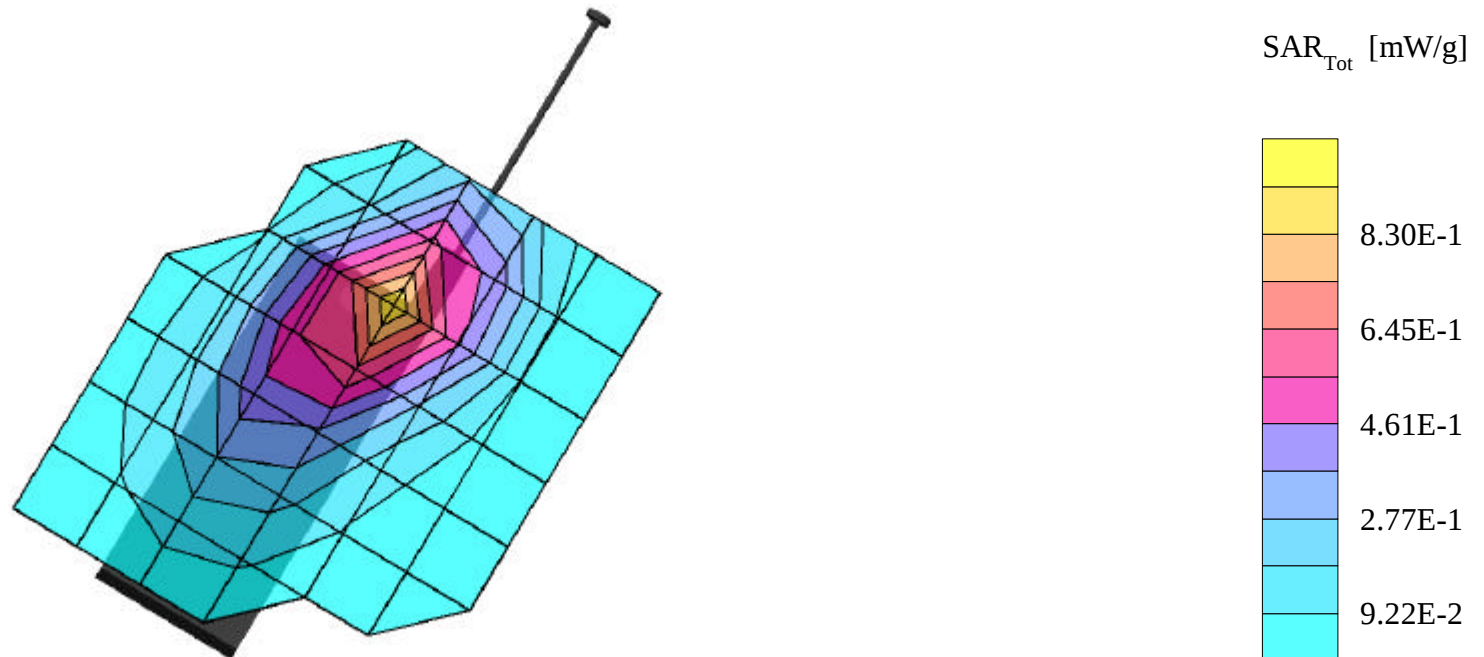

SAMSUNG FCC ID: A3LSCHN255 -- Cellular CDMA Head SAR

SAM Phantom; Left Hand Section; Probe:ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.89$ mho/m $\epsilon_r = 43.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.825 mW/g, SAR (10g): 0.559 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

Cellular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.1°C / Meas. Tissue Temp. = 22.0°C

Conducted Power = 25.0dBm; Left Head SAR, Cheek/Touch position

Test Date -- 04/04/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

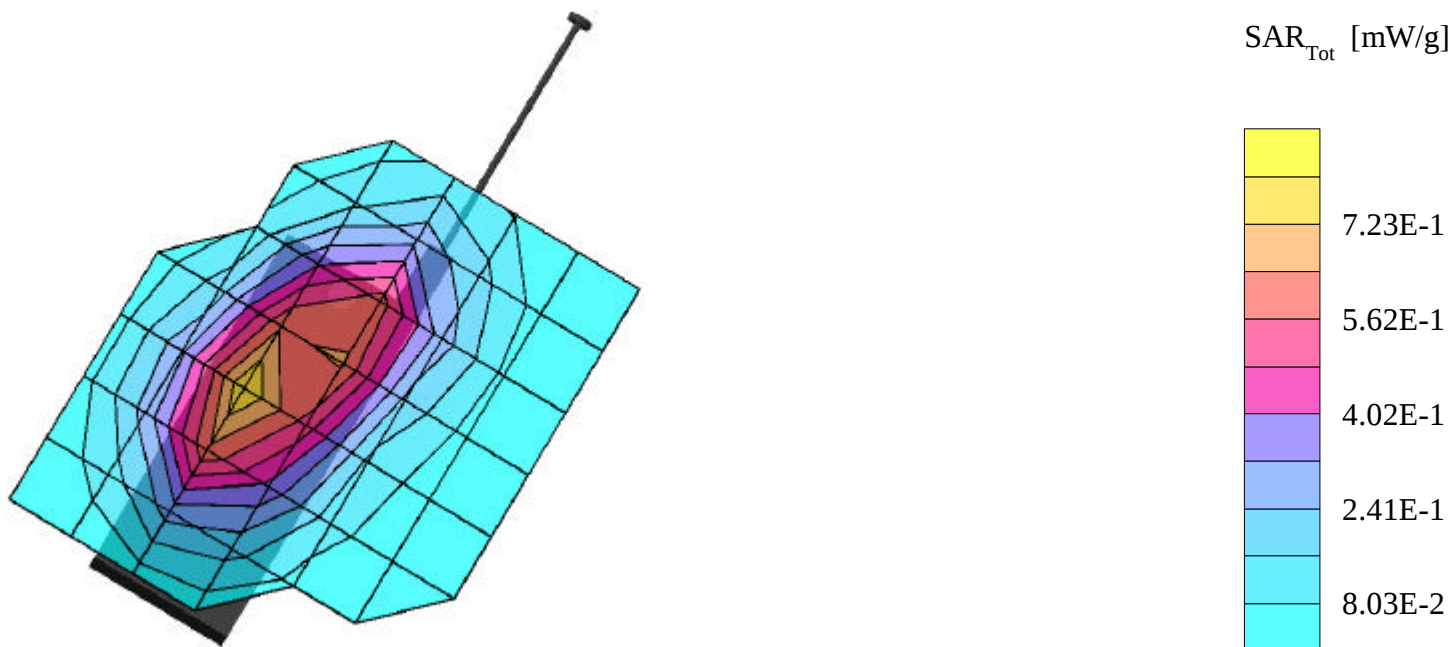

SAMSUNG FCC ID: A3LSCHN255 -- FM Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(6.52,6.52,6.52)

Med. Parameters 835 MHz Muscle: $\sigma = 0.99$ mho/m $\epsilon_r = 55.0$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0


SAR (1g): 1.24 mW/g, SAR (10g): 0.864 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

FM Mode, Ch.0991 [824.04MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.0dBm; Spacing = 1.0cm from EUT (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 04/05/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

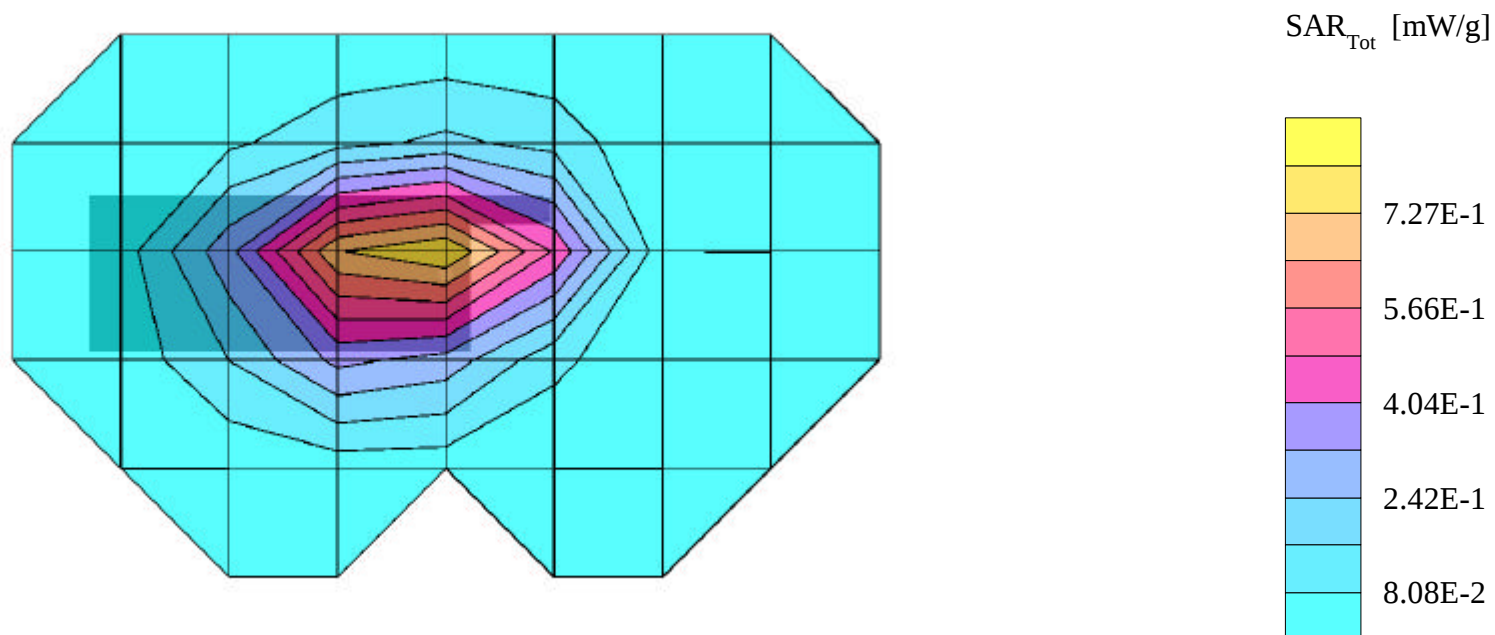

SAMSUNG FCC ID: A3LSCHN255 -- Cellular CDMA Body SAR

SAM Phantom; Flat Section; Probe:ET3DV6 - SN1560; ConvF(6.52,6.52,6.52)

Med. Parameters 835 MHz Muscle: $\sigma = 0.99$ mho/m $\epsilon_r = 55.0$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 0.613 mW/g, SAR (10g): 0.440 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

Cellular CDMA Mode, Ch.1013 [824.70MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 25.0dBm; Spacing = 1.0cm from EUT (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 04/05/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

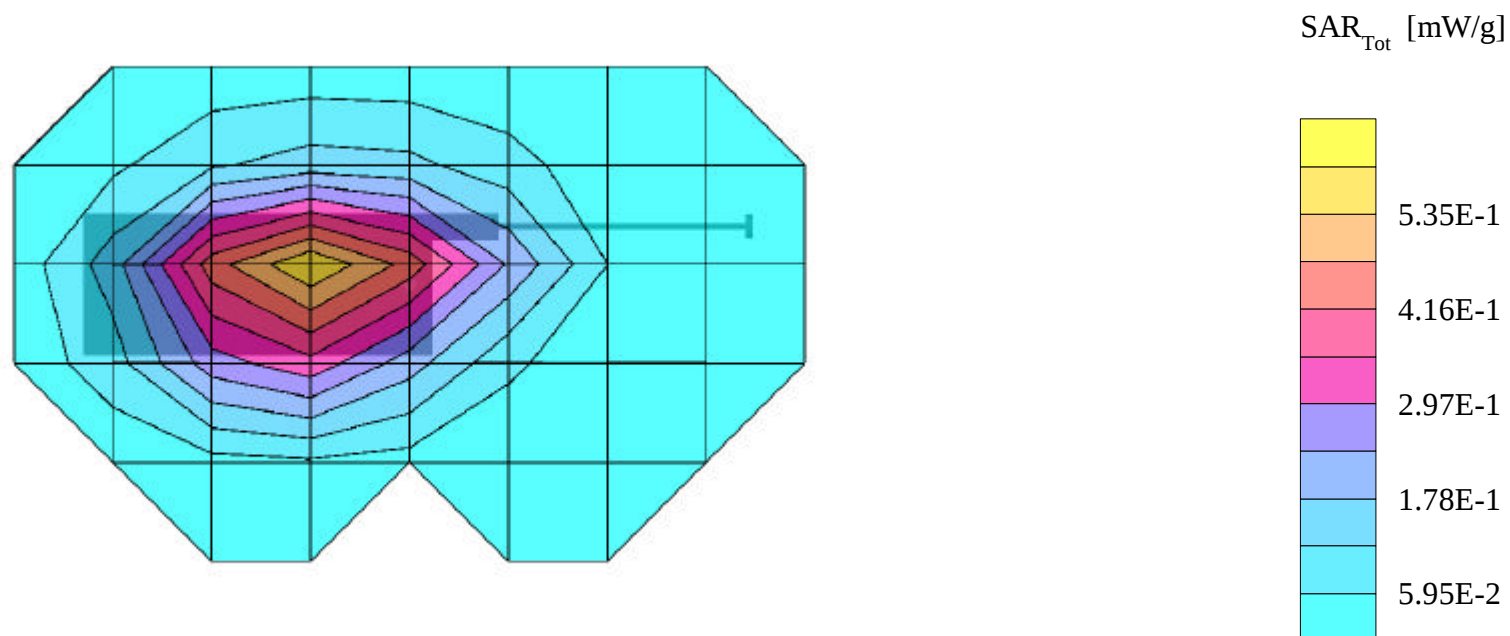

SAMSUNG FCC ID: A3LSCHN255 -- FM Head SAR

SAM Phantom; Left Hand Section; Probe: ET3DV6 - SN1560; ConvF(6.78,6.78,6.78)

Med. Parameters 835 MHz Brain: $\sigma = 0.89$ mho/m $\epsilon_r = 43.5$ $\rho = 1.00$ g/cm³; Antenna Position -- Out; Crest Factor 1.0


SAR (1g): 1.13 mW/g, SAR (10g): 0.752 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

FM Mode, Ch.991 [824.04MHz]; Standard Battery; Ambient Temp. = 22.1°C / Meas. Tissue Temp. = 22.0°C

Conducted Power = 26.0dBm; Left Head SAR, Cheek/Touch position

Test Date -- 04/04/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

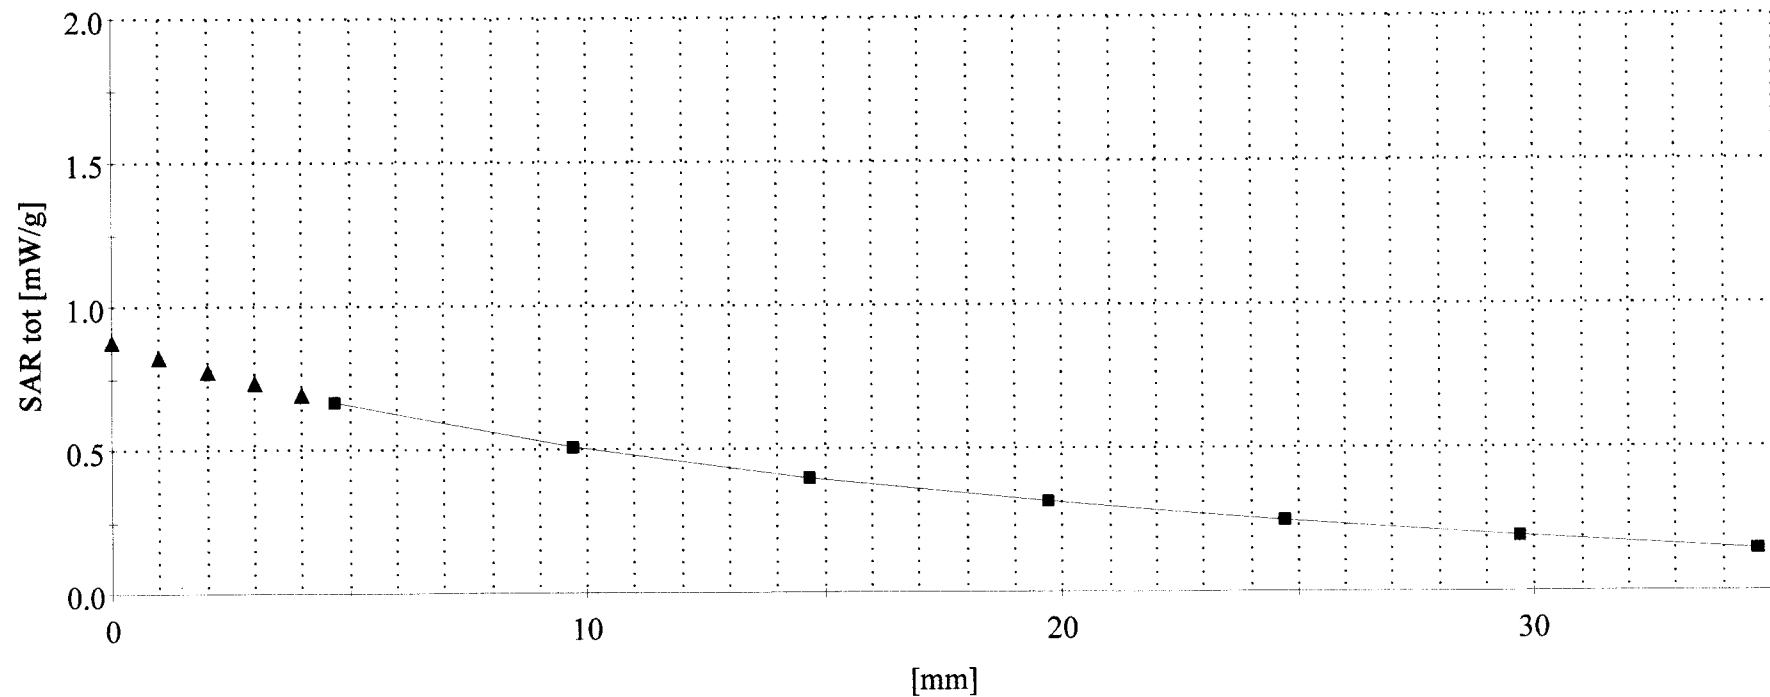

SAMSUNG FCC ID: A3LSCHN255 -- FM Body SAR

SAM Phantom; Flat Section; Probe: ET3DV6 - SN1560; ConvF(6.52,6.52,6.52)

Med. Parameters 835 MHz Muscle: $\sigma = 0.99$ mho/m $\epsilon_r = 55.0$ $\rho = 1.00$ g/cm³; Antenna Position -- In; Crest Factor 1.0

SAR (1g): 1.24 mW/g , SAR (10g): 0.864 mW/g

SAMSUNG Dual Mode phone Model: SCH-N255

FM Mode, Ch.0991 [824.04MHz]; Standard Battery; Ambient Temp. = 22.3°C / Meas. Tissue Temp. = 22.2°C

Conducted Power = 26.0dBm; Spacing = 1.0cm from EUT (antenna side) to flat phantom, No BeltClip/No Holster

Test Date -- 04/05/2002 [FCC/OET Bulletin 65 - Supplement C, July 2001]

