

FCC RF Test Report

APPLICANT : SAMSUNG Electronics Co., LTD.
EQUIPMENT : Mobile Phone
BRAND NAME : Samsung
MODEL NAME : SCH-W2013
MARKETING NAME : Grande
FCC ID : A3LSCHW2013
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Sep. 27, 2012 and completely tested on Oct. 19, 2012. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 RF Output Power	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System	9
2.4 RF Utility	9
3 TEST RESULT	10
3.1 6dB Bandwidth Measurement	10
3.2 Peak Output Power Measurement	13
3.3 Power Spectral Density Measurement	16
3.4 Conducted Band Edges and Spurious Emission Measurement	21
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement	44
3.7 Antenna Requirements	48
4 LIST OF MEASURING EQUIPMENT	49
5 UNCERTAINTY OF EVALUATION	50



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2O0932A	Rev. 01	Initial issue of report	Oct. 30, 2012

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.86 dB at 32.970 MHz
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 14.90 dB at 2.526 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

SAMSUNG Electronics Co., LTD.

IT center, 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

1.2 Manufacturer

SAMSUNG Electronics Co., LTD.

IT center, 416, Maetan-3dong, Yeongtong-gu, Suwon-city, Gyeonggi-do, Korea

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Samsung
Model Name	SCH-W2013
Marketing Name	Grande
FCC ID	A3LSCHW2013
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/ WLAN 11abgn / Bluetooth
HW Version	W2013.05
SW Version	W2013KELG4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth 4.0 - LE : 6.37 dBm (0.0043 W)
Antenna Type	FPCB Antenna Type with gain -2.00 dBi
Type of Modulation	Bluetooth 4.0 - LE : GFSK

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL INC.			
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH02-HY	CO05-HY	03CH05-HY	722060/4086B-1

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ANSI C63.4-2003 and ANSI C63.10-2009
- IC RSS-210 Issue 8
- IC RSS-Gen Issue 3

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 RF Output Power

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power
		Data Rate / Modulation
		GFSK
		1Mbps
Ch00	2402MHz	6.06 dBm
Ch19	2440MHz	6.25 dBm
Ch39	2480MHz	6.37 dBm

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and ANSI C63.10-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.


The following tables are showing the test modes as the worst cases (Z plane) and recorded in this report.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1 :GSM900 Idle + Bluetooth Link + WLAN (2.4G) Link + MP3 + USB Cable (Charging from Adapter)

2.3 Connection Diagram of Test System

<Bluetooth 4.0 – LE Tx Mode>

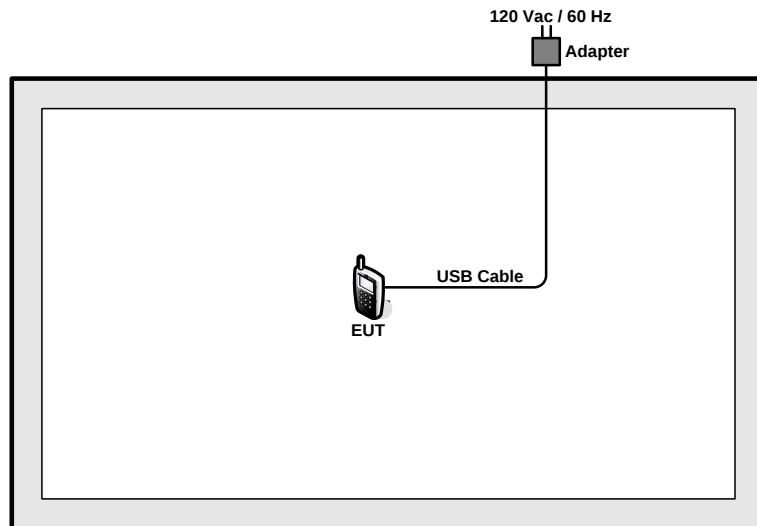

<AC Conducted Emission Mode>

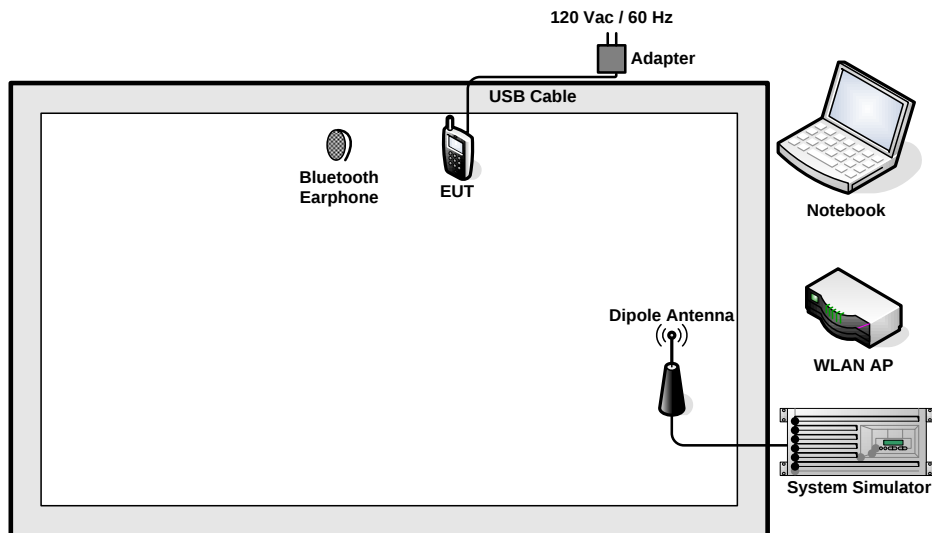

2.4 RF Utility

For Bluetooth function, key in “* #533881 #” on the EUT directly. Then, the EUT will get into the engineering modes for continuous transmitting and receiving signals.

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.

3.1.4 Test Setup

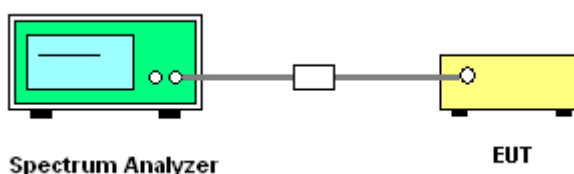


3.1.5 Test Result of 6dB Bandwidth


Test Mode :	Bluetooth 4.0 - LE	Temperature :	24~26℃
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	6dB Bandwidth (MHz)
00	2402	0.70
19	2440	0.69
39	2480	0.69

6 dB Bandwidth Plot on Channel 00

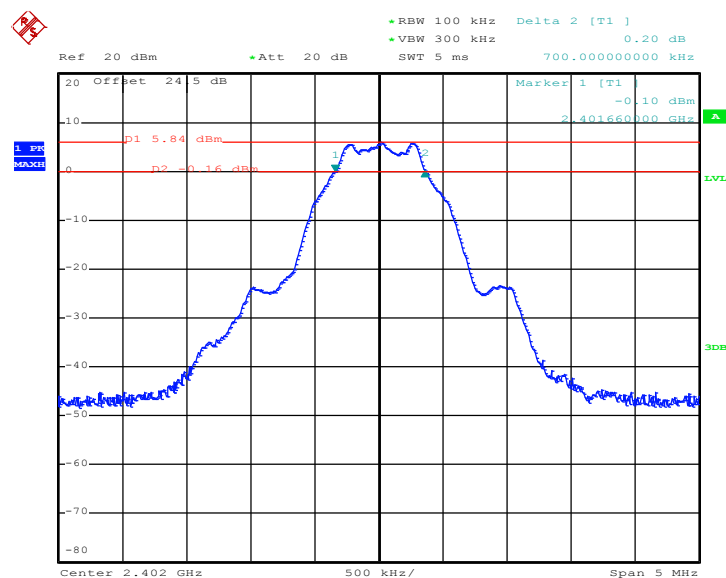


2o0932 15C 6dB.11a 2402 (ch00)
Date: 15.OCT.2012 22:58:53

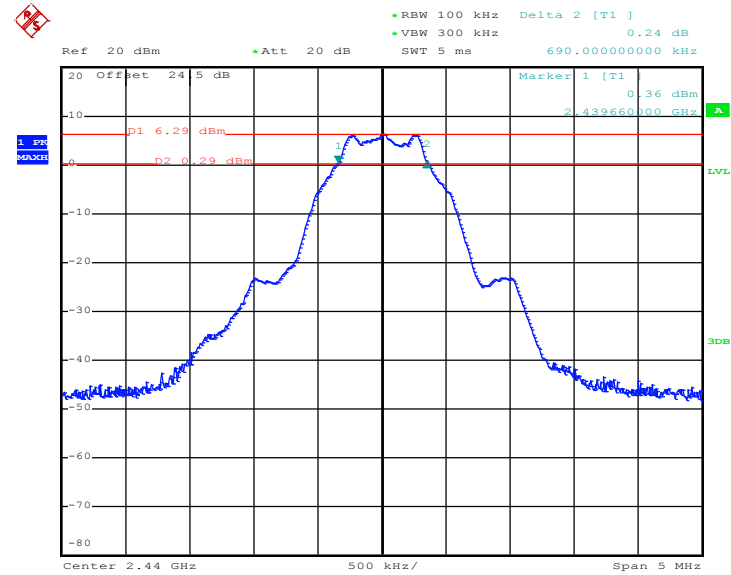6 dB Bandwidth Plot on Channel 19


2o0932 15C 6dB.11a 2440 (ch19)

Date: 15.OCT.2012 23:05:18

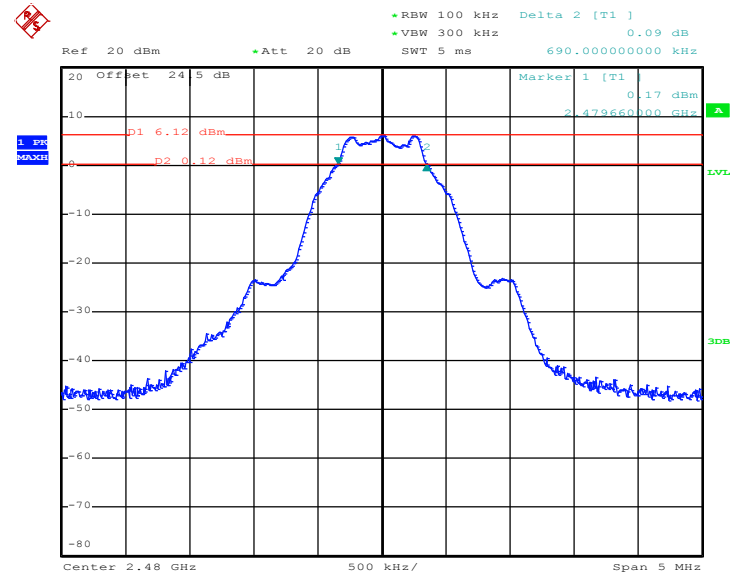6 dB Bandwidth Plot on Channel 39


2o0932 15C 6dB.11a 2480 (ch39)

Date: 15.OCT.2012 23:08:43

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the power meter by a low loss cable
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

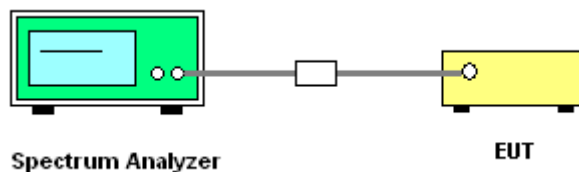


3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	24~26℃
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	6.06	30.00	Pass
19	2440	6.25	30.00	Pass
39	2480	6.37	30.00	Pass


Peak Output Power Plot on Channel 00

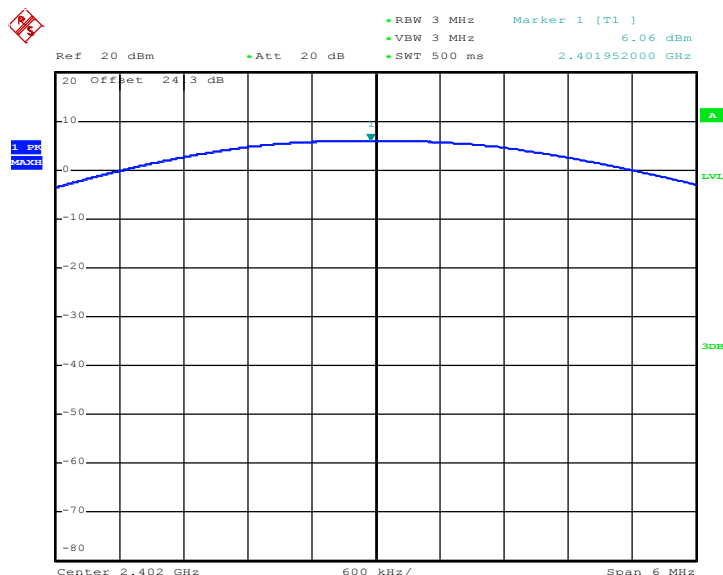

Date: 12.OCT.2012 23:19:36




Peak Output Power Plot on Channel 19

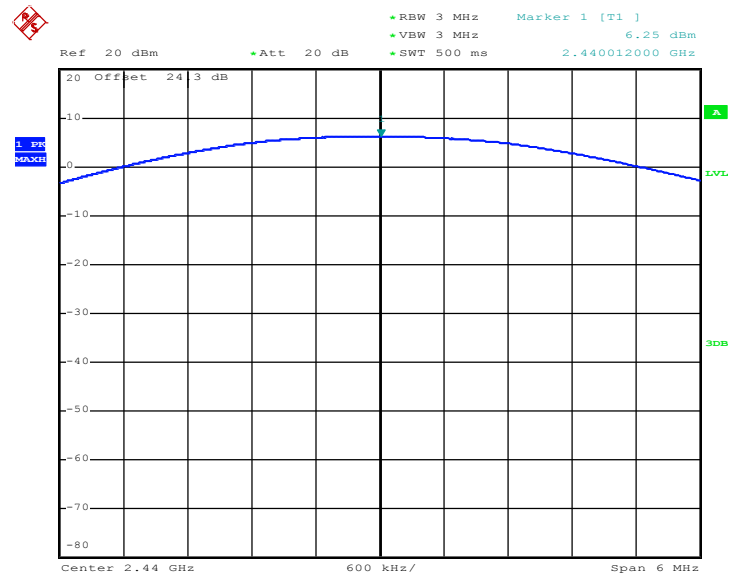

Date: 12.OCT.2012 23:20:25

Peak Output Power Plot on Channel 39

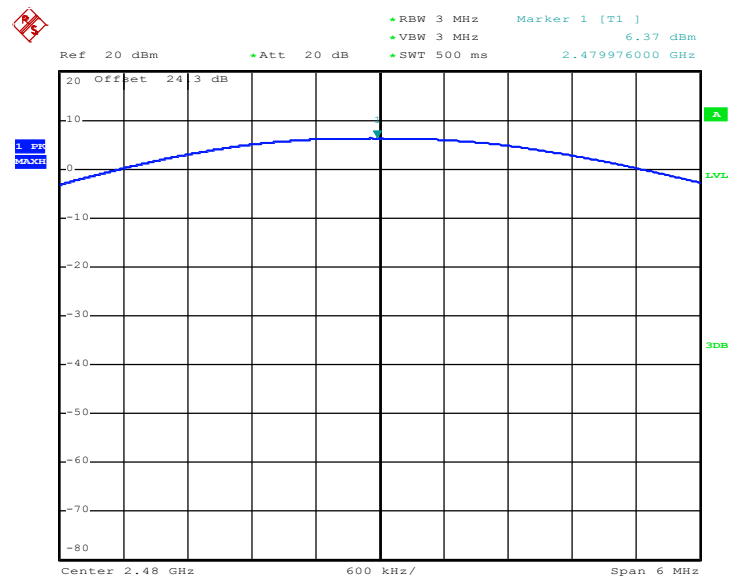

Date: 12.OCT.2012 23:22:11

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Record the measurement data derived from spectrum analyzer.

3.3.4 Test Setup

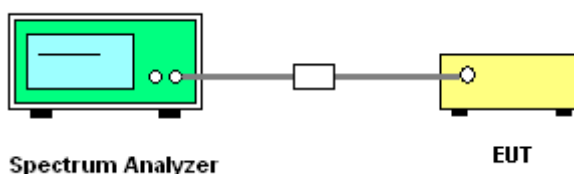

3.3.5 Test Result of Power Spectral Density

Test Mode :	Bluetooth 4.0 - LE	Temperature :	24~26℃
Test Engineer :	Bill Kuo	Relative Humidity :	50~53%


Channel	Frequency (MHz)	Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
00	2402	5.85	-7.69	8	Pass
19	2440	6.24	-7.29	8	Pass
39	2480	6.10	-7.54	8	Pass

Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

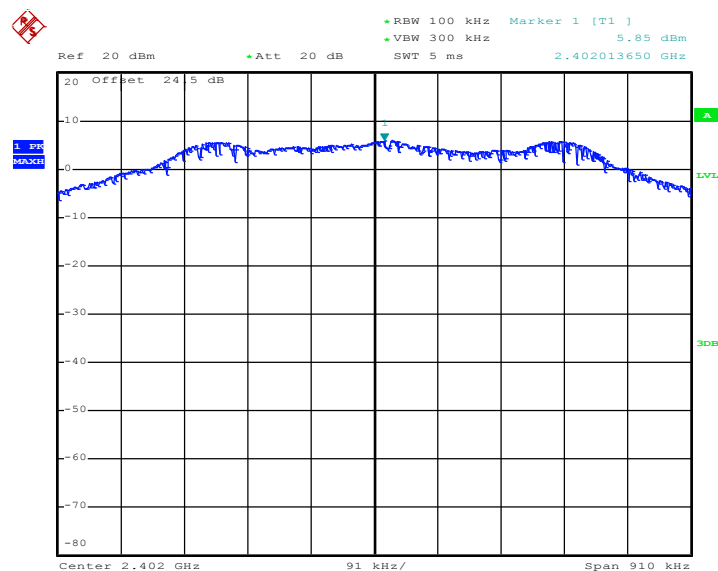

Date: 15.OCT.2012 23:00:46




PSD 100kHz Plot on Channel 19

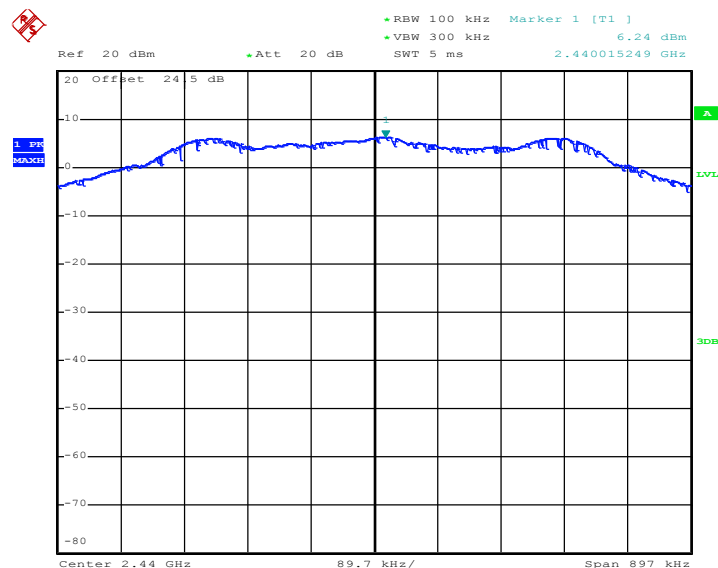

Date: 15.OCT.2012 23:05:49

PSD 100kHz Plot on Channel 39

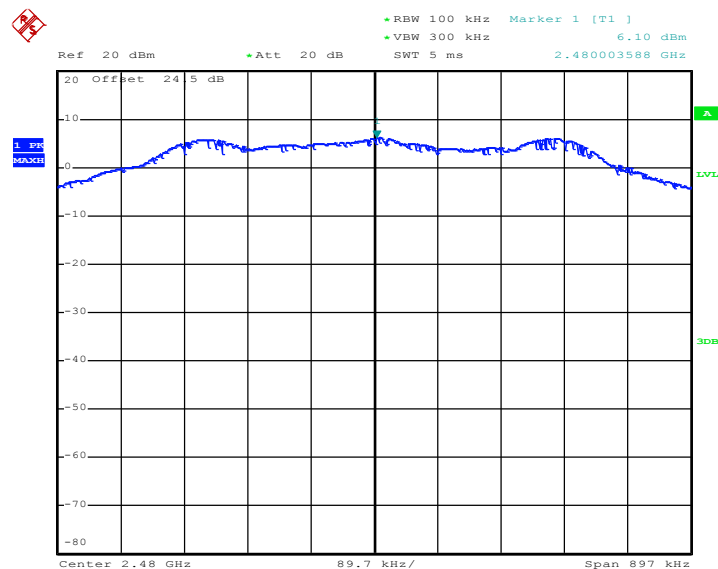


Date: 15.OCT.2012 23:09:06




3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on Channel 00

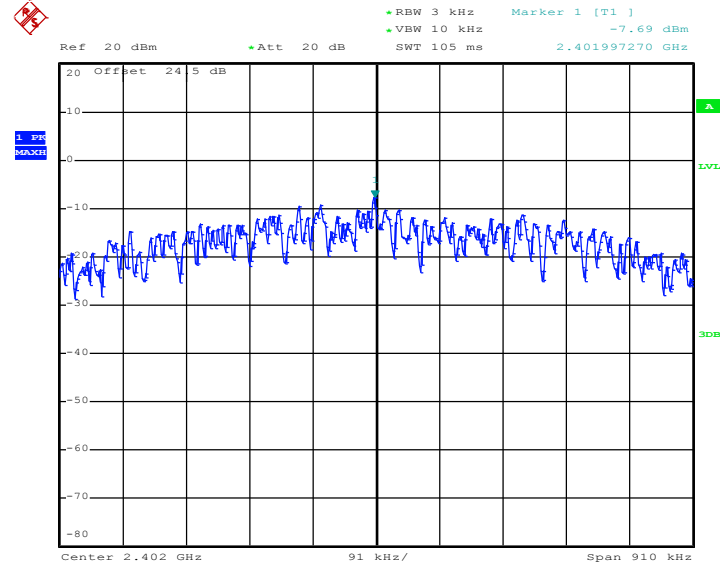

Date: 15.OCT.2012 22:59:13


PSD 3kHz Plot on Channel 19

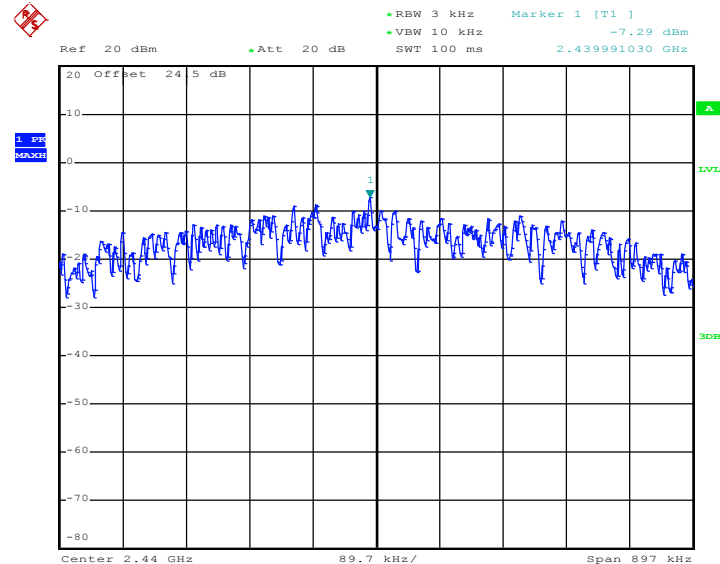

Date: 15.OCT.2012 23:05:37



PSD 3kHz Plot on Channel 39

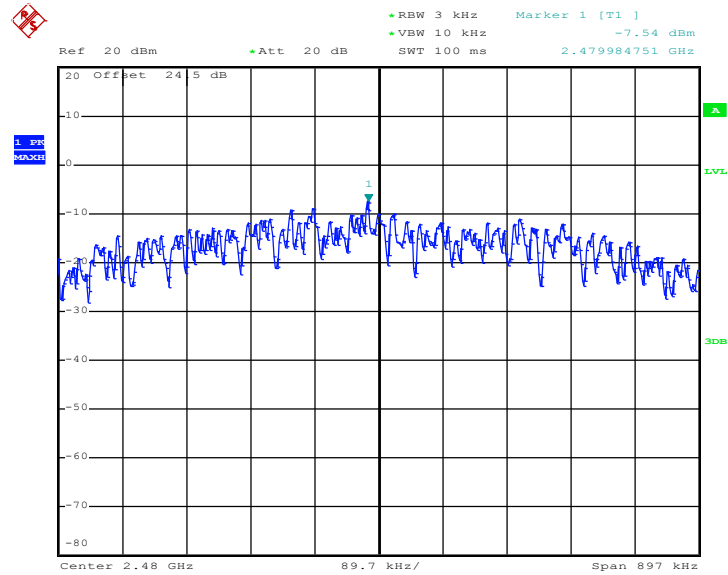

Date: 15.OCT.2012 23:09:01

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 and ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement and the Measurement Procedure of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
2. The transmitter output was connected to the spectrum analyzer via a low lose cable.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, Video bandwidth (VBW) $\geq$ RBW. Out of the authorized frequency band emissions must be at least 20 dB lower than the highest emission level within the authorized band as measured with a 100 KHz RBW. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).

3.4.4 Test Setup

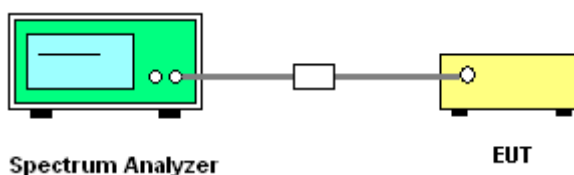




3.4.5 Test Result of Conducted Band Edges


Test Mode :	Bluetooth 4.0 - LE	Temperature :	24~26℃
Test Channel :	00 and 39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo

Low Band Edge Plot on Channel 00

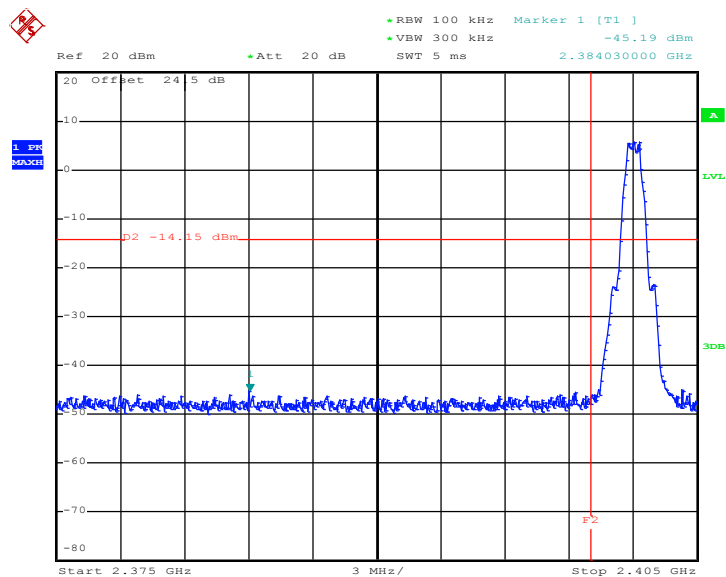

Date: 15.OCT.2012 23:01:05

High Band Edge Plot on Channel 39

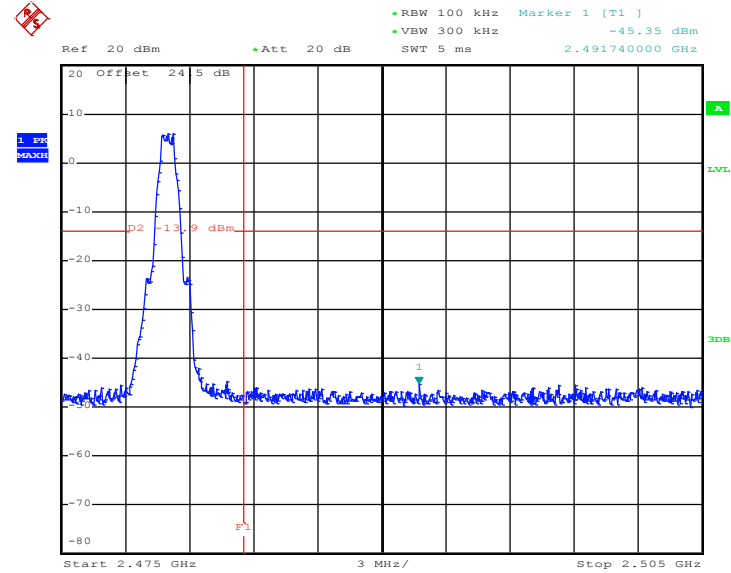


Date: 15.OCT.2012 23:09:26

3.4.6 Test Result of Conducted Spurious Emission

Test Mode :	Bluetooth 4.0 - LE	Temperature :	24~26℃
Test Channel :	00	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo


Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps GFSK Channel 00

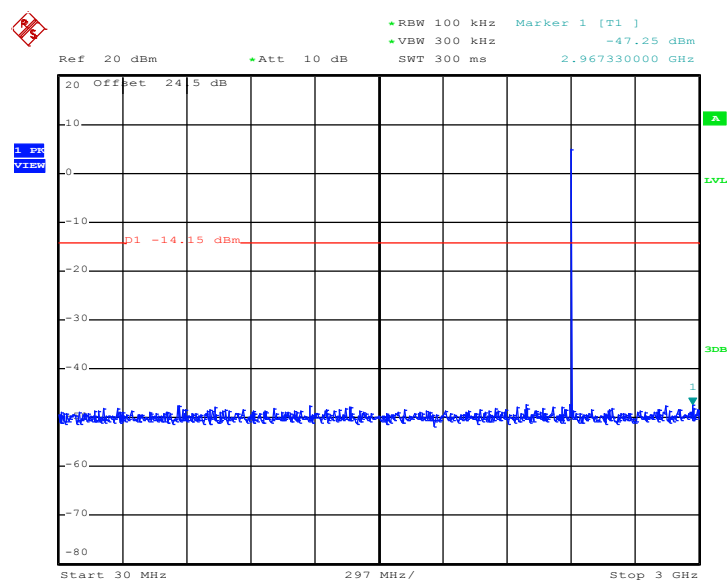

Date: 15.OCT.2012 23:01:32



Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps
GFSK Channel 00

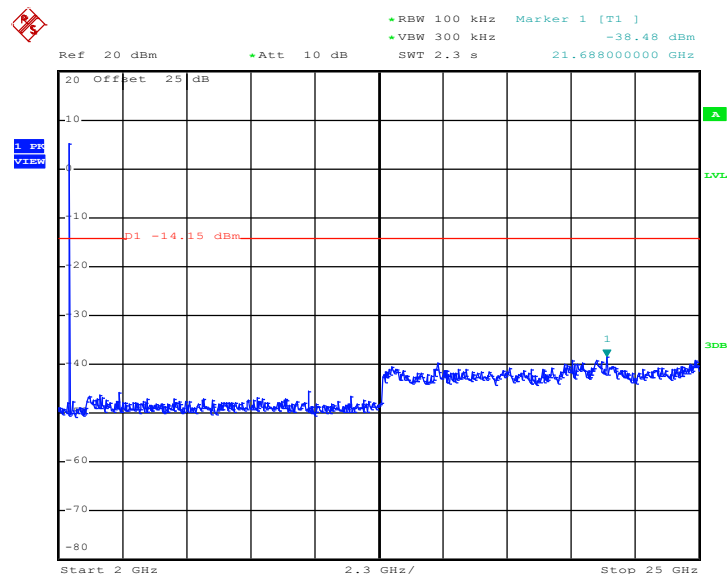


Date: 15.OCT.2012 23:01:49



Test Mode :	Bluetooth 4.0 - LE	Temperature :	24~26°C
Test Channel :	19	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo


Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps
GFSK Channel 19

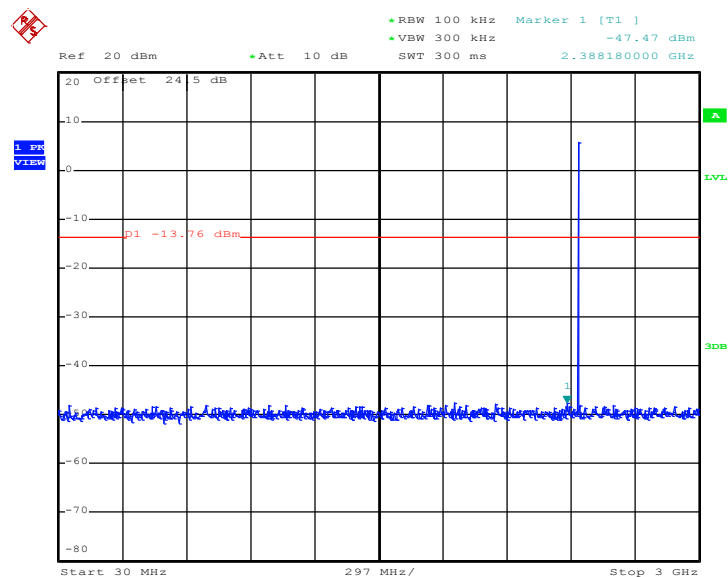

Date: 15.OCT.2012 23:07:01



Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps
GFSK Channel 19

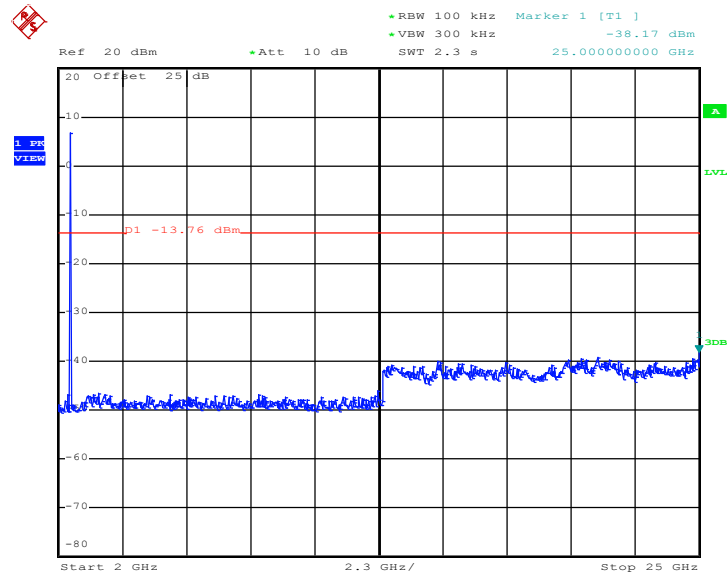


Date: 15.OCT.2012 23:07:19



Test Mode :	Bluetooth 4.0 - LE	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
		Test Engineer :	Bill Kuo


Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps
GFSK Channel 39

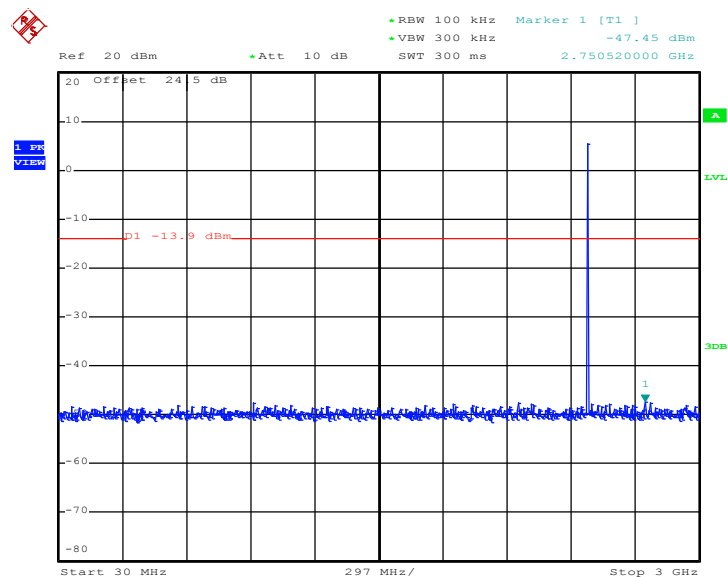

Date: 15.OCT.2012 23:10:45



Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps
GFSK Channel 39

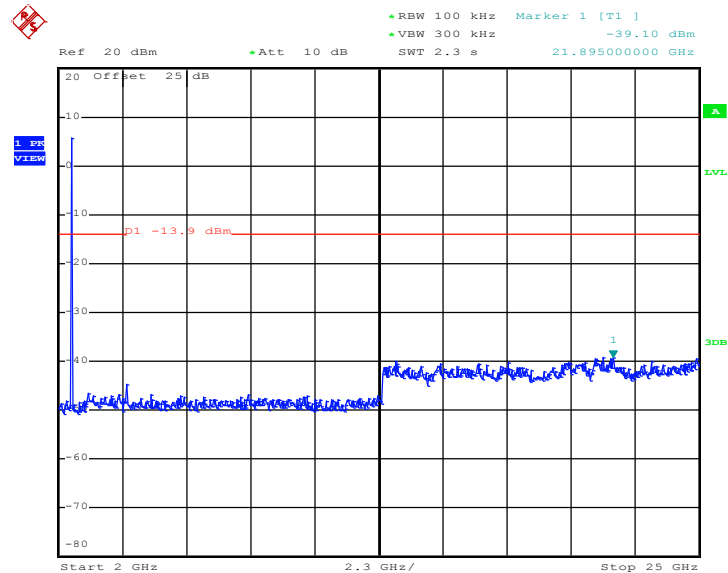

Date: 15.OCT.2012 23:11:03

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 and ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement and the Measurement Procedure of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
 2. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
 3. The EUT was placed on a turntable with 0.8 meter above ground.
 4. The EUT was set 3 meters from the interference receiving Antenna, which was mounted on the top of a variable height Antenna tower.
 5. Set to the maximum power setting and enable the EUT transmit continuously.
 6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method.
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
 7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
- Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (24.5dB) derived from $20 \log (\text{dwell time}/100\text{ms})$.
- For example: Average level = 45.61dBuV/m – 24.5 (dB) = 21.11dBuV/m.

Marker-Delta method in :


- (1) Fundamental Peak Level : Set RBW = 1 MHz , VBW = 1 MHz , peak detector ;
Average Level = Peak Level + $20 * \log(\text{Duty cycle})$
- (2) Set span = 10MHz, that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set RBW = 100kHz, 1% of the total span. Set VBW = 100kHz $\geq$ RBW.
- (3) Subtract the delta measured in step (2) from the field strengths measured in step (1).
The resultant field strengths (peak/average) are then used to determine band-edge compliance as required by Section 15.205.

3.5.4 Test Setup


For radiated emissions below 30MHz

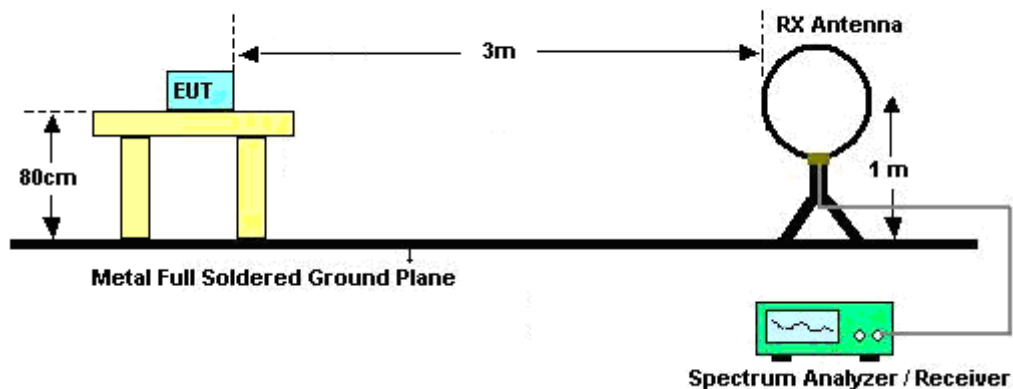

For radiated emissions from 30MHz to 1GHz

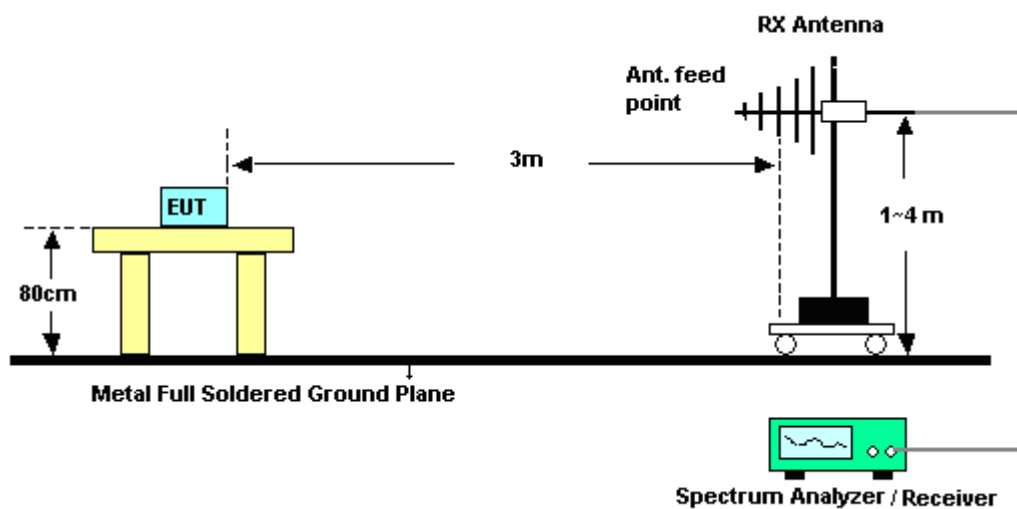

For radiated emissions above 1GHz

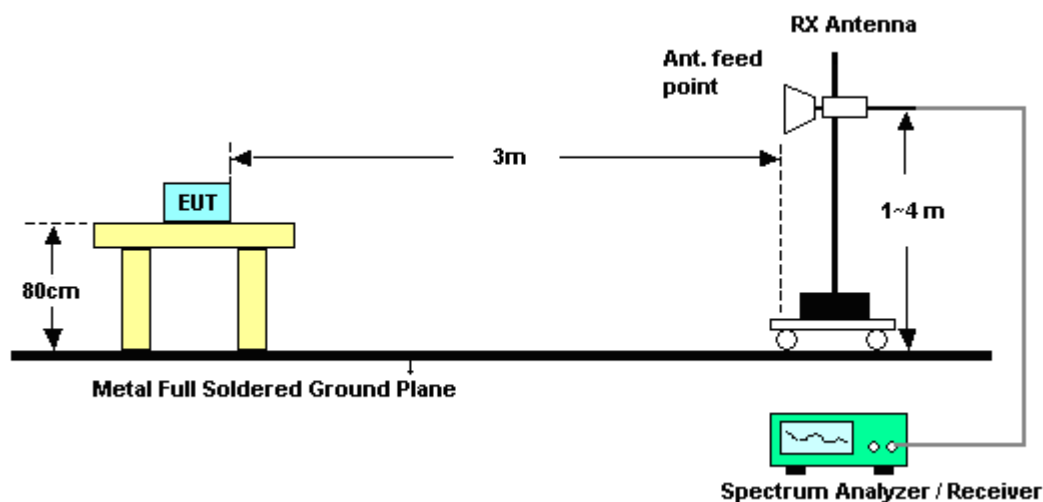

3.5.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	50~52%
		Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2366.88	52.92	-21.08	74	52.1	32.13	4.57	35.88	106	324	Peak
2389.74	37.76	-16.24	54	36.88	32.18	4.58	35.88	106	324	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2366.43	50.79	-23.21	74	49.97	32.13	4.57	35.88	200	256	Peak
2389.29	36.7	-17.3	54	35.82	32.18	4.58	35.88	200	256	Average

Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	50~52%
		Test Engineer :	David Yang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	57.95	-16.05	74	56.84	32.28	4.64	35.81	100	310	Peak
2483.5	53.29	-0.71	54	52.18	32.28	4.64	35.81	100	310	Average
2483.5	41.74	-32.26	74	-	-	-	-	-	-	Peak
2483.5	40.77	-13.23	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	100.23	58.49	41.74	74	-32.26	Pass
Average	99.26	58.49	40.77	54	-13.23	Pass

Note : Measurement result = Maximum field strength – Delta result


ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	55.05	-18.95	74	53.94	32.28	4.64	35.81	193	285	Peak
2483.5	50.23	-3.77	54	49.12	32.28	4.64	35.81	193	285	Average
2483.5	41.07	-32.93	74	-	-	-	-	-	-	Peak
2483.5	40.16	-13.84	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	97.12	56.05	41.07	74	-32.93	Pass
Average	96.21	56.05	40.16	54	-13.84	Pass

Note : Measurement result = Maximum field strength – Delta result

Test Mode :	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Horizontal

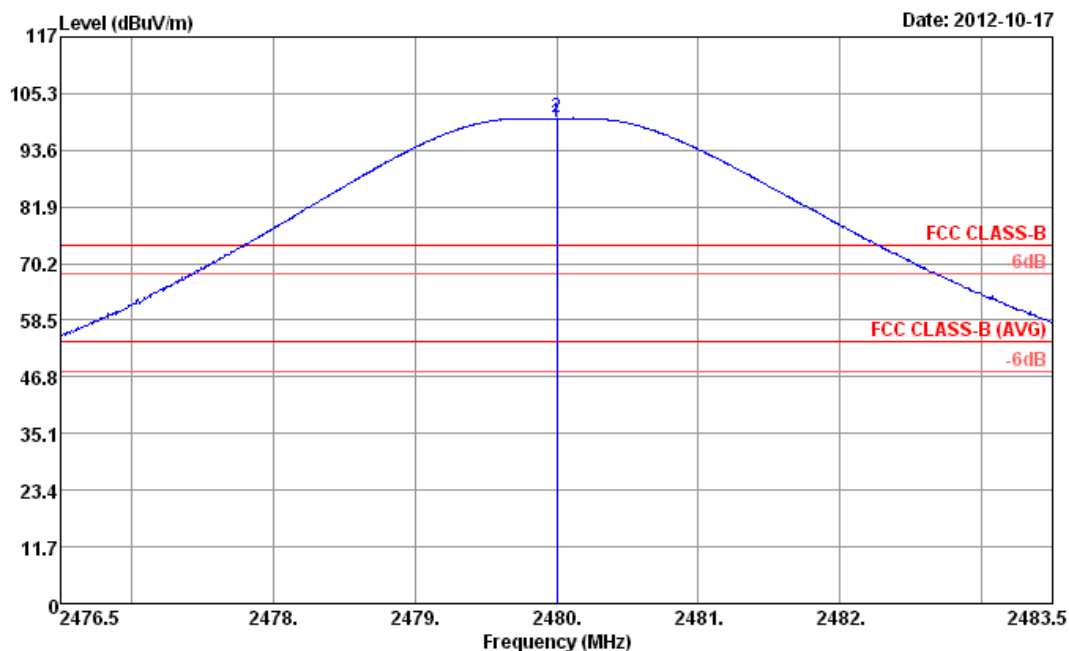


Site : 03CH05-HY
Condition : FCC CLASS-B 3m HF_ANT_584_20120809 HORIZONTAL
: 100.000 MHz VBW:3000.000KHz SWT:Auto

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 *	2480.00	99.26	45.26	54.00	98.15	32.28	4.64	35.81	100	310 Average
2 *	2480.00	100.23	26.23	74.00	99.12	32.28	4.64	35.81	100	310 Peak

* Maximum field strength of the fundamental emission



Test Mode :	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Horizontal

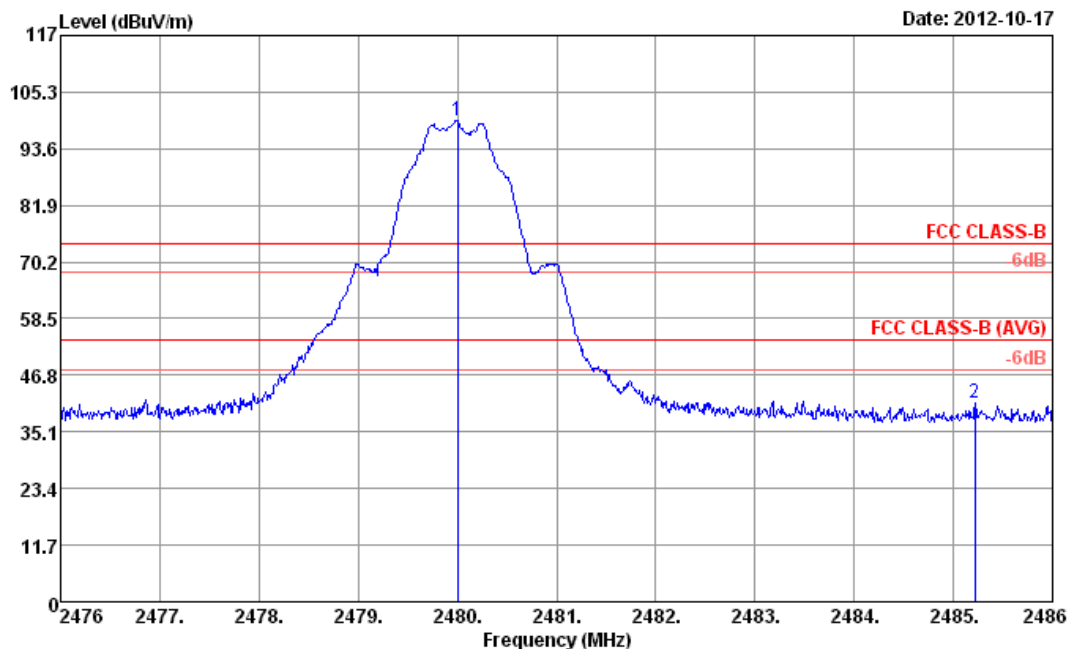


Site : 03CH05-HY
Condition : FCC CLASS-B 3m HF_ANT_584_20120809 HORIZONTAL
: RBW:100.000KHz VBW:100.000KHz SWT:Auto

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 *	2480.00	99.44	25.44	74.00	98.33	32.28	4.64	35.81	100	310 Peak
2	2485.22	40.95	-33.05	74.00	39.84	32.28	4.64	35.81	100	310 Peak

*Marker-Delta Method (RBW/VBW=100KHz/300KHz): 58.49 dB



Test Mode :	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps	Temperature :	24~26°C
Test Channel :	39	Relative Humidity :	50~53%
Test Engineer :	David Yang	Polarization :	Vertical

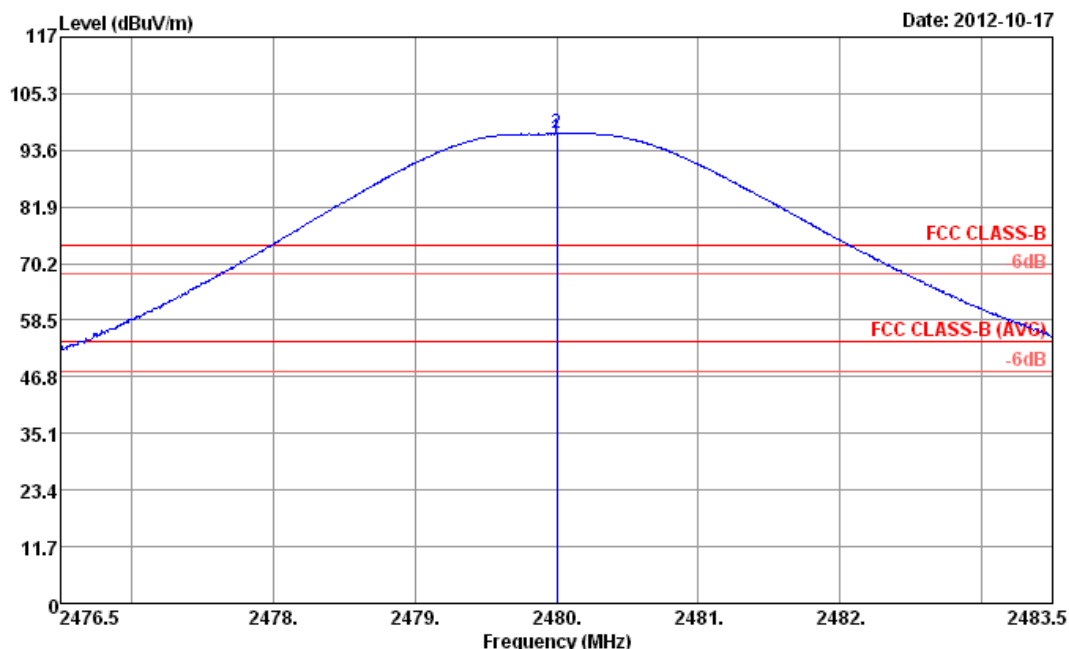


Site : 03CH05-HY
Condition : FCC CLASS-B 3m HF_ANT_584_20120809 VERTICAL
: RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 *	2480.00	96.21	42.21	54.00	95.10	32.28	4.64	35.81	193	285 Average
2 *	2480.00	97.12	23.12	74.00	96.01	32.28	4.64	35.81	193	285 Peak

* Maximum field strength of the fundamental emission

Test Mode :	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Vertical

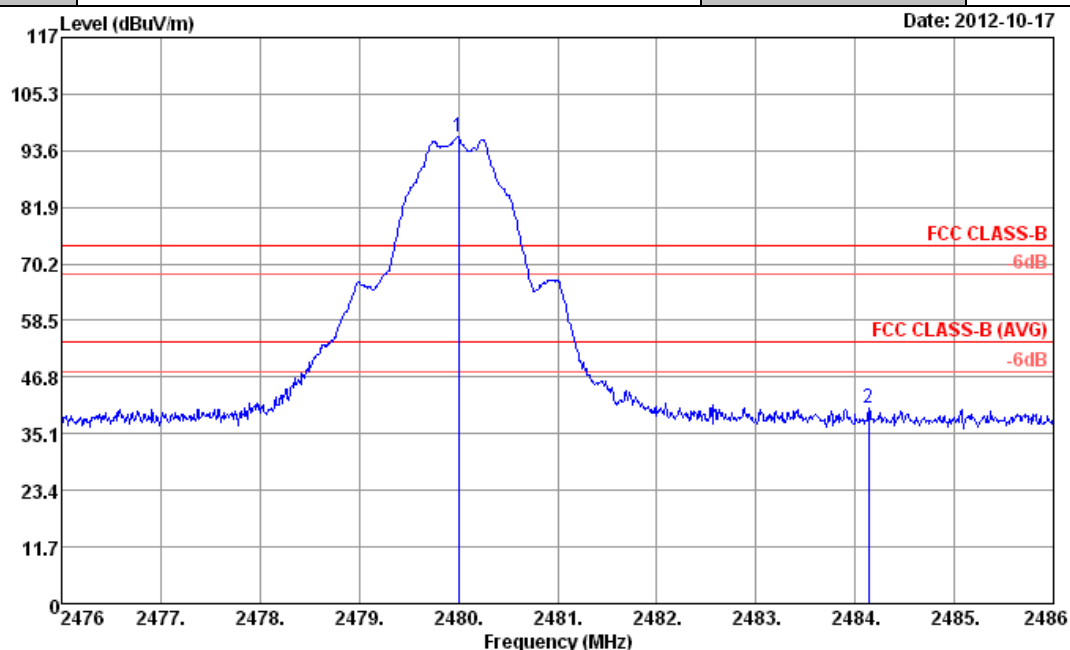

Site : 03CH05-HY
Condition : FCC CLASS-B 3m HF_ANT_584_20120809 VERTICAL
: RBW:100.000kHz VBW:100.000kHz SWT:Auto

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Loss Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 *	2480.00	96.31	22.31	74.00	95.20	32.28	4.64	35.81	193	285 Peak
2	2484.14	40.26	-33.74	74.00	39.15	32.28	4.64	35.81	193	285 Peak

*Marker-Delta Method (RBW/VBW=100KHz/300KHz): 56.05 dB

3.5.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	101.52	-	-	100.62	32.18	4.58	35.86	106	324	Average
2402	102.32	-	-	101.42	32.18	4.58	35.86	106	324	Peak
4806	40.74	-33.26	74	59.03	34.26	6.51	59.06	100	0	Peak

Test Mode :	Mode 1	Temperature :	23~25°C
Test Channel :	00	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	97.86	-	-	96.96	32.18	4.58	35.86	200	256	Average
2402	98.61	-	-	97.71	32.18	4.58	35.86	200	256	Peak
4806	41.73	-32.27	74	60.02	34.26	6.51	59.06	100	0	Peak

Test Mode :	Mode 2	Temperature :	23~25°C
Test Channel :	19	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2440	100.44	-	-	99.43	32.24	4.61	35.84	104	312	Average
2440	101.2	-	-	100.19	32.24	4.61	35.84	104	312	Peak
4881	40.74	-33.26	74	58.8	34.28	6.54	58.88	100	0	Peak

Test Mode :	Mode 2	Temperature :	23~25°C
Test Channel :	19	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2440	96.45	-	-	95.44	32.24	4.61	35.84	197	263	Average
2440	97.22	-	-	96.21	32.24	4.61	35.84	197	263	Peak
4881	41.58	-32.42	74	59.64	34.28	6.54	58.88	100	0	Peak

Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
172.83	31.81	-11.69	43.5	52.24	9.26	1.37	31.06	-	-	Peak
220.89	35.83	-10.17	46	55.85	9.39	1.54	30.95	132	244	Peak
257.07	34.55	-11.45	46	50.32	13.51	1.68	30.96	-	-	Peak
316.8	33.77	-12.23	46	49.42	13.44	1.82	30.91	-	-	Peak
437.9	27.62	-18.38	46	39.63	16.86	2.11	30.98	-	-	Peak
809.6	24.53	-21.47	46	29.27	22.2	2.85	29.79	-	-	Peak
2480	100.26	-	-	99.15	32.28	4.64	35.81	100	310	Average
2480	101.09	-	-	99.98	32.28	4.64	35.81	100	310	Peak



Test Mode :	Mode 3	Temperature :	23~25°C
Test Channel :	39	Relative Humidity :	50~52%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported per15.31.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	33.14	-6.86	40	46.29	17.76	0.72	31.63	105	323	Peak
50.79	29.65	-10.35	40	52.35	7.9	0.81	31.41	-	-	Peak
224.94	33.77	-12.23	46	53.4	9.75	1.56	30.94	-	-	Peak
309.1	29.77	-16.23	46	45.58	13.31	1.8	30.92	-	-	Peak
433.7	23.68	-22.32	46	35.81	16.77	2.1	31	-	-	Peak
755.7	24.47	-21.53	46	29.51	22.35	2.76	30.15	-	-	Peak
2480	96.21	-	-	95.1	32.28	4.64	35.81	193	285	Average
2480	97.02	-	-	95.91	32.28	4.64	35.81	193	285	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009 and ANSI C63.4-2003 and ANSI C63.10-2009 test site requirement and the Measurement Procedure of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

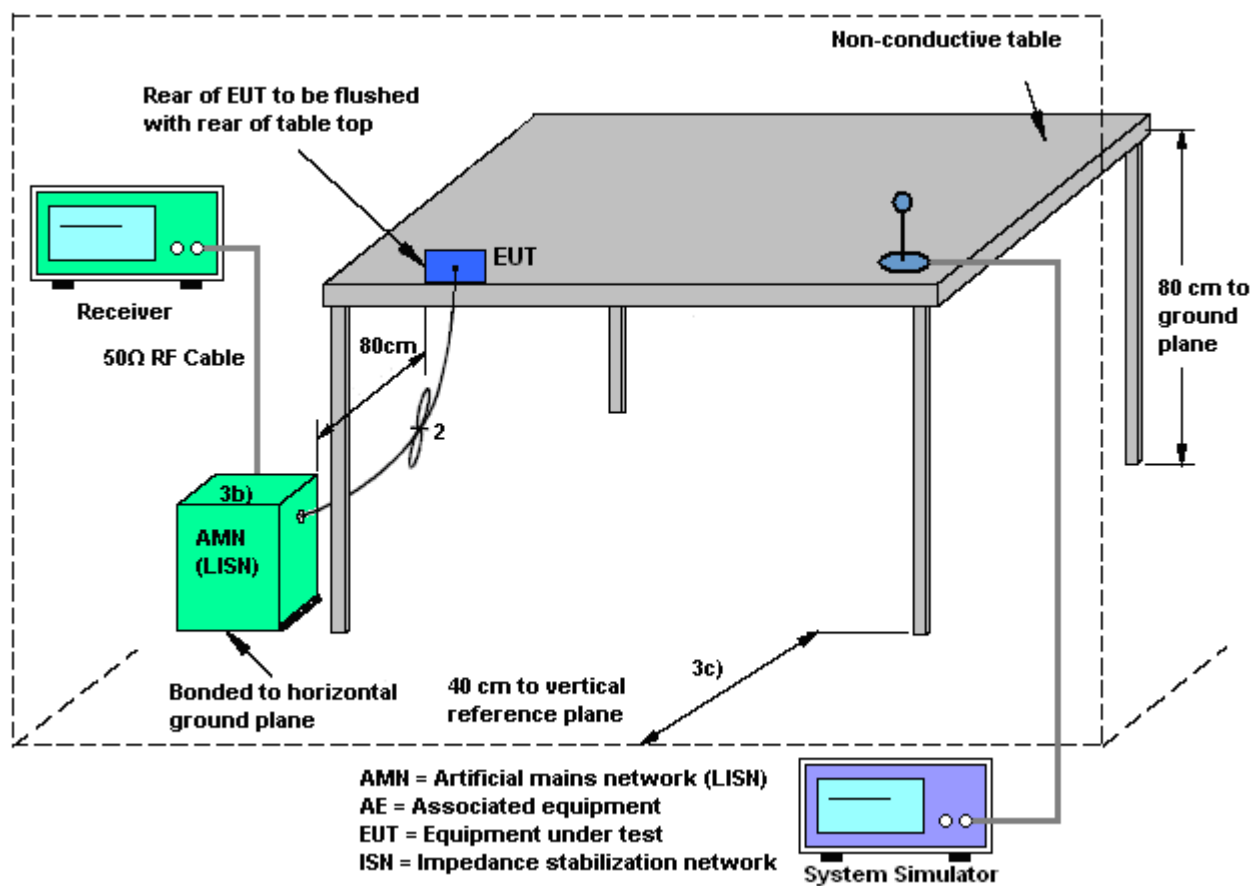

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM900 Idle + Bluetooth Link + WLAN (2.4G) Link + MP3 + USB Cable (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

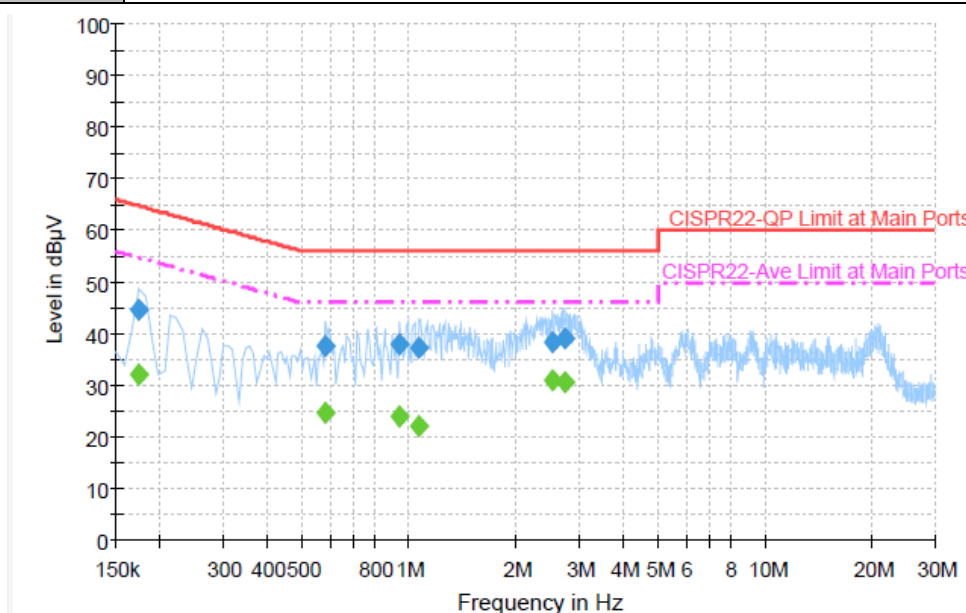


Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	44.8	Off	L1	19.4	20.0	64.8
0.582000	37.6	Off	L1	19.4	18.4	56.0
0.942000	37.8	Off	L1	19.4	18.2	56.0
1.070000	37.3	Off	L1	19.4	18.7	56.0
2.526000	38.5	Off	L1	19.6	17.5	56.0
2.742000	39.1	Off	L1	19.6	16.9	56.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	32.1	Off	L1	19.4	22.7	54.8
0.582000	24.7	Off	L1	19.4	21.3	46.0
0.942000	24.0	Off	L1	19.4	22.0	46.0
1.070000	22.2	Off	L1	19.4	23.8	46.0
2.526000	31.1	Off	L1	19.6	14.9	46.0
2.742000	30.6	Off	L1	19.6	15.4	46.0

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Slash Huang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM900 Idle + Bluetooth Link + WLAN (2.4G) Link + MP3 + USB Cable (Charging from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

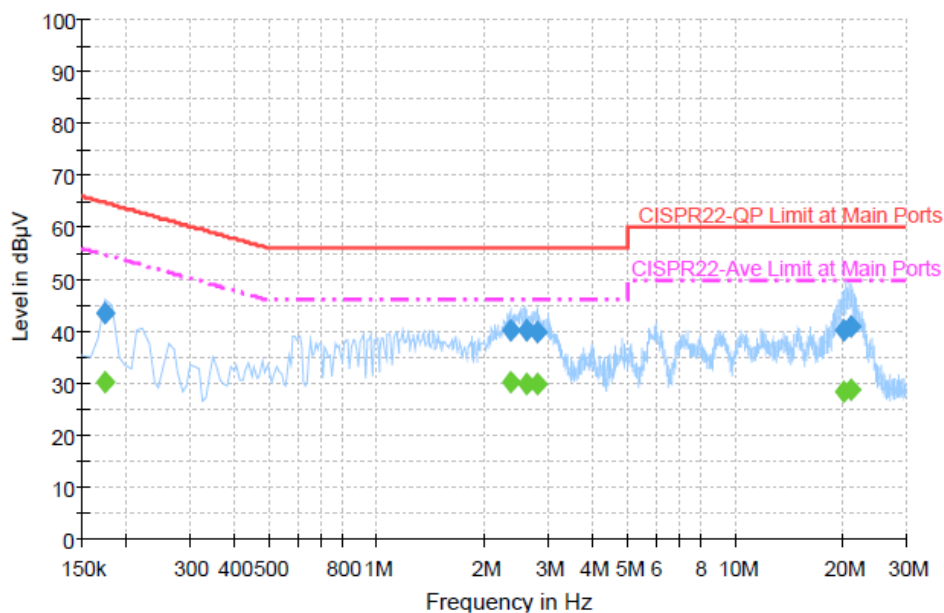
Final Result : Quasi-Peak

Frequency (MHz)	Quasi-Peak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	43.7	Off	N	19.4	21.1	64.8
2.358000	40.3	Off	N	19.6	15.7	56.0
2.622000	40.4	Off	N	19.6	15.6	56.0
2.798000	39.9	Off	N	19.7	16.1	56.0
20.166000	40.3	Off	N	20.0	19.7	60.0
21.046000	41.0	Off	N	19.9	19.0	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.174000	30.3	Off	N	19.4	24.5	54.8
2.358000	30.1	Off	N	19.6	15.9	46.0
2.622000	29.7	Off	N	19.6	16.3	46.0
2.798000	29.8	Off	N	19.7	16.2	46.0
20.166000	28.5	Off	N	20.0	21.5	50.0
21.046000	28.7	Off	N	19.9	21.3	50.0

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 06, 2012	Oct. 12, 2012 ~ Oct. 15, 2012	Jun. 05, 2013	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	300MHz~40GHz	Sep. 08, 2012	Oct. 12, 2012 ~ Oct. 15, 2012	Sep. 07, 2013	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Sep. 08, 2012	Oct. 12, 2012 ~ Oct. 15, 2012	Sep. 07, 2013	Conducted (TH02-HY)
Spectrum Analyzer	R&S	ESU26	100390	20Hz ~ 26.5GHz	Dec. 22, 2011	Oct. 17, 2012	Dec. 21, 2012	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30MHz ~ 2GHz	Oct. 22, 2011	Oct. 17, 2012	Oct. 21, 2012	Radiation (03CH05-HY)
Turn Table	HD	Deis HD 2000	420/611	0 ~ 360 degree	N/A	Oct. 17, 2012	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	MA 240	240/666	1 m ~ 4 m	N/A	Oct. 17, 2012	N/A	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	66584	1GHz~18GHz	Aug. 10, 2012	Oct. 17, 2012	Aug. 09, 2013	Radiation (03CH05-HY)
Pre Amplifier	Agilent	8449B	3008A02665	1GHz~26.5GHz	Aug. 28, 2012	Oct. 17, 2012	Aug. 27, 2013	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz ~ 40GHz	Oct. 21, 2011	Oct. 17, 2012	Oct. 20, 2012	Radiation (03CH05-HY)
Pre Amplifier	COM-POWER	PA-103	161075	10-1000MHz.32dB.GAIN	Feb. 27, 2012	Oct. 17, 2012	Feb. 26, 2013	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9KHz ~ 30MHz	Jul. 03, 2012	Oct. 17, 2012	Jul. 02, 2014	Radiation (03CH05-HY)
EMI Test Receiver	R&S	ESCS 30	100356	9KHz ~ 2.75GHz	Oct. 27, 2011	Oct. 19, 2012	Oct. 26, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz ~ 30MHz	Dec. 09, 2011	Oct. 19, 2012	Dec. 08, 2012	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz ~ 30MHz	Dec. 06, 2011	Oct. 19, 2012	Dec. 05, 2012	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	Oct. 19, 2012	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	117997	N/A	Aug. 22, 2011	Oct. 19, 2012	Aug. 21, 2013	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
--	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
--	------