


EMC Test Report

According to FCC Part 15 Subpart B

Project No.	LBE050910
Equipment under Test	
Applicant	Samsung Electronics Co., Ltd. 416 Maetan 3-Dong, Yeongtong-Gu, Suwon-Si, Gyeonggi-Do, Korea, 443-742
FCC ID	A3LSECFROA
Product Name	USB Flash Drive
Model Name	SECFROA_2G
Manufacturer	Samsung Electronics Co., Ltd.
Date of Test	April 28, 2005 ~ April 29, 2005
Issued Date	May 03, 2005

	Name/Position	Signature
Tested by	Kyeong Dong, Kim Test Engineer	
Reviewed by	No Cheon, Park Manager of EMC Lab.	
Authorized by	Seung Kyu, Cha Chief of EMC Lab.	

1. This test reports does not constitute an endorsement by NIST/NVLAP or U.S Government.
2. This test report is to certify that the tested device properly complies with the requirements of FCC Rules and Regulations Part 15 Subpart B Unintentional Radiators.

All tests necessary to show compliance to the requirements were and these results met the specifications requirement.

This laboratory is registered by the NIST/NVLAP, U.S.A.

The test reported herein have been performed in accordance with its terms of registration.



NVLAP LAB CODE 200623-0

3. FCC filing Registration Number : 873282

Table of Contents

1. General Information

- 1.1 Basic Information related Product
- 1.2 Detail Information related Product
- 1.3 Test Configuration
- 1.4 EUT Operating Conditions
- 1.5 Applied Standard
- 1.6 Test Facility
- 1.7 Test Configuration
- 1.8 Applied Standards
- 1.9 Test Facility

2. Summary of Test Results

3. Description of individual tests

- 3.1 Conducted Emission
- 3.2 Radiated Emission

4. Appendix

- 4.1 Test Photography
- 4.2 EUT Photography

1. General Information

1.1 Basic Information related Product

Applicant	Samsung Electronics Co., Ltd.
Model name	SECFROA_2G
Applicant Address	416 Maetan 3-Dong, Yeongtong-Gu, Suwon-Si, Gyeonggi-Do, Korea, 443-742
Contact Person	Kyeong Dong, Kim
Kind of product	USB Flash Drive
Valiant list	SECFROA_1G, SECFROA_512, SECFROA_256, SECFROA_128, SECFROA_64, SECFROA_32
Manufacturer	Samsung Electronics Co., Ltd.
New / Alternative / Permissive change Information	New

1.2 Detail Information related Product

Specification

Item	Specification	Remark
USB Flash Drive	- Fully compatible with USB 2.0 High speed Specification, USB-IF certified - USB Specification V1.1 Mass Storage Compliance - USB Bulk Only Mass Storage Support - USB Class Definition for Bootability Support - Interface Speed : up to · High Speed : 480M bps · Full Speed : 12M bps - High Performance · Sequential Read/Write : 15MB/s (Max.) - Software Support : Password lock, Secure zoning - Auto Sleep Mode - USB Bus powered (4.75V - 5.25V) - Suspend <= 500uA	-

Operating Frequency

12MHz (Crystal clock)

1.3 Operating Mode and Condition

The EUT exercise program used during testing was designed to exercise the system in a manner similar to a typical use. This program was contained on the PC Hard Disk. Once loaded, the program sequentially reads and writes continuously on the EUT.

1.4 Test System Details

Refer to 1.2

1.5 Equipment Modifications

No equipment modifications were required.

1.6 Test Procedure

1.6.1 Conducted Emission

The EUT was placed on a platform nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting ground plane.

The rear of EUT, including peripherals was aligned and flush with rear of tabletop.

All other surfaces of tabletop was at least 80cm from any other grounded conducting surface.

I/O cables and AC cables that were connected to the peripherals were bundled in center.

They were folded back and forth forming a bindle 30cm to 40cm long and were handed at a 40cm height to the ground plane.

Each EUT current-carrying power lead, except the ground(safety)lead, were individually connected through a LISN to the input power source.

All unused 50 ohm connectors of the LISN were resistively terminated in 50 ohm when not connected to the measuring equipment.

Frequency Band [MHz]	Instrument	Detector	Resolution Bandwidth	Video Bandwidth
0.15 to 80	EMI Receiver	Quasi-Peak	9kHz	-
		Average	9kHz	-

1.6.2 Radiated Emission

EUT was placed on a platform of nominal size, 1m by 1.5m, raised 80cm above the conducting ground plane.

The rear of EUT, including peripherals was aligned and flush with rear of tabletop.

I/O cables that were connected to the peripherals were bundle in center.

They were folded back and forth forming a bundle 30cm to 40cm long and were hanged 40cm height to the ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane and the run table azimuth was varied to obtain the maximum signal strength

The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna were noted for each frequency found.

The spectrum was scanned from 30 to 1000 MHz using Biconi-Log antenna.

Also, the EMI RECEIVER was scanned from 1000 to 1800MHz using linearly polarization Double ridge horn antennas were used. The explanation of measuring instrument setup when Respective function is used in any frequency band is as following;

Frequency Band [MHz]	Instrument	Detector	Resolution Bandwidth	Video Bandwidth
30 to 1000	EMI Receiver	Quasi-Peak	120kHz	-
Above 1000	EMI Receiver	Peak	1MHz	1MHz

1.7 Test Configuration


Used EUT and Peripherals

Seq.	Device	Model Name	Serial #	Maker	Note
A	USB Flash Drive	SECFROA_2G	-	SEC	FCC ID : A3LSECFROA
B	Note PC	Q30	084	SEC	DoC
C	Digital Camcorder	DCR-PC115	1989823	Sony	DoC
D	Headset	Stereo LS1	-	Microsoft	Doc
E	USB Mouse	M-UR69	LNA2240016	Logitech	DoC
F	AC adaptor	AC-L10A	21179654	Sony	For Camcorder
G	AC adaptor	ADD-50HH REV.b	CN-0W6052-48661-4AK-00AM	Dell	For Note PC

Used Cable Description

	Connect Cable	Length [m]	Shielded [Y/N]	Remark
1	AC Power Cable	1.8	N	For Note PC
2	AC Power Cable	1.8	N	For Digit camcorder
3	Audio Cable	2.0	N	-
4	1394 Cable	1.6	Y	-
5	USB Cable	1.8	Y	-

Block Diagram

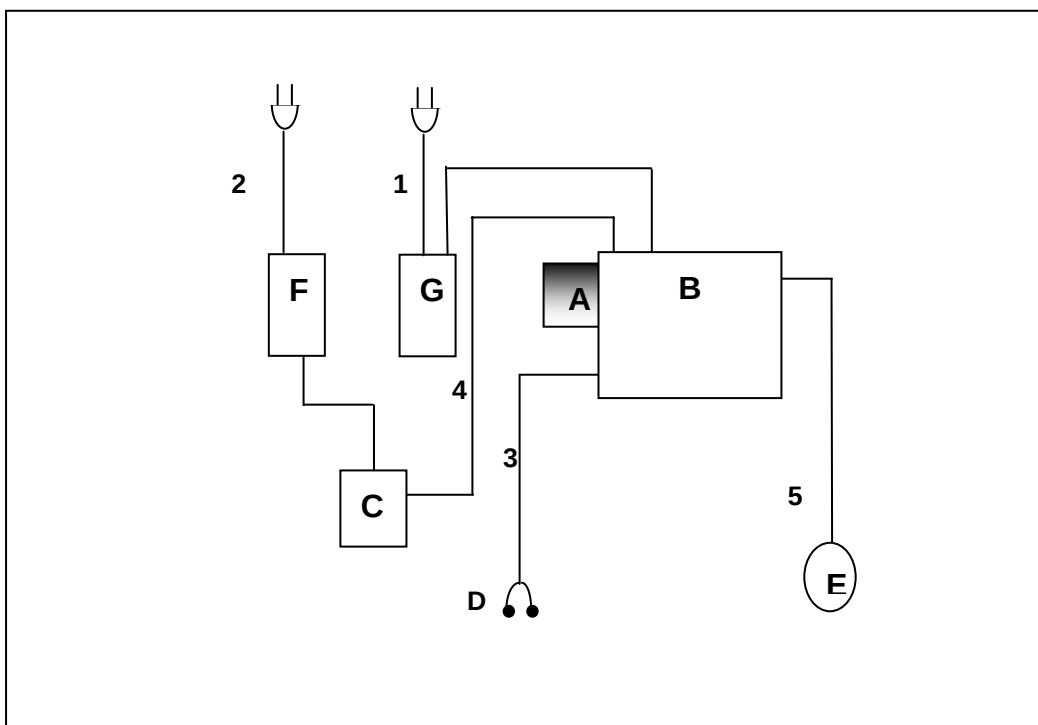

1.8 Applied Standards

List

Product or Generic Standards	Basic Standards
FCC Part15 B	ANSI C63.4 : 2003

1.9 Test Facility

General Information

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR 22, 16-1, 16-2.

This EMC Testing Lab. is accredited by Korea Laboratory Accreditation Scheme(KOLAS) which signed the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Agreement(MRA) for the above test item(s) and test method(s).

This Lab. is operated as testing laboratory in accordance with the requirements of ISO/IEC 17025:1998.

Accreditation and Listing



Uncertainty

(According to NAMAS Pub.NIS81)

Samsung IT EMC Test Lab.

Conducted Emission : $\pm 1.9\text{dB}$

Radiated Emission Bi-Log Antenna : $\pm 5.1\text{dB}$

2. Summary of Test Results

Result : PASS

The equipment under test(EUT) has been found to comply with the applied standards.

Section of the Product Standard		Applied Standard	Result
Electromagnetic Emission Test			
3.1	Conducted Emission	ANSI C63.4 : 2003	Complied
3.2	Radiated Emission	ANSI C63.4 : 2003	Complied

3.1 Conducted Emission

Test Information	
Test Engineer	Kyeong Dong, Kim
Test Date	April 29, 2005
Climate Condition	Ambient Temperature : 24.5 °C Relative Humidity : 50%
	Atmospheric Pressure 1004mbar
Test Place	Shielded Room #2

Test Equipments

Equipment	Model Name	Manufacturer	Serial No.	Calibration	
				Next Date	Interval
EMI TEST RECEIVER	ESCS30	R&S	830986/004	2006-02-17	12
LISN	ESH3-Z5	R&S	100263	2005-05-25	12
LISN	ESH3-Z5	R&S	831887/004	2005-08-31	12

Measurement Results	Passed The Measured emissions of the EUT have found to be below the specified limits.
----------------------------	---

Test Data & Graph

The Initial step in collecting conducted data was to perform a peak and average scan over the measurement range using a receiver

The find data represents worst-case emissions.

* QP : Quasi-peak, AV: Average

* Result = Meter Reading(QP or AV) + Total Loss(LISN Insertion loss + Cable loss)

* Margin = Limit – Result

1. TEST DATA & GRAPH

1. Quasi Peak

MEASUREMENT RESULT: "SECFROA_2G_fin QP"


Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.150000	48.50	0.6	66	17.5	L1	GND
0.275000	41.30	0.5	61	19.7	L1	GND
0.480000	33.30	0.6	56	22.7	N	GND
0.550000	32.00	0.6	56	24.0	N	GND
21.940000	20.80	1.8	60	39.2	N	GND
22.065000	20.90	1.8	60	39.1	L1	GND
22.275000	21.20	1.8	60	38.8	L1	GND
22.430000	24.60	1.8	60	35.4	N	GND
22.705000	23.30	1.7	60	36.7	N	GND
22.845000	26.50	1.7	60	33.5	N	GND

2. Average

MEASUREMENT RESULT: "SECFROA_2G_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
13.765000	16.90	1.5	50	33.1	L1	GND
20.790000	16.00	1.8	50	34.0	N	GND
20.995000	14.50	1.8	50	35.5	N	GND
21.405000	15.00	1.8	50	35.0	L1	GND
21.410000	15.00	1.8	50	35.0	N	GND
21.615000	13.90	1.8	50	36.1	N	GND
22.030000	14.50	1.8	50	35.5	N	GND
22.370000	16.00	1.8	50	34.0	L1	GND
22.650000	14.90	1.7	50	35.1	N	GND

- Graph -

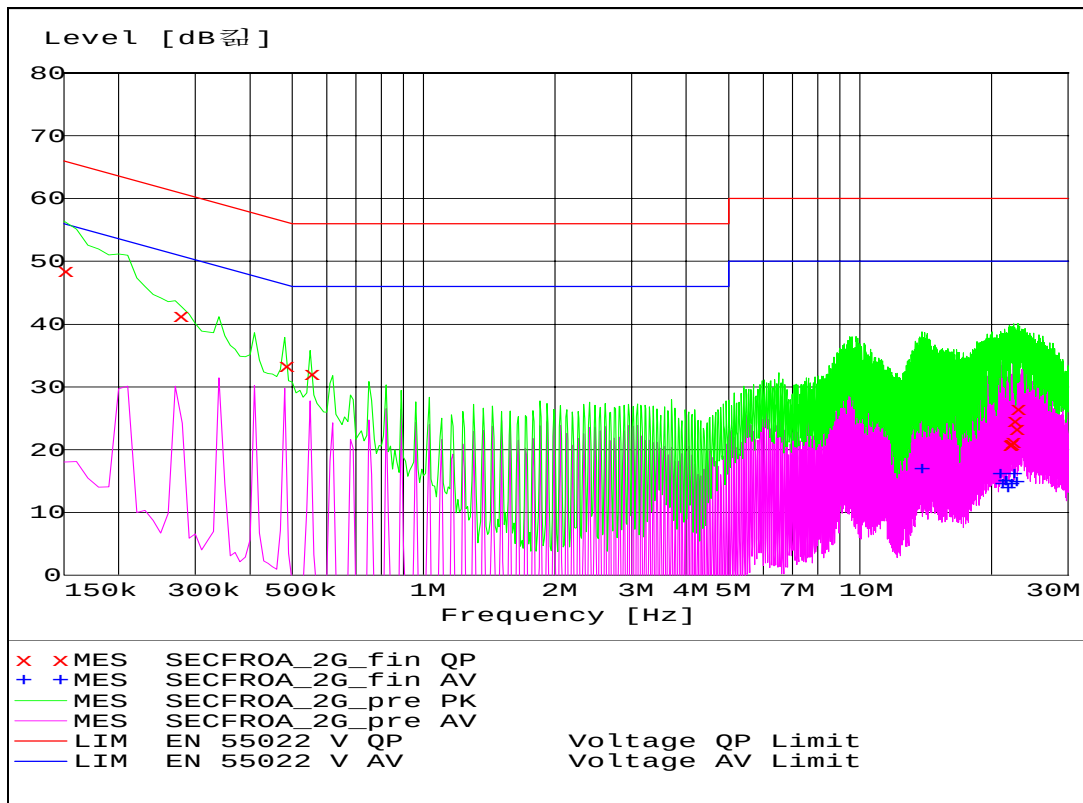

3.2 Radiated Emission

Test Information	
Test Engineer	Kyeong Dong, Kim
Test Date	April 28, 2005
Climate Condition	Ambient Temperature : 20℃ Relative Humidity : 52%
	Atmospheric Pressure 1008mbar
Test Place	10m Semi Anechoic Chamber

Test Equipments

Equipment	Model Name	Manufacturer	Serial No.	Calibration	
				Next Date	Interval
Test Receiver	ESIB-26	R&S	100147	2005-10-04	12
Turn Table	DT430	HD	430/691/01	N/A	N/A
Antenna Mast	MA240	HD	240/678 BJ:01	N/A	N/A
Controller	HD100	HD	100/723	N/A	N/A
Preamplifier	CPA9232	Schaffner	1053	2005-08-14	12
BILOG Antenna	CBL6112B	Schaffner	2804	2005-11-09	12

Measurement Results	Passed The measured emissions of the EUT have found to be below the specified limits.
----------------------------	---


Test Data & Graph

The initial step in collecting radiated data was to perform a peak scan over the measurement range using a receiver. All modes of operation were investigated and the worst-case emissions are reported. The minimum margin to the limit is as follows:

All other emissions are non-significant.

- * Receiving Antenna Mode : Horizontal, Vertical
- * Test distance : 10m (Semi-Anechoic Chamber)
- * Result = Meter Reading + Total Loss(Antenna factor + Cable loss - Amp. Gain)
- * CF = Antenna Factor + Cable Loss - Amp. Gain
- * Margin = Limit – Result

Samsung Electronics Co., Ltd
IT Center

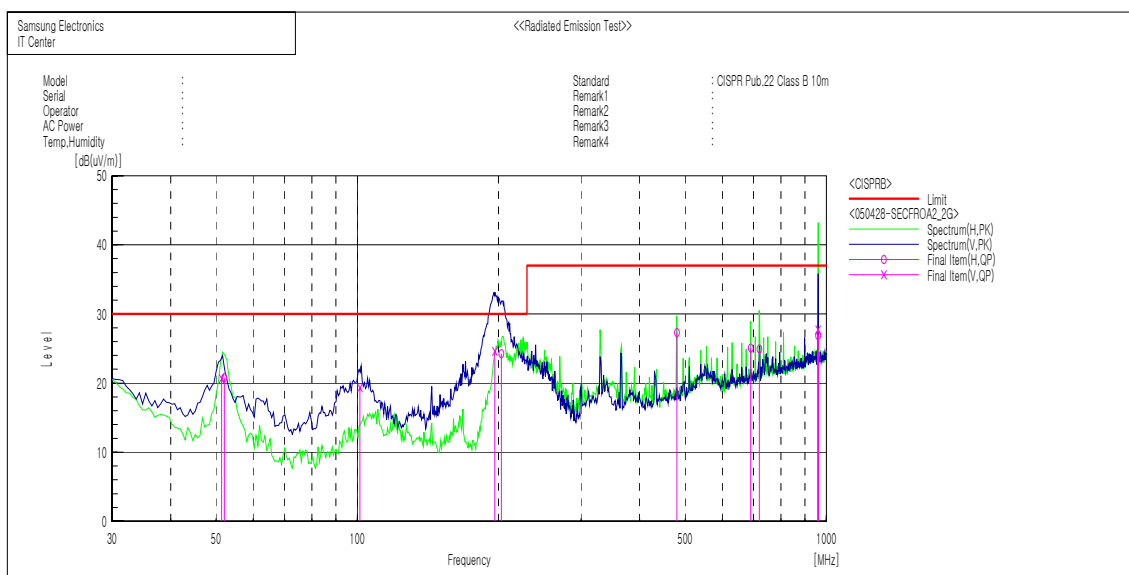

Final Result

No.	Frequency [MHz]	(P)	S.C	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	51.386	V	S	33.3	-12.6	20.7	30.0	9.3	101.0	220.0	
2	52.036	H	S	33.6	-12.8	20.8	30.0	9.2	391.0	294.0	
3	101.306	V	S	28.5	-9.2	19.3	30.0	10.7	116.0	5.0	
4	196.396	V	S	34.8	-10.2	24.6	30.0	5.4	126.0	181.0	
5	202.830	H	S	34.4	-10.1	24.3	30.0	5.7	388.0	152.0	
6	479.945	H	S	28.0	-0.7	27.3	37.0	9.7	256.0	8.0	
7	690.001	H	S	21.8	3.3	25.1	37.0	11.9	127.0	256.0	
8	720.091	H	S	20.9	4.0	24.9	37.0	12.1	385.0	266.0	
9	960.041	V	S	20.3	7.4	27.7	37.0	9.3	276.0	7.0	
10	960.083	H	S	19.5	7.4	26.9	37.0	10.1	112.0	270.0	

4. Appendix


4.1 Test Photography




Picture 1. Conducted Emission (Front)



Picture 2. Conducted Emission (Rear)

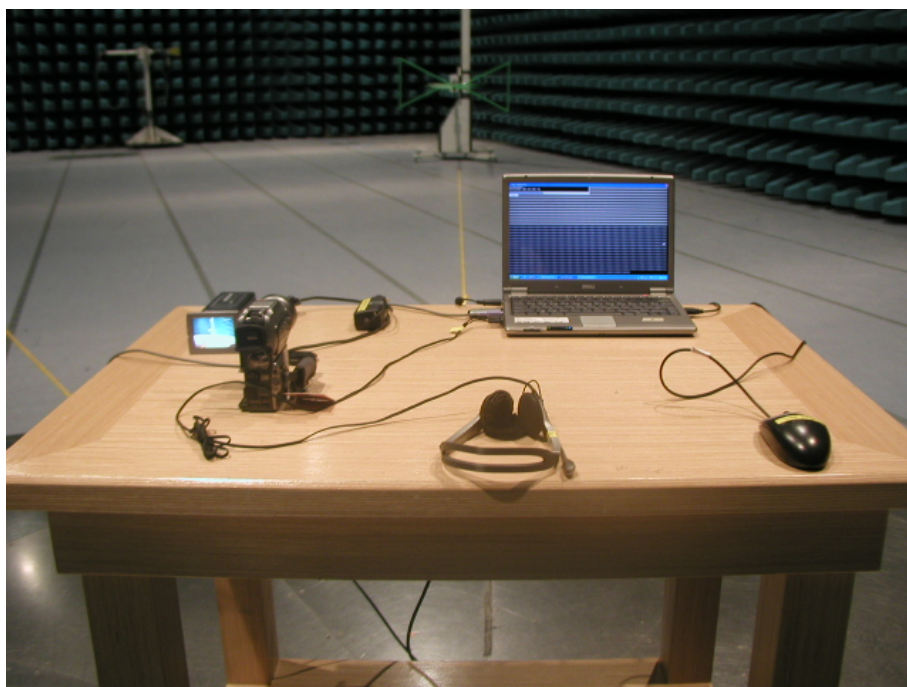

Picture 3. Radiated Emission (Front)

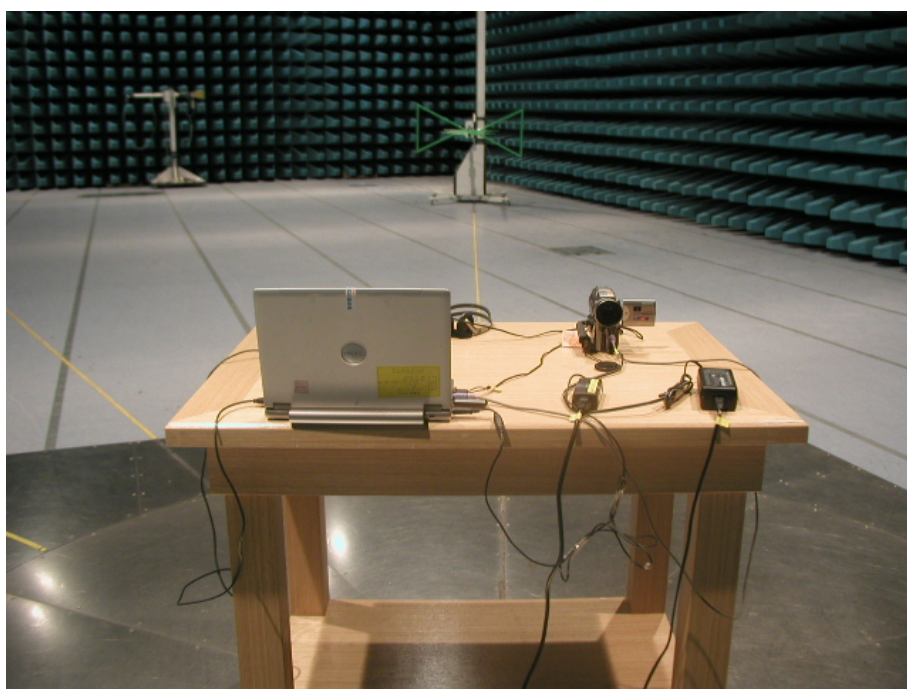

Picture 4. Radiated Emission (Rear)


4.2 EUT Photography



Picture 5. EUT (Front)




Picture 6. EUT (Rear)

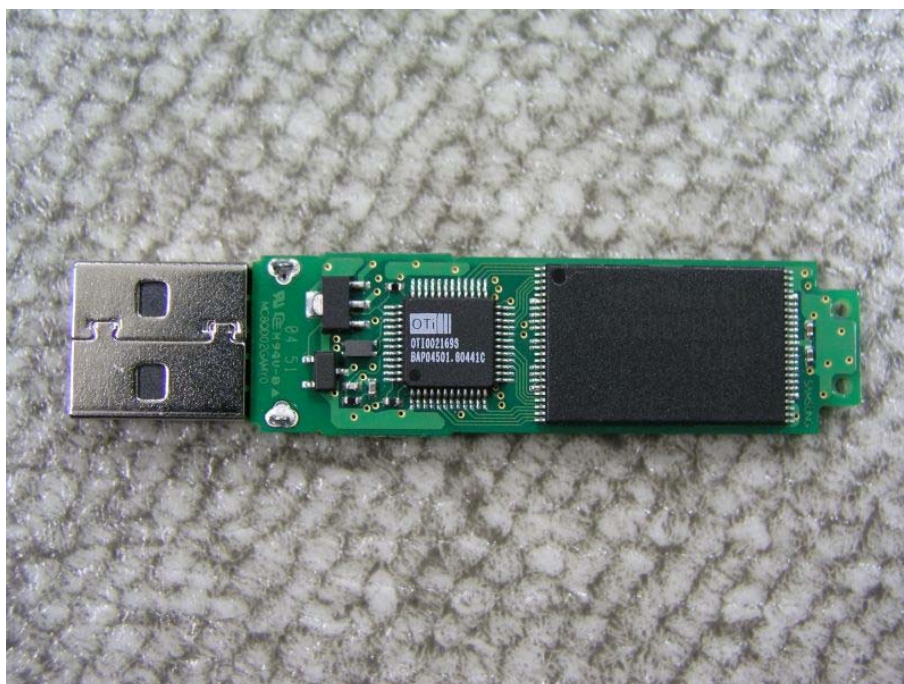

Picture 7. EUT (Internal Front)



Picture 8. EUT (Internal Rear)

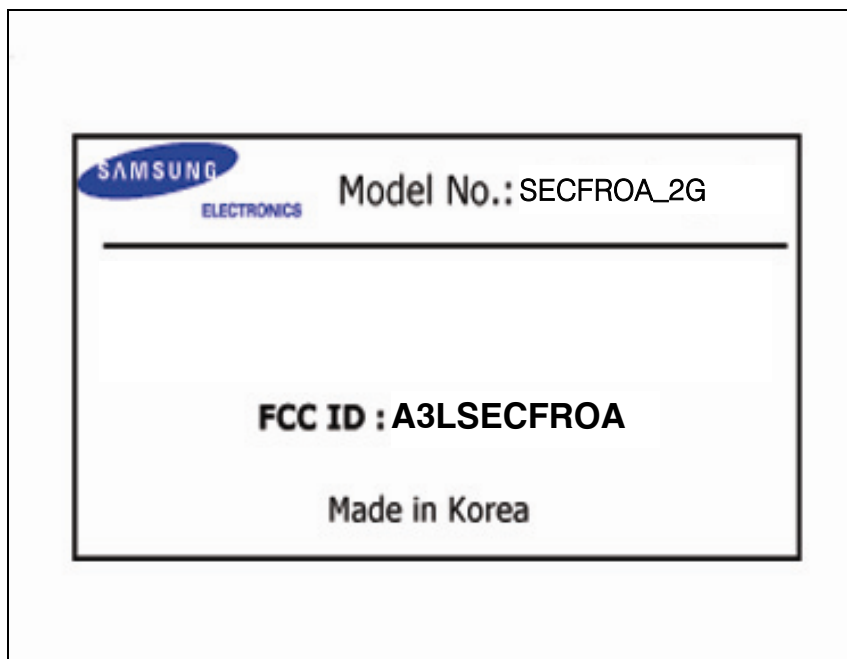

Picture 9. EUT (Label)