


	1	2	3	4	5	6	7	8
A			Rev. No					
B								
C								
D								
E								
F								
G	Technical Description 1. Use 'FILM' provided by 'SAMSUNG' for letter and contents 2. Background color is 'WHITE', letter color is 'BLACK' (reverse for SAMSUNG LOGO) 3. Put 'release paper' on the back side after the adhesive. 4. No blur and spread for letter 5. Proceed with manufacturing process after the approval of R&D Group 6. The spec. of product must be based on approved limit samples. 7. Stock on as a ROLL 8. Follow drawing instruction above for CE or WEEE mark 9. Unify material and color as one color (blue) for glassine paper							
H								
I								
J								
K								
L								

The main drawing shows a rectangular label with the following dimensions and features:

- Overall width: $30.0^{+0.0}_{-0.1}$ mm
- Overall height: $40.0^{+0.0}_{-0.1}$ mm
- Top section height: 28.0 mm
- Bottom section height: $12.0^{+0.0}_{-0.1}$ mm
- Right section width: $18.0^{+0.0}_{-0.1}$ mm
- Left section width: $12.0^{+0.0}_{-0.1}$ mm
- Right side radius: $5-R1.0$
- Right side height: $25.0^{+0.0}_{-0.1}$ mm
- Bottom right corner height: $8.0^{+0.0}_{-0.1}$ mm
- Left side hole diameter: $\phi 6$
- Text on label: MODEL: SGH-A667, FCC ID: A3LSGHA667, RATED: 3.7 V ---, 800 mA, FOR INFORMATION CALL : 1 888 987 4357, **CE0168**, SAMSUNG

The side view shows a roll of material with a width of 3.0 mm and a thickness of 2.0 mm. The word "ROLLING" is written below the side view.

MAT.	White polypropylene 80 μ		FIN.	Semitransparency OPP Lamination + UVP Coating	
TITLE	SGH-A667 LABEL (R) - MAIN - AT&T				
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION
TOLERANCE	$+0.0$ -0.1	jukyun Kim	kyeonghwan jo	junesop kim	
SCALE	N/S				
Manufacture	HANSUNG P&I	10-07-06	10-07-06	10-07-06	SHEET NO 1/1
SAMSUNG ELECTRONICS		Doc. CODE	GH68-00000A		

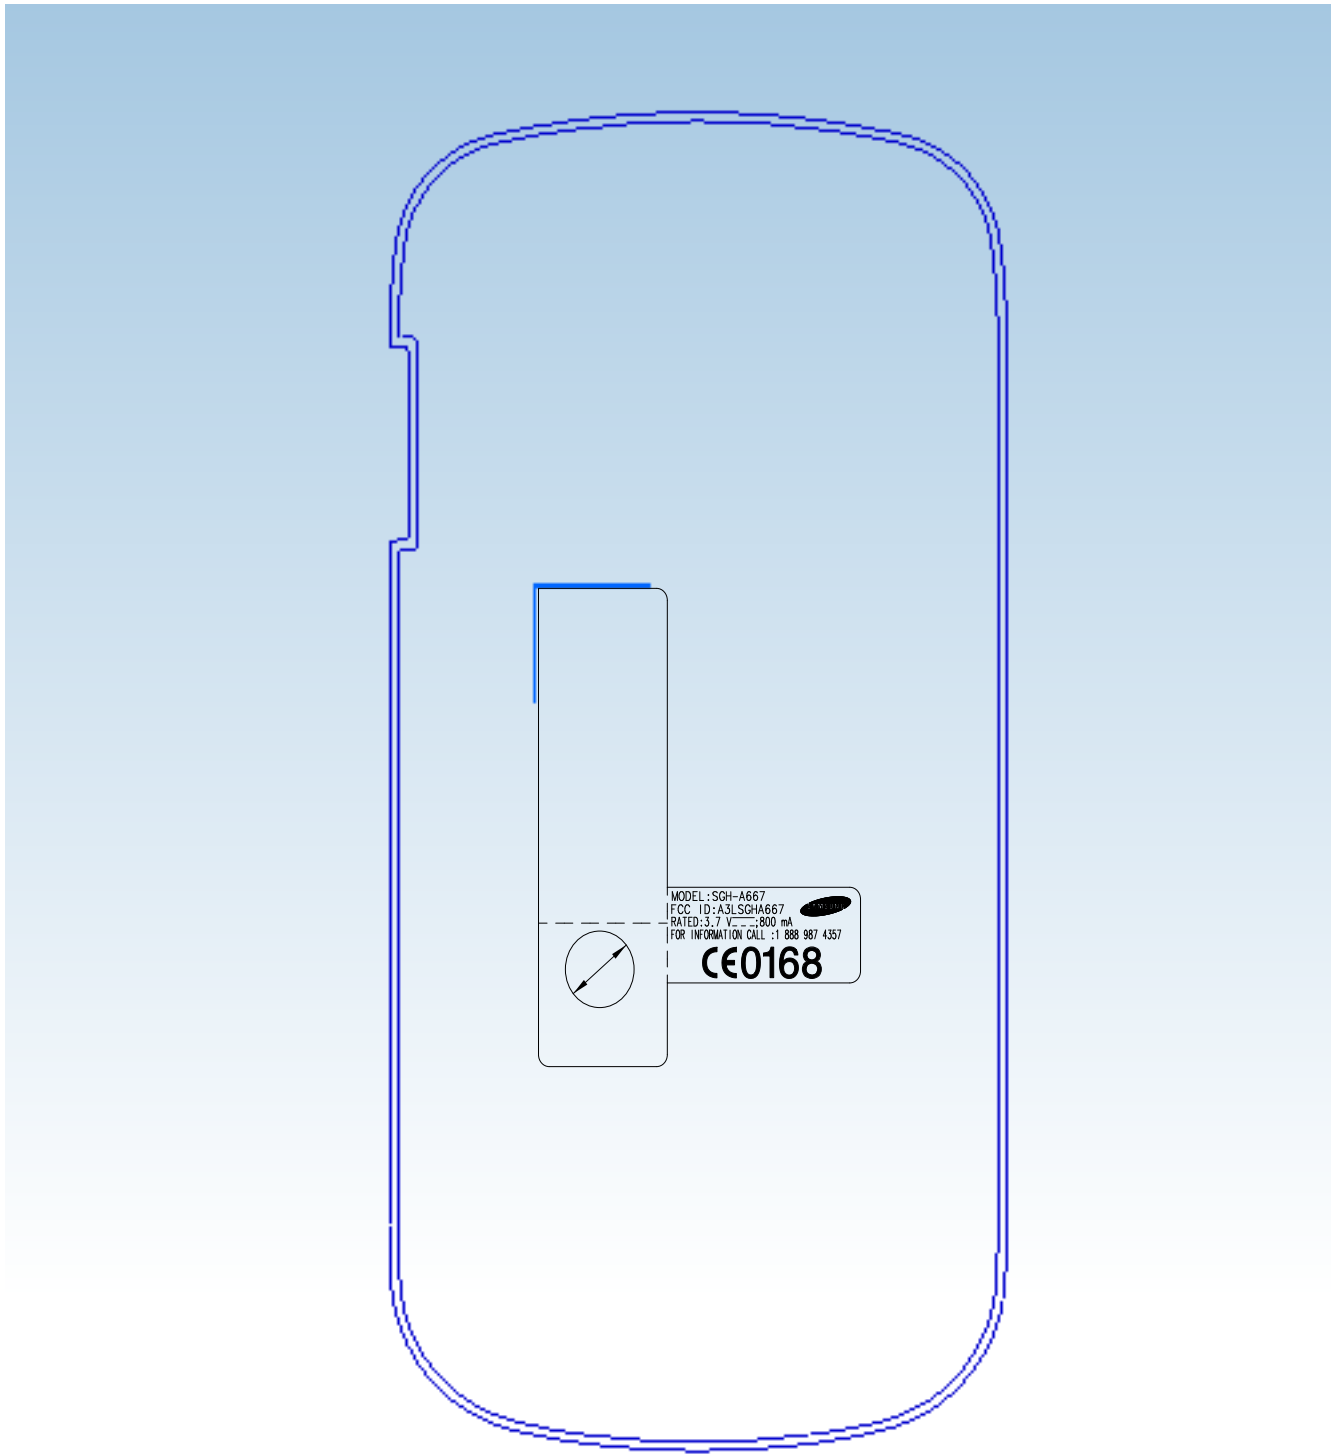

The label is placed inside the battery compartment

The FCC ID Label shown will be readily visible at the time of purchase.