

CETECOM Inc.



CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

www.cetecom.com

Issued test report consists of 64 Pages

Page 1 (64)

FCC LISTED, REG. NO.: 101450 & RECOGNIZED BY INDUSTRY CANADA IC – 3925

Test report no.: EMC_386_FCC24_2002_E400
FCC Part 24 / RSS 133
(SGH-E400)
FCC ID: A3LSGH-E400

Table of Contents

1	General information
1.1	Notes
1.2	Testing laboratory
1.3	Details of applicant
1.4	Application details
1.5	Test item
1.6	Test standards
2	Technical test
2.1	Summary of test results
2.2	Test report
1	General information
1.1	Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc.

TEST REPORT PREPARED BY:**EMC Engineer: Harpreet Sidhu****1.2 Testing laboratory****CETECOM Inc.**

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetekomusa.comInternet: www.cetekom.com

1.3 Details of applicant

Name : Samsung Electronics Co., Ltd.
Street : #94-1, Imsoo-Dong, Gumi-City
City / Zip Code : Kyung-Buk, 730-350
Country : Korea
Contact : David Kim
Telephone : +82 54 479 5933
Tele-fax : +82 54 479 5921
e-mail : dave_kim@samsung.com

1.4 Application details

Date of receipt of application : 10/28/02
Date of receipt test item : 10/28/02
Date of test : 10/28/02-11/01/02, 11/4/02

1.5 Test item

Manufacturer : Samsung Electronics
Model No. : SGH-E400
Description : **GSM 900/1800/1900 Triple band Mobile Phone**
HW & SW : H/W Rev: 0.41/ S/W Rev: E1.0
FCC-ID : A3LSGH-E400

Additional information

Frequency : GSM900/DCS1800/PCS1900
1850.2MHz-1909.8MHz for PCS 1900
Type of modulation : GMSK
Number of channels : GSM : 124 / DCS : 374 / PCS : 299
Antenna : Fixed
Power supply : Li-Ion Battery
Output power : GSM : 2W / DCS : 1W / PCS : 1W
Extreme vol. Limits : 3.5-4.2Vdc
Extreme temp. Tolerance : -30-50°C

1.6 Test standards

FCC Part 24 / RSS133 r1

2 Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (only “passed” if all single measurements are “passed”)	Passed

Technical responsibility for area of testing:

2003-07-30 EMC & Radio **Seigfried Lehmann**
(Technical Manager)



Date	Section	Name	Signature
------	---------	------	-----------

Responsible for test report and project leader:

2002-07-30 EMC & Radio **Harpreet Sidhu**
(EMC Engineer)



Date	Section	Name	Signature
------	---------	------	-----------

2.2 Test report

TEST REPORT

Test report no.: EMC_386_FCC24_2002_E400
(SGH-E400)

TEST REPORT REFERENCE

PARAMETER TO BE MEASURED	PARAGRAPH	PAGE
POWER OUTPUT	SUBCLAUSE § 24.232	7
FREQUENCY STABILITY	SUBCLAUSE § 24.235	12
OCCUPIED BANDWIDTH	SUBCLAUSE § 2.989	14
EMISSIONS LIMITS	SUBCLAUSE § 24.238	21
RECEIVER RADIATED EMISSIONS	SUBCLAUSE § 15.209	51
CONDUCTED SPURIOUS EMISSIONS	SUBCLAUSE § 24.238	55
CONDUCTED EMISSIONS	SUBCLAUSE § 15.107/207	60
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		62
BLOCK DIAGRAMS		63

POWER OUTPUT**SUBCLAUSE § 24.232****Summary:**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMD-55) to ensure max. power transmission and proper modulation.

This paragraph contains both average, peak output powers and EIRP measurements for the EUT.

In all cases, the peak output power is within the specified limits.

Method of Measurements:

The EUT was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer ESIB 40 (peak) and NRVD power meter (average)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Power Measurements:**Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power during burst (dBm)
1850.2	0	29.31	26.3
1880.0	0	29.31	26.8
1909.8	0	29.07	26.4
Measurement uncertainty		±0.5 dB	

ANALYZER SETTINGS: RBW = 3MHz VBW = 3MHz

EIRP Measurements

Description: This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $P_{in} + 2.1 - P_r$.
3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (P_{in}).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1 \text{ dBi}$.

Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

Power Measurements:

Plots are shown on next pages

Radiated:


Frequency (MHz)	Power Step	BURST AVERAGE (dBm)	
		EIRP	ERP
1850.2	0	25.59	23.49
1880.0	0	24.64	22.54
1909.8	0	24.41	22.31
Measurement uncertainty		$\pm 0.5 \text{ dB}$	

ANALYZER SETTINGS: RBW = VBW = 3MHz

EIRP CHANNEL 512

SWEEP TABLE: "EIRP 1900 CH512"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1.8452 GHz	1.8552 GHz	Max Peak	Coupled	3 MHz

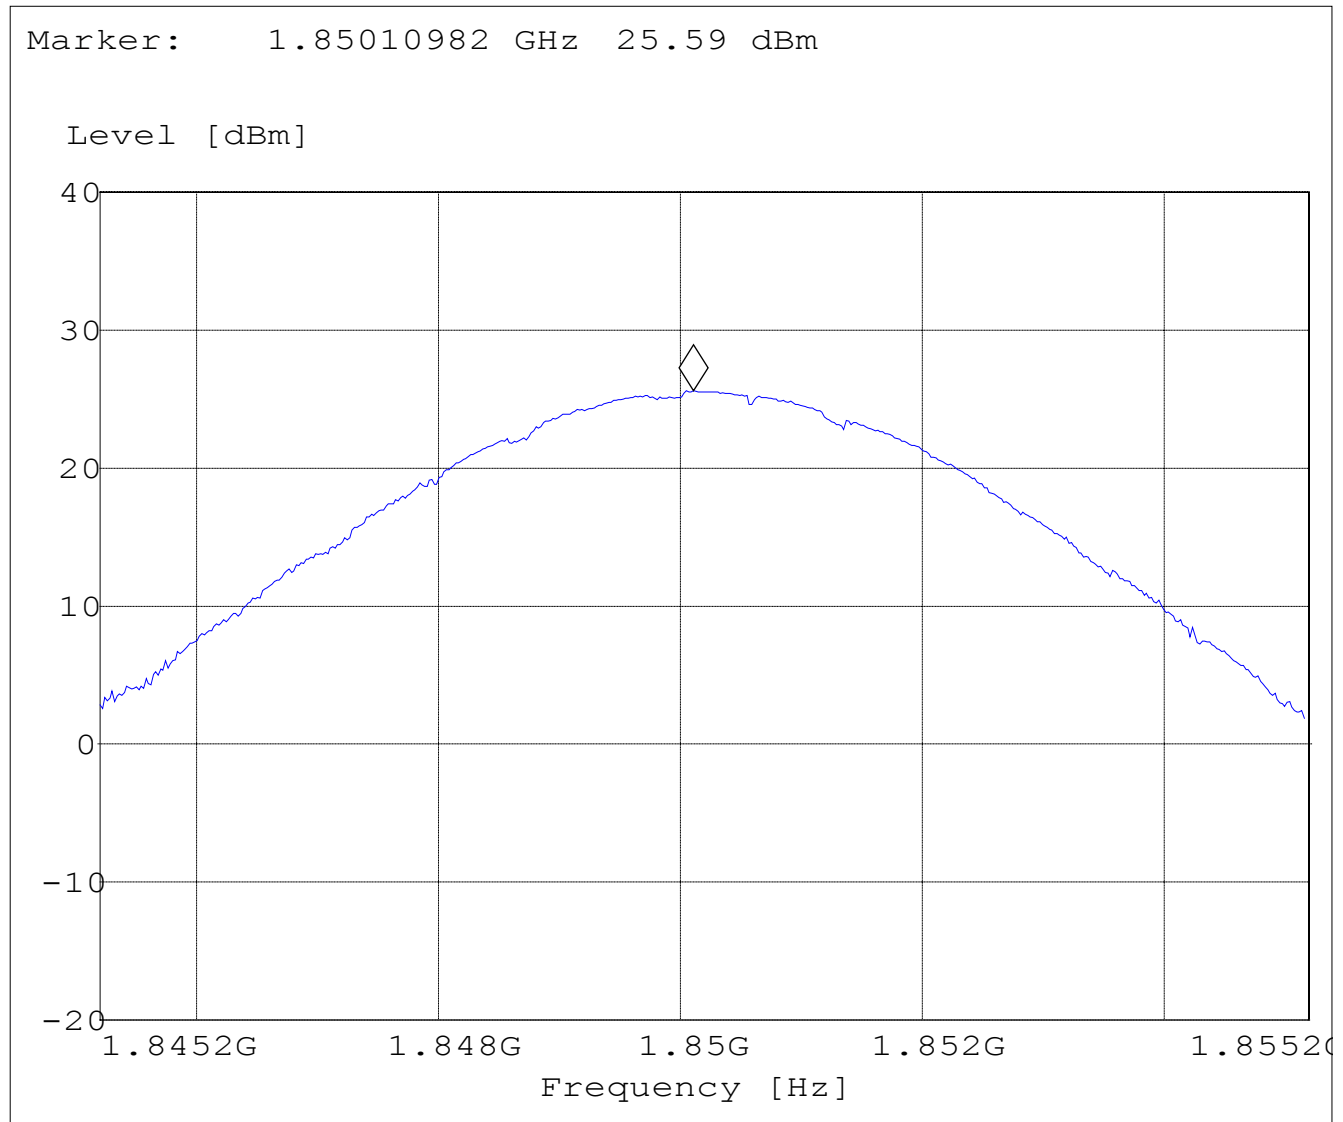


EIRP CHANNEL 661:

SWEEP TABLE: "EIRP 1900 CH661"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1.875 GHz	1.885 GHz	Max Peak	Coupled	3 MHz

Marker: 1.880170341 GHz 24.64 dBm


Level [dBm]

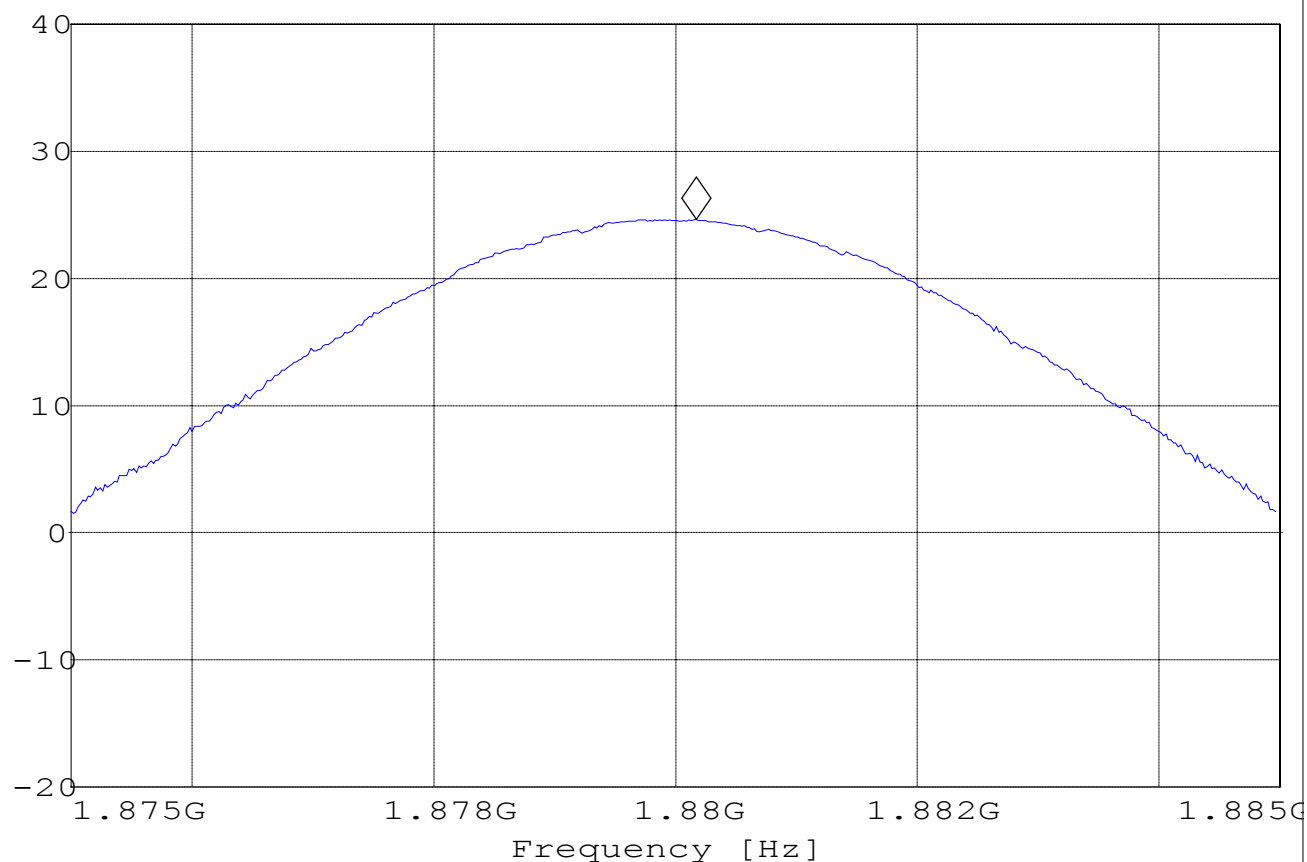

EIRP CHANNEL 810:

SWEEP TABLE: "EIRP 1900 CH810"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW/VBW
1.9048 GHz	1.9148 GHz	Max Peak	Coupled	3 MHz

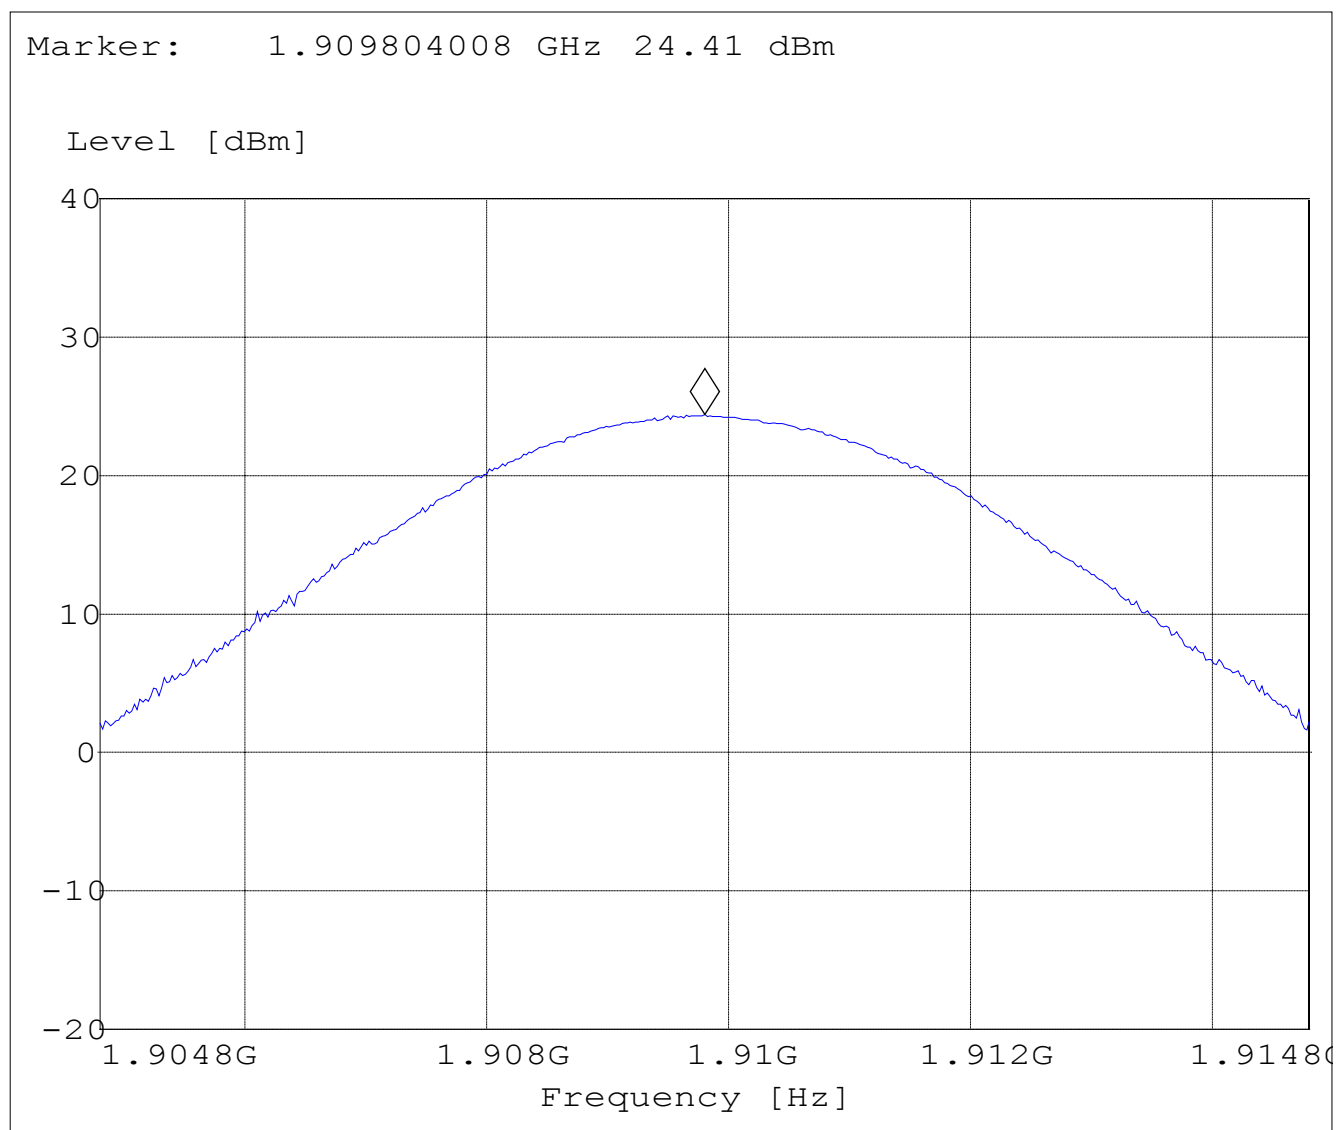

FREQUENCY STABILITY**SUBCLAUSE § 24.235****Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of a R&S CMD 55 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30 C.
3. With the EUT, powered via nominal voltage, connected to the CMD 55 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +50 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50 C.
7. With the EUT, powered via nominal voltage, connected to the CMD 55 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the EUT, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +50 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:**For Hand carried battery powered equipment:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4 VDC and 4.2 VDC, with a nominal voltage of 3.75 VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -9.3 % and +12.0 %. For the purposes of measuring frequency stability these voltage limits are to be used.

For equipment powered by primary supply voltage:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires to vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5 volt	-20	-0.0106
3.6 volt	-24	-0.0128
3.7 volt	-30	-0.0160
3.8 volt	-24	-0.0128
3.9 volt	-21	-0.0112
4.0 volt	-22	-0.0117
4.1 volt	-20	-0.0106
4.2 volt	-20	-0.0106

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	-45	-0.0239
-20	-52	-0.0277
-10	-40	-0.0213
0	-30	-0.0160
+10	-30	-0.0160
+20	-30	-0.0160
+30	-40	-0.0213
+40	-20	-0.0106
+50	-10	-0.0053

OCCUPIED BANDWIDTH**§2.989****Occupied Bandwidth Results**


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	280.56KHz	316.63KHz
1880.0 MHz	280.56KHz	322.65KHz
1909.2 MHz	280.56KHz	316.63KHz


Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For 280.56 kHz, this equates to a resolution bandwidth of at least 2.8 kHz. For this testing, a resolution bandwidth 3 kHz was used.

Channel 512

99% Occupied Bandwidth

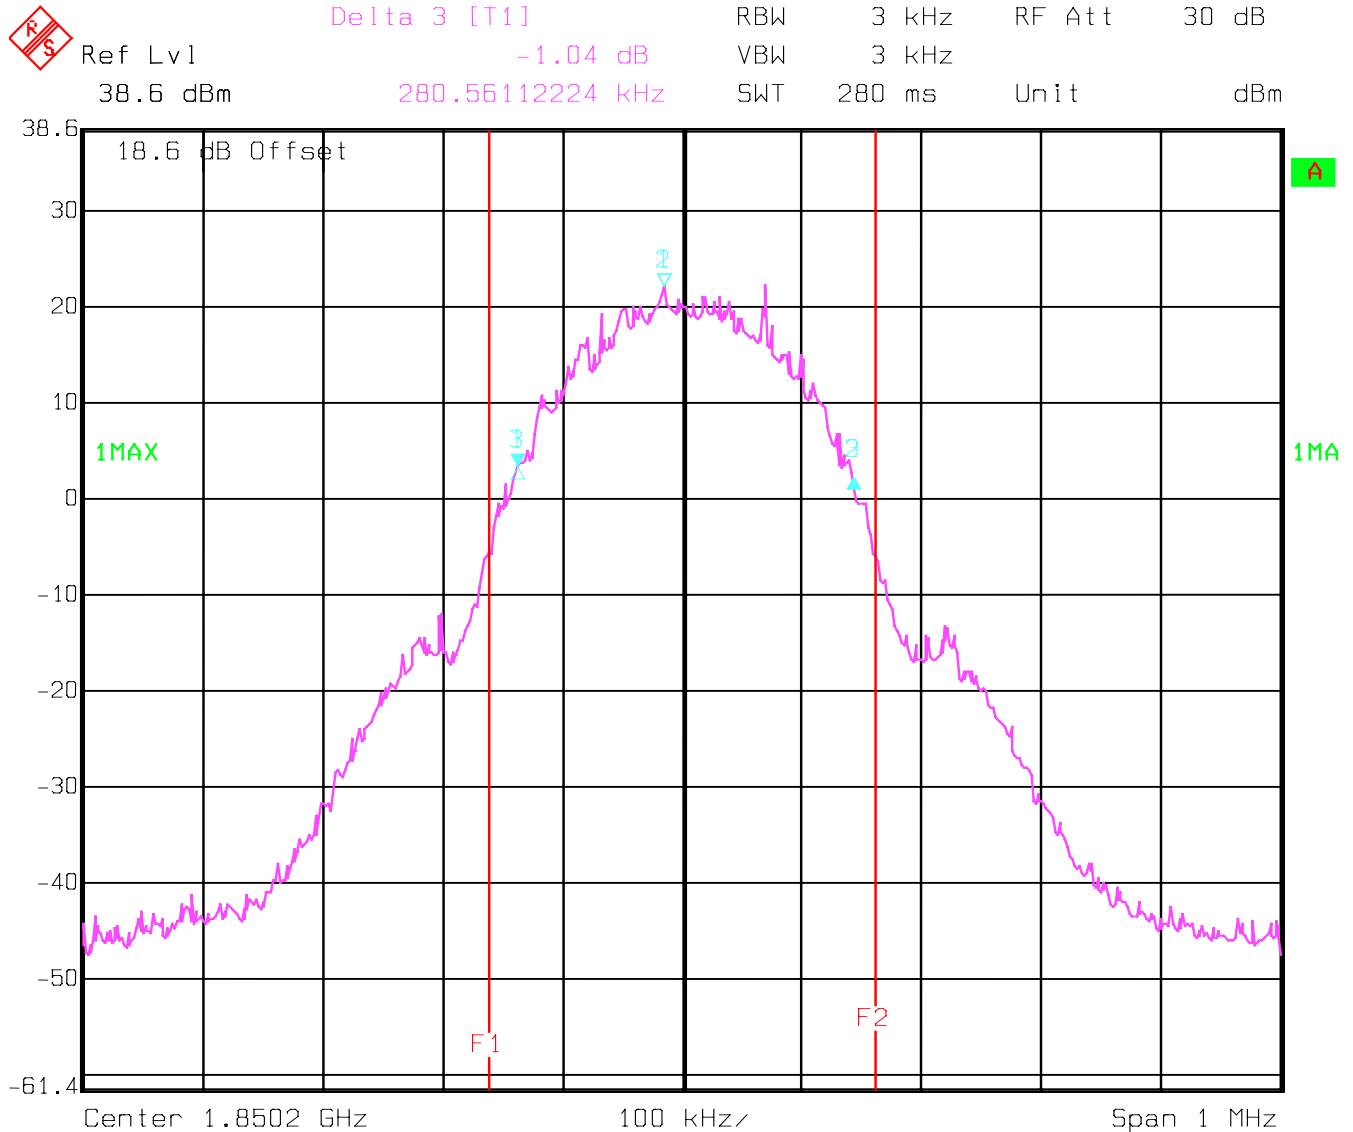


Date: 29.OCT.2002 08:25:21

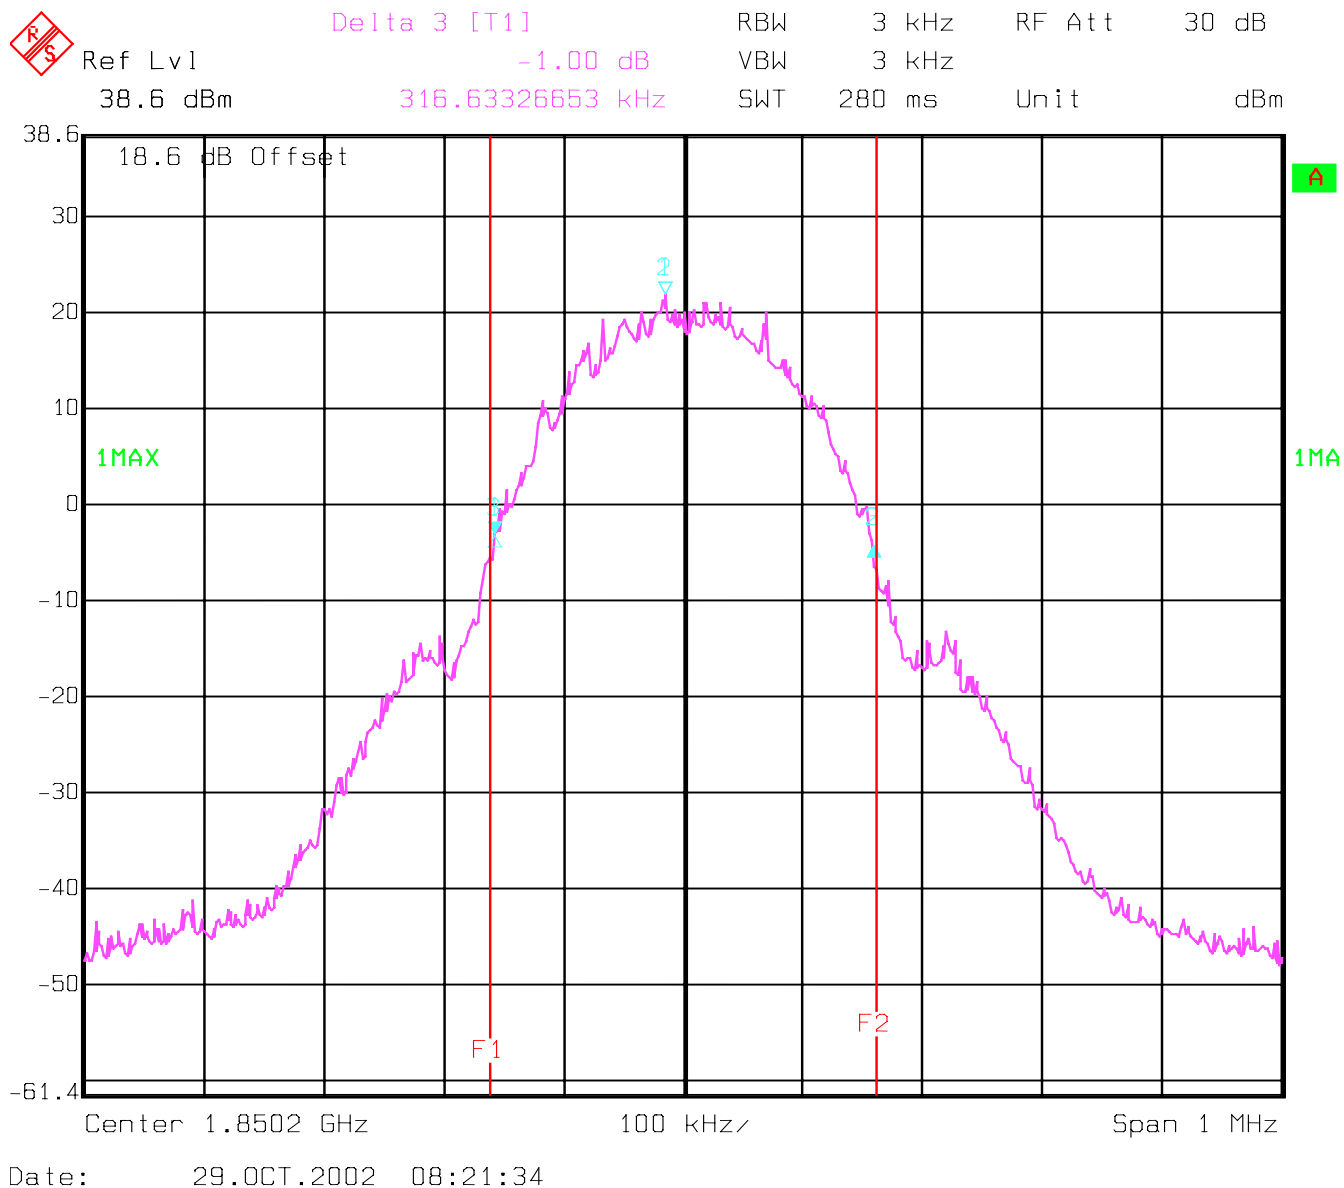Channel 512
-26 dBc Bandwidth


Channel 661

99% Occupied Bandwidth

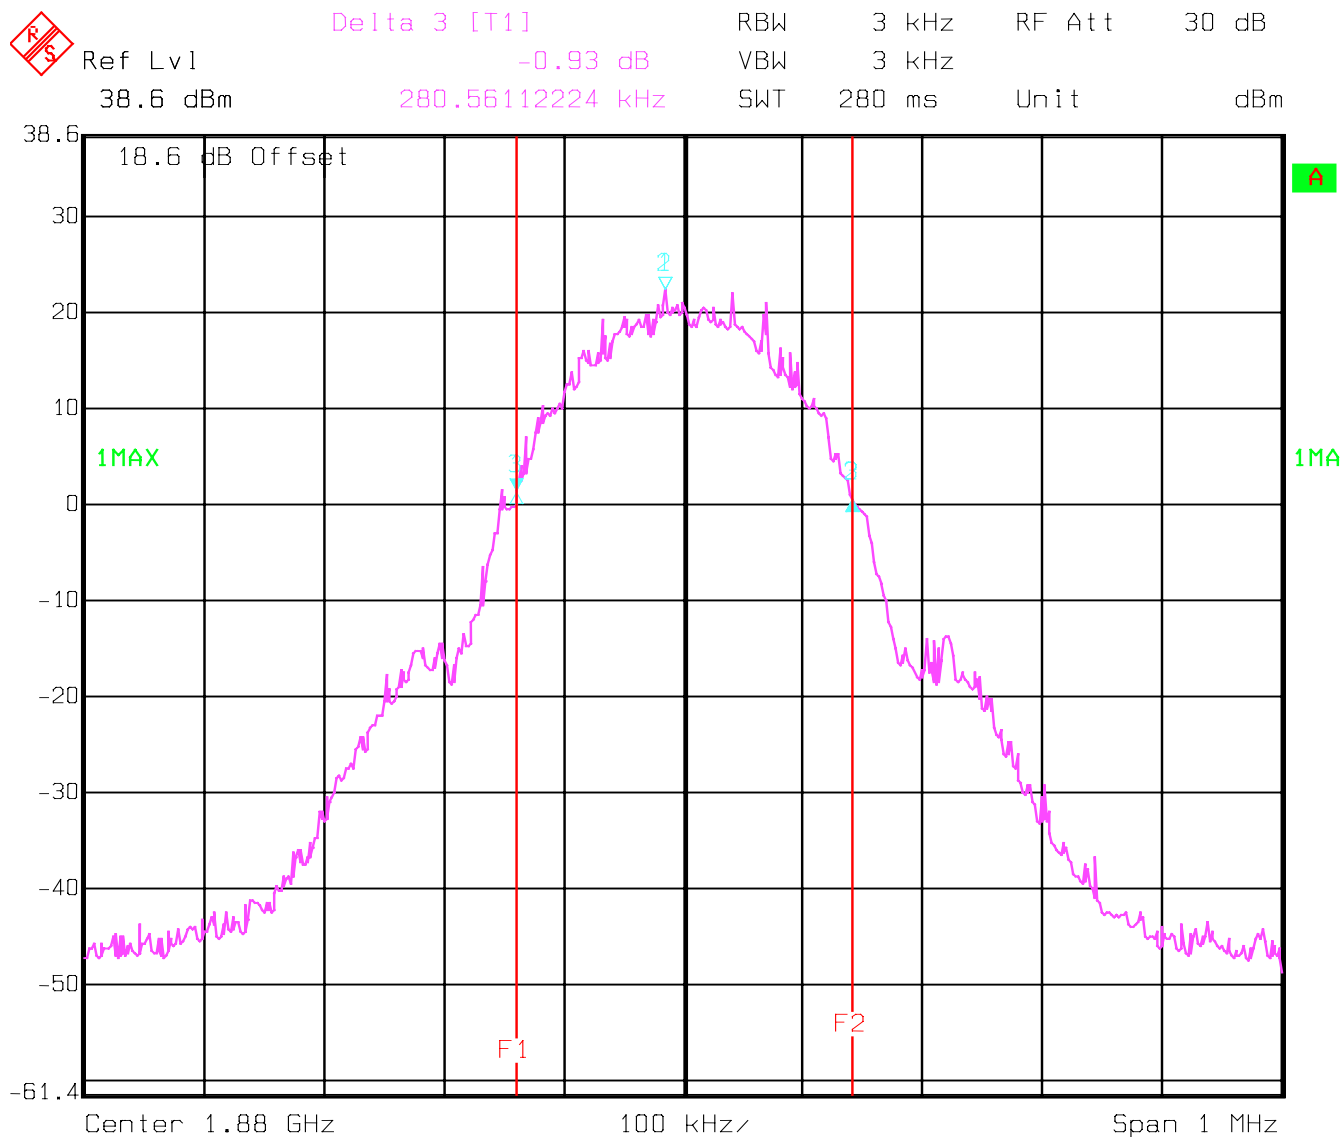

Date: 29.OCT.2002 08:29:14


Channel 661 -26 dBc Bandwidth

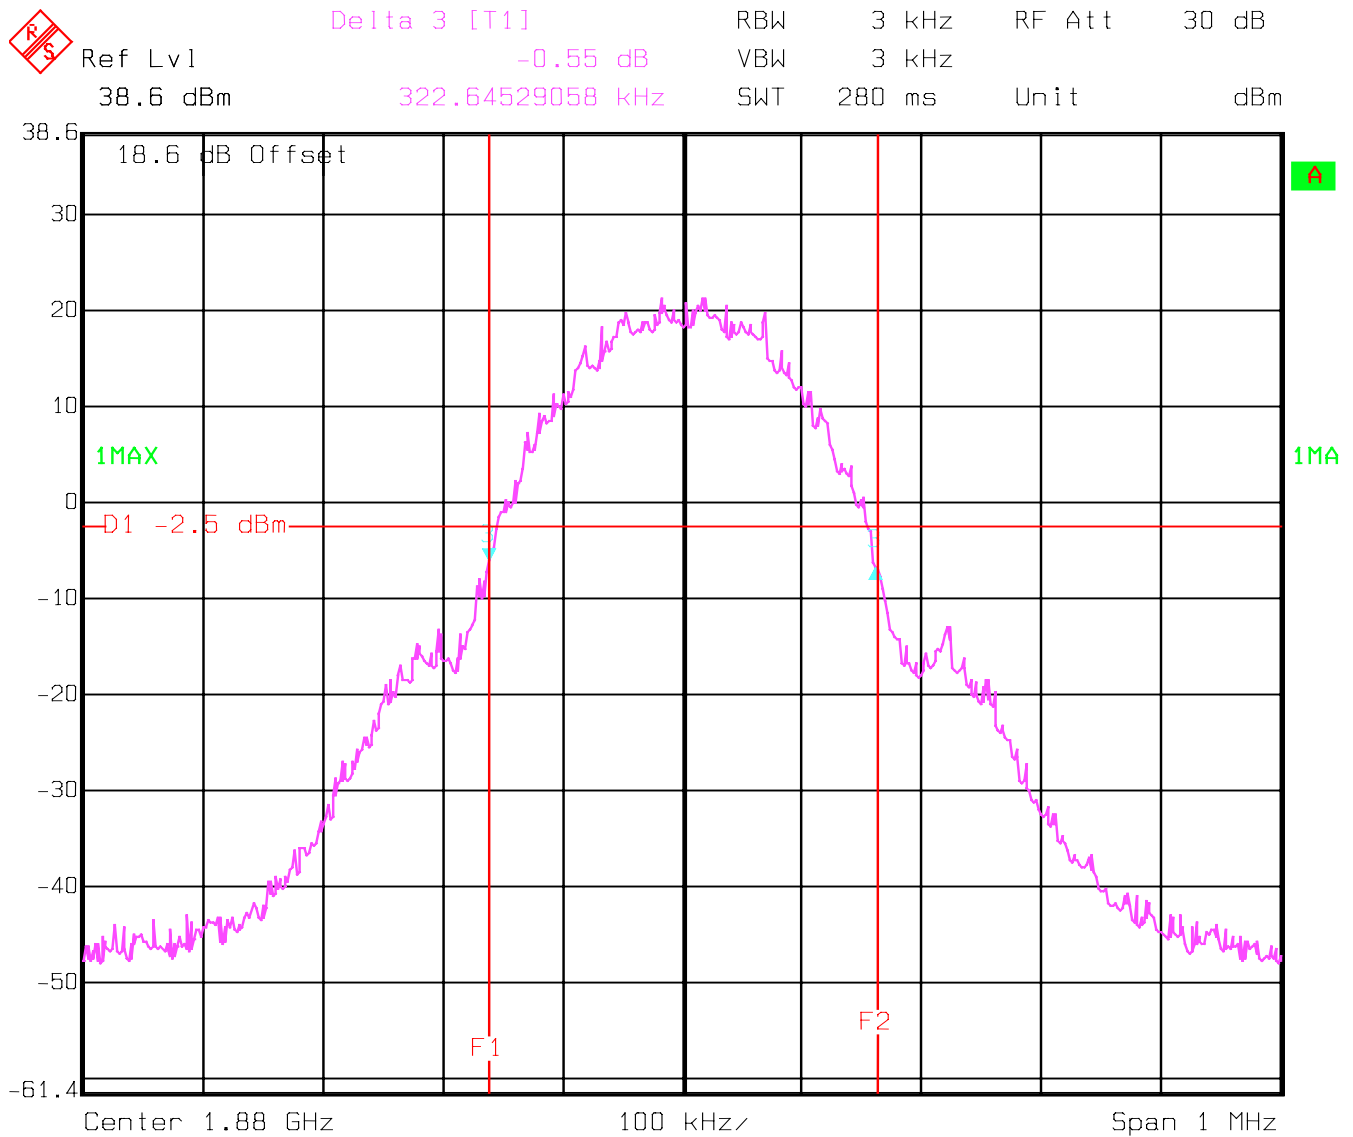

Date: 29.OCT.2002 08:17:11


Channel 810

99% Occupied Bandwidth

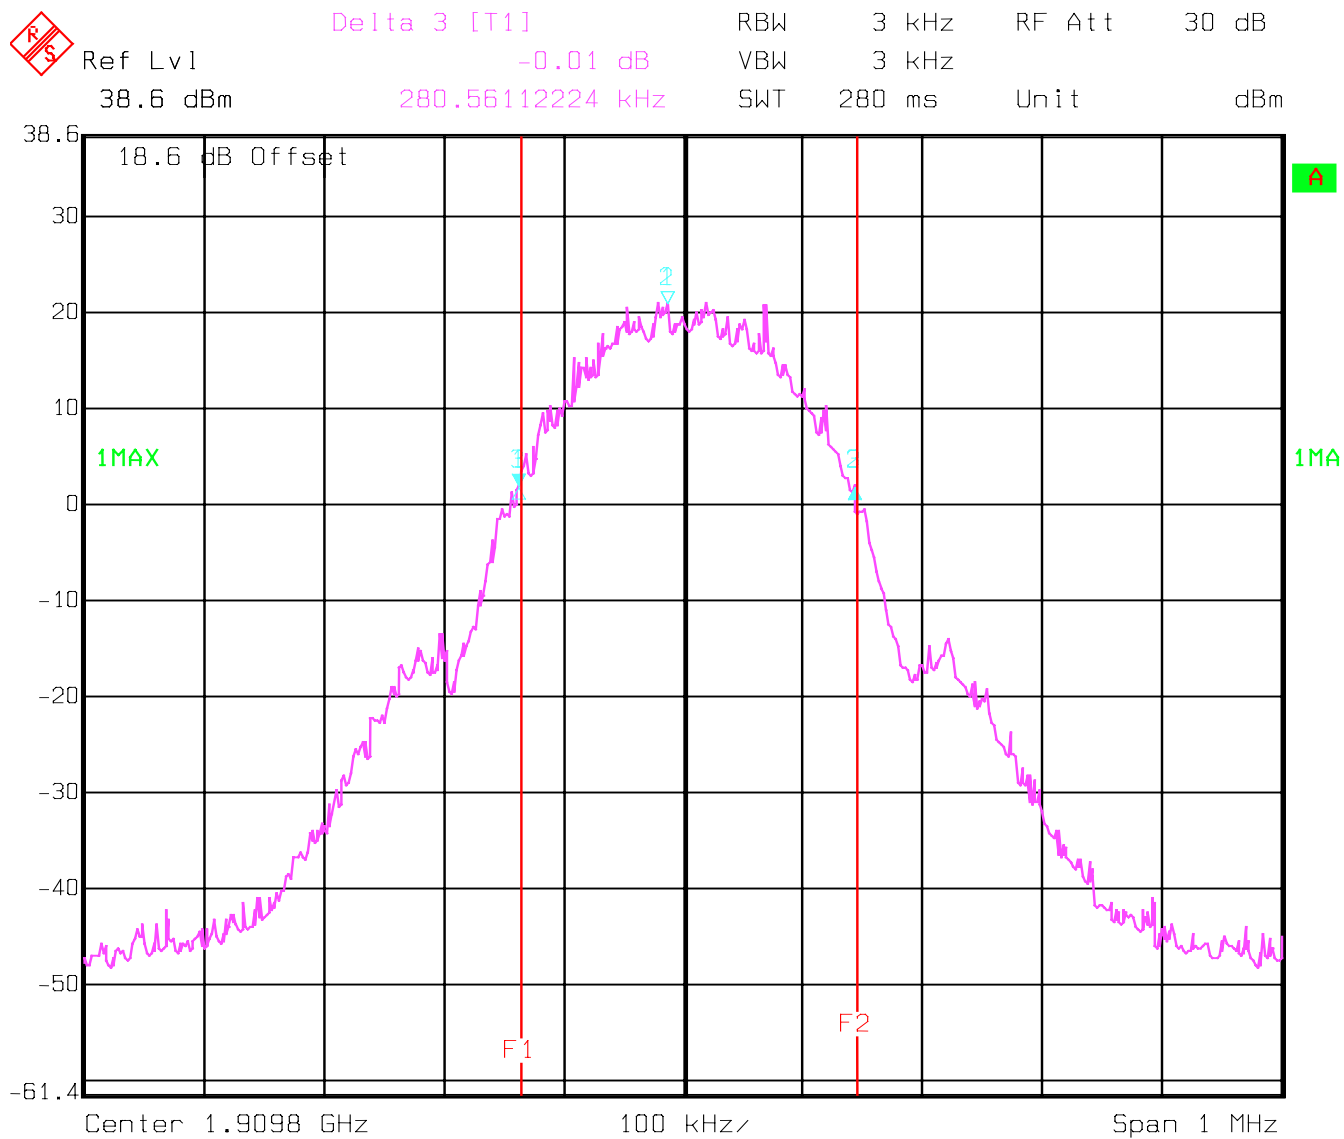

Date: 29.OCT.2002 08:32:53

Channel 810 -26 dBc Bandwidth

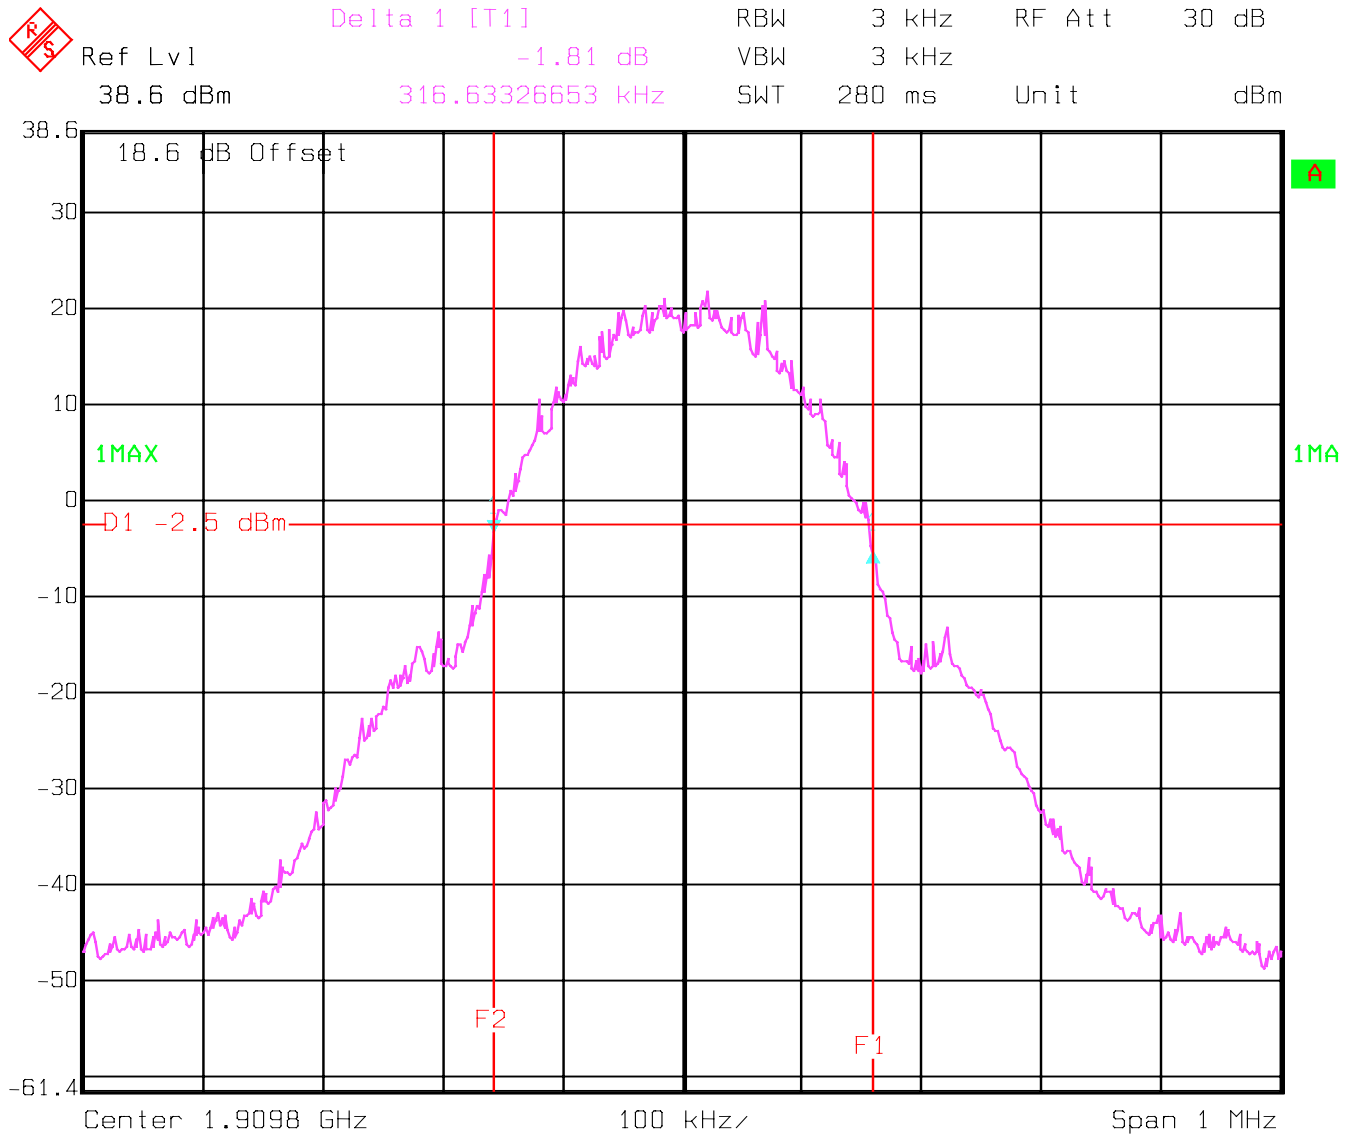

Date: 29.OCT.2002 08:13:39

EMISSIONS LIMITS**§24.238****Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the EUT. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final Radiated emission test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- c) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was determined by the substitution method described for EIRP measurements.

Measurement Limit:

Sec. 24.238 Emission Limits.

- (a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Measurement Results:

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

NOTE: The spurious emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18 GHz and 19.1 GHz very short cable connections to the antenna was used to minimize the noise level.

RESULTS OF RADIATED TESTS FOR FCC-24:

Harmonic	Tx ch-512 Freq.(MHz)	Level (dBm)	Tx ch-661 Freq. (MHz)	Level (dBm)	Tx ch-810 Freq. (MHz)	Level (dBm)
2	3700.4	-39.73	3760	-30.57	3819.6	-31.83
3	5550.6	-31.18	5640	-32.00	5729.4	-31.95
4	7400.8	-27.02	7520	-25.39	7639.2	-26.43
5	9251	-24.29	9400	-24.24	9549	-24.34
6	11101.2	-25.17	11280	-23.35	11458.8	-22.67
7	12951.4	-20.58	13160	-19.71	13368.6	-19.9
8	14801.6	-19.40	15040	-18.38	15278.4	-18.48
9	16651.8	-15.85	16920	-16.77	17188.2	-16.14
10	18502	-22.29	18800	-20.76	19098	-19.04

RADIATED SPURIOUS EMISSIONS**Channel 512 : 30MHz - 1GHz**


Spurious emission limit -13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
30MHz	1GHz	Max Peak	Coupled	1 MHz

Marker: 99.97996 MHz -47.01 dBm

Level [dBm]

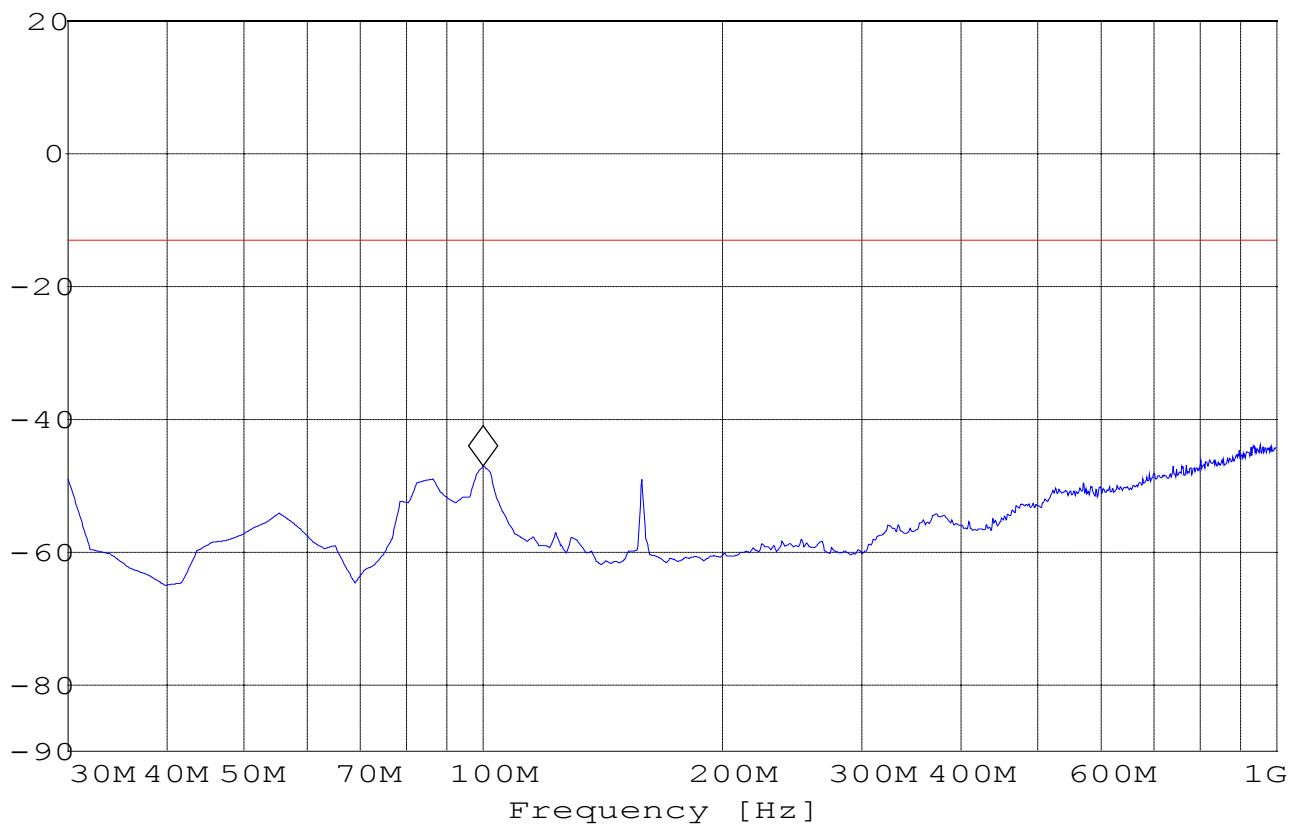

RADIATED SPURIOUS EMISSIONS

Channel 512 : 1GHz – 8GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-8G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1GHz	8GHz	Max Peak	Coupled	1 MHz

Marker: 1.849699399 GHz -34.32 dBm

Level [dBm]

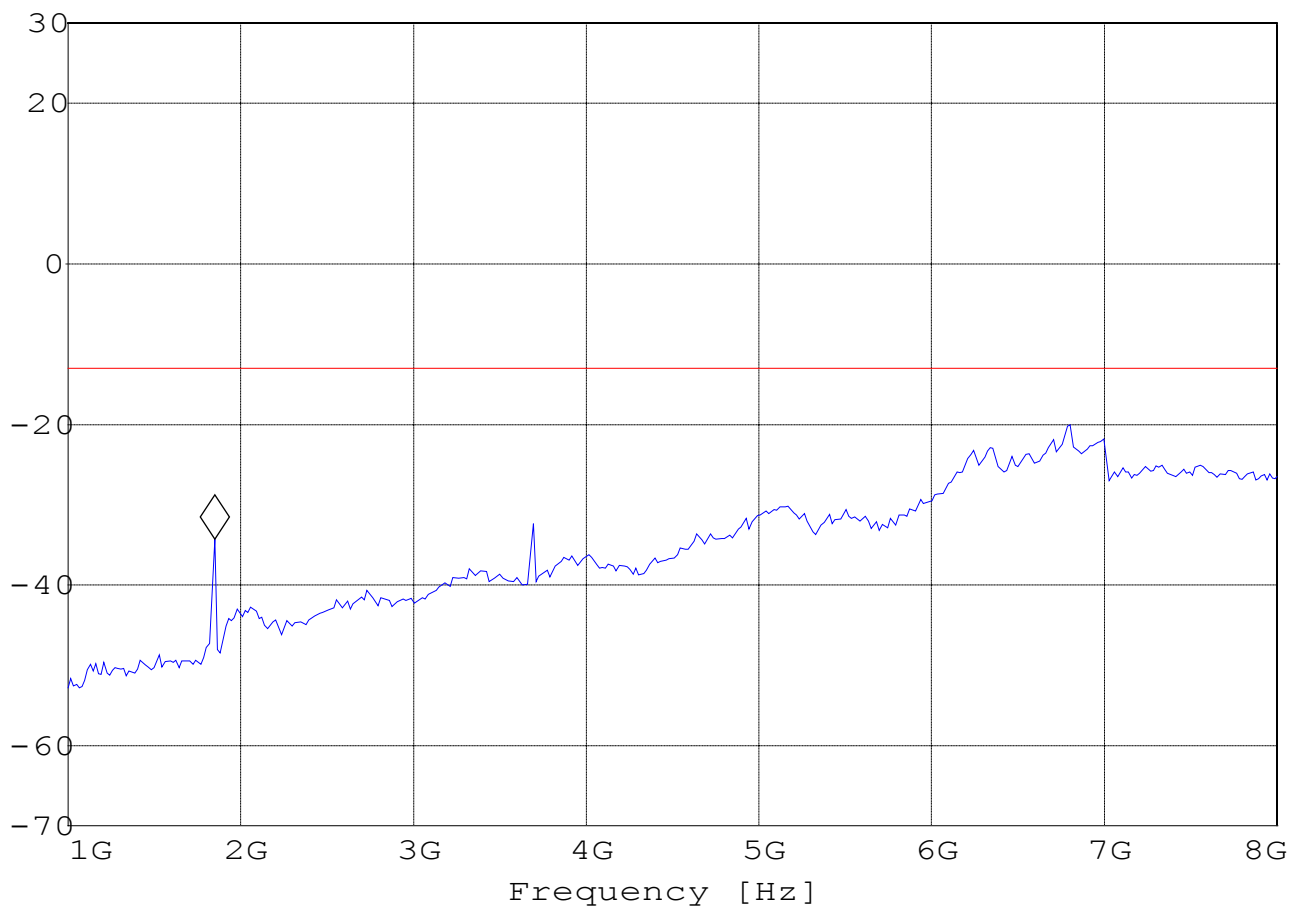


RADIATED SPURIOUS EMISSIONS**Channel 512 : 8GHz – 18GHz**

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 8-18G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
8GHz	18GHz	Max Peak	Coupled	1 MHz

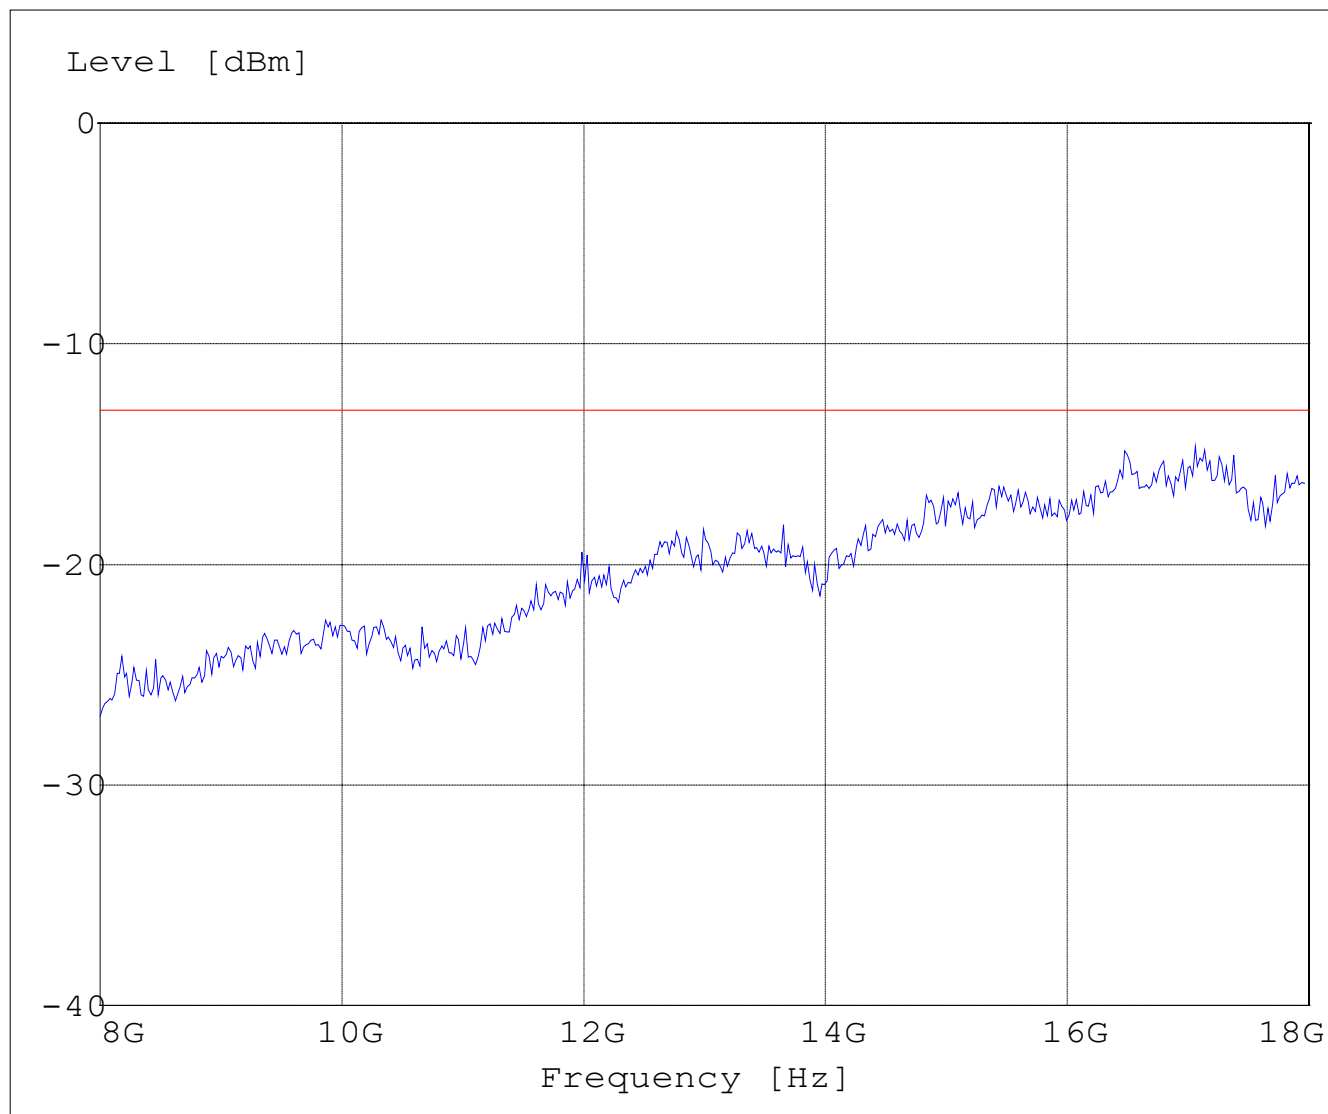


RADIATED SPURIOUS EMISSIONS**Channel 512 : 18GHz – 19.1GHz**

Spurious emission limit -13dBm

SWEEP TABLE: "FCC Spuri 18-19.1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

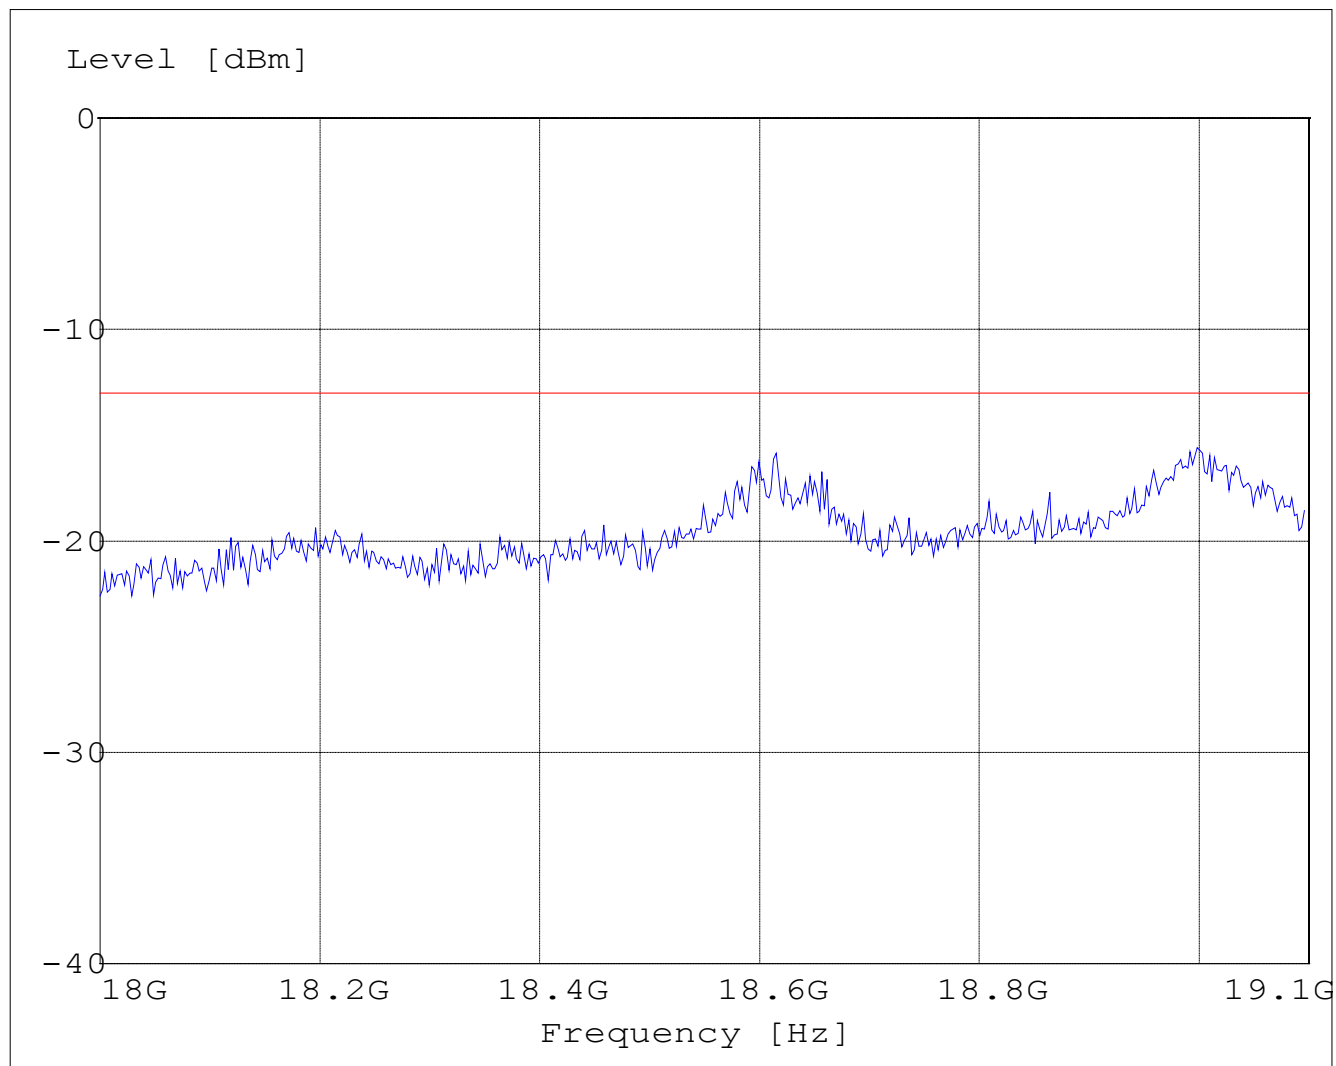

RADIATED SPURIOUS EMISSIONS**Channel 661: 30MHz –1GHz**


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
30MHz	1GHz	Max Peak	Coupled	1 MHz

Marker: 99.97996 MHz -46.82 dBm

Level [dBm]

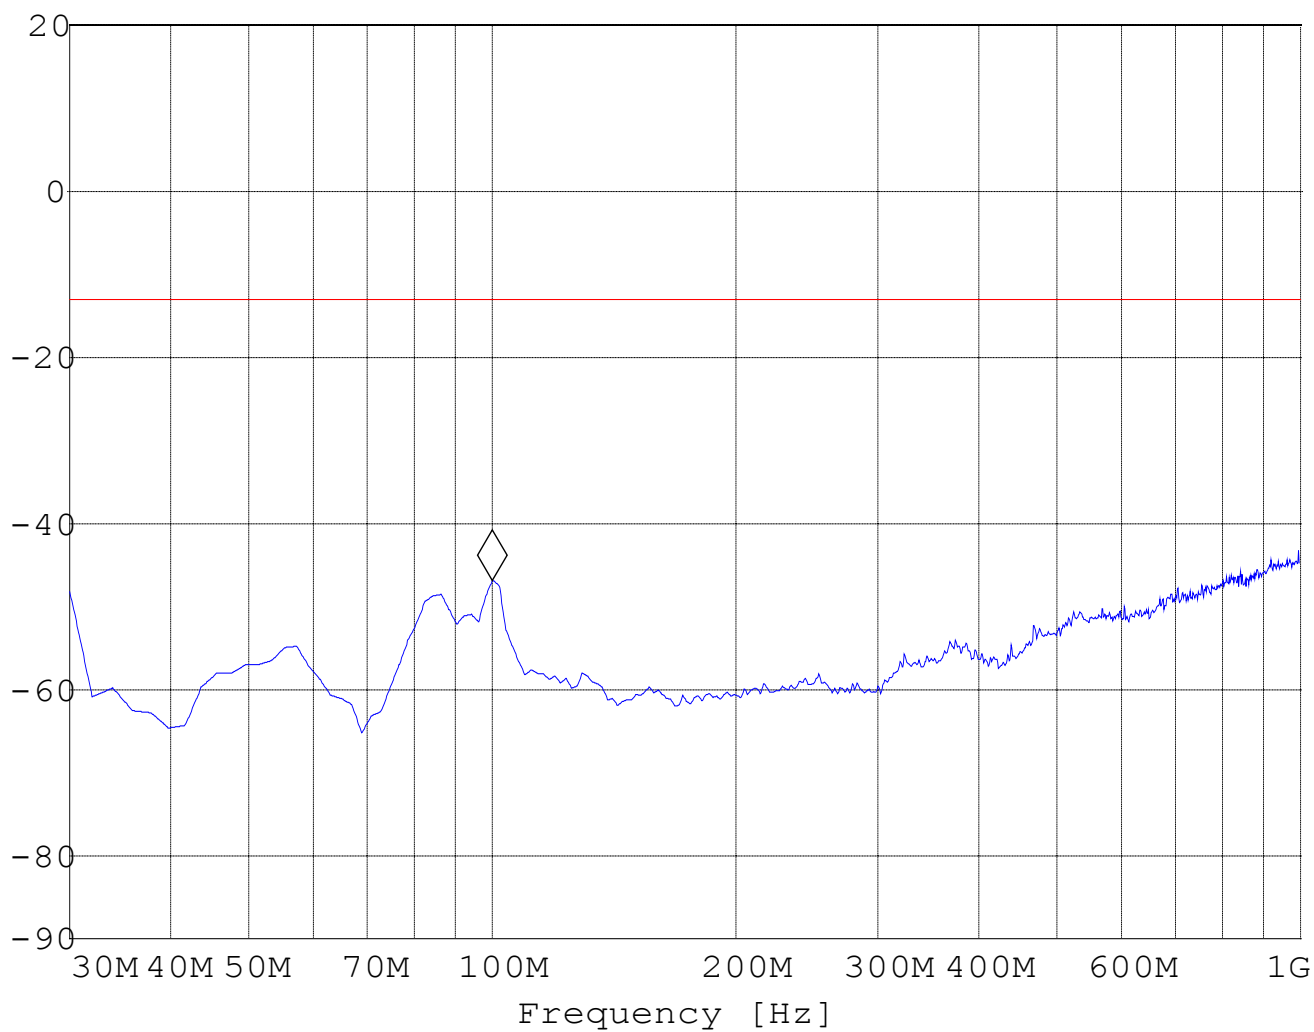

RADIATED SPURIOUS EMISSIONS

Channel 661: 1GHz – 8GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-8G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
1GHz	8GHz	Max Peak	Coupled	1 MHz

Marker: 1.881763527 GHz -34.63 dBm

Level [dBm]

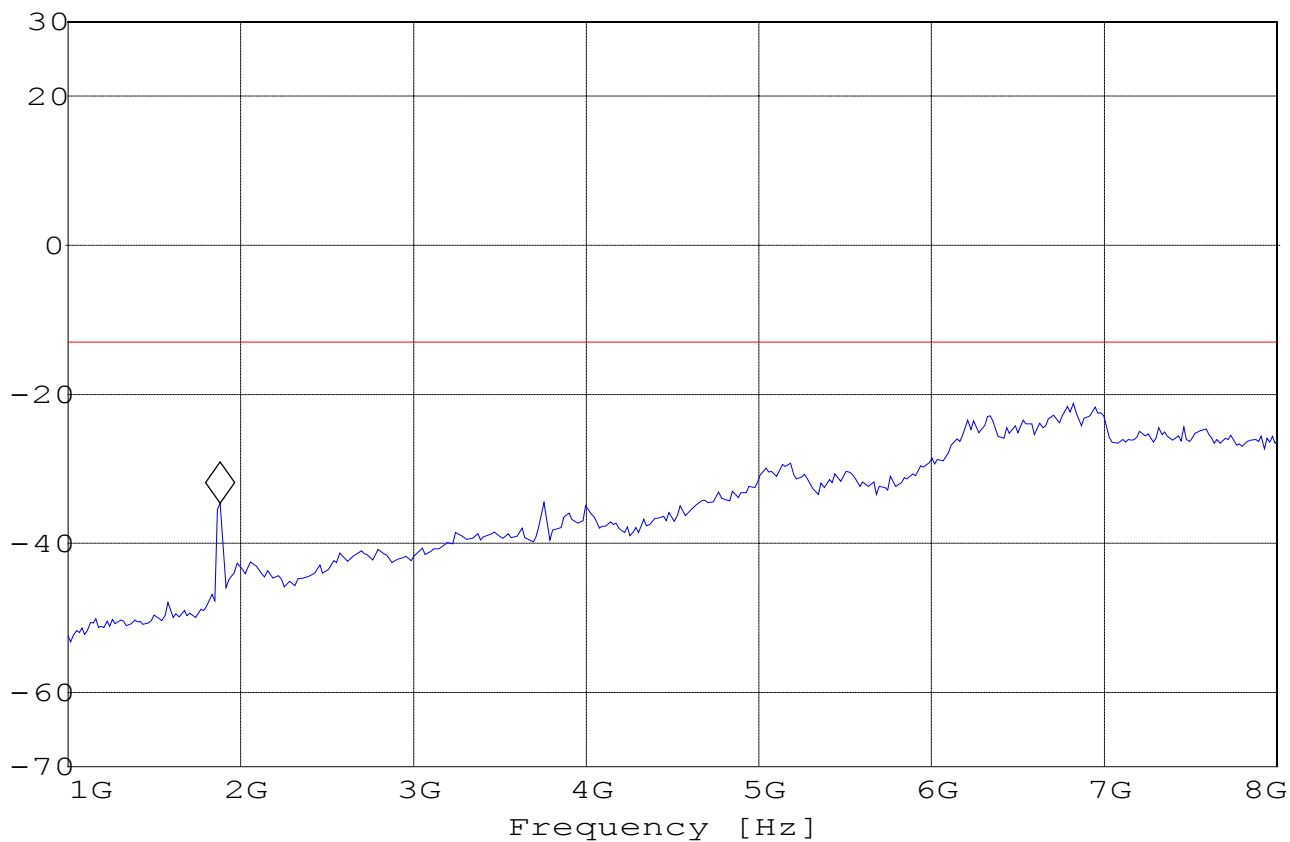


RADIATED SPURIOUS EMISSIONS**Channel 661: 8GHz – 18GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 8-18G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
8GHz	18GHz	Max Peak	Coupled	1 MHz

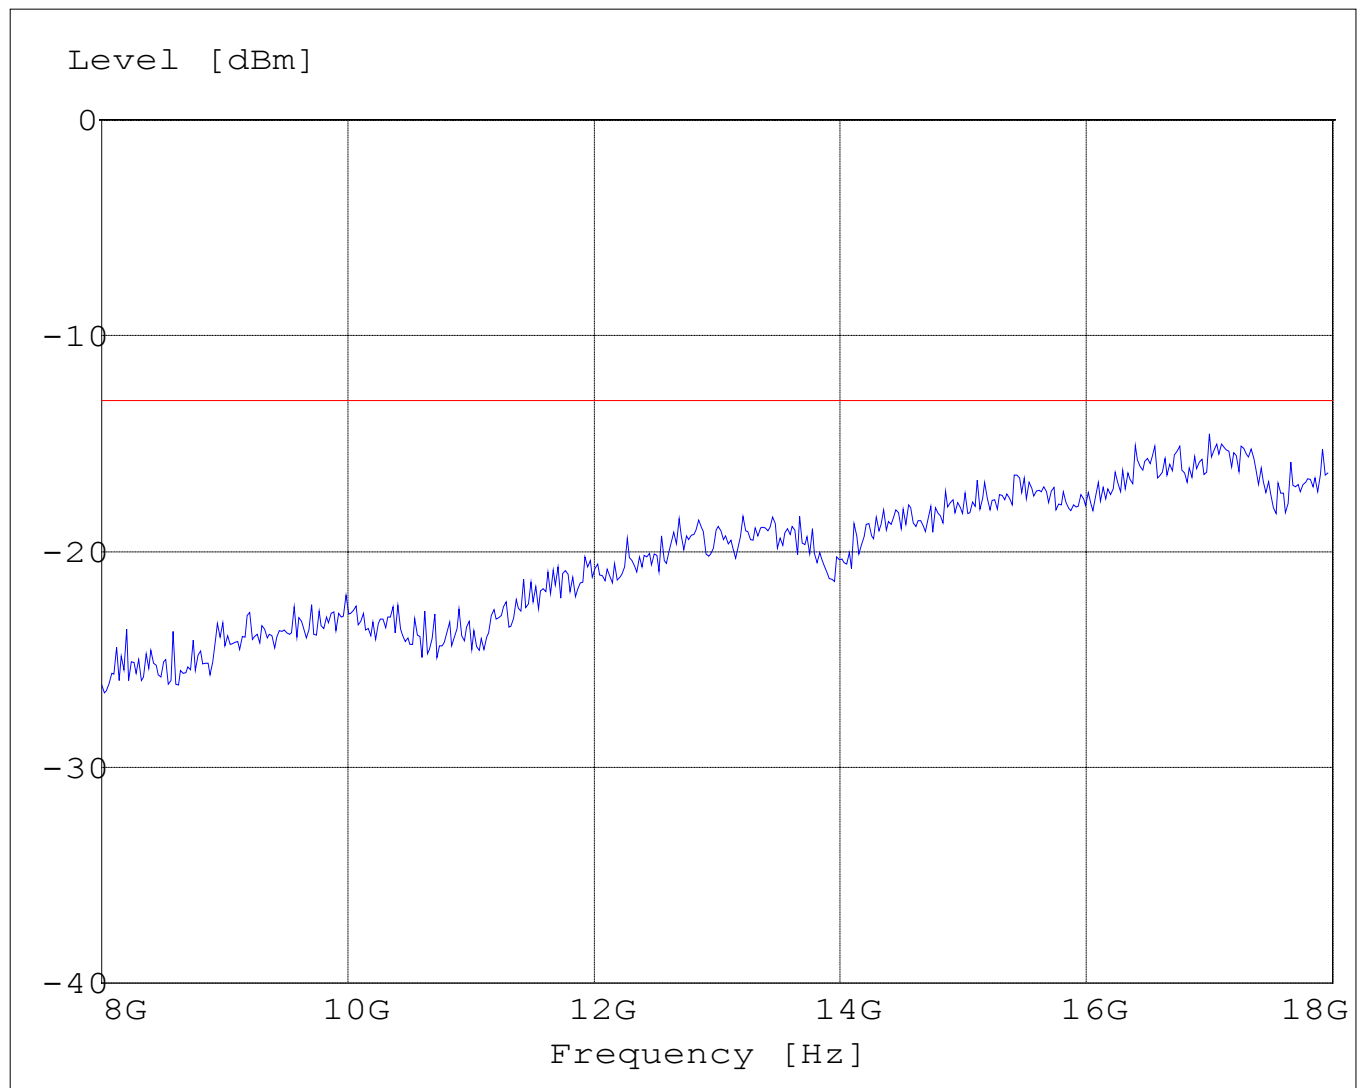


RADIATED SPURIOUS EMISSIONS**Channel 661: 18GHz – 19.1GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 18-19.1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

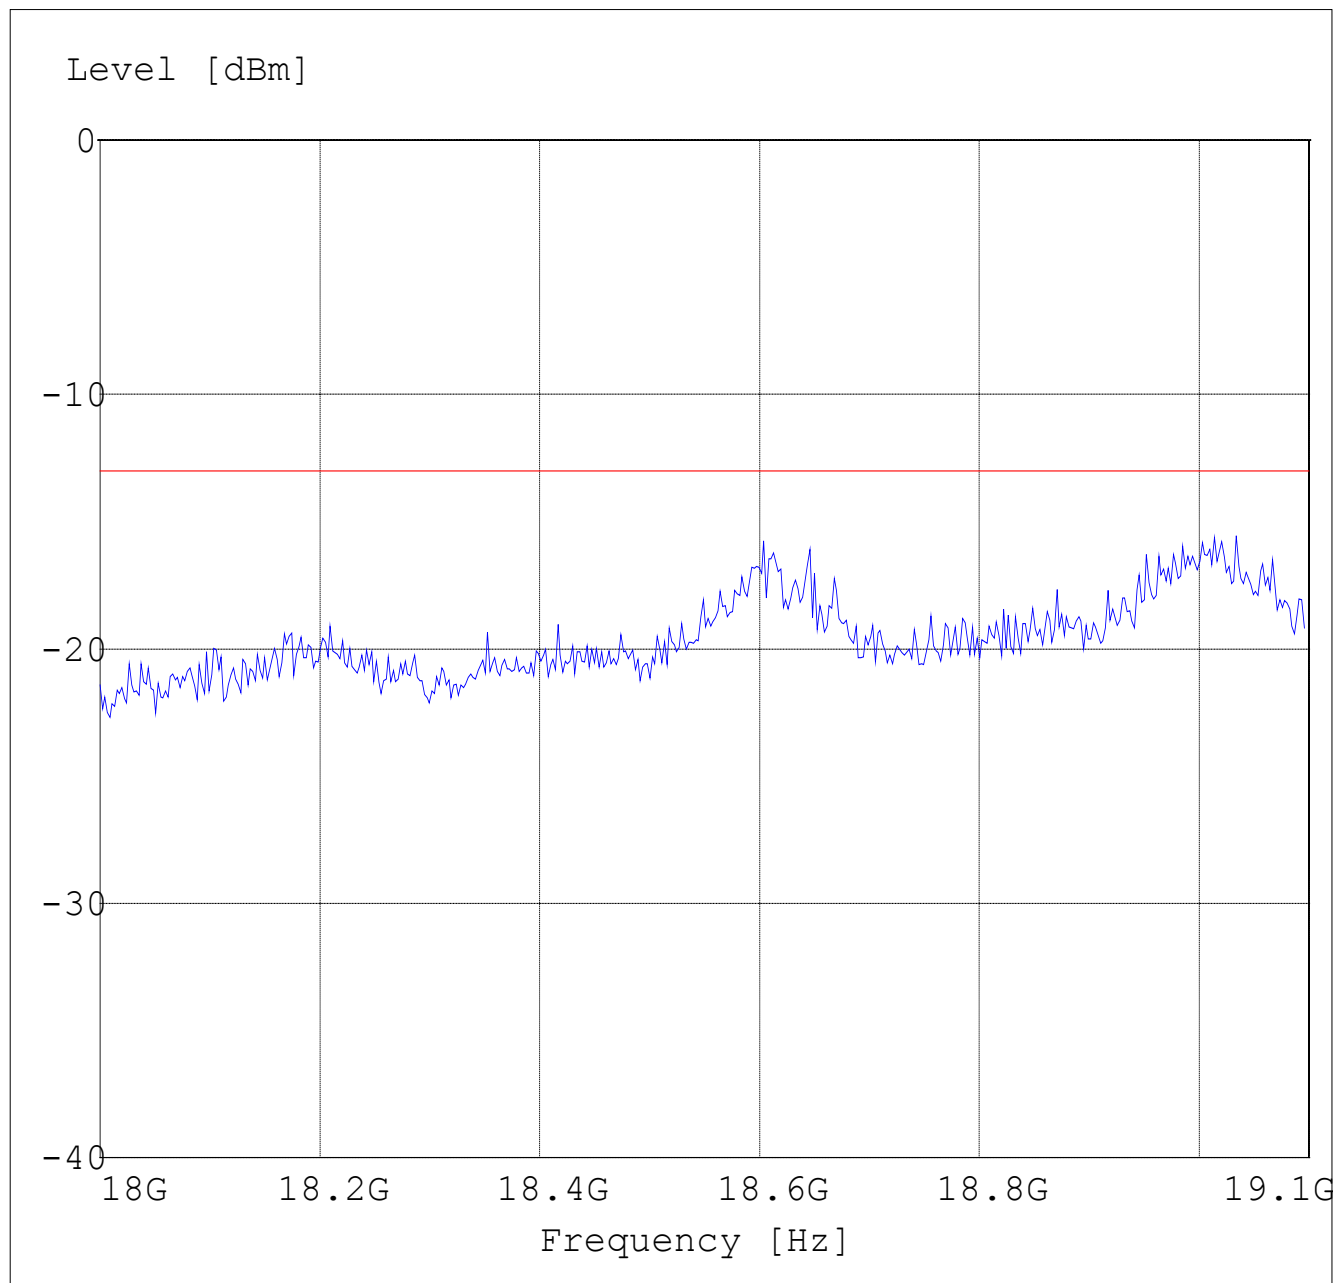

RADIATED SPURIOUS EMISSIONS**Channel 810: 30MHz – 1GHz**


Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
30MHz	1GHz	Max Peak	Coupled	1 MHz

Marker: 99.97996 MHz -46.78 dBm

Level [dBm]

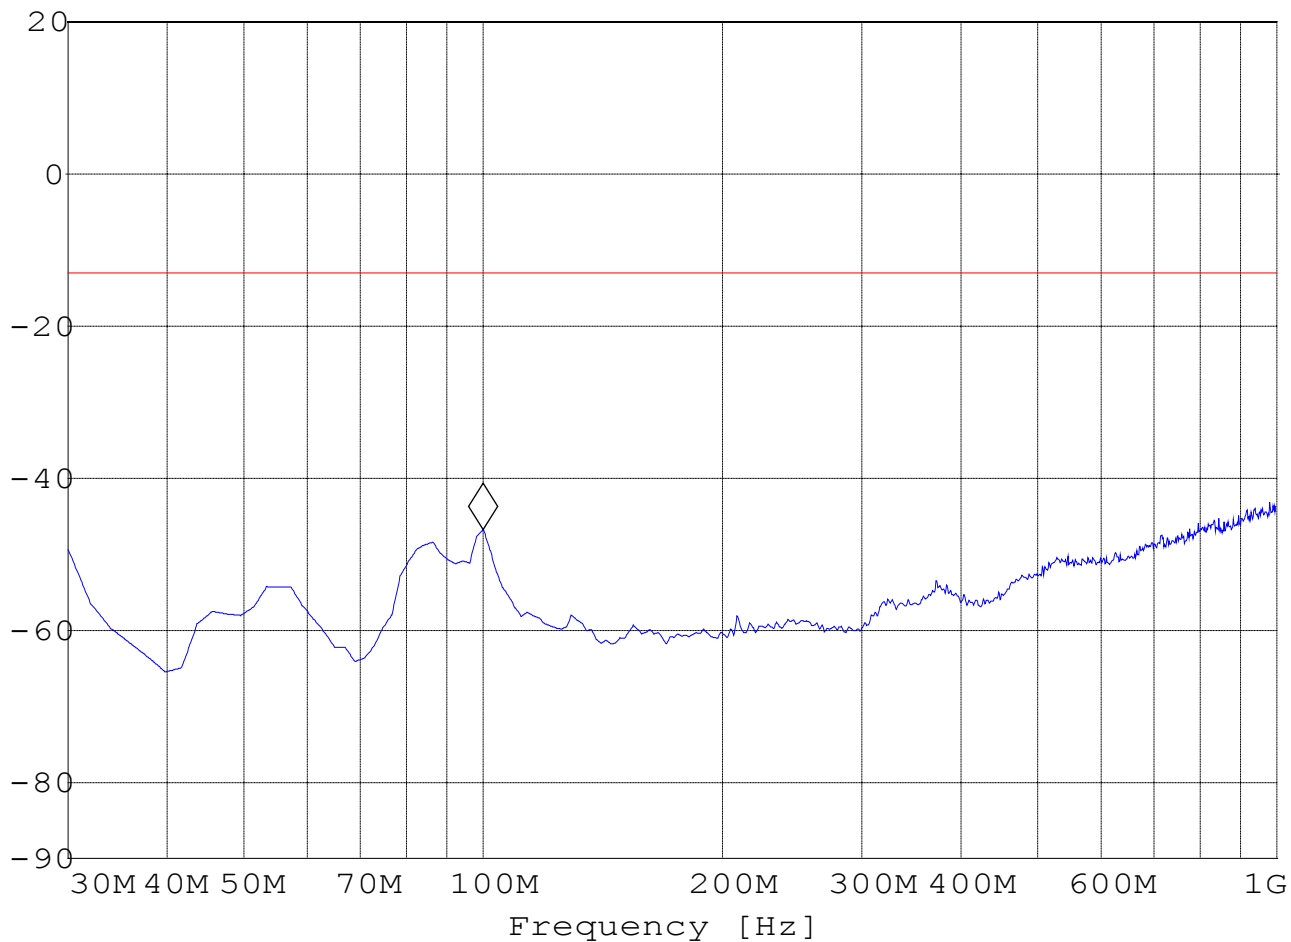

RADIATED SPURIOUS EMISSIONS

Channel 810: 1GHz – 8GHz


Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-8G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1GHz	8GHz	Max Peak	Coupled	1 MHz

Marker: 1.897795591 GHz –27.5 dBm

Level [dBm]

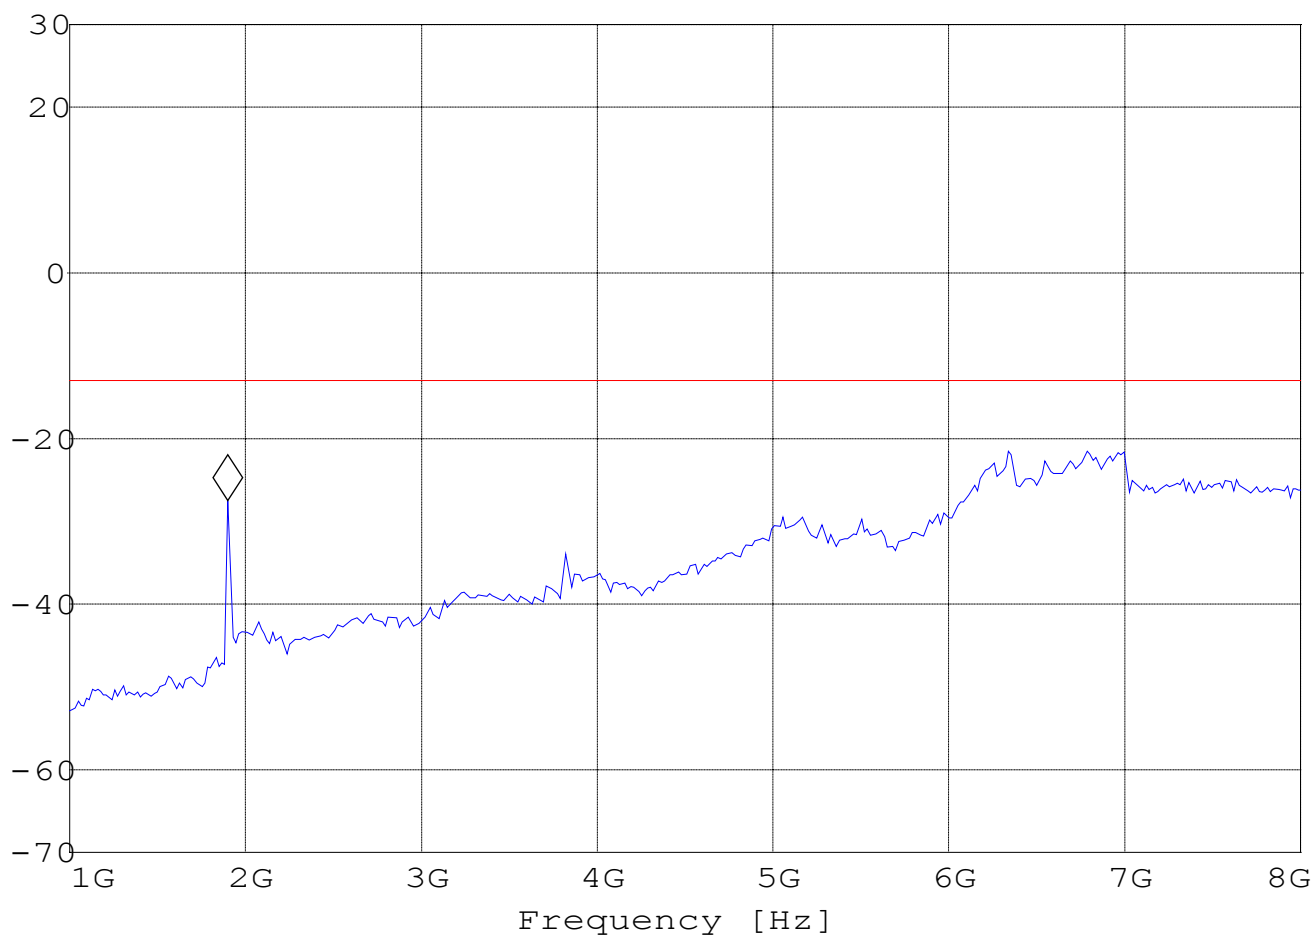


RADIATED SPURIOUS EMISSIONS**Channel 810: 8GHz – 18GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 8-18G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
8GHz	18GHz	Max Peak	Coupled	1 MHz

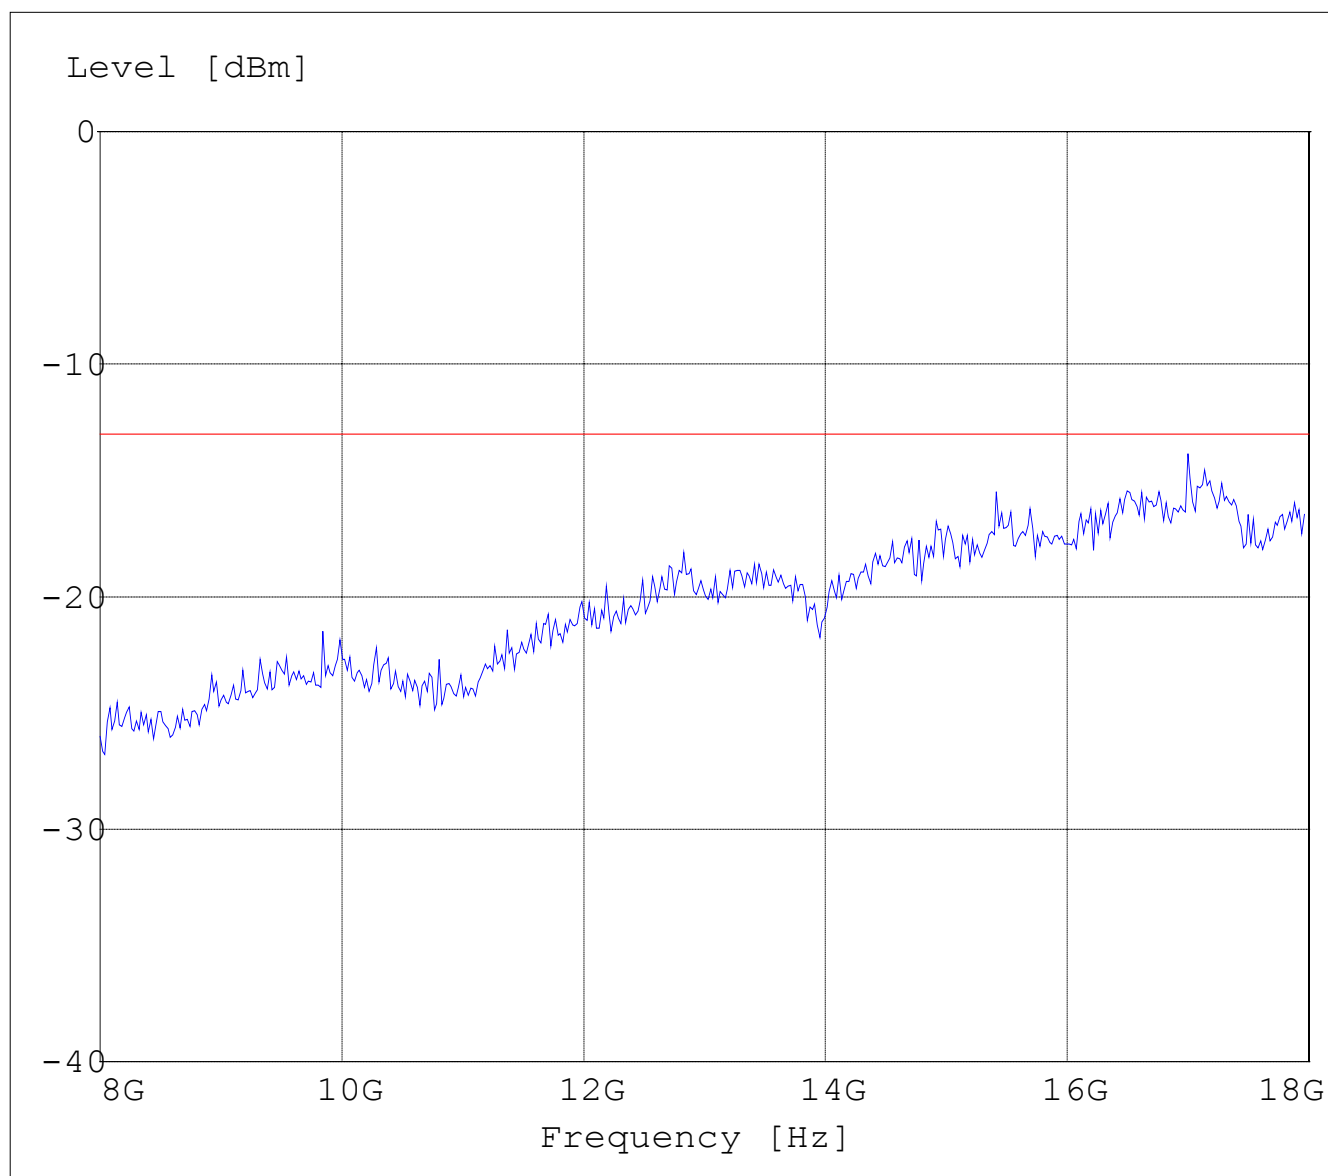


RADIATED SPURIOUS EMISSIONS**18GHz – 19.1GHz**

Spurious emission limit –13dBm

(NOTE: This plot is valid for all three channels)

SWEEP TABLE: "FCC 24 spuri 18-19.1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

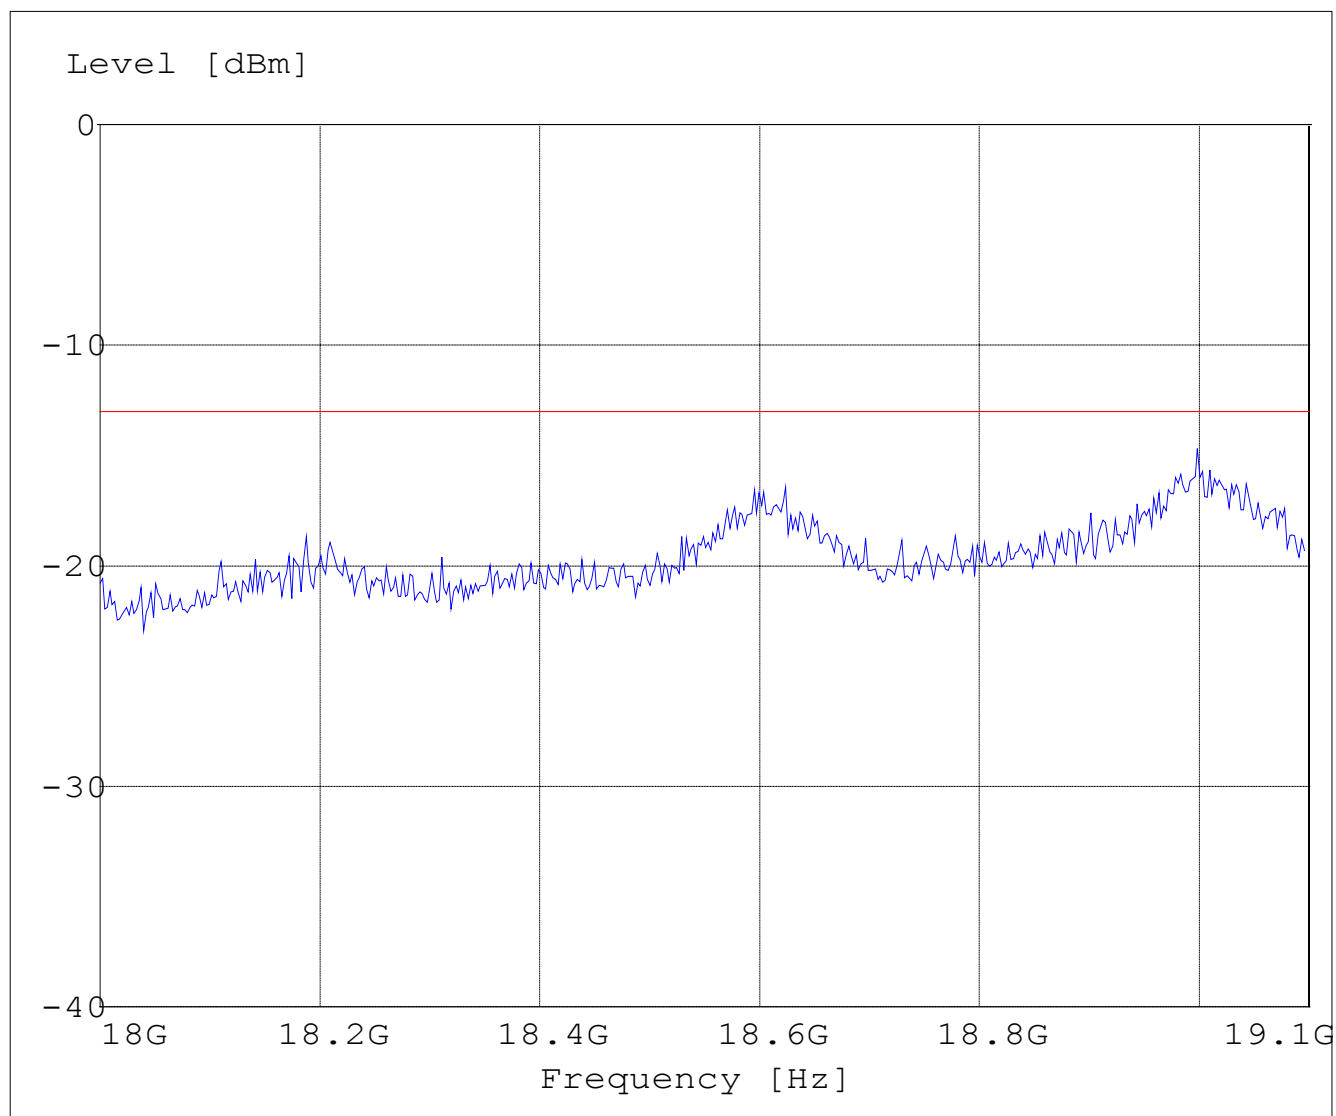


RADIATED SPURIOUS EMISSIONS

EUT in Idle Mode: 30MHz – 1GHz

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 Spur 30M-1G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
30MHz	1GHz	Max Peak	Coupled	1 MHz

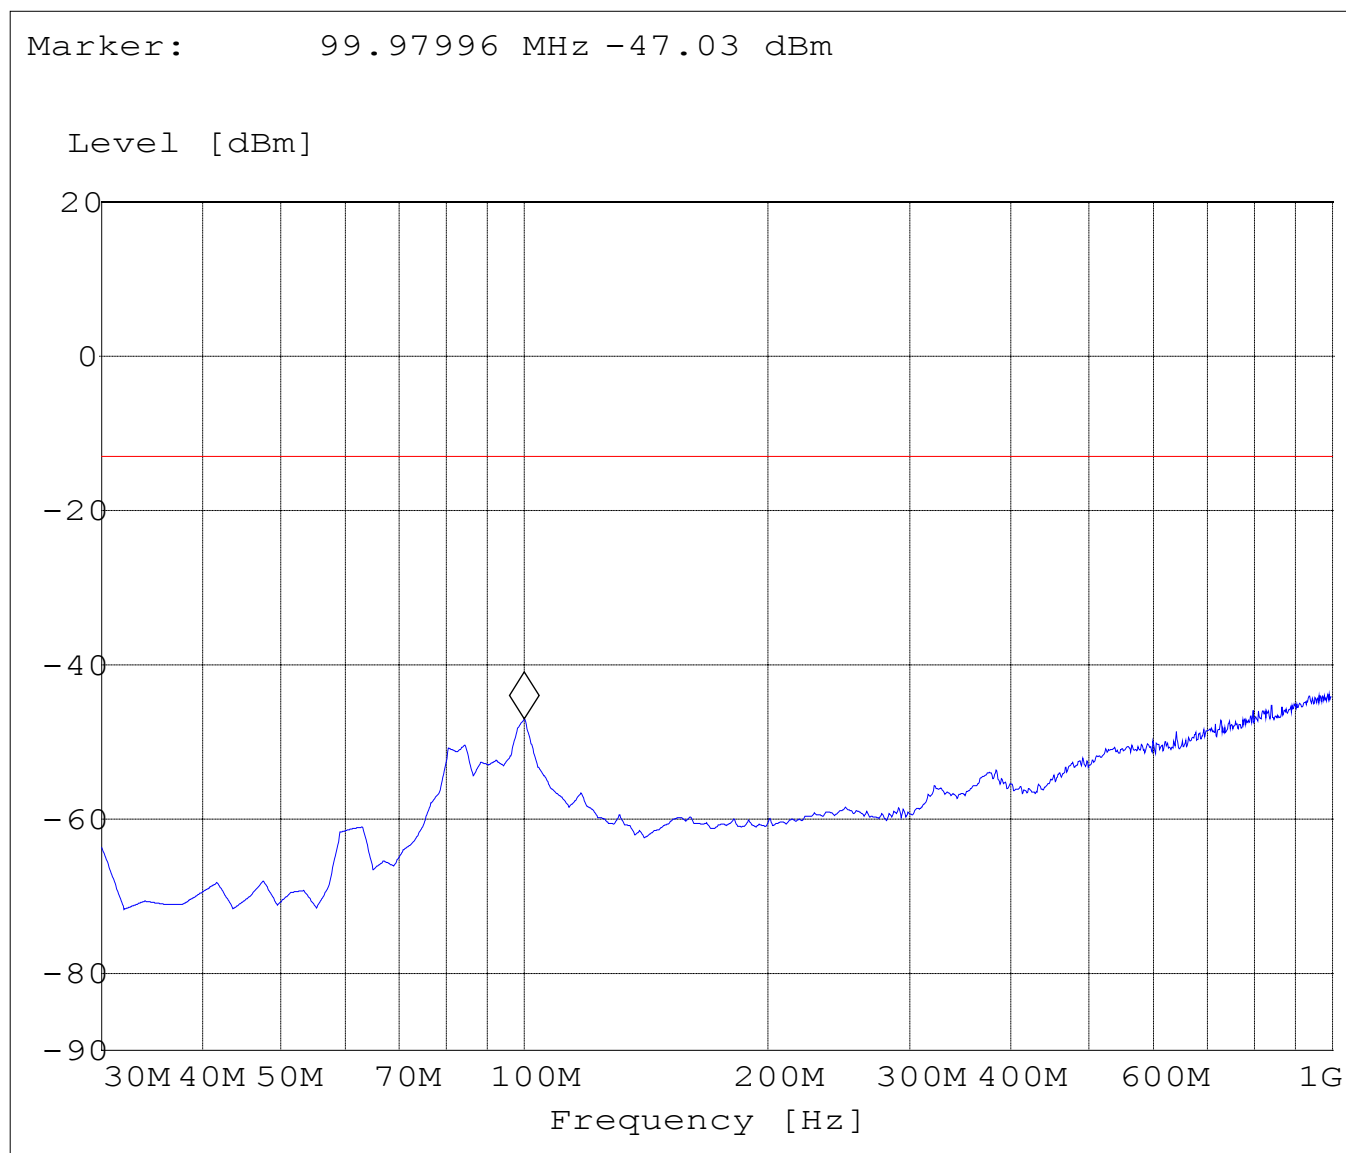


RADIATED SPURIOUS EMISSIONS**EUT in Idle Mode: 1GHz – 8GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC Spuri 1-8G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
1GHz	8GHz	Max Peak	Coupled	1 MHz

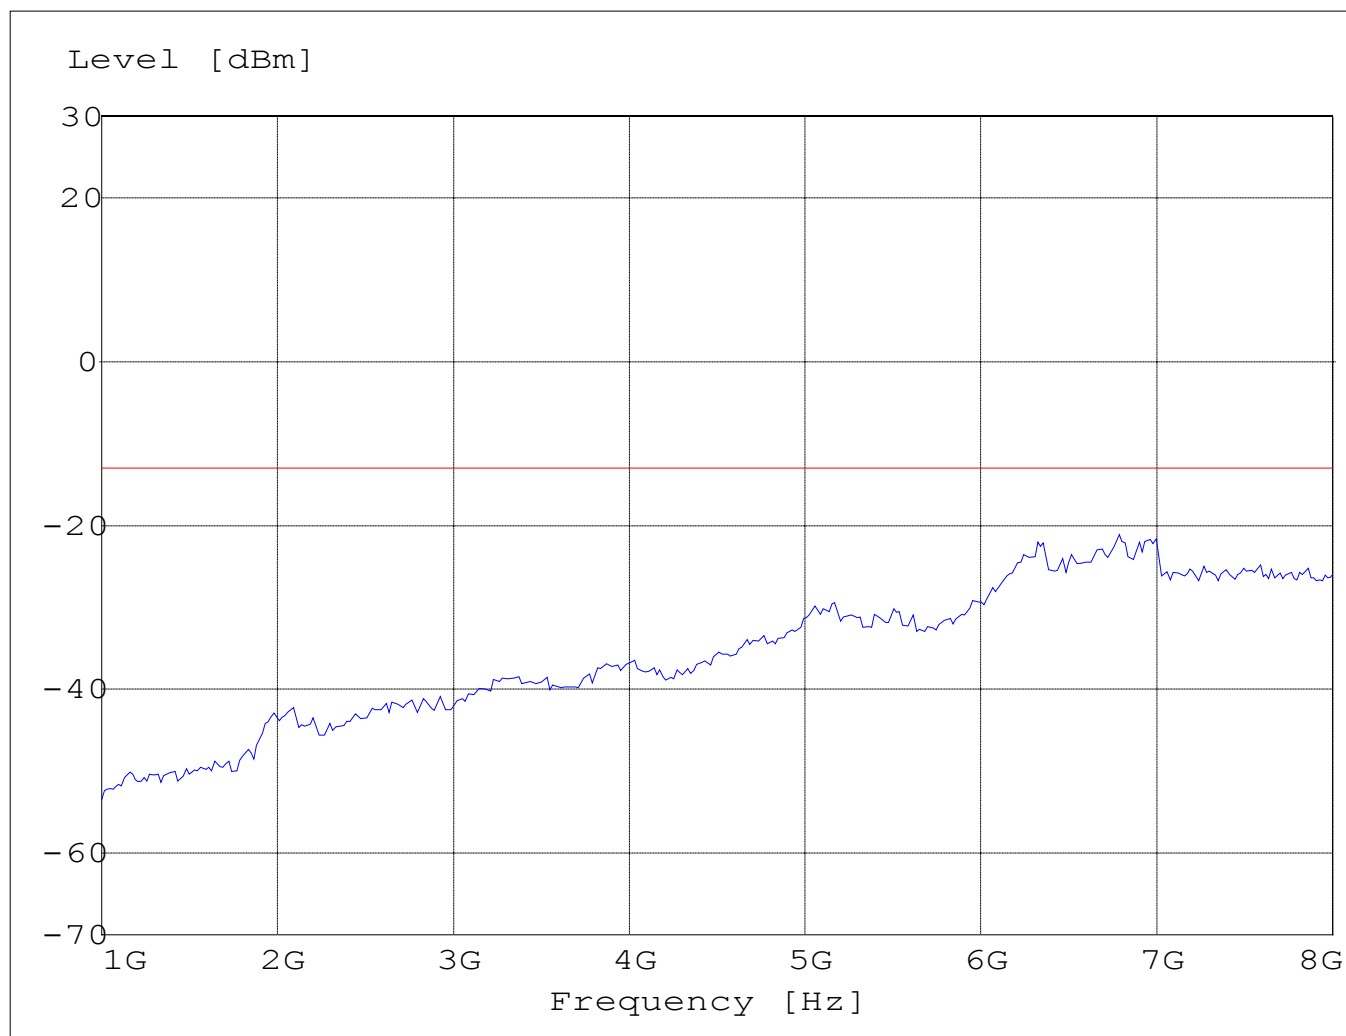


RADIATED SPURIOUS EMISSIONS**EUT in Idle Mode: 8GHz – 18GHz**

Spurious emission limit –13dBm

SWEEP TABLE: "FCC 24 spuri 8-18G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
8GHz	18GHz	Max Peak	Coupled	1 MHz

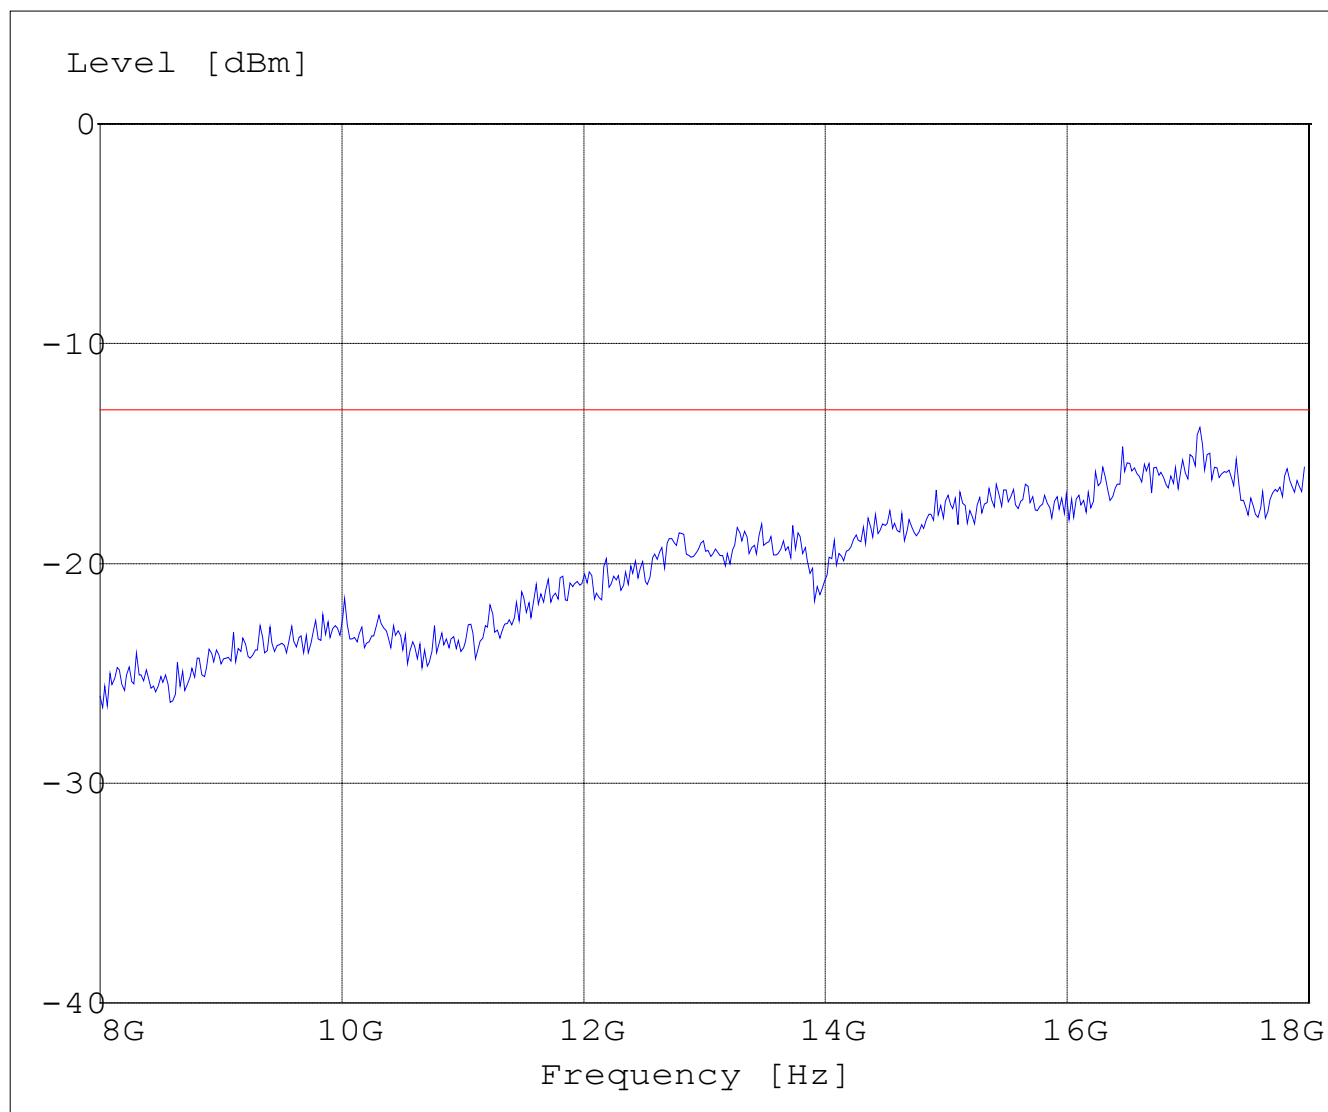


RADIATED SPURIOUS EMISSIONS**EUT in Idle Mode: 18GHz – 19.1GHz**

Spurious emission limit –13dBm


SWEEP TABLE: "FCC 24 spuri 18-19.1G"

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
18GHz	19.1GHz	Max Peak	Coupled	1 MHz

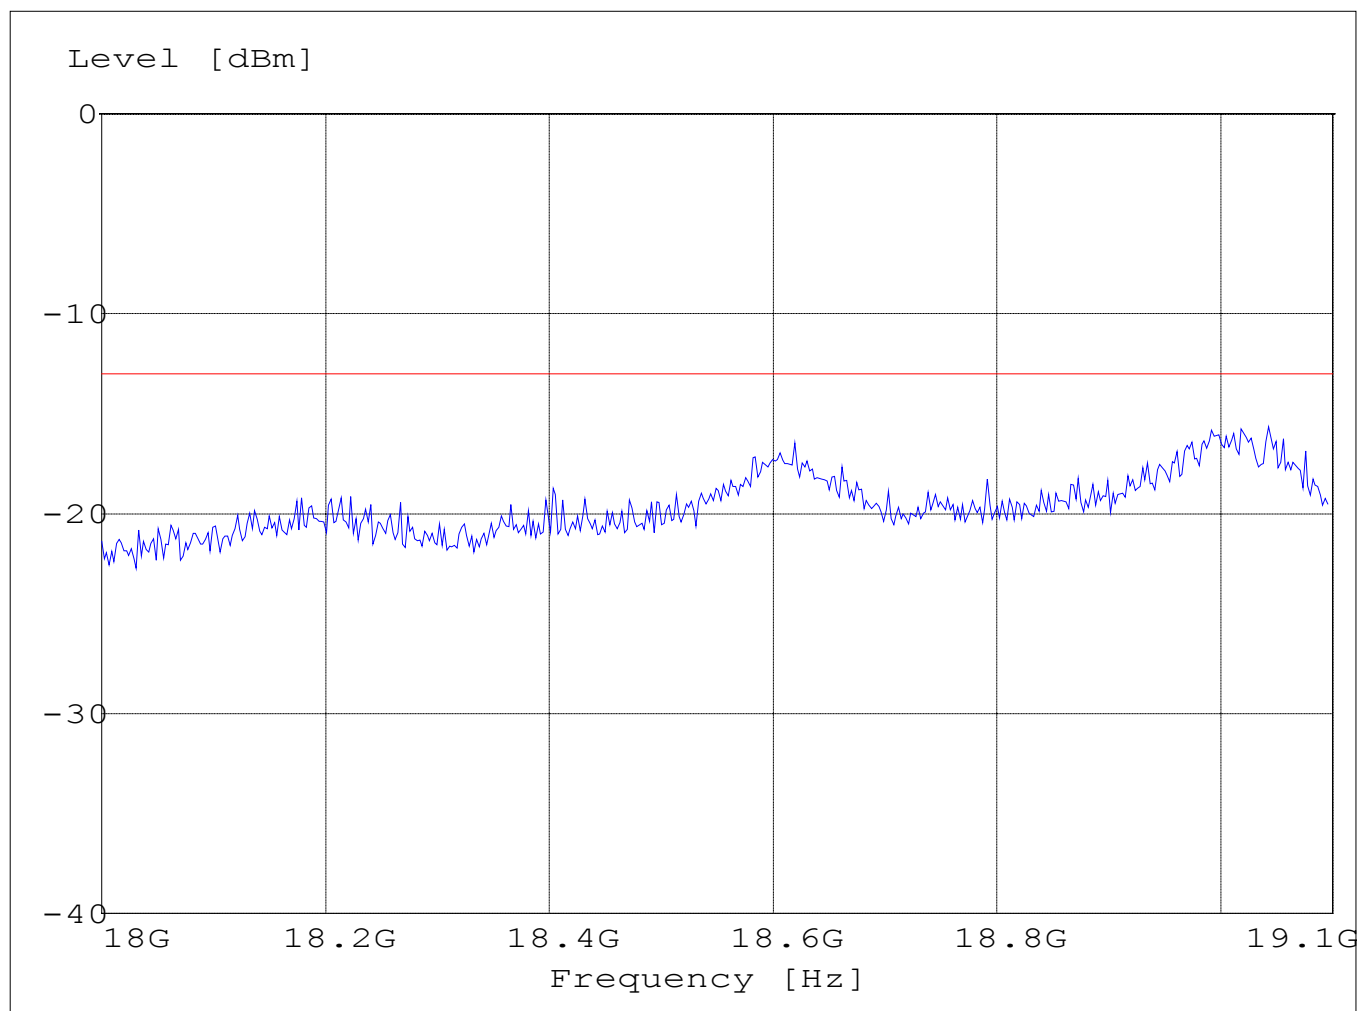

LOW BAND EDGE BLOCK-A (PCS-1900)
(Conducted)


§2.1049, §22.917(b)

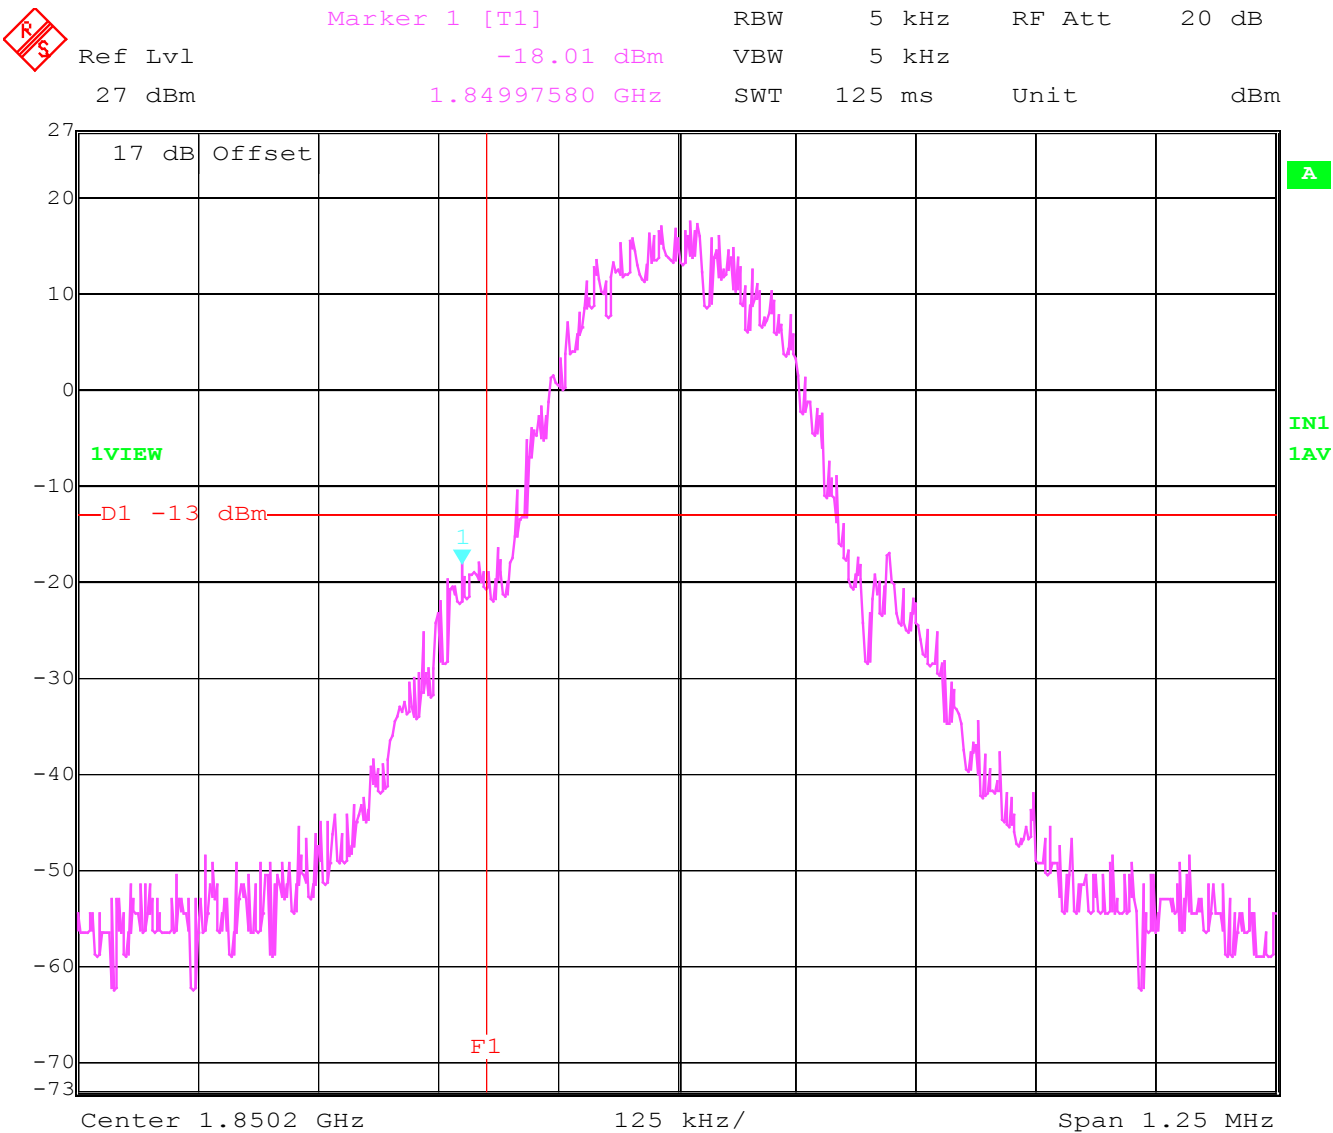

Date: 30.JUL.2003 14:46:33

HIGH BAND EDGE BLOCK-A (PCS-1900)
(Conducted)

§2.1049, §24.238 (a)(b)

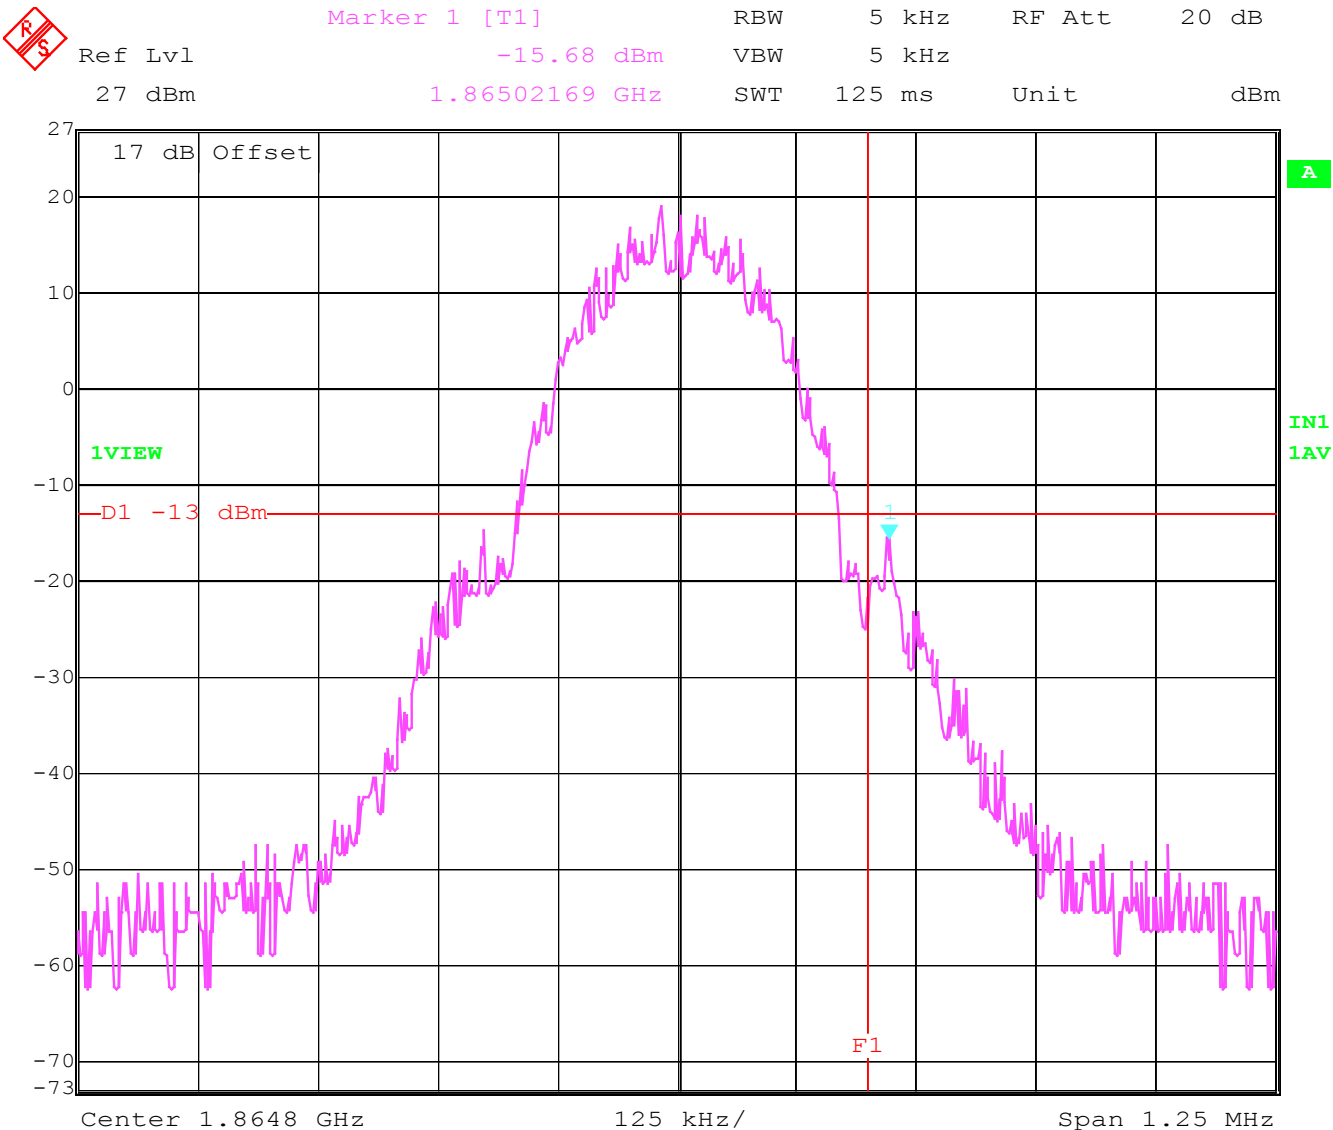


Date: 30.JUL.2003 14:47:43

LOW BAND EDGE BLOCK-D (PCS-1900)
(Conducted)

§2.1049, §24.238 (a)(b)




Marker 1 [T1] RBW 5 kHz RF Att 20 dB
Ref Lvl -15.92 dBm VBW 5 kHz
27 dBm 1.86499915 GHz SWT 125 ms Unit dBm

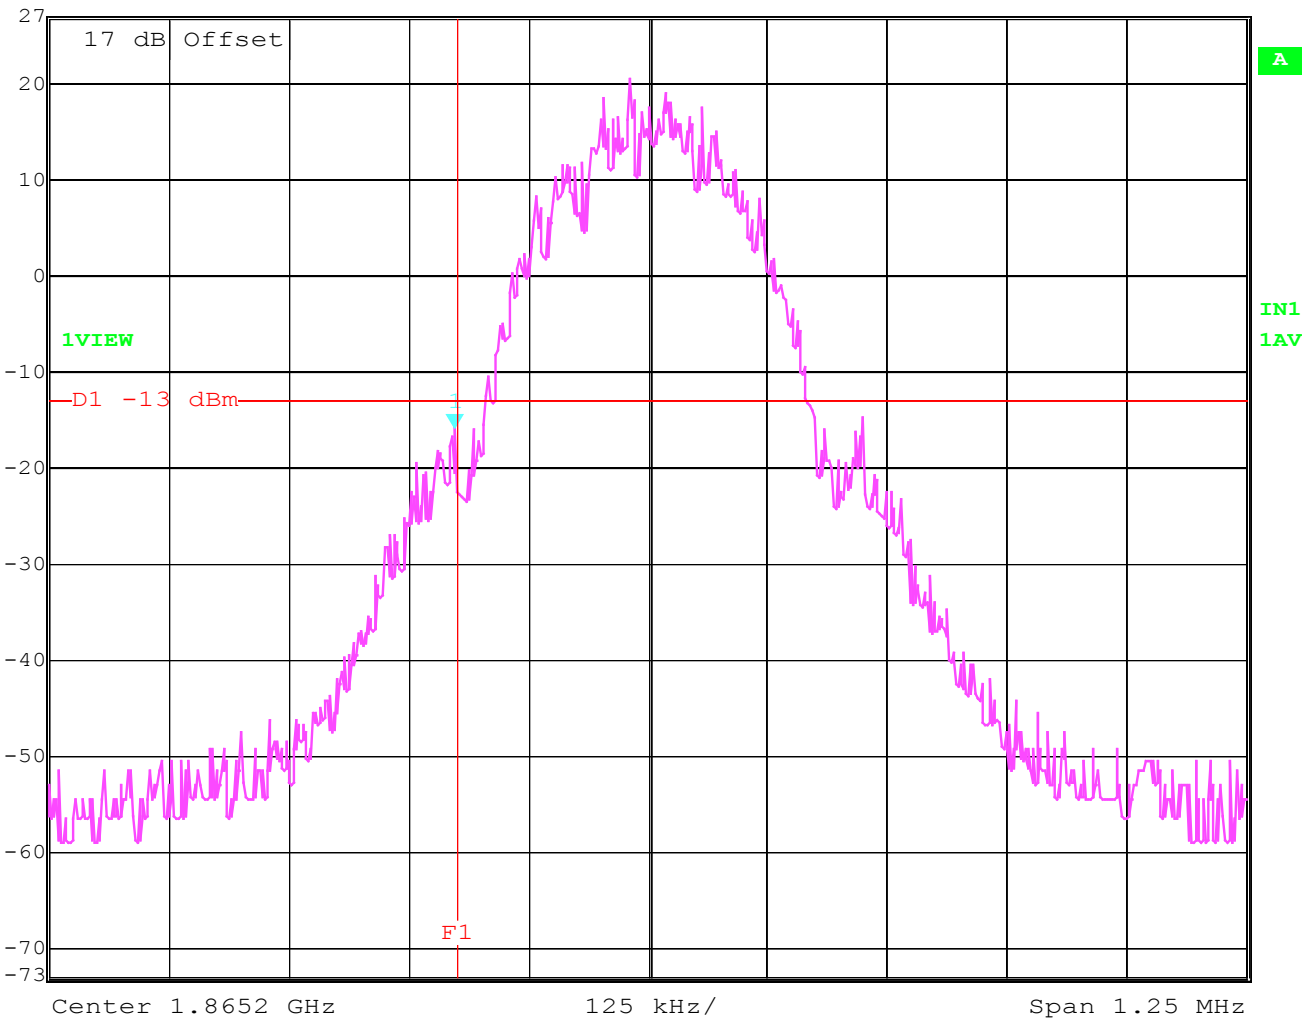

Date: 30.JUL.2003 14:48:43

HIGH BAND EDGE BLOCK-D (PCS-1900)
(Conducted)

§2.1049, §24.238 (a)(b)

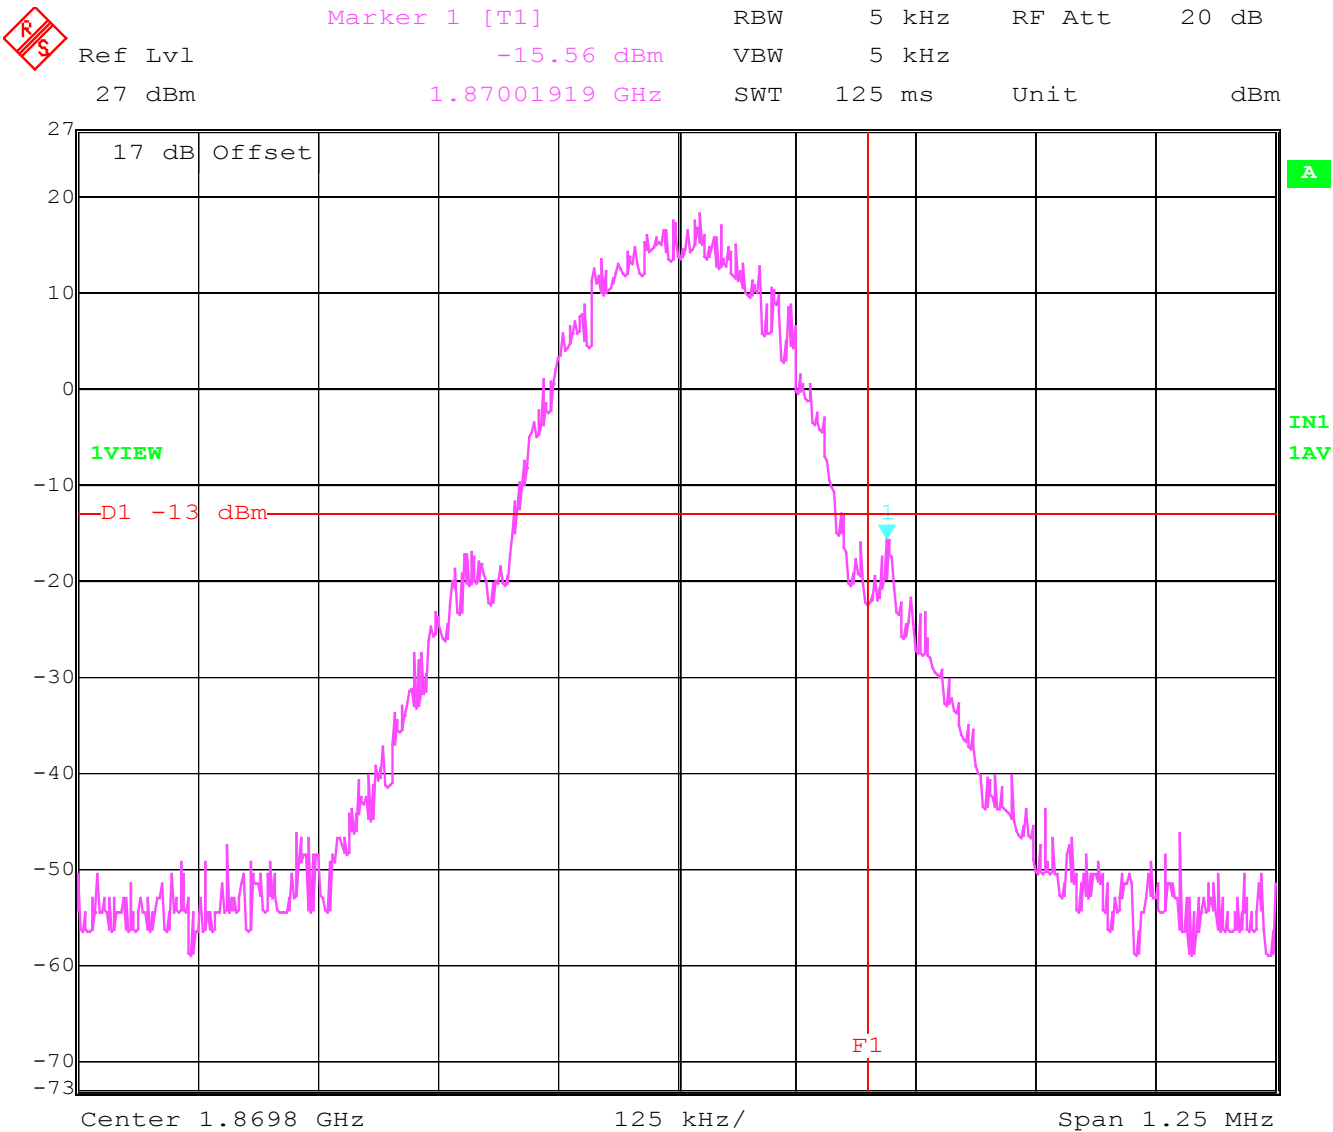


Date: 30.JUL.2003 14:49:47

LOW BAND EDGE BLOCK-B (PCS-1900) (Conducted)

§2.1049, §24.238 (a)(b)




Marker 1 [T1] RBW 5 kHz RF Att 20 dB
Ref Lvl -17.04 dBm VBW 5 kHz
27 dBm 1.86997911 GHz SWT 125 ms Unit dBm

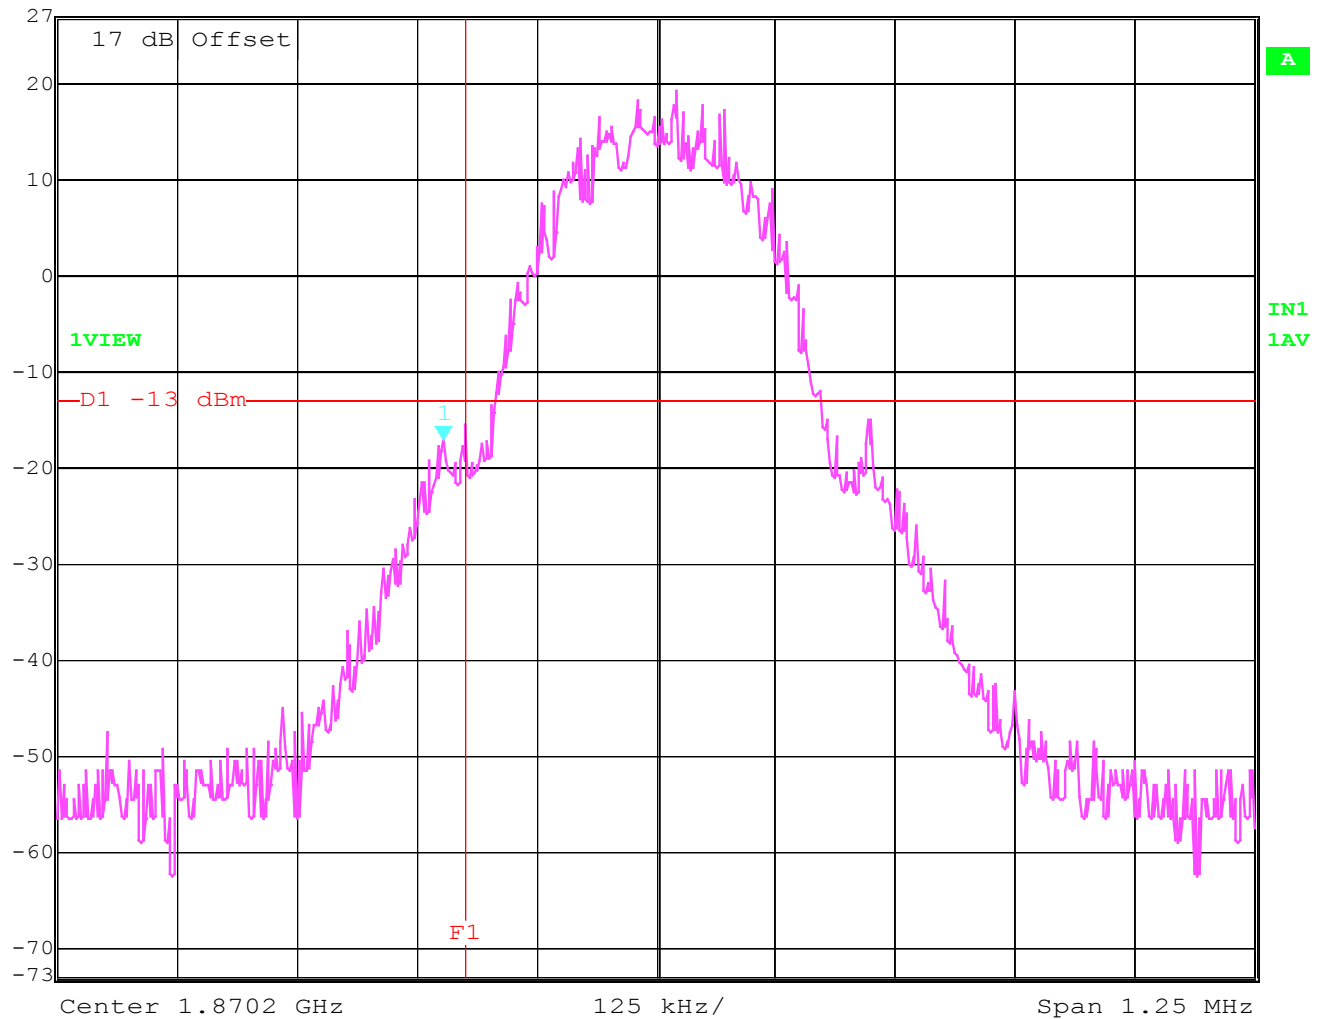

Date: 30.JUL.2003 14:52:02

HIGH BAND EDGE BLOCK-B (PCS-1900)
(Conducted)


§2.1049, §24.238 (a)(b)

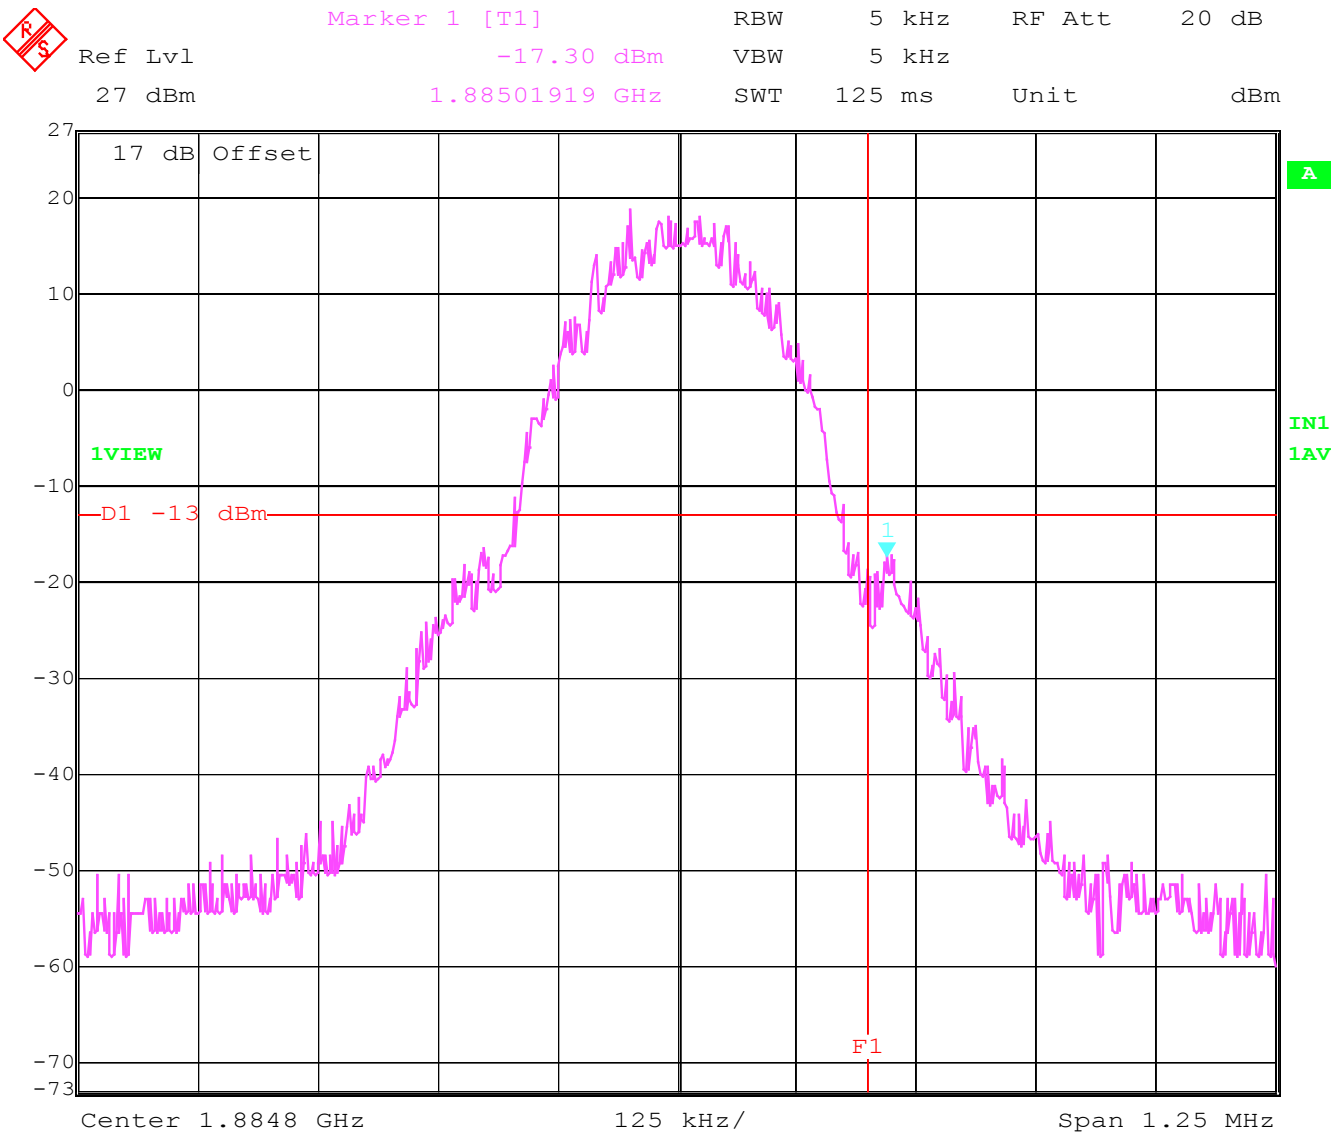

Date: 30.JUL.2003 14:52:58

**LOW BAND EDGE BLOCK-E (PCS-1900)
(Conducted)****§2.1049, §24.238 (a)(b)**


Marker 1 [T1] RBW 5 kHz RF Att 20 dB
Ref Lvl -15.50 dBm VBW 5 kHz
27 dBm 1.88499915 GHz SWT 125 ms Unit dBm

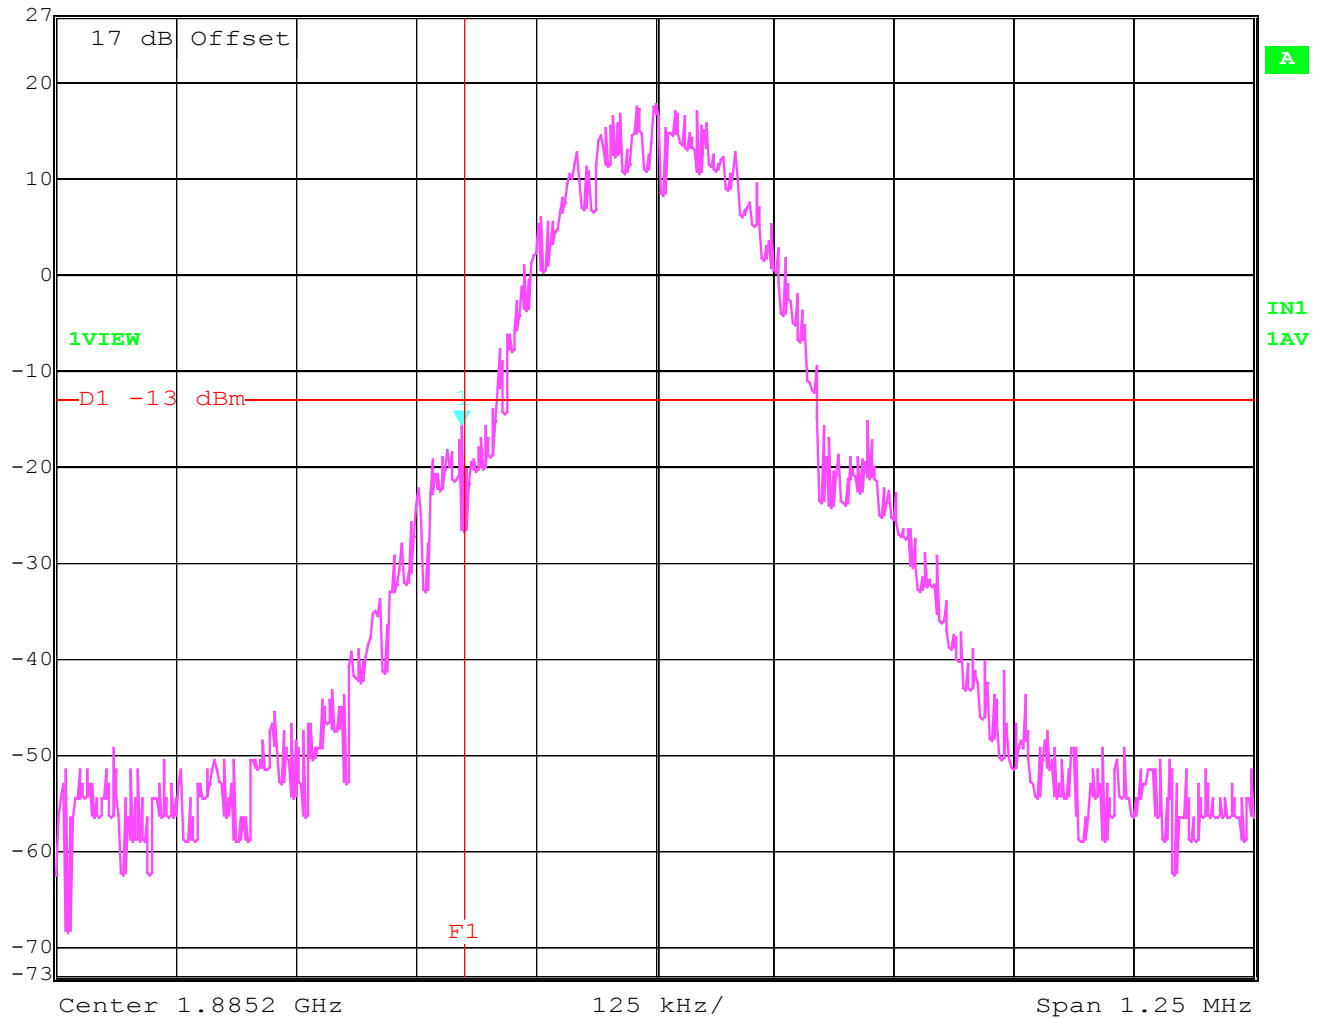

Date: 30.JUL.2003 14:54:01

HIGH BAND EDGE BLOCK-E (PCS-1900)
(Conducted)


§2.1049, §24.238 (a)(b)

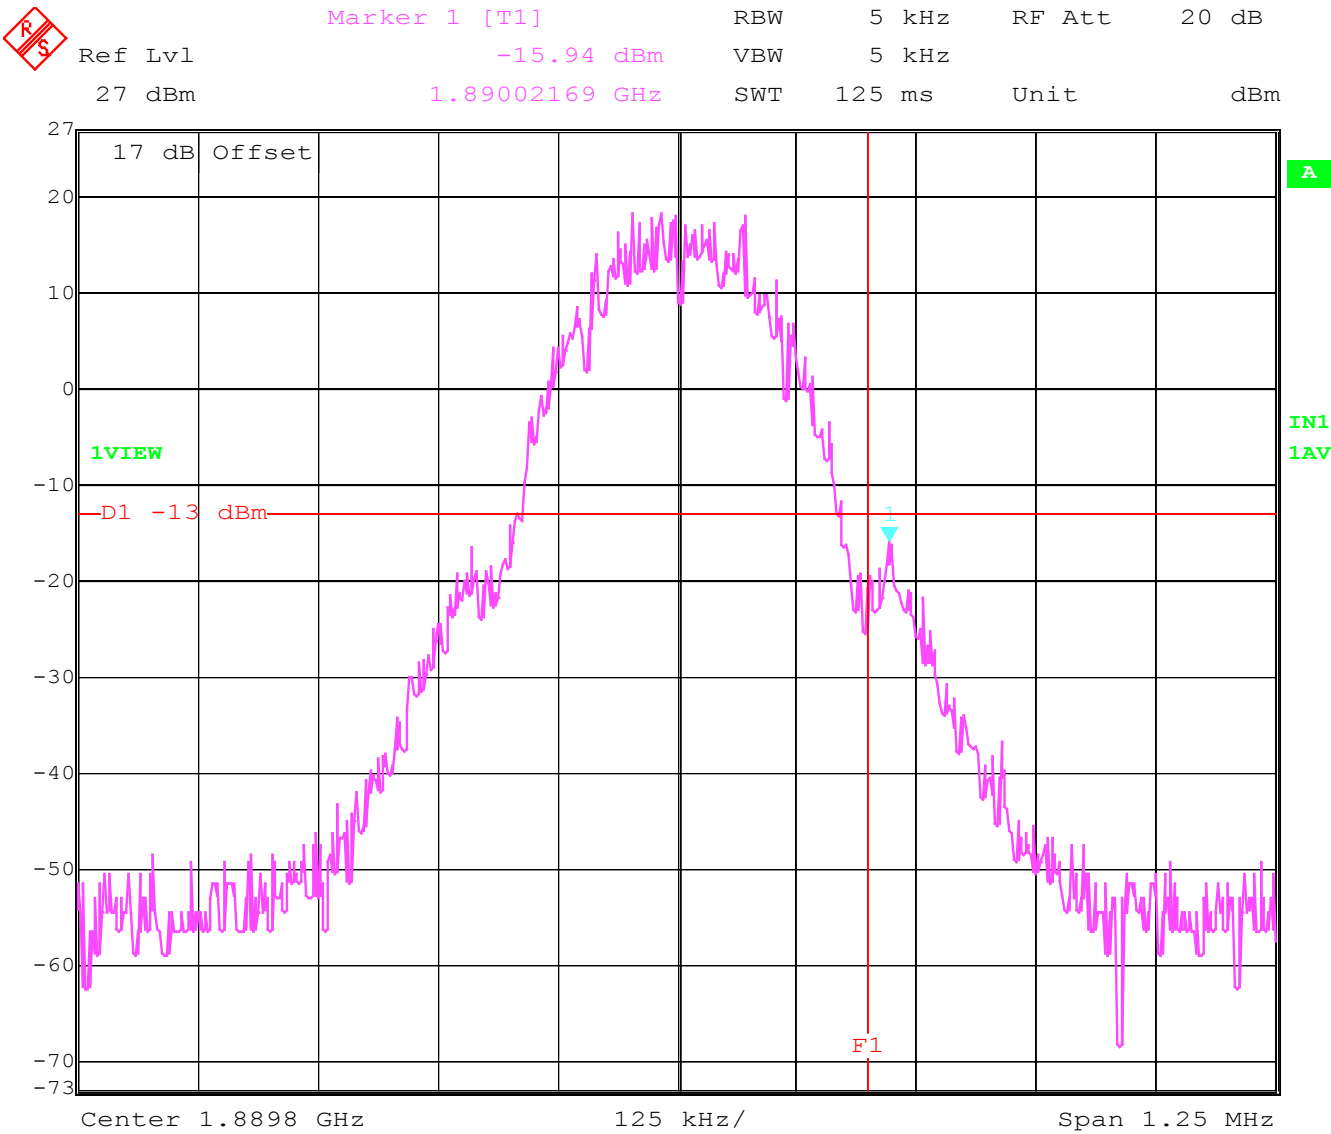

Date: 30.JUL.2003 14:55:09

**LOW BAND EDGE BLOCK-F (PCS-1900)
(Conducted)****§2.1049, §24.238 (a)(b)**


Marker 1 [T1] RBW 5 kHz RF Att 20 dB
Ref Lvl -15.80 dBm VBW 5 kHz
27 dBm 1.88998161 GHz SWT 125 ms Unit dBm

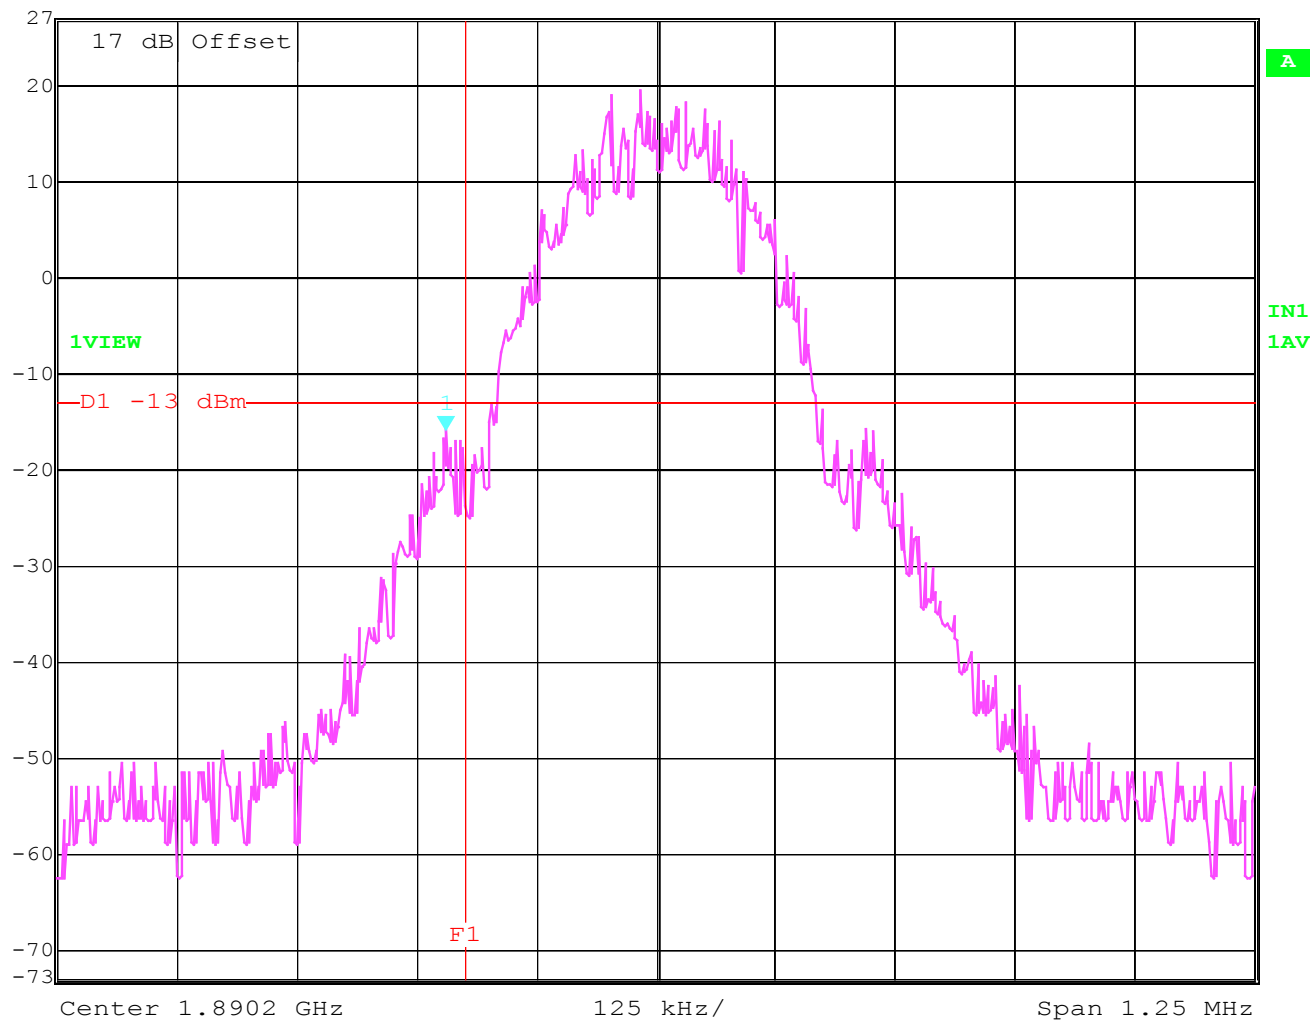

Date: 30.JUL.2003 14:56:16

HIGH BAND EDGE BLOCK-F (PCS-1900)
(Conducted)


§2.1049, §24.238 (a)(b)

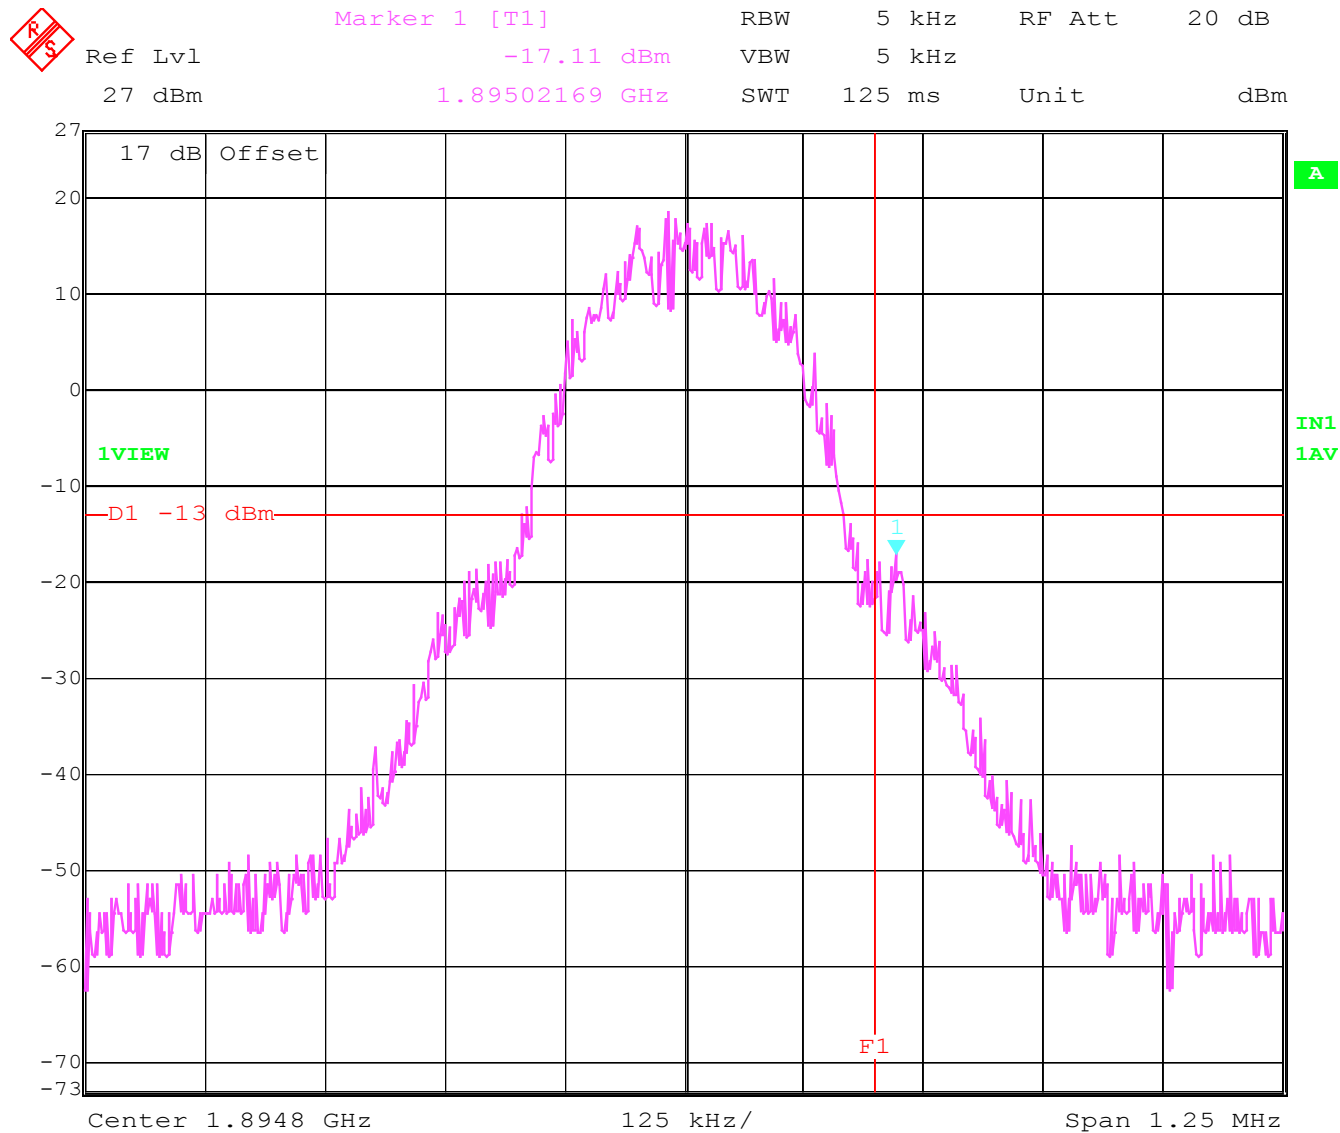

Date: 30.JUL.2003 14:57:21

LOW BAND EDGE BLOCK-C (PCS-1900)
(Conducted)


§2.1049, §24.238 (a)(b)

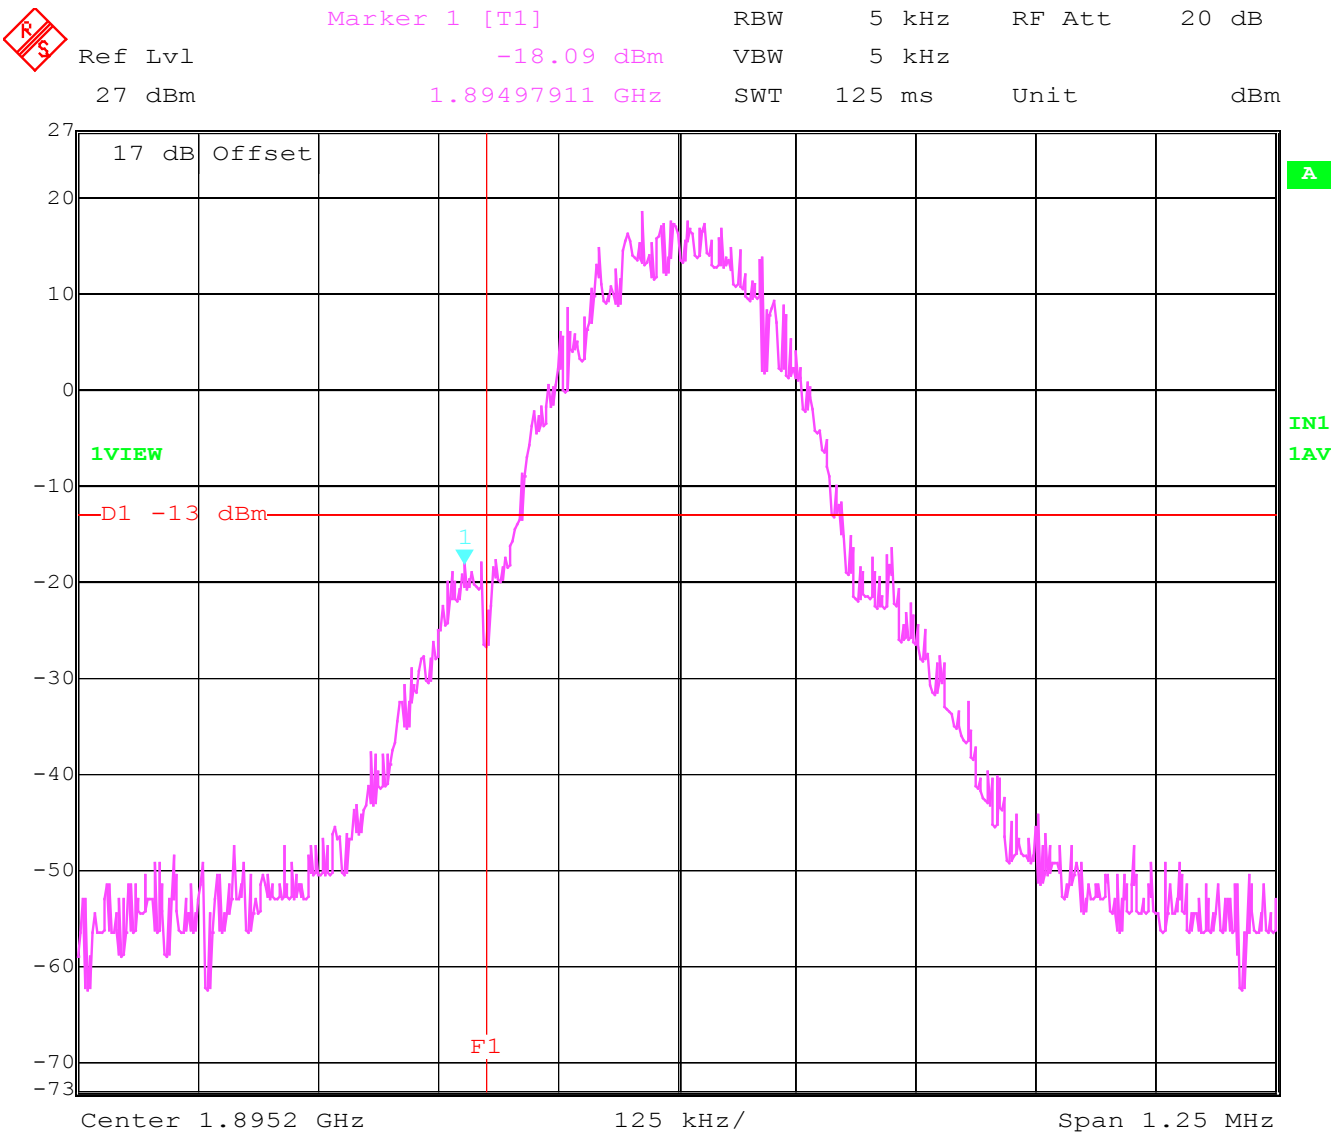

Date: 30.JUL.2003 14:58:56

HIGH BAND EDGE BLOCK-C (PCS-1900)
(Conducted)

§2.1049, §24.238 (a)(b)

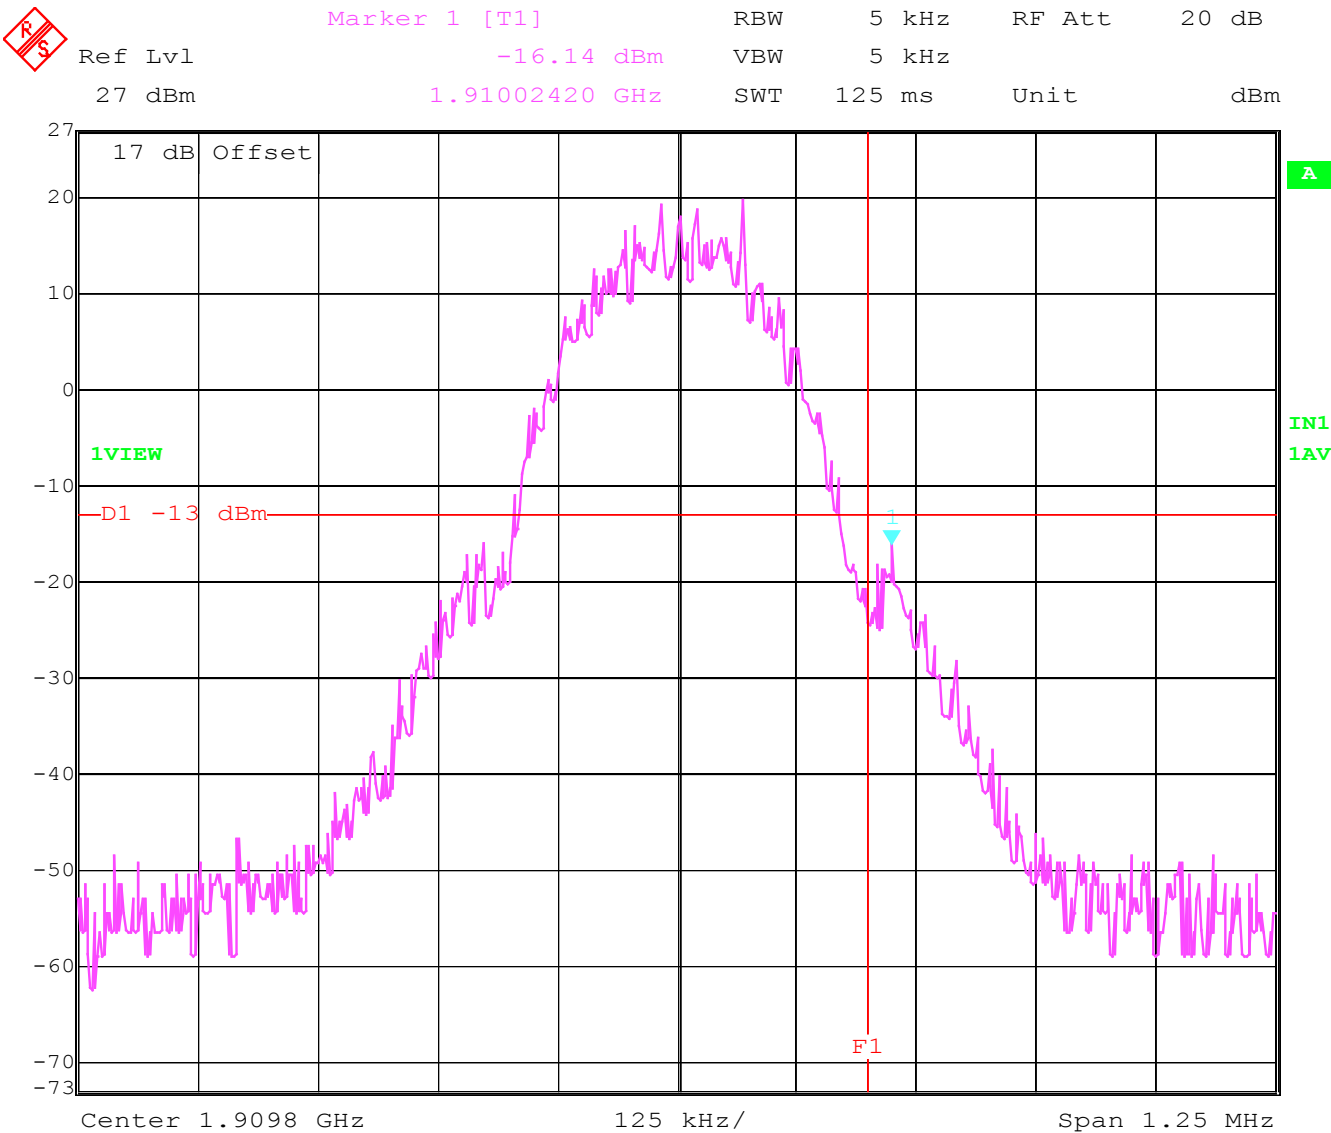

Date: 30.JUL.2003 15:00:10

RECEIVER RADIATED EMISSIONS**SUBCLAUSE § 15.209**


NOTE: The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18GHz and 19.1GHz very short cable connections to the antenna was used to minimize the noise level.

Limits**SUBCLAUSE § 15.209**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

RECEIVER RADIATED EMISSIONS**EUT in Idle Mode: 30MHz – 1GHz****SWEEP TABLE: "FCC 24 Spur 30M-1G"**

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
30MHz	1GHz	Max Peak	Coupled	100KHz

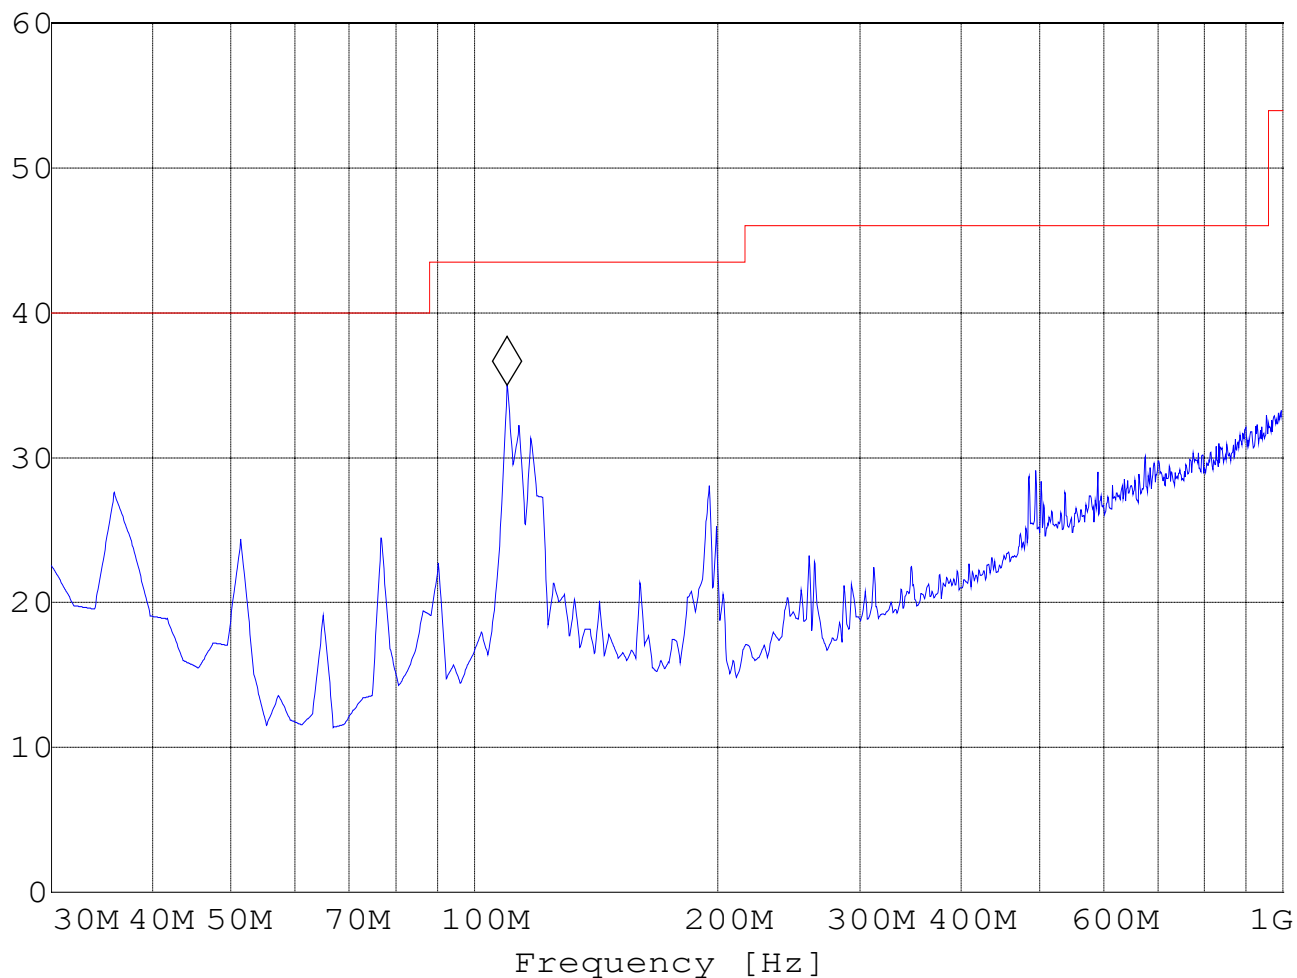Marker: 109.699399 MHz 35.02 dB μ V/mLevel [dB μ V/m]

RECEIVER RADIATED EMISSIONS


EUT in Idle Mode: 1GHz – 3GHz

SWEEP TABLE: "FCC Spuri 1-3G"

Start	Stop	Detector	Meas.	RBW/VBW
Frequency	Frequency		Time	
1GHz	3GHz	Max Peak	Coupled	1 MHz


Marker: 1.9498998 GHz 44.53 dB μ V/m

Level [dB μ V/m]

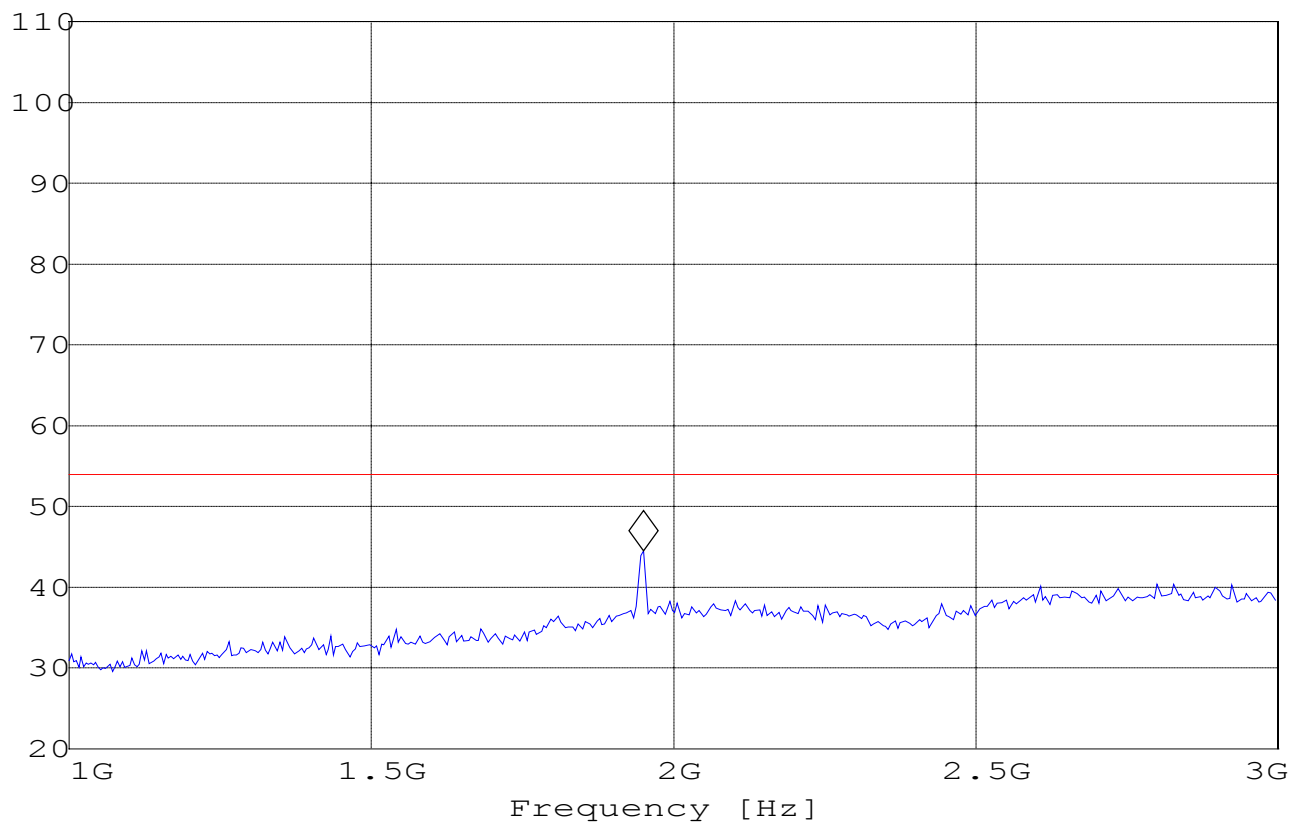

RECEIVER RADIATED EMISSIONS**EUT in Idle Mode: 3GHz – 18GHz*****SWEEP TABLE: "FCC 24 spuri 3-18G"***

<i>Start</i>	<i>Stop</i>	<i>Detector</i>	<i>Meas.</i>	<i>RBW/VBW</i>
<i>Frequency</i>	<i>Frequency</i>		<i>Time</i>	
3GHz	18GHz	Max Peak	Coupled	1 MHz

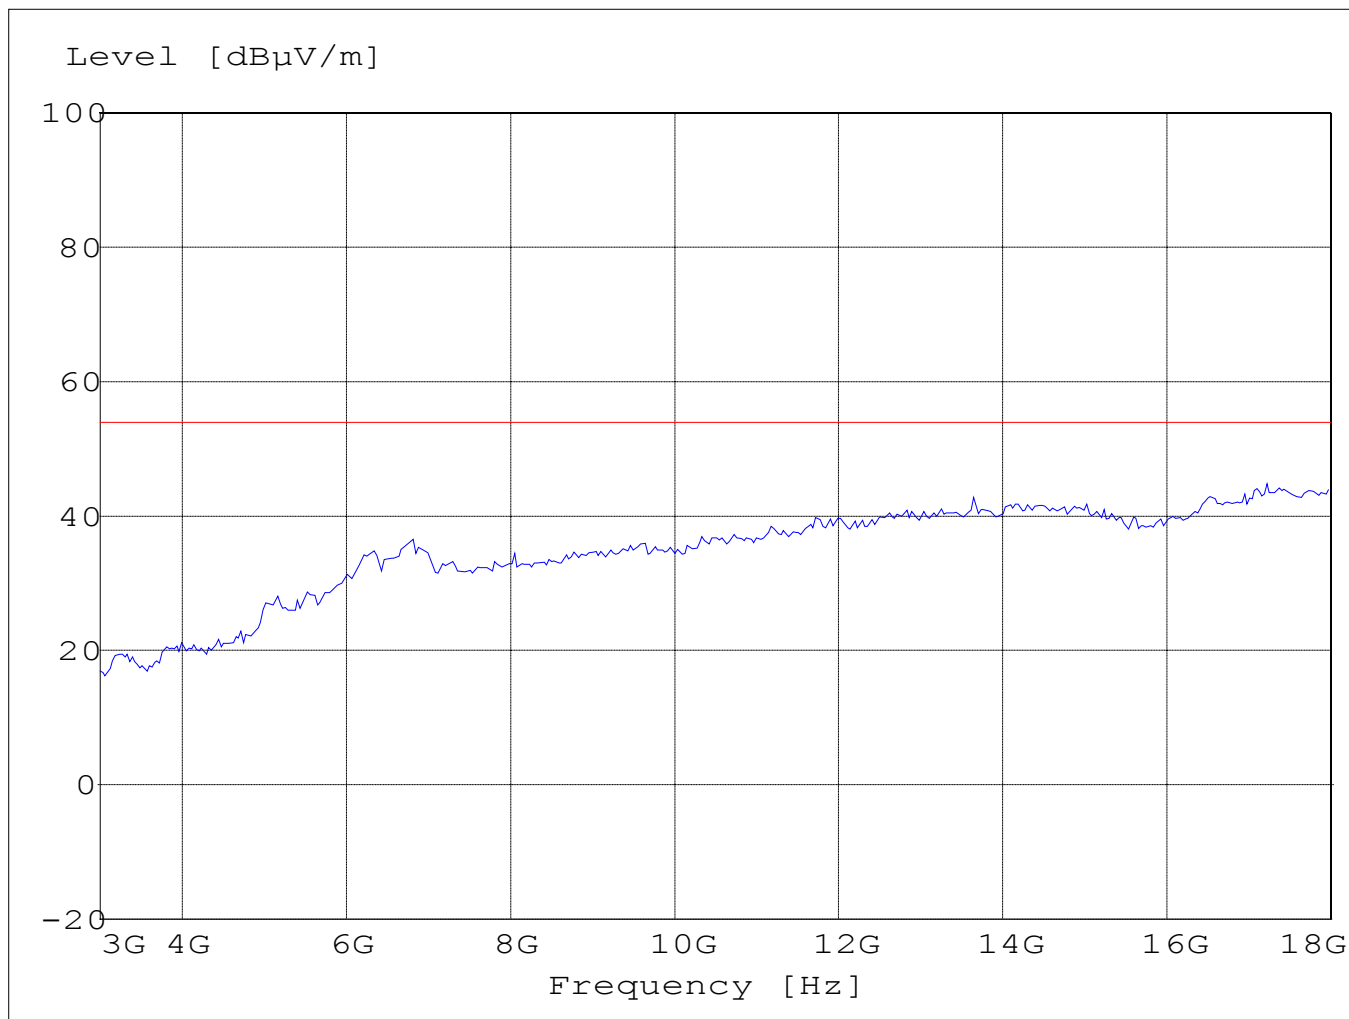


[illegible]

CONDUCTED SPURIOUS EMISSIONS

Channel 512: 30MHz – 20GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency. Noise floor on this plot is higher than others due to the fact that resolution bandwidth on this plot is 3MHz instead of 1MHz like the other 2 plots. There is no visible peak above the limit and EUT still passes the test.

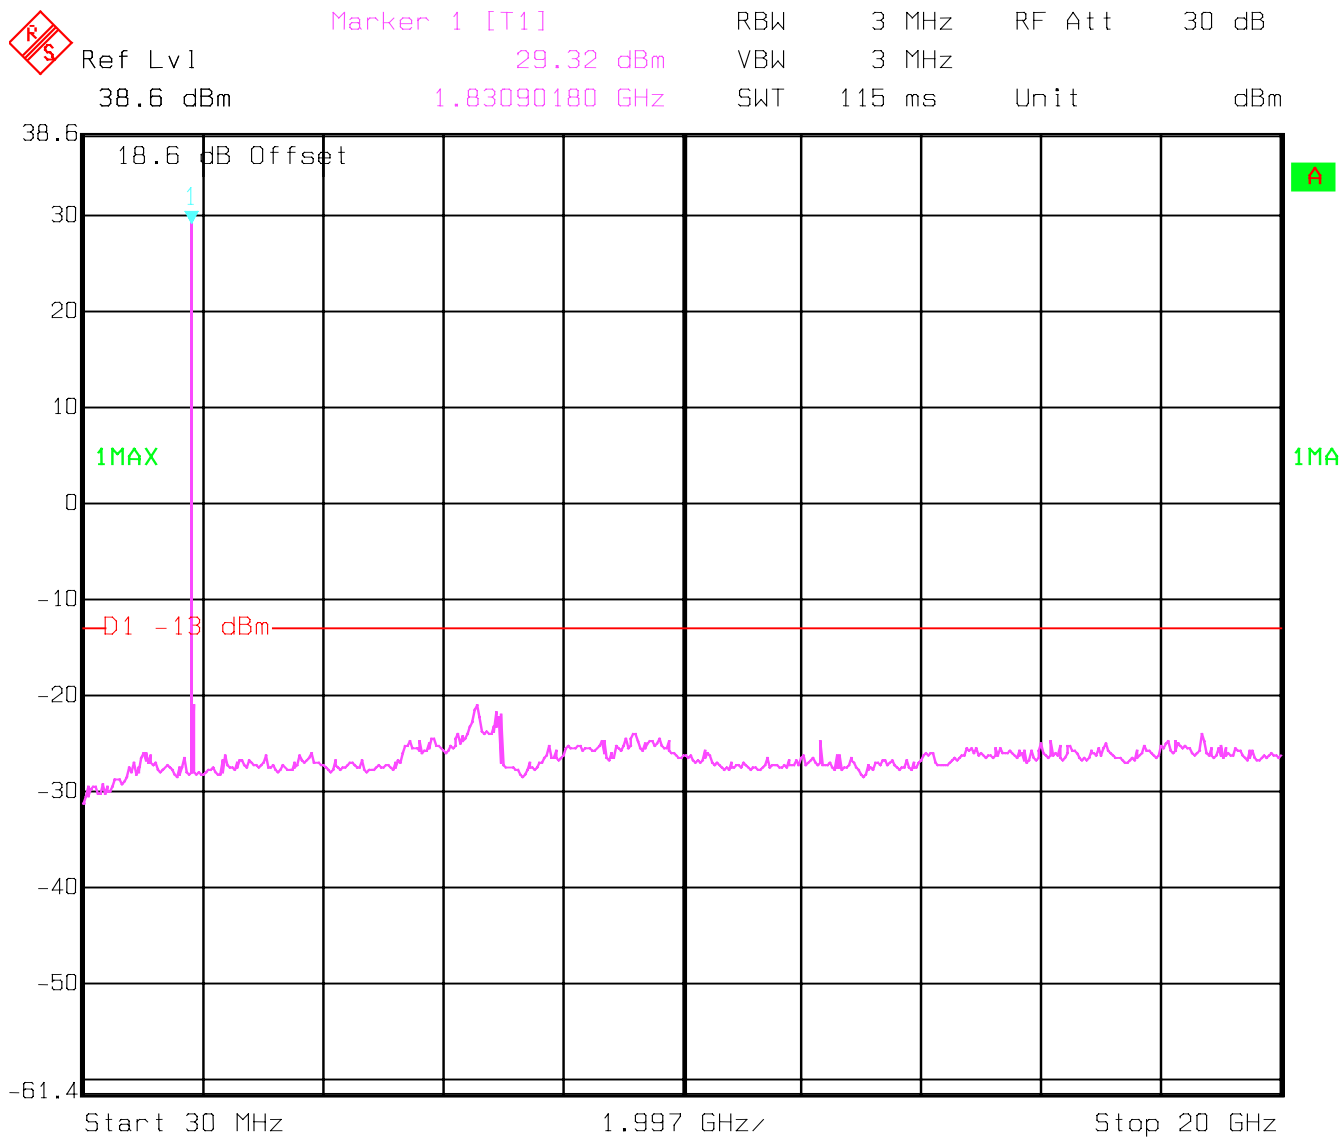


Date: 29.OCT.2002 07:42:34

CONDUCTED SPURIOUS EMISSIONS

Channel 661: 30MHz – 20GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

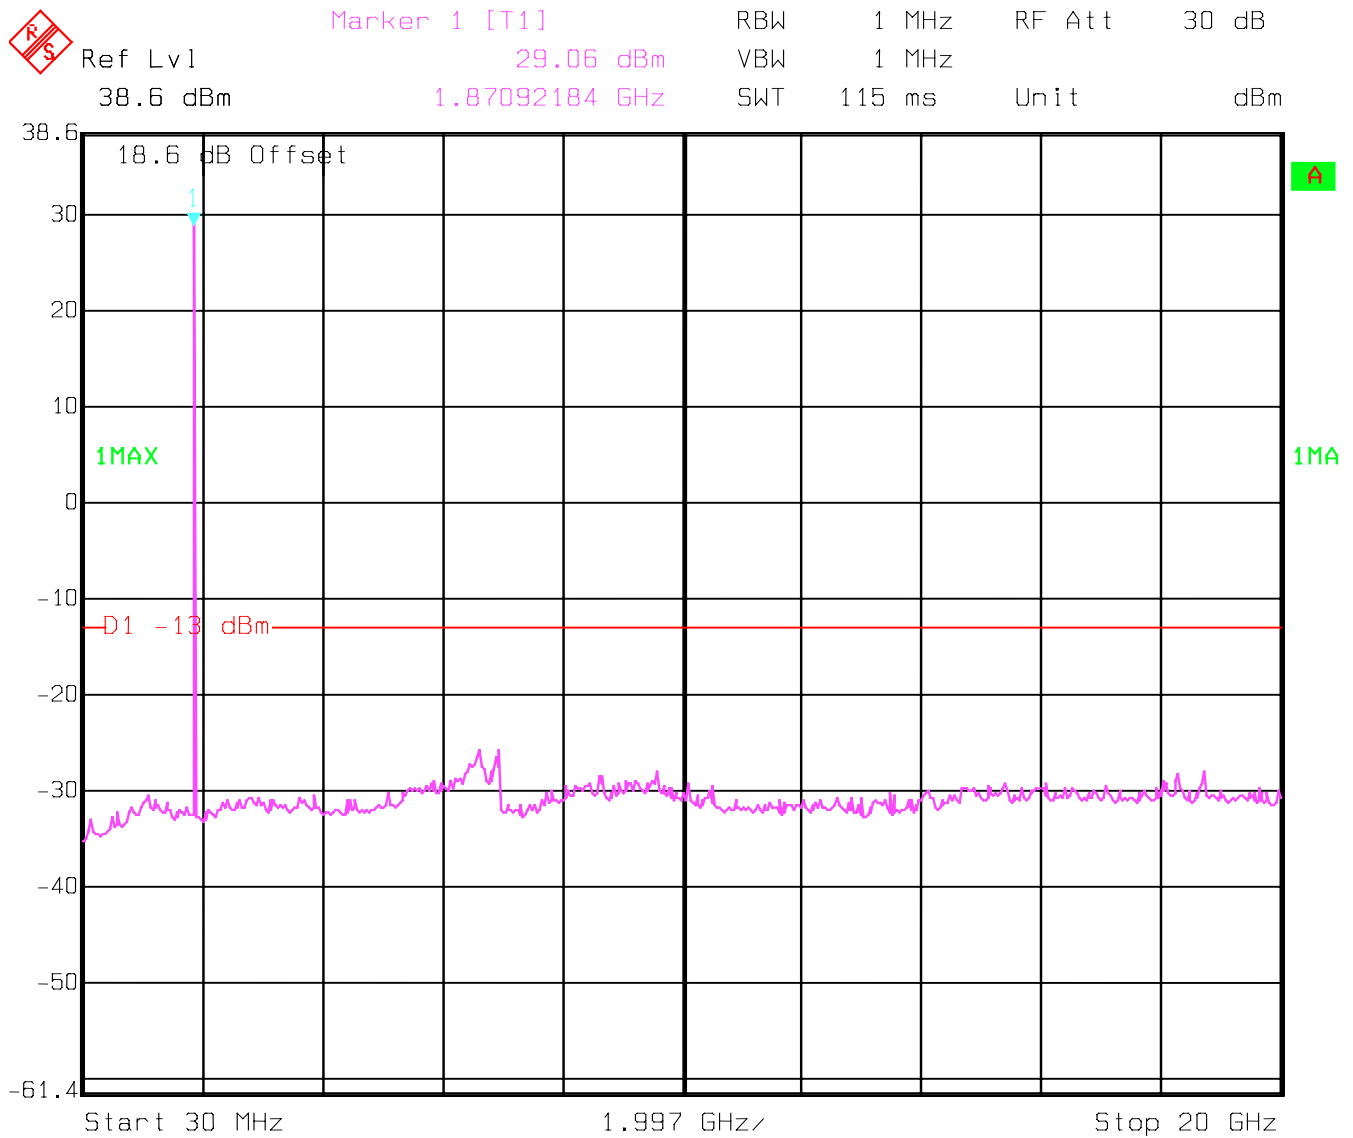


Date: 29.OCT.2002 07:47:58

CONDUCTED SPURIOUS EMISSIONS

Channel 810: 30MHz – 20GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

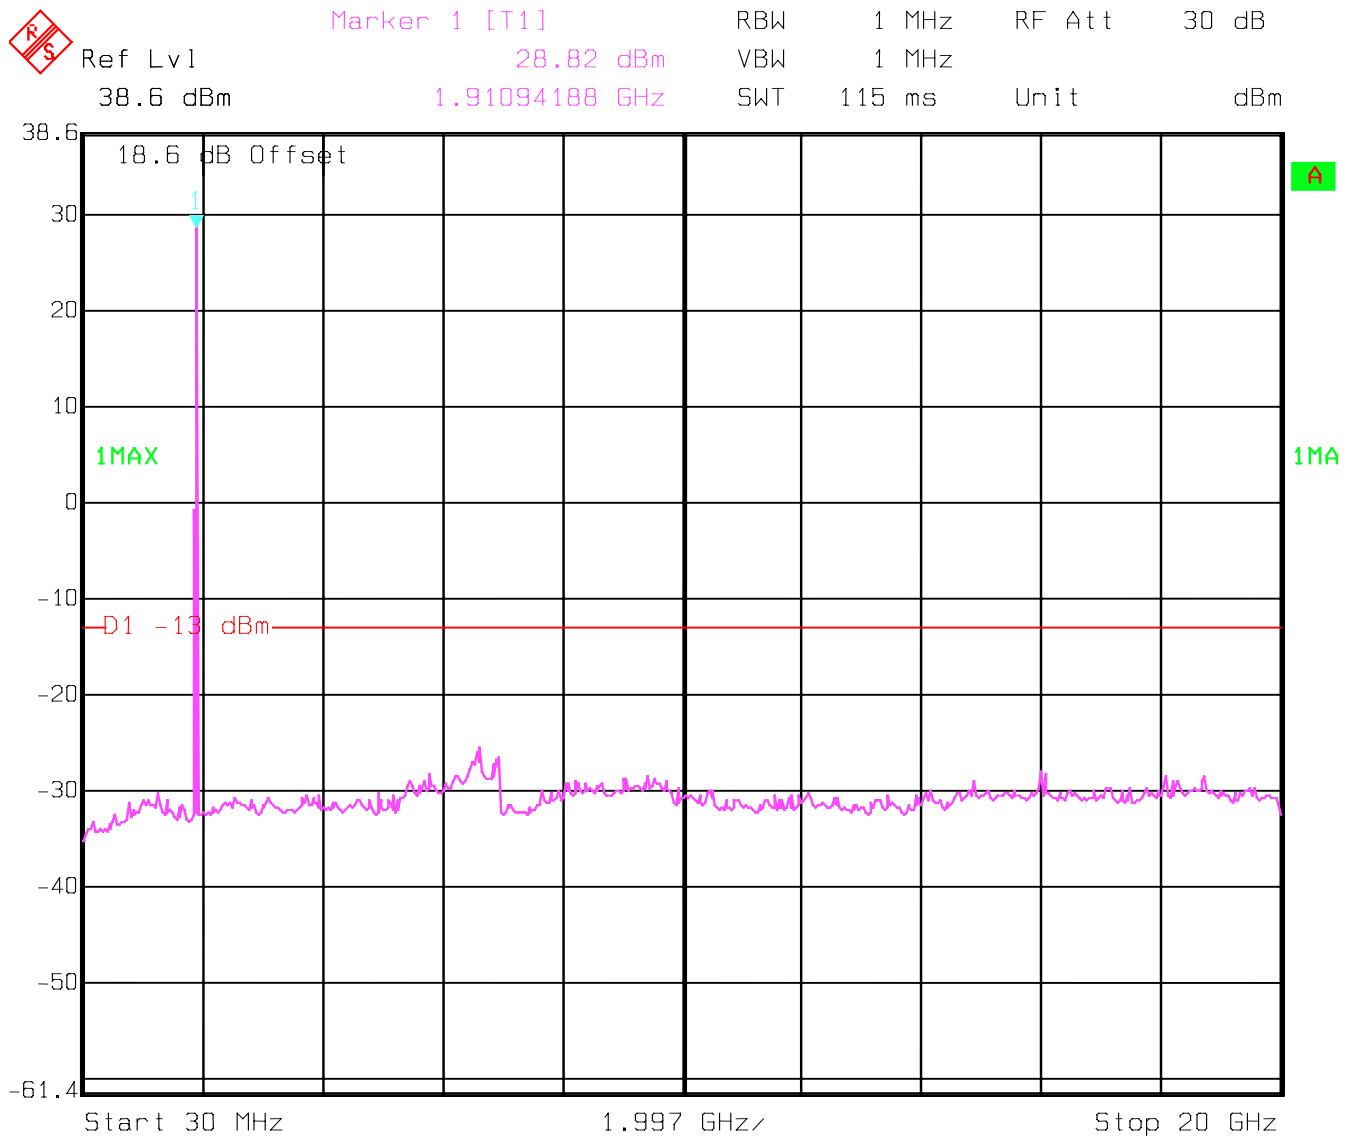


Date: 29.OCT.2002 07:52:43

CONDUCTED SPURIOUS EMISSIONS

Idle mode: 30MHz – 20GHz

Spurious emission limit –13dBm

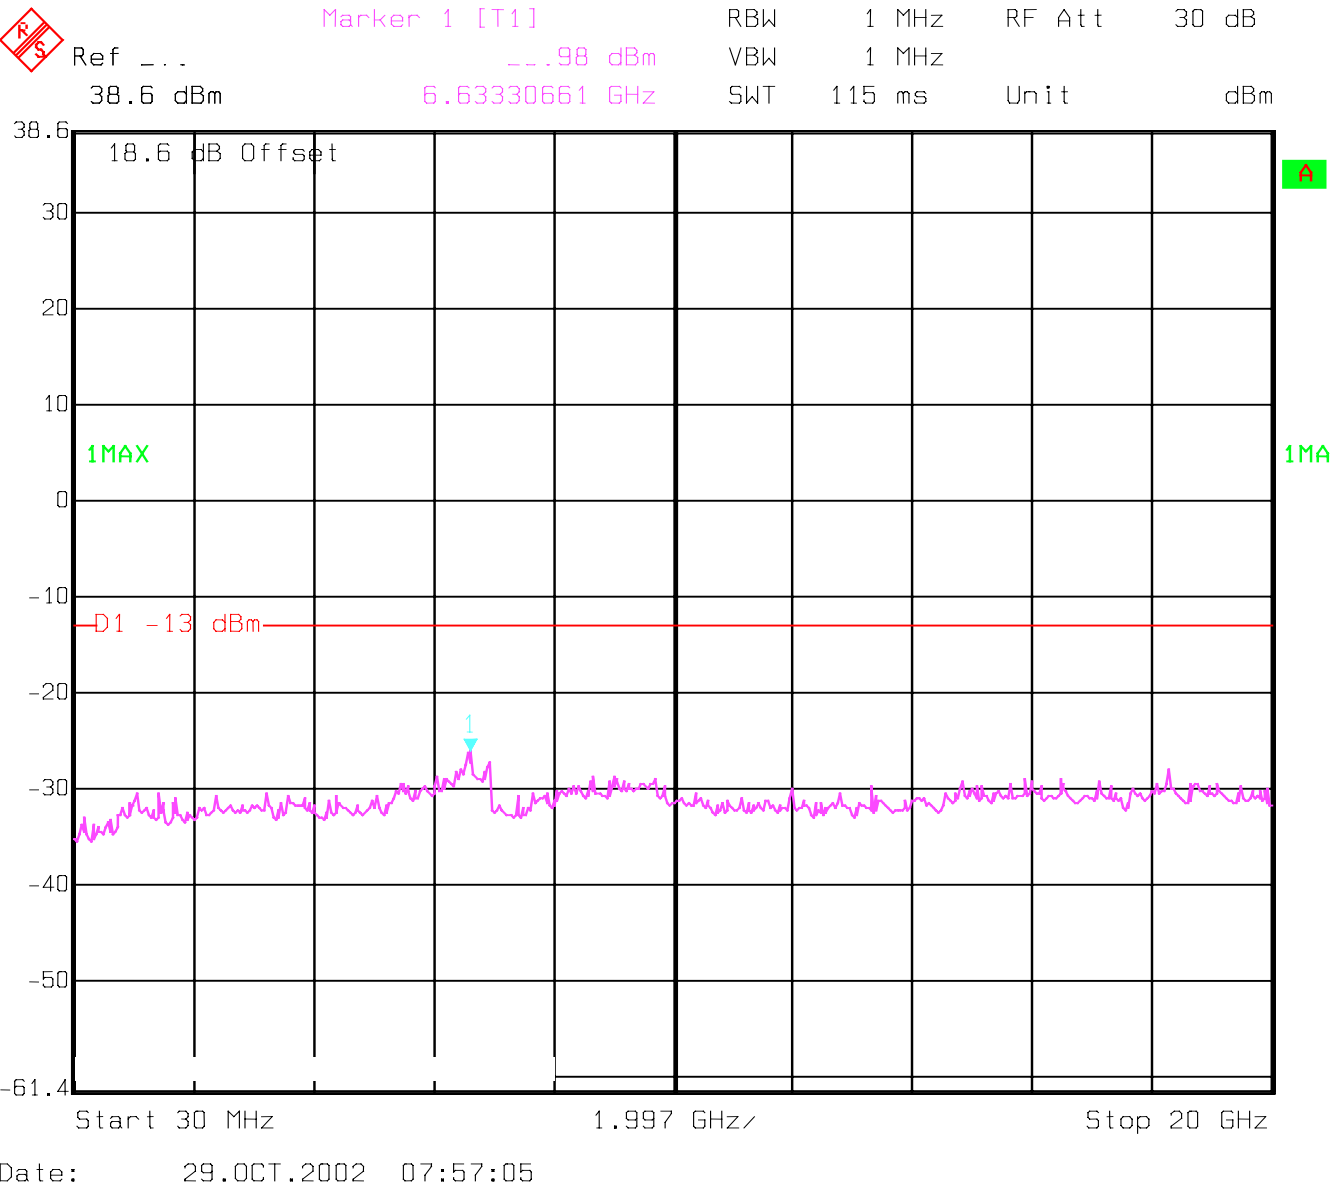

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter plugged in LISN

Technical specification : 15.107 / 15.207 (Revised as of August 20, 2002)


Limit

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

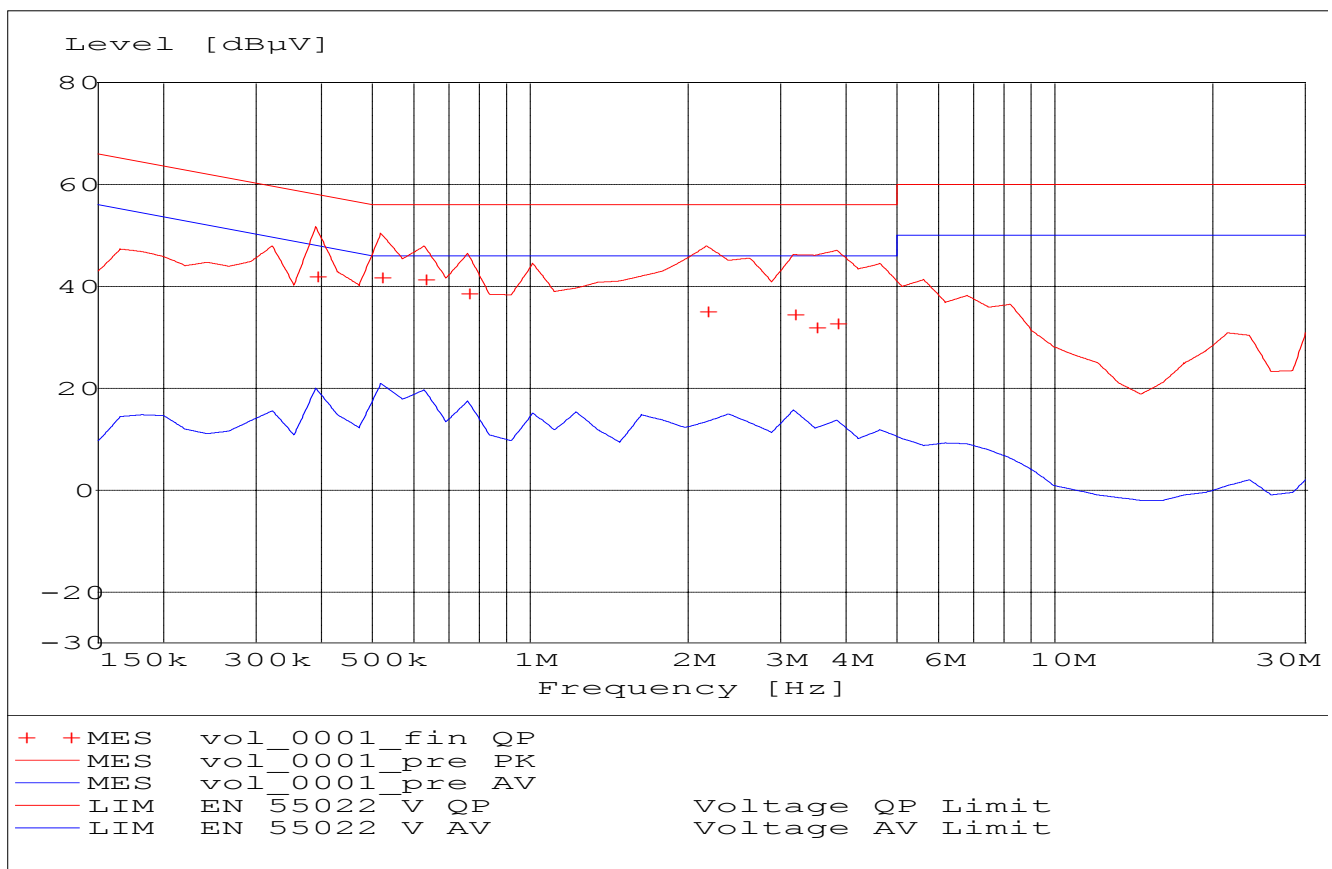

MEASUREMENT RESULT: "vol_0001_fin QP"


10/30/02 1:55PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.389061	41.90	0.0	58	16.2	1	---
0.517841	41.70	0.0	56	14.3	2	---
0.626587	41.30	0.0	56	14.7	2	---
0.758171	38.60	0.0	56	17.4	1	---
2.163149	35.10	0.0	56	20.9	2	---
3.167066	34.50	0.0	56	21.5	1	---
3.483773	31.90	0.0	56	24.1	1	---
3.832150	32.70	0.0	56	23.3	1	---

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
05	Power Amplifier	250W1000	Amplifier Research	300031
06	Biconilog Antenna	3141	EMCO	0005-1186
07	Horn Antenna	SAS-200/571	AH Systems	325
08	Power Splitter	11667B	Hewlett Packard	645348
09	Climatic Chamber	VT4004	Votch	G1115
10	Pre-Amplifier	JS4-00102600	Miteq	00616
11	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807
12	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008

BLOCK DIAGRAMS
Conducted Testing

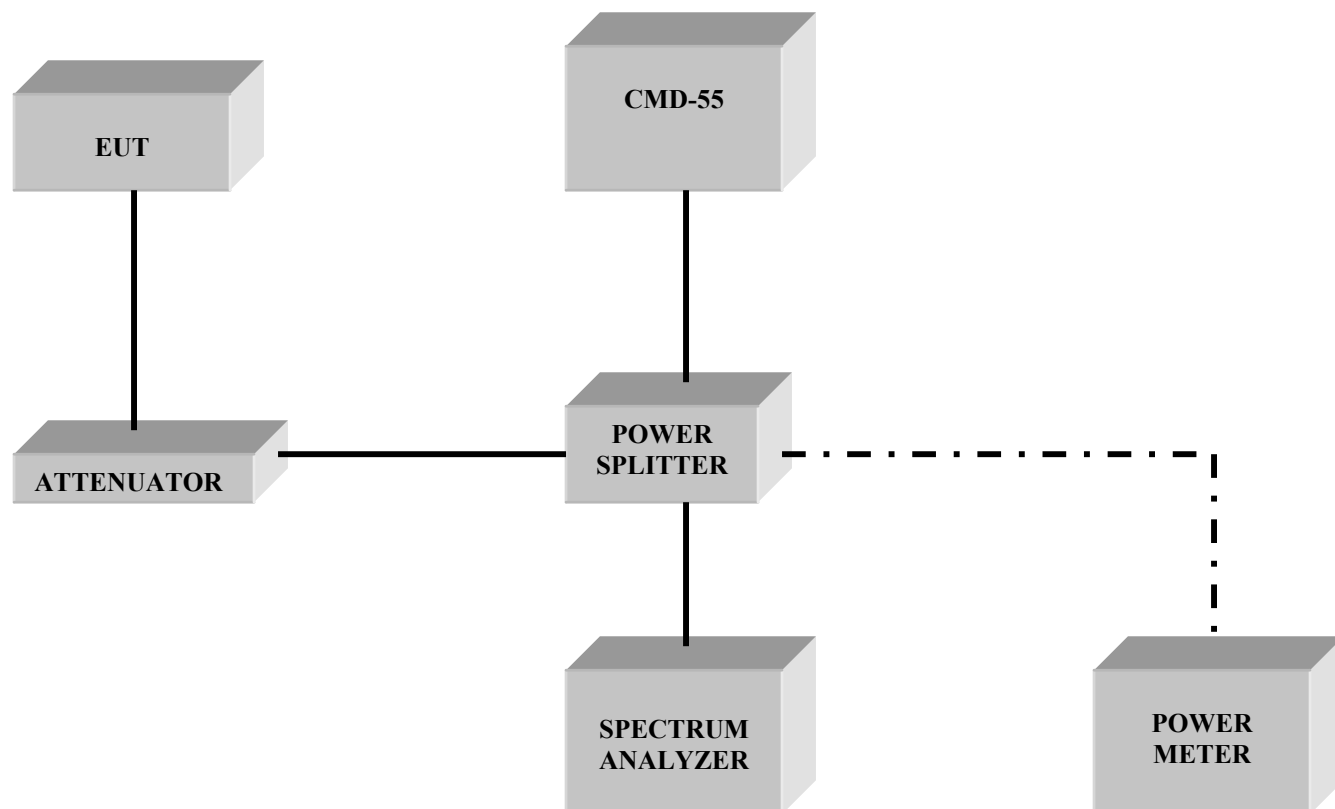

Radiated Testing

ANECHOIC CHAMBER

