



MEASUREMENT REPORT

FCC Part 27

Applicant Name:

Samsung Electronics Co., Ltd.
416 Maetan 3-Dong, Yeongtong-gu
Suwon-si, Gyeonggi-do
443-742, Republic of Korea

Date of Testing:

June 6 - 22, 2012

Test Site/Location:

PCTEST Lab., Columbia, MD, USA

Test Report Serial No.:

0Y1205290743.A3L

FCC ID : A3LSGHI307

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

Application Type:

Certification

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

§2; §27

EUT Type:

Wireless Module

Model(s):

SGH-I307

Test Device Serial No.:

identical prototype [S/N: FJ-153-A]

Mode	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted	
				Max. Power (W)	Max. Power (dBm)
LTE Band 17	706.5 - 713.5	4M51G7D	QPSK	0.204	23.10
LTE Band 17	706.5 - 713.5	4M51W7D	16QAM	0.158	22.00
LTE Band 17	709 - 711	8M91G7D	QPSK	0.196	22.92
LTE Band 17	709 - 711	8M90W7D	16QAM	0.167	22.22
LTE Band 4	1712.5 - 1752.5	4M52G7D	QPSK	0.233	23.68
LTE Band 4	1712.5 - 1752.5	4M52W7D	16QAM	0.183	22.63
LTE Band 4	1715 - 1750	8M95G7D	QPSK	0.231	23.63
LTE Band 4	1715 - 1750	8M93W7D	16QAM	0.197	22.95
LTE Band 4	1717.5 - 1747.5	13M4G7D	QPSK	0.217	23.36
LTE Band 4	1717.5 - 1747.5	13M5W7D	16QAM	0.188	22.75
LTE Band 4	1720 - 1745	17M9G7D	QPSK	0.229	23.60
LTE Band 4	1720 - 1745	17M9W7D	16QAM	0.196	22.93

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested. Test results reported herein relate only to the item(s) tested. I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Power output listed is conducted for Part 27.

PCTEST certifies that no party to this application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


Randy Ortanez
President



FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 1 of 68

TABLE OF CONTENTS


FCC PART 27 MEASUREMENT REPORT	3
1.0 INTRODUCTION	4
1.1 SCOPE	4
1.2 TESTING FACILITY	4
2.0 PRODUCT INFORMATION.....	5
2.1 EQUIPMENT DESCRIPTION	5
2.2 DEVICE CAPABILITIES.....	5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS	5
2.4 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TESTS	6
3.1 MEASUREMENT PROCEDURE	6
3.2 OCCUPIED BANDWIDTH	6
3.3 BLOCK A FREQUENCY RANGE	6
3.4 AWS - BASE FREQUENCY BLOCKS	7
3.5 AWS - MOBILE FREQUENCY BLOCKS	7
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	7
3.7 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS	8
3.8 PEAK-AVERAGE RATIO	8
3.9 FREQUENCY STABILITY / TEMPERATURE VARIATION	8
4.0 TEST EQUIPMENT CALIBRATION DATA	9
5.0 SAMPLE CALCULATIONS	10
6.0 TEST RESULTS.....	11
6.1 SUMMARY.....	11
6.2 TRANSMITTER CONDUCTED OUTPUT POWER DATA.....	12
6.3 BAND 17 RADIATED MEASUREMENTS.....	17
6.4 BAND 4 RADIATED MEASUREMENTS.....	20
6.5 BAND 17 FREQUENCY STABILITY MEASUREMENTS.....	23
6.6 BAND 4 FREQUENCY STABILITY MEASUREMENTS.....	25
7.0 PLOT(S) OF EMISSIONS	27
8.0 CONCLUSION.....	68

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 2 of 68



MEASUREMENT REPORT

FCC Part 27




§2.1033 General Information

APPLICANT: Samsung Electronics Co., Ltd.
APPLICANT ADDRESS: 416 Maetan 3-Dong, Yeongtong-gu
 Suwon-si, Gyeonggi-do, 443-742, Republic of Korea
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §27
BASE MODEL: SGH-I307
FCC ID: A3LSGHI307
FCC CLASSIFICATION: PCS Licensed Transmitter (PCB)
FREQUENCY TOLERANCE: $\pm 0.00025\%$ (2.5 ppm)
Test Device Serial No.: FJ-153-A ☐ Production ☒ Pre-Production ☐ Engineering
DATE(S) OF TEST: June 6 - 22, 2012
TEST REPORT S/N: 0Y1205290743.A3L

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		 Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 3 of 68

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

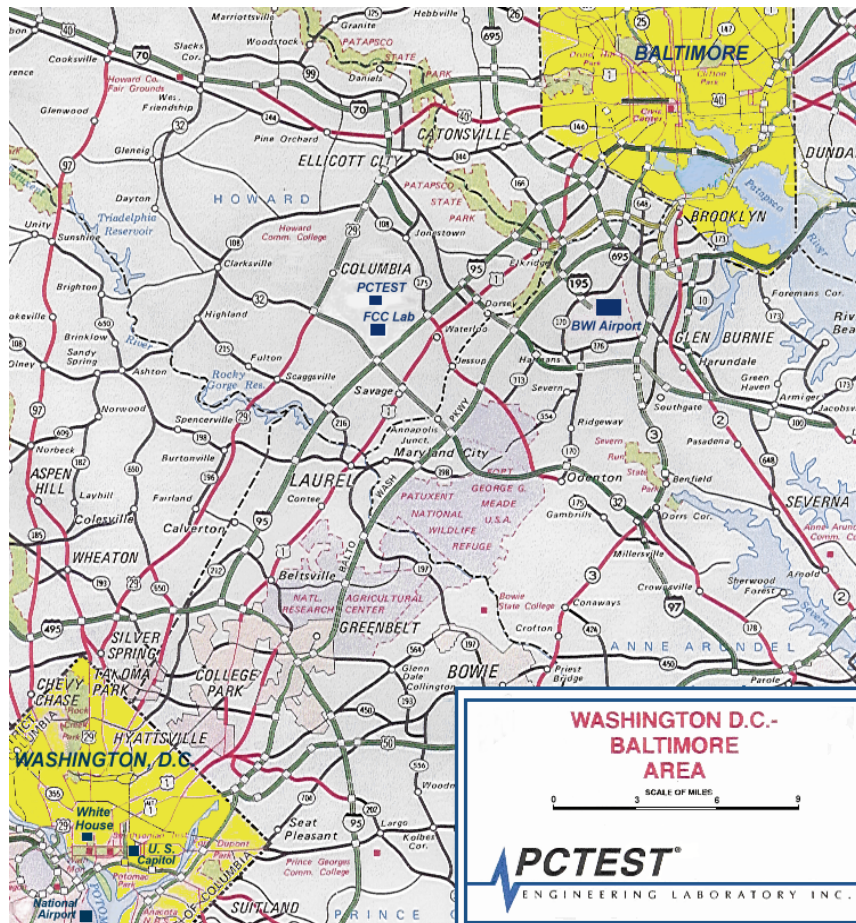


Figure 1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 4 of 68

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Wireless Module FCC ID: A3LSGHI307**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function. The EUT consisted of the following component(s):

Trade Name / Base Model	FCC ID	Description
Samsung / Model: SGH-I307	A3LSGHI307	Wireless Module

Table 2-1. EUT Equipment Description

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 WCDMA/HSPA, Band 4 (5/10/15/20MHz BW), Band 17 (5/10 MHz BW) LTE

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase..

Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 5 of 68

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (See Figure 2). The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This power level was recorded using a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded with the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

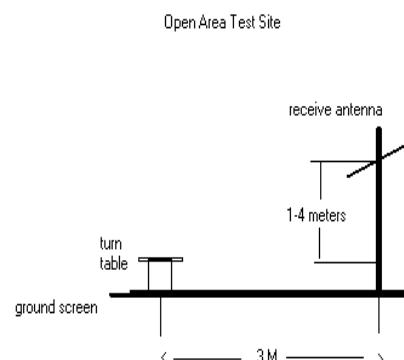


Figure 2. Diagram of 3-meter outdoor test range

Deviation from Measurement Procedure.....None

3.2 Occupied Bandwidth

§2.1049, RSS-Gen (4.6.1)

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

3.3 Block A Frequency Range

§27.5(c)


698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
Block B: 704-710 MHz and 734-740 MHz; and
Block C: 710-716 MHz and 740-746 MHz.

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 6 of 68


3.4 AWS - Base Frequency Blocks

§27.5(h)

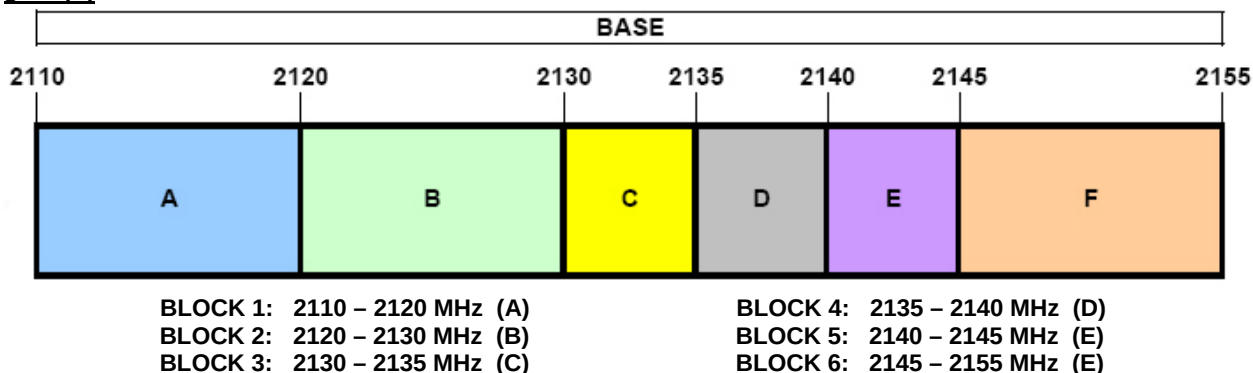

3.5 AWS - Mobile Frequency Blocks

§27.5(h)

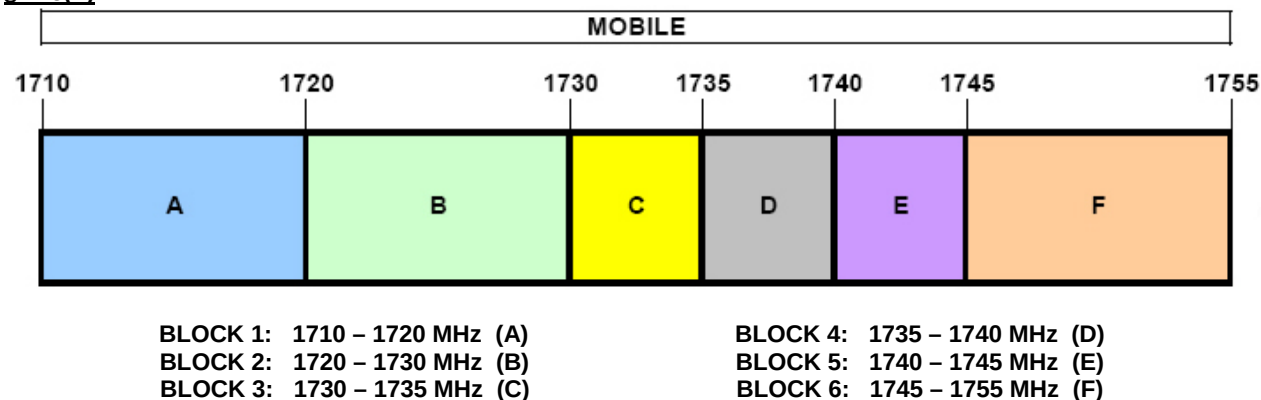

3.6 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §27.53(g), §27.53(h); RSS-132 (4.5.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. For Bands 5 and 12, Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. For Bands 2 and 4, compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 7 of 68

3.7 Radiated Power and Radiated Spurious Emissions

§2.1053, §27.53(g), §27.53(h); RSS-132(4.5.1.2), RSS-133 (6.5.1)

Radiated power and radiated spurious emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This level is then measured with a broadband average power meter. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive average power meter reading. This spurious level is recorded with the power meter. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

3.8 Peak-Average Ratio

§27.50(d)(5), RSS-133 (6.4)

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

3.9 Frequency Stability / Temperature Variation

§2.1055, §27.54, RSS-132 (4.3), RSS-133 (6.3)

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification –For Bands 4 and 17, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A sufficient stabilization period at each temperature shall be used prior to each frequency requirement.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 8 of 68

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	1/25/2012	Annual	1/25/2013	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
-	LTx2	Licensed Transmitter Cable Set	2/17/2012	Annual	2/17/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	1937A03348
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2011	Annual	10/10/2012	3613A00315
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	2/15/2012	Annual	2/15/2013	US42510244
Agilent	E8267C	Vector Signal Generator	10/10/2011	Biennial	10/10/2013	US42340152
Agilent	N9020A	MXA Signal Analyzer	10/10/2011	Annual	10/10/2012	US46470561
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	ML2495A	Power Meter	10/13/2011	Annual	10/13/2012	1039008
Espec	ESX-2CA	Environmental Chamber	7/21/2011	Annual	7/21/2012	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/22/2011	Annual	7/22/2012	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	10/1/2010	Biennial	10/1/2012	128337
Mini-Circuits	VHF-1200+	High Pass Filter	1/15/2012	Annual	1/15/2013	30923
Mini-Circuits	VHF-3100+	High Pass Filter	1/15/2012	Annual	1/15/2013	30841
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A		N/A	100976
Rohde & Schwarz	RS-PR18	1-18 GHz Pre-Amplifier	6/9/2011	Annual	6/9/2012	100071
Rohde & Schwarz	ESU26	EMI Test Receiver	12/15/2011	Annual	12/15/2012	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	11/14/2011	Biennial	11/14/2013	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	11/14/2011	Biennial	11/14/2013	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/26/2012	Biennial	1/26/2014	A051107

Table 4-1. Test Equipment

Note: Rohde & Schwarz Model: CMW500 was used for signaling purposes only and not for calibrated measurements. Testing utilizing Rohde & Schwarz Model: RS-PR18 Pre-Amplifier was performed prior to the calibration due date of June 9, 2012.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 9 of 68

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Amplitude/Angle Modulated

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average receive power meter reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 10 of 68

6.0 TEST RESULTS

6.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSGHI307
 FCC Classification: PCS Licensed Transmitter (PCB)
 Mode(s): LTE

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
2.1049	RSS-Gen (4.6.1) RSS-133 (2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.0
2.1051, 27.53(g), 27.53(h)	RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions		PASS	Section 7.0
27.50(d)(5)	RSS-133 (6.4)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS	Section 7.0
2.1046	RSS-132 (4.4) RSS-133 (4.1)	Transmitter Conducted Output Power	N/A		PASS	Section 6.2
2.1053, 27.53(g), 27.53(h)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Undesirable Emissions	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions	RADIATED	PASS	Section 6.3, 6.4
2.1055, 27.54	RSS-132 (4.3) RSS-133 (6.3)	Frequency Stability	$< \text{Within authorized}$ frequency band		PASS	Section 6.5, 6.6

Table 6-1. Summary of Test Results

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 11 of 68

6.2 Transmitter Conducted Output Power Data

§2.1046; RSS-132 (4.4), RSS-133 (4.1)

The Samsung 850/1900 WCDMA/HSPA, Band 4 (5/10/15/20MHz BW), Band 17 (5/10 MHz BW) LTE Wireless Module FCC ID: A3LSGHI307 was tested while placed in a circuit board where DC power was provided via USB connection. The RF port of the module was connected to a Rohde & Schwarz Base Station Simulator (Model: CMW500) to establish an RF link in LTE mode. The parameters on the CMW500 were set to achieve maximum power from the module and the conducted powers below were recorded.

Freq. (MHz)	3GPP LTE Band	MCS Level	Modulation	Bandwidth	RB Size	Resource Block Offset	Maximum Average Power [dBm]
706.5	Band 17	0	QPSK	5 MHz	1	0	23.08
706.5		11	16QAM		1	0	21.39
706.5		0	QPSK		1	24	22.93
706.5		20	16QAM		1	24	21.30
706.5		0	QPSK		12	6	21.85
706.5		11	16QAM		12	6	20.63
706.5		0	QPSK		25	0	21.83
706.5		11	16QAM		25	0	21.25
710		0	QPSK		1	0	23.10
710		11	16QAM		1	0	21.81
710		0	QPSK		1	24	22.92
710		20	16QAM		1	24	21.63
710		0	QPSK		12	6	21.76
710		11	16QAM		12	6	20.74
710		0	QPSK		25	0	21.79
710		11	16QAM		25	0	21.16
713.5		0	QPSK		1	0	22.95
713.5		11	16QAM		1	0	21.87
713.5		0	QPSK		1	24	22.95
713.5		20	16QAM		1	24	22.00
713.5		0	QPSK		12	6	21.66
713.5		11	16QAM		12	6	20.98
713.5		0	QPSK		25	0	21.65
713.5		11	16QAM		25	0	20.37

Table 6-2. Conducted Output Power (Band 17 – 5MHz)

FCC ID: A3LSGHI307			FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 12 of 68		

Freq. (MHz)	3GPP LTE Band	MCS Level	Modulation	Bandwidth	RB Size	Resource Block Offset	Maximum Average Power [dBm]
709	Band 17	0	QPSK	10 MHz	1	0	22.92
709		11	16QAM		1	0	22.22
709		0	QPSK		1	49	22.74
709		20	16QAM		1	49	21.85
709		0	QPSK		25	12	21.88
709		11	16QAM		25	12	20.58
709		0	QPSK		50	0	21.75
709		11	16QAM		50	0	20.86
710		0	QPSK		1	0	22.91
710		11	16QAM		1	0	21.74
710		0	QPSK		1	49	22.80
710		20	16QAM		1	49	21.71
710		0	QPSK		25	12	21.76
710		11	16QAM		25	12	20.92
710		0	QPSK		50	0	21.67
710		11	16QAM		50	0	20.93
711		0	QPSK		1	0	22.76
711		11	16QAM		1	0	21.96
711		0	QPSK		1	49	22.51
711		20	16QAM		1	49	21.59
711		0	QPSK		25	12	21.91
711		11	16QAM		25	12	20.87
711		0	QPSK		50	0	21.64
711		11	16QAM		50	0	20.34

Table 6-3. Conducted Output Power (Band 17 – 10MHz)

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 			Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 13 of 68

Freq. (MHz)	3GPP LTE Band	MCS Level	Modulation	Bandwidth	RB Size	Resource Block Offset	Maximum Average Power [dBm]
1712.5	Band 4	0	QPSK	5 MHz	1	0	23.68
1712.5		11	16QAM	5 MHz	1	0	22.63
1712.5		0	QPSK	5 MHz	1	24	23.47
1712.5		11	16QAM	5 MHz	1	24	22.41
1712.5		0	QPSK	5 MHz	12	6	22.56
1712.5		11	16QAM	5 MHz	12	6	21.46
1712.5		0	QPSK	5 MHz	25	0	22.61
1712.5		11	16QAM	5 MHz	25	0	21.88
1715		0	QPSK	10 MHz	1	0	23.63
1715		11	16QAM	10 MHz	1	0	22.95
1715		0	QPSK	10 MHz	1	49	23.26
1715		11	16QAM	10 MHz	1	49	22.73
1715		0	QPSK	10 MHz	25	12	22.52
1715		11	16QAM	10 MHz	25	12	21.20
1715		0	QPSK	10 MHz	50	0	22.36
1715		11	16QAM	10 MHz	50	0	21.47
1717.5		0	QPSK	15 MHz	1	0	23.36
1717.5		11	16QAM	15 MHz	1	0	22.75
1717.5		0	QPSK	15 MHz	1	74	22.91
1717.5		11	16QAM	15 MHz	1	74	22.22
1717.5		0	QPSK	15 MHz	36	19	22.36
1717.5		11	16QAM	15 MHz	36	19	21.54
1717.5		0	QPSK	15 MHz	75	0	22.31
1717.5		11	16QAM	15 MHz	75	0	21.28
1720		0	QPSK	20 MHz	1	0	23.60
1720		11	16QAM	20 MHz	1	0	22.93
1720		0	QPSK	20 MHz	1	99	22.89
1720		11	16QAM	20 MHz	1	99	22.41
1720		0	QPSK	20 MHz	50	24	22.43
1720		11	16QAM	20 MHz	50	24	21.55
1720		0	QPSK	20 MHz	100	0	22.40
1720		11	16QAM	20 MHz	100	0	21.50

Table 6-4. Conducted Output Power (Band 4 – Low Channel)

FCC ID: A3LSGHI307			FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 14 of 68		

Freq. (MHz)	3GPP LTE Band	MCS Level	Modulation	Bandwidth	RB Size	Resource Block Offset	Maximum Average Power [dBm]
1732.5	Band 4	0	QPSK	5 MHz	1	0	23.06
1732.5		11	16QAM	5 MHz	1	0	22.08
1732.5		0	QPSK	5 MHz	1	24	23.21
1732.5		11	16QAM	5 MHz	1	24	22.14
1732.5		0	QPSK	5 MHz	12	6	22.16
1732.5		11	16QAM	5 MHz	12	6	21.11
1732.5		0	QPSK	5 MHz	25	0	22.25
1732.5		11	16QAM	5 MHz	25	0	21.50
1732.5		0	QPSK	10 MHz	1	0	22.99
1732.5		11	16QAM	10 MHz	1	0	21.90
1732.5		0	QPSK	10 MHz	1	49	23.22
1732.5		11	16QAM	10 MHz	1	49	21.91
1732.5		0	QPSK	10 MHz	25	12	22.19
1732.5		11	16QAM	10 MHz	25	12	21.33
1732.5		0	QPSK	10 MHz	50	0	22.36
1732.5		11	16QAM	10 MHz	50	0	21.51
1732.5		0	QPSK	15 MHz	1	0	23.00
1732.5		11	16QAM	15 MHz	1	0	22.04
1732.5		0	QPSK	15 MHz	1	74	23.33
1732.5		11	16QAM	15 MHz	1	74	22.31
1732.5		0	QPSK	15 MHz	36	19	22.23
1732.5		11	16QAM	15 MHz	36	19	21.22
1732.5		0	QPSK	15 MHz	75	0	22.31
1732.5		11	16QAM	15 MHz	75	0	21.27
1732.5		0	QPSK	20 MHz	1	0	23.03
1732.5		11	16QAM	20 MHz	1	0	22.21
1732.5		0	QPSK	20 MHz	1	99	23.24
1732.5		11	16QAM	20 MHz	1	99	22.41
1732.5		0	QPSK	20 MHz	50	24	22.30
1732.5		11	16QAM	20 MHz	50	24	21.32
1732.5		0	QPSK	20 MHz	100	0	22.44
1732.5		11	16QAM	20 MHz	100	0	21.44

Table 6-5. Conducted Output Power (Band 4 – Mid Channel)

FCC ID: A3LSGHI307			FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module			Page 15 of 68

Freq. (MHz)	3GPP LTE Band	MCS Level	Modulation	Bandwidth	RB Size	Resource Block Offset	Maximum Average Power [dBm]
1752.5	Band 4	0	QPSK	5 MHz	1	0	23.66
1752.5		11	16QAM	5 MHz	1	0	22.19
1752.5		0	QPSK	5 MHz	1	24	23.36
1752.5		11	16QAM	5 MHz	1	24	21.88
1752.5		0	QPSK	5 MHz	12	6	22.32
1752.5		11	16QAM	5 MHz	12	6	21.14
1752.5		0	QPSK	5 MHz	25	0	22.35
1752.5		11	16QAM	5 MHz	25	0	21.69
1750		0	QPSK	10 MHz	1	0	23.36
1750		11	16QAM	10 MHz	1	0	22.68
1750		0	QPSK	10 MHz	1	49	23.22
1750		11	16QAM	10 MHz	1	49	22.65
1750		0	QPSK	10 MHz	25	12	22.38
1750		11	16QAM	10 MHz	25	12	21.11
1750		0	QPSK	10 MHz	50	0	22.19
1750		11	16QAM	10 MHz	50	0	21.36
1747.5		0	QPSK	15 MHz	1	0	23.05
1747.5		11	16QAM	15 MHz	1	0	22.32
1747.5		0	QPSK	15 MHz	1	74	22.96
1747.5		11	16QAM	15 MHz	1	74	22.33
1747.5		0	QPSK	15 MHz	36	19	22.35
1747.5		11	16QAM	15 MHz	36	19	21.48
1747.5		0	QPSK	15 MHz	75	0	22.12
1747.5		11	16QAM	15 MHz	75	0	21.06
1745		0	QPSK	20 MHz	1	0	23.15
1745		11	16QAM	20 MHz	1	0	22.35
1745		0	QPSK	20 MHz	1	99	23.21
1745		11	16QAM	20 MHz	1	99	22.40
1745		0	QPSK	20 MHz	50	24	22.21
1745		11	16QAM	20 MHz	50	24	21.13
1745		0	QPSK	20 MHz	100	0	22.09
1745		11	16QAM	20 MHz	100	0	21.06

Table 6-6. Conducted Output Power (Band 4 – High Channel)

FCC ID: A3LSGHI307			FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module			Page 16 of 68

6.3 Band 17 Radiated Measurements

§2.1053, §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 706.50 MHz
 CHANNEL: 23755
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
1413.00	-62.95	3.63	-59.32	V	-46.32
2119.50	-56.54	3.90	-52.64	V	-39.64
2826.00	-53.90	5.01	-48.89	V	-35.89
3532.50	-92.41	6.25	-86.16	V	-73.16
4239.00	-91.64	7.23	-84.40	V	-71.40
4945.50	-90.61	7.86	-82.74	V	-69.74

Table 6-7. Radiated Spurious Data (Ch. 23755)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 17 of 68

Band 17 Radiated Measurements

§2.1053, §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 710.00 MHz
 CHANNEL: 23790
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
1420.00	-58.40	3.68	-54.73	V	-41.73
2130.00	-59.85	3.92	-55.93	V	-42.93
2840.00	-57.94	5.02	-52.92	V	-39.92
3550.00	-92.34	6.25	-86.09	V	-73.09
4260.00	-91.61	7.25	-84.36	V	-71.36
4970.00	-90.59	7.90	-82.69	V	-69.69

Table 6-8. Radiated Spurious Data (Ch. 23790)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 18 of 68

Band 17 Radiated Measurements

§2.1053, §27.53(g)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 713.50 MHz
 CHANNEL: 23825
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
1427.00	-59.66	3.73	-55.93	V	-42.93
2140.50	-53.78	3.94	-49.84	V	-36.84
2854.00	-55.52	5.04	-50.49	V	-37.49
3567.50	-92.26	6.25	-86.01	V	-73.01
4281.00	-91.56	7.25	-84.31	V	-71.31
4994.50	-90.61	7.94	-82.67	V	-69.67

Table 6-9. Radiated Spurious Data (Ch. 23825)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 19 of 68

6.4 Band 4 Radiated Measurements

§2.1053, §27.53(h)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1712.50 MHz
 CHANNEL: 19975
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
3425.00	-50.99	8.09	-42.89	V	-29.89
5137.50	-65.43	10.21	-55.22	V	-42.22
6850.00	-92.83	11.31	-81.52	V	-68.52
8562.50	-92.53	13.02	-79.50	V	-66.50
10275.00	-89.92	13.01	-76.91	V	-63.91
11987.50	-86.44	13.21	-73.23	V	-60.23

Table 6-10. Radiated Spurious Data (Ch. 19975)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 20 of 68

Band 4 Radiated Measurements

§2.1053, §27.53(h)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1732.50 MHz
 CHANNEL: 20175
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
3465.00	-54.84	8.26	-46.57	V	-33.57
5197.50	-65.21	10.26	-54.95	V	-41.95
6930.00	-66.02	11.42	-54.60	V	-41.60
8662.50	-92.53	13.07	-79.46	V	-66.46
10395.00	-89.83	13.12	-76.71	V	-63.71
12127.50	-86.13	13.25	-72.88	V	-59.88

Table 6-11. Radiated Spurious Data (Ch. 20175)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 21 of 68

Band 4 Radiated Measurements

§2.1053, §27.53(h)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1752.50 MHz
 CHANNEL: 20375
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	Margin (dB)
3505.00	-56.03	8.40	-47.63	V	-34.63
5257.50	-62.07	10.32	-51.75	V	-38.75
7010.00	-66.35	11.51	-54.83	V	-41.83
8762.50	-92.53	13.11	-79.42	V	-66.42
10515.00	-89.66	13.20	-76.46	V	-63.46
12267.50	-85.82	13.31	-72.50	V	-59.50

Table 6-12. Radiated Spurious Data (Ch. 20375)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all modulations and channel bandwidth configurations and the worst case emissions are reported at the maximum channel BW and respective settings for QPSK for all bands. The EUT was tested in three orthogonal planes and in all possible test configurations, modulations, RB sizes and offsets and positioning. The worst case test configuration was found in the vertical setup with an RB size of 1 and offset of 0. The data reported in the table above was measured in this test setup.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 22 of 68

6.5 Band 17 Frequency Stability Measurements

§2.1055, §27.54, RSS-133 (6.3)

OPERATING FREQUENCY: 710,000,000 Hz

CHANNEL: 23090

REFERENCE VOLTAGE: 4 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	+ 20 (Ref)	709,999,980	-20	-0.000003
100 %		- 30	710,000,019	19	0.000003
100 %		- 20	709,999,978	-22	-0.000003
100 %		- 10	710,000,021	21	0.000003
100 %		0	710,000,019	19	0.000003
100 %		+ 10	709,999,982	-18	-0.000003
100 %		+ 20	710,000,019	19	0.000003
100 %		+ 30	709,999,980	-20	-0.000003
100 %		+ 40	710,000,022	22	0.000003
100 %		+ 50	709,999,979	-21	-0.000003
115 %	4.60	+ 20	710,000,022	22	0.000003
85 %	3.40	+ 20	710,000,018	18	0.000003

Table 6-13. Frequency Stability Data (Band 17)

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI307			FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 23 of 68		

Band 17 Frequency Stability Measurements (Cont'd)

§2.1055, §27.54, RSS-133 (6.3)

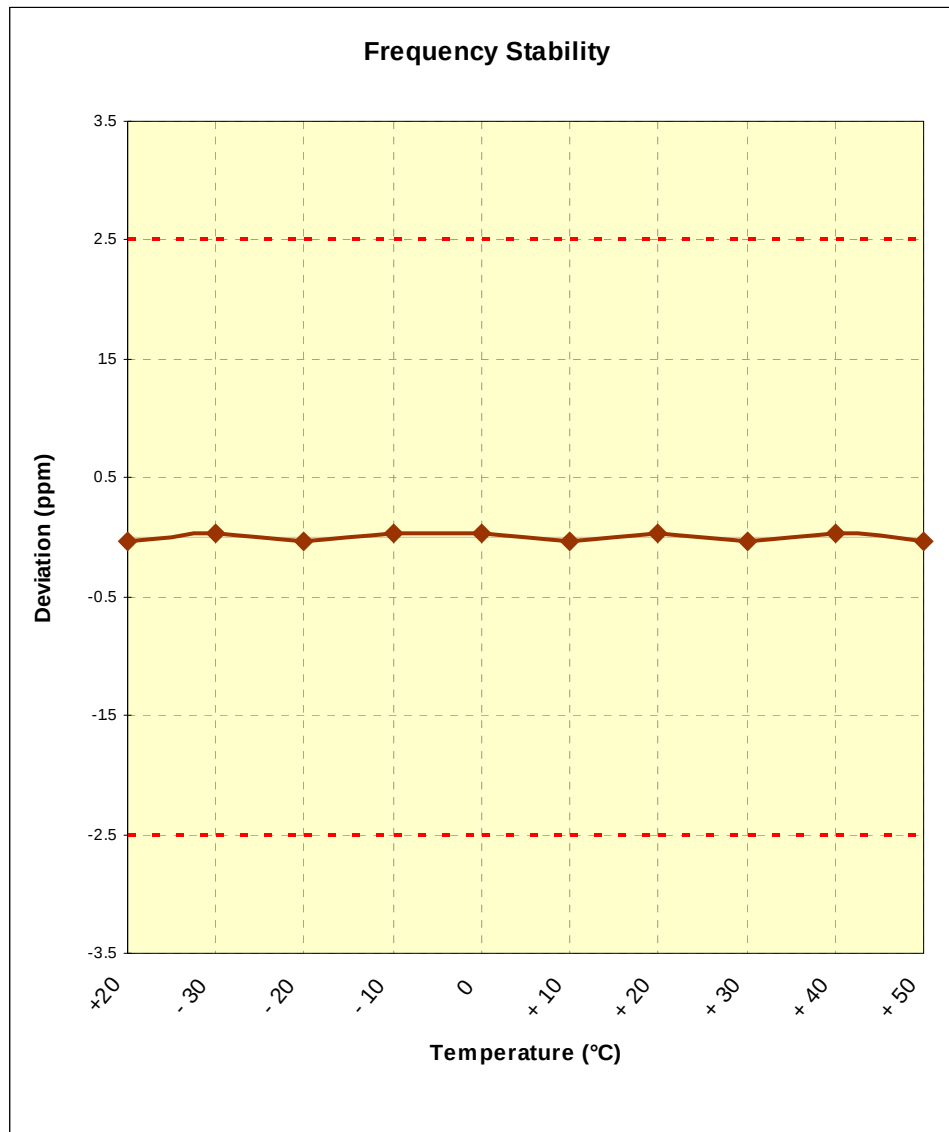


Figure 3. Frequency Stability Graph (Band 17)

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 24 of 68

6.6 Band 4 Frequency Stability Measurements

§2.1055, §27.54, RSS-133 (6.3)

OPERATING FREQUENCY: 1,732,500,000 Hz

CHANNEL: 20175

REFERENCE VOLTAGE: 4 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	+ 20 (Ref)	1,732,499,978	-22	-0.000001
100 %		- 30	1,732,500,020	20	0.000001
100 %		- 20	1,732,500,018	18	0.000001
100 %		- 10	1,732,500,019	19	0.000001
100 %		0	1,732,499,980	-20	-0.000001
100 %		+ 10	1,732,499,979	-21	-0.000001
100 %		+ 20	1,732,500,022	22	0.000001
100 %		+ 30	1,732,500,018	18	0.000001
100 %		+ 40	1,732,499,981	-19	-0.000001
100 %		+ 50	1,732,500,020	20	0.000001
115 %	4.60	+ 20	1,732,500,021	21	0.000001
85 %	3.40	+ 20	1,732,499,979	-21	-0.000001

Table 6-14. Frequency Stability Data (Band 4)


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004

FCC ID: A3LSGHI307			FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module			Page 25 of 68

Band 4 Frequency Stability Measurements (Cont'd)

§2.1055, §27.54; RSS-133 (6.3)

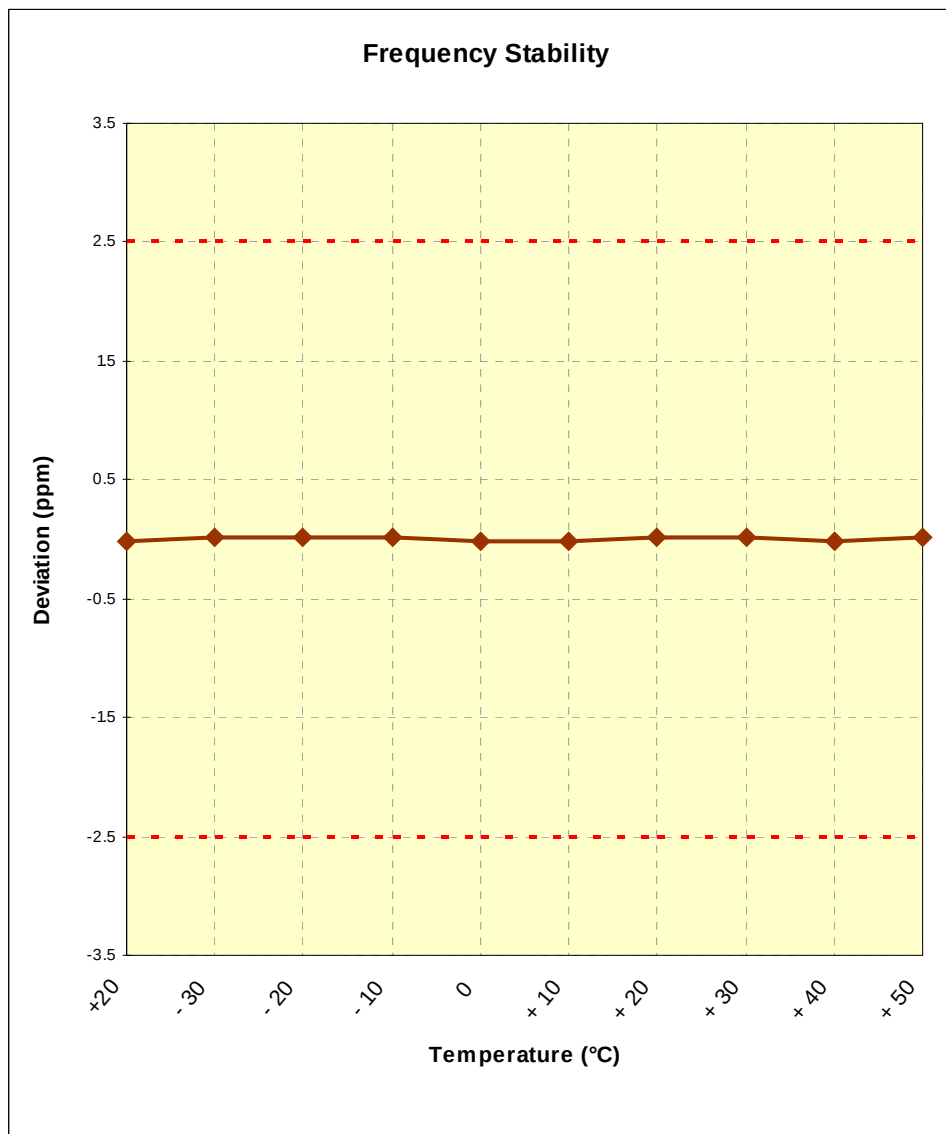

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Note: Carrier Frequency Stability Measurements performed according to ANSI/TI/EIA-603-C-2004, Aug. 17, 2004


FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 26 of 68

7.0 PLOT(S) OF EMISSIONS


Note: For all out-of-band spurious emissions, the RB sizes and offsets that produced the worst case emissions are indicated in the plot captions.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 27 of 68

BAND 17 – 5 MHZ BW

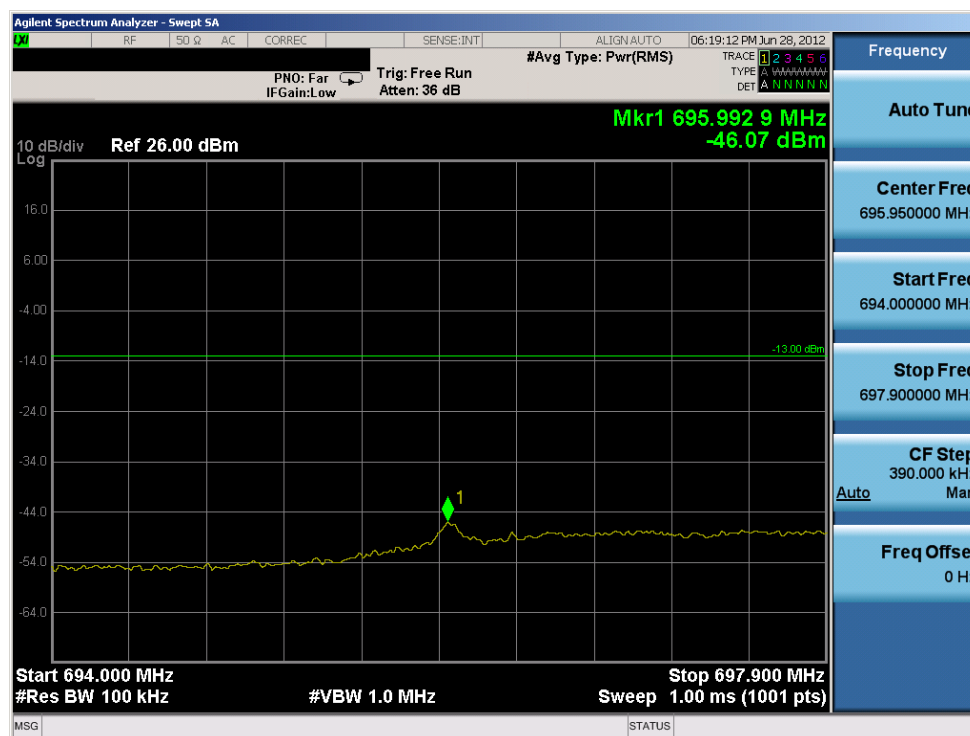


Plot 7-1. Lower Band Edge Plot (QPSK – RB Size 25)

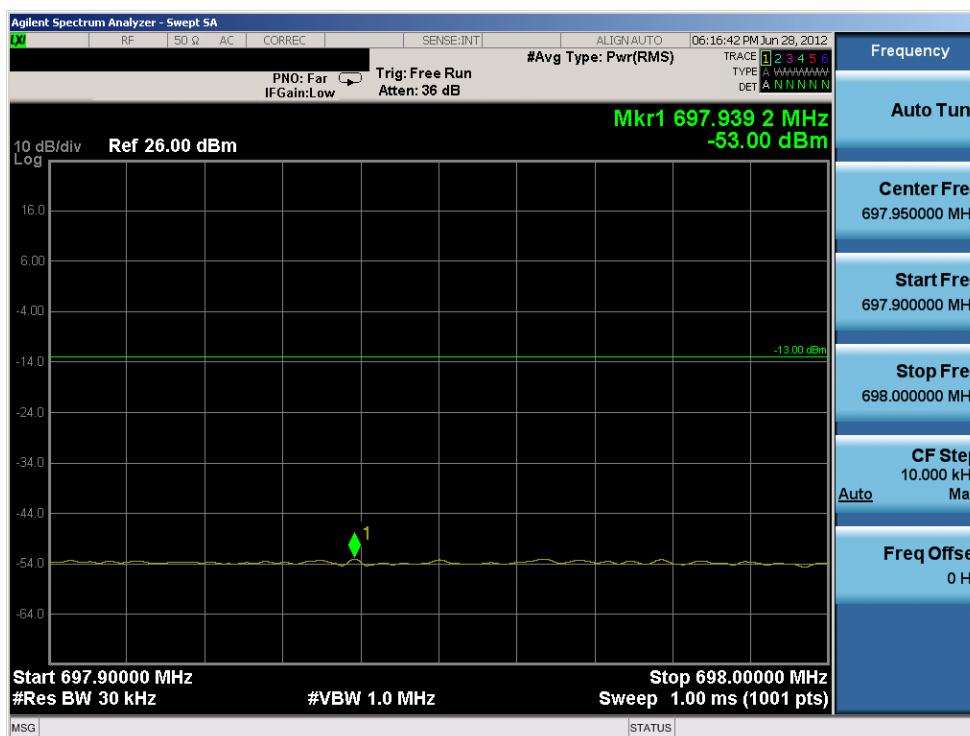


Plot 7-2. Lower Band Edge Plot (QPSK – RB Size 25)

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 28 of 68

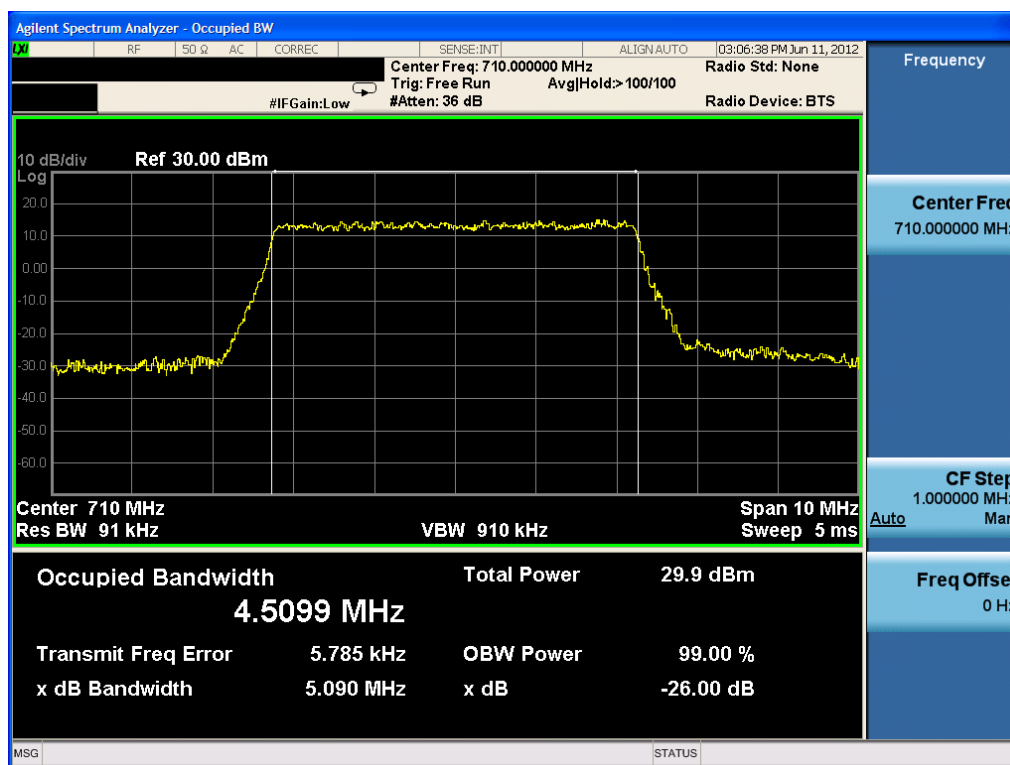


Plot 7-3. Occupied Bandwidth Plot (QPSK – RB Size 25)

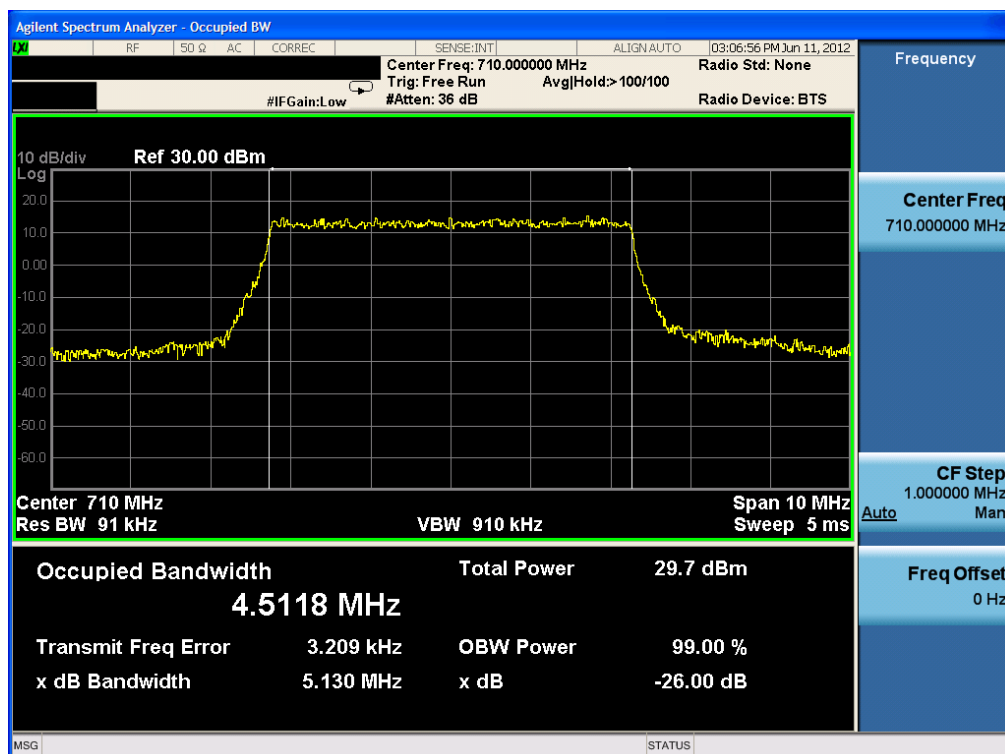


Plot 7-4. Occupied Bandwidth Plot (16-QAM – RB Size 25)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 29 of 68

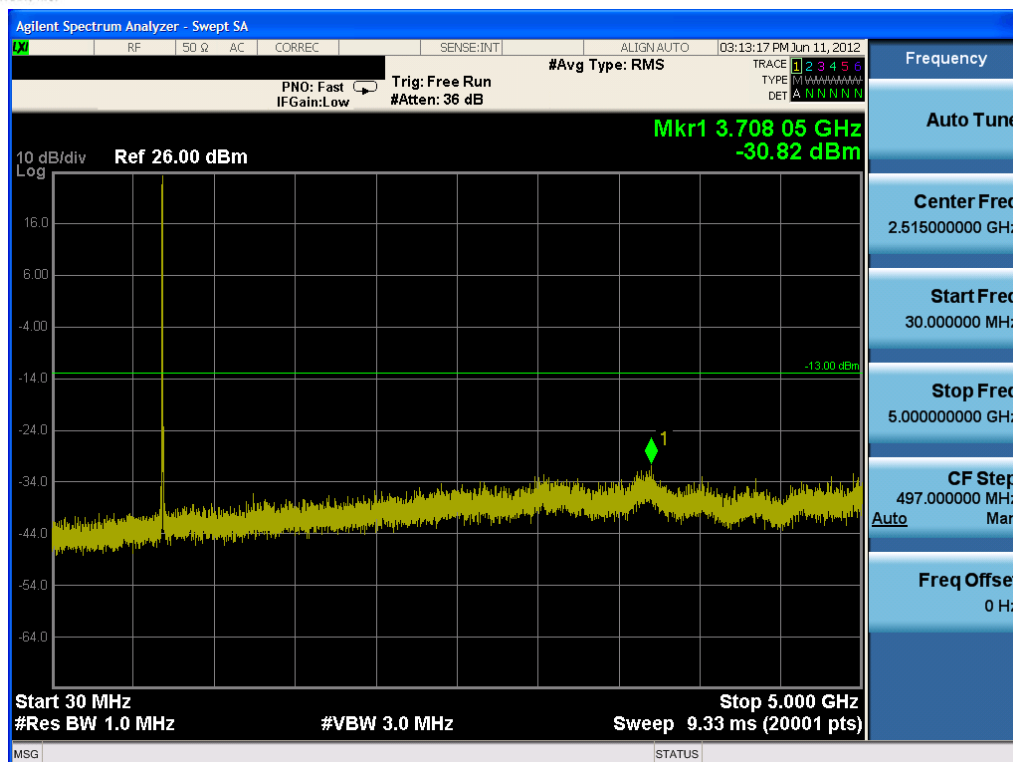


Plot 7-5. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

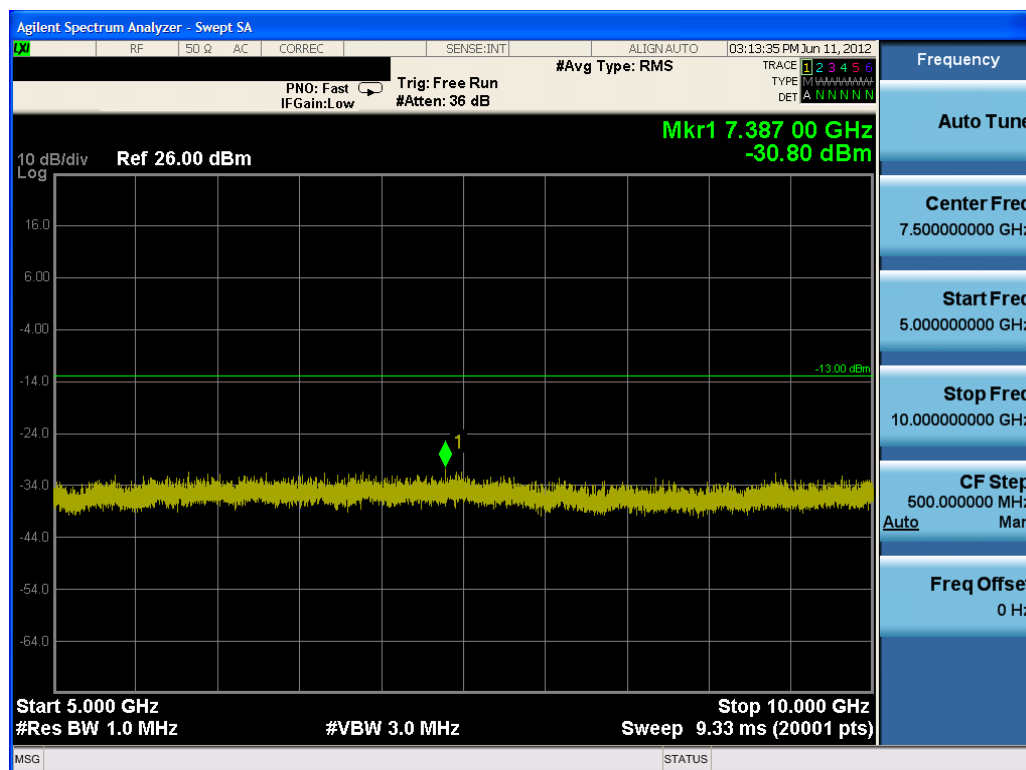


Plot 7-6. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 30 of 68

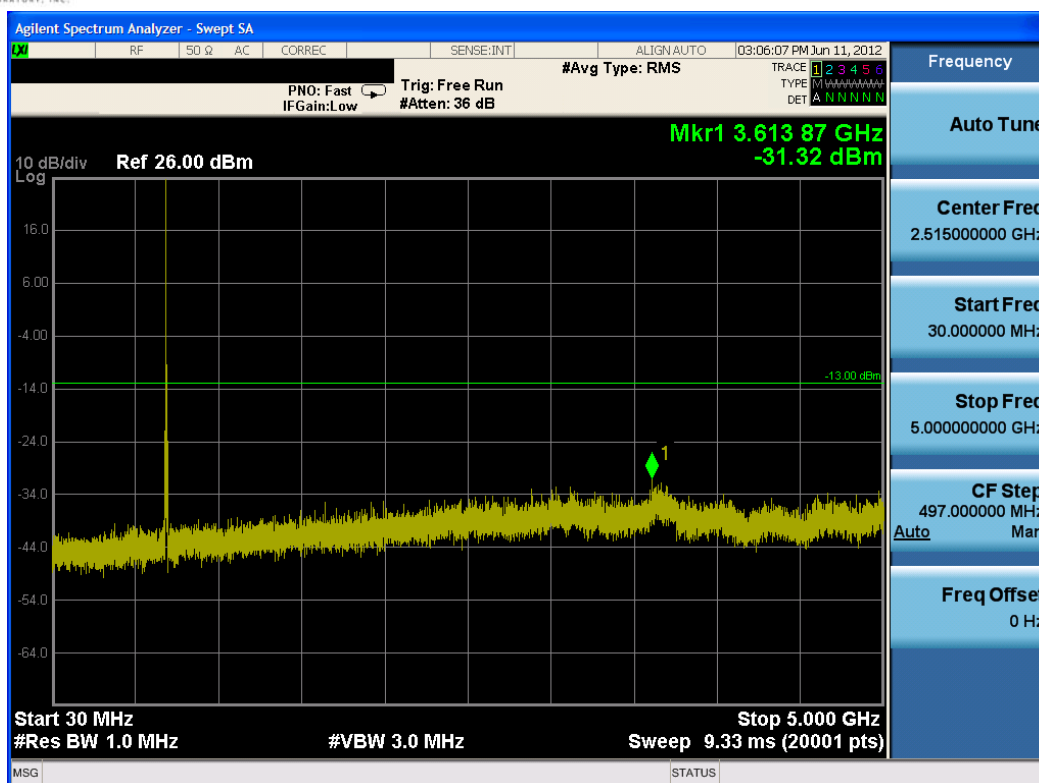


Plot 7-7. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

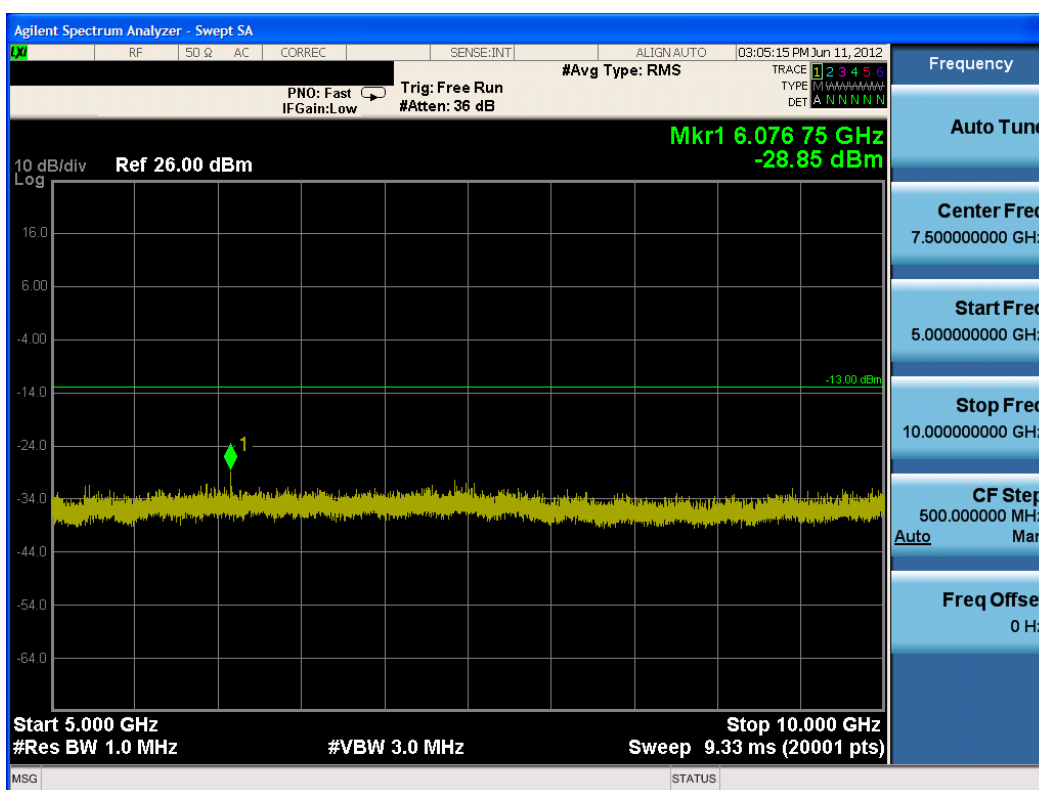


Plot 7-8. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 31 of 68

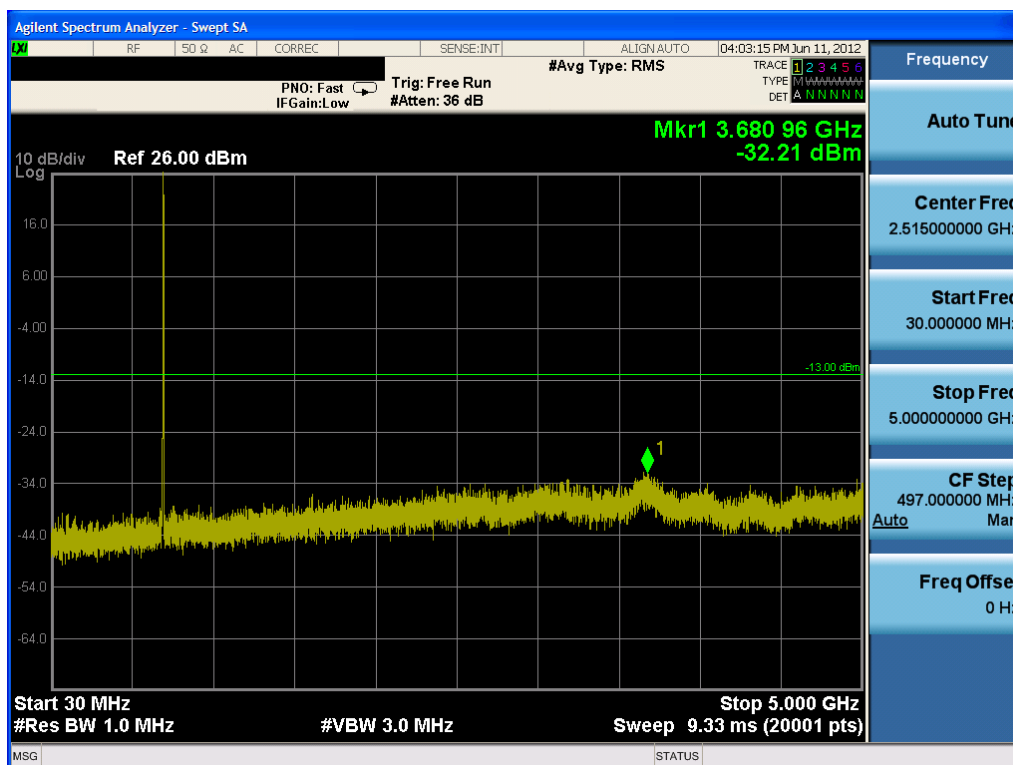


Plot 7-9. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

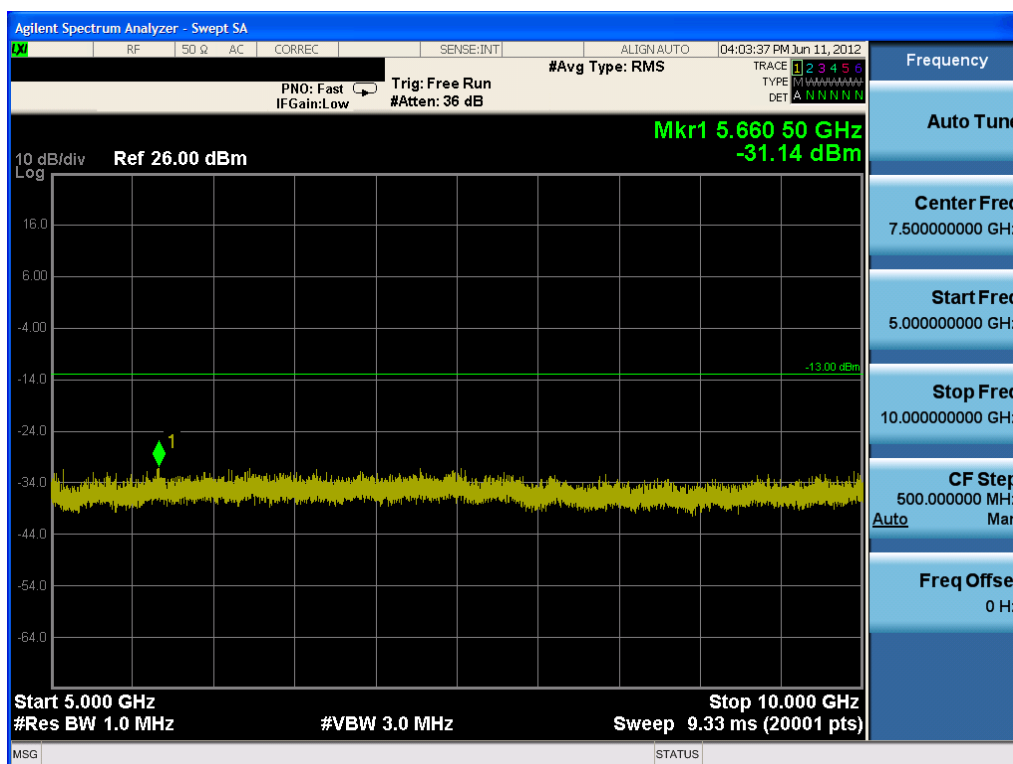


Plot 7-10. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 32 of 68

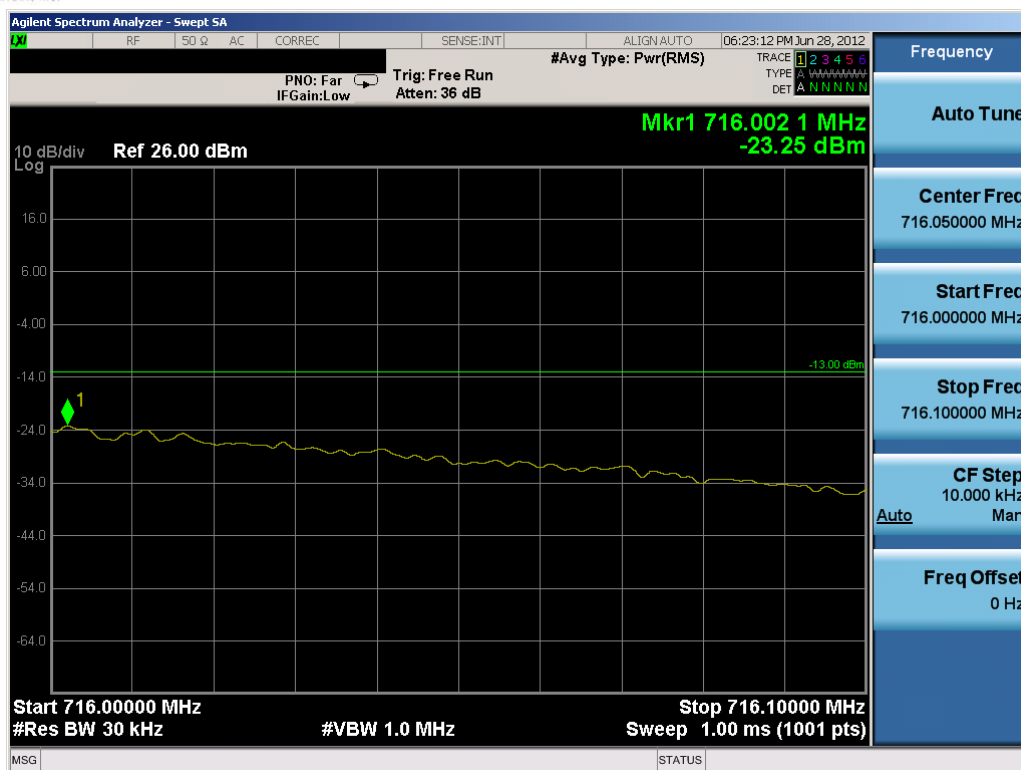


Plot 7-11. Upper Band Edge Plot (QPSK – RB Size 1, Offset 24)

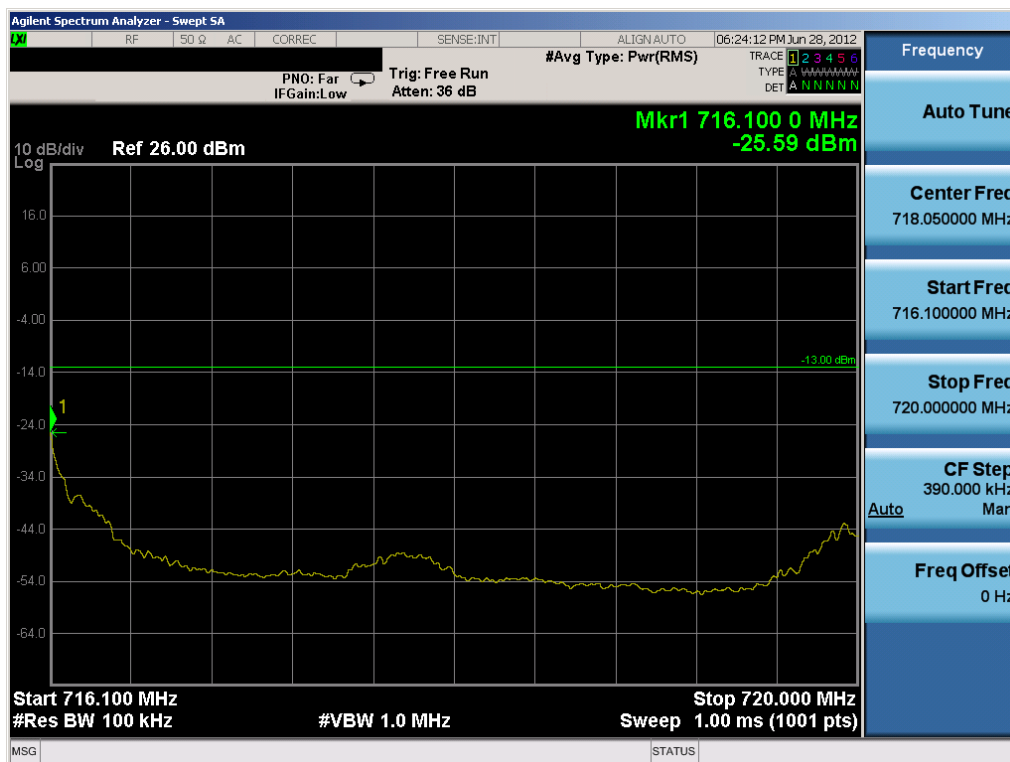


Plot 7-12. Upper Band Edge Plot (QPSK – RB Size 1, Offset 24)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 33 of 68

BAND 17 – 10 MHz BW

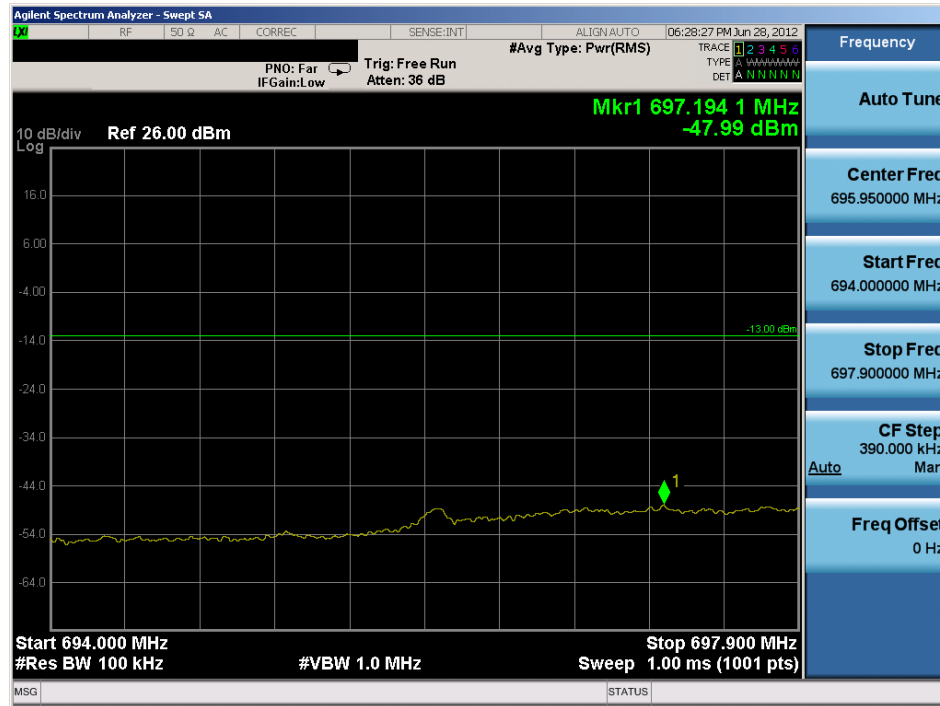


Plot 7-13. Lower Band Edge Plot (QPSK – RB Size 50)

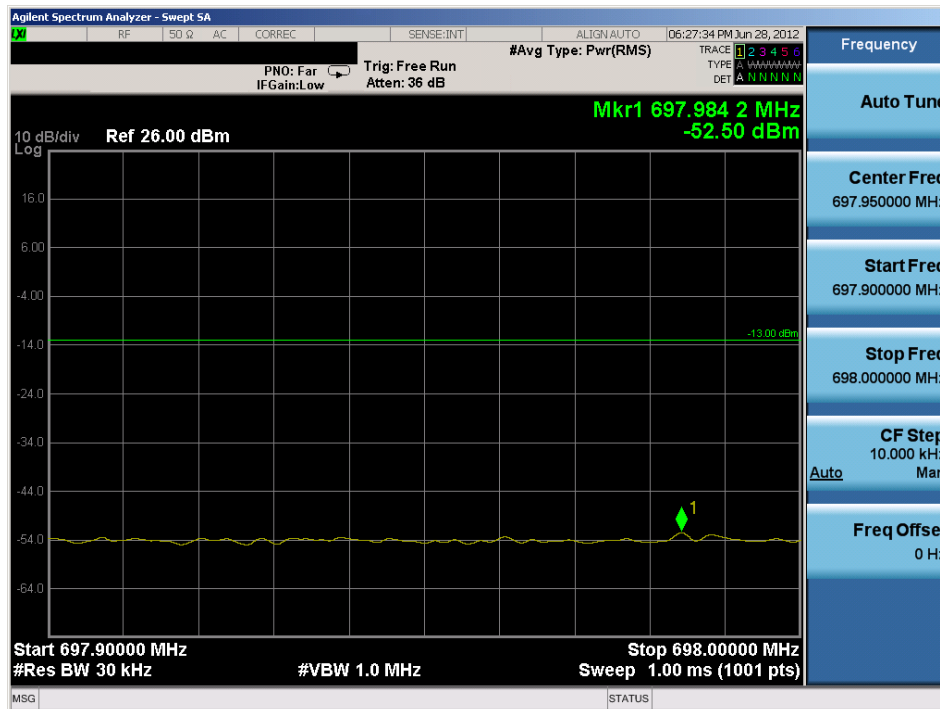


Plot 7-14. Lower Band Edge Plot (QPSK – RB Size 1, Offset 0)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 34 of 68

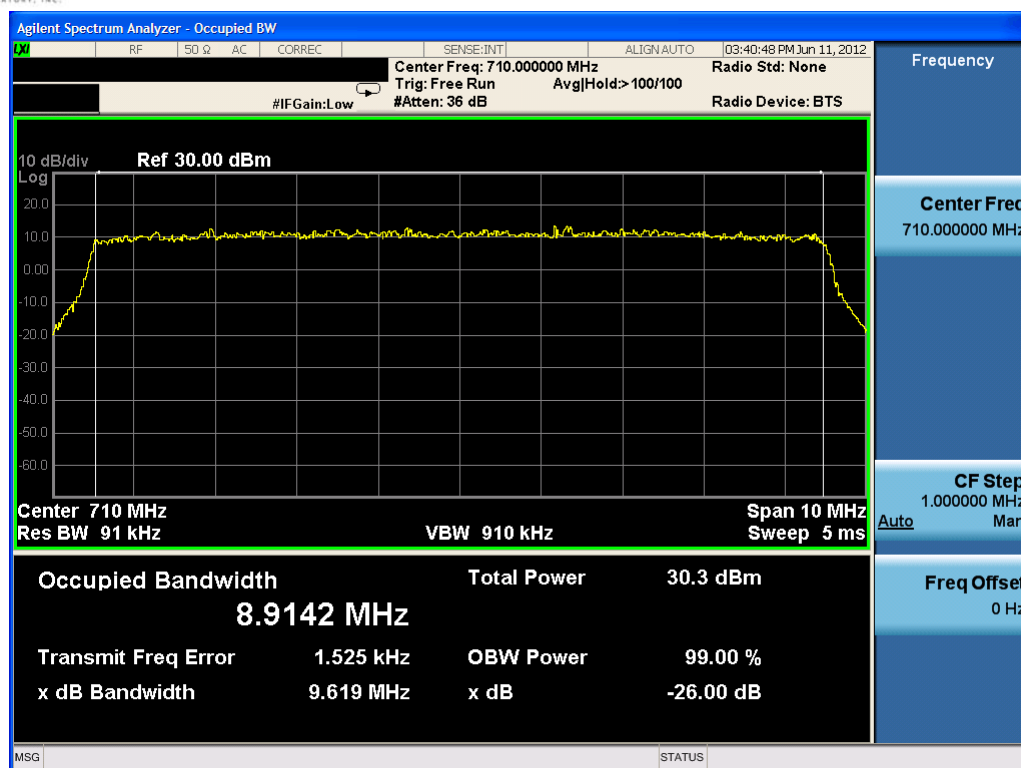


Plot 7-15. Occupied Bandwidth Plot (QPSK – RB Size 50)

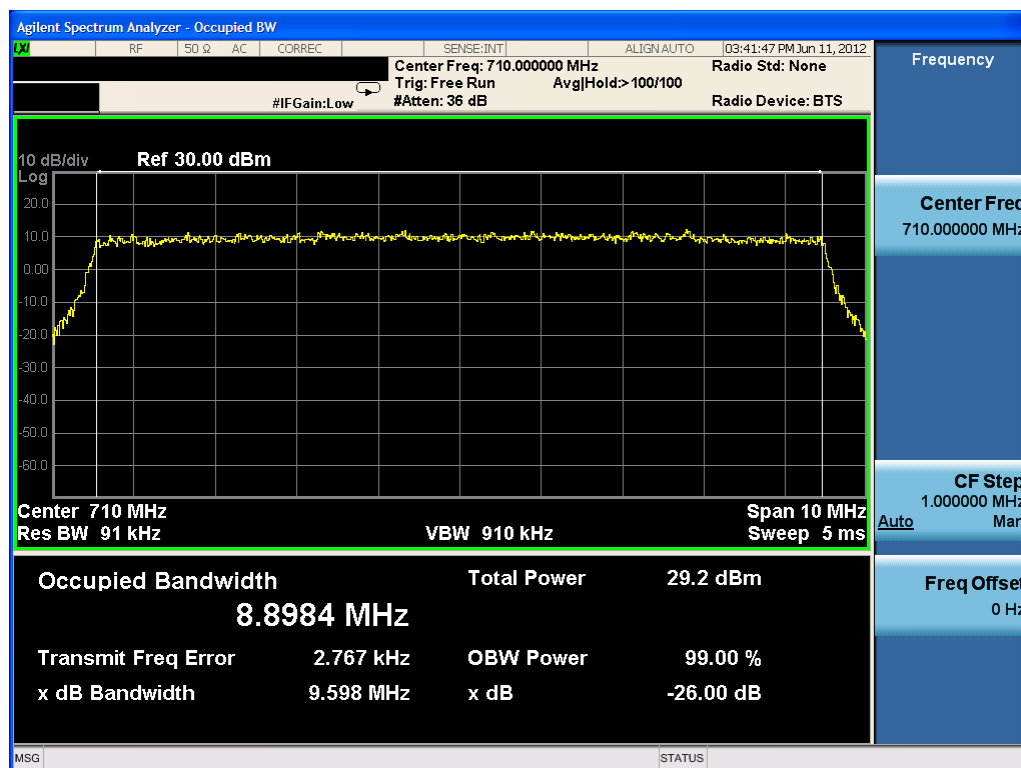


Plot 7-16. Occupied Bandwidth Plot (16-QAM – RB Size 50)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 35 of 68

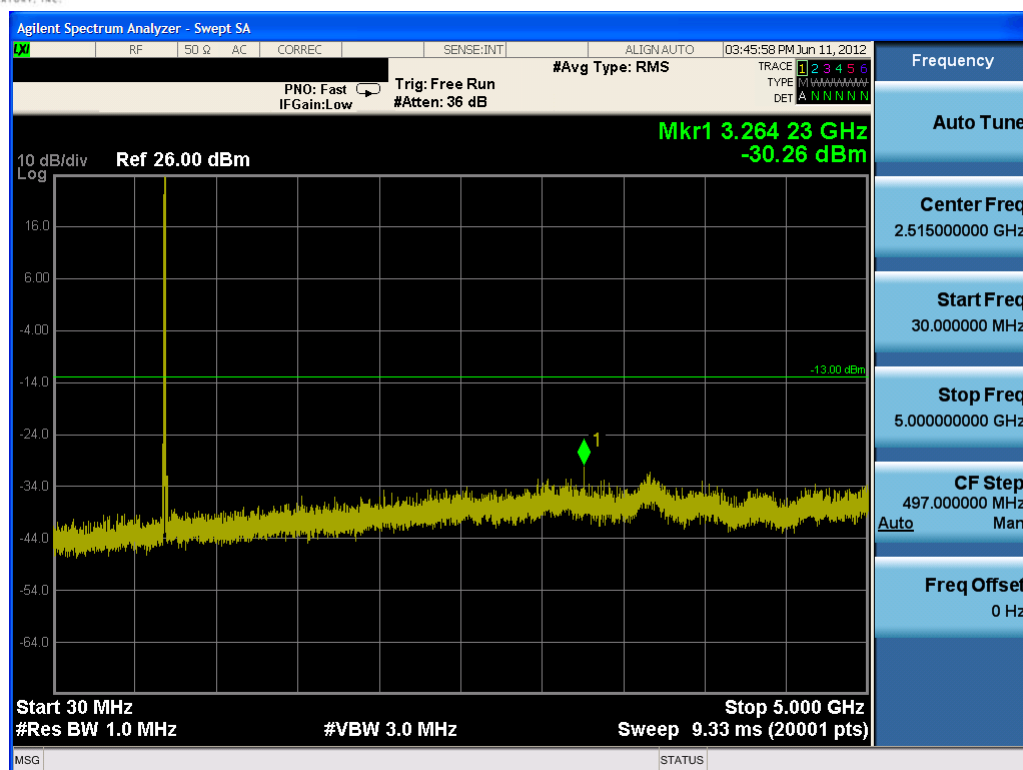


Plot 7-17. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

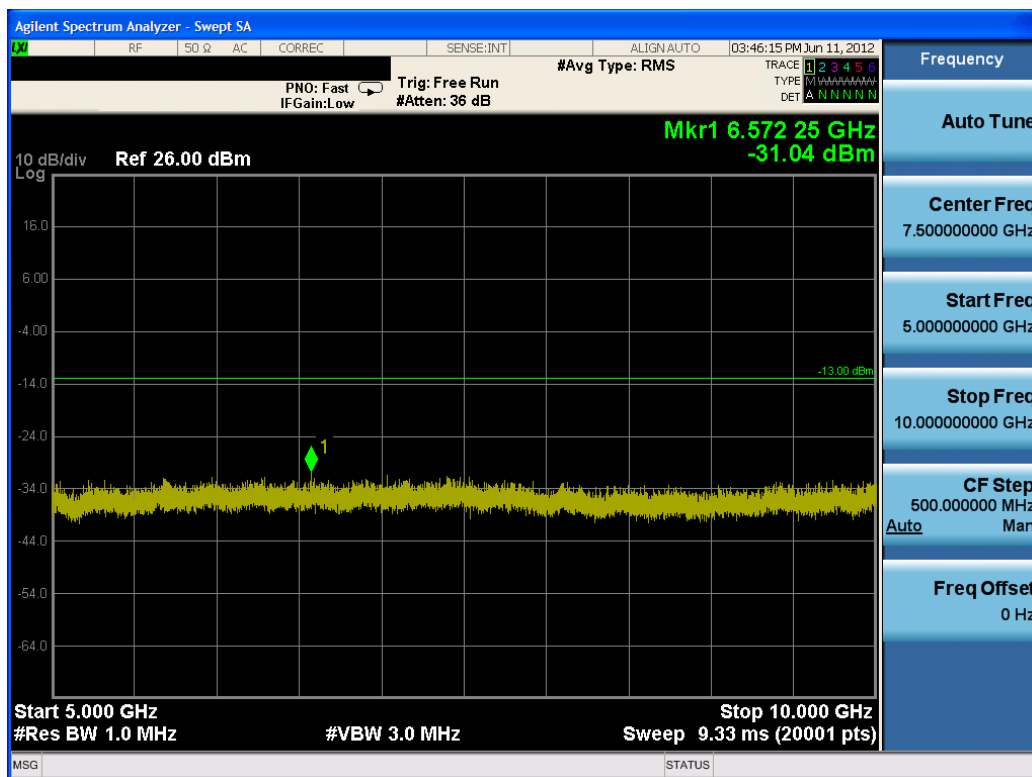


Plot 7-18. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)


FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 36 of 68

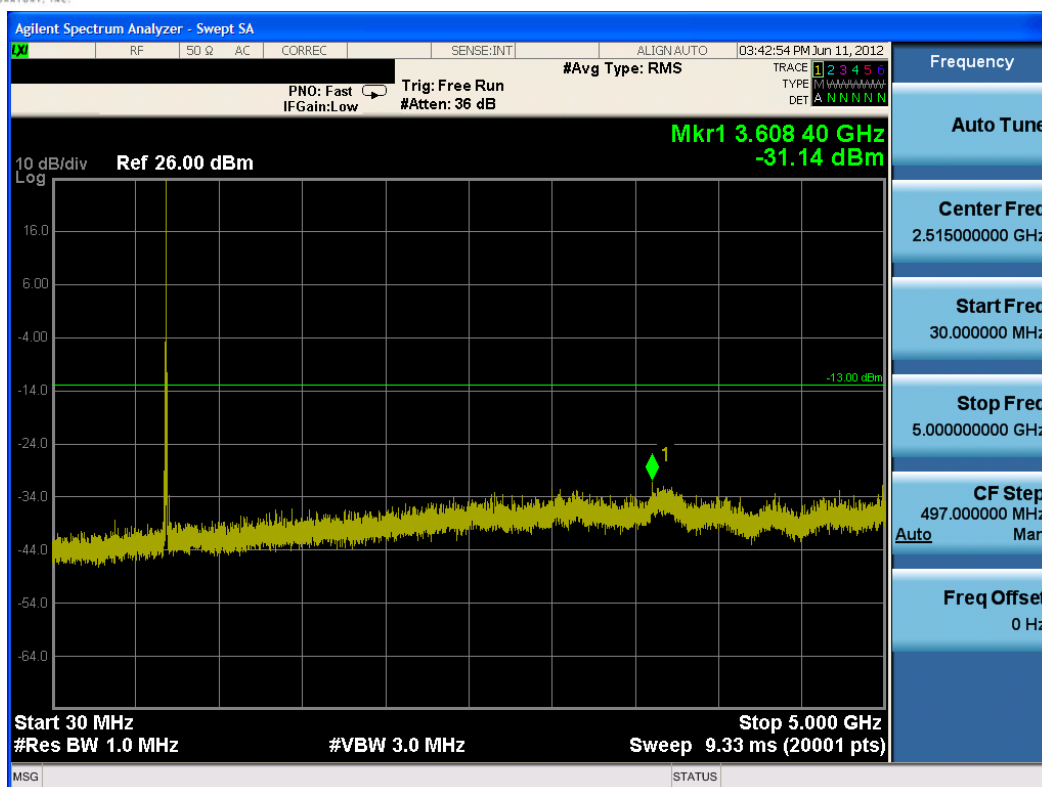


Plot 7-19. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

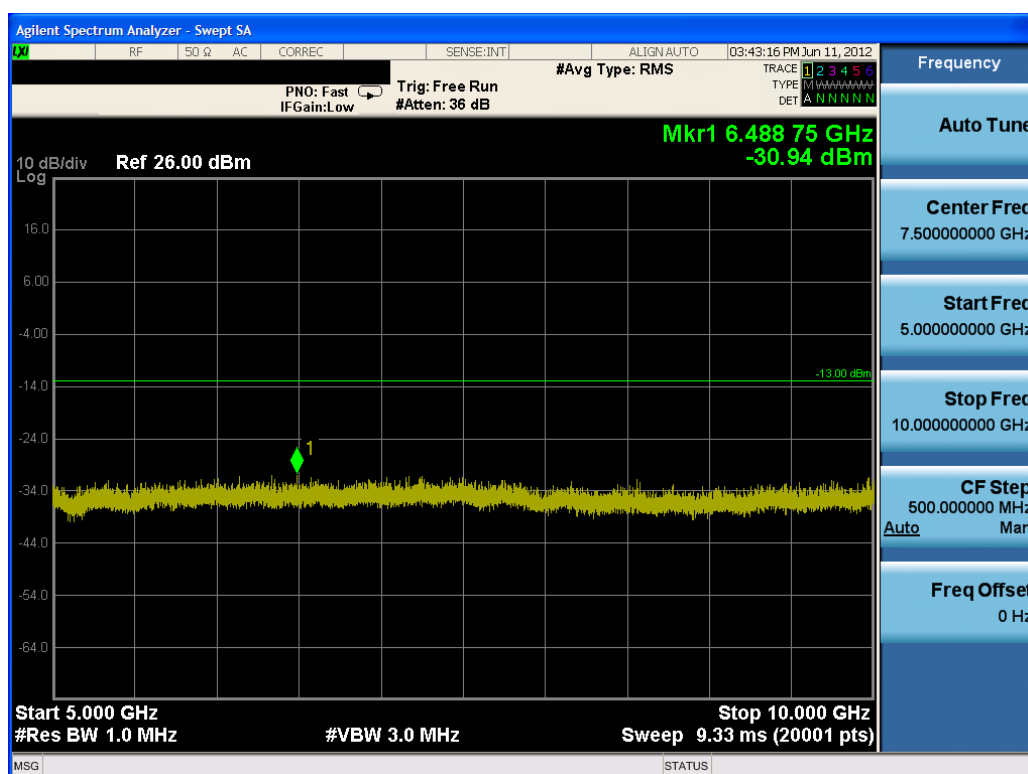


Plot 7-20. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 37 of 68

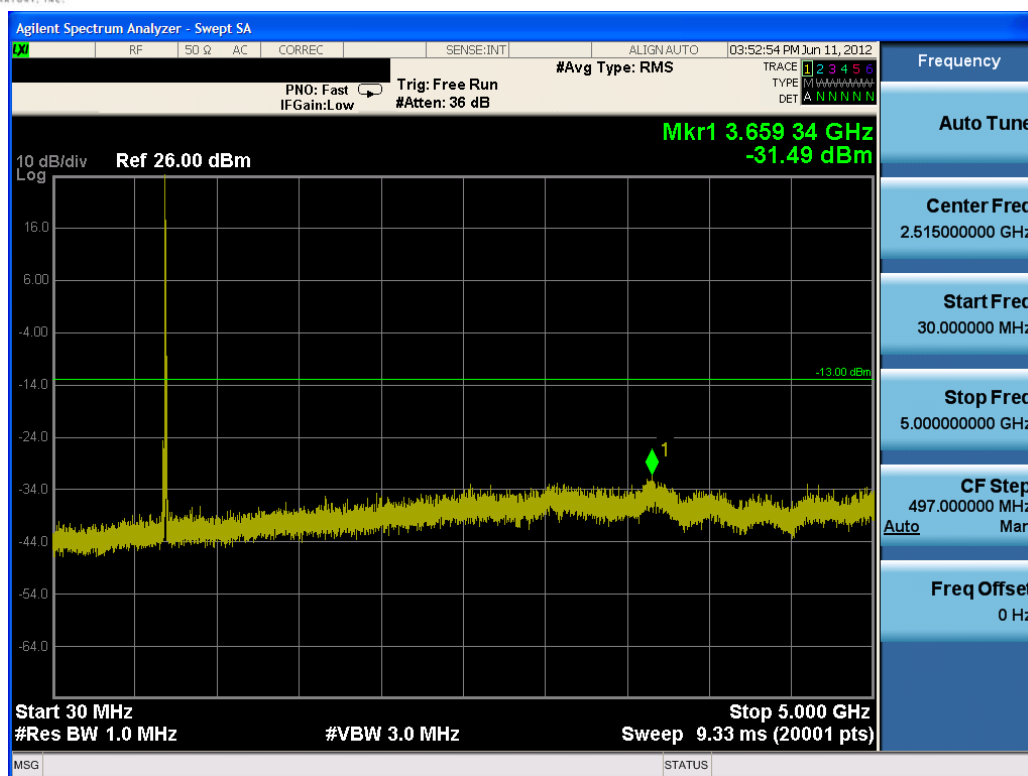


Plot 7-21. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

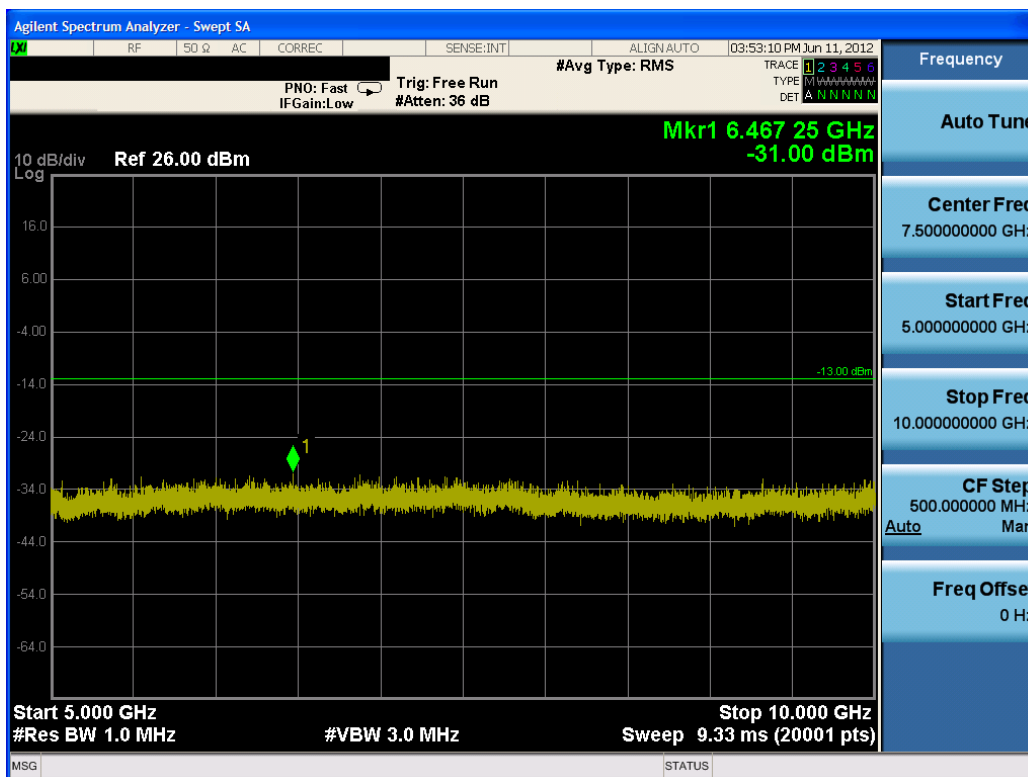


Plot 7-22. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 38 of 68

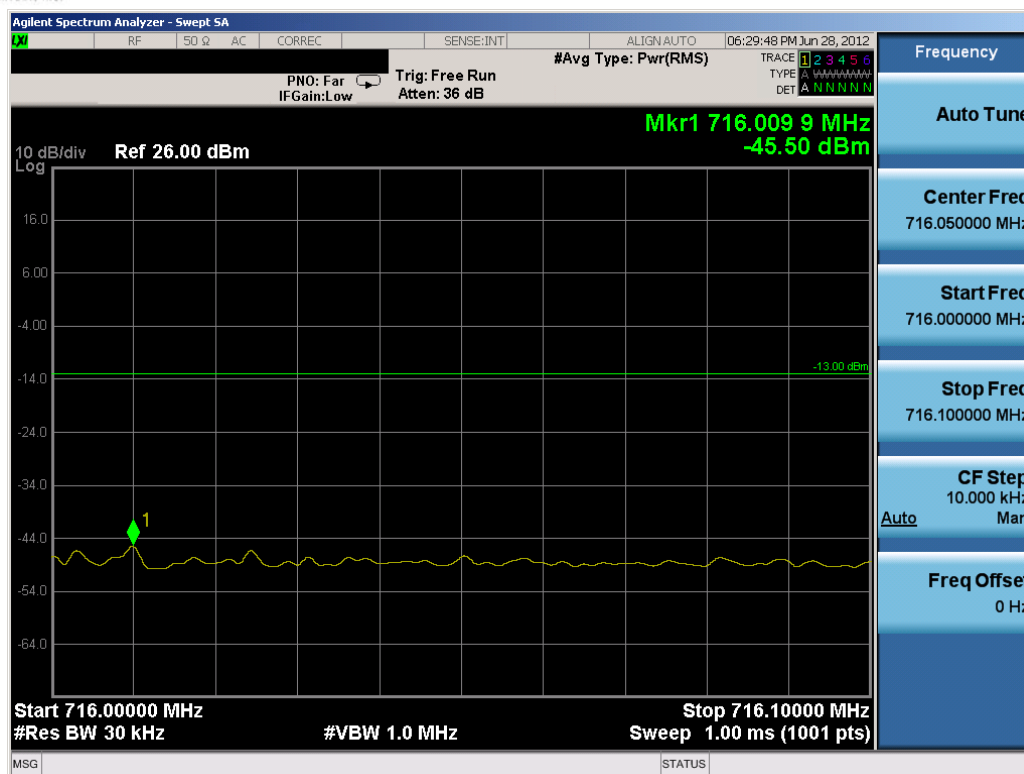


Plot 7-23. Upper Band Edge Plot (QPSK – RB Size 1, Offset 49)

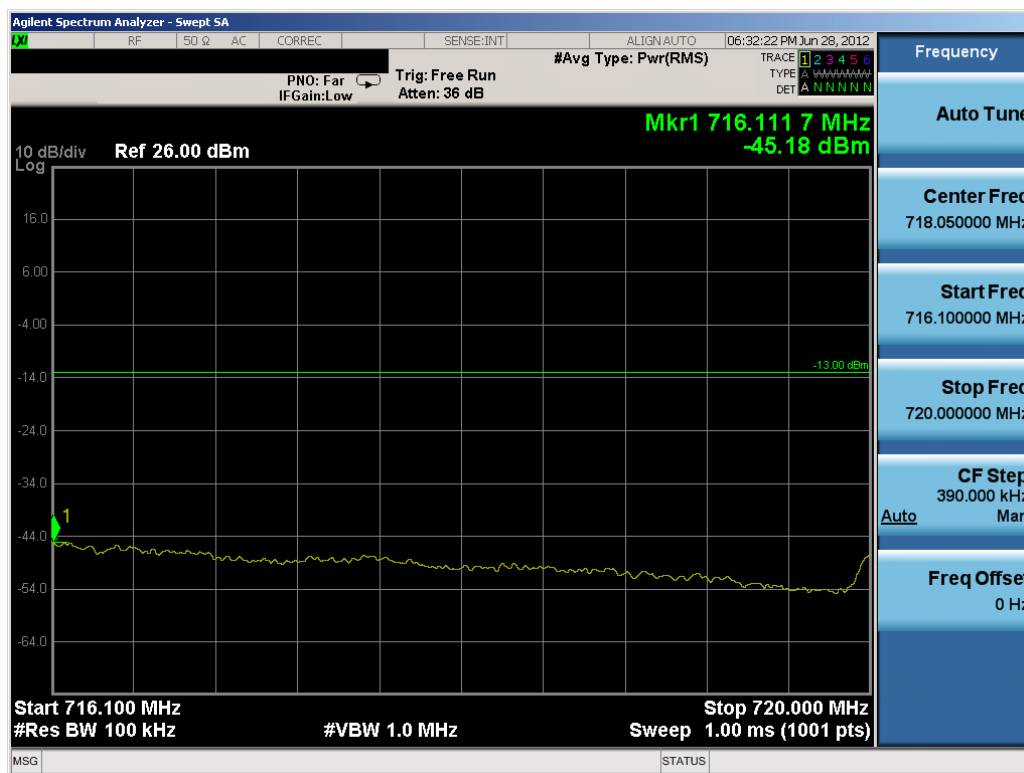


Plot 7-24. Upper Band Edge Plot (QPSK – RB Size 50)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 39 of 68

BAND 4 – 5 MHz BW

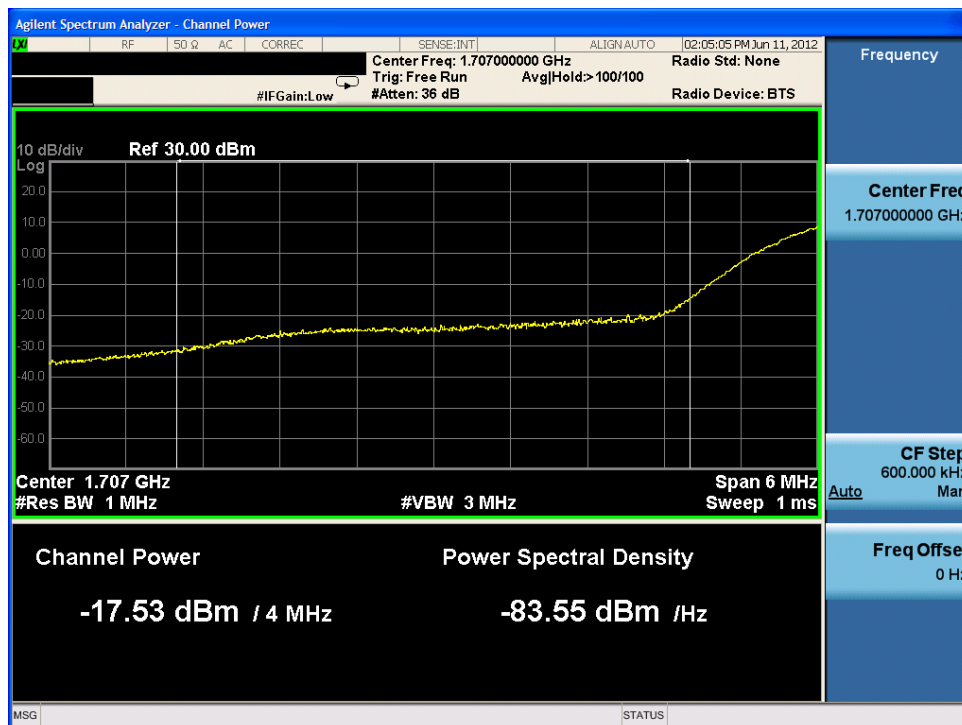


Plot 7-25. Lower Band Edge Plot (QPSK – RB Size 25)

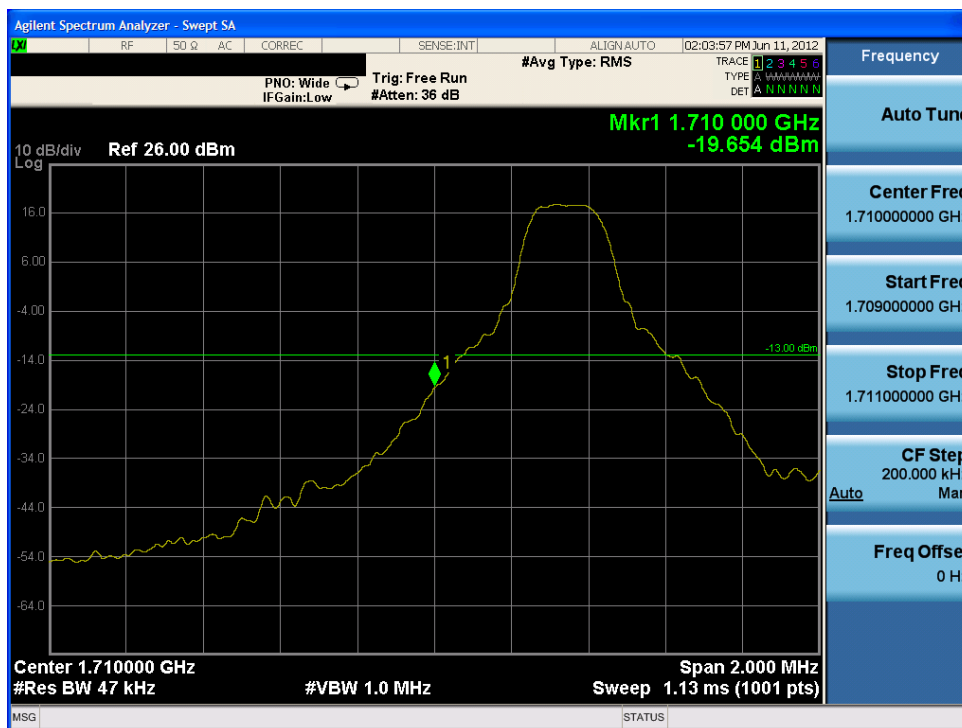


Plot 7-26. Lower Band Edge Plot (QPSK – RB Size 1, Offset 0)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 40 of 68

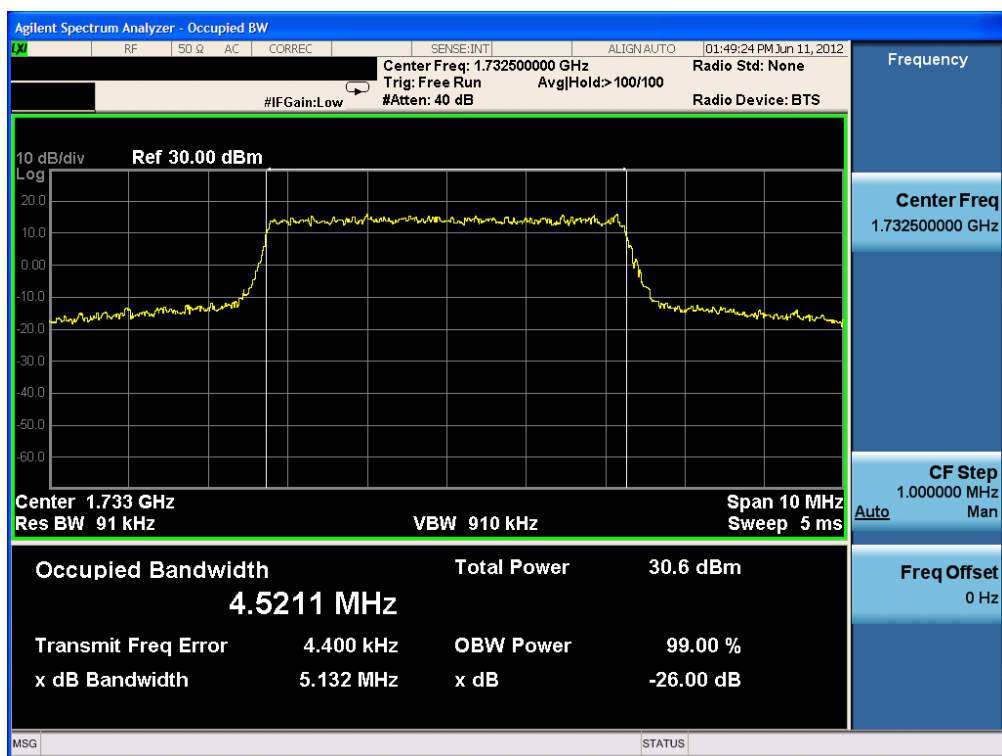


Plot 7-27. Occupied Bandwidth Plot (QPSK – RB Size 25)

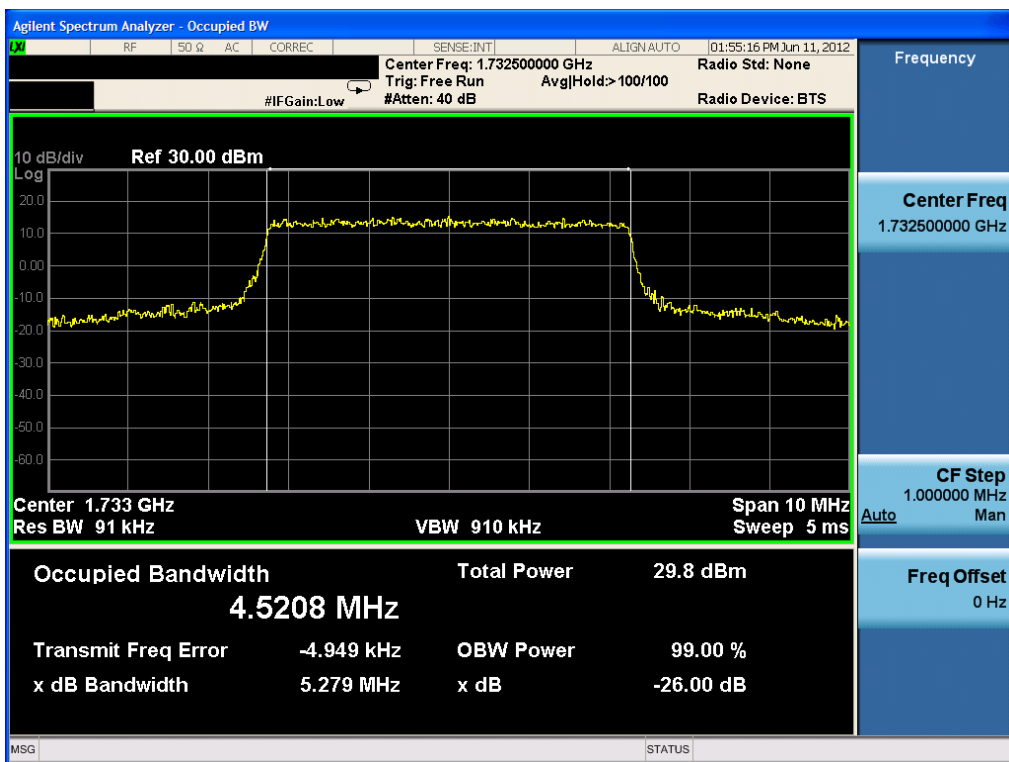


Plot 7-28. Occupied Bandwidth Plot (16-QAM – RB Size 25)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 41 of 68

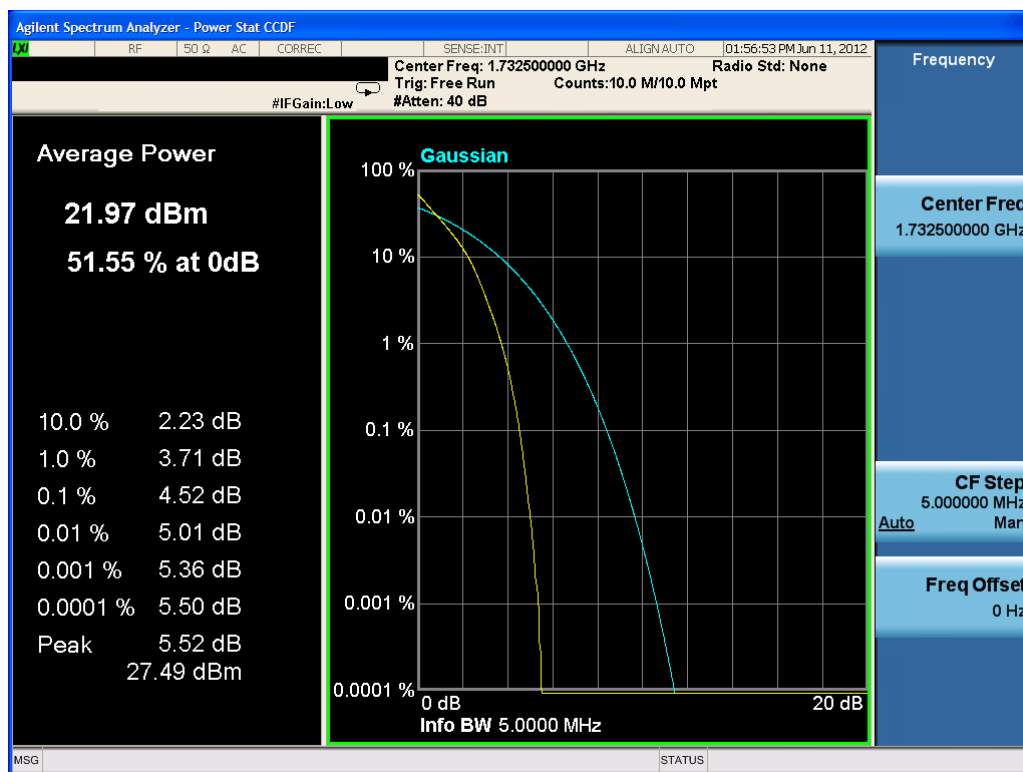


Plot 7-29. Peak to Average Ratio Plot (QPSK - RB Size 25)

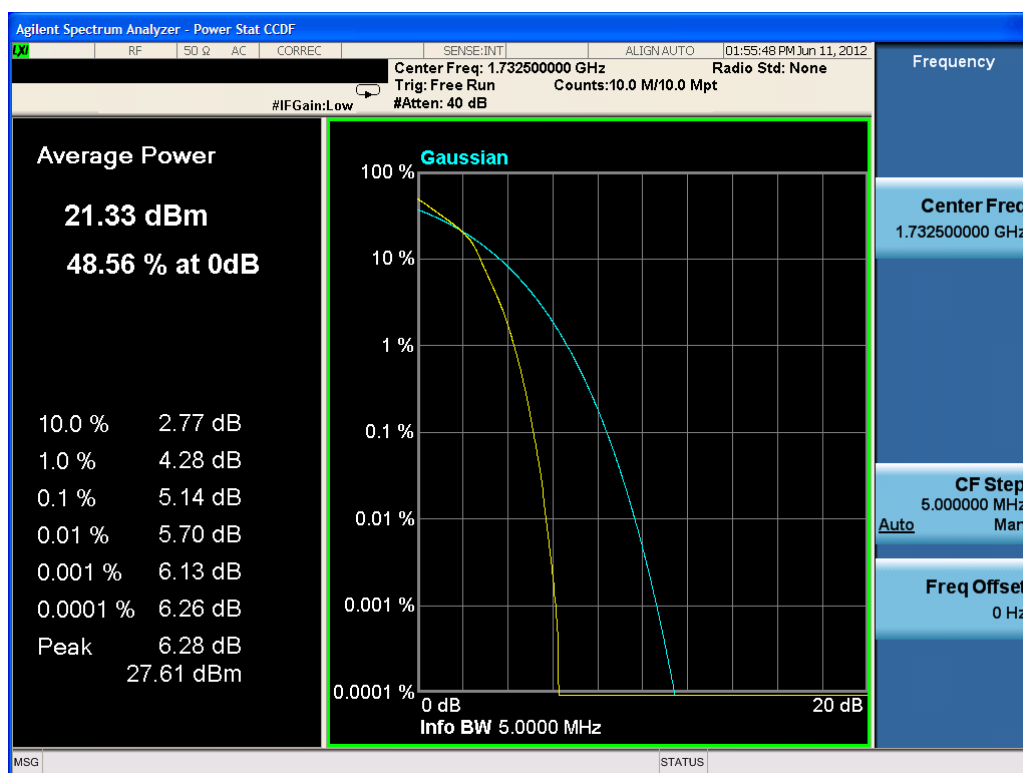


Plot 7-30. Peak to Average Ratio Plot (16QAM - RB Size 25)

FCC ID: A3LSGHI307	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 42 of 68

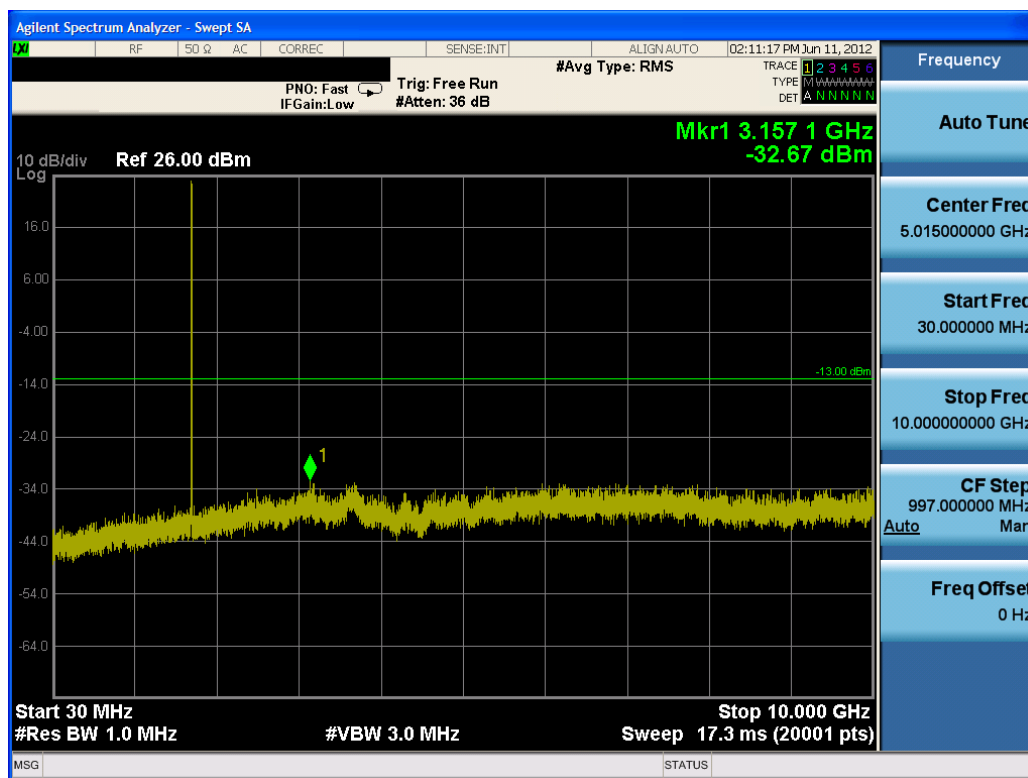


Plot 7-31. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

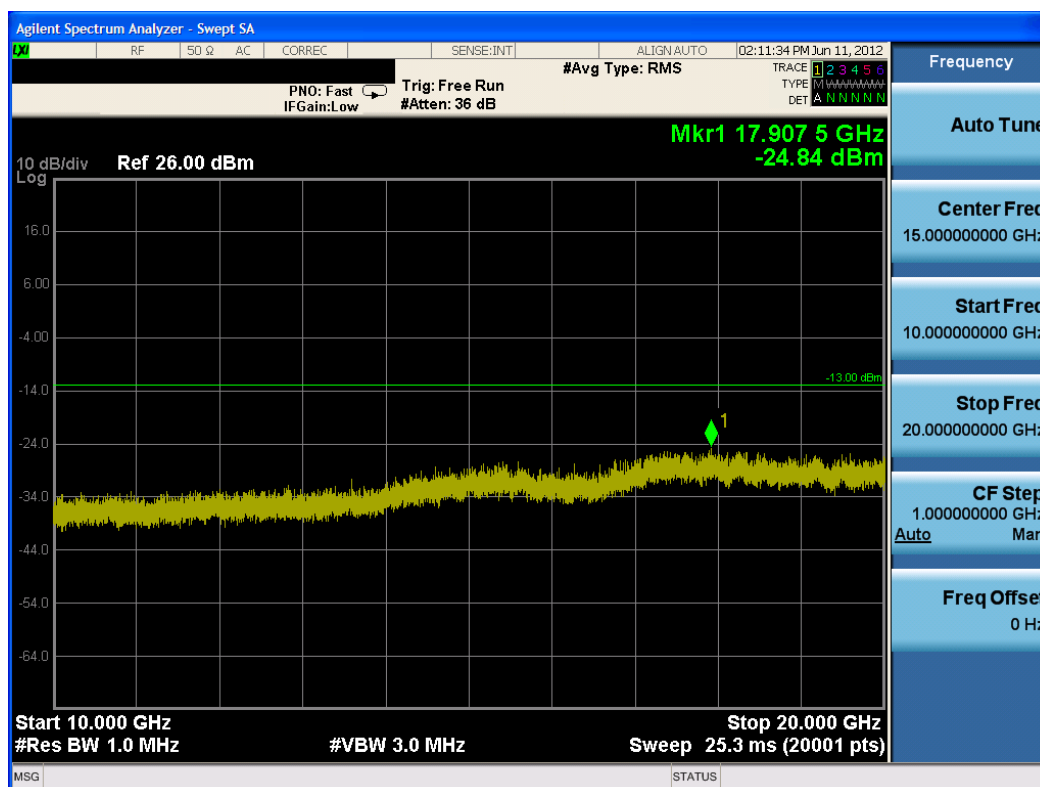


Plot 7-32. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 43 of 68

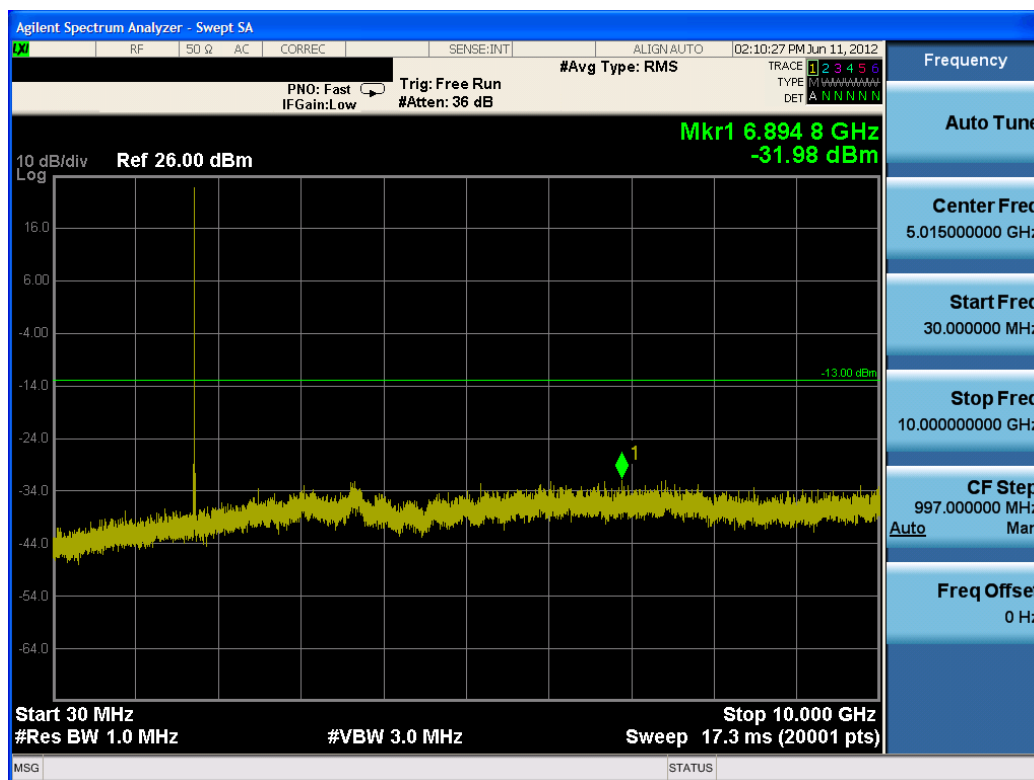

Plot 7-33. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

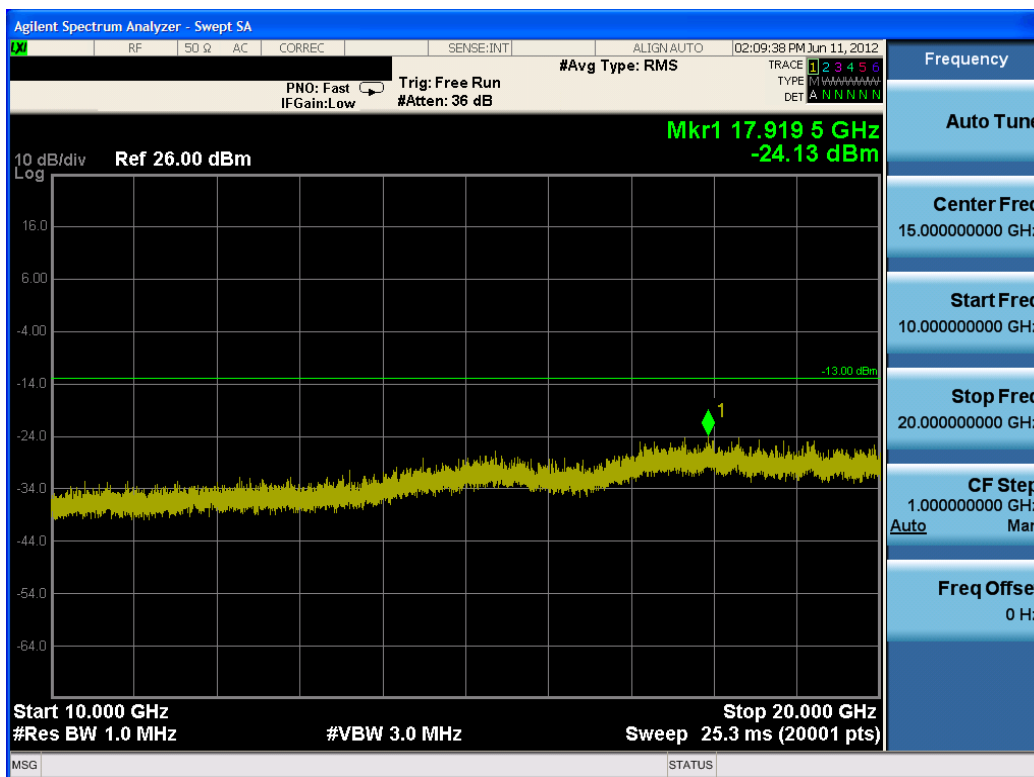

Plot 7-34. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 44 of 68




Plot 7-37. Upper Band Edge Plot (QPSK – RB Size 1, Offset 24)



Plot 7-38. Upper Band Edge Plot (QPSK – RB Size 25)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 46 of 68

BAND 4 – 10 MHz BW

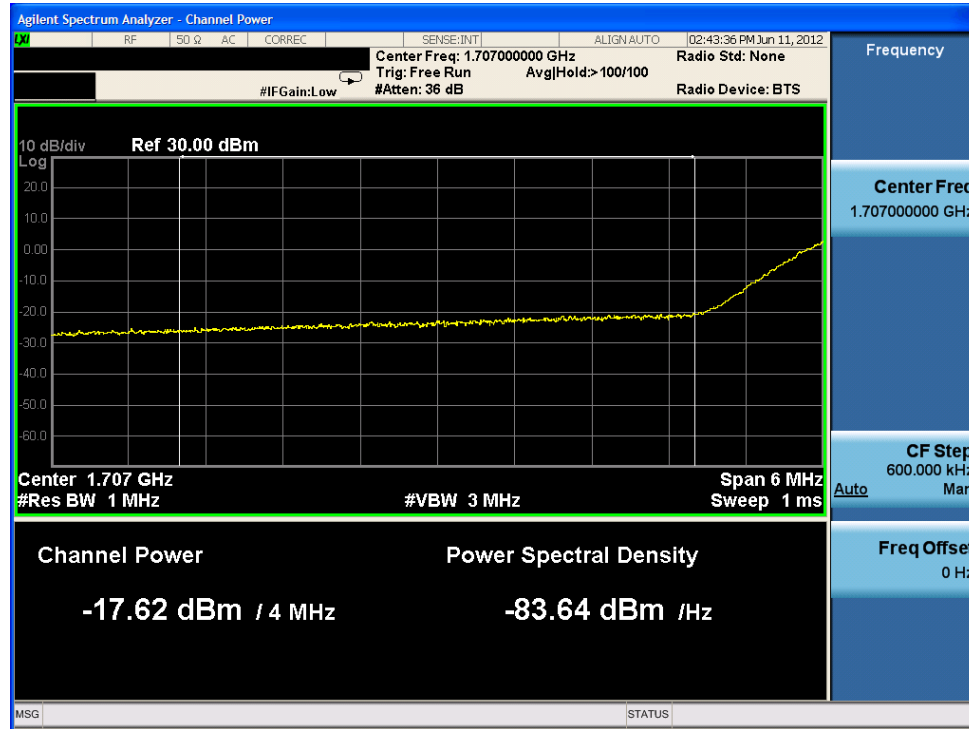


Plot 7-39. Lower Band Edge Plot (QPSK – RB Size 50)




Plot 7-40. Lower Band Edge Plot (QPSK – RB Size 50)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 47 of 68

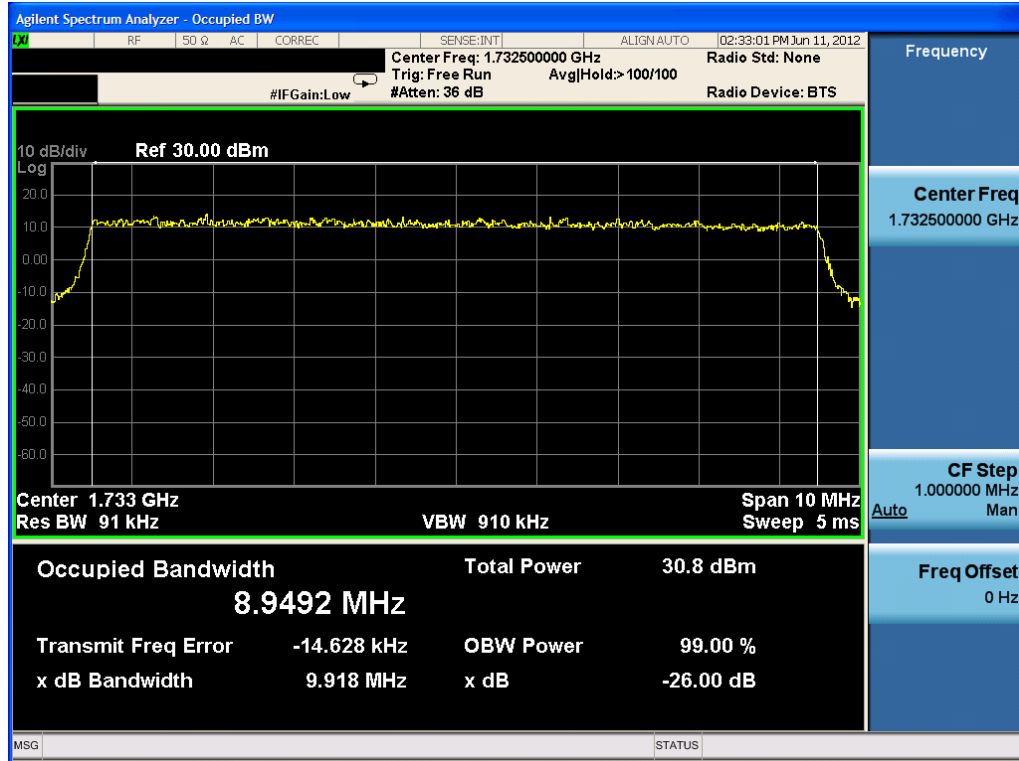


Plot 7-41. Occupied Bandwidth Plot (QPSK – RB Size 50)

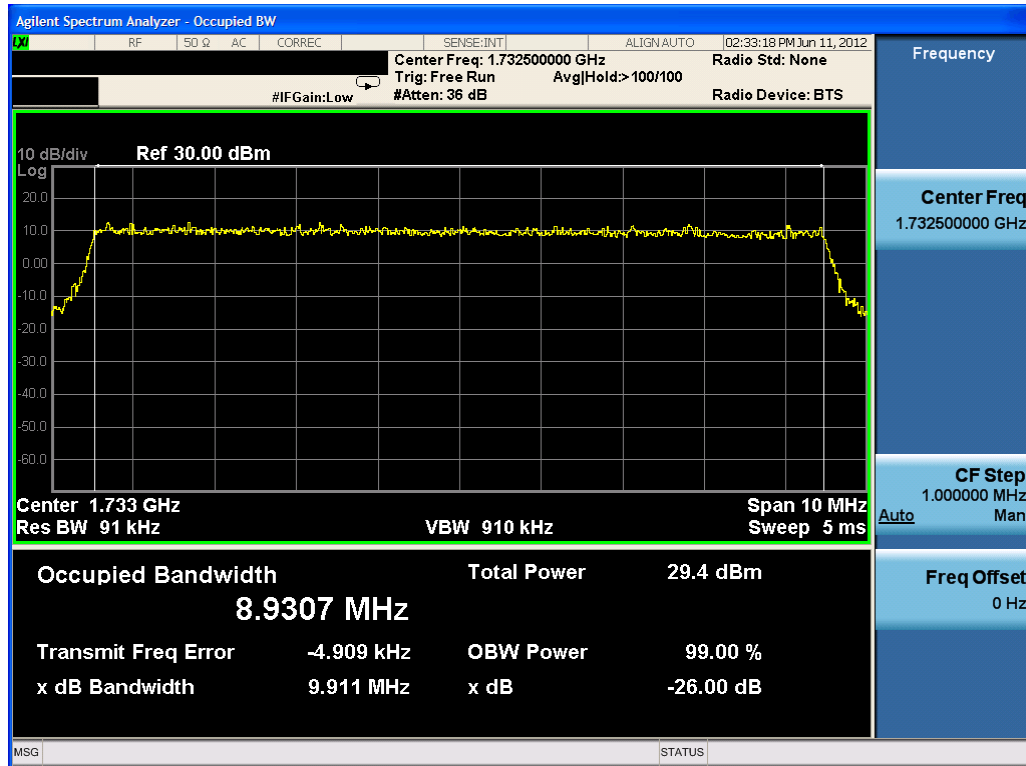


Plot 7-42. Occupied Bandwidth Plot (16-QAM – RB Size 50)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 48 of 68

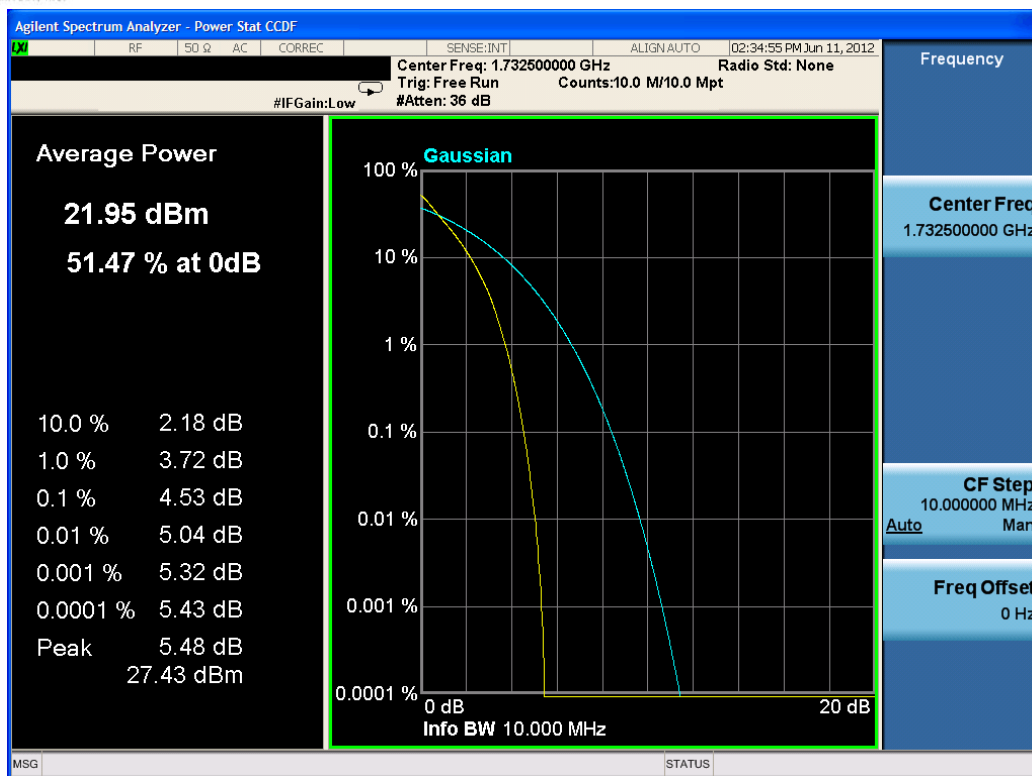


Plot 7-43. Peak to Average Ratio Plot (QPSK - RB Size 50)

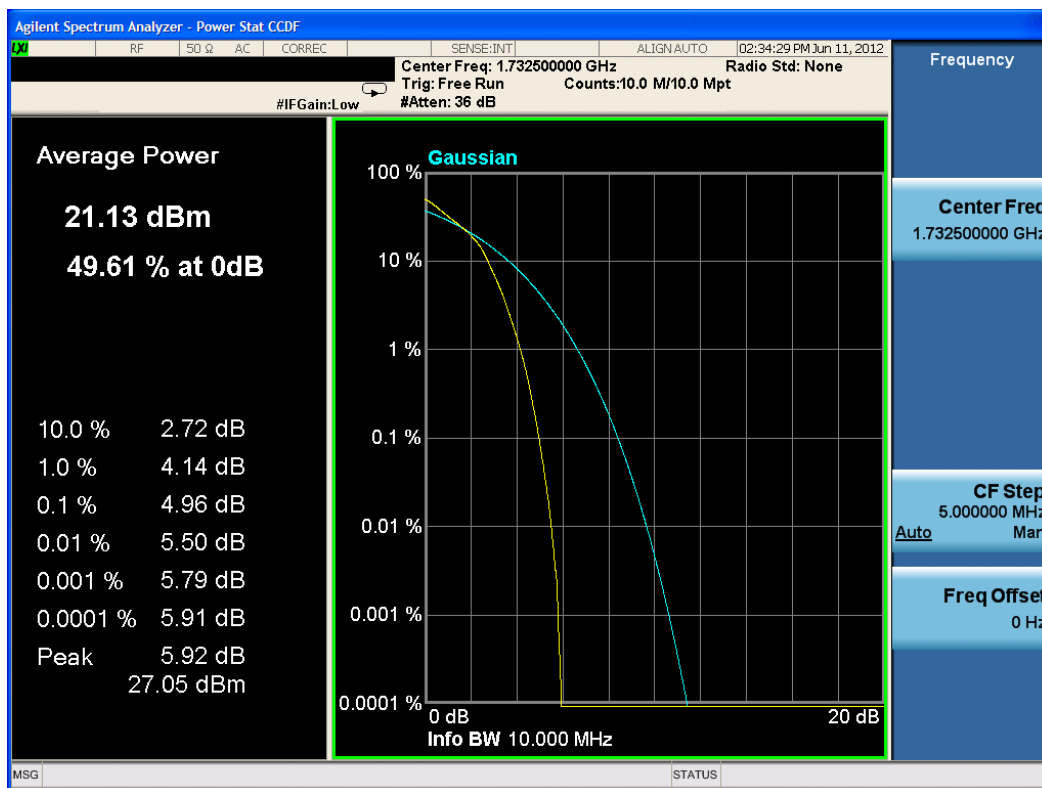


Plot 7-44. Peak to Average Ratio Plot (16QAM - RB Size 50)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 49 of 68

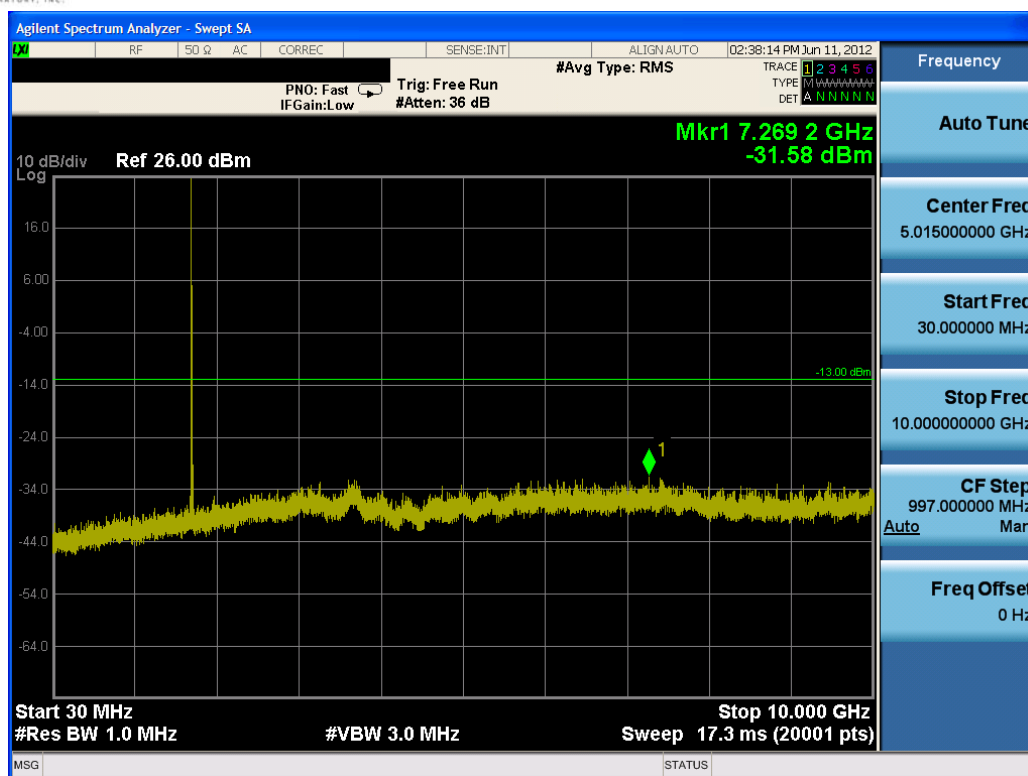


Plot 7-45. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0– Low Channel)

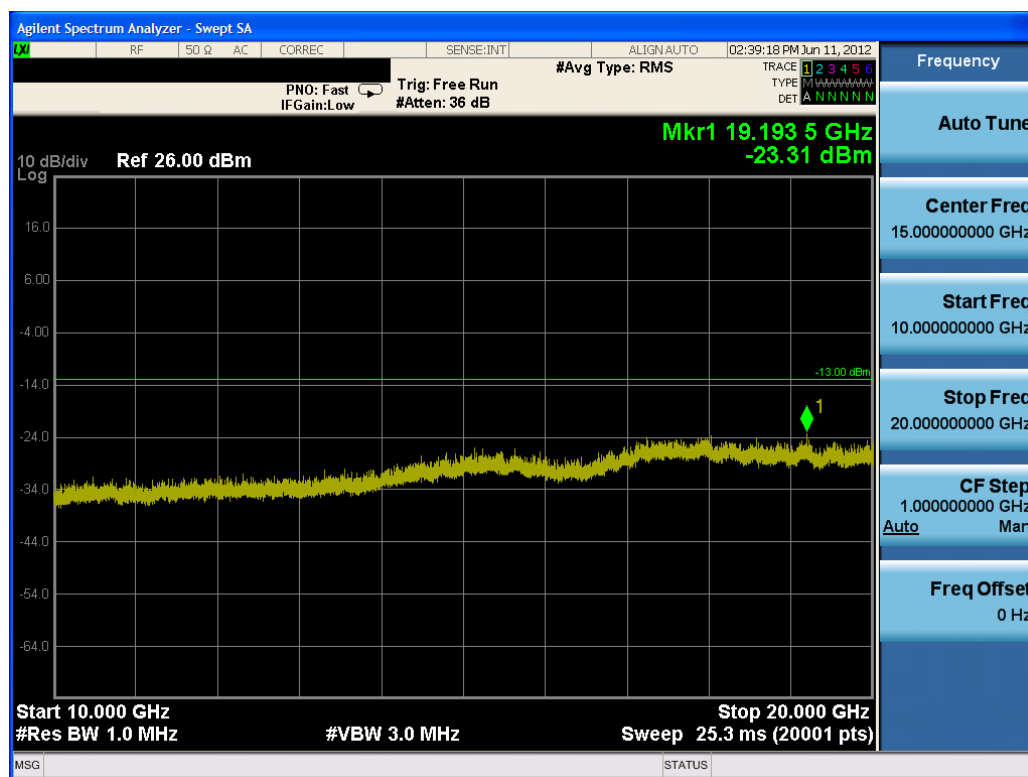


Plot 7-46. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 50 of 68

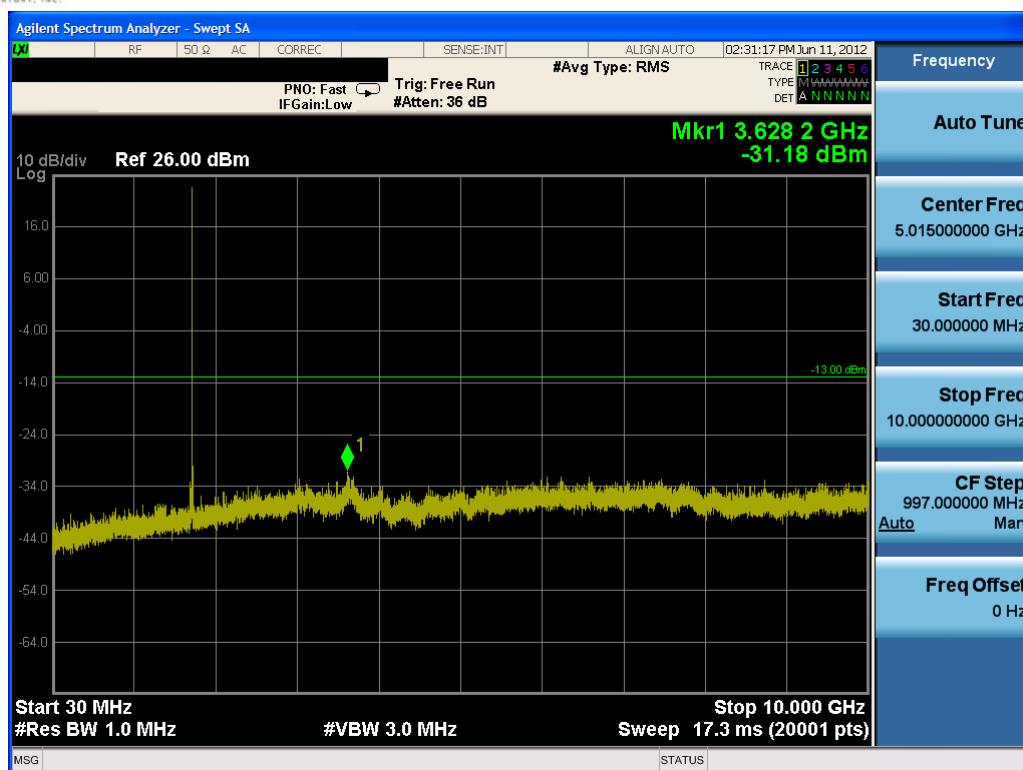


Plot 7-47. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

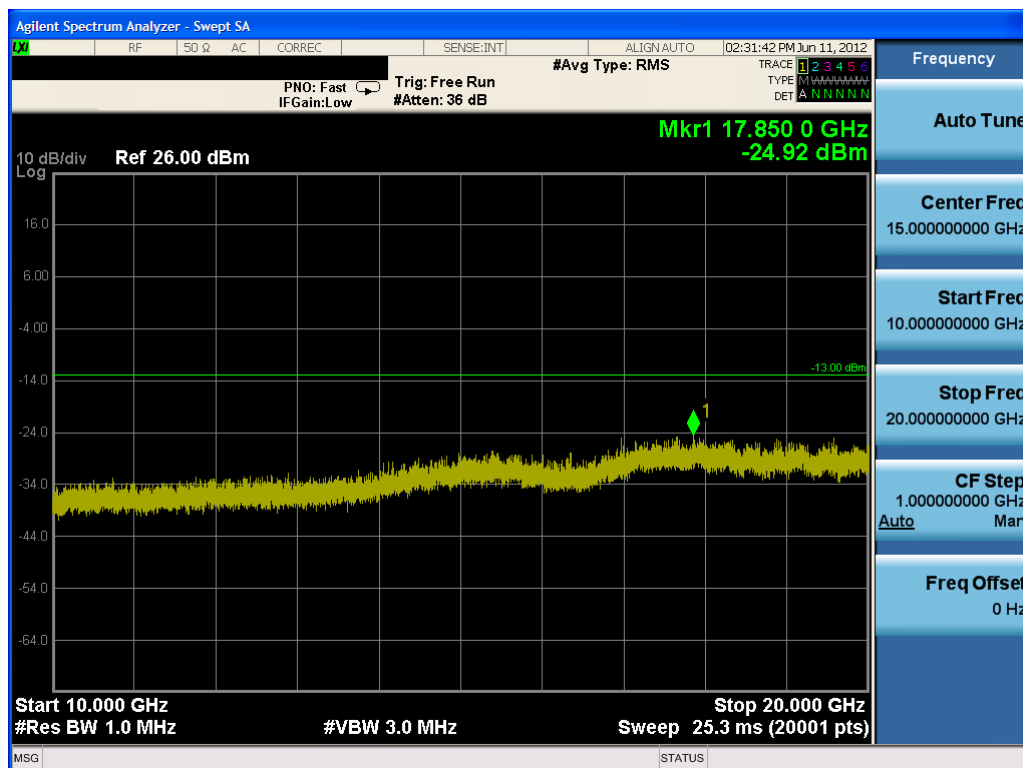


Plot 7-48. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 51 of 68

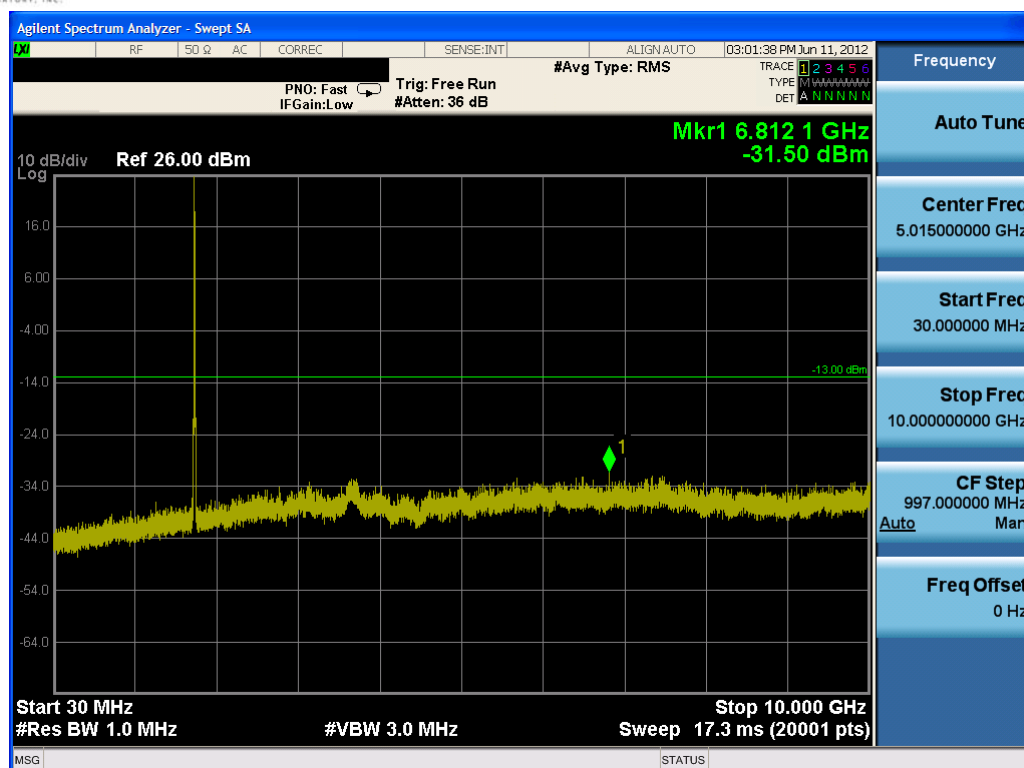


Plot 7-49. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

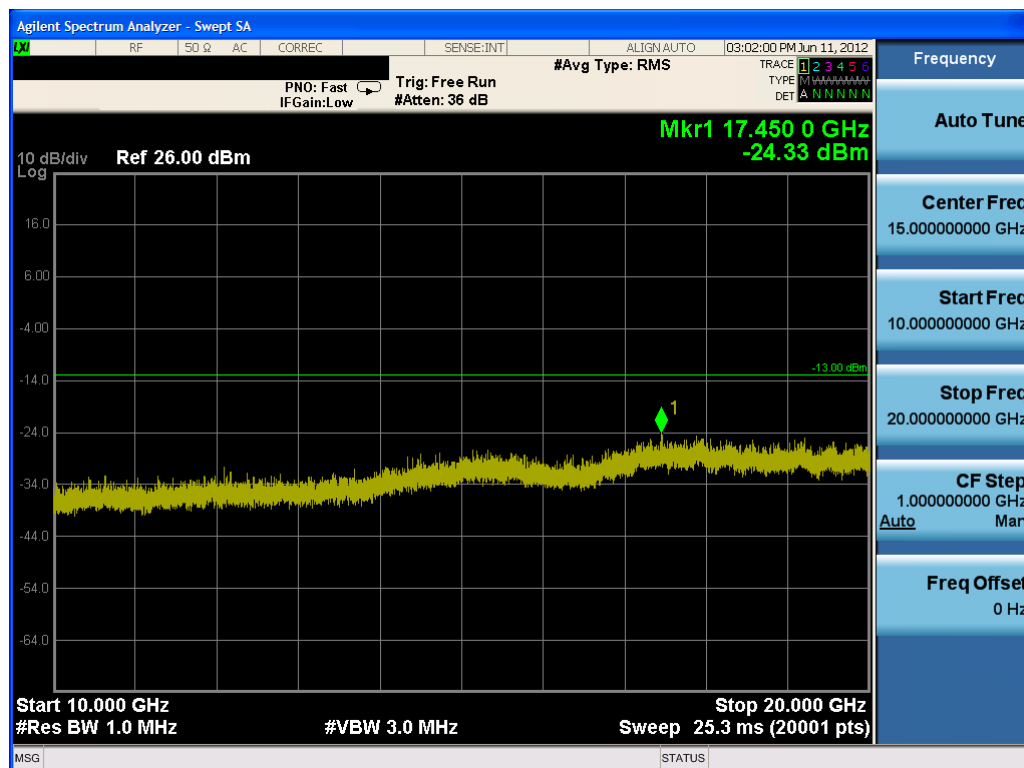

Plot 7-50. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 52 of 68

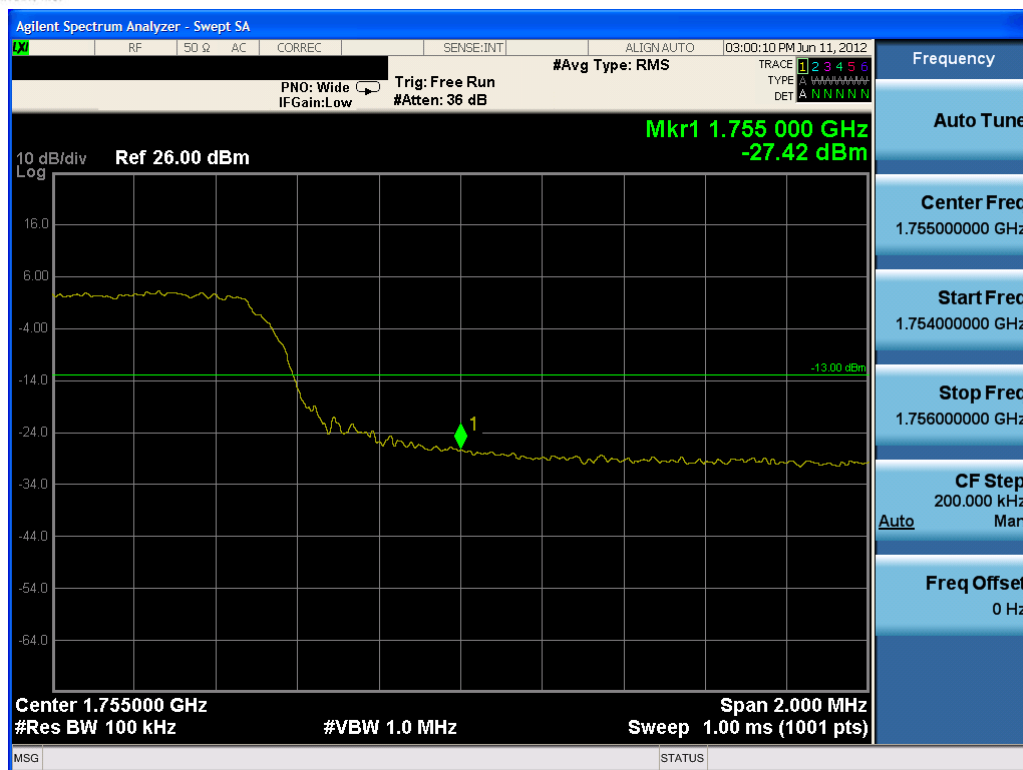


Plot 7-51. Upper Band Edge Plot (QPSK – RB Size 50)




Plot 7-52. Upper Band Edge Plot (QPSK – RB Size 50)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 53 of 68

BAND 4 – 15 MHz BW

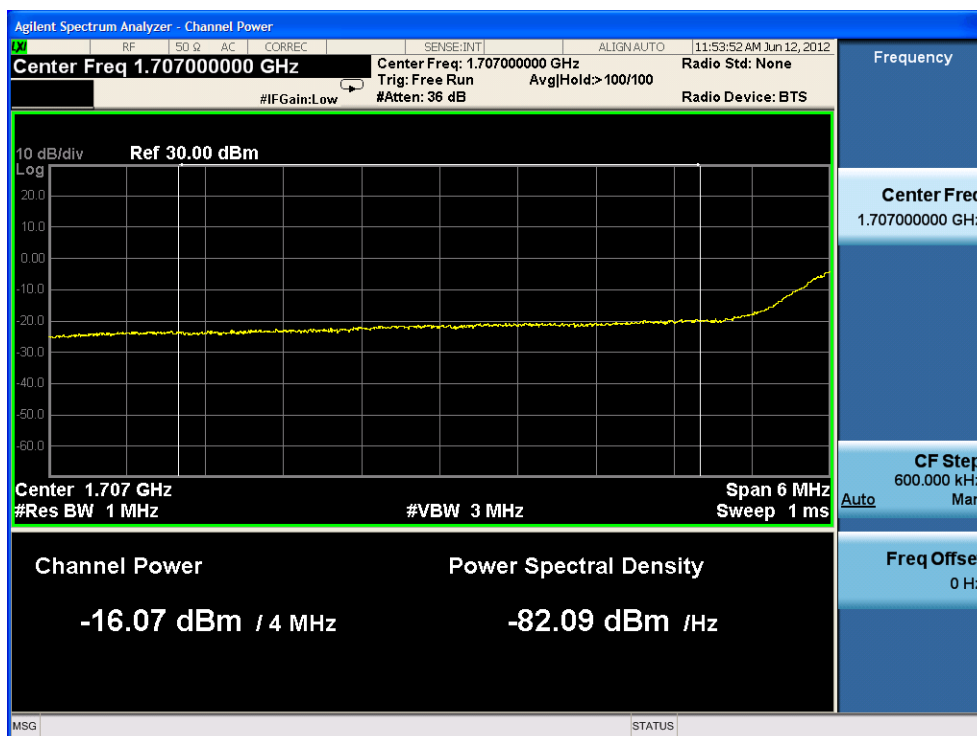


Plot 7-53. Lower Band Edge Plot (QPSK – RB Size 75)

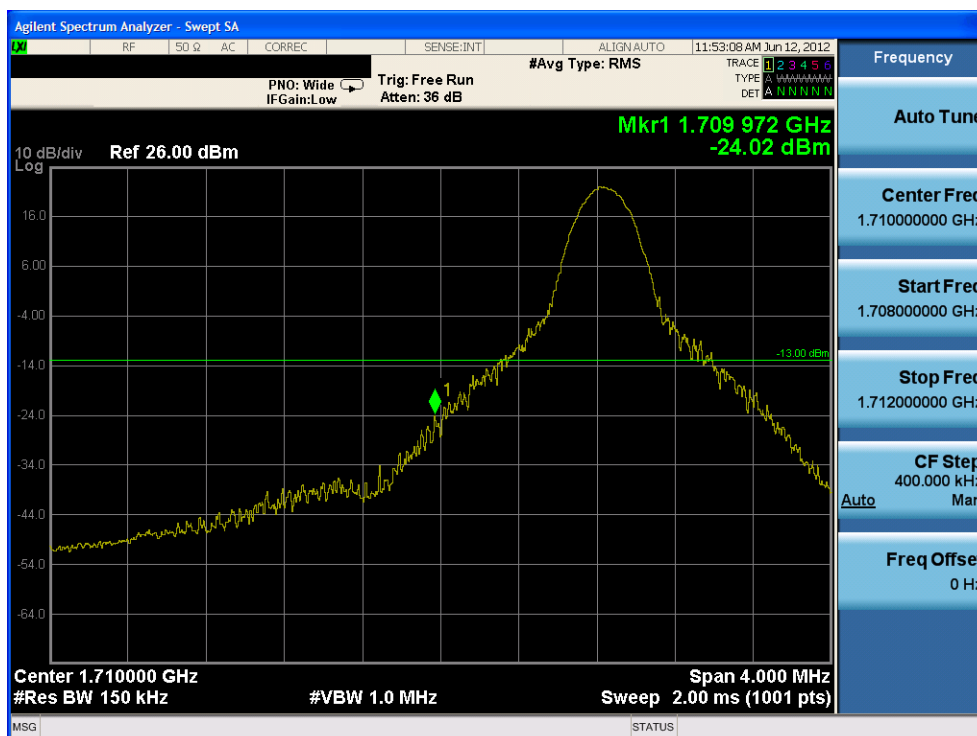


Plot 7-54. Lower Band Edge Plot (QPSK – RB Size 1, Offset 0)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 54 of 68

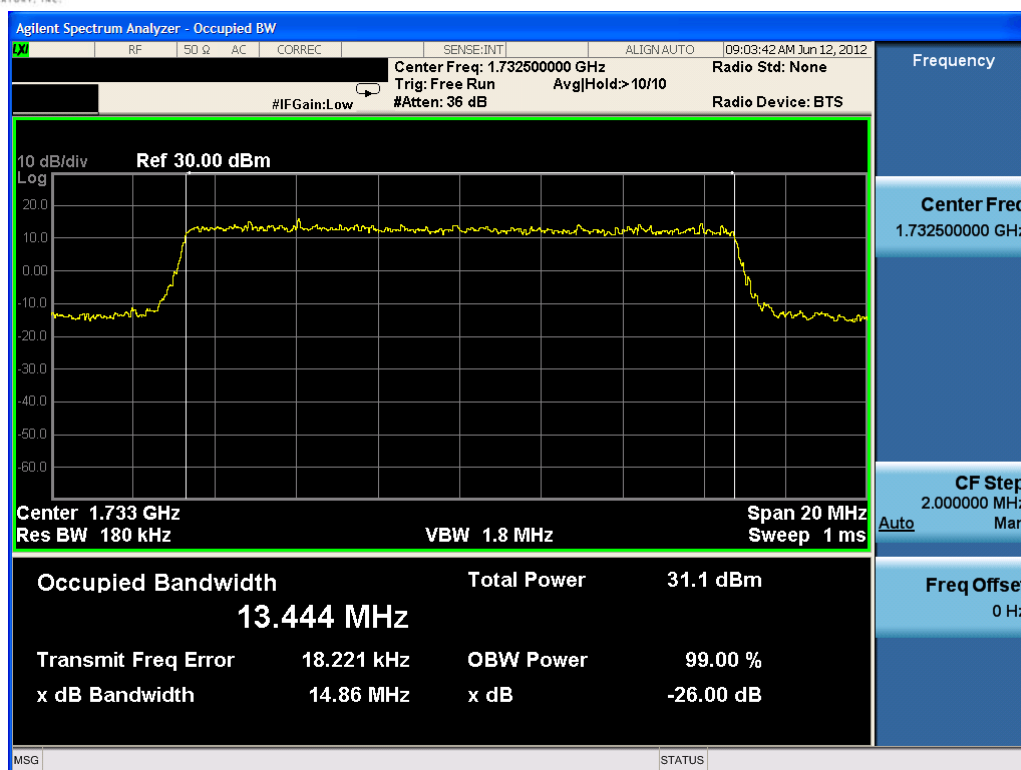


Plot 7-55. Occupied Bandwidth Plot (QPSK – RB Size 75)

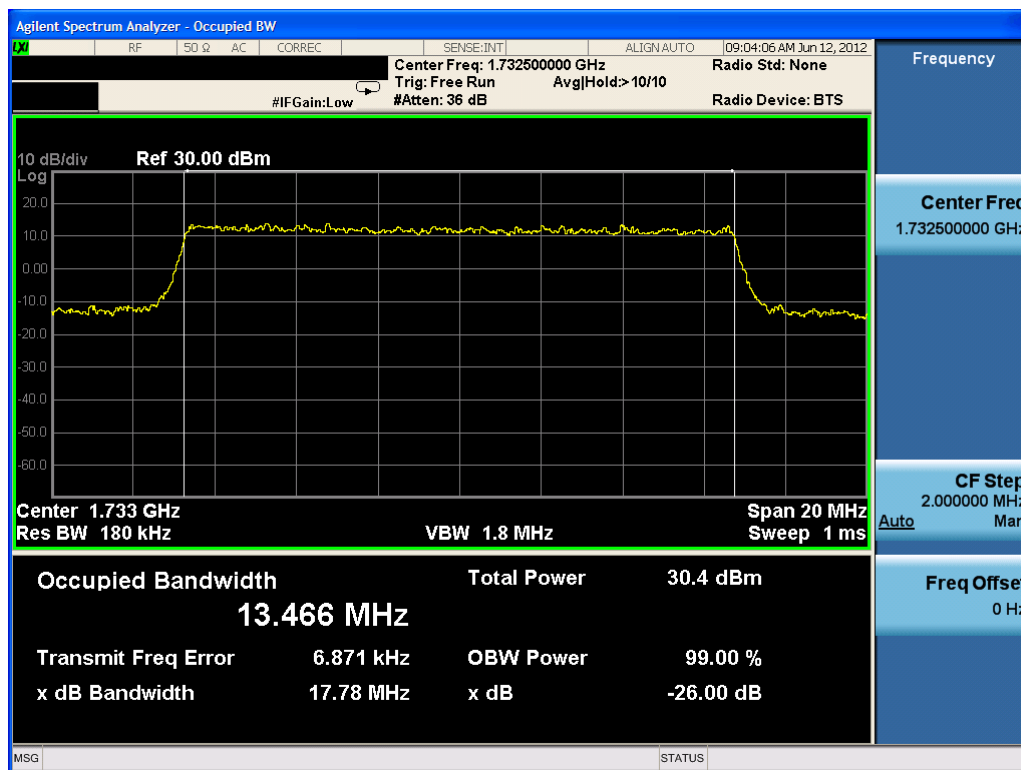


Plot 7-56. Occupied Bandwidth Plot (16-QAM – RB Size 75)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 55 of 68

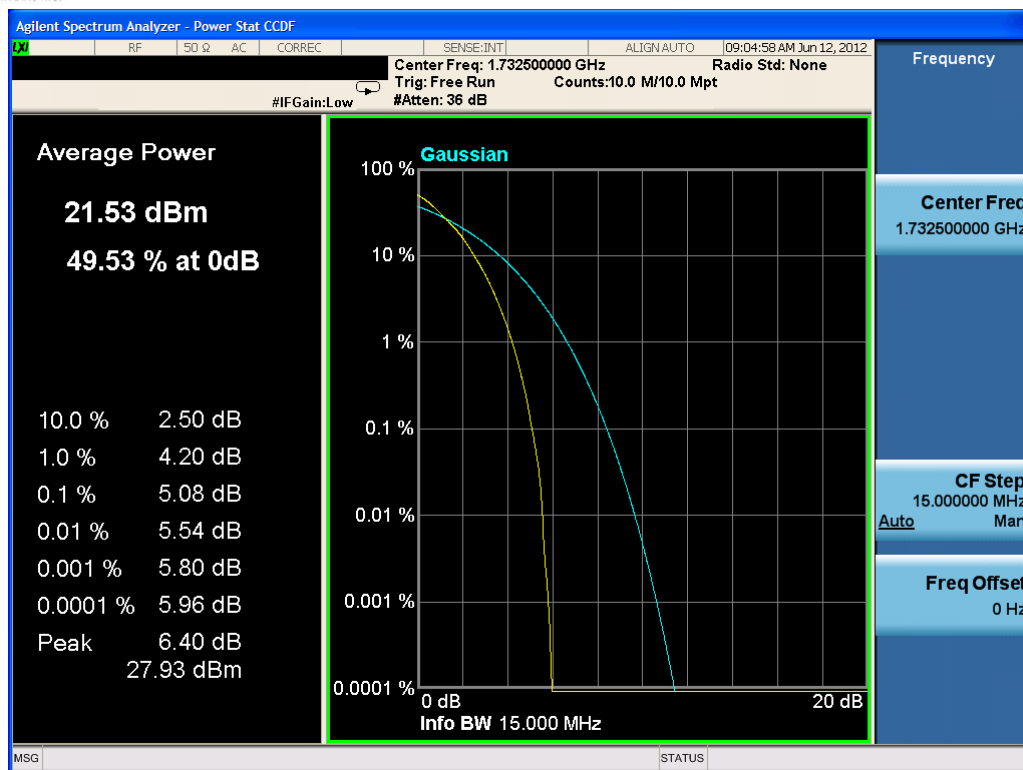


Plot 7-57. Peak to Average Ratio Plot (QPSK – RB Size 75)

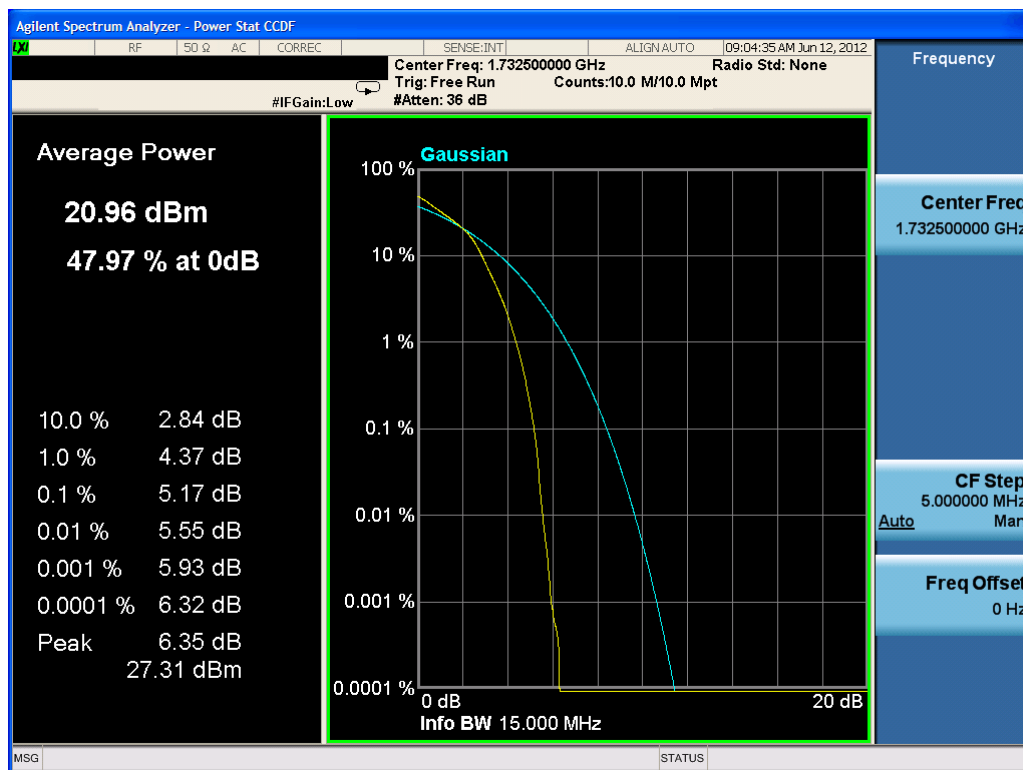


Plot 7-58. Peak to Average Ratio Plot (16QAM – RB Size 75)

FCC ID: A3LSGHI307			FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module			Page 56 of 68

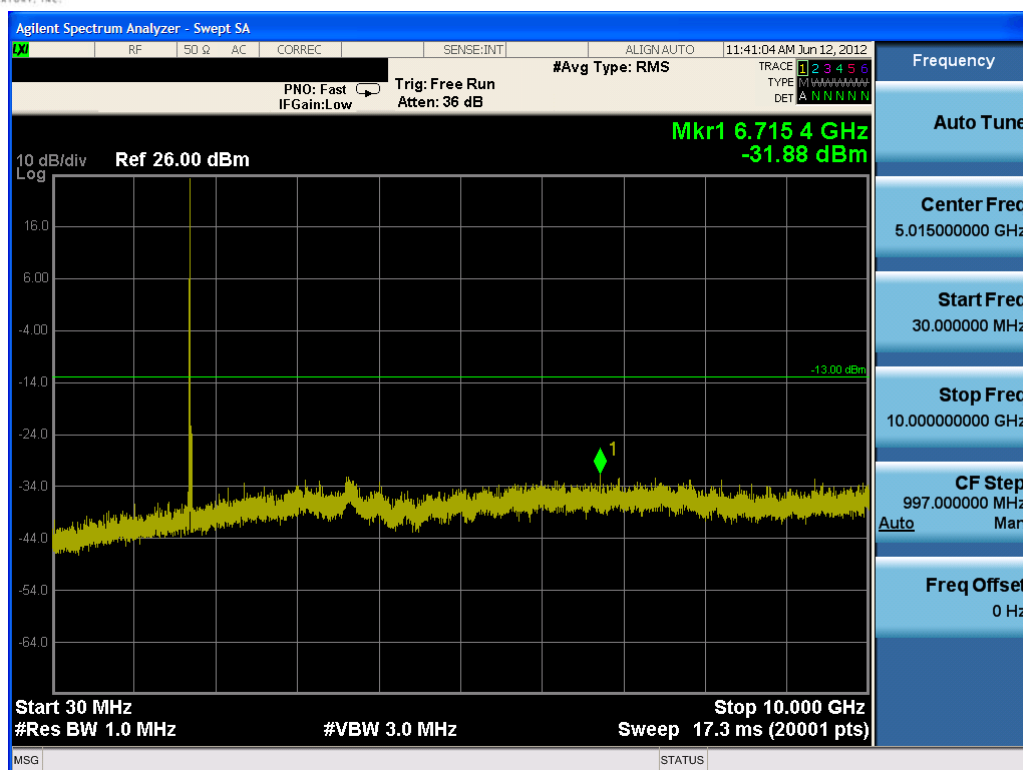


Plot 7-59. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

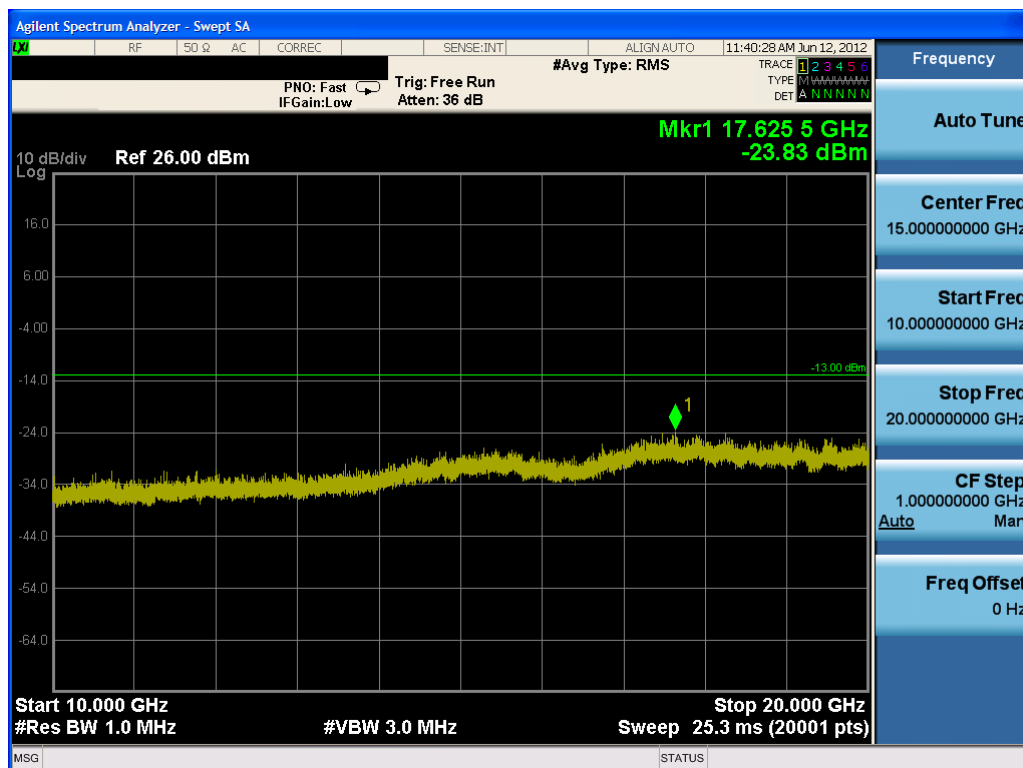


Plot 7-60. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 57 of 68

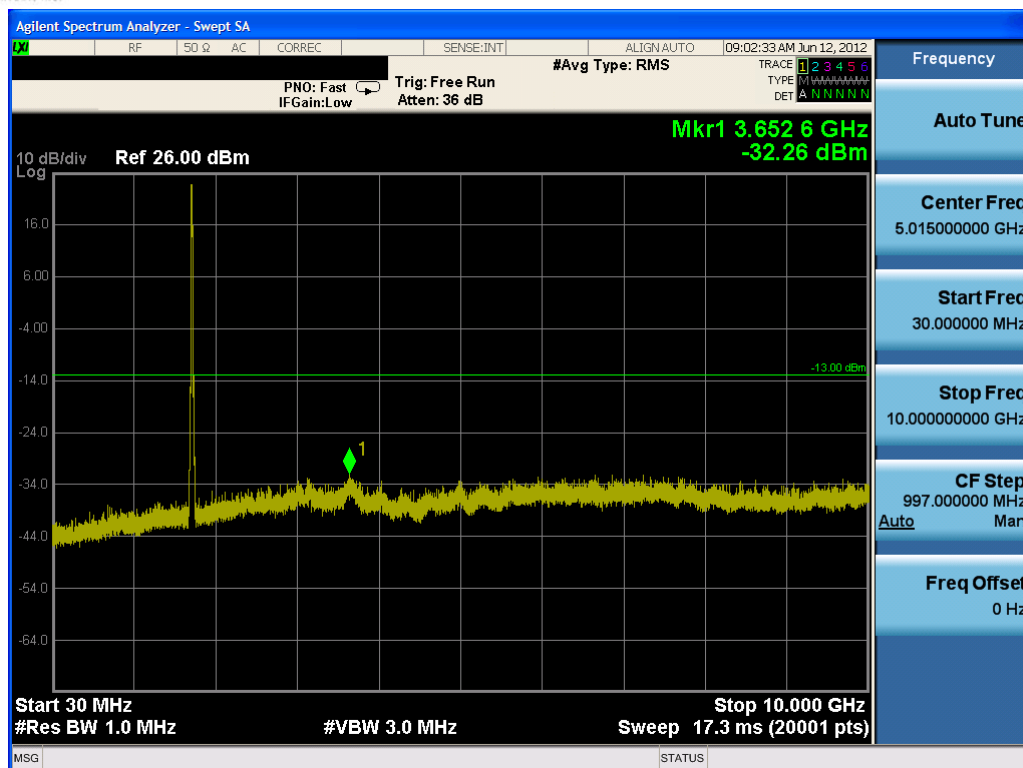


Plot 7-61. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

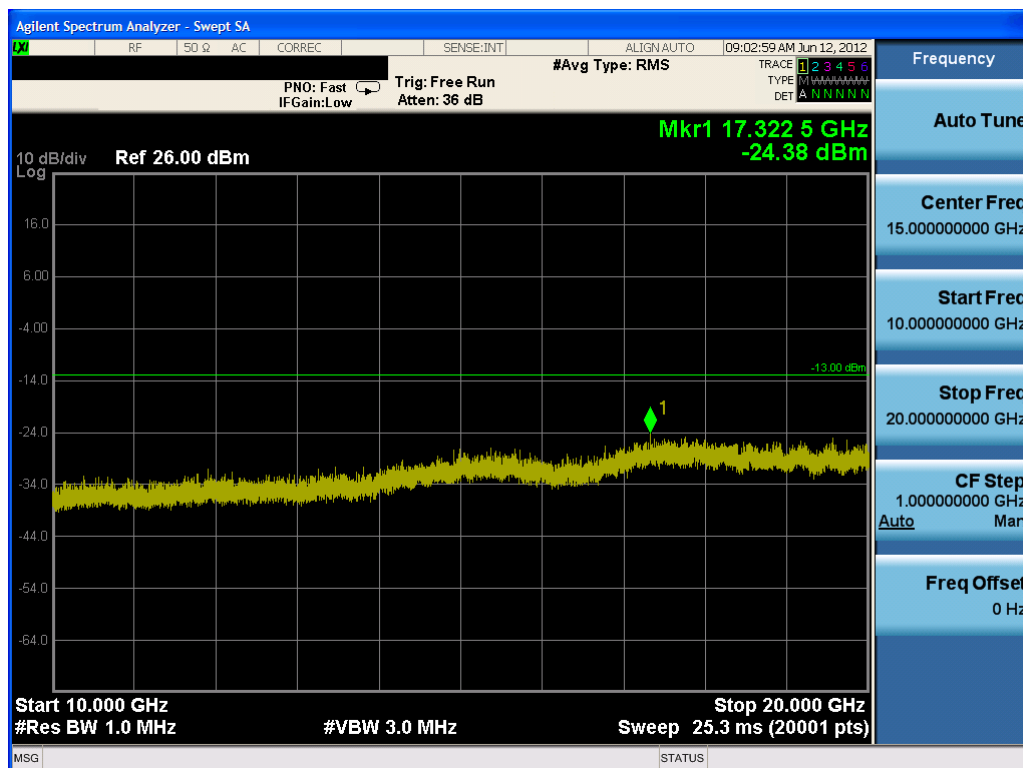


Plot 7-62. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 58 of 68

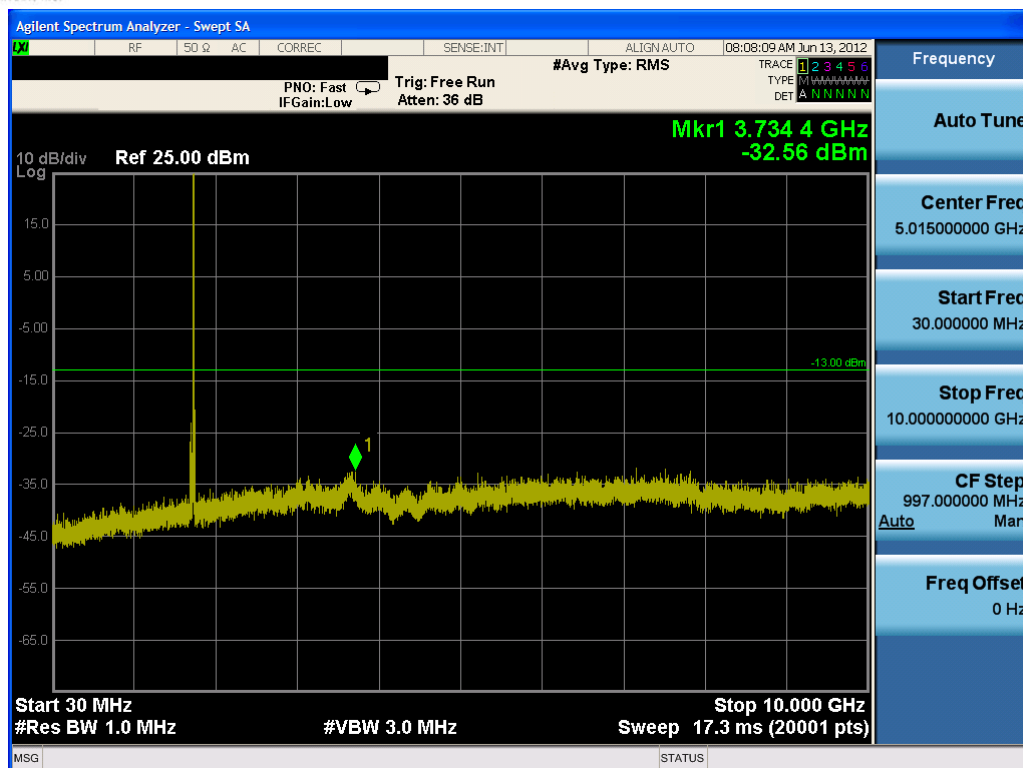


Plot 7-63. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

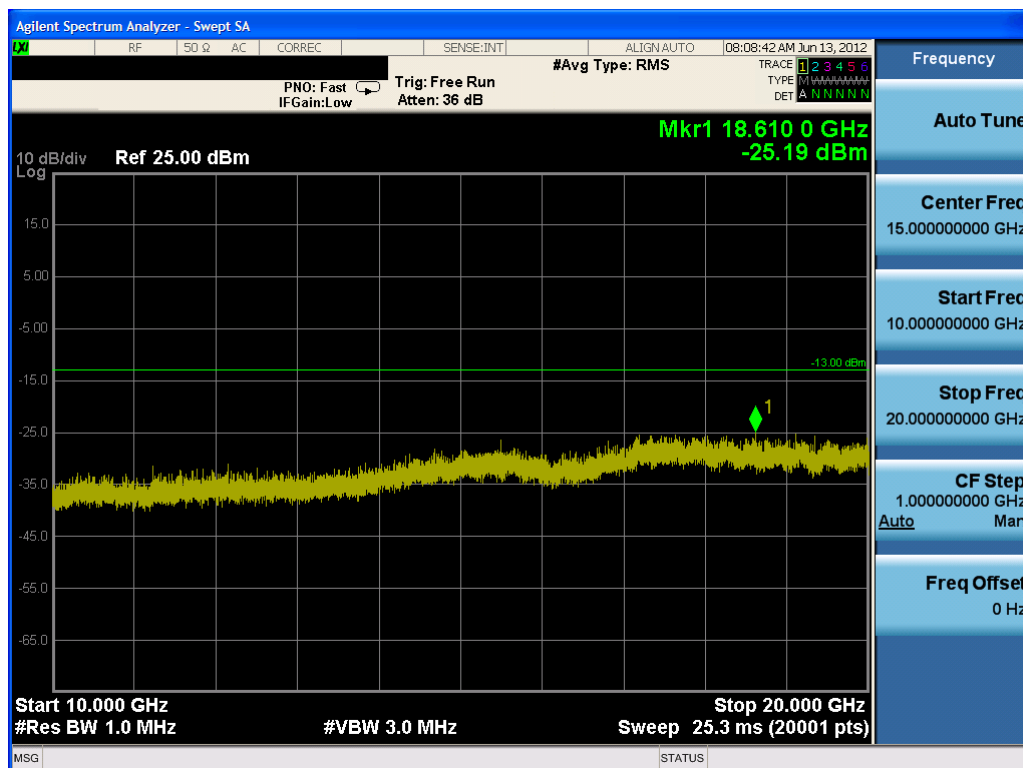


Plot 7-64. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 59 of 68

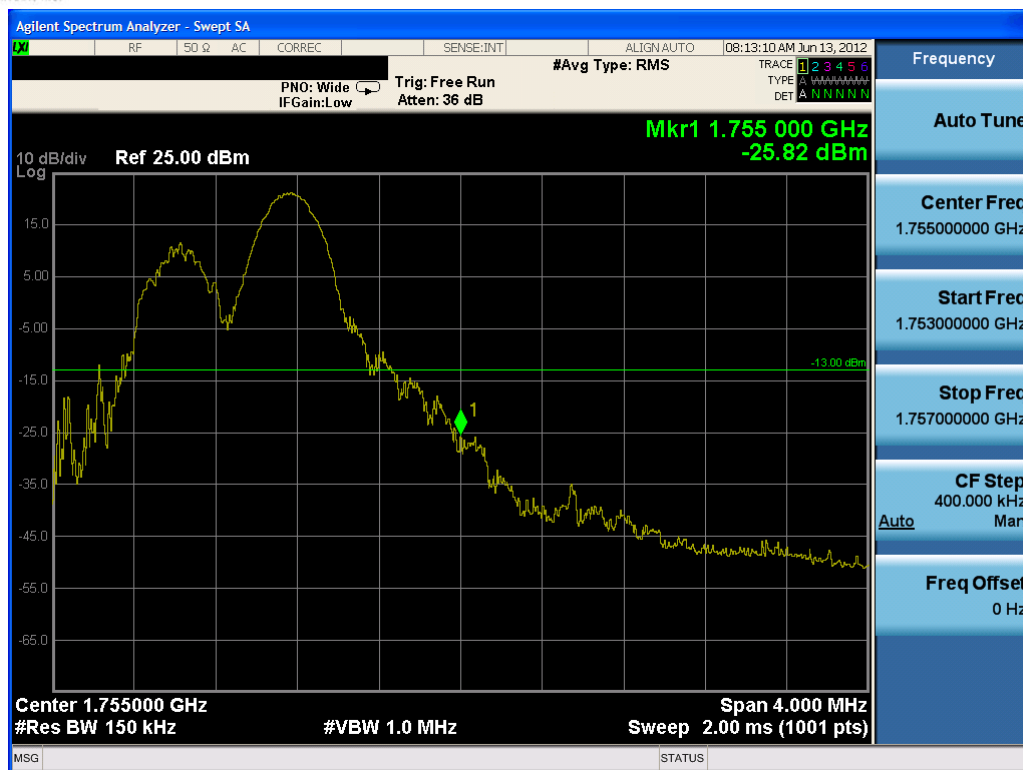

Plot 7-65. Upper Band Edge Plot (QPSK - RB Size 1, Offset 74)

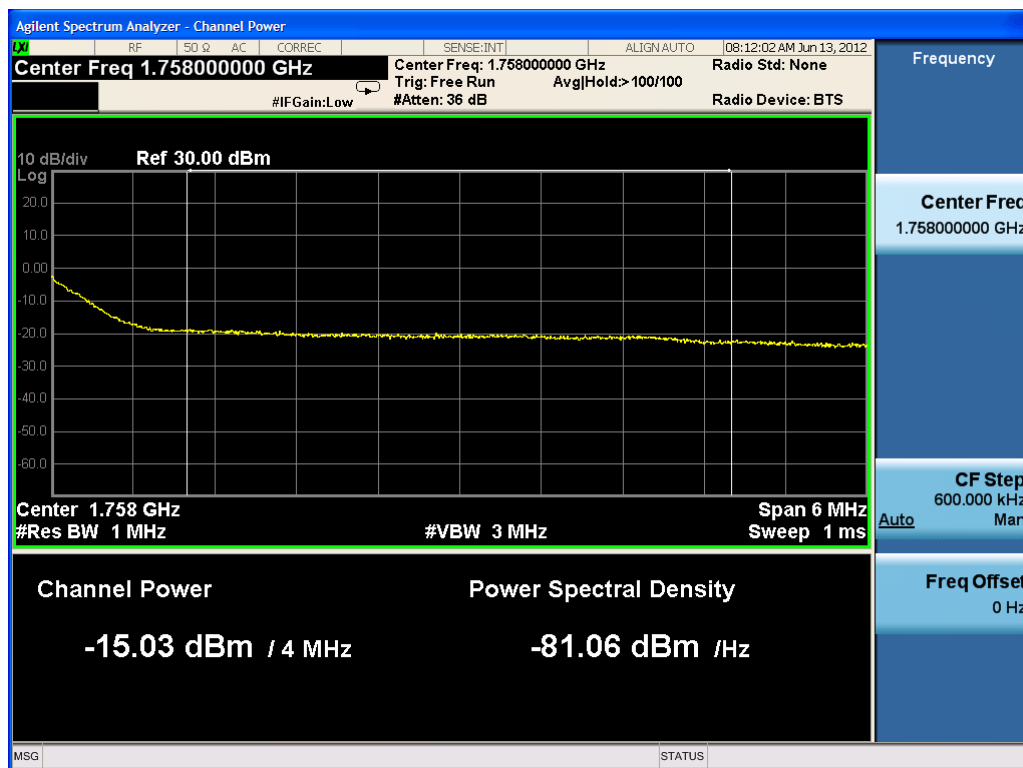


Plot 7-66. Upper Band Edge Plot (QPSK - RB Size 75)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 60 of 68

BAND 4 – 20 MHz BW




Plot 7-67. Lower Band Edge Plot (QPSK – RB Size 100)

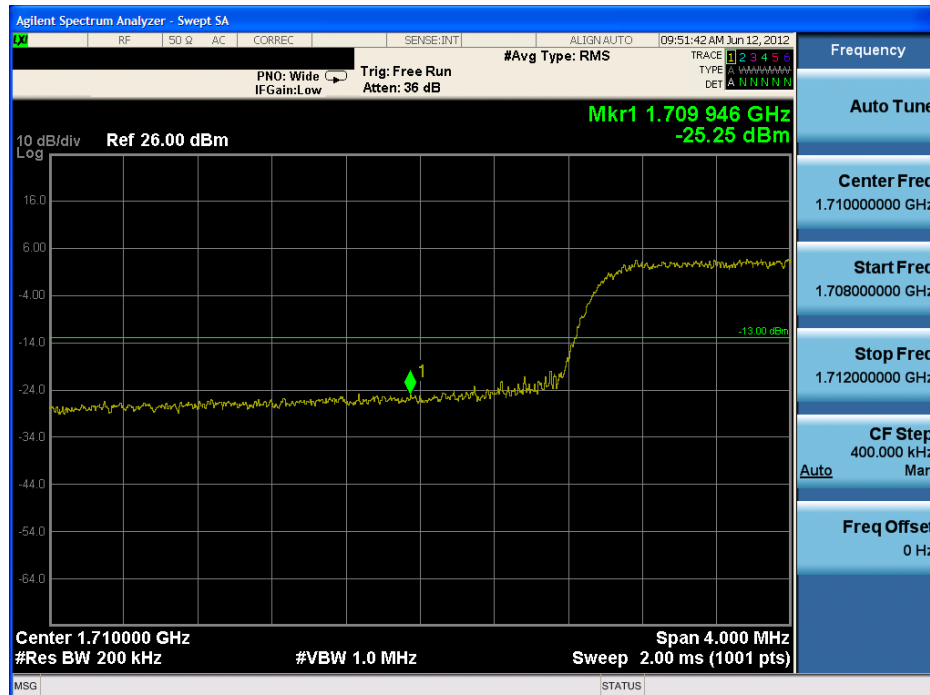


Plot 7-68. Lower Band Edge Plot (QPSK – RB Size 100)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 61 of 68

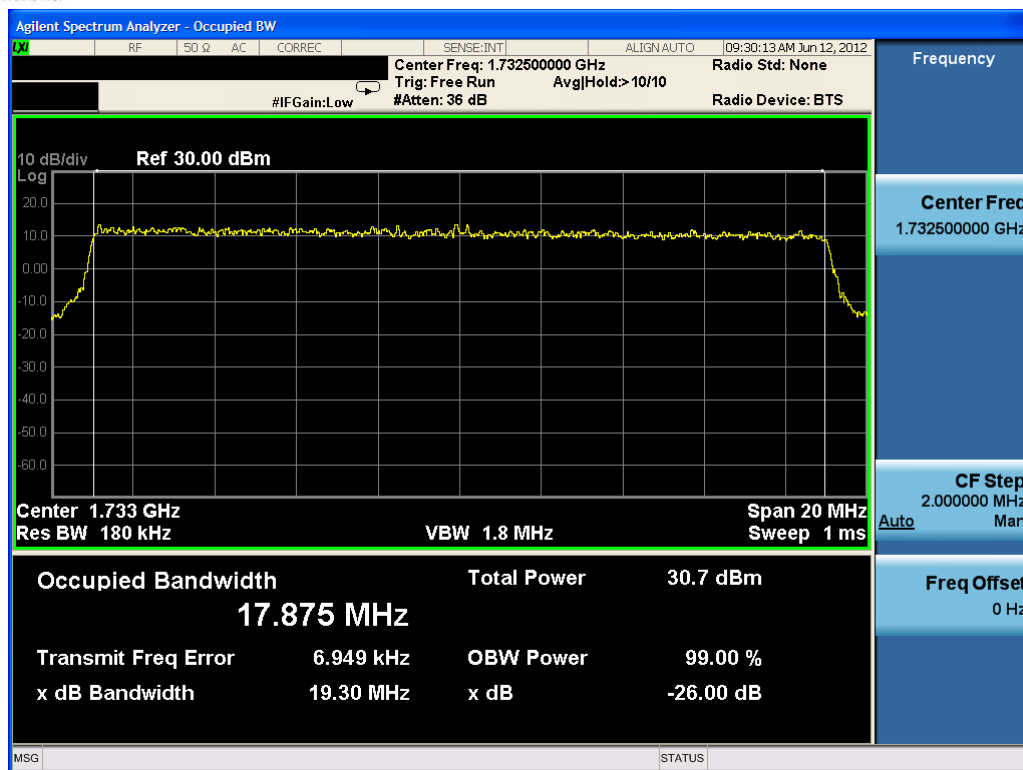


Plot 7-69. Occupied Bandwidth Plot (QPSK – RB Size 100)

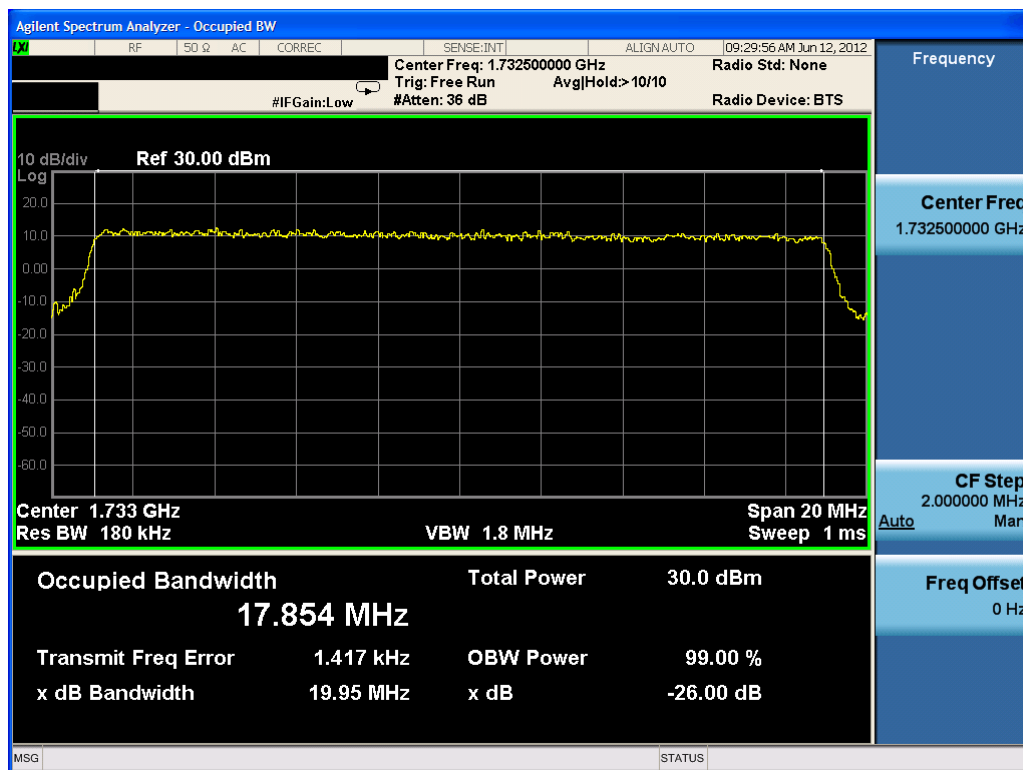


Plot 7-70. Occupied Bandwidth Plot (16-QAM – RB Size 100)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 62 of 68

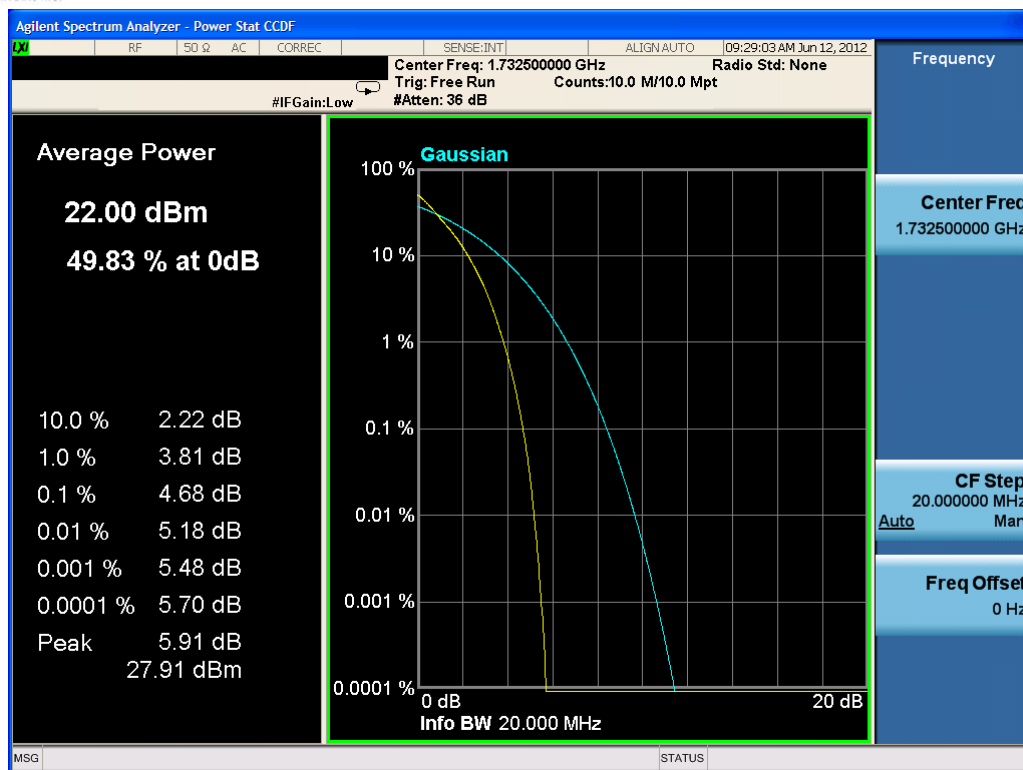


Plot 7-71. Peak to Average Ratio Plot (QPSK – RB Size 100)

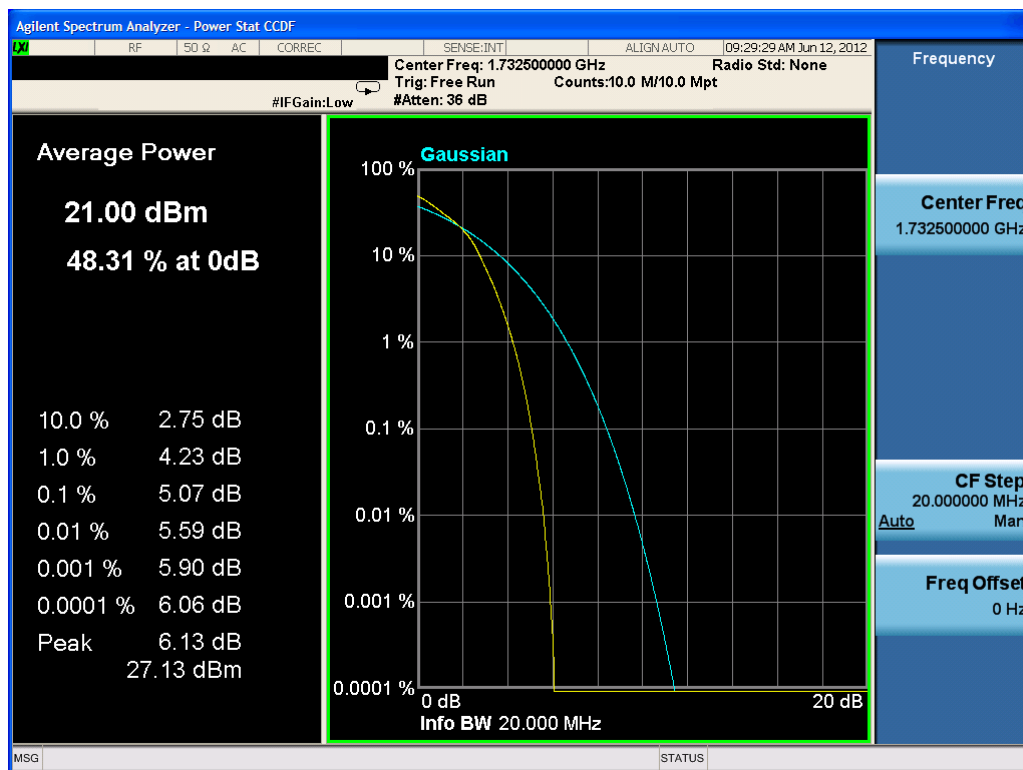


Plot 7-72. Peak to Average Ratio Plot (16QAM – RB Size 100)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 63 of 68

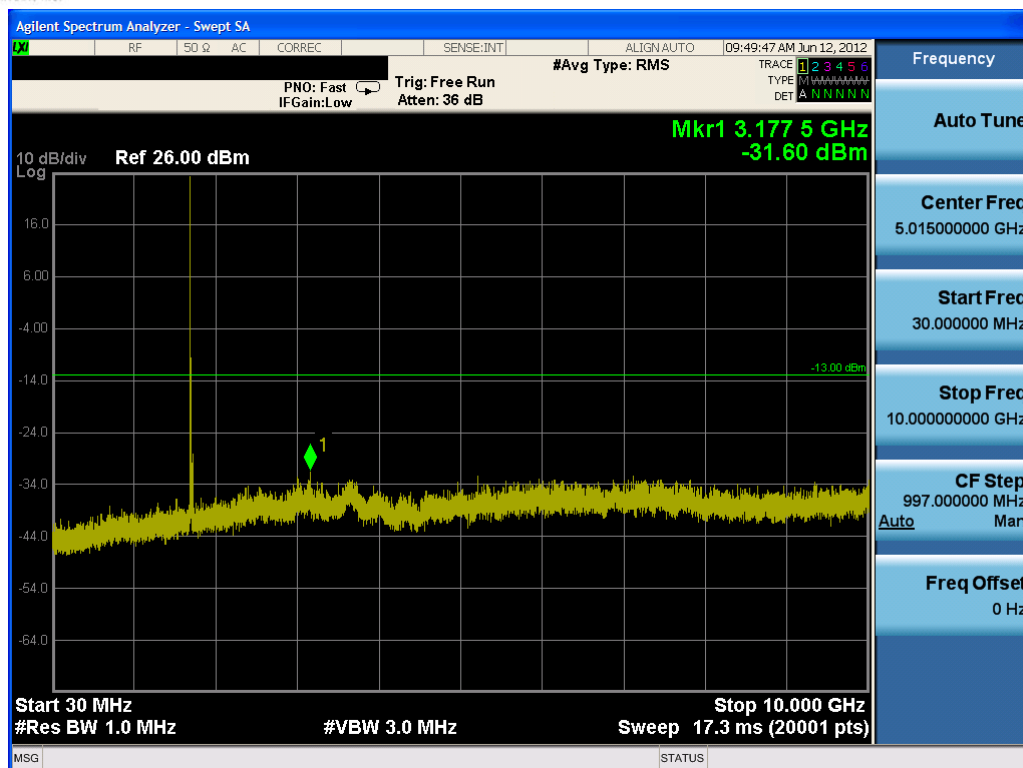


Plot 7-73. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

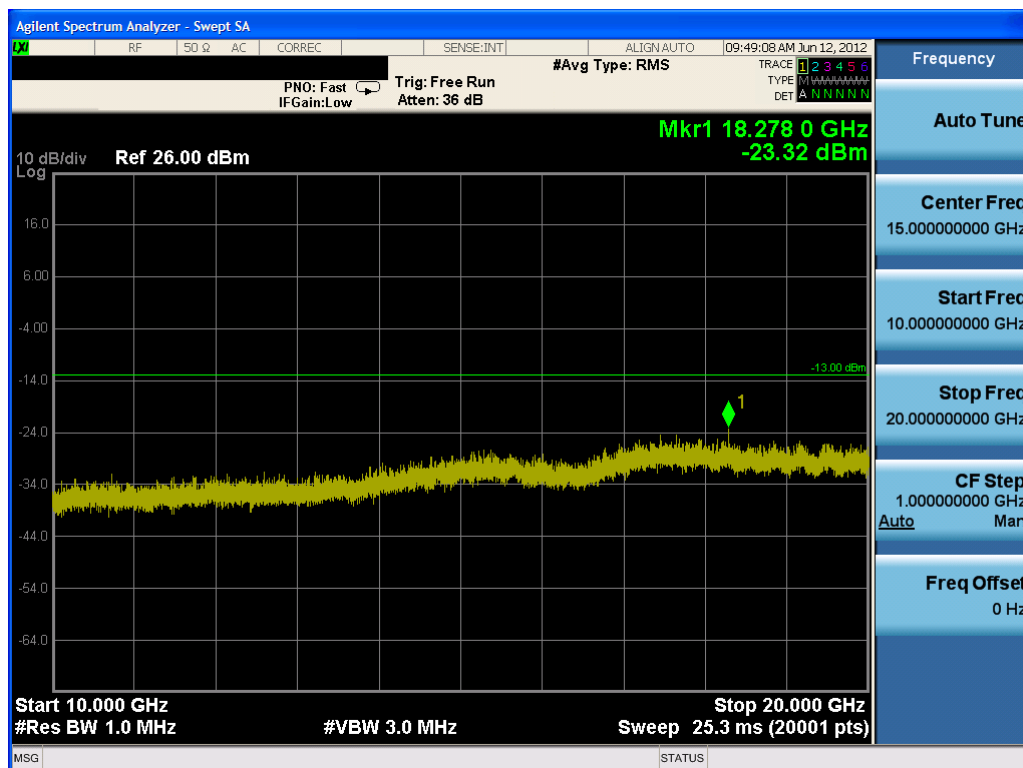


Plot 7-74. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 64 of 68

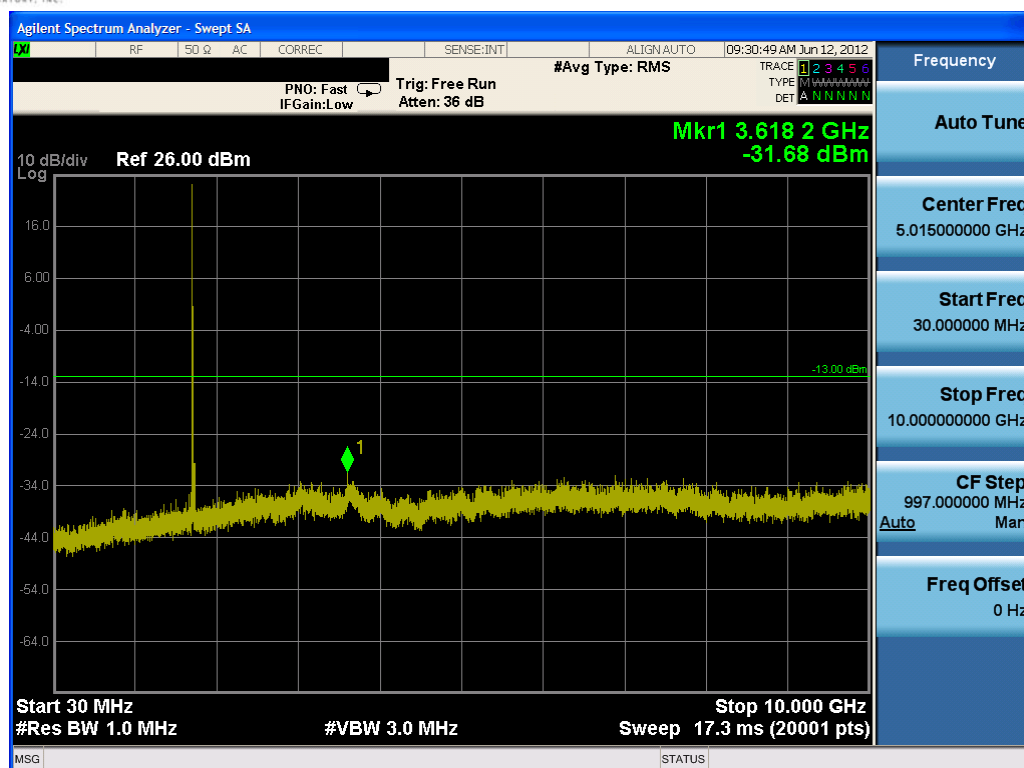


Plot 7-75. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

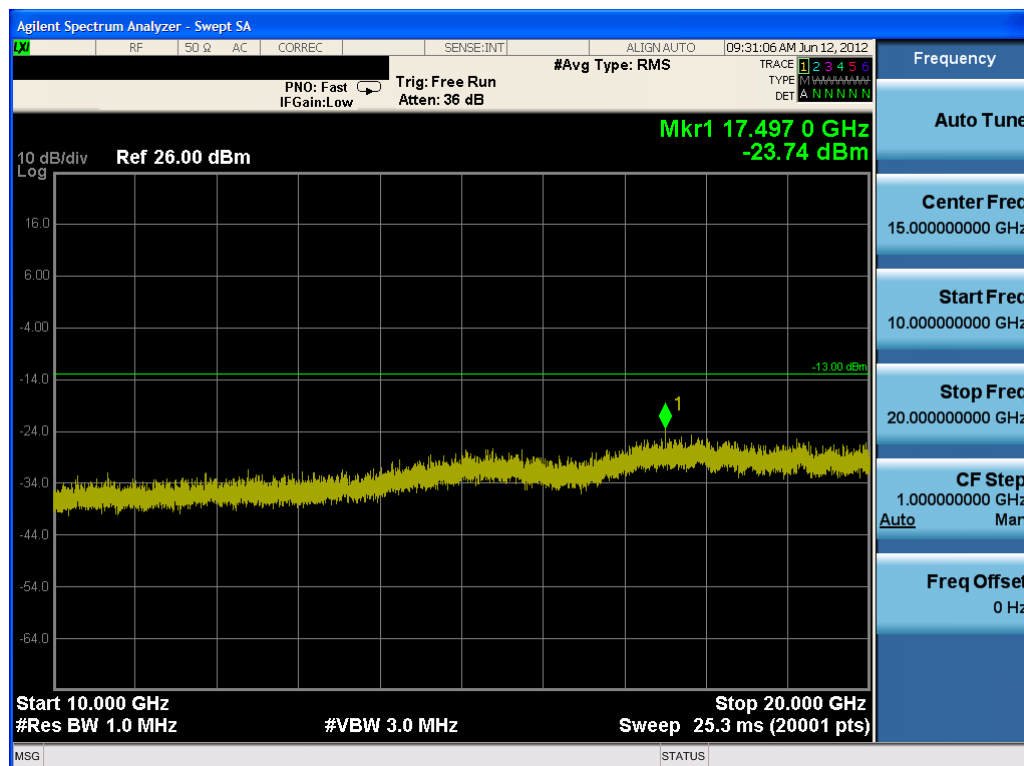


Plot 7-76. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – Mid Channel)

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 65 of 68

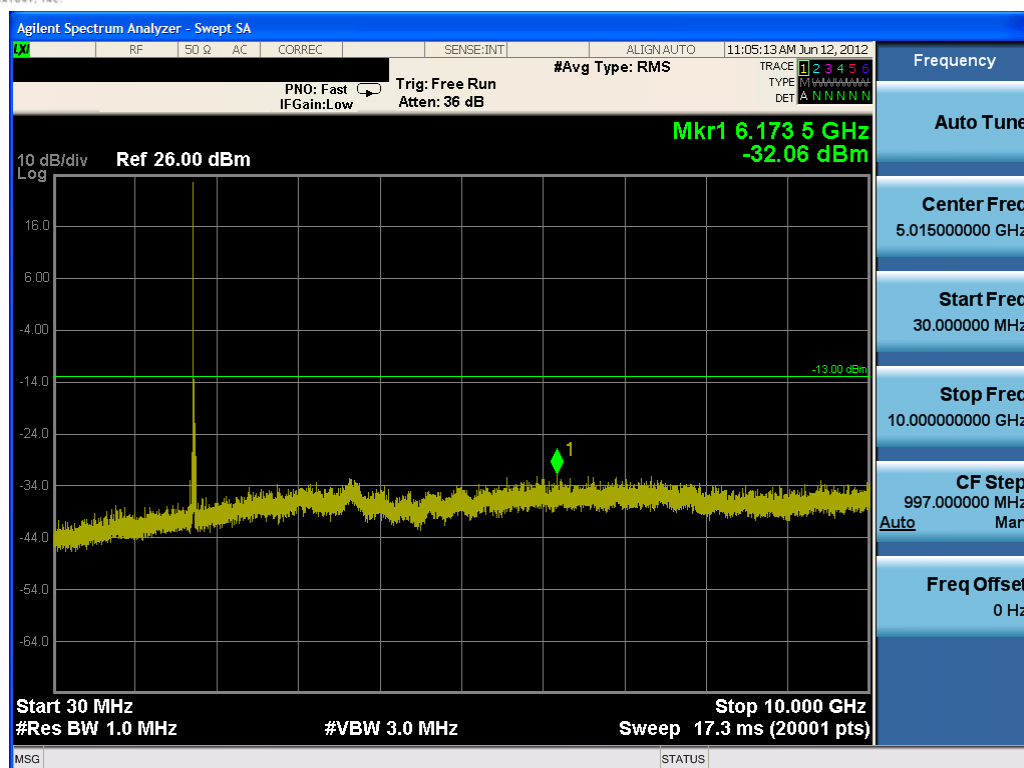


Plot 7-77. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

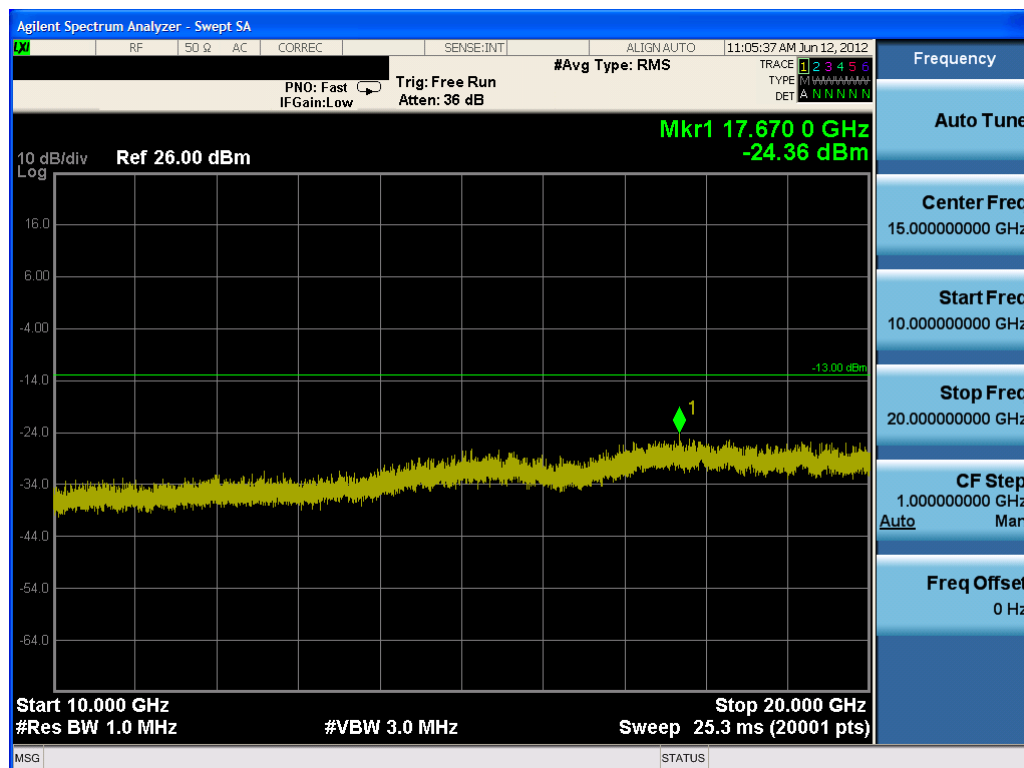

Plot 7-78. Conducted Spurious Plot (QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSGHI307	 FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module	Page 66 of 68

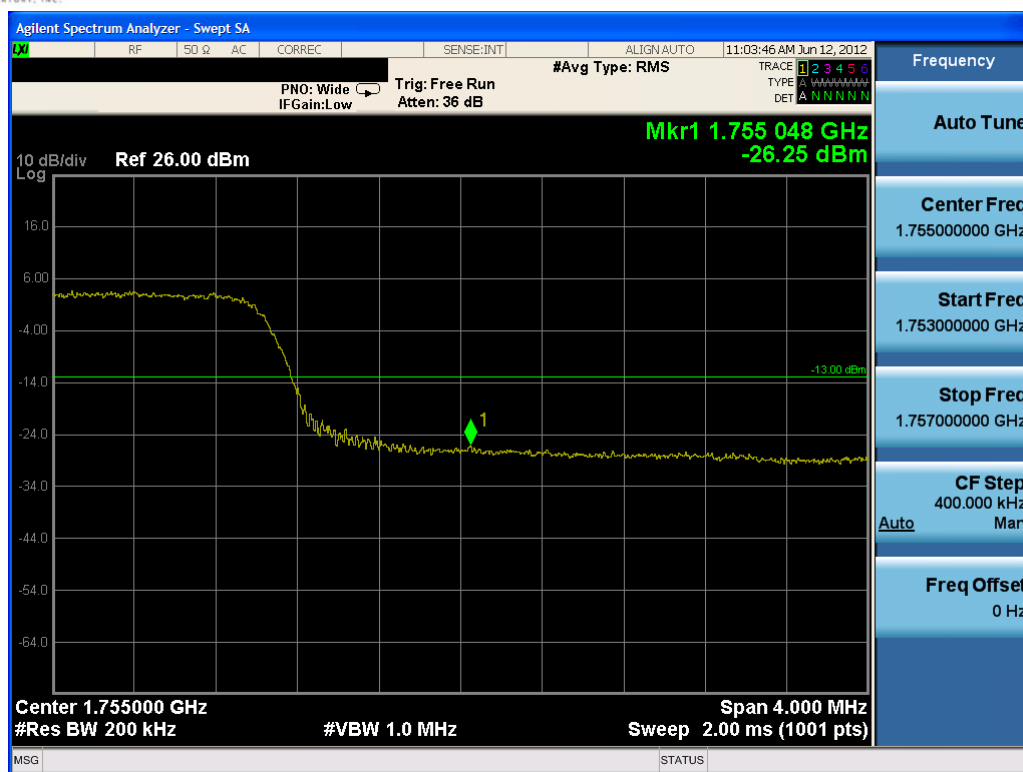

Plot 7-79. Upper Band Edge Plot (QPSK – RB Size 100)



Plot 7-80. Upper Band Edge Plot (16-QAM – RB Size 100)

FCC ID: A3LSGHI307	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 67 of 68

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Wireless Module FCC ID: A3LSGHI307** complies with all the requirements of Parts 2 and 27 of the FCC rules for LTE operation only.

FCC ID: A3LSGHI307		FCC Pt. 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1205290743.A3L	Test Dates: June 6 - 22, 2012	EUT Type: Wireless Module		Page 68 of 68