

APPENDIX 4: Photographs of test setup

1. Photographs of EUT



Rear




Front




Body-worn





2. Antenna position

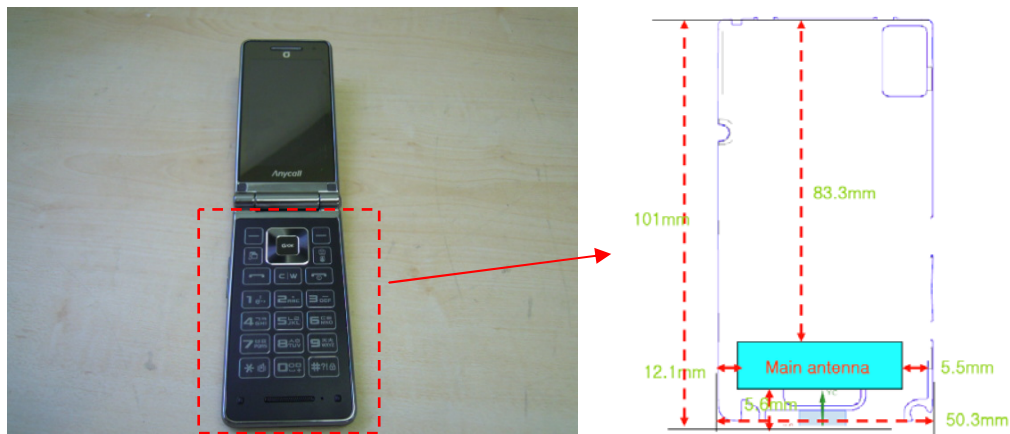



3. Photographs of setup

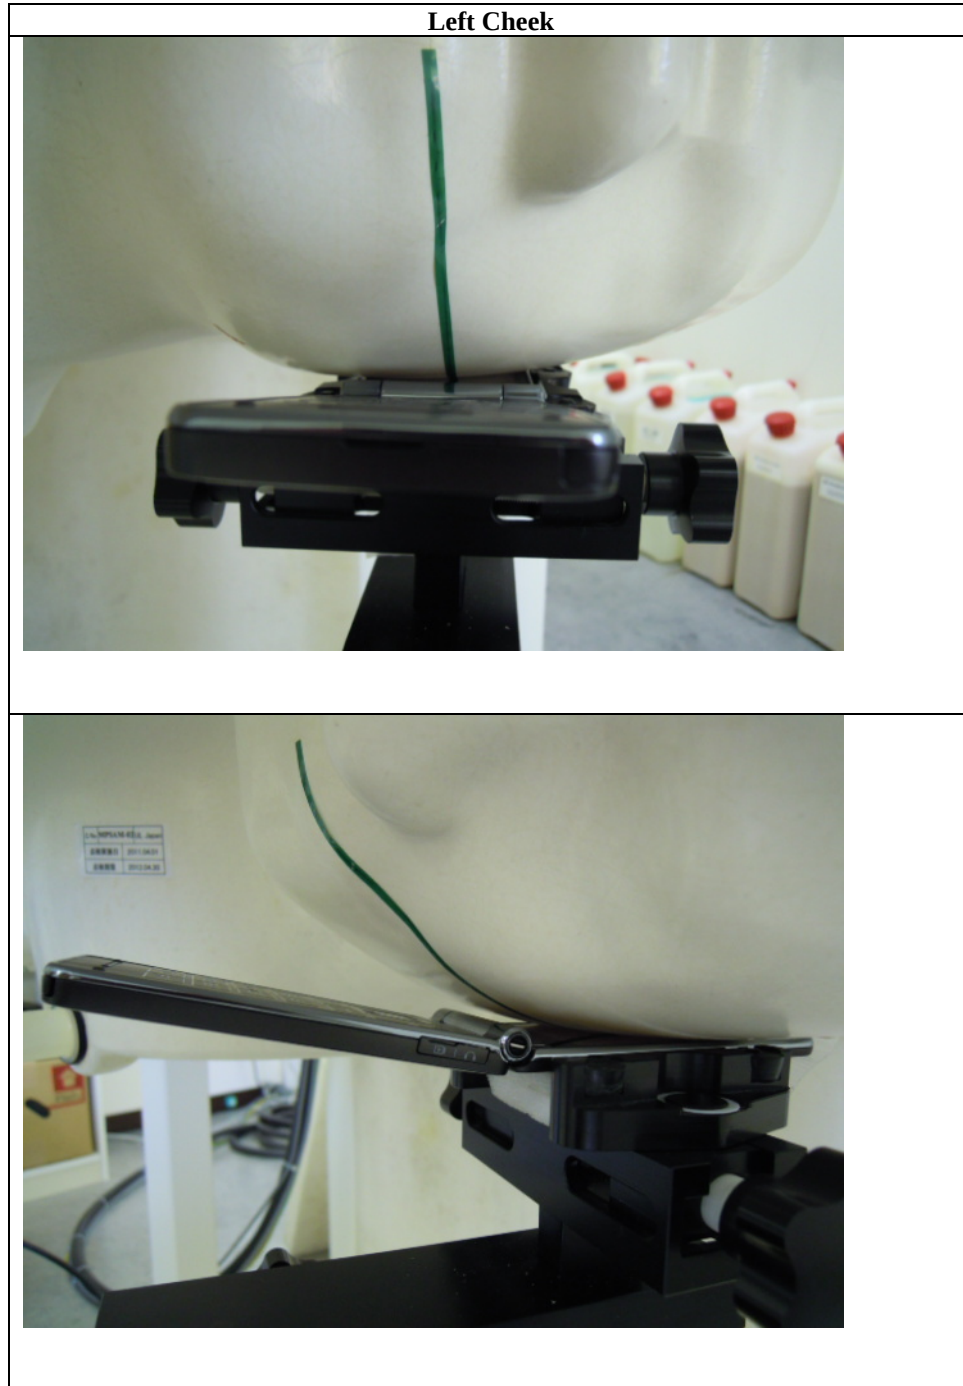



Left Tilt

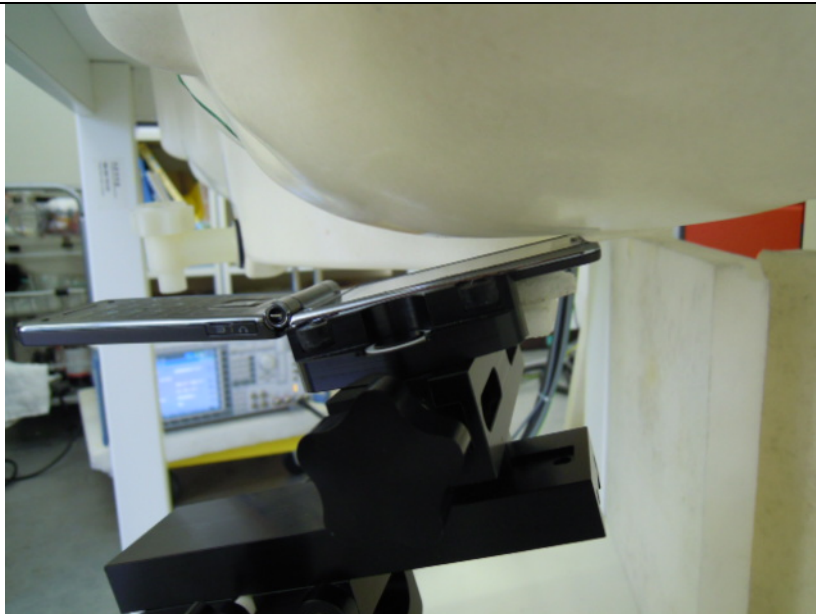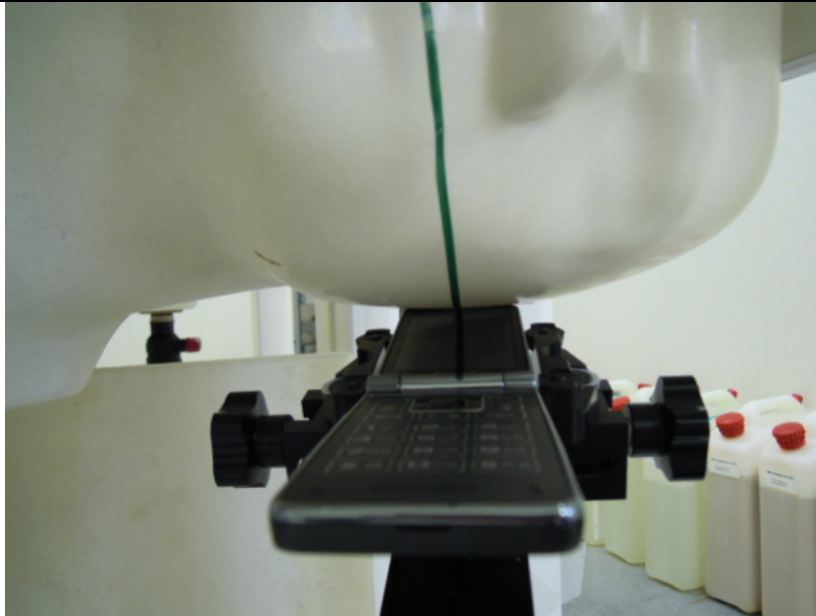

Right Cheek

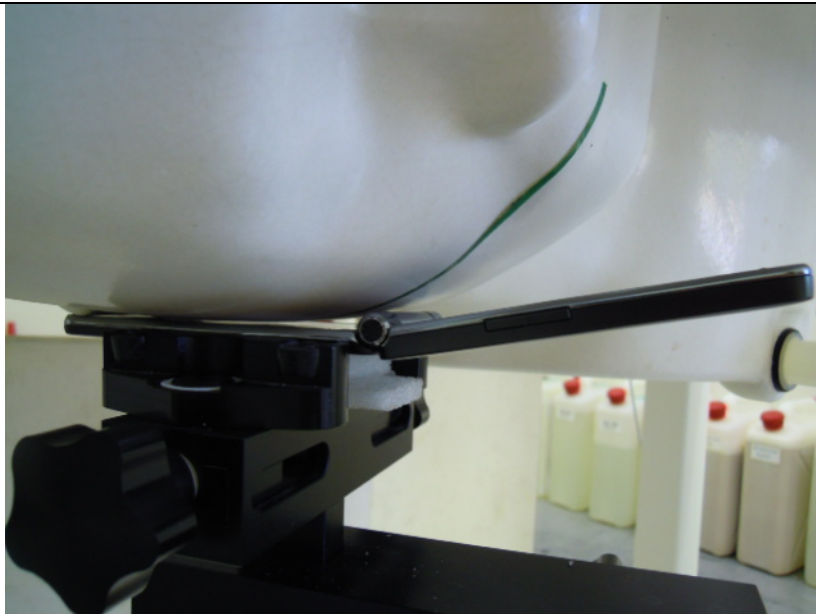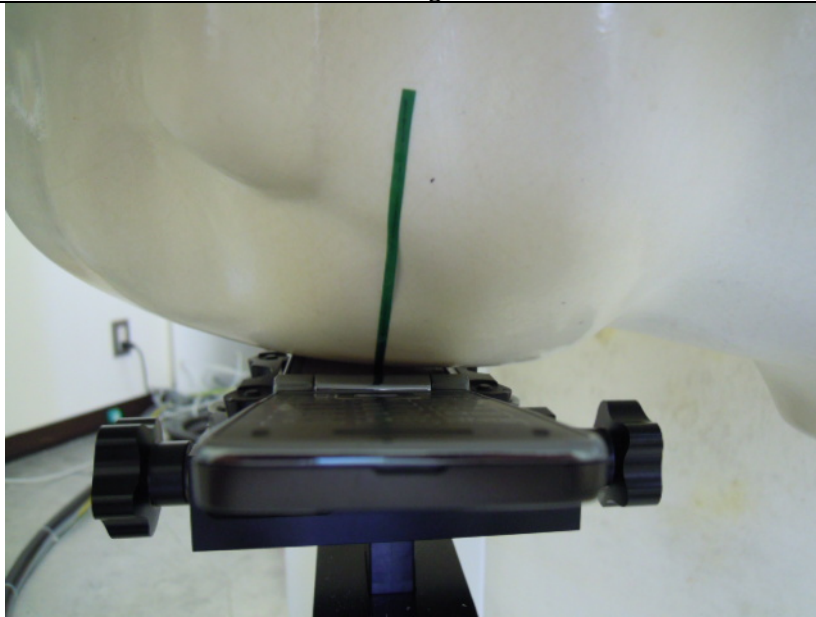


Right Tilt

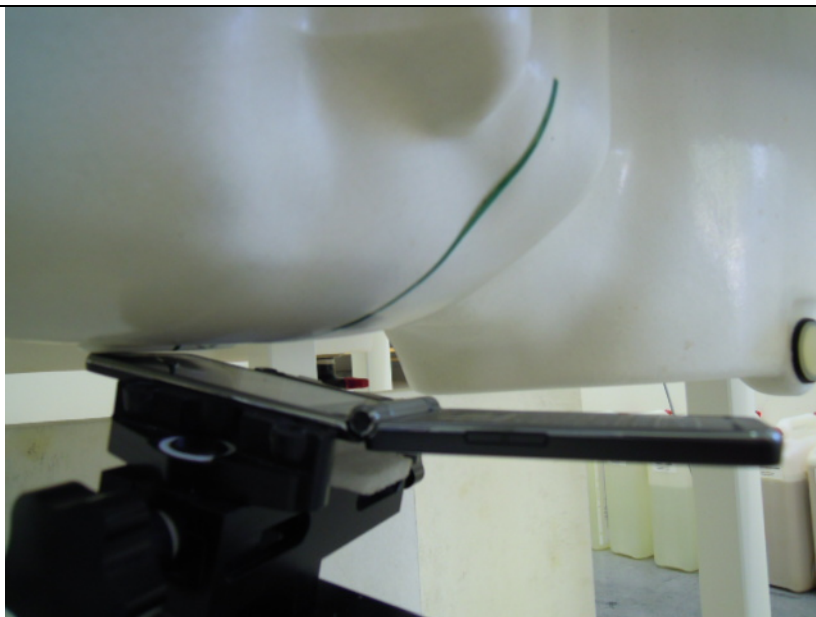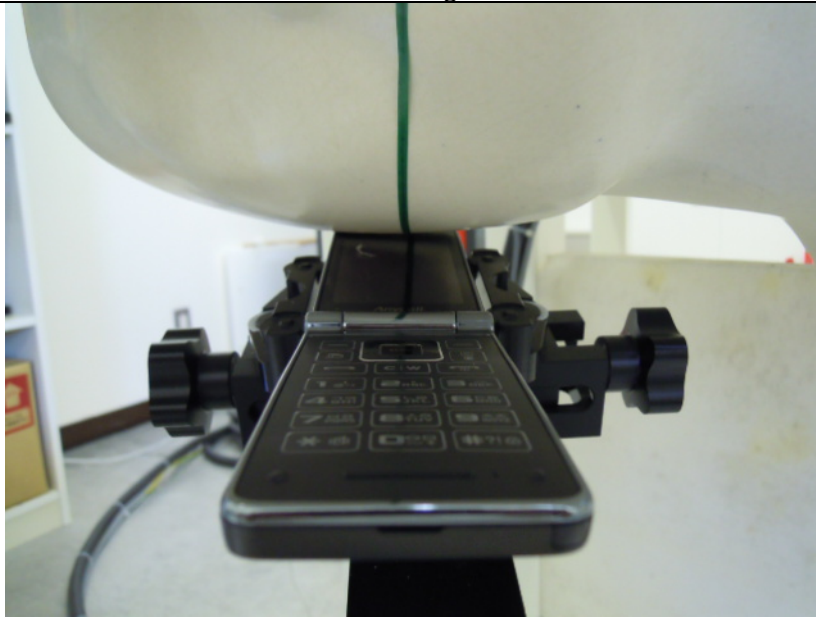


Head Cheek setup

The measurement procedure using a flat phantom according to the KDB648474 D01.

1. Distance provided by the cheek touching position using SAM

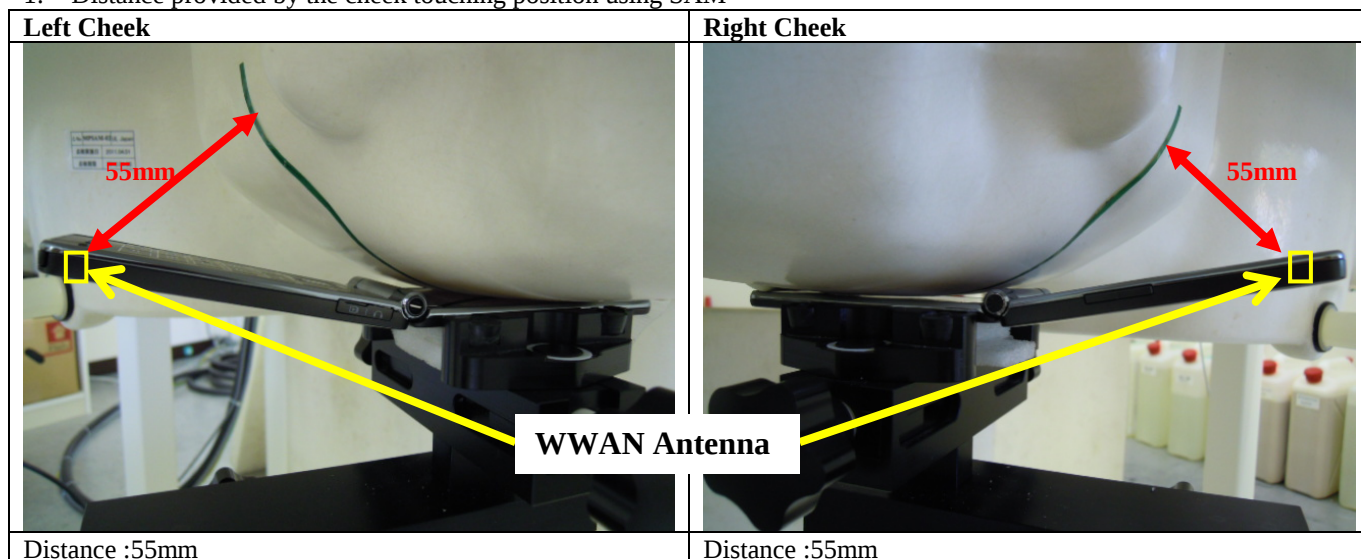

Clam-shell phones should be positioned with the hinge against a smooth edge of the flat phantom where the upper half of the phone is unfolded and extended beyond the phantom side wall. The lower half of the phone is secured in the test device holder at a fixed distance below the flat phantom determined by the minimum separation along the lower edge of the phone in the cheek touching position using SAM.

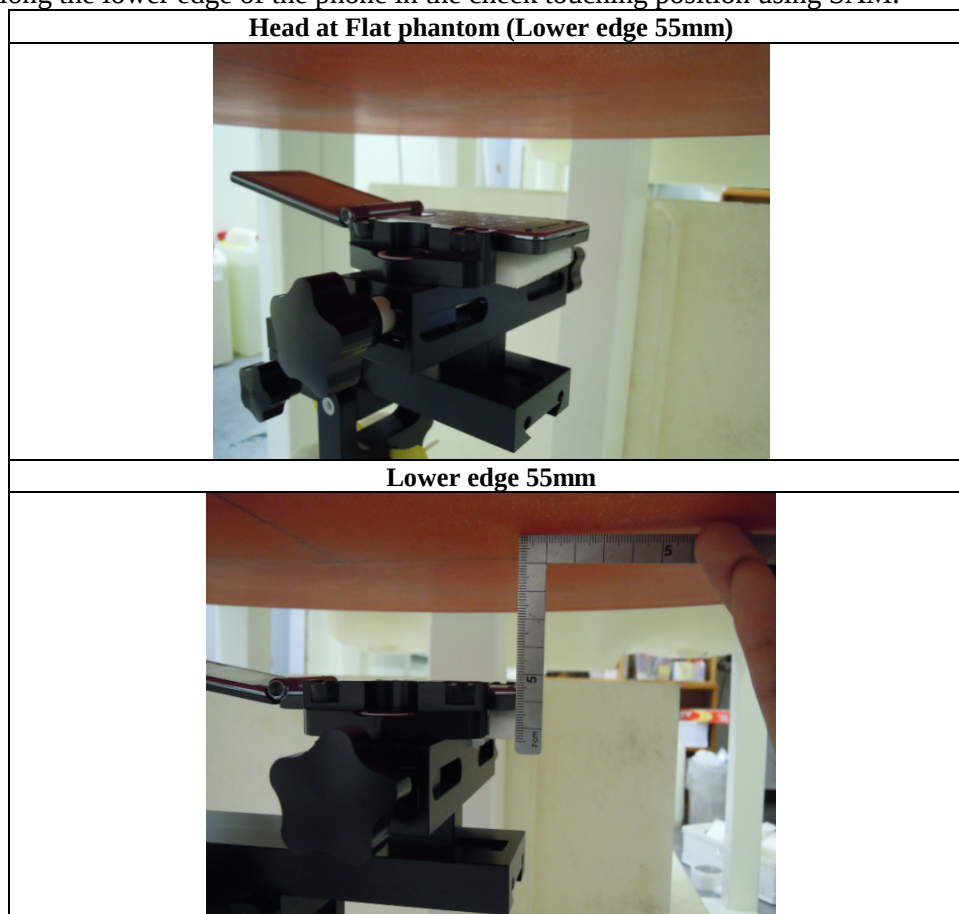

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Body-Worn Rear 15mm

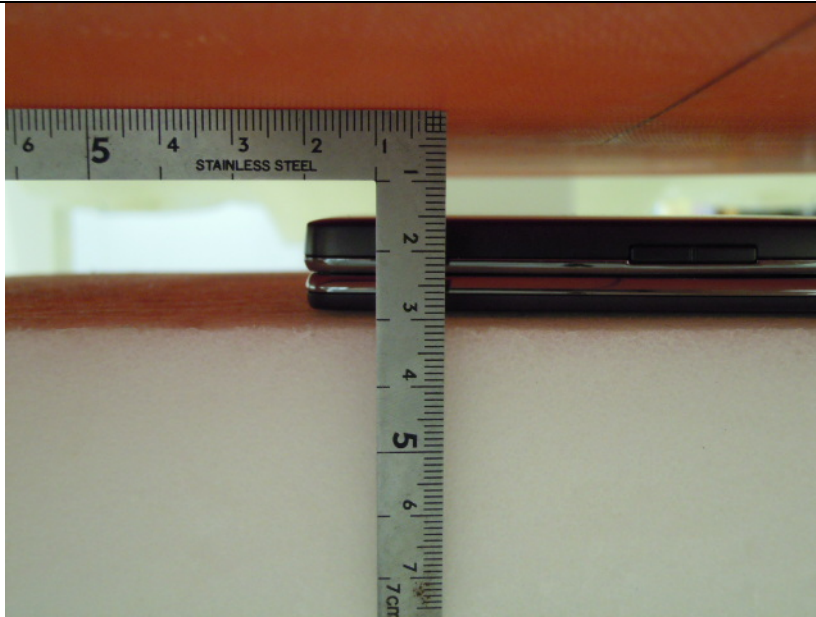

Body-Worn Front 15mm

