



HCT CO., LTD.

CERTIFICATION DIVISION

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

TEL : +82 31 645 6300 FAX : +82 31 645 6401 www.hct.co.kr

CERTIFICATE OF COMPLIANCE

FCC PART 24 Certification

Applicant Name:

(Maetan-dong) 129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-742,
Republic of Korea

Date of Issue: May 20, 2014

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-
myeon, Icheon-si, Gyeonggi-do Korea

Test Report No.: HCT-R-1405-F010

FCC ID : **A3LSLS-BP00AK**

APPLICANT : **SAMSUNG Electronics Co., Ltd.**

EUT Type : Outdoor Pico eNB
Manufacturer : SAMSUNG Electronics Co., Ltd
Model name : SLS-BP00AK
Frequency of Operation : 1 930 MHz ~ 1 995 MHz
TX Output Power : 8 W (4 W * 2)
FCC Rule Part(s) : FCC Part 24 Subpart E
Emission Designator : 4M52G7W(QPSK)_5MHz , 4M55D7W(16QAM/64QAM)_ 5MHz
8M99G7W(QPSK)_10MHz , 8M99D7W(16QAM/64QAM)_ 10MHz
Test Procedure(s) : ANSI/TIA-603C-2004, KDB 971168 D01 v02r01
Application Type : Original Equipment
Data of issue : May 20 , 2014

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of FCC Part 24 of the FCC Rules under normal use and maintenance.

Report prepared by
: Yong Hyun Lee
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

FCC PT.24 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 1 of 126

Revision

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1405-F010	May 20, 2014	First Approval Report

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 2 of 126

C O N T E N T S

1. GENERAL INFORMATION.....	5
1.1. CLIENT INFORMATION	5
1.2. PRODUCT INFORMATION	5
1.3. INTRODUCTION OF EUT.....	6
2. TEST SUMMARY	7
2.1. STANDARDS	7
2.2. MODE OF OPERATION DURING THE TEST	7
3. STANDARDS ENVIRONMENTAL TEST CONDITIONS	8
4. TEST EQUIPMENT	8
5. CONDUCTED OUTPUT POWER.....	9
5.1. Applicable Standard	9
5.2. Test Equipment List and Details	9
5.3. Test Procedure.....	9
5.4. Test Result	10
6. OCCUPIED BANDWIDTH	33
6.1. Applicable Standard	33
6.2. Test Equipment List and Details	33
6.3. Test Procedure.....	34
6.4. Test Result	34
7. SPURIOUS EMISSION AT ANTENNA TERMINAL	57
7.1. Applicable Standard.....	57
7.2. Test Equipment List and Details	57
7.3. Test Procedure.....	57
7.4. Test Result	57
8. RADIATED SPURIOUS EMISSION	88
8.1 Applicable Standard.....	118
8.2 Test Equipment List and Details	118
8.3 Test Procedure.....	118
8.3.1 Radiated Spurious Emissions Test Setup	119
8.4 Test Result	119
9. FREQUENCY STABILITY.....	120
9.1 Applicable Standard	120
9.2 Test Equipment List and Details.....	120

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 3 of 126

9.3 Test Procedure.....	120
9.4. Test Result	120
10. RF EXPOSURE STATEMENT.....	125

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 4 of 126

1. GENERAL INFORMATION

1.1. CLIENT INFORMATION

Company	Samsung Electronics Co., Ltd.
Contact Point	(Maetan-dong) 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742, Republic of Korea
Contact person	Name: HWAN-YOUL KIM / Senior Research Engineer E-mail : hwanyoul.kim@samsung.com Tel: +82-31-279-3092 Fax: +82-31-279-0476

1.2. PRODUCT INFORMATION

EUT TYPE	Outdoor Pico eNB
EMISSION DESIGNATOR	4M52G7W(QPSK)_5MHz 4M55D7W(16QAM/64QAM)_ 5MHz 8M99G7W(QPSK)_10MHz 8M99D7W(16QAM/64QAM)_ 10MHz
OPERATING FREQUENCY	1 930 MHz ~ 1 995 MHz
TX OUTPUT POWER	8 W (4 W * 2 Ports)
CHANNEL BANDWIDTH	LTE : 5 MHz, 10MHz
MODULATION TYPE	QPSK, 16QAM, 64QAM
MAXIMUM NUMBER OF CARRIERS/SECTORS	Max 2 Carrier
SYSTEM INPUT VOLTAGE	(120~240) VAC

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 5 of 126

1.3. INTRODUCTION OF EUT

Outdoor Pico Cell, an LTE eNB, is located between the UE and the EPC. It provides mobile communications services to subscribers according to the LTE air interface standard.

The Outdoor Pico Cell transmits/receives radio signals to/from the UE and processes the modulation and demodulation of packet traffic signals. The Outdoor Pico Cell is also responsible for packet scheduling and radio bandwidth allocation and performs handover via interface with the EPC.

The Outdoor Pico Cell can be installed vertically or horizontally; and it can be installed on the wall, pole or rack by using the installation brackets. The Outdoor Pico Cell is an all-in-one unit. If a fault occurs, the unit must be replaced with new one.

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 6 of 126

2. TEST SUMMARY

2.1. STANDARDS

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 24 Subpart E

SECTION	TEST ITEMS	RESULTS
2.1046, 24.232	Conducted Output Power	Compliant
2.1049	Occupied Bandwidth	Compliant
2.1051, 2.1057, 24.238	Spurious Emissions at Antenna Terminals	Compliant
2.1055, 24.235	Frequency Stability over Temperature variation	Compliant
2.1055, 24.235	Frequency stability over Voltage variation	Compliant

2.2. MODE OF OPERATION DURING THE TEST

The EUT was operated in a manner representative of the typical usage of the equipment.

During all testing, system components were manipulated within the confines of typical usage to maximize each emission. All Modulation (QPSK, 16QAM and 64QAM) modes were tested.

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 7 of 126

3. STANDARDS ENVIRONMENTAL TEST CONDITIONS

Temperature :	+ 15 °C to + 35 °C
Relative humidity:	30 % to 60 %
Air pressure	860 mbar to 1060 mbar

4. TEST EQUIPMENT

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Schwarzbeck	BBHA 9120D / Double Ridged Horn Antenna	1151	07/05/2015
Schwarzbeck	VULB 9160 / TRILOG Antenna	3150	12/17/2014
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	06/10/2014
Wainwright	WHK3.3/18G-10EF/H.P.F	2	06/24/2014
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	09/12/2014
EMCO	6502/Loop Antenna	9009-2536	01/27/2016
Agilent	N9020A /Signal Analyzer	US46220219	04/16/2015
DAE YOUNG ELECTRIC & TECHNOLOGY	DFSS60 / AC Power Source	1003030-1	04/01/2015
HEWLETT PACKARD	8493C / Fixed Attenuator	10342	05/19/2015

5. CONDUCTED OUTPUT POWER

5.1. Applicable Standard

According to FCC §2.1046 & 24.232

(2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

5.2. Test Equipment List and Details


Manufacturer	Model / Equipment	Serial No.	Calibration Due
Agilent	N9020A /Signal Analyzer	US46220219	04/16/2015
DAE YOUNG ELECTRIC & TECHNOLOGY	DFSS60 / AC Power Source	1003030-1	04/01/2015
HEWLETT PACKARD	8394C / Fixed Attenuator	10342	05/19/2015

5.3. Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. According to FCC §2.1046 (a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

- 1) The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the reading.
- 2) The spectrum analyzer was set to RMS Detector function and Average mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.
- 4) The conducted emission level is measured at each antenna port and then summed mathematically to determine the total emission level from the device. ($8\text{ W} = 4\text{ W} * 2\text{ Ports}$)

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 9 of 126

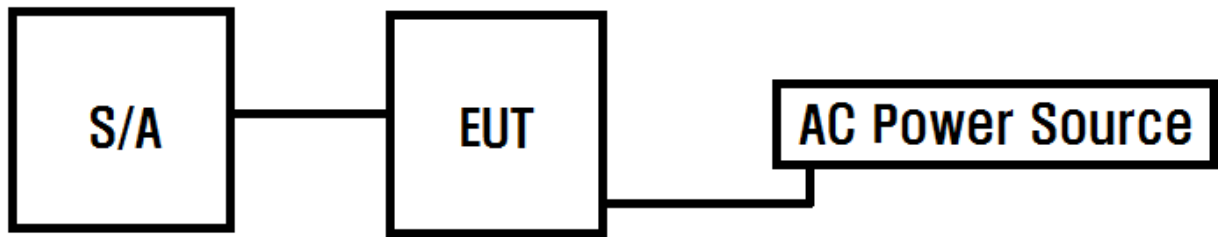

5.4. Test Result
: PASS

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 10 of 126

[LTE 5 MHz : 1 Carrier / 1 Port]

. Test Data at Output Port 0

Modulation	Channel	Frequency	Measured Output Power	
			dBm	W
QPSK	Low	1932.5	35.21	3.318
	Middle	1962.5	35.76	3.767
	High	1992.5	35.44	3.499
16QAM	Low	1932.5	35.23	3.334
	Middle	1962.5	35.72	3.732
	High	1992.5	35.43	3.491
64QAM	Low	1932.5	35.28	3.372
	Middle	1962.5	35.74	3.749
	High	1992.5	35.46	3.515

. Test Data at Output Port 1

Modulation	Channel	Frequency	Measured Output Power	
			dBm	W
QPSK	Low	1932.5	35.35	3.427
	Middle	1962.5	35.81	3.810
	High	1992.5	35.47	3.523
16QAM	Low	1932.5	35.36	3.435
	Middle	1962.5	35.81	3.810
	High	1992.5	35.48	3.531
64QAM	Low	1932.5	35.39	3.459
	Middle	1962.5	35.83	3.828
	High	1992.5	35.48	3.531

[LTE 10 MHz : 1 Carrier / 1 Port]

. Test Data at Output Port 0


Modulation	Channel	Frequency	Measured Output Power	
			dBm	W
QPSK	Low	1932.5	35.37	3.443
	Middle	1962.5	35.66	3.681
	High	1992.5	35.42	3.483
16QAM	Low	1932.5	35.33	3.411
	Middle	1962.5	35.61	3.639
	High	1992.5	35.39	3.459
64QAM	Low	1932.5	35.23	3.334
	Middle	1962.5	35.59	3.622
	High	1992.5	35.36	3.435

. Test Data at Output Port 1


Modulation	Channel	Frequency	Measured Output Power	
			dBm	W
QPSK	Low	1932.5	35.38	3.451
	Middle	1962.5	35.79	3.793
	High	1992.5	35.43	3.491
16QAM	Low	1932.5	35.34	3.419
	Middle	1962.5	35.66	3.681
	High	1992.5	35.40	3.467
64QAM	Low	1932.5	35.34	3.419
	Middle	1962.5	35.62	3.647
	High	1992.5	35.34	3.419

. Plot Data for LTE 5 MHz : 1 Carrier , Output Port 0

(QPSK Low Channel)

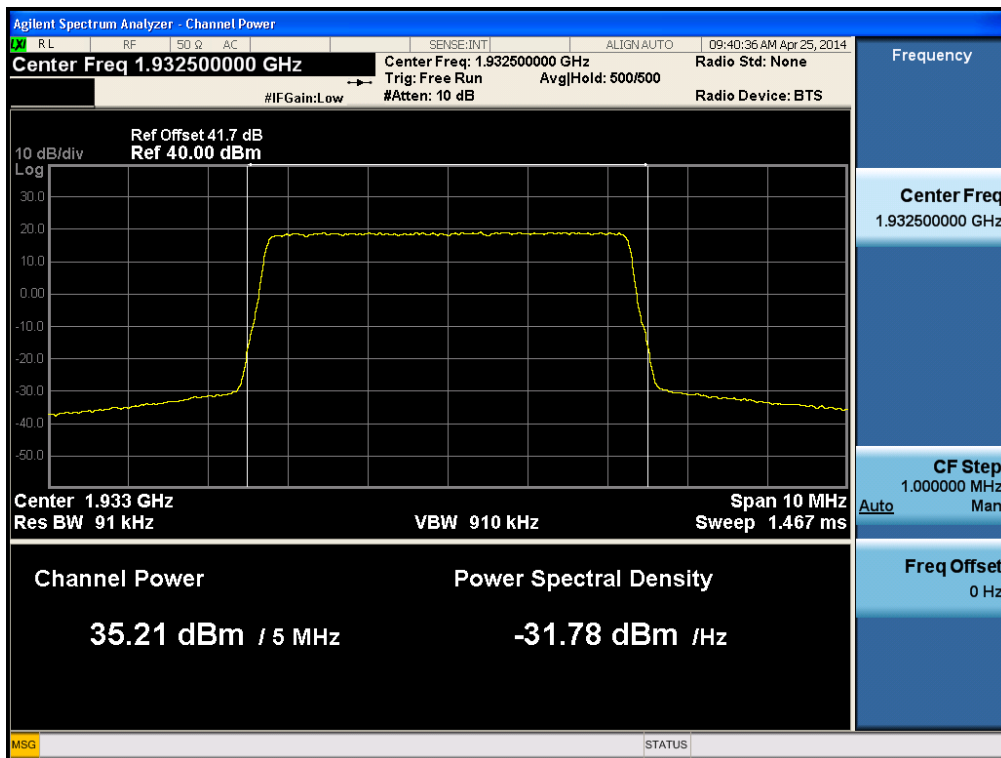


(QPSK Middle Channel)

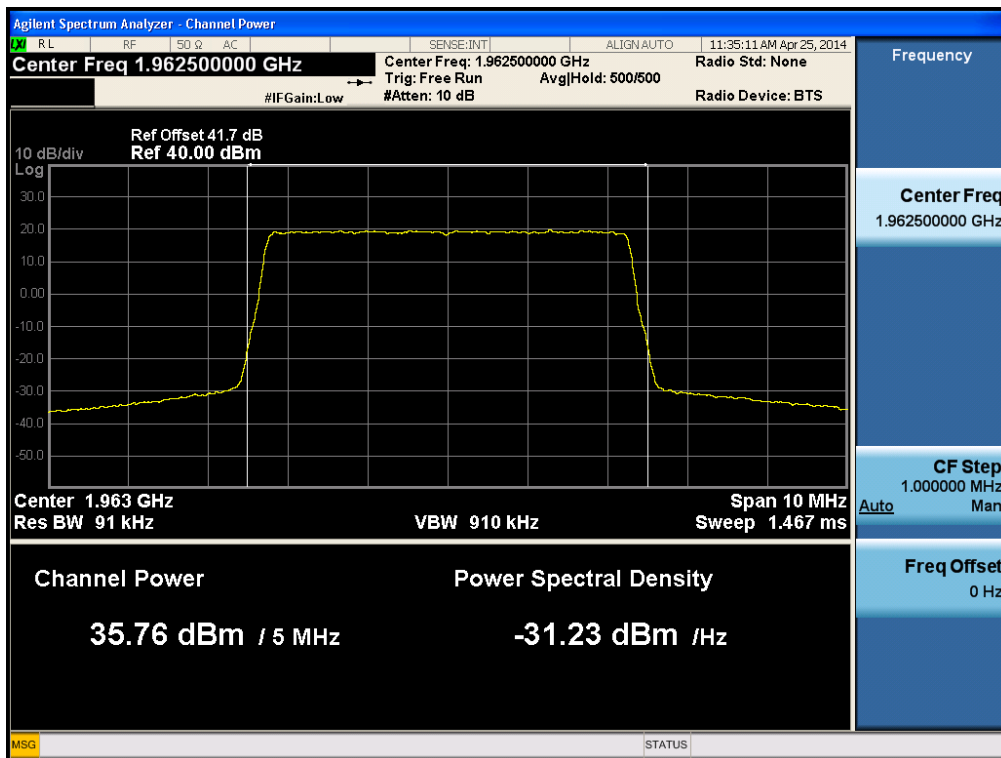


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 13 of 126

(QPSK High Channel)

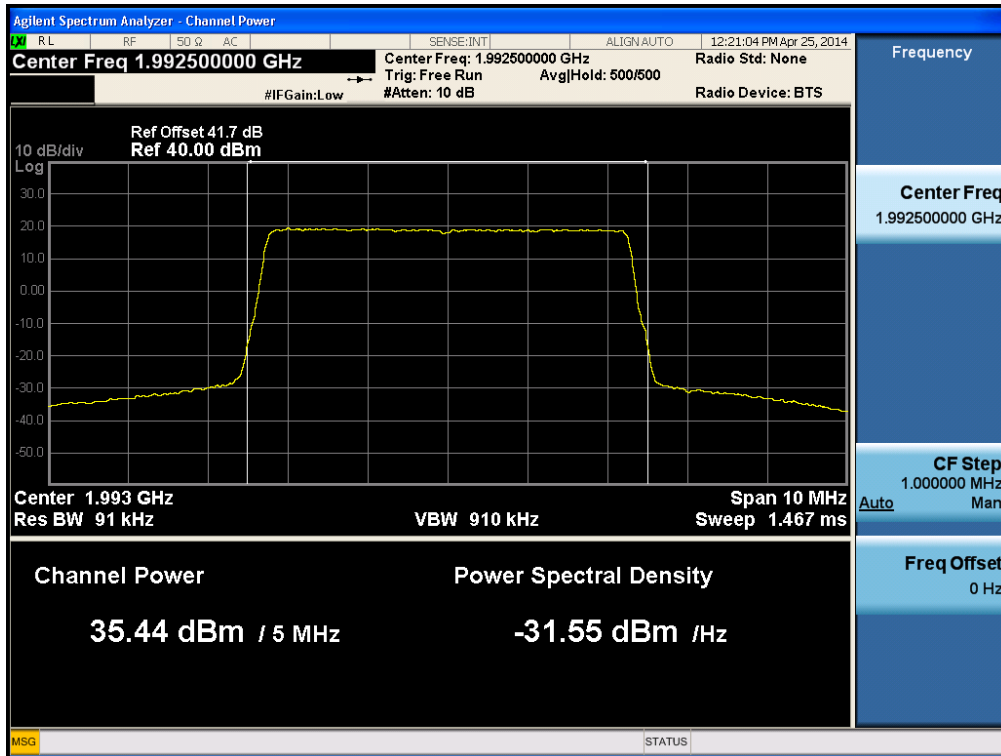


(16QAM Low Channel)

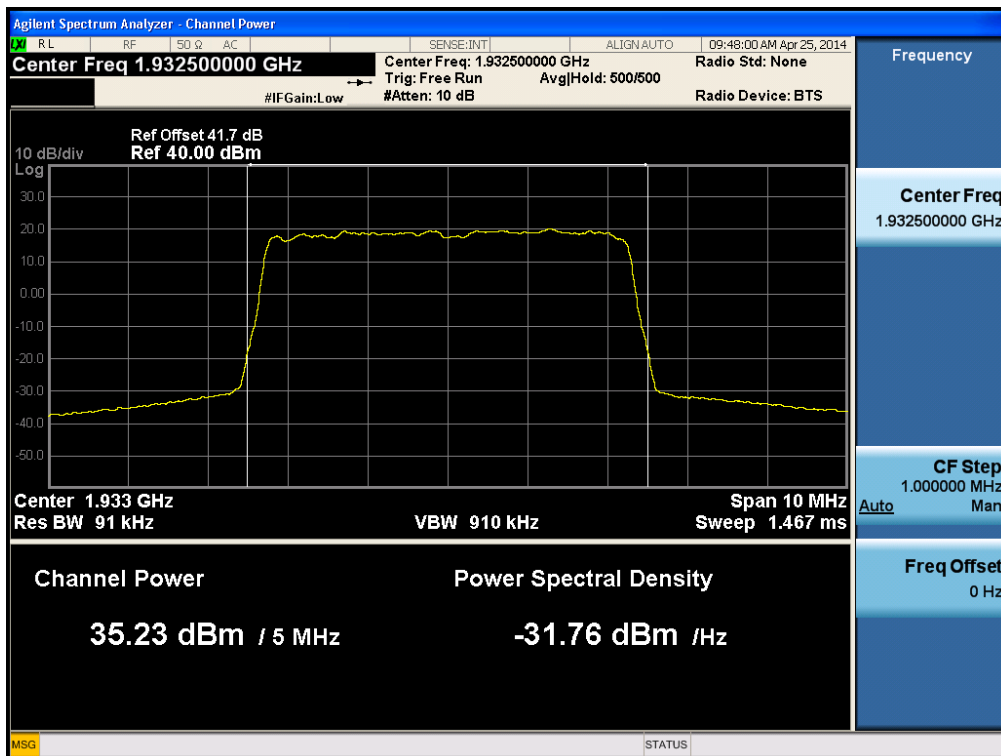


FCC PT.24 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 14 of 126	

(16QAM Middle Channel)

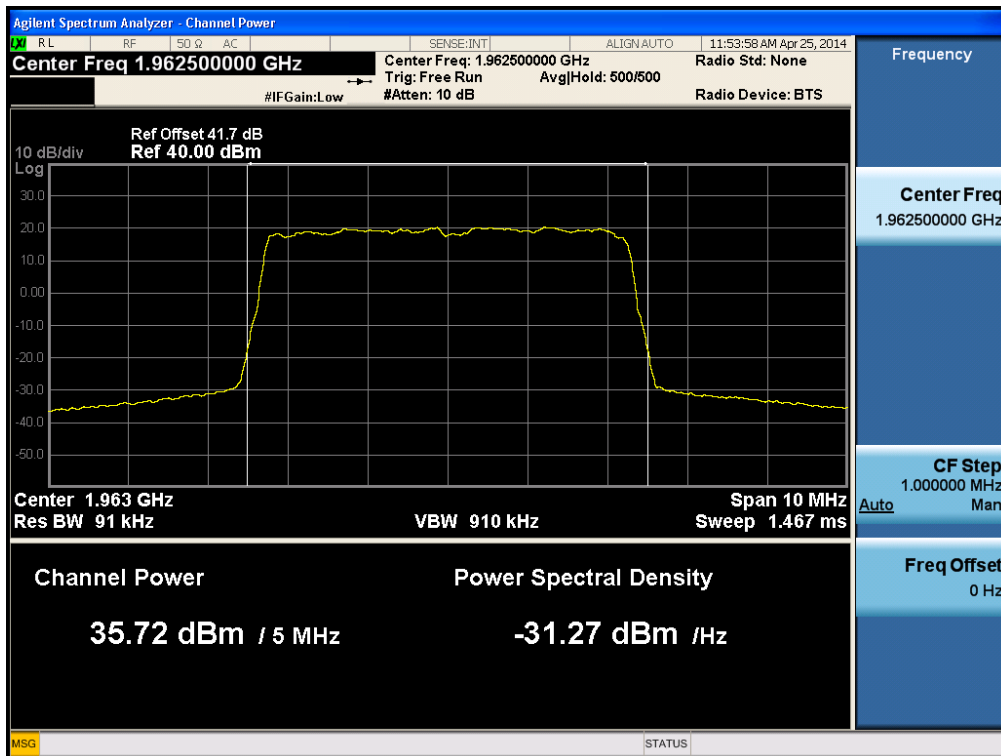


(16QAM High Channel)

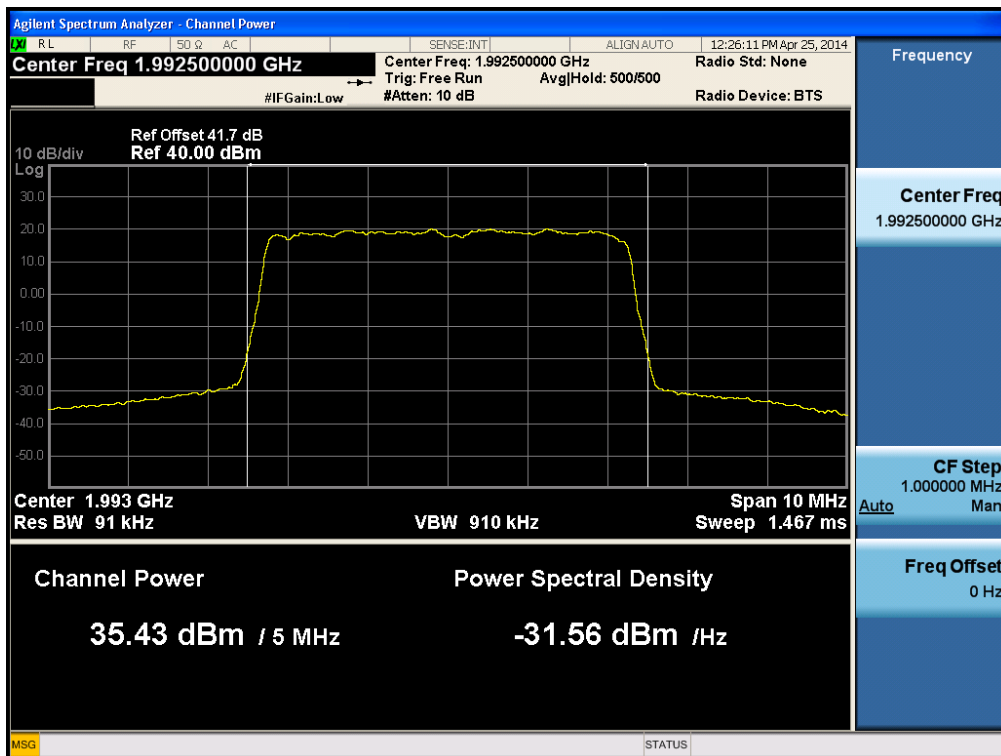


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 15 of 126

(64QAM Low Channel)

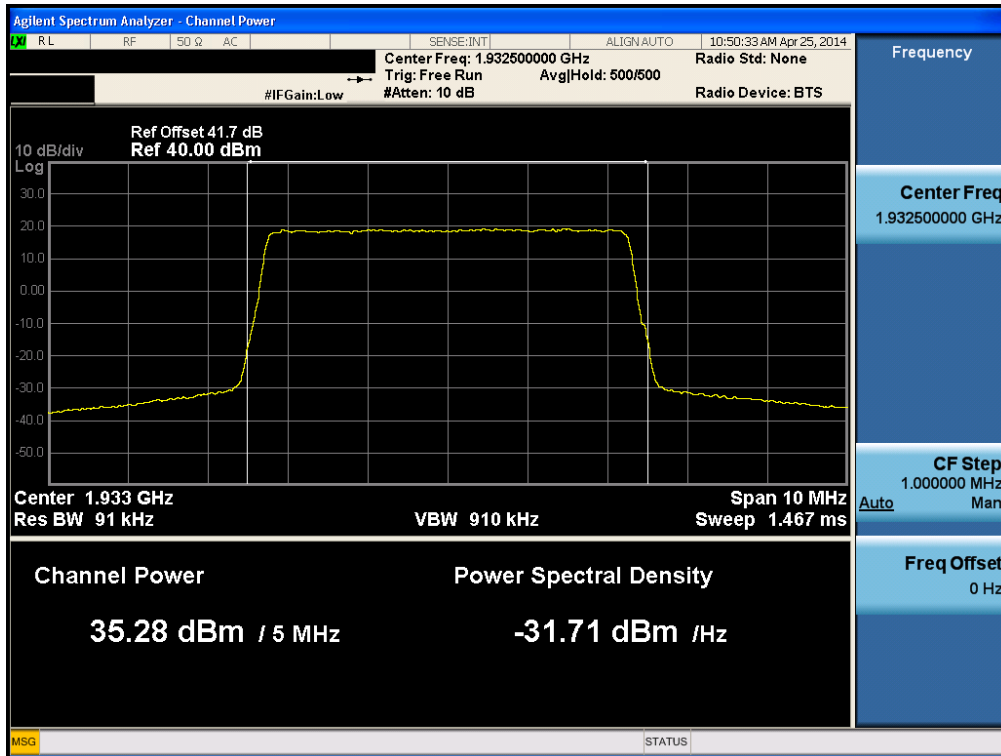


(64QAM Middle Channel)

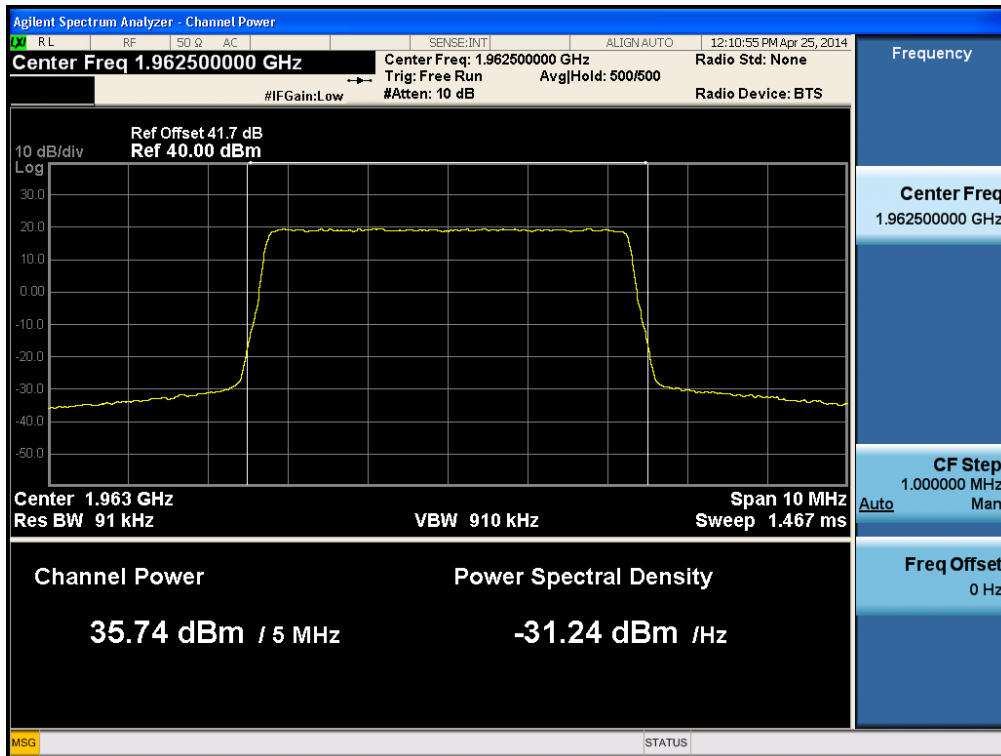

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 16 of 126


(64QAM High Channel)

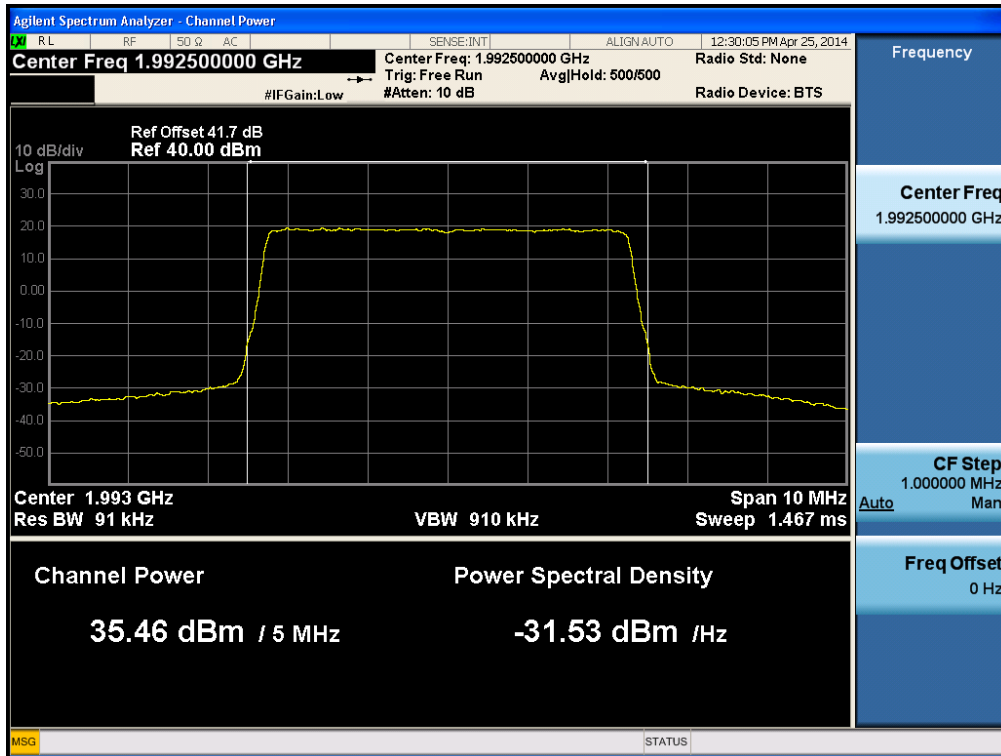


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 17 of 126

. Plot Data for LTE 5 MHz : 1 Carrier , Output Port 1

(QPSK Low Channel)

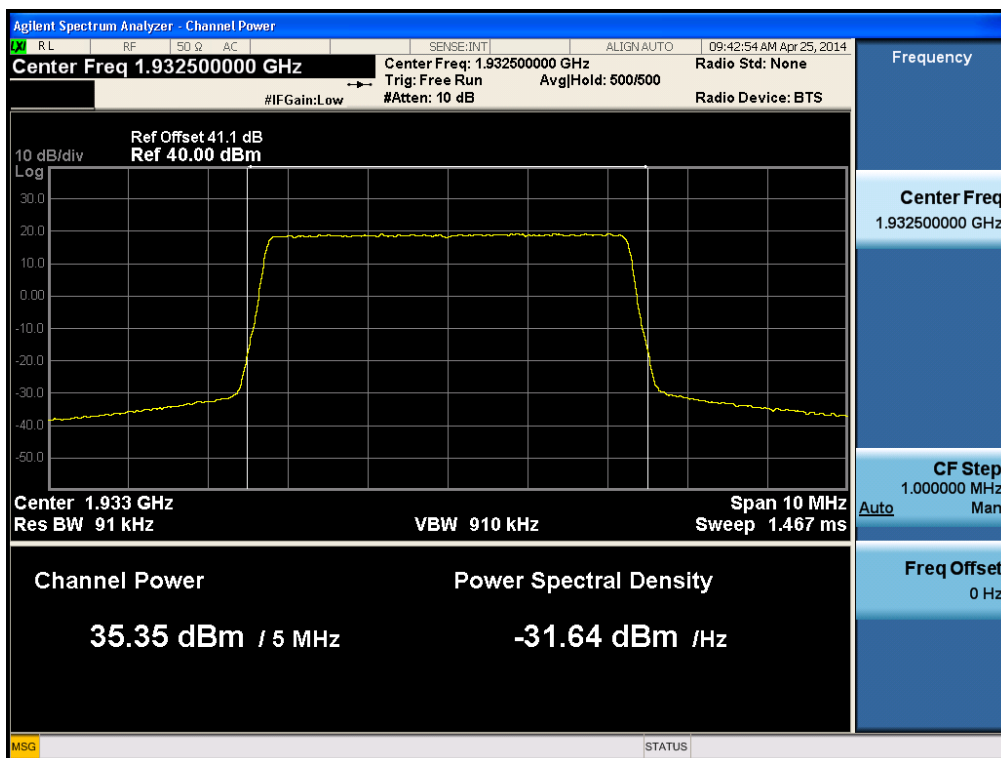


(QPSK Middle Channel)

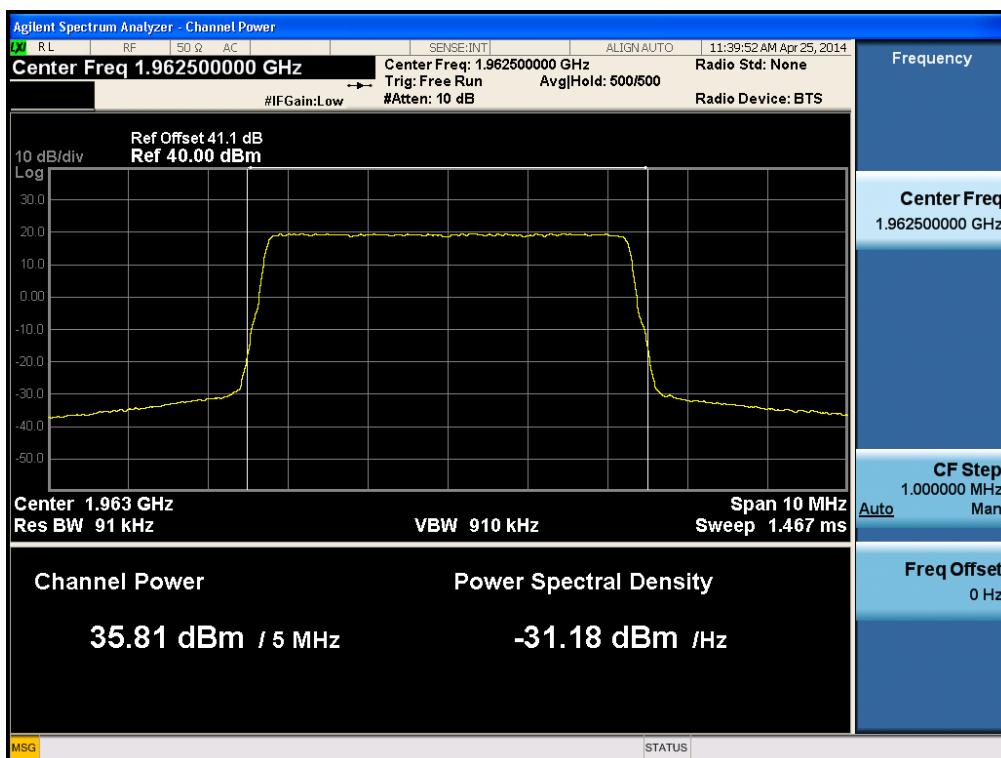


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 18 of 126

(QPSK High Channel)

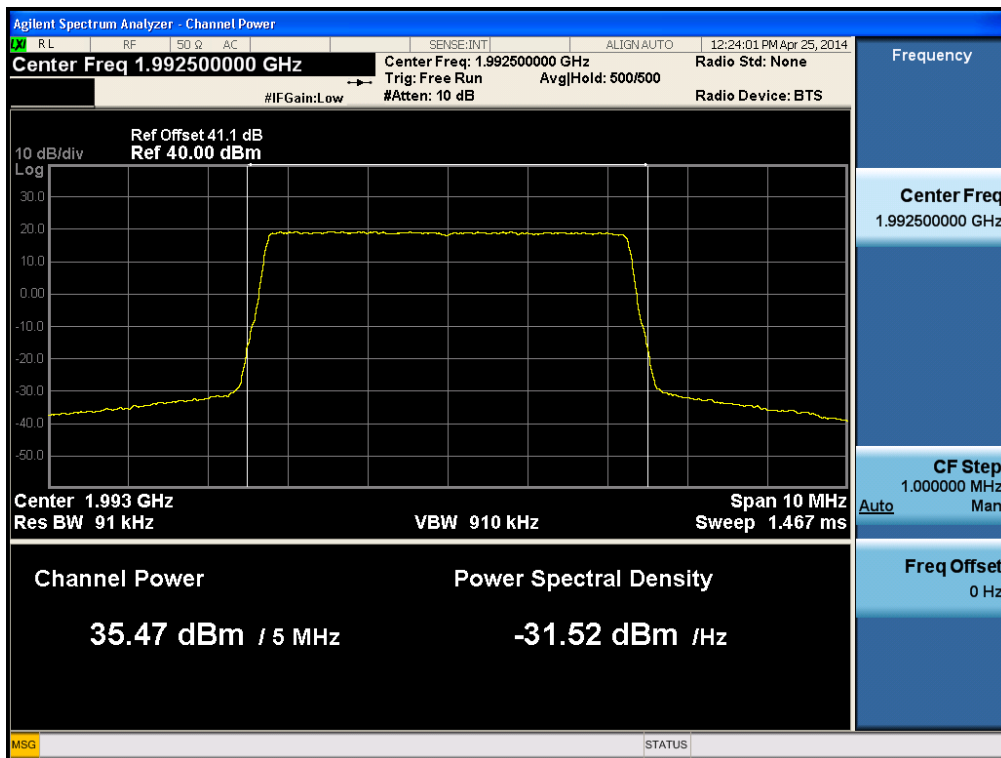


(16QAM Low Channel)

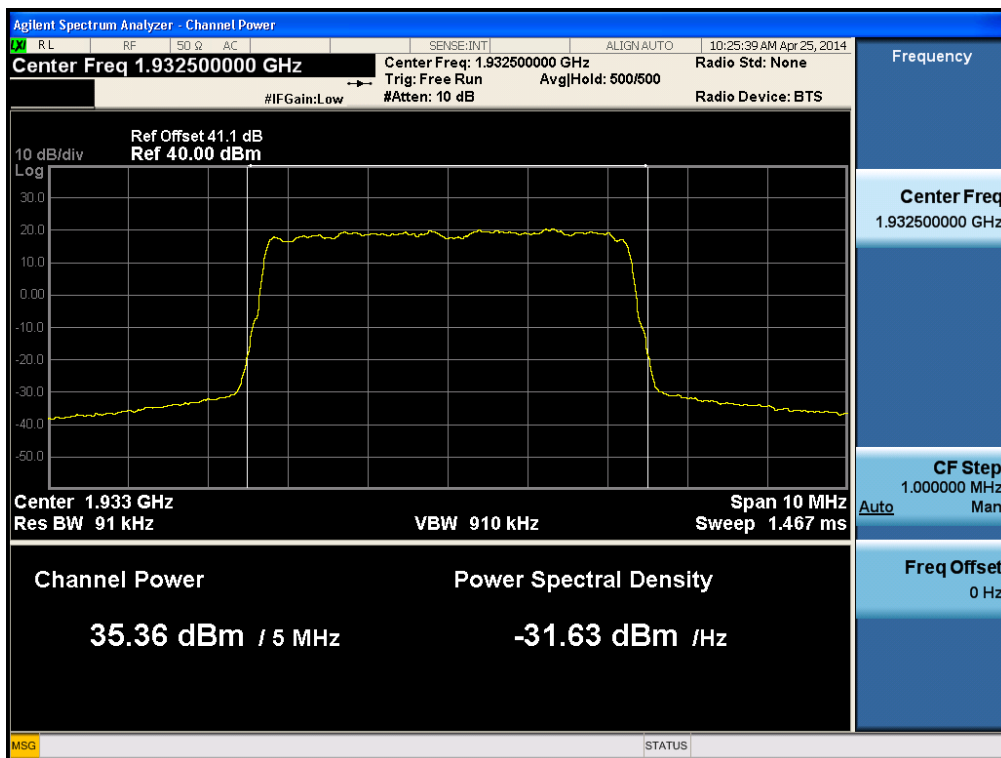


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 19 of 126

(16QAM Middle Channel)

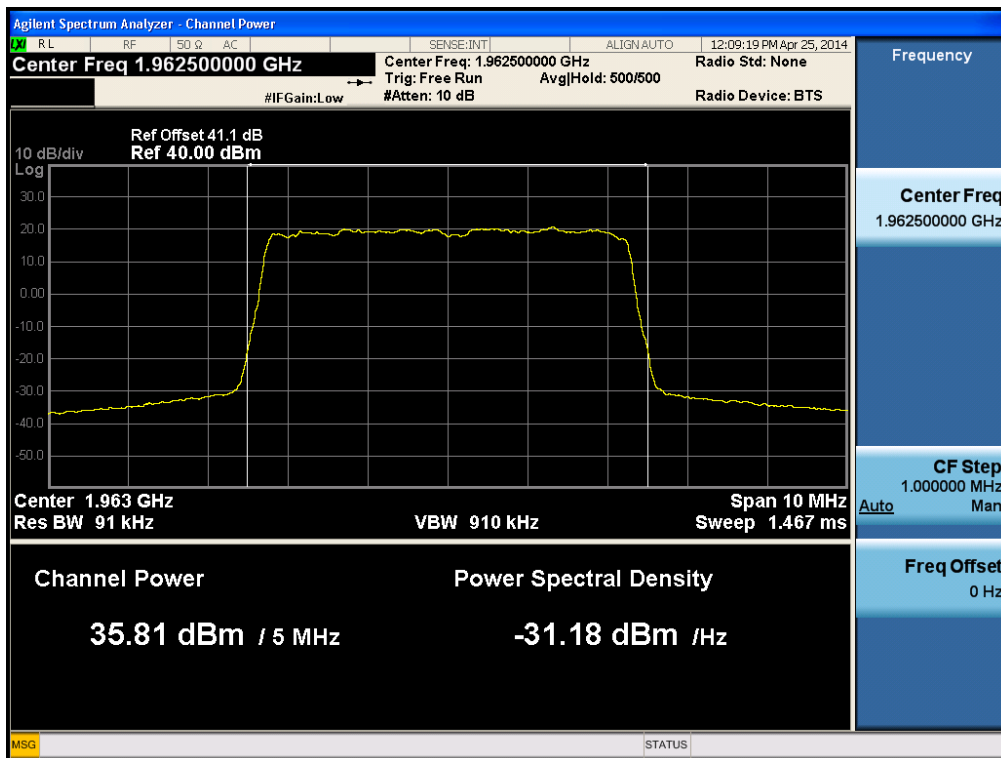


(16QAM High Channel)

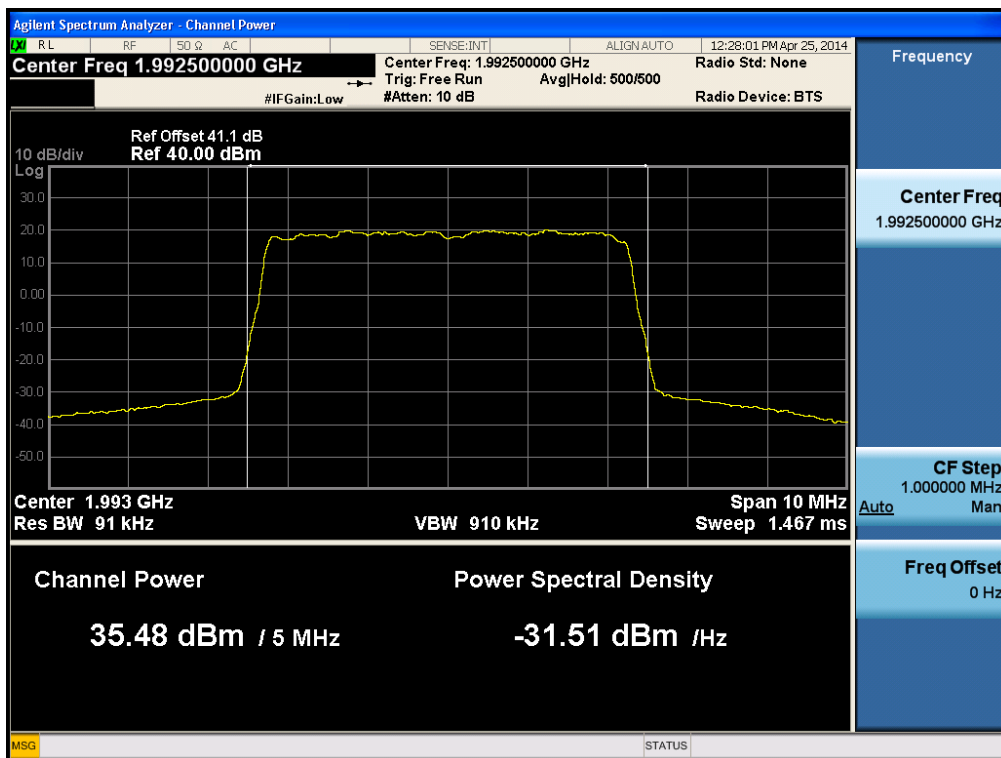


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 20 of 126

(64QAM Low Channel)

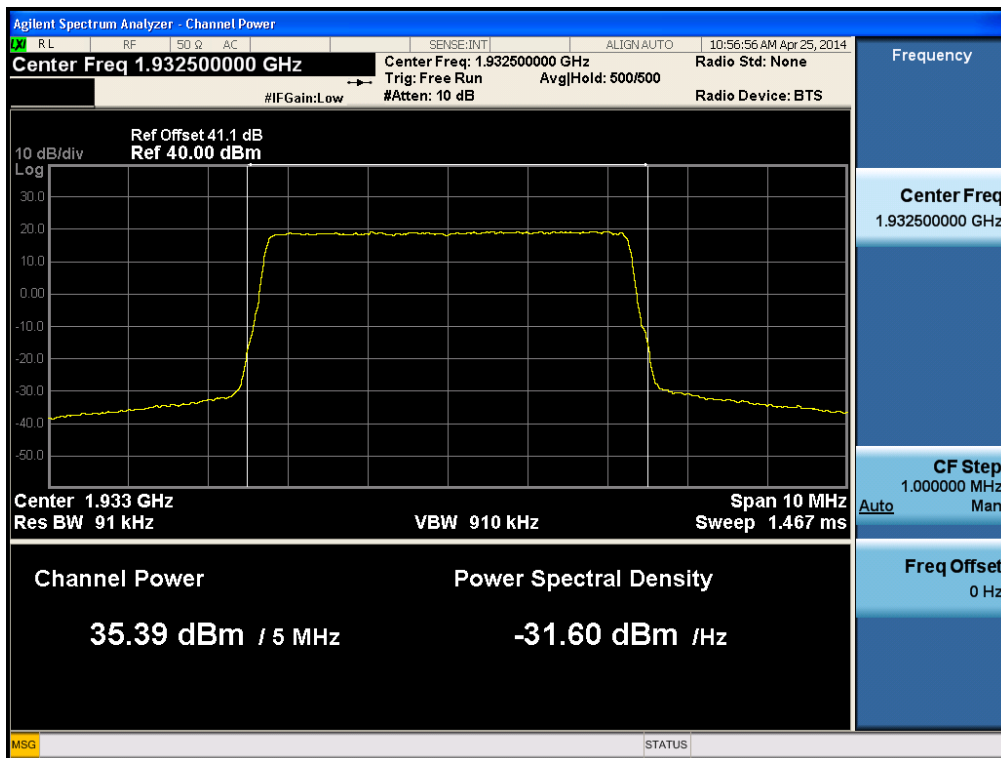


(64QAM Middle Channel)

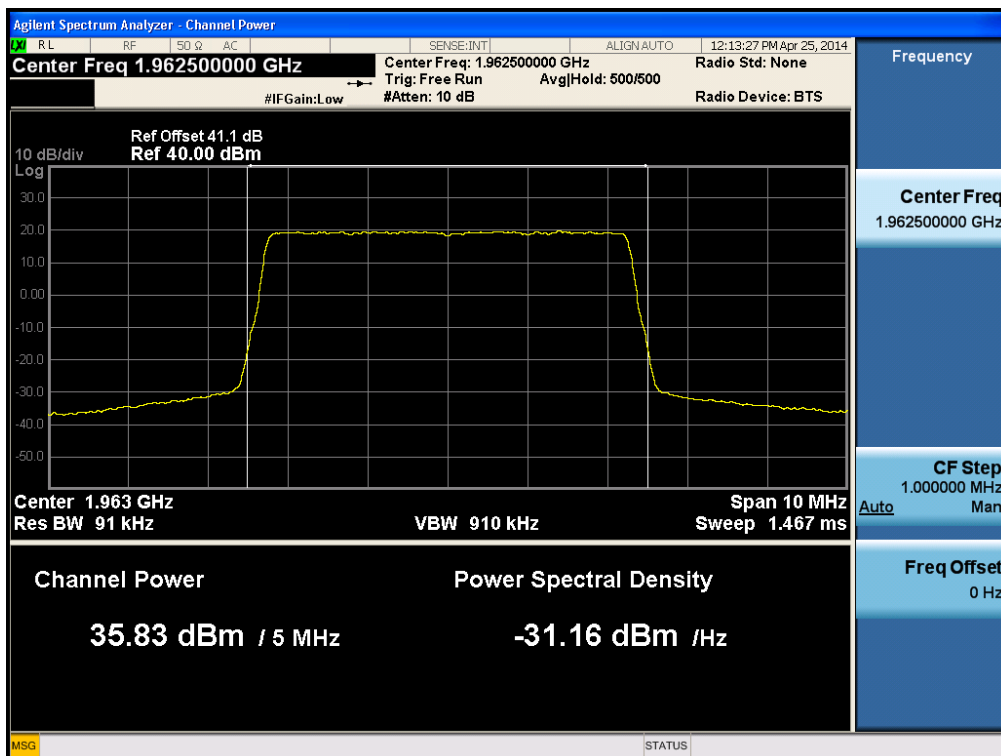

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 21 of 126


(64QAM High Channel)

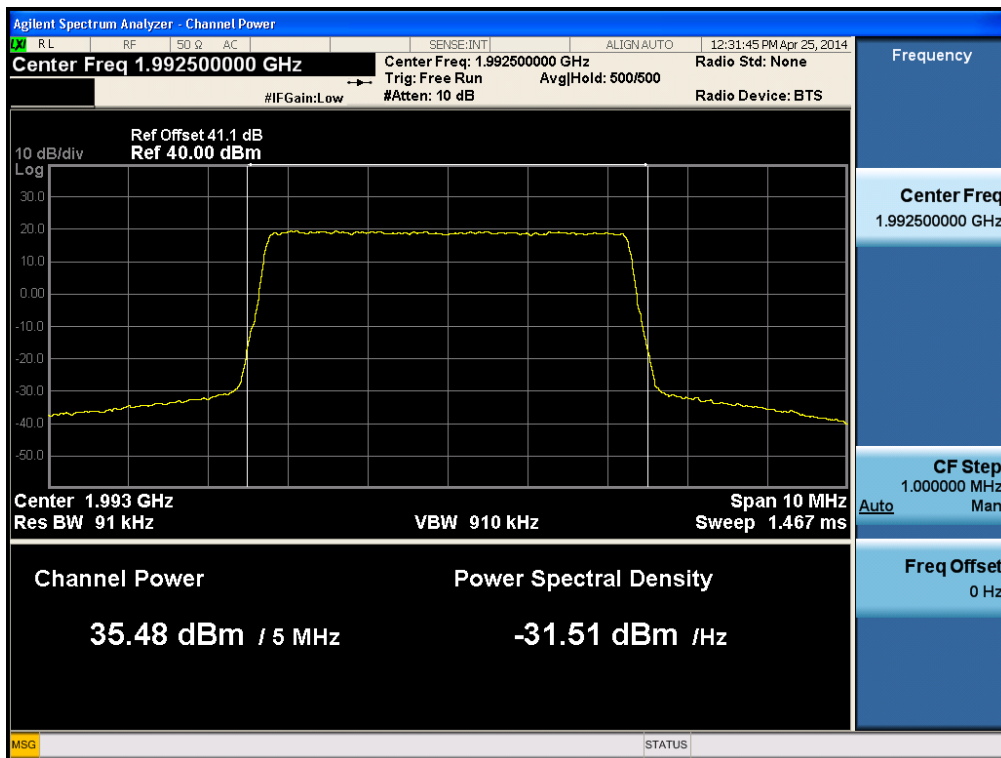


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 22 of 126

.. Plot Data for LTE 10 MHz : 1 Carrier , Output Port 0

(QPSK Low Channel)

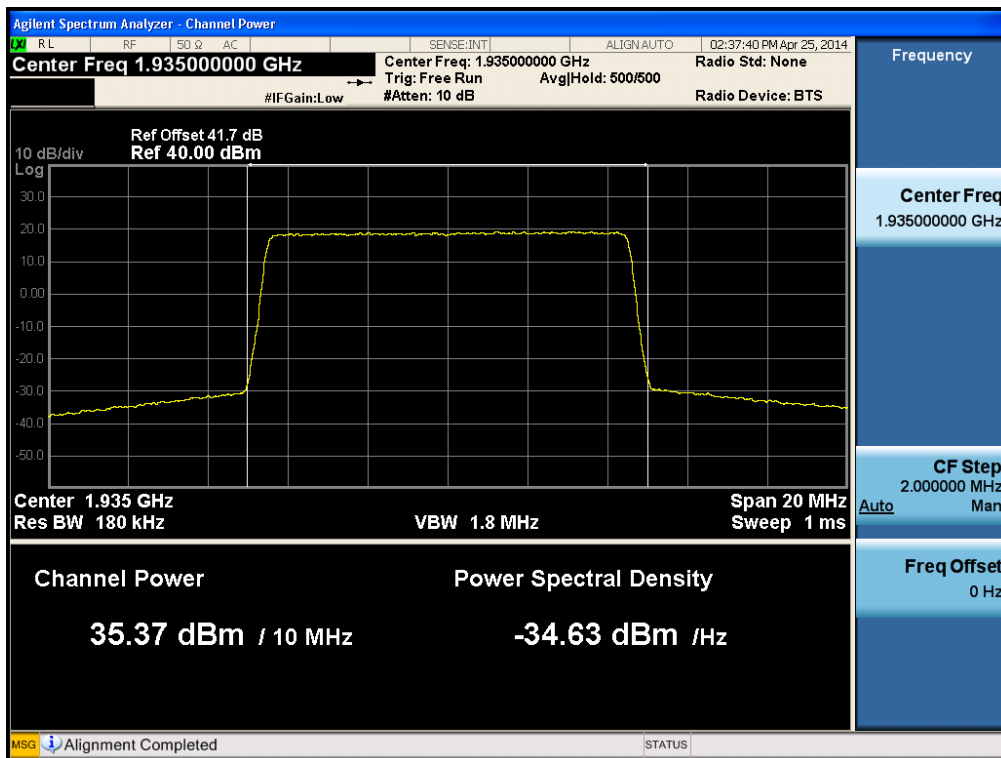


(QPSK Middle Channel)

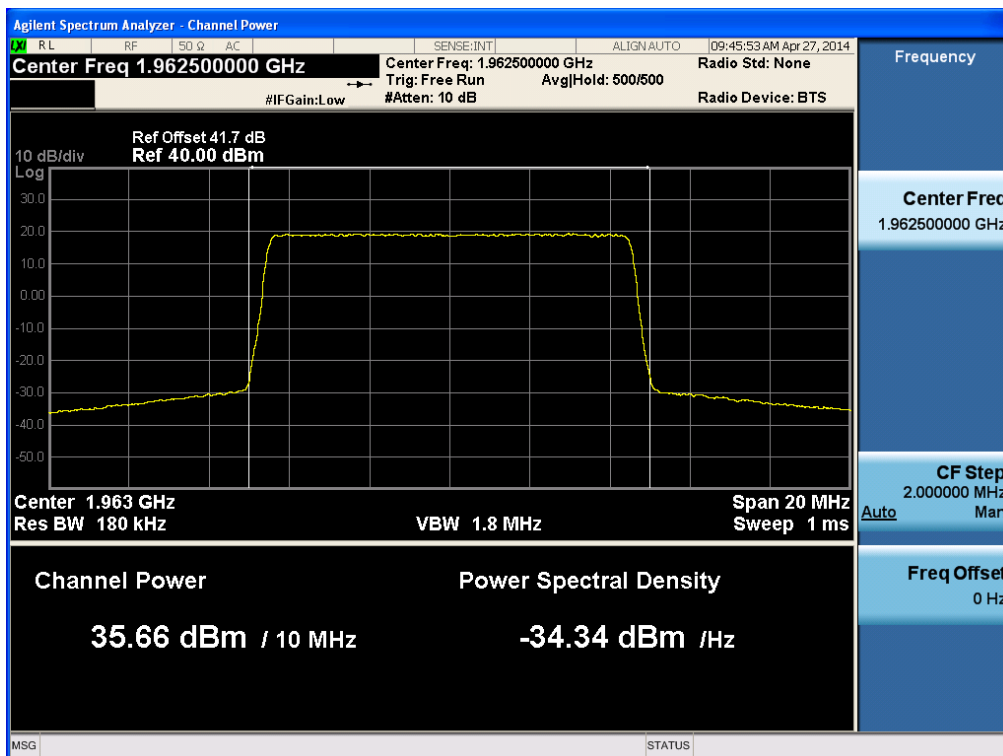


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 23 of 126

(QPSK High Channel)

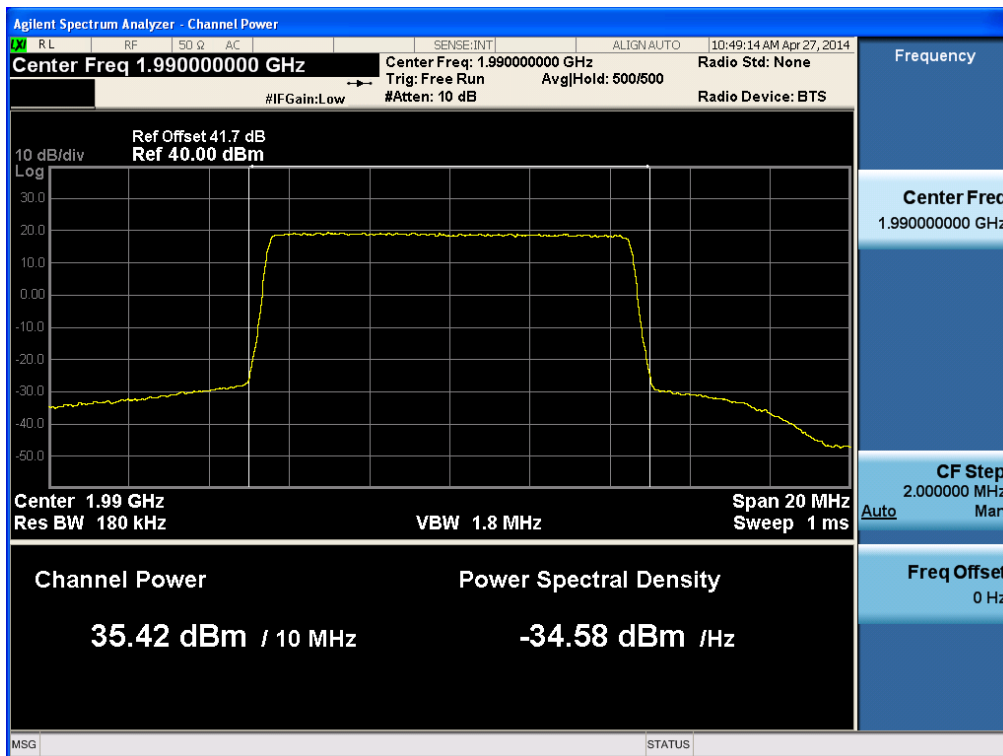


(16QAM Low Channel)

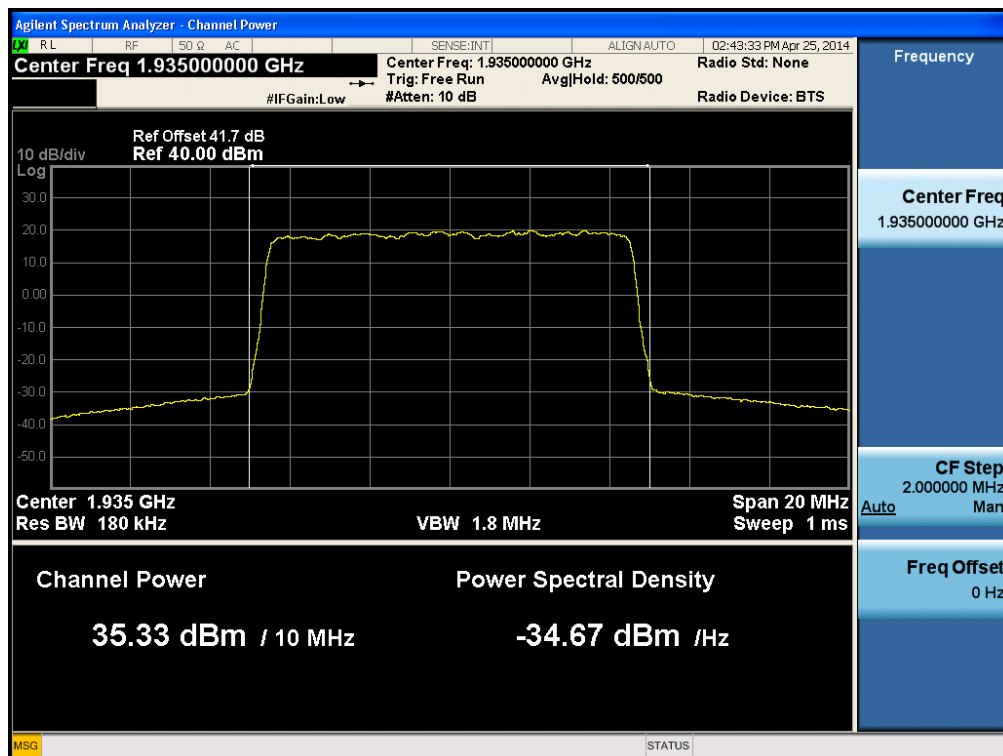


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 24 of 126

(16QAM Middle Channel)

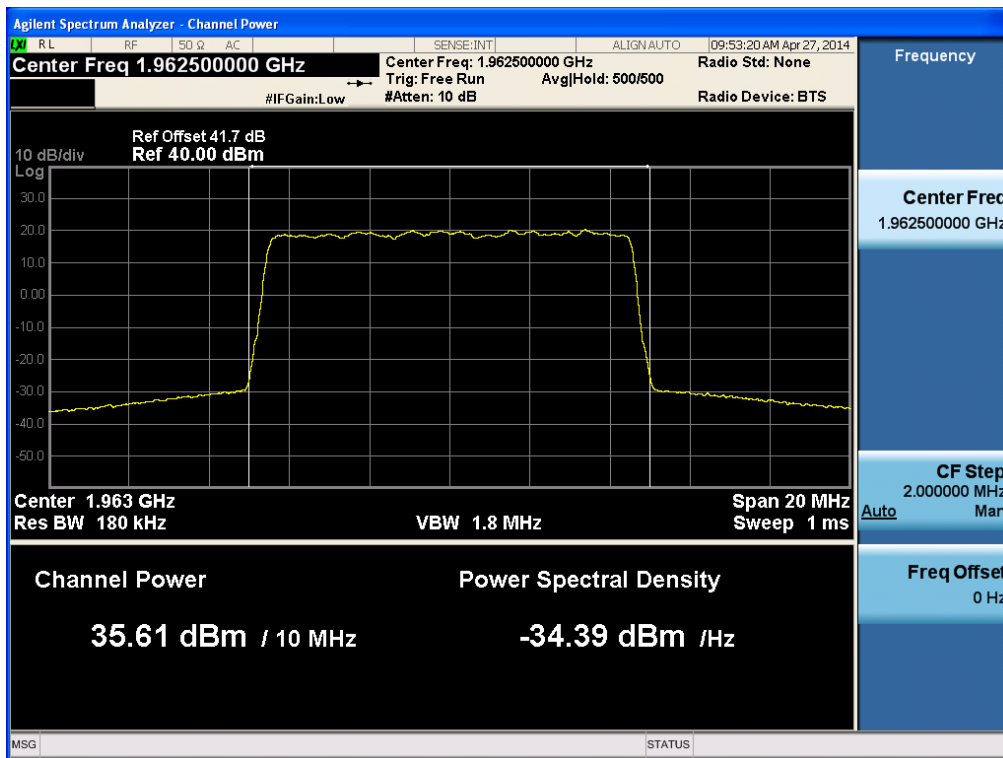


(16QAM High Channel)

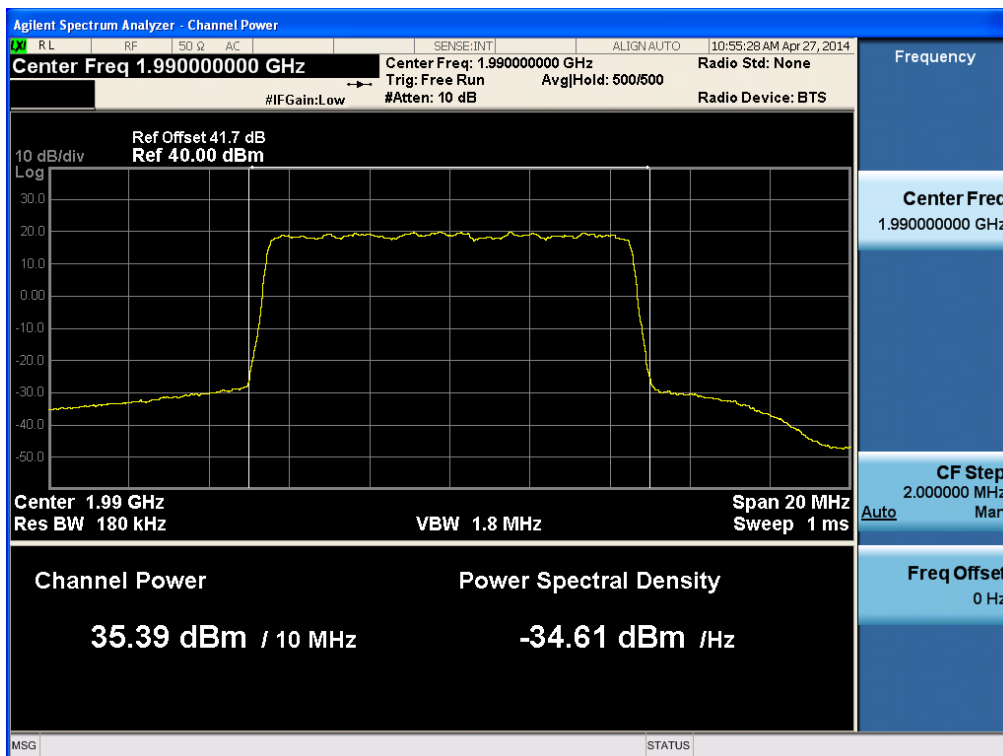


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 25 of 126

(64QAM Low Channel)

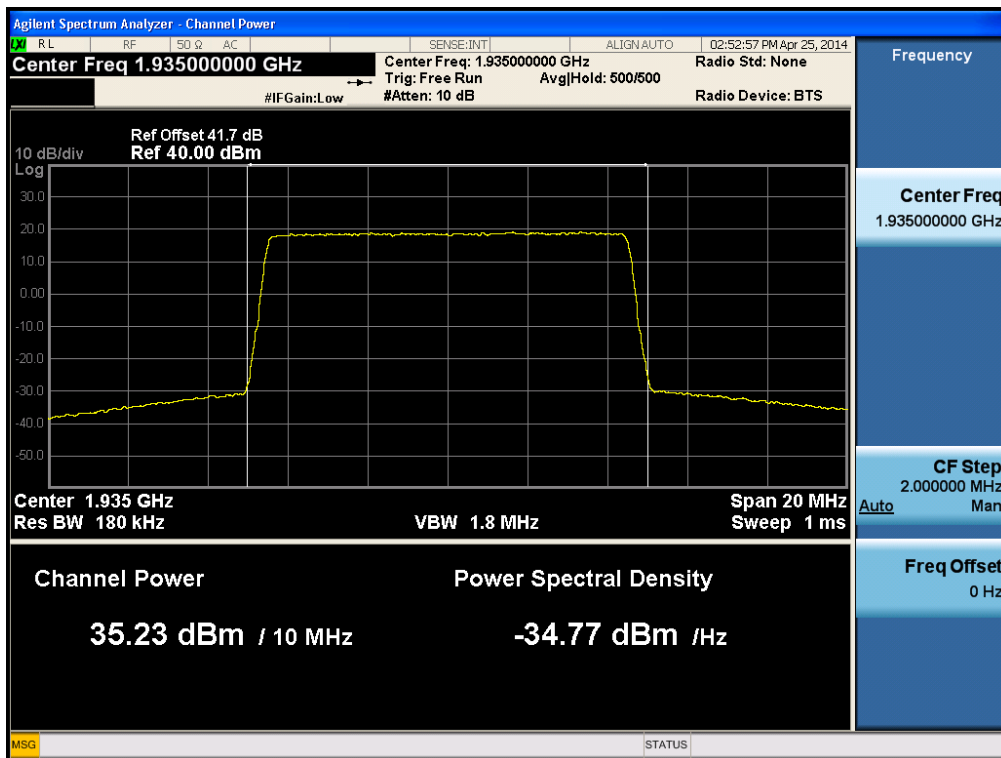


(64QAM Middle Channel)

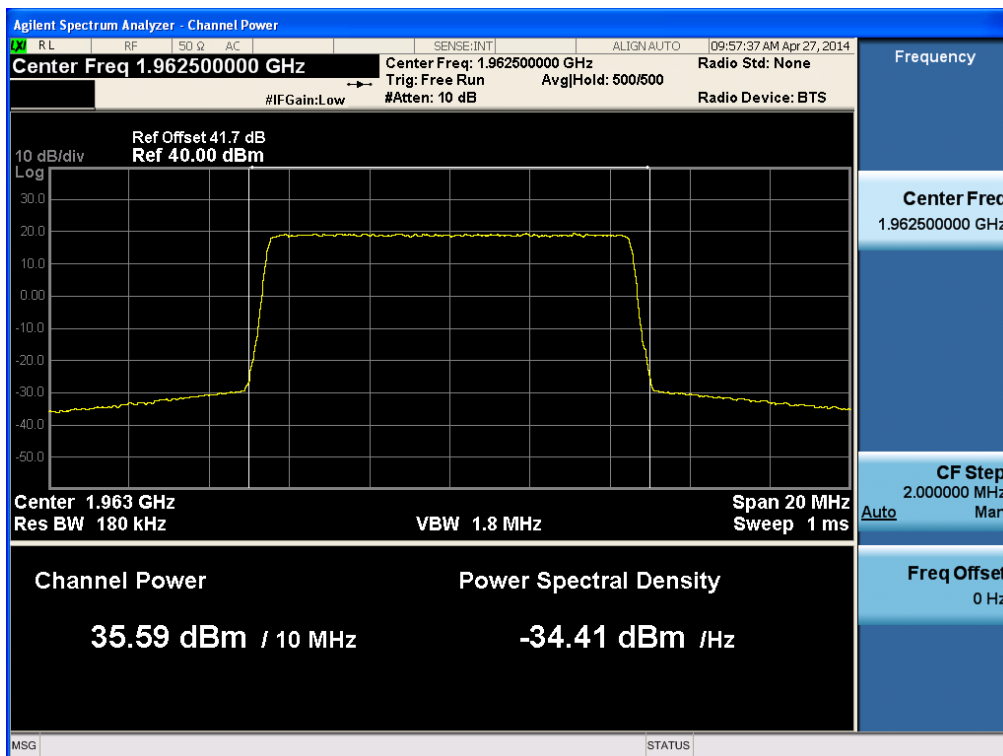

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 26 of 126


(64QAM High Channel)

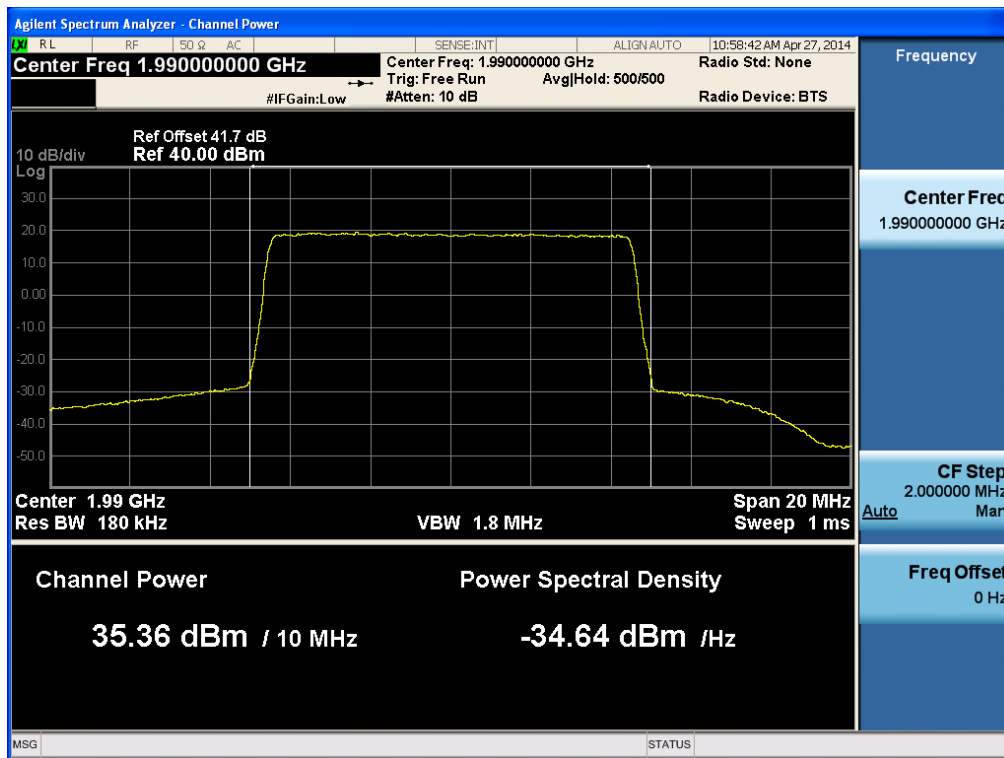


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 27 of 126

Plot Data for LTE 10 MHz : 1 Carrier , Output Port 1

(QPSK Low Channel)

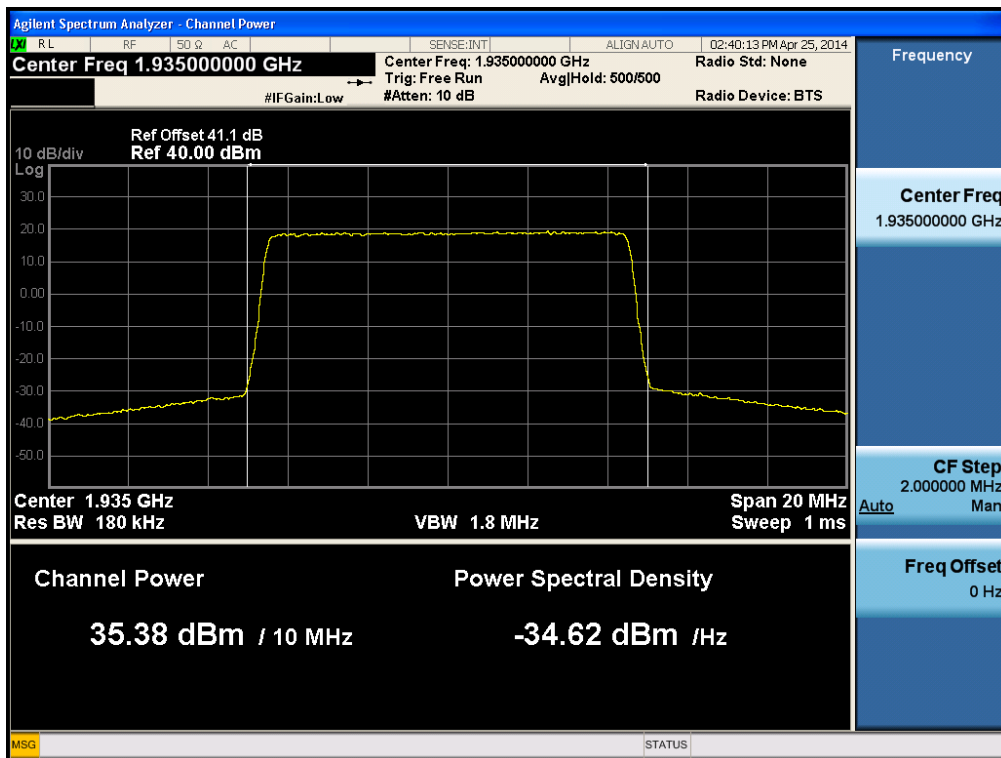


(QPSK Middle Channel)

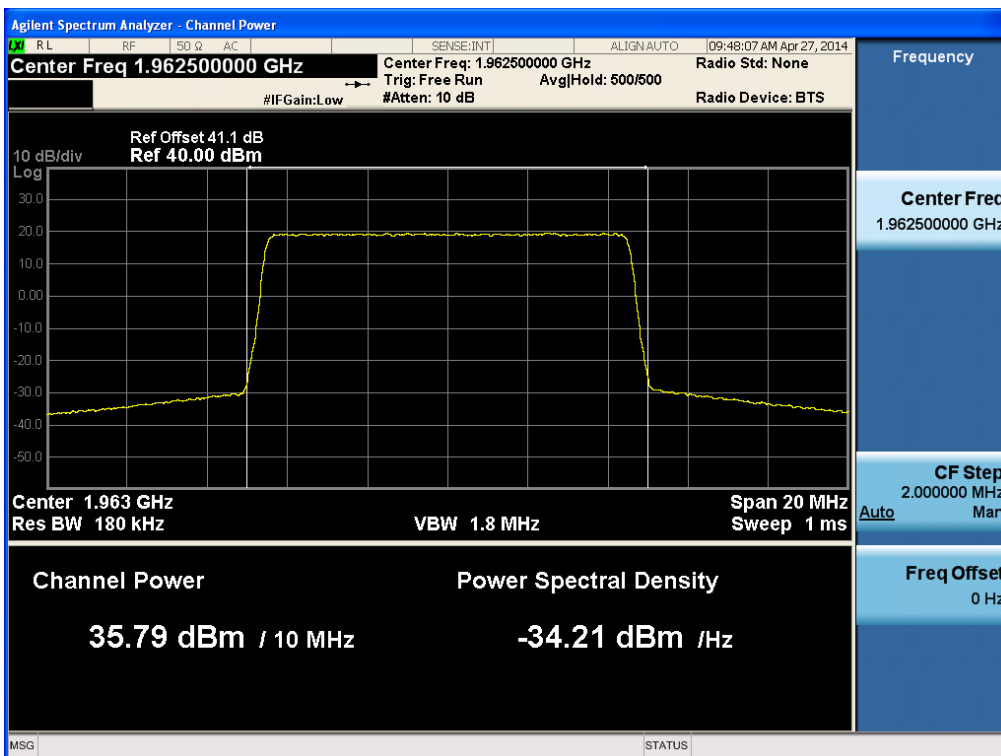


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 28 of 126

(QPSK High Channel)

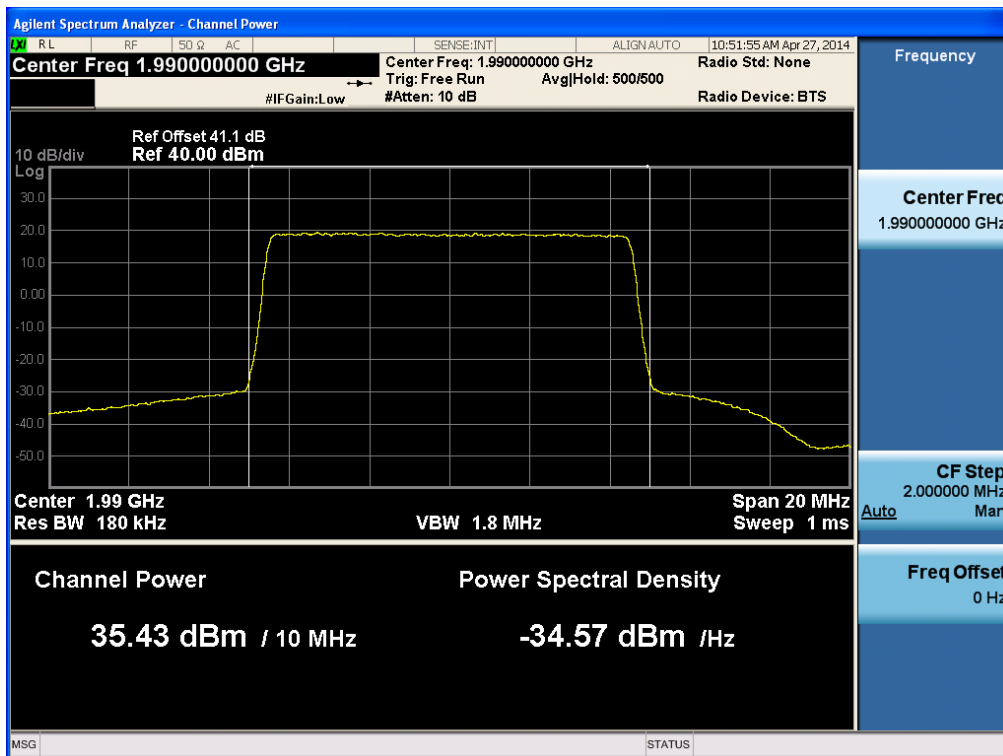


(16QAM Low Channel)

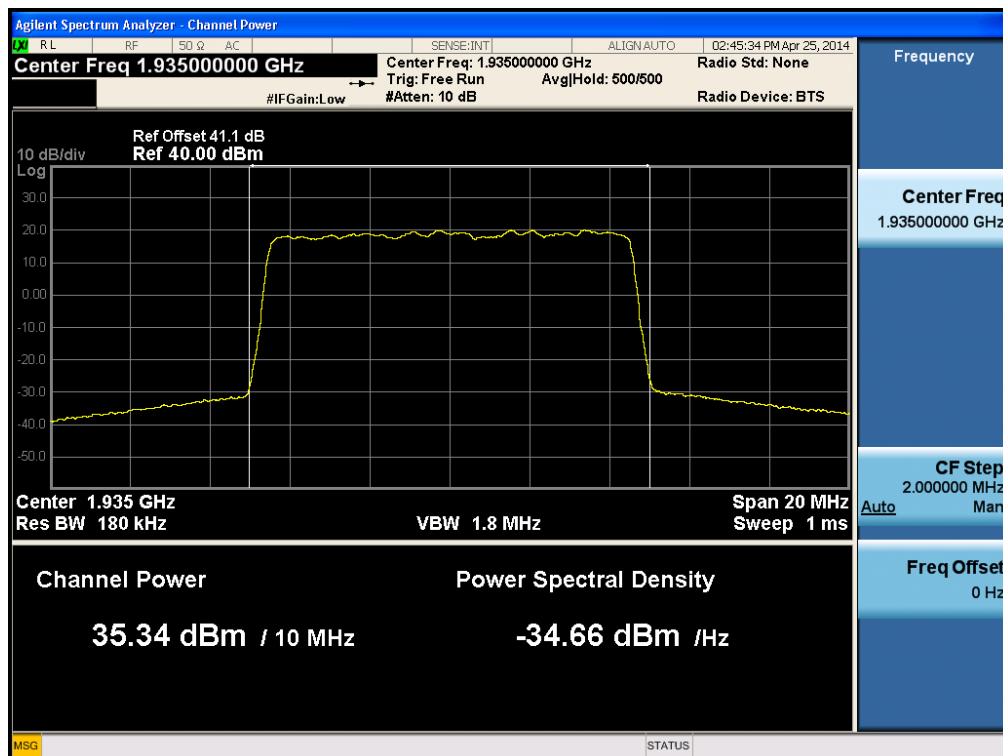


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 29 of 126

(16QAM Middle Channel)

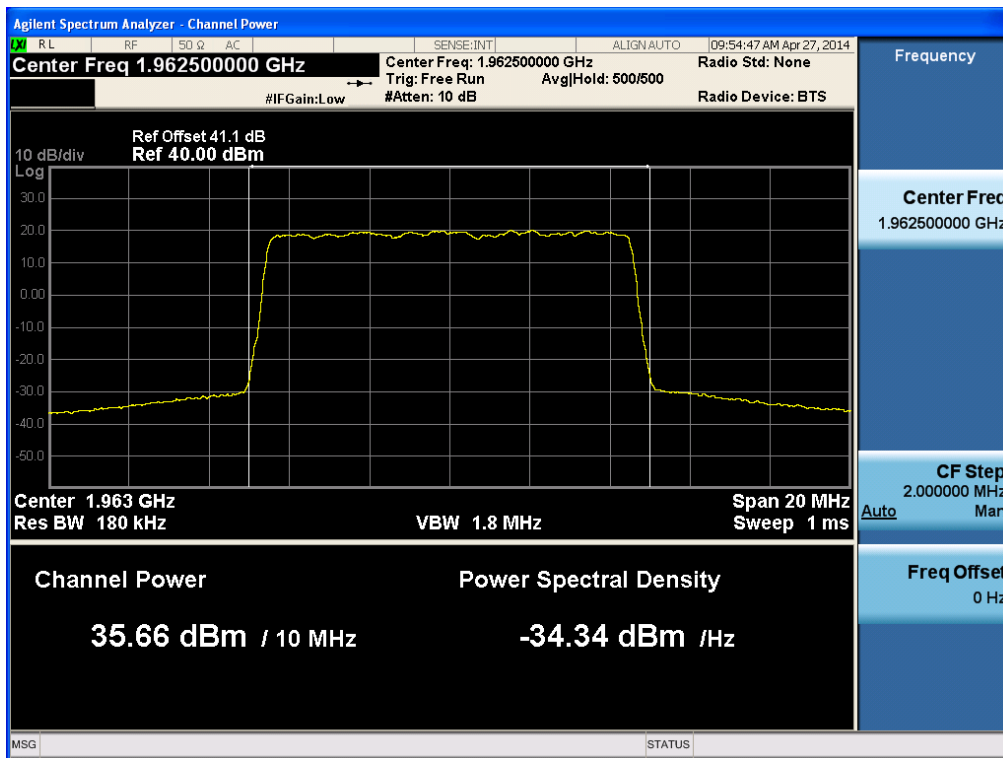


(16QAM High Channel)

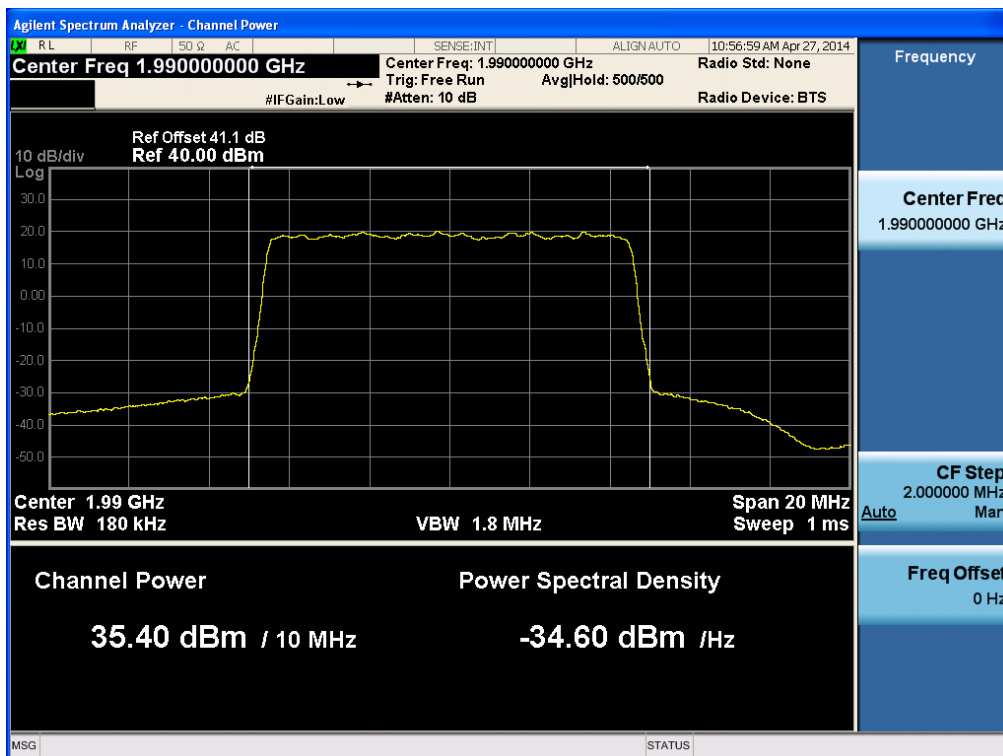


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 30 of 126

(64QAM Low Channel)

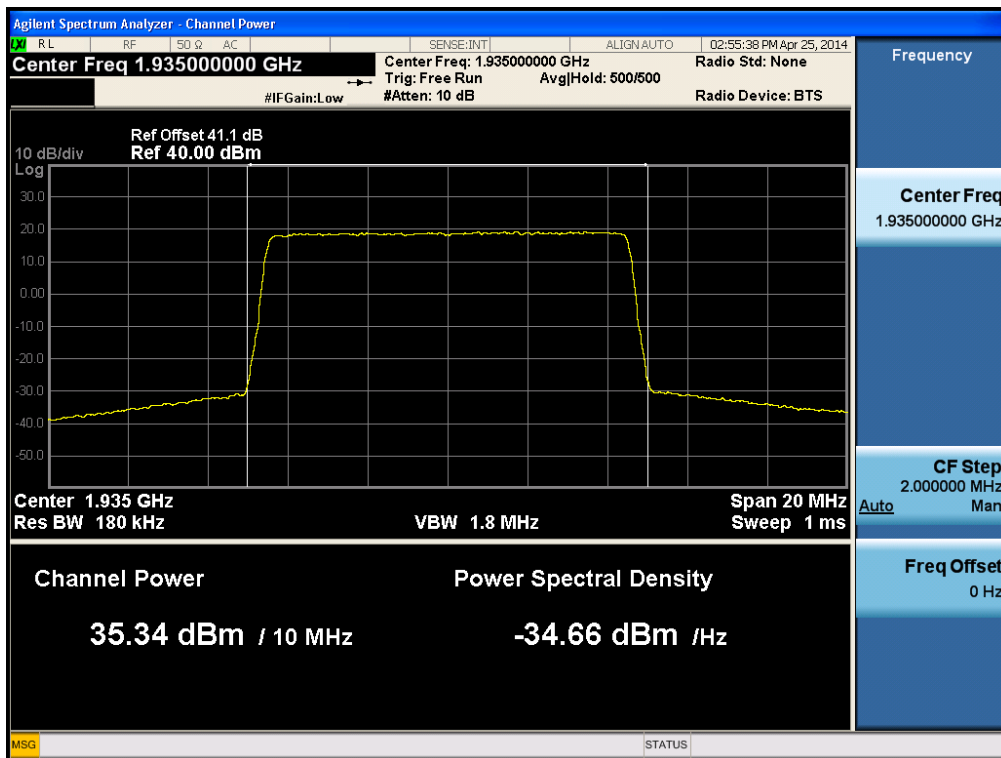


(64QAM Middle Channel)

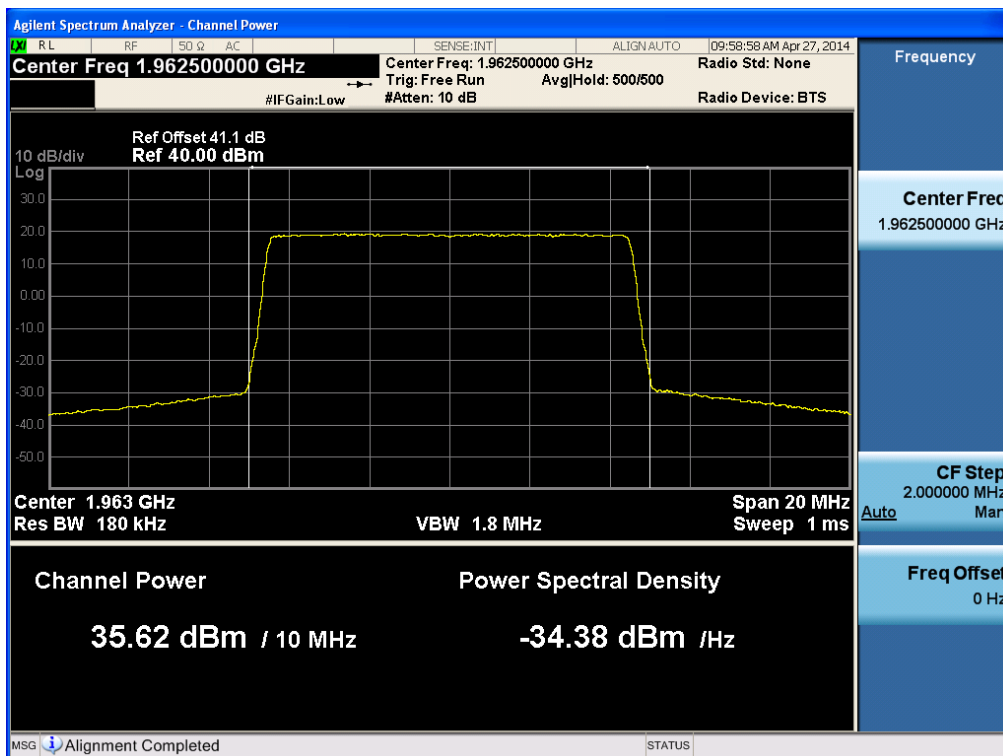

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 31 of 126

(64QAM High Channel)

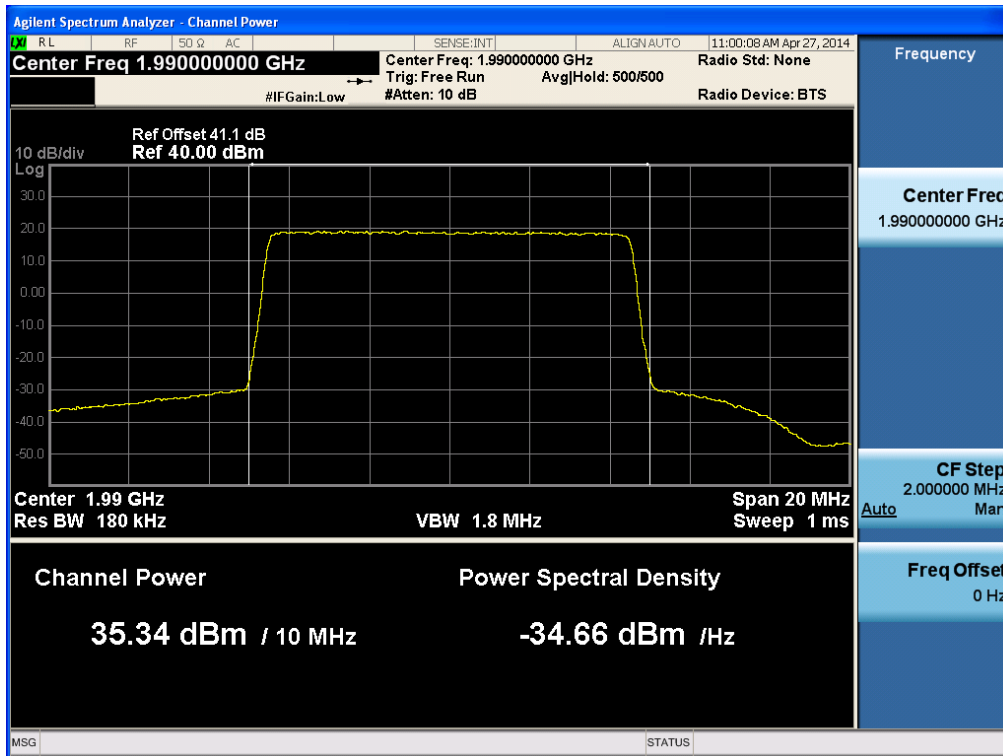

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 32 of 126

6. OCCUPIED BANDWIDTH

6.1. Applicable Standard

According to FCC §2.1049

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(g) Transmitter in which the modulating baseband comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service.

Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

6.2. Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Agilent	N9020A /Signal Analyzer	US46220219	04/16/2015
DAE YOUNG ELECTRIC & TECHNOLOGY	DFSS60 / AC Power Source	1003030-1	04/01/2015
HEWLETT PACKARD	8394C / Fixed Attenuator	10342	05/19/2015

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 33 of 126

6.3. Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. The EUT was connected to a spectrum analyzer enabled with an occupied bandwidth function via its antenna port. Measurements were performed to determine the occupied bandwidth in accordance with FCC Part 2.1049. The occupied bandwidth was measured from the fundamental emission at the bottom, middle and top channels. The occupied bandwidth was measured using the built in occupied bandwidth function of the spectrum analyzer. It was set to measure the bandwidth where 99% of the signal power was contained. The analyzer automatically configures the measurement bandwidths to make an accurate measurement based on the channel bandwidth and channel spacing of the EUT.



6.4. Test Result

: PASS

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 34 of 126

[LTE 5 MHz : 1 Carrier / 1 Port]

. Test Data at Output Port 0

Modulation	Channel	Frequency (MHz)	Measured Bandwidth (MHz)
QPSK	Low	1932.5	4.518
	Middle	1962.5	4.514
	High	1992.5	4.518
16QAM	Low	1932.5	4.491
	Middle	1962.5	4.493
	High	1992.5	4.497
64QAM	Low	1932.5	4.513
	Middle	1962.5	4.522
	High	1992.5	4.532

. Test Data at Output Port 1

Modulation	Channel	Frequency (MHz)	Measured Bandwidth (MHz)
QPSK	Low	1932.5	4.503
	Middle	1962.5	4.518
	High	1992.5	4.515
16QAM	Low	1932.5	4.494
	Middle	1962.5	4.489
	High	1992.5	4.472
64QAM	Low	1932.5	4.545
	Middle	1962.5	4.508
	High	1992.5	4.539

[LTE 10 MHz : 1 Carrier / 1 Port]

. Test Data at Output Port 0


Modulation	Channel	Frequency (MHz)	Measured Bandwidth (MHz)
QPSK	Low	1935.00	8.970
	Middle	1962.50	8.979
	High	1990.00	8.970
16QAM	Low	1935.00	8.977
	Middle	1962.50	8.988
	High	1990.00	8.973
64QAM	Low	1935.00	8.974
	Middle	1962.50	8.976
	High	1990.00	8.971

. Test Data at Output Port 1


Modulation	Channel	Frequency (MHz)	Measured Bandwidth (MHz)
QPSK	Low	1935.00	8.961
	Middle	1962.50	8.969
	High	1990.00	8.985
16QAM	Low	1935.00	8.987
	Middle	1962.50	8.977
	High	1990.00	8.992
64QAM	Low	1935.00	8.964
	Middle	1962.50	8.960
	High	1990.00	8.970

. Plot Data for LTE 5 MHz : 1 Carrier , Output Port 0

(QPSK Low Channel)

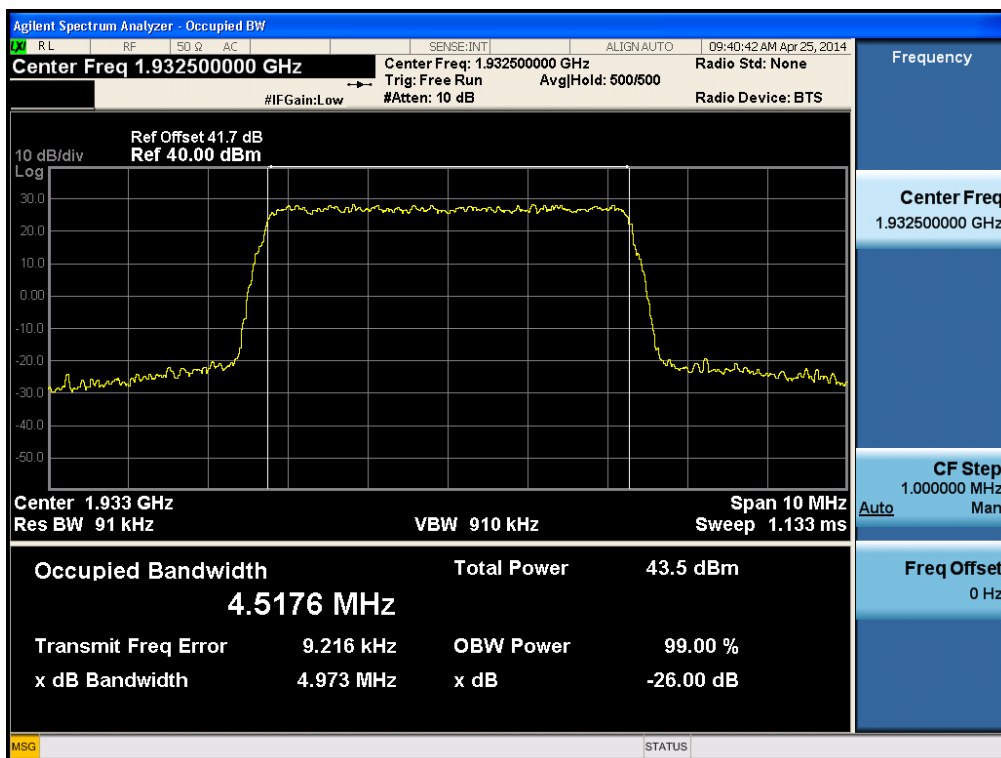


(QPSK Middle Channel)

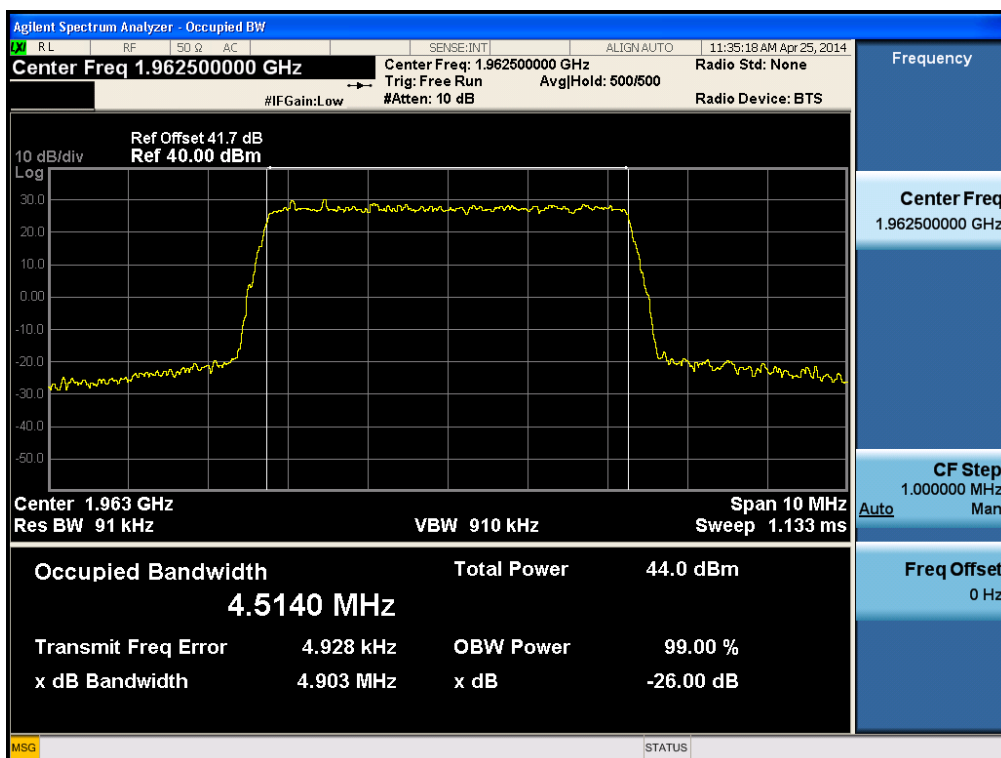


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 37 of 126

(QPSK High Channel)

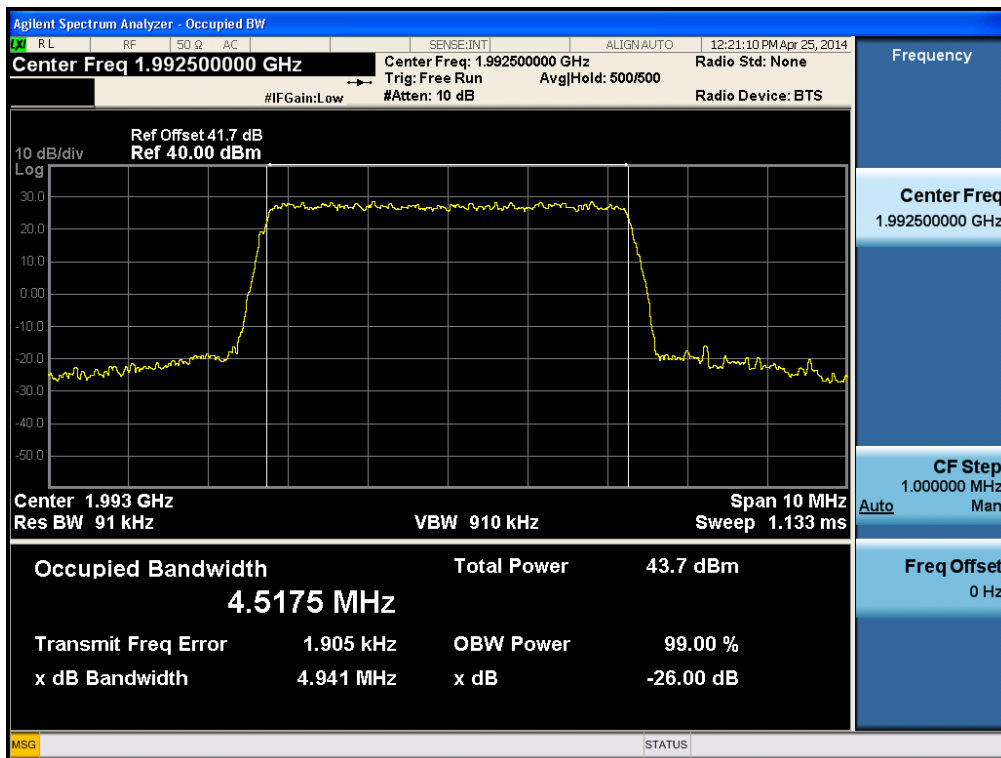


(16QAM Low Channel)

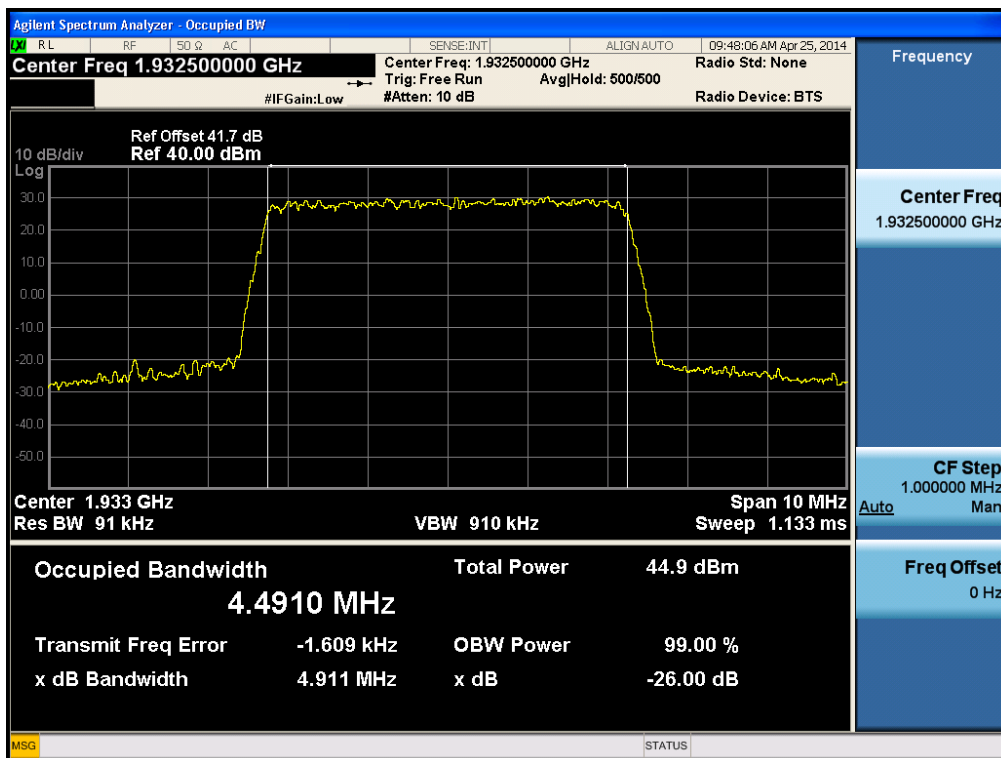


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 38 of 126

(16QAM Middle Channel)

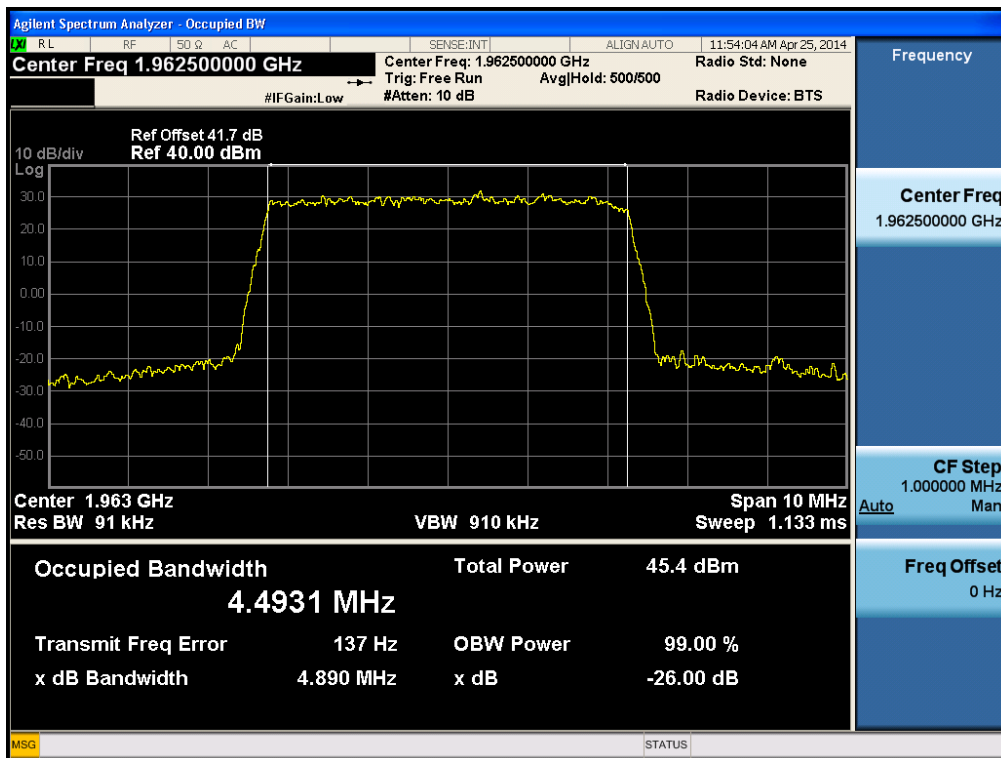


(16QAM High Channel)

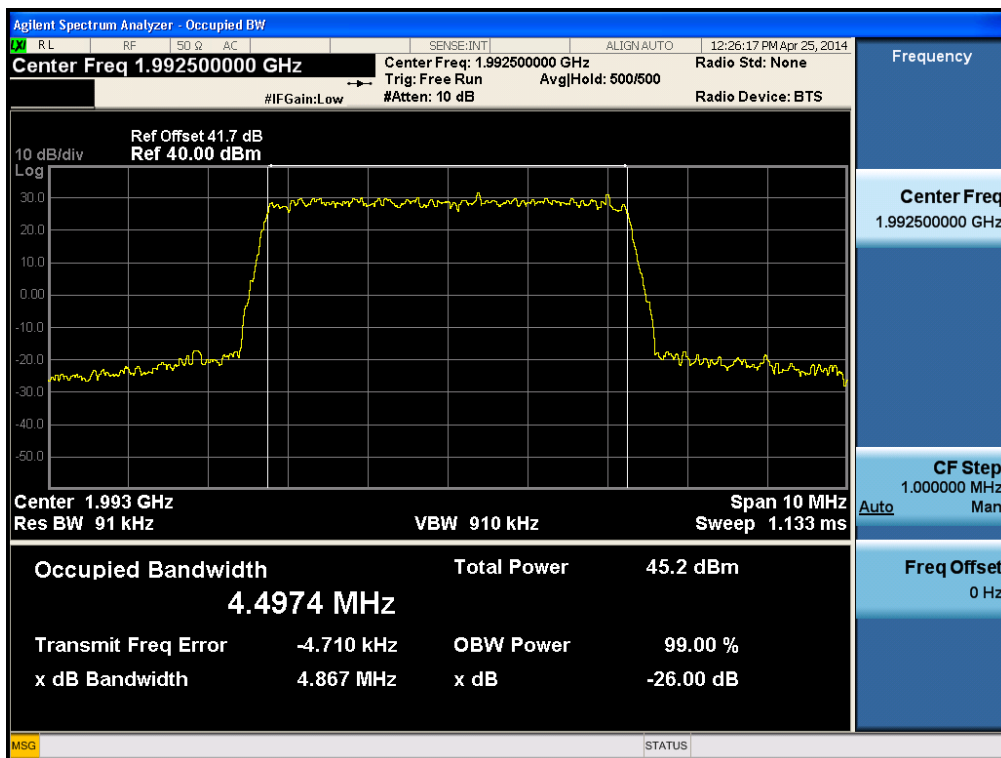


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 39 of 126

(64QAM Low Channel)

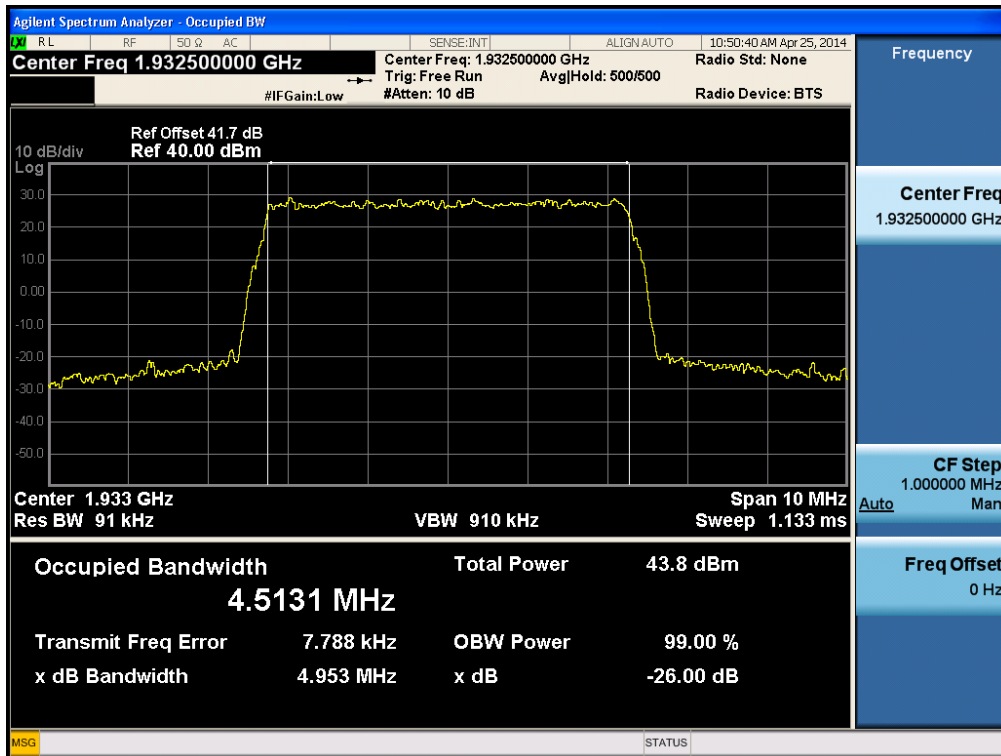


(64QAM Middle Channel)

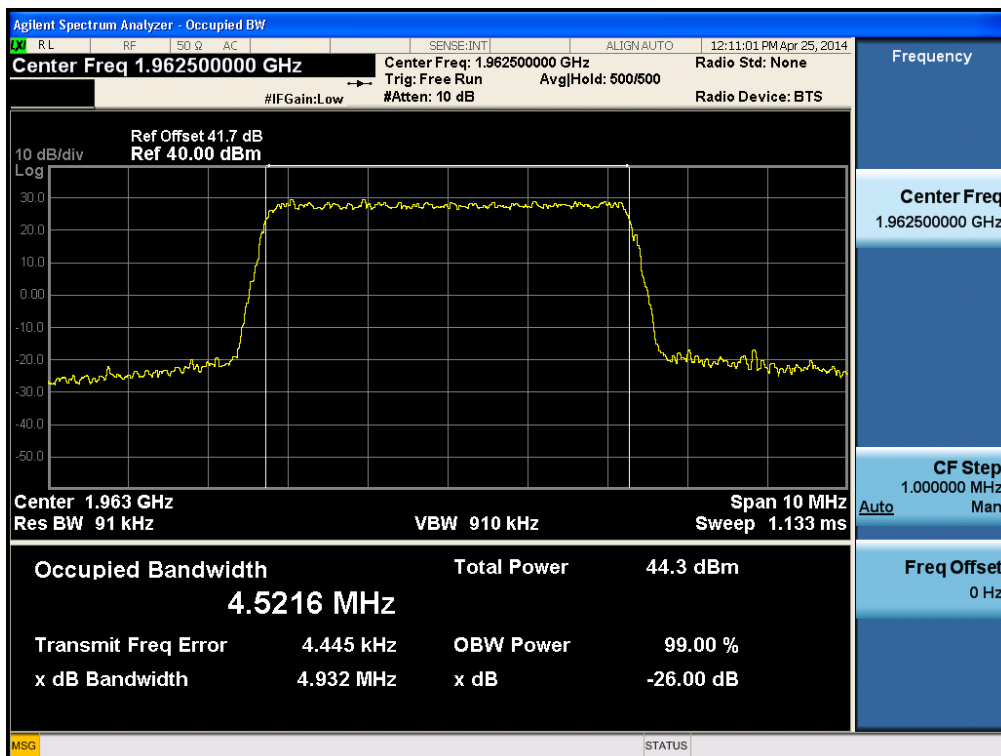

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 40 of 126


(64QAM High Channel)

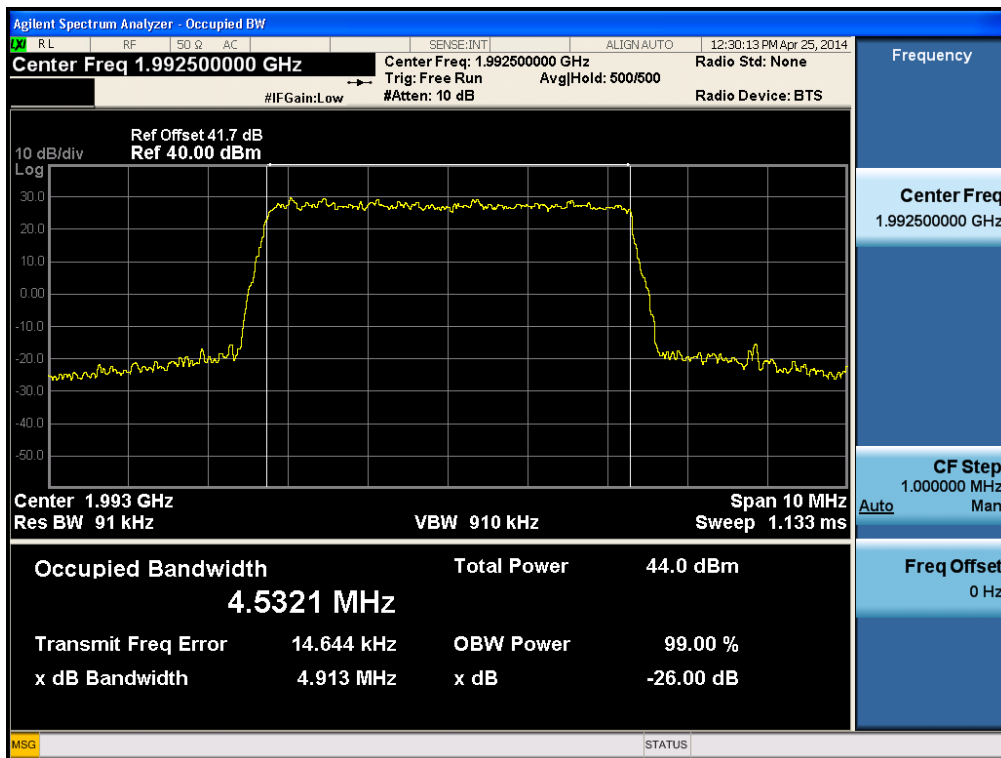


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 41 of 126

. Plot Data for LTE 5 MHz : 1 Carrier , Output Port 1

(QPSK Low Channel)

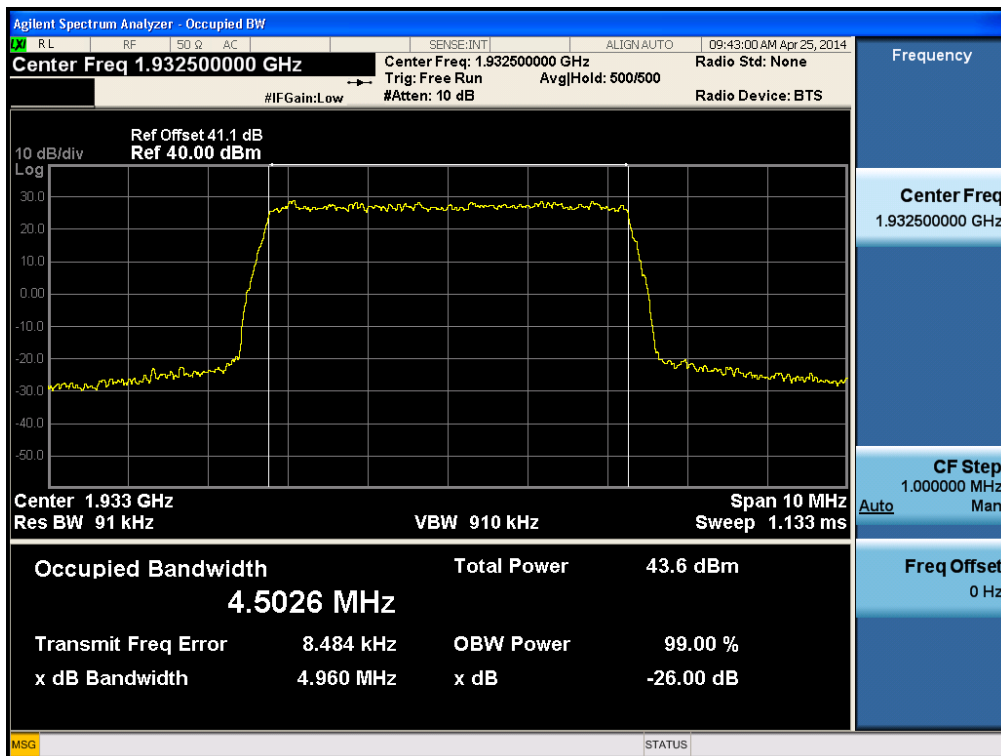


(QPSK Middle Channel)

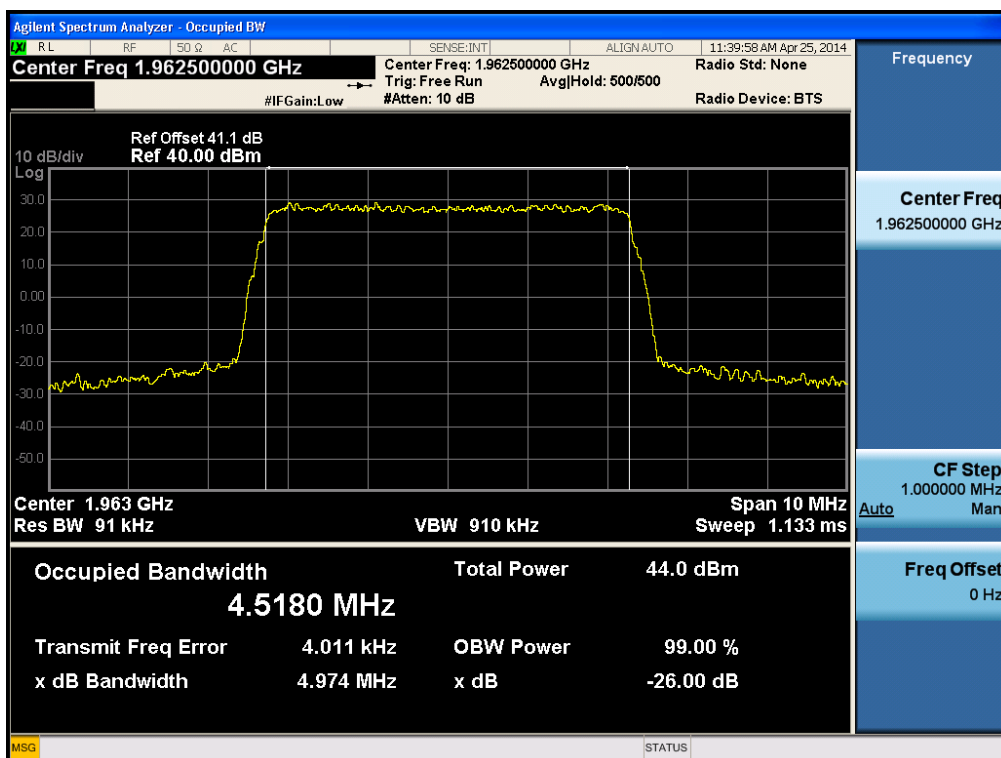


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 42 of 126

(QPSK High Channel)

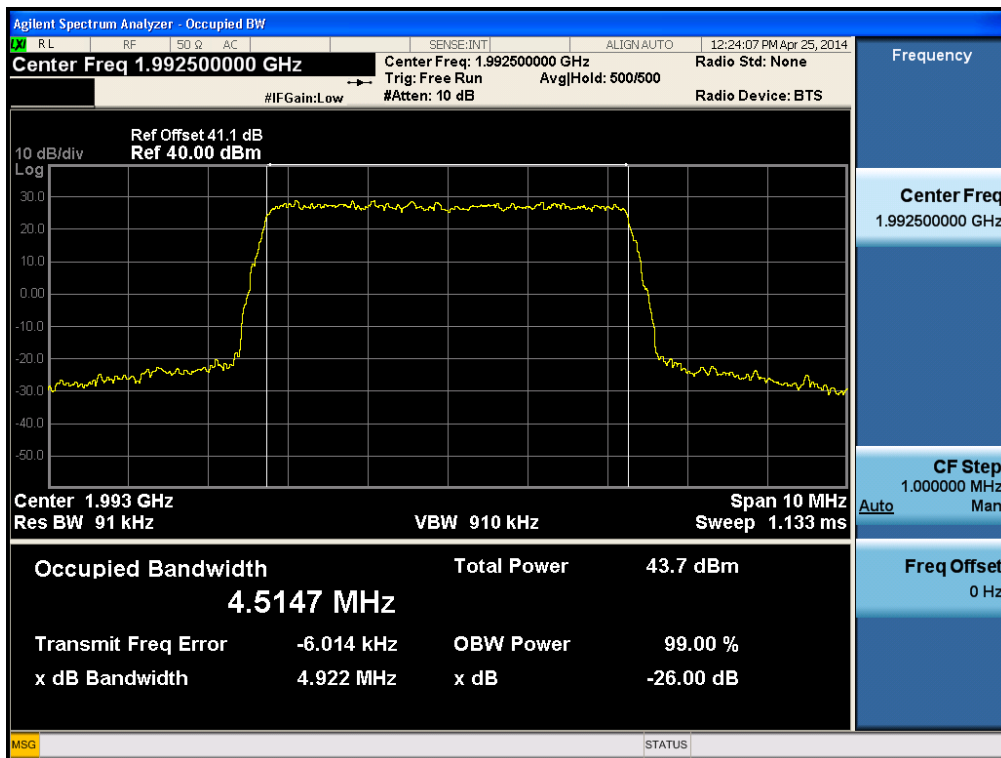


(16QAM Low Channel)

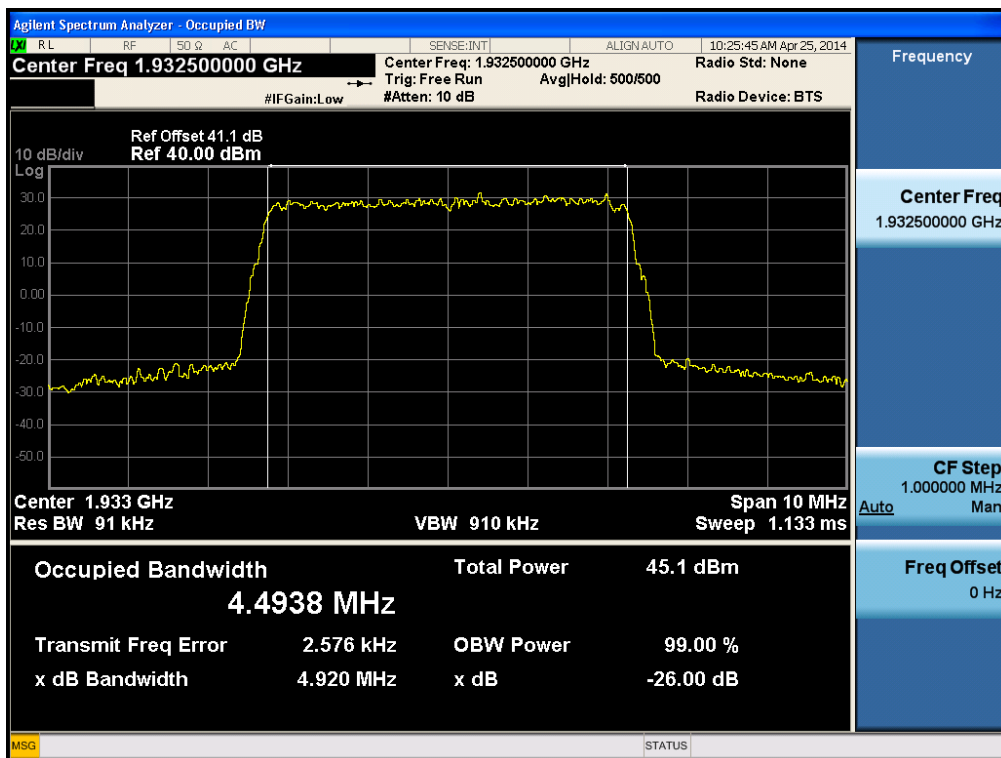


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 43 of 126

(16QAM Middle Channel)

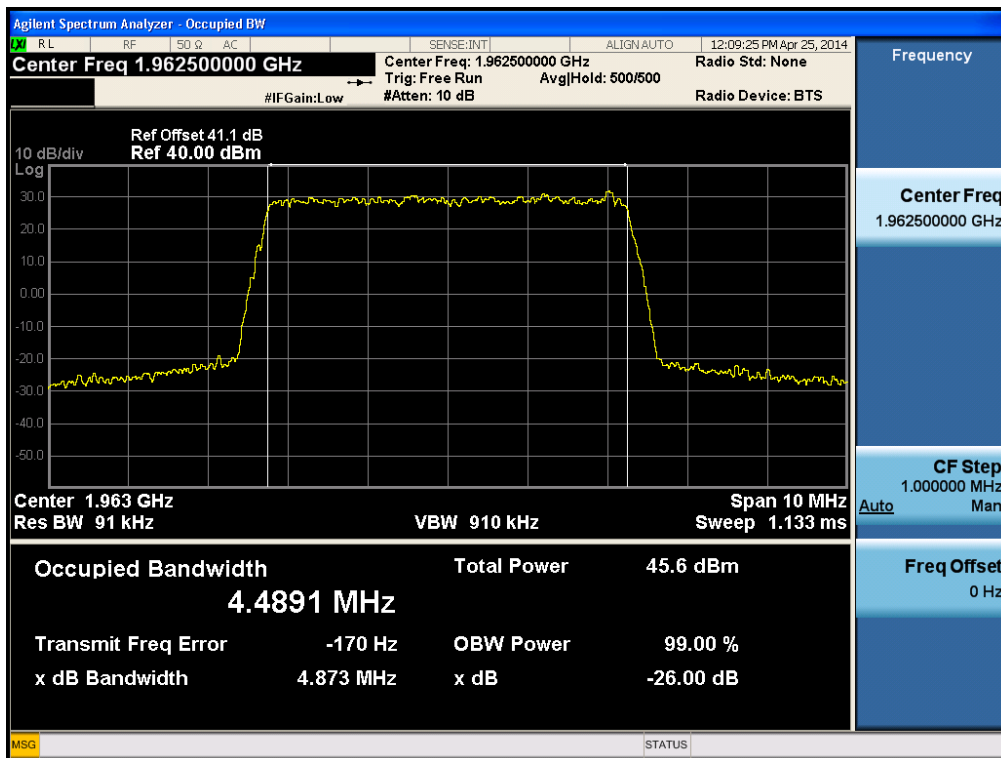


(16QAM High Channel)

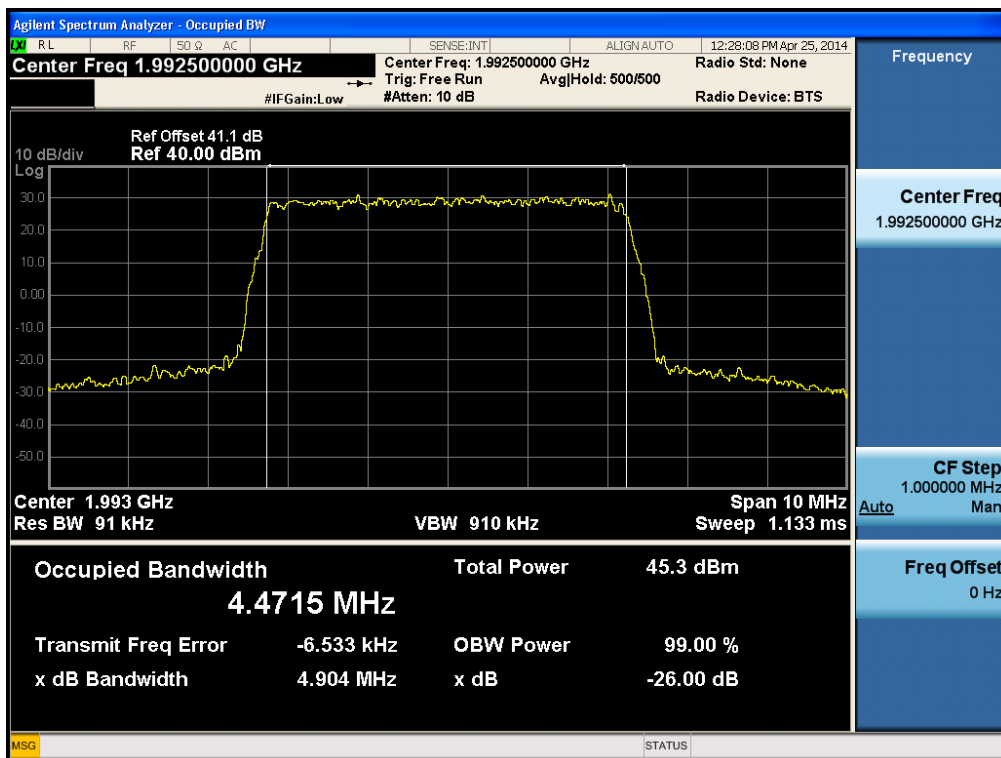


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 44 of 126

(64QAM Low Channel)

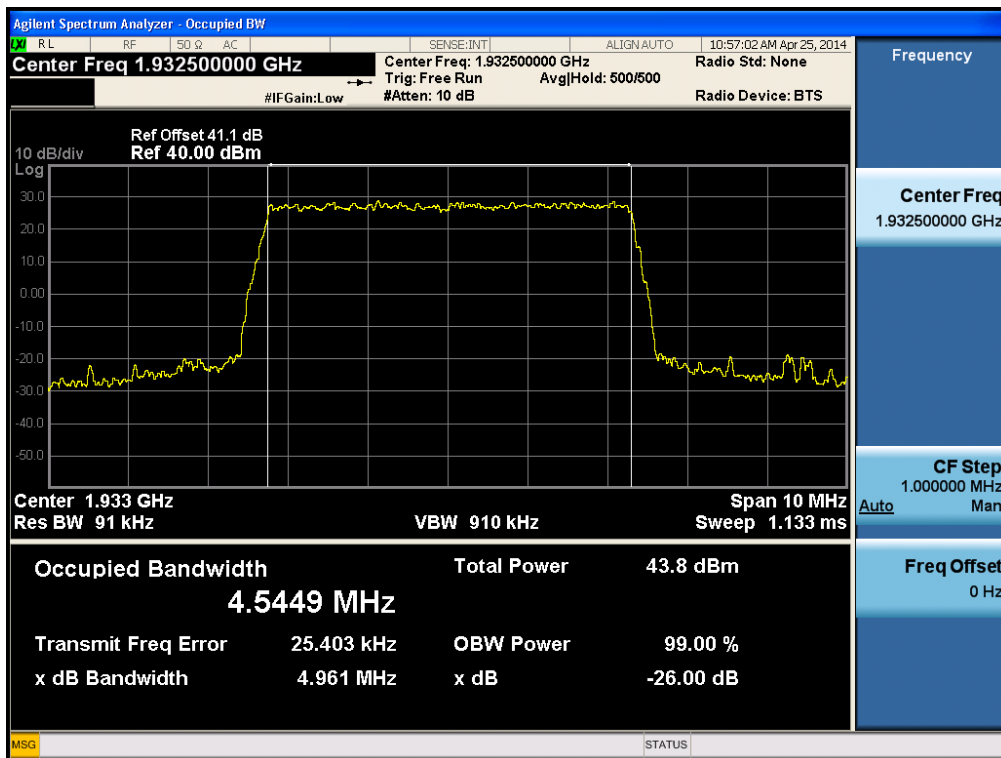


(64QAM Middle Channel)

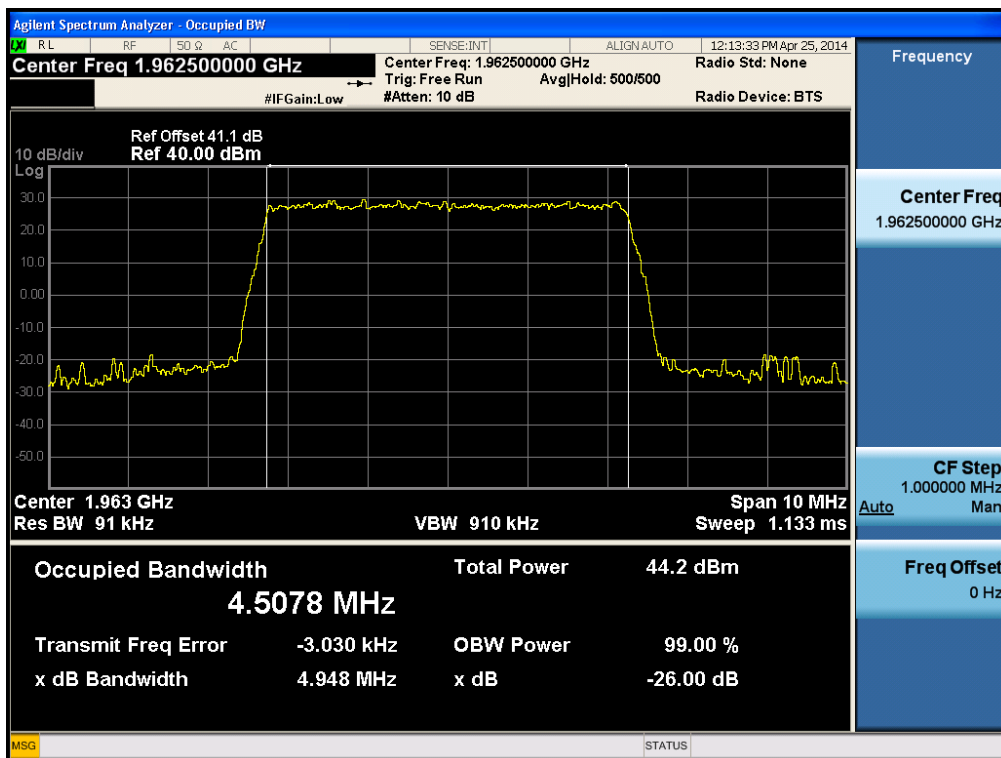

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 45 of 126


(64QAM High Channel)

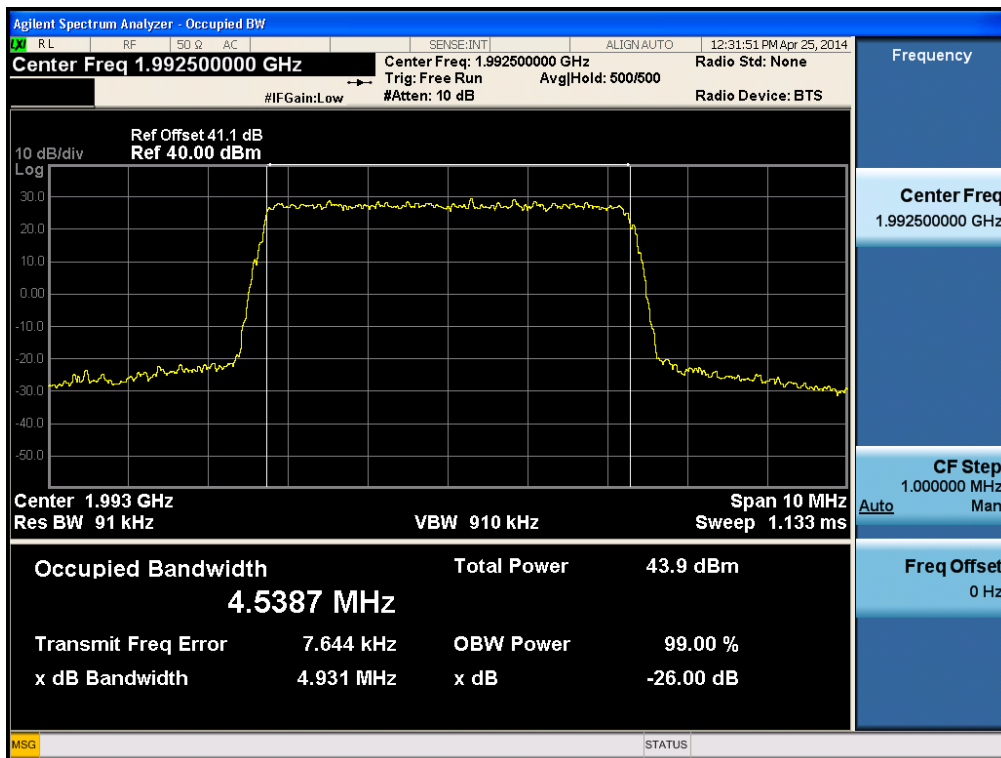


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 46 of 126

Plot Data for LTE 10 MHz : 1 Carrier , Output Port 0

(QPSK Low Channel)

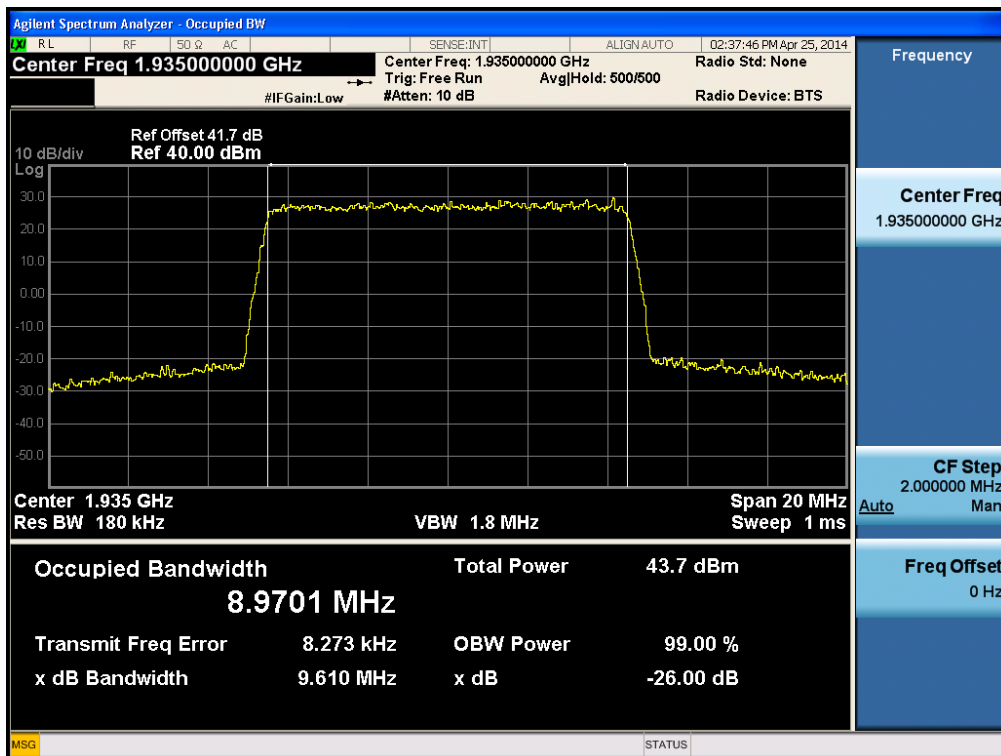


(QPSK Middle Channel)

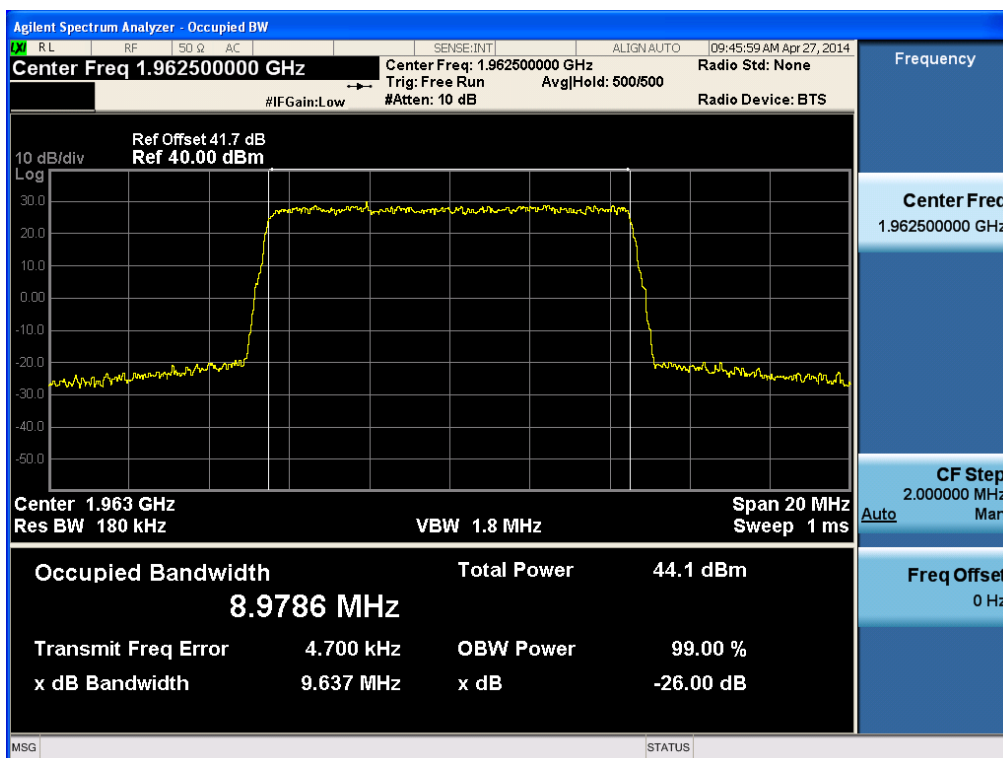


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 47 of 126

(QPSK High Channel)

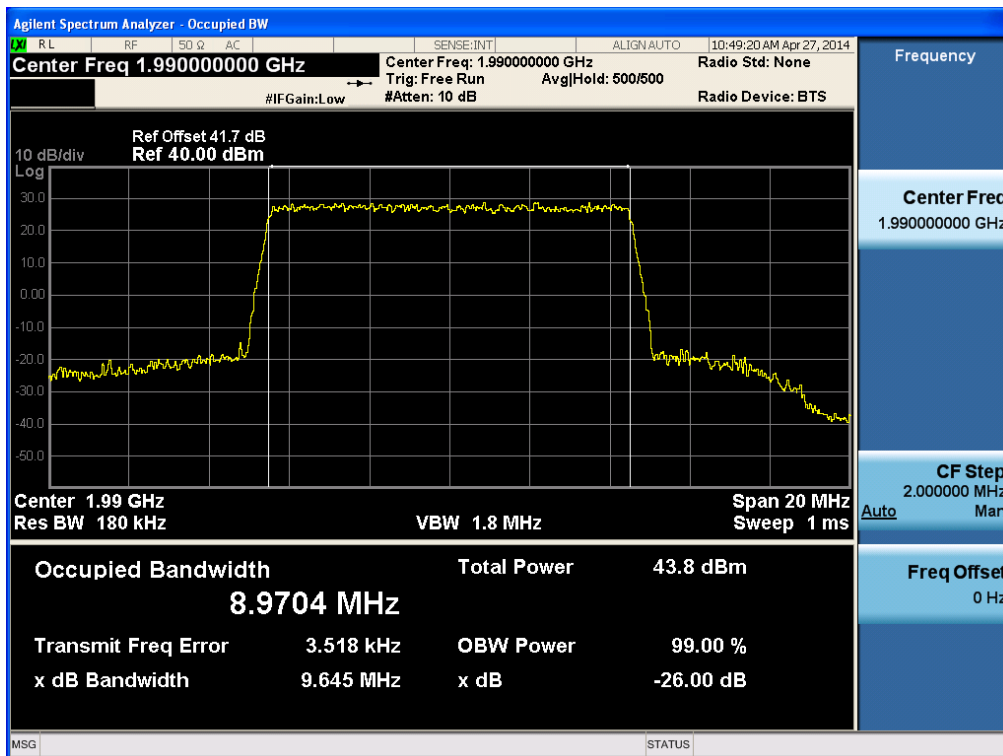


(16QAM Low Channel)

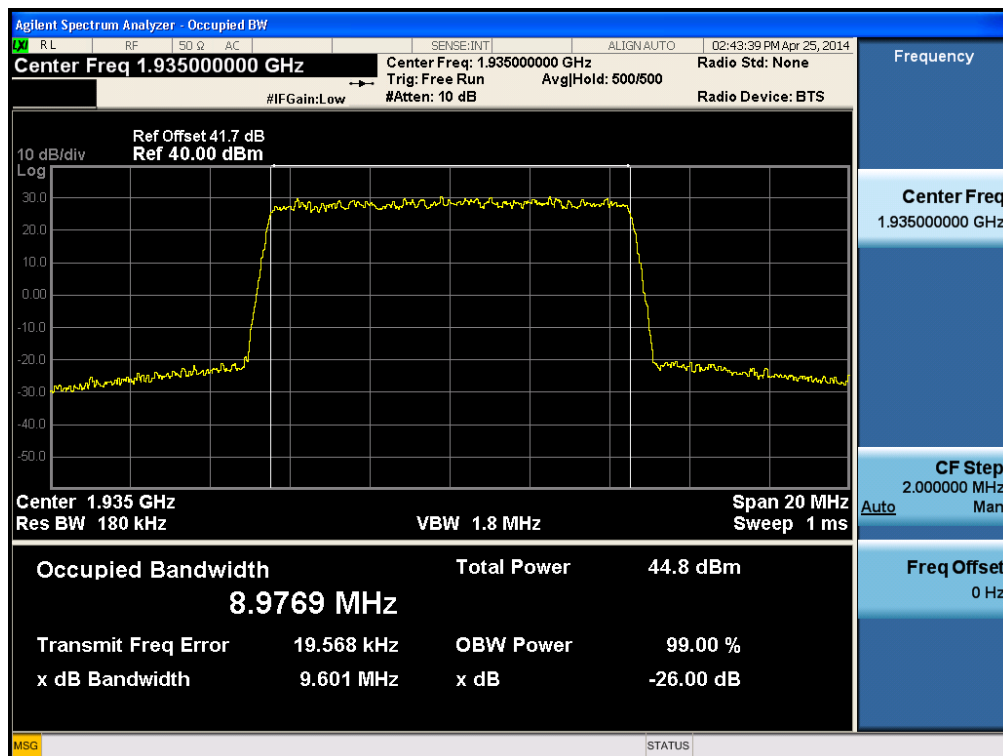


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 48 of 126

(16QAM Middle Channel)

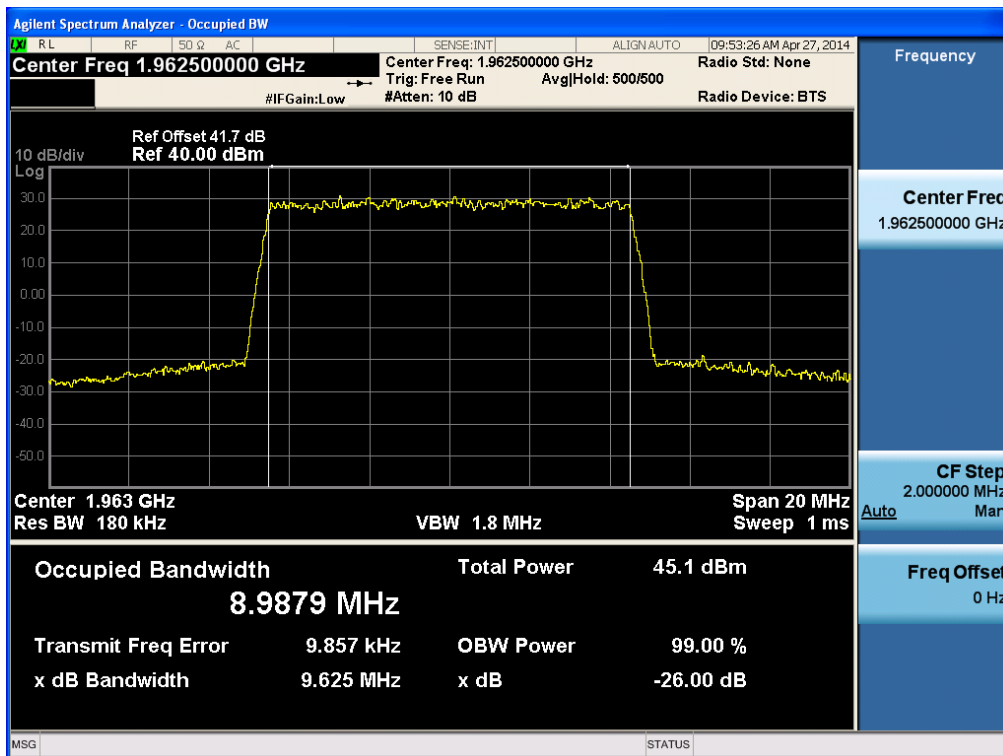


(16QAM High Channel)

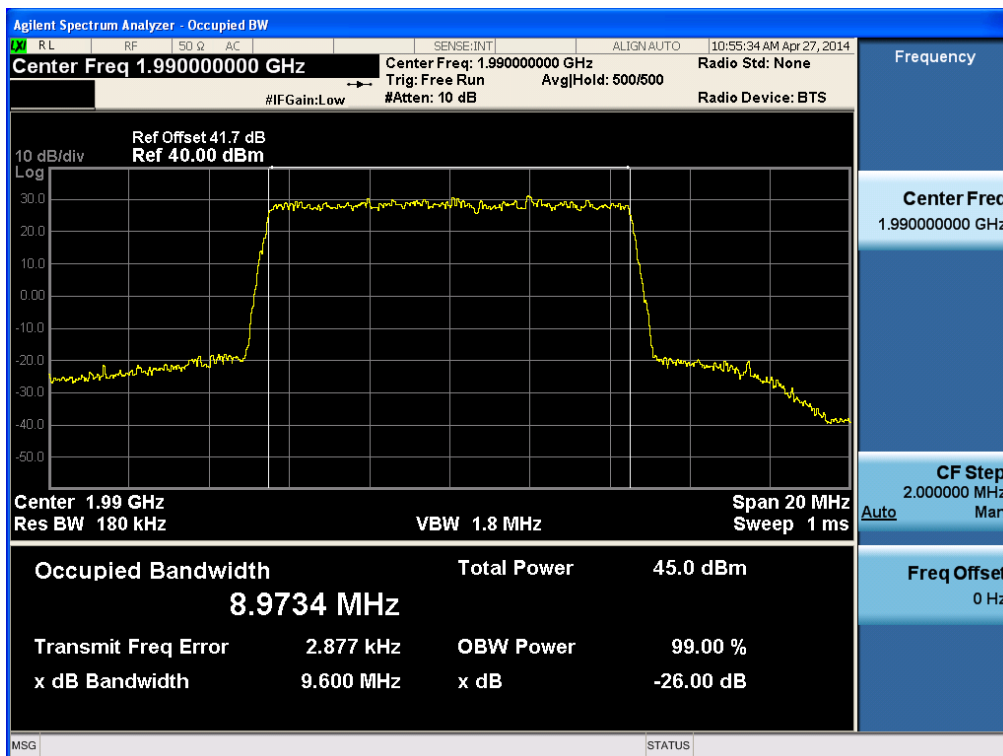


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 49 of 126

(64QAM Low Channel)

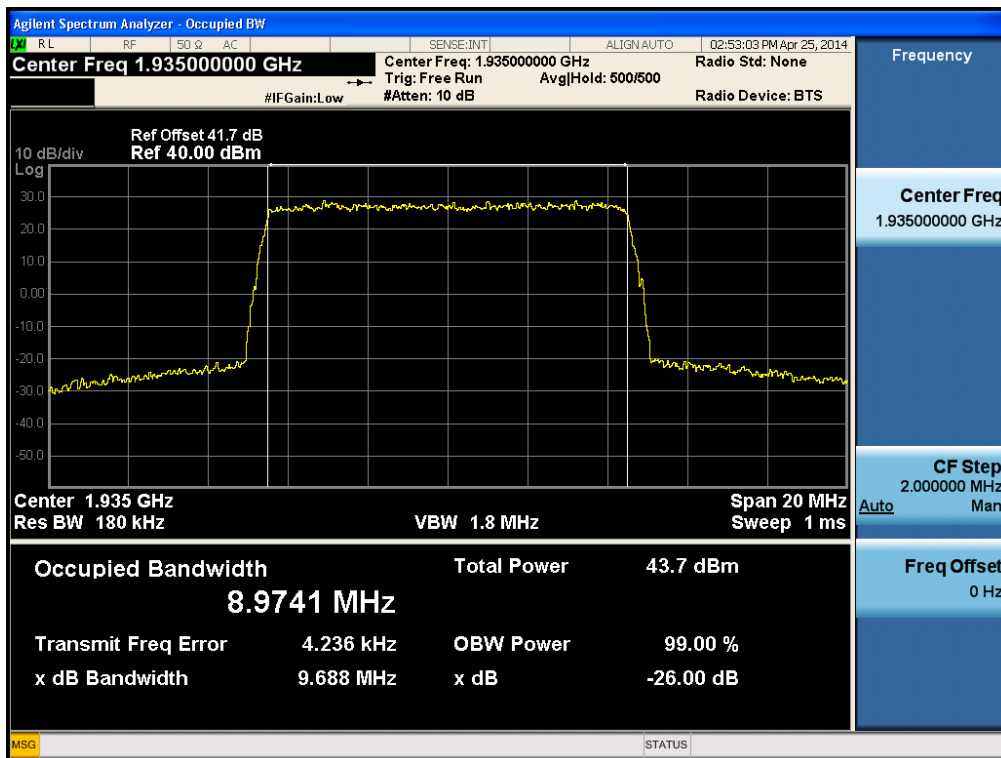


(64QAM Middle Channel)

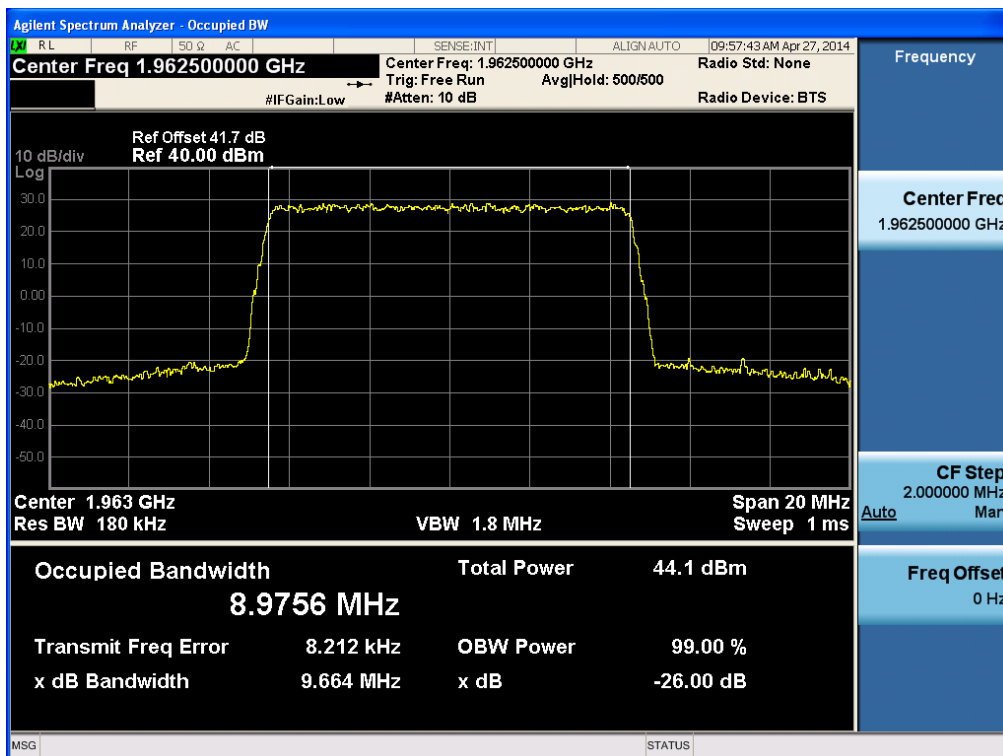

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 50 of 126


(64QAM High Channel)

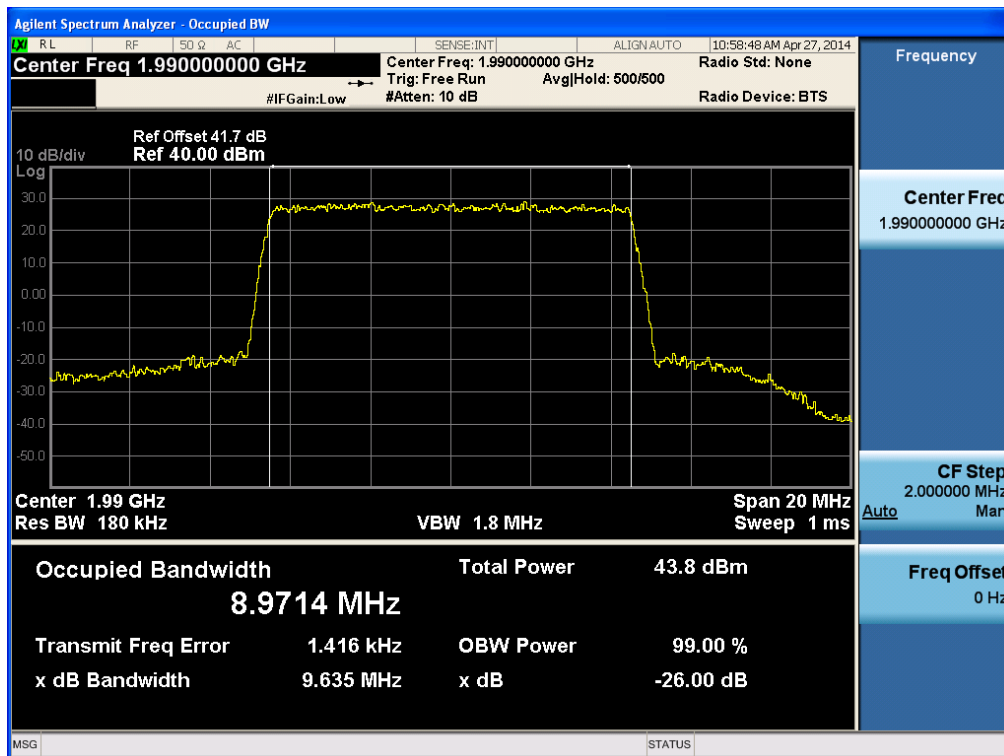


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 51 of 126

. Plot Data for LTE 10 MHz : 1 Carrier , Output Port 1

(QPSK Low Channel)

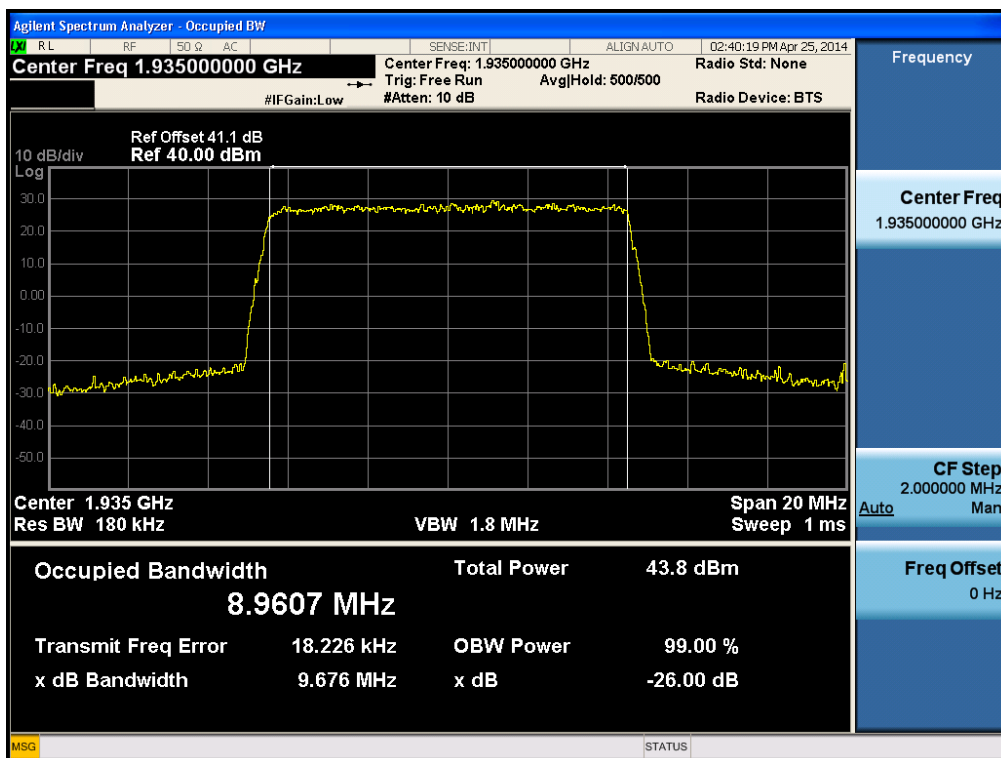


(QPSK Middle Channel)

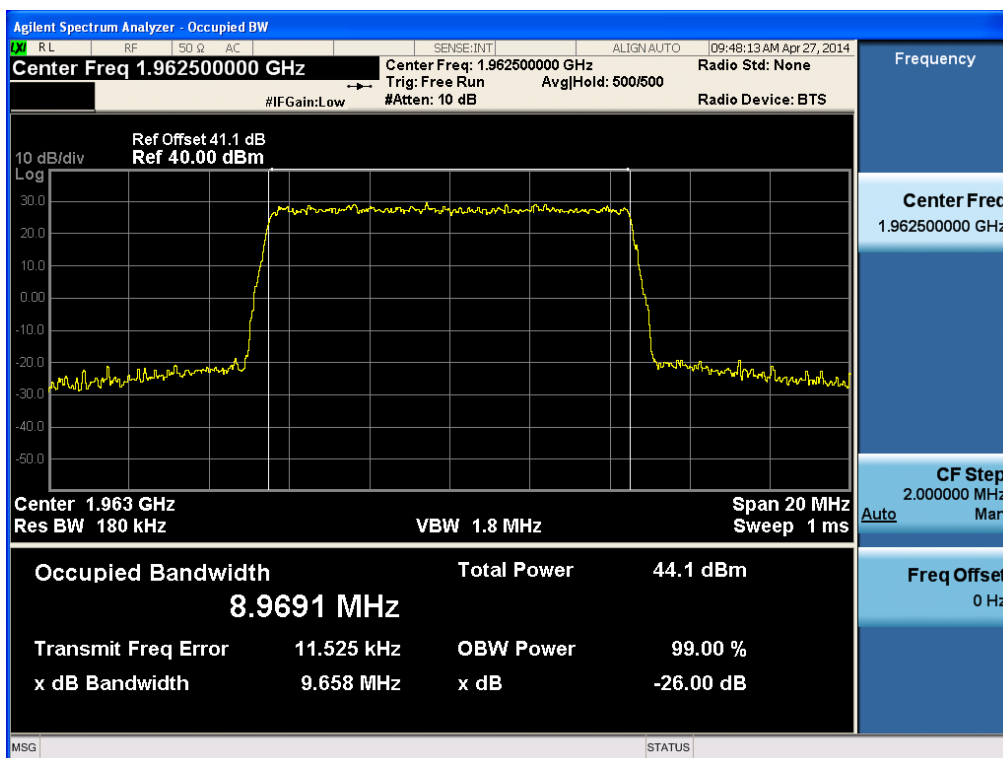


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 52 of 126

(QPSK High Channel)

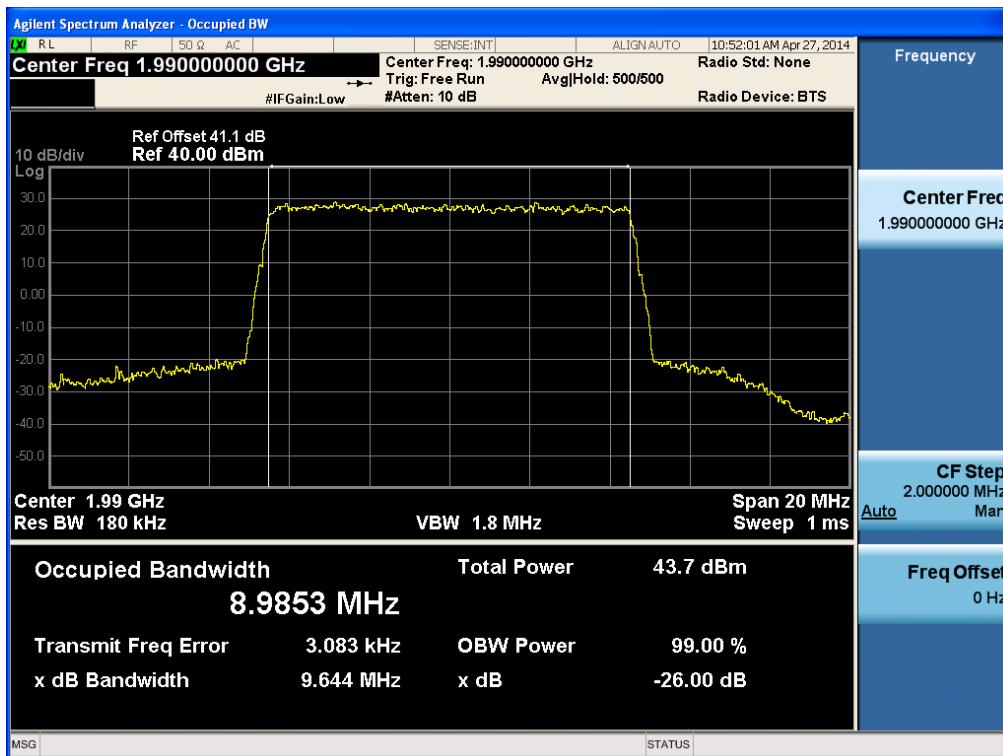


(16QAM Low Channel)

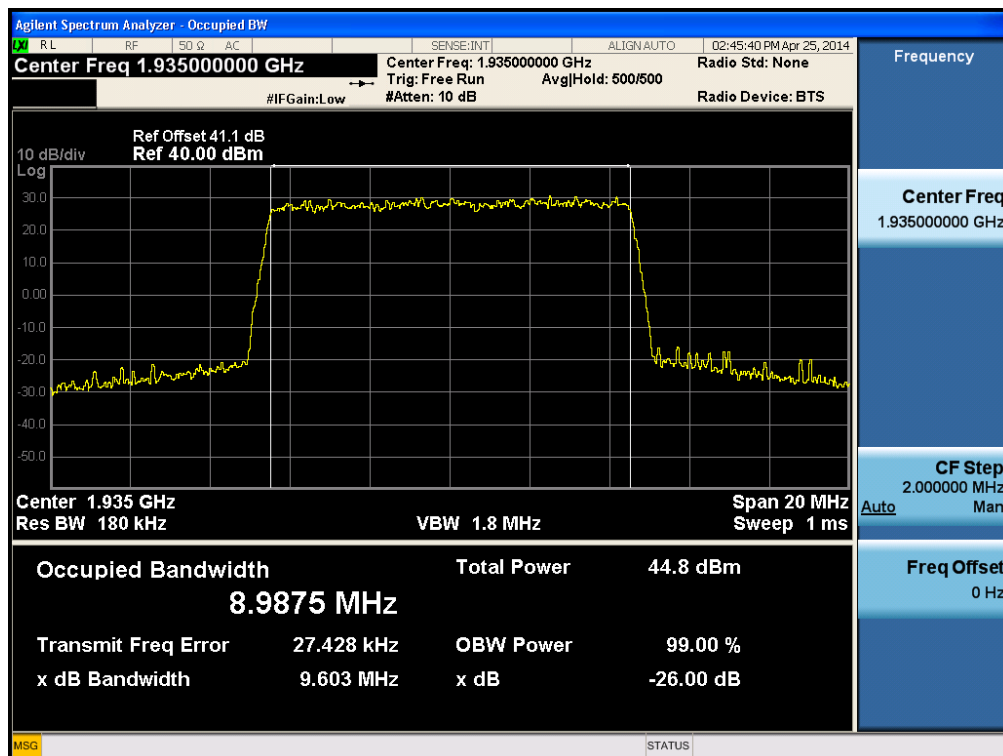


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 53 of 126

(16QAM Middle Channel)

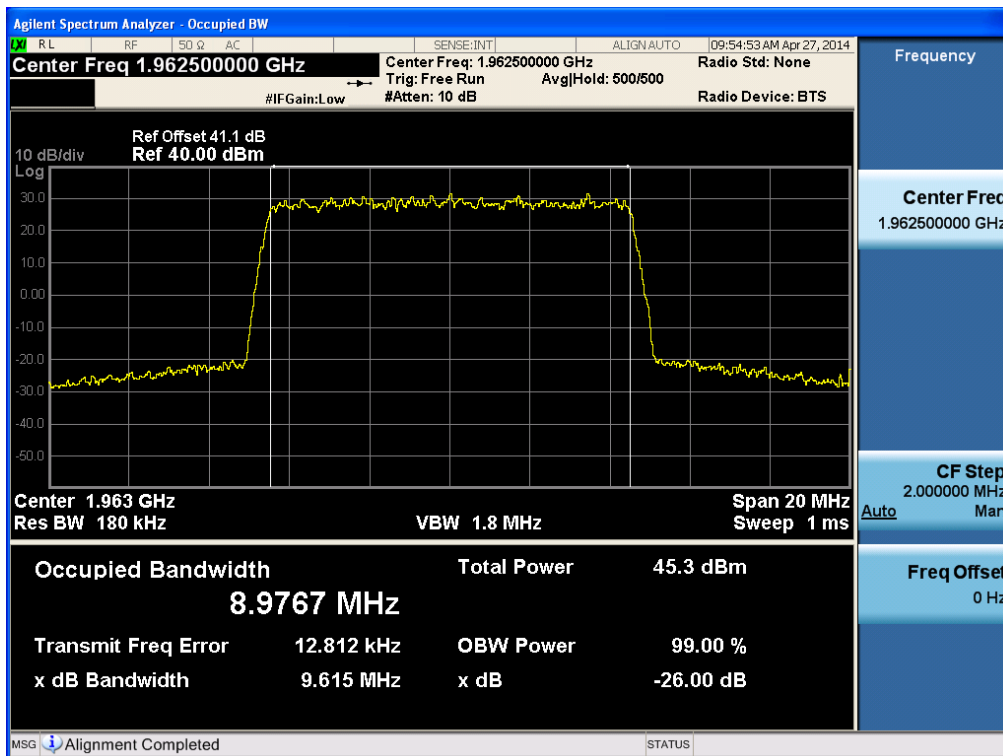


(16QAM High Channel)

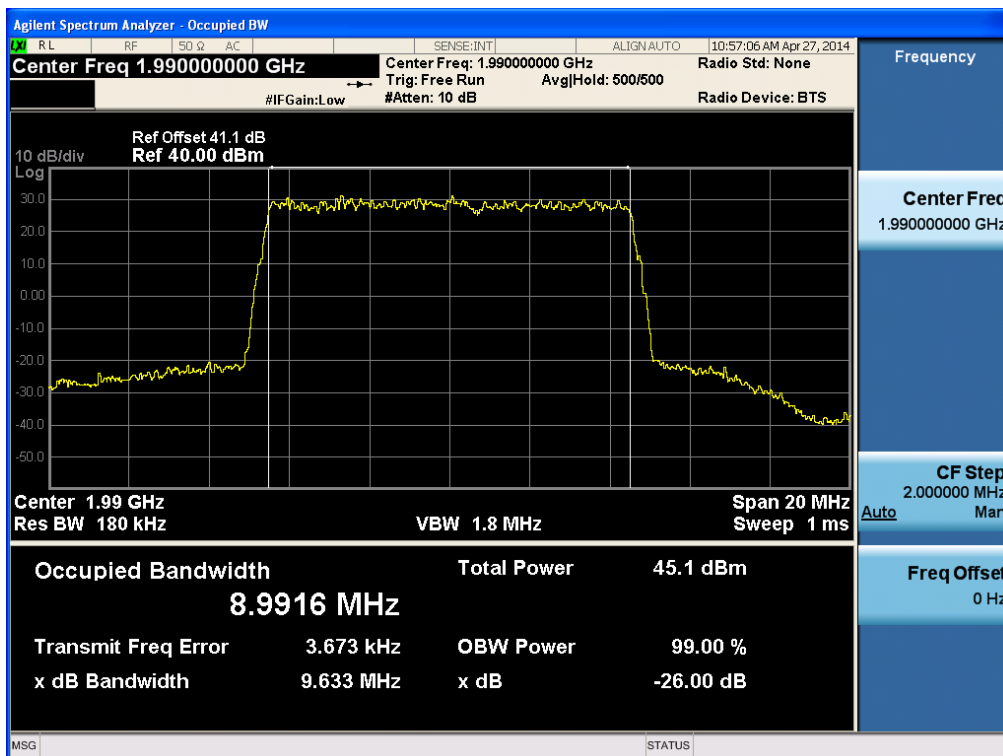


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 54 of 126

(64QAM Low Channel)

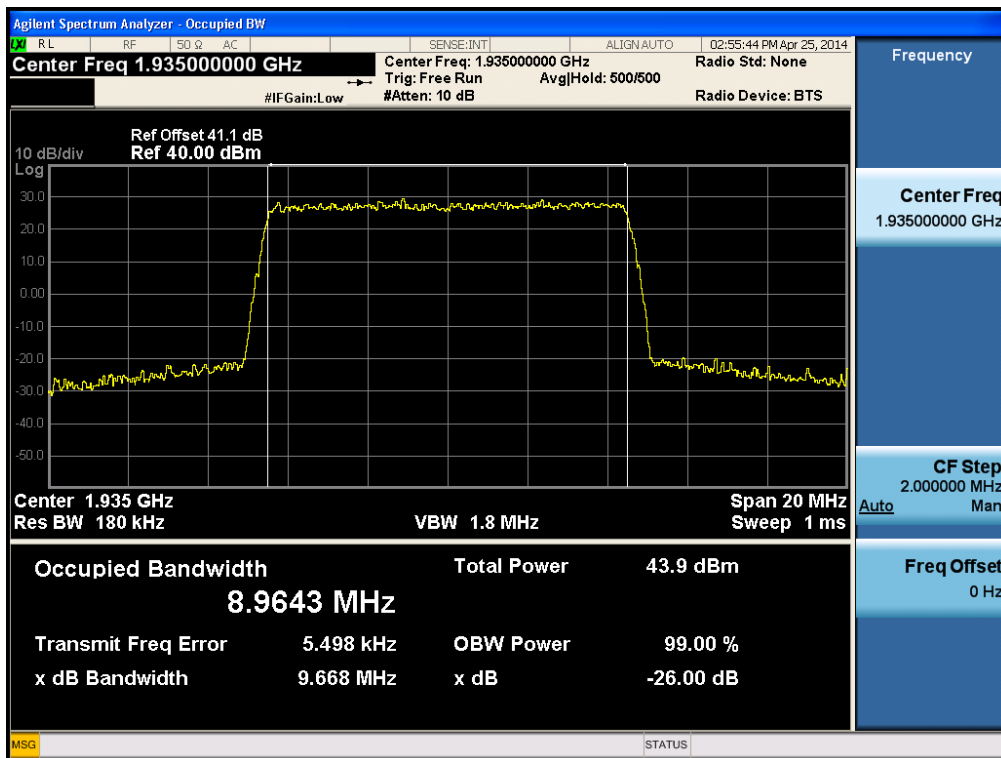


(64QAM Middle Channel)

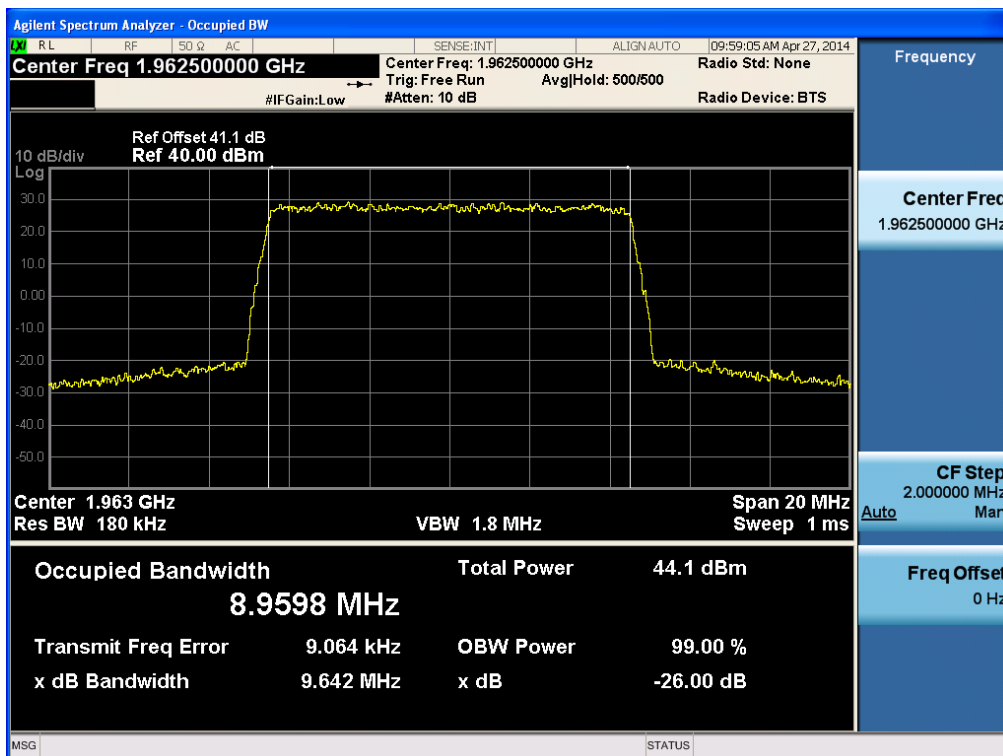

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 55 of 126

(64QAM High Channel)

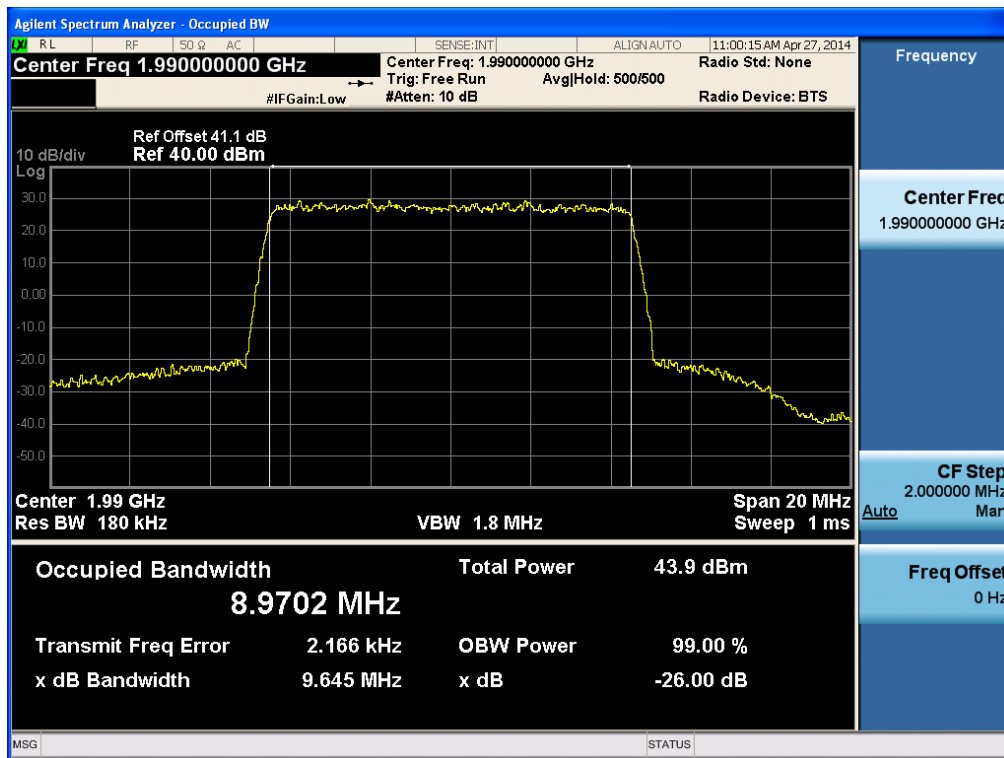

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 56 of 126

7. SPURIOUS EMISSION AT ANTENNA TERMINAL

7.1. Applicable Standard

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1051

According to FCC § 24.238, (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmit power (P) by a factor of at least $43+10 \cdot \log P$ dB.

7.2. Test Equipment List and Details

Manufacturer	Model / Equipment	Serial No.	Calibration Due
Agilent	N9020A /Signal Analyzer	US46220219	04/25/2014
DAE YOUNG ELECTRIC & TECHNOLOGY	DFSS60 / AC Power Source	1003030-1	04/16/2014
HEWLETT PACKARD	8394C / Fixed Attenuator	10342	05/06/2014

7.3. Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1MHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

The conducted emission level is measured at each antenna port and then summed mathmatically to determine the total emission level from the device.


7.4. Test Result

: Pass


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 57 of 126

. Plot Data for LTE 5 MHz : 1 Carrier , Output Port 0
(QPSK Low Channel)

(30 MHz ~ 1 GHz)

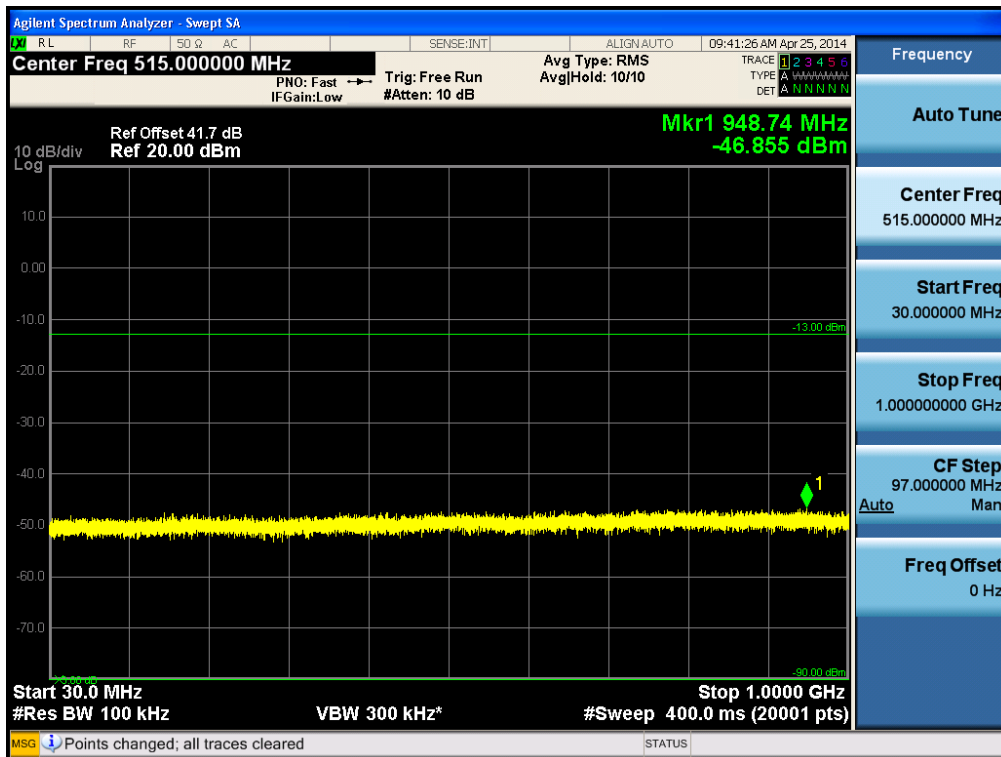


(1 GHz ~ 26.5 GHz)

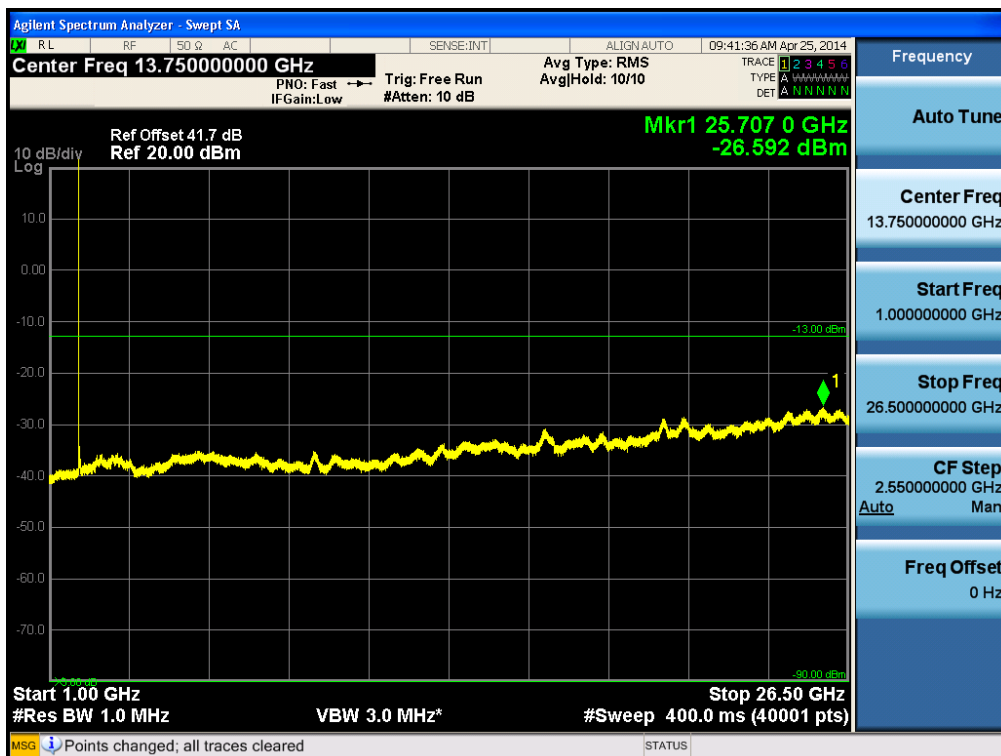

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 58 of 126


(Band Edge)

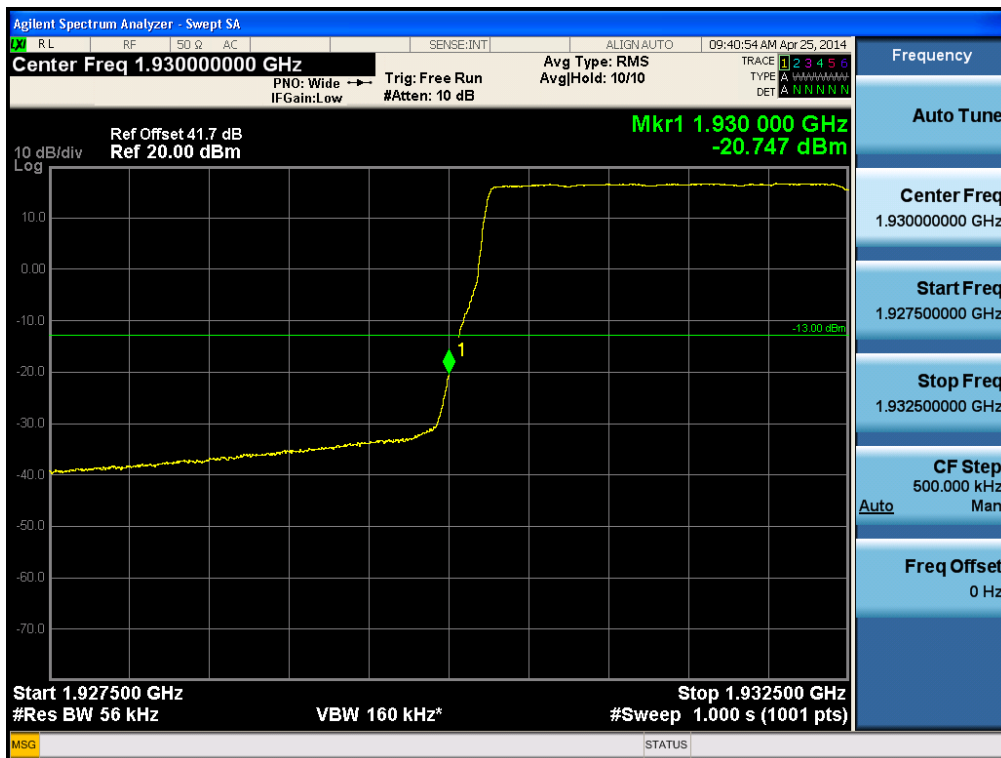


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 59 of 126

(QPSK Middle Channel)

(30 MHz ~ 1 GHz)

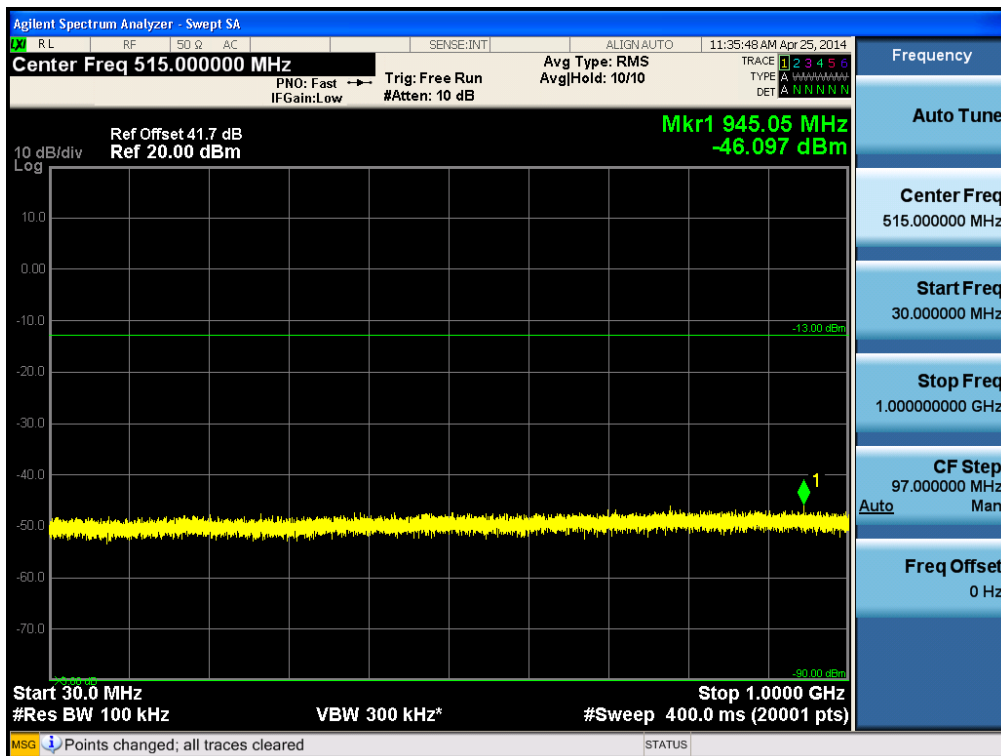


(1 GHz ~ 26.5 GHz)

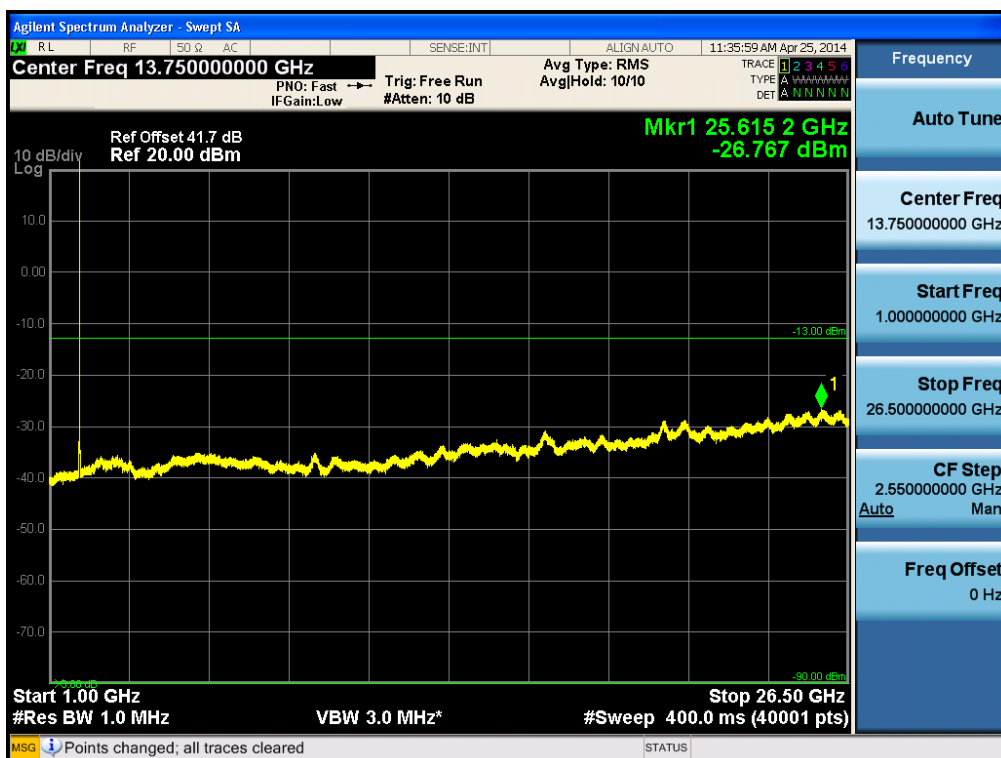


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 60 of 126

(QPSK High Channel)

(30 MHz ~ 1 GHz)

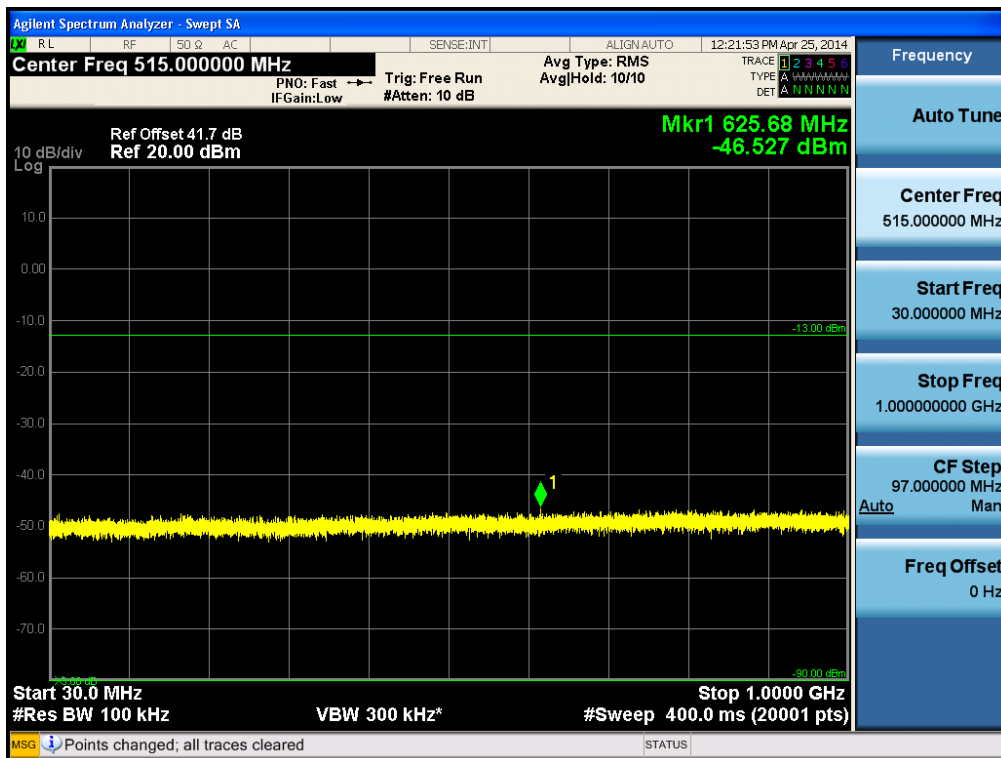


(1 GHz ~ 26.5 GHz)

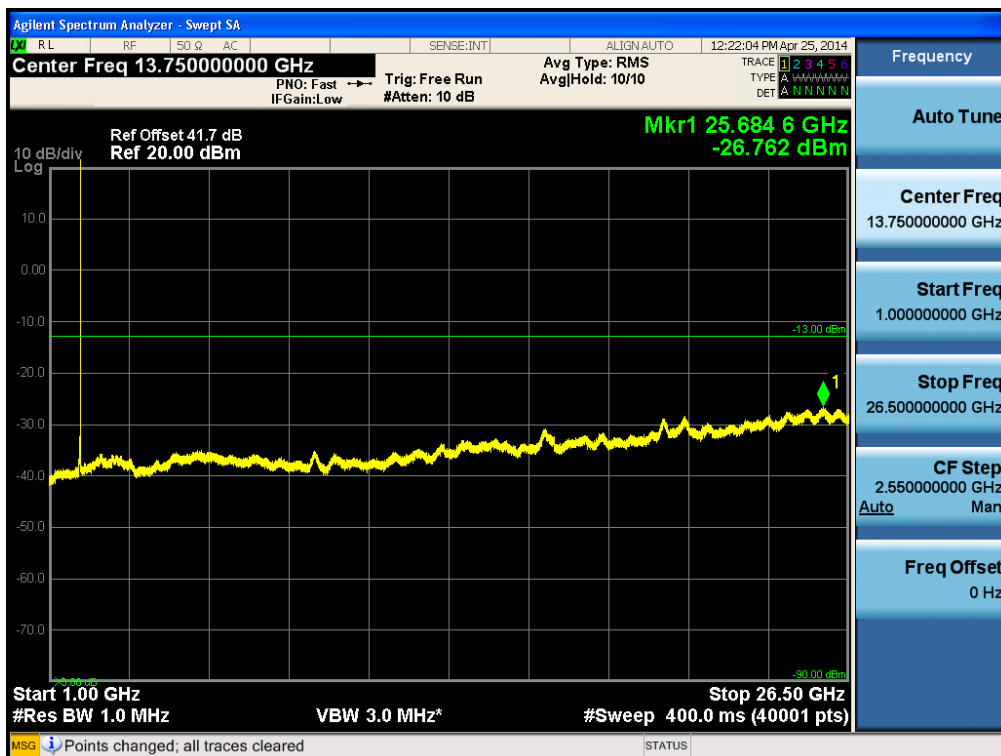

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20, 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 61 of 126


(Band Edge)

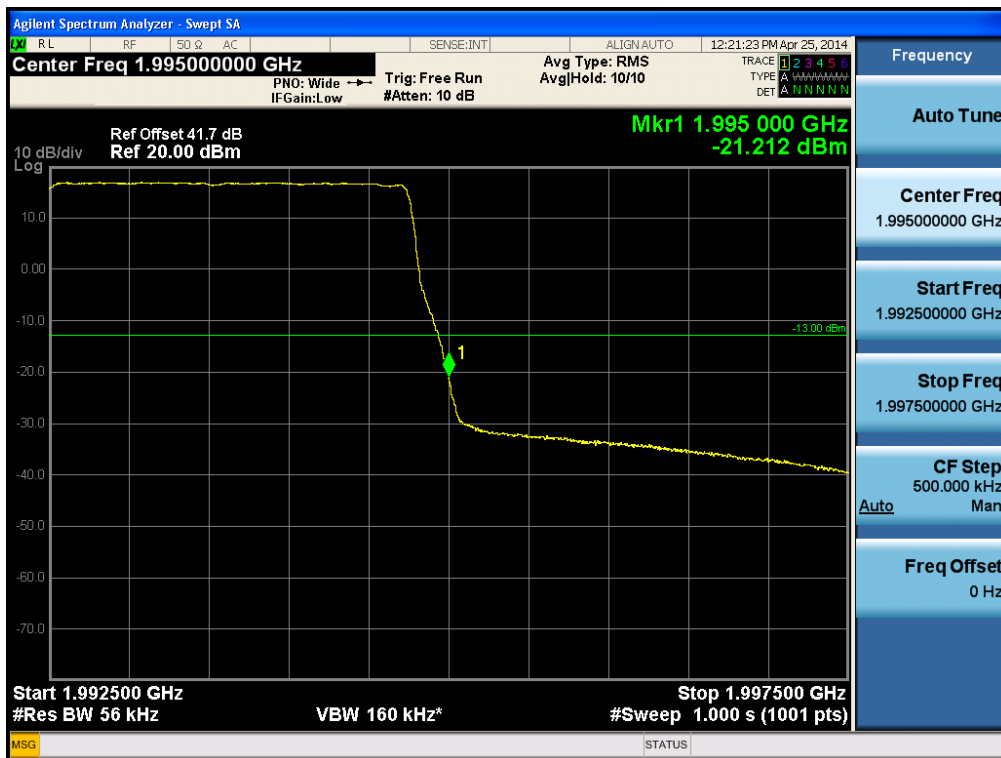


FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 62 of 126

(16QAM Low Channel)

(30 MHz ~ 1 GHz)

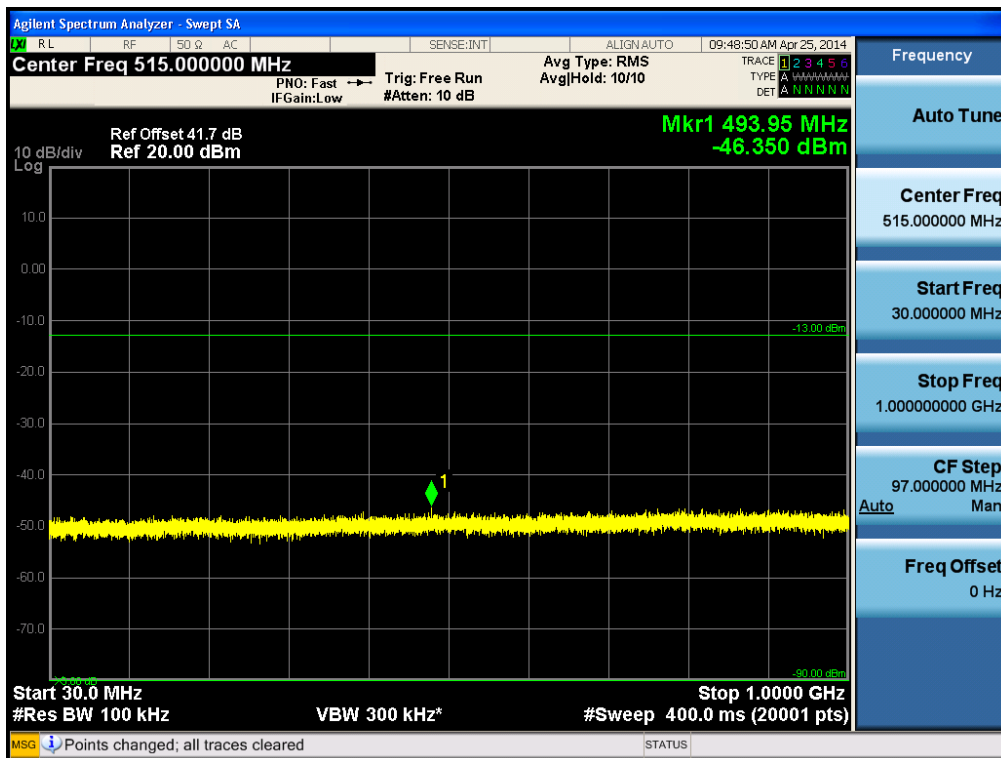

(1 GHz ~ 26.5 GHz)

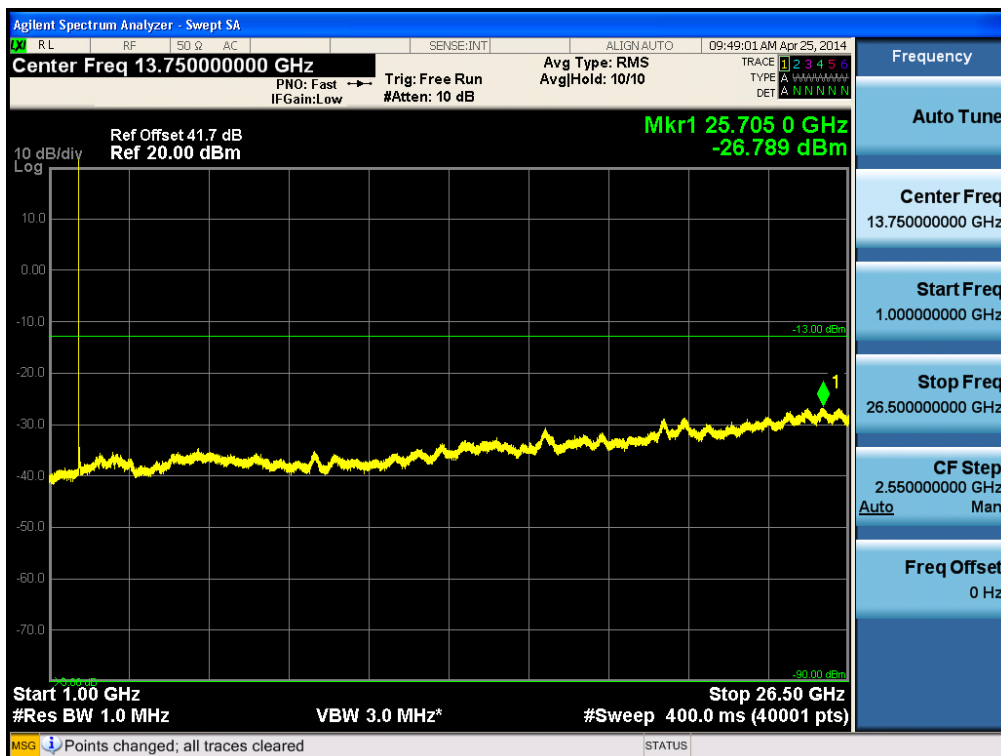

FCC PT.24 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F010	Date of Issue: May 20 , 2014	EUT Type: Outdoor Pico eNB	FCC ID: A3LSLS-BP00AK	Page 63 of 126