



**FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 22 SUBPART H**

CERTIFICATION TEST REPORT

For

GSM/WCDMA/LTE Phone + Bluetooth, WLAN DTS & UNII a/b/g/n, ANT+ & NFC

MODEL NUMBER: SM-A500Y

FCC ID: A3LSMA500Y

REPORT NUMBER: 14U19435-E1

ISSUE DATE: NOVEMBER 21, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 443-742, Korea**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
--	11/21/14	Initial issue	P. Zhang

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER	8
5.3.	MAXIMUM OUTPUT POWER (LTE)	10
5.4.	DESCRIPTION OF AVAILABLE ANTENNAS	11
5.5.	DESCRIPTION OF TEST SETUP	12
6.	TEST AND MEASUREMENT EQUIPMENT	15
7.	Summary Table	16
8.	RF POWER OUTPUT VERIFICATION	17
8.1.	GSM/GPRS/EDGE	17
8.1.1.	GSM OUTPUT POWER RESULT	18
8.2.	UMTS REL 99	19
8.2.1.	UMTS REL 99 OUTPUT POWER RESULT	19
8.3.	UMTS HSDPA	20
8.3.1.	UMTS HSDPA OUTPUT POWER RESULT	21
8.3.2.	UMTS HSUPA	22
8.3.3.	UMTS HSUPA OUTPUT POWER RESULT	23
8.3.4.	DC-HSDPA	24
8.3.1.	UMTS DC-HSDPA OUTPUT POWER RESULT	26
8.4.	LTE OUTPUT VERIFICATION	27
8.4.1.	LTE OUTPUT RESULT	27
9.	PEAK TO AVERAGE RATIO	29
9.1.	CONDUCTED PEAK TO AVERAGE RESULT	29
10.	LIMITS AND CONDUCTED RESULTS	34

10.1.	<i>OCCUPIED BANDWIDTH</i>	34
10.1.1.	OCCUPIED BANDWIDTH RESULTS	35
10.1.2.	OCCUPIED BANDWIDTH PLOTS	39
10.2.	<i>BAND EDGE EMISSIONS</i>	43
10.2.1.	BAND EDGE PLOTS	44
10.3.	<i>OUT OF BAND EMISSIONS</i>	56
10.3.1.	OUT OF BAND EMISSIONS RESULT	57
10.3.2.	OUT OF BAND EMISSIONS PLOTS	60
10.4.	<i>FREQUENCY STABILITY</i>	65
10.4.1.	FREQUENCY STABILITY RESULTS	66
11.	RADIATED TEST RESULTS	68
11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	68
11.1.1.	ERP/EIRP Results	69
11.1.2.	ERP/EIRP DATA	72
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	88
11.2.1.	SPURIOUS RADIATION PLOTS	89
12.	SETUP PHOTOS	105

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, WLAN DTS & UNII a/b/g/n, ANT+ & NFC
MODEL: SM-A500Y
SERIAL NUMBER: 1989213 (CONDUCTED); 1989211 (RADIATED)
DATE TESTED: NOVEMBER 19-21, 2014


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22 and FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☐ Chamber A	☐ Chamber D
☒ Chamber B	☐ Chamber E
☒ Chamber C	☐ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

$$(\text{Path loss} = \text{Signal generator output} - \text{PSA reading with substitution antenna})$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 26000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, WLAN DTS & UNII a/b/g/n, ANT+ & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
GSM850	824~849	GMSK	32.5	1778.3		
	824~849	GPRS	32.5	1778.3	29.91	979.5
	824~849	EGPRS	27.0	501.2	25.73	374.1
GSM1900	1850~1910	GMSK	29.8	955.0		
	1850~1910	GPRS	29.8	955.0	27.72	591.6
	1850~1910	EGPRS	25.5	354.8	24.70	295.1

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
Band 5	824~849	REL99	22.7	186.2	19.81	95.7
	824~849	HSDPA	21.6	144.5	18.55	71.6
	824~849	HSUPA	21.4	138.0		
	824~849	DC-HSDPA	21.6	144.5		
Band 2	1850~1910	REL99	22.9	195.0	20.13	103.0
	1850~1910	HSDPA	22.4	173.8	19.67	92.7
	1850~1910	HSUPA	22.4	173.8		
	1850~1910	DC-HSDPA	22.4	173.8		

5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 27 (10MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	10MHz	QPSK	22.9	195.0	20.27	106.4
	824~849	10MHz	16QAM	21.8	151.3	19.64	92.0

FCC Part 27 (5MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	5MHz	QPSK	22.9	195.0	20.31	107.4
	824~849	5MHz	16QAM	21.8	151.3	19.16	82.4

FCC Part 27 (3MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	3MHz	QPSK	22.9	195.0	20.26	106.2
	824~849	3MHz	16QAM	21.8	151.3	19.11	81.5

FCC Part 27 (1.4MHz Bandwidth)							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				Avg (dBm)	Avg (mW)	Avg (dBm)	Avg (mW)
LTE5	824~849	1.4MHz	QPSK	22.8	190.5	20.66	116.4
	824~849	1.4MHz	16QAM	21.9	154.9	19.85	96.6

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
Band 5, 824~849MHz	-2.21
Band 2, 1850~1910MHz	0.39

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	EP-TA50EWE	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

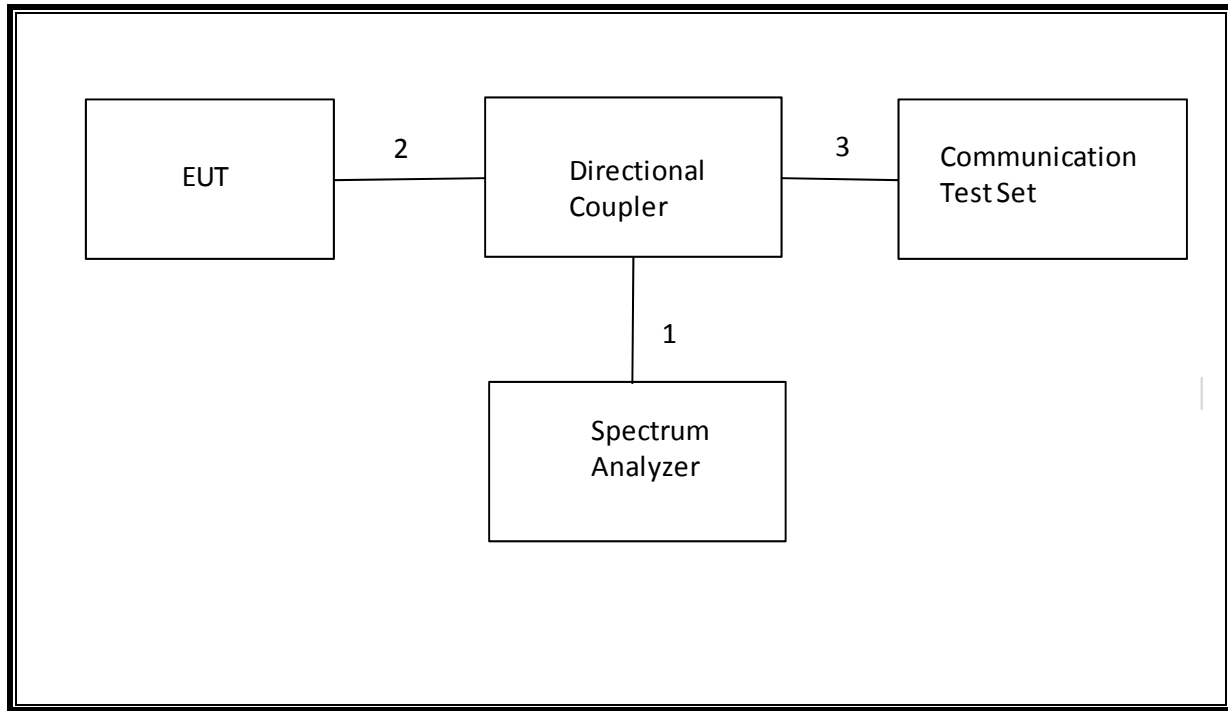
I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

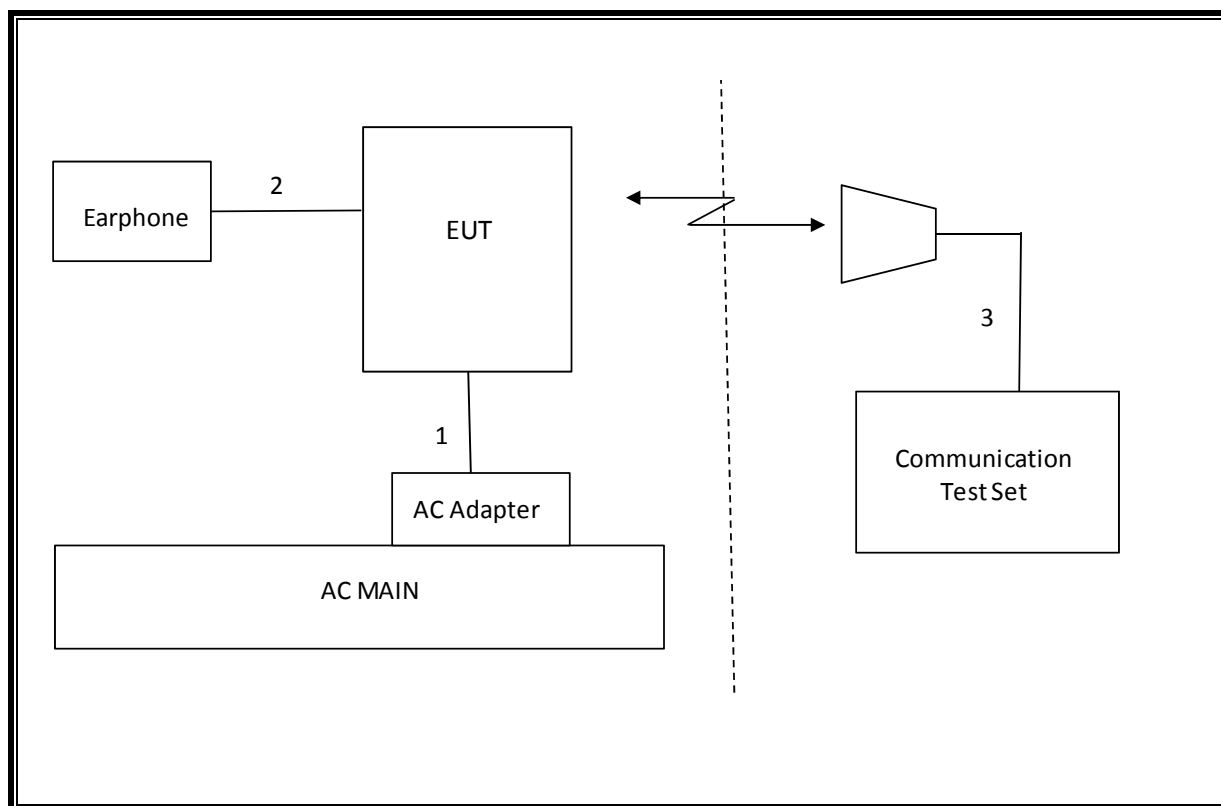
TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)



SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)



6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/15
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/15
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/14

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worse Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	8.991MHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-17.475dBm
2.1046	N/A	Conducted output power	N/A		Pass	32.5dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.004PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	29.91dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	27.72dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-43.5dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot	3 time slot	4 time slot
				Peak (dBm)	Peak (dBm)	Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	32.4			
		190	836.6	32.5			
		251	848.8	32.2			
	GPRS	128	824.2	32.4	29.5	29.4	27.6
		190	836.6	32.5	29.5	29.5	27.7
		251	848.8	32.2	29.5	29.5	27.7
	EGPRS	128	824.2	26.9	26.8	26.9	26.8
		190	836.6	26.9	26.9	27.0	26.9
		251	848.8	27.0	27.0	27.0	26.9
GSM1900	GMSK	512	1850.2	29.7			
		661	1880	29.8			
		810	1909.8	29.7			
	GPRS	512	1850.2	29.7	27.0	26.4	24.1
		661	1880	29.8	27.0	26.4	24.1
		810	1909.8	29.7	27.0	26.4	24.0
	EGPRS	512	1850.2	25.5	25.5	25.5	23.5
		661	1880	25.5	25.5	25.5	23.4
		810	1909.8	25.5	25.5	25.5	23.5

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

WCDMA General Settings	Mode	Rel99
	Subtest	-
	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm)
				Avg (dBm)
Band 5	REL99	4132	826.4	22.7
		4183	836.6	22.6
		4233	846.6	22.6
Band 2	REL99	9262	1852.4	22.9
		9400	1880	22.9
		9538	1907.6	22.9

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSDPA	1	4132	826.4	21.6
			4183	836.6	21.5
			4233	846.6	21.5
		2	4132	826.4	21.6
			4183	836.6	21.6
			4233	846.6	21.6
		3	4132	826.4	21.2
			4183	836.6	21.1
			4233	846.6	21.1
		4	4132	826.4	21.2
			4183	836.6	21.2
			4233	846.6	21.1
Band 2	HSDPA	1	9262	1852.4	22.3
			9400	1880	22.4
			9538	1907.6	22.3
		2	9262	1852.4	22.3
			9400	1880	22.4
			9538	1907.6	22.3
		3	9262	1852.4	21.8
			9400	1880	21.8
			9538	1907.6	21.8
		4	9262	1852.4	21.8
			9400	1880	21.8
			9538	1907.6	21.8

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
HSDPA Specific Settings	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
	β_{ed} (note1)	1309/225	94/75	47/15 47/15	56/75	134/15
	MPR	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
HSUPA Specific Settings	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSUPA	1	4132	826.4	21.4
			4183	836.6	21.1
			4233	846.6	21.3
		2	4132	826.4	20.2
			4183	836.6	20.4
			4233	846.6	20.5
		3	4132	826.4	20.7
			4183	836.6	20.5
			4233	846.6	20.5
		4	4132	826.4	20.5
			4183	836.6	20.5
			4233	846.6	20.3
		5	4132	826.4	21.6
			4183	836.6	21.7
			4233	846.6	21.7
Band 2	HSUPA	1	9262	1852.4	22.3
			9400	1880	22.4
			9538	1907.6	22.3
		2	9262	1852.4	20.3
			9400	1880	20.3
			9538	1907.6	20.4
		3	9262	1852.4	21.1
			9400	1880	21.3
			9538	1907.6	21.0
		4	9262	1852.4	20.3
			9400	1880	20.3
			9538	1907.6	20.4
		5	9262	1852.4	22.3
			9400	1880	22.4
			9538	1907.6	22.3

8.3.4. DC-HSDPA

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

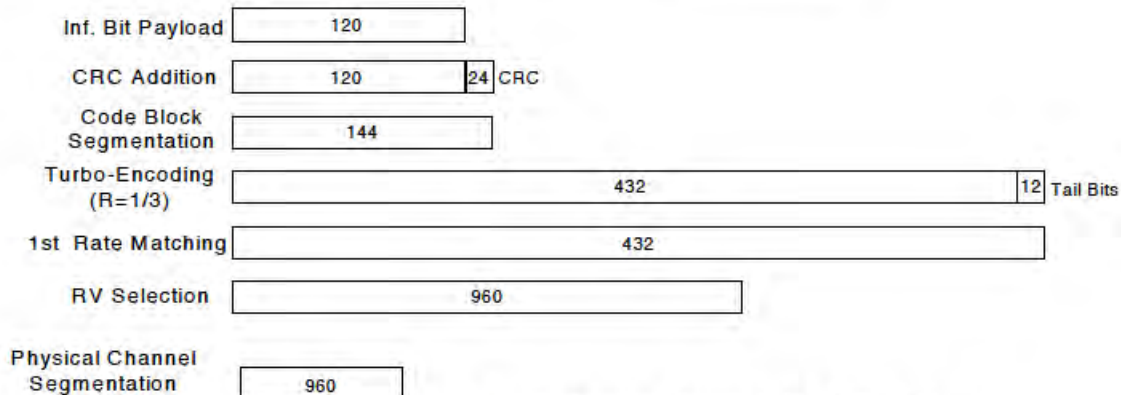


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA	Rel6 HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4

	β_{hs}	4/15	24/15	30/15	30/15
	MPR	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

Up commands are set continuously to set the UE to Max power.

8.3.1. UMTS DC-HSDPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
WCDMA Band V	Subtest 1	4132	826.4	0	21.6
		4183	836.6	0	21.5
		4233	846.6	0	21.5
	Subtest 2	4132	826.4	0	21.6
		4183	836.6	0	21.6
		4233	846.6	0	21.6
	Subtest 3	4132	826.4	0.5	21.2
		4183	836.6	0.5	21.1
		4233	846.6	0.5	21.1
	Subtest 4	4132	826.4	0.5	21.2
		4183	836.6	0.5	21.2
		4233	846.6	0.5	21.1
WCDMA Band II	Subtest 1	9262	1852.4	0	22.3
		9400	1880.0	0	22.4
		9538	1907.6	0	22.3
	Subtest 2	9262	1852.4	0	22.3
		9400	1880.0	0	22.4
		9538	1907.6	0	22.3
	Subtest 3	9262	1852.4	0.5	21.8
		9400	1880.0	0.5	21.8
		9538	1907.6	0.5	21.8
	Subtest 4	9262	1852.4	0.5	21.8
		9400	1880.0	0.5	21.8
		9538	1907.6	0.5	21.8

8.4. LTE OUTPUT VERIFICATION

8.4.1. LTE OUTPUT RESULT

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20450	20525	20600
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	22.9	22.9	22.8
			1	25	0	22.9	22.7	22.7
			1	49	0	22.6	22.8	22.6
			25	0	1	21.9	21.9	21.9
			25	12	1	21.8	21.8	21.7
			25	25	1	21.9	21.7	21.8
			50	0	1	21.8	21.8	21.7
		16QAM	1	0	1	21.8	21.8	21.7
			1	25	1	21.9	21.7	21.8
			1	49	1	21.8	21.8	21.7
			25	0	2	20.9	21.0	20.9
			25	12	2	20.9	20.9	20.8
			25	25	2	20.9	20.8	20.9
			50	0	2	20.9	20.9	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	22.6	22.9	22.8
			1	12	0	22.8	23.0	22.9
			1	24	0	22.7	22.8	22.7
			12	0	1	21.9	21.8	21.9
			12	7	1	21.8	21.8	21.8
			12	13	1	21.9	21.7	21.7
			25	0	1	21.8	21.7	21.8
		16QAM	1	0	1	21.8	21.8	21.8
			1	12	1	21.9	21.7	21.7
			1	24	1	21.8	21.7	21.8
			12	0	2	20.8	20.9	20.9
			12	7	2	20.9	20.9	20.8
			12	13	2	20.8	20.9	20.8
			25	0	2	21.0	20.8	20.7

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	22.8	22.9	22.7
			1	8	0	22.7	23.0	23.0
			1	14	0	22.7	22.6	22.5
			8	0	1	21.8	21.8	21.8
			8	4	1	21.8	21.8	21.7
			8	7	1	21.8	21.8	21.7
			15	0	1	21.8	21.8	21.7
		16QAM	1	0	1	21.8	21.8	21.5
			1	8	1	21.8	21.8	22.0
			1	14	1	21.8	21.8	21.7
			8	0	2	20.9	20.5	20.9
			8	4	2	20.9	20.7	20.9
			8	7	2	20.8	20.7	20.8
			15	0	2	20.9	20.9	20.7
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	22.8	22.7	22.7
			1	3	0	22.9	22.8	22.7
			1	5	0	22.9	22.7	22.5
			3	0	0	22.8	22.7	22.7
			3	1	0	22.9	22.7	22.7
			3	3	0	22.8	22.8	22.7
			6	0	1	21.8	21.7	21.8
		16QAM	1	0	1	21.8	21.9	21.7
			1	3	1	21.8	21.9	21.8
			1	5	1	21.8	21.9	21.9
			3	0	1	21.8	21.8	21.6
			3	1	1	21.8	21.8	22.0
			3	3	1	22.0	21.8	21.9
			6	0	2	21.0	20.7	20.8

9. PEAK TO AVERAGE RATIO

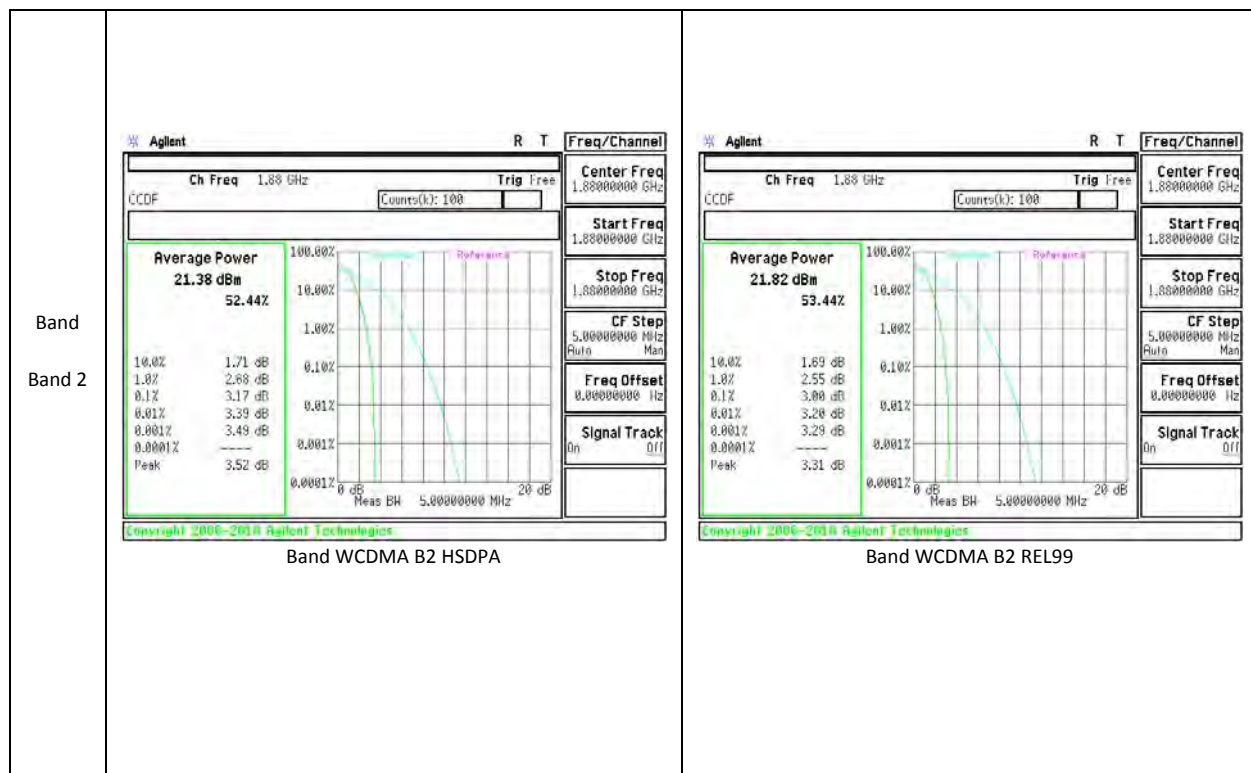
Test Procedure

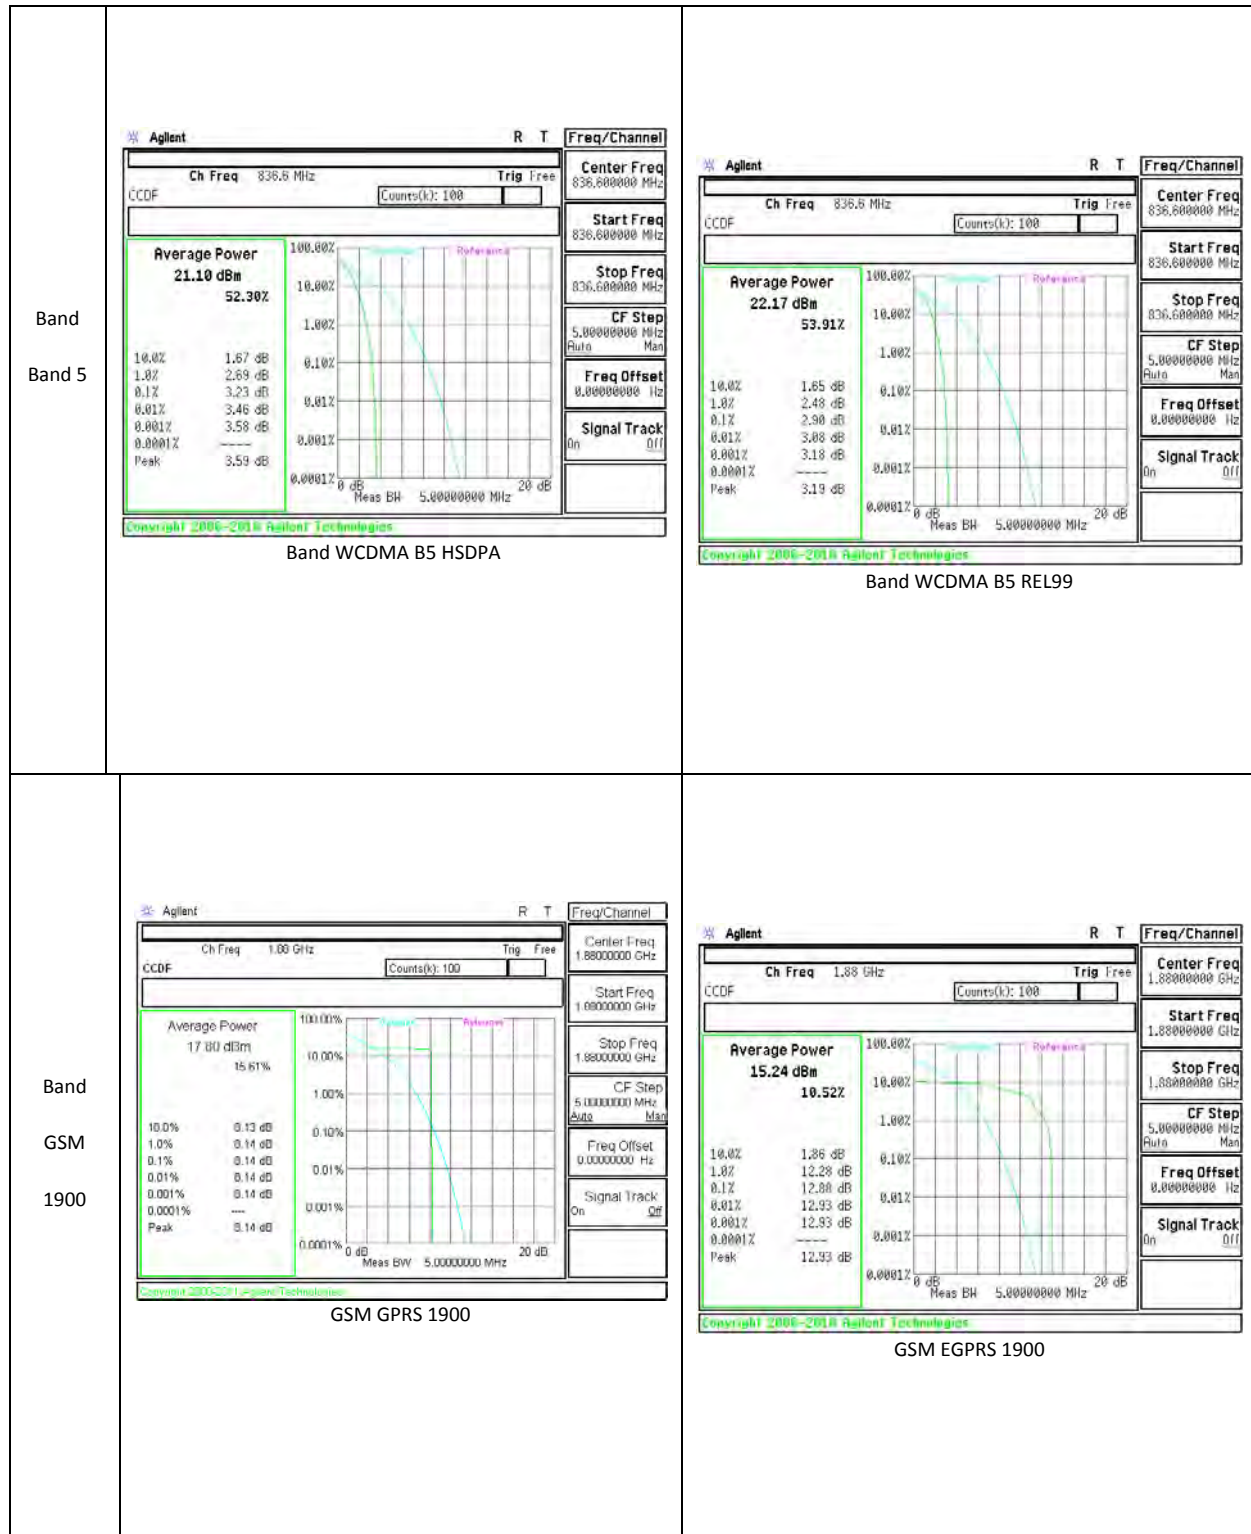
Per KDB 971168 D01 Power Meas License Digital Systems v02r01

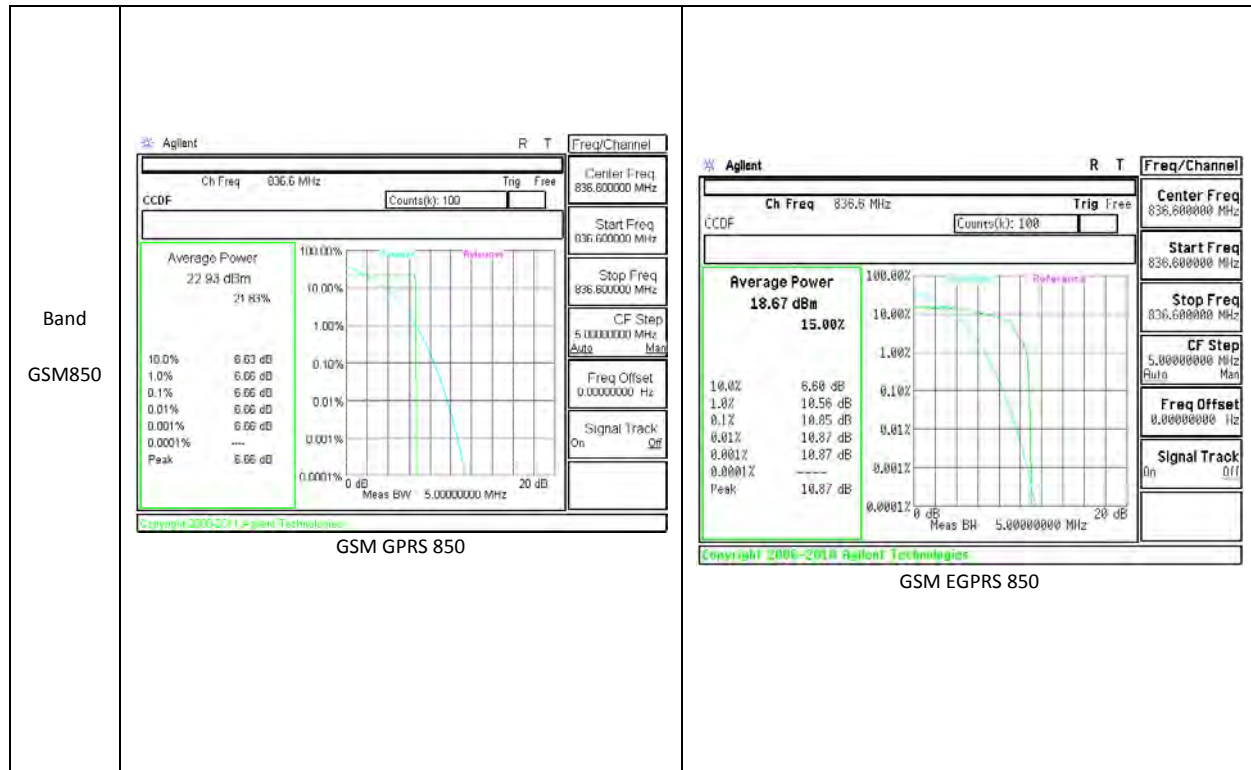
Test Spec

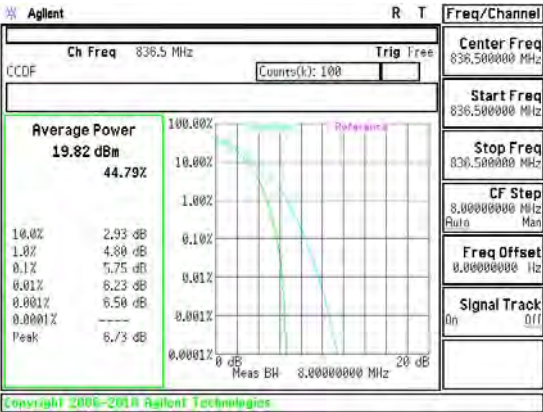
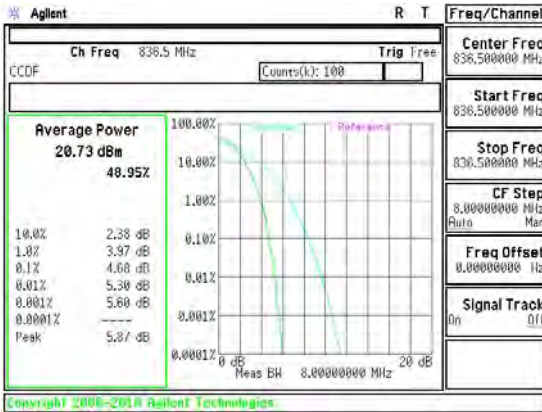
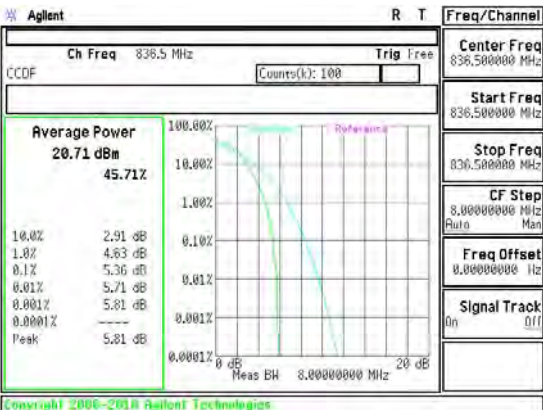
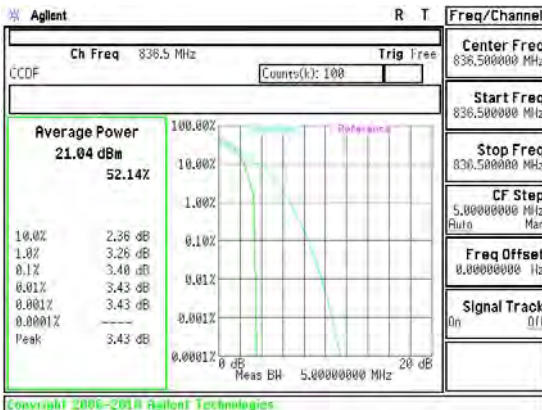
In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

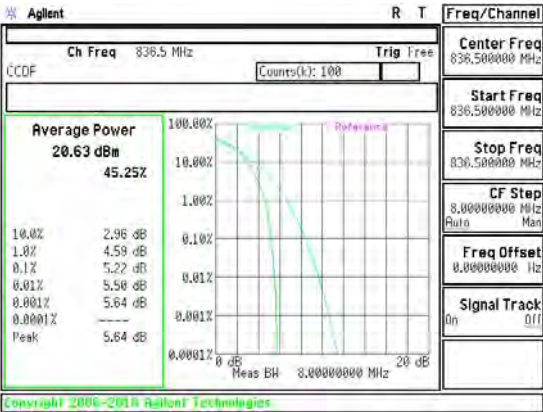
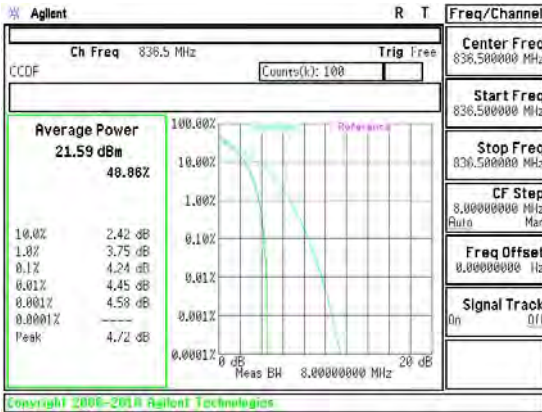
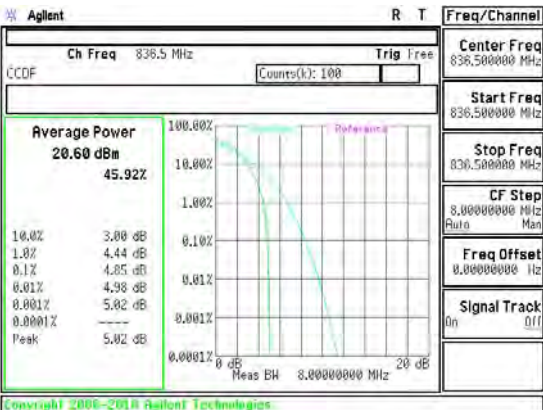
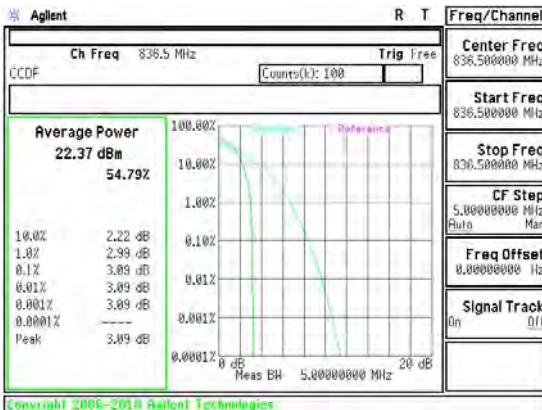
9.1. CONDUCTED PEAK TO AVERAGE RESULT







Band LTE5 10MHz	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Pres Center Freq 836.500000 MHz Start Freq 836.500000 MHz Stop Freq 836.500000 MHz CF Step 8.00000000 MHz Man Freq Offset 0.00000000 Hz Signal Track On Off Average Power 19.82 dBm 44.79% 10.0% 2.93 dB 1.0% 4.80 dB 0.1% 5.75 dB 0.01% 6.23 dB 0.001% 6.50 dB Peak 6.73 dB Copyright 2006-2014 Agilent Technologies Band LTE5 10MHz 16QAM Mid channel	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Pres Center Freq 836.500000 MHz Start Freq 836.500000 MHz Stop Freq 836.500000 MHz CF Step 8.00000000 MHz Man Freq Offset 0.00000000 Hz Signal Track On Off Average Power 20.73 dBm 48.95% 10.0% 2.38 dB 1.0% 3.97 dB 0.1% 4.68 dB 0.01% 5.30 dB 0.001% 5.60 dB Peak 5.87 dB Copyright 2006-2014 Agilent Technologies Band LTE5 10MHz QPSK Mid channel
Band LTE5 5MHz	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Pres Center Freq 836.500000 MHz Start Freq 836.500000 MHz Stop Freq 836.500000 MHz CF Step 8.00000000 MHz Man Freq Offset 0.00000000 Hz Signal Track On Off Average Power 20.71 dBm 45.71% 10.0% 2.91 dB 1.0% 4.63 dB 0.1% 5.36 dB 0.01% 5.71 dB 0.001% 5.81 dB Peak 5.81 dB Copyright 2006-2014 Agilent Technologies Band LTE5 5MHz 16QAM Mid channel	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Pres Center Freq 836.500000 MHz Start Freq 836.500000 MHz Stop Freq 836.500000 MHz CF Step 5.00000000 MHz Man Freq Offset 0.00000000 Hz Signal Track On Off Average Power 21.04 dBm 52.14% 10.0% 2.36 dB 1.0% 3.26 dB 0.1% 3.48 dB 0.01% 3.43 dB 0.001% 3.43 dB Peak 3.43 dB Copyright 2006-2014 Agilent Technologies Band LTE5 5MHz QPSK Mid channel

Band LTE5 3MHz	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Pres Center Freq 836.500000 MHz Start Freq 836.500000 MHz Stop Freq 836.500000 MHz CF Step 8.00000000 MHz Freq Offset 0.00000000 Hz Signal Track On Off Average Power 20.63 dBm 45.25% 10.0% 2.96 dB 1.0% 4.59 dB 0.1% 5.22 dB 0.01% 5.58 dB 0.001% 5.64 dB Peak 5.64 dB Copyright 2006-2014 Agilent Technologies Band LTE5 3MHz 16QAM Mid channel	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Pres Center Freq 836.500000 MHz Start Freq 836.500000 MHz Stop Freq 836.500000 MHz CF Step 8.00000000 MHz Freq Offset 0.00000000 Hz Signal Track On Off Average Power 21.59 dBm 48.86% 10.0% 2.42 dB 1.0% 3.75 dB 0.1% 4.24 dB 0.01% 4.45 dB 0.001% 4.58 dB Peak 4.72 dB Copyright 2006-2014 Agilent Technologies Band LTE5 3MHz QPSK Mid channel
Band LTE5 1.4MHz	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Pres Center Freq 836.500000 MHz Start Freq 836.500000 MHz Stop Freq 836.500000 MHz CF Step 8.00000000 MHz Freq Offset 0.00000000 Hz Signal Track On Off Average Power 20.60 dBm 45.92% 10.0% 3.08 dB 1.0% 4.44 dB 0.1% 4.85 dB 0.01% 4.98 dB 0.001% 5.02 dB Peak 5.02 dB Copyright 2006-2014 Agilent Technologies Band LTE5 1.4MHz 16QAM Mid channel	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Pres Center Freq 836.500000 MHz Start Freq 836.500000 MHz Stop Freq 836.500000 MHz CF Step 5.00000000 MHz Freq Offset 0.00000000 Hz Signal Track On Off Average Power 22.37 dBm 54.79% 10.0% 2.22 dB 1.0% 2.99 dB 0.1% 3.09 dB 0.01% 3.09 dB 0.001% 3.09 dB Peak 3.09 dB Copyright 2006-2014 Agilent Technologies Band LTE5 1.4MHz QPSK Mid channel

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

MODES TESTED

10.1.1. OCCUPIED BANDWIDTH RESULTS

GSM OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	240.5	314.7
		190	836.6	244.4	309.0
		251	848.8	246.8	319.4
	EGPRS	128	824.2	254.1	311.2
		190	836.6	248.6	316.3
		251	848.8	249.7	305.5
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	248.7	319.1
		661	1880	245.0	316.2
		810	1909.8	246.3	319.4
	EGPRS	512	1850.2	248.9	312.9
		661	1880	244.7	299.2
		810	1909.8	246.2	307.0

WCDMA OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
Band 5	REL99	4132	826.4	4.158	4.629
		4183	836.6	4.168	4.639
		4233	846.6	4.148	4.647
	HSDPA	4132	826.4	4.152	4.640
		4183	836.6	4.156	4.633
		4233	846.6	4.137	4.636
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		
Band 2	REL99	9262	1852.4	4.157	4.639
		9400	1880	4.174	4.631
		9538	1907.6	4.172	4.686
	HSDPA	9262	1852.4	4.157	4.633
		9400	1880	4.175	4.653
		9538	1907.6	4.177	4.660
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

LTE OCCUPIED BANDWIDTH RESULTS

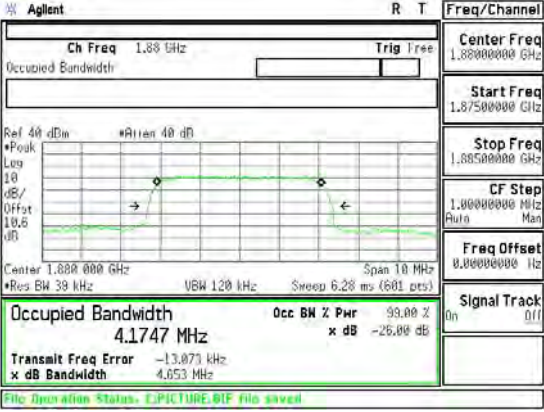
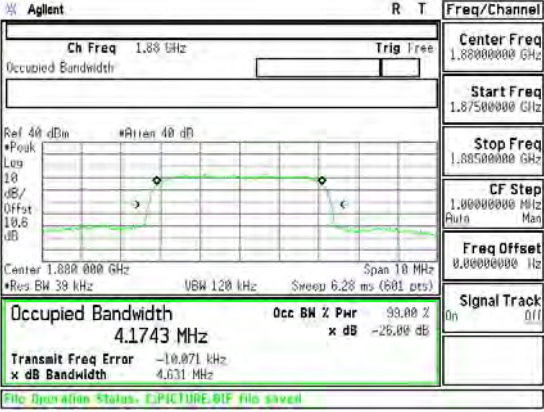
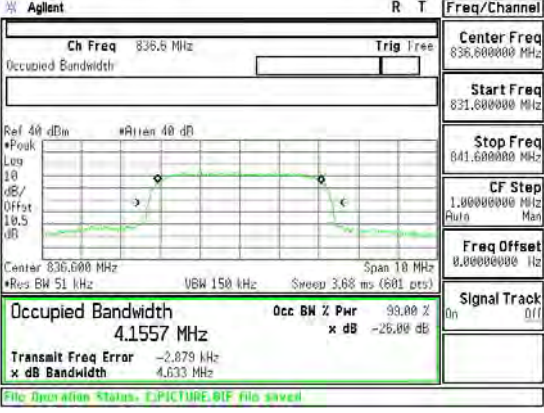
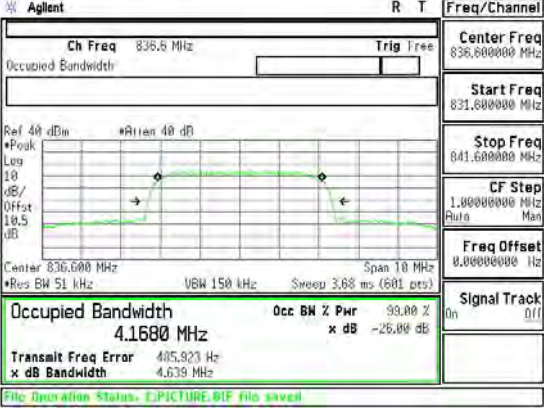
Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	10	QPSK	50/0	829	8.967	9.818
			50/0	836.5	8.965	9.844
			50/0	844	8.969	9.700
		16QAM	50/0	829	8.977	9.817
			50/0	836.5	8.971	9.849
			50/0	844	8.991	9.645

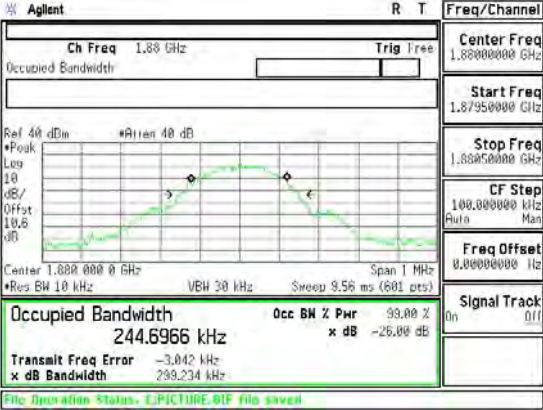
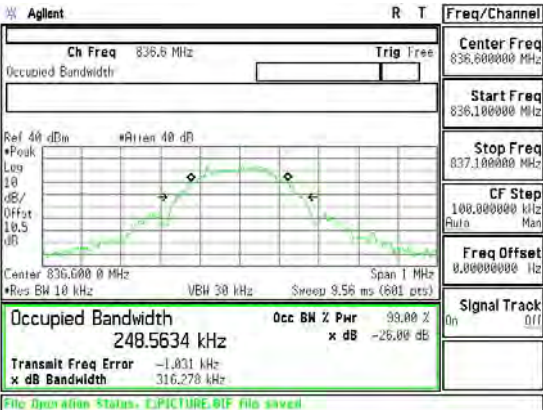
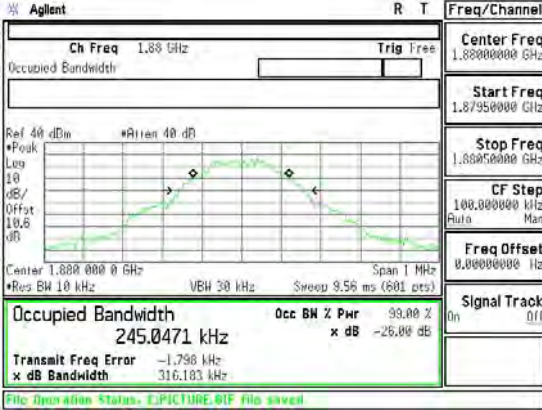
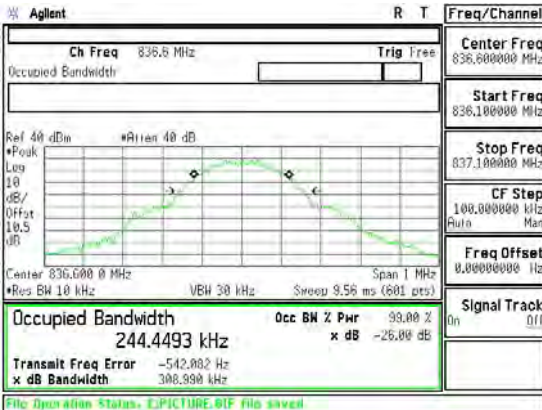
Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	5	QPSK	25/0	826.5	4.499	4.983
			25/0	836.5	4.506	4.978
			25/0	846.5	4.503	4.966
		16QAM	25/0	826.5	4.507	4.948
			25/0	836.5	4.514	4.944
			25/0	846.5	4.498	4.942

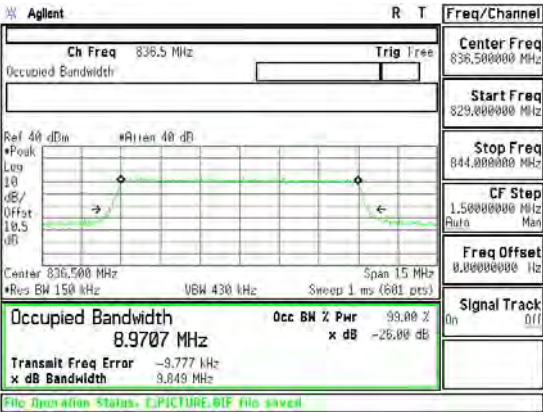
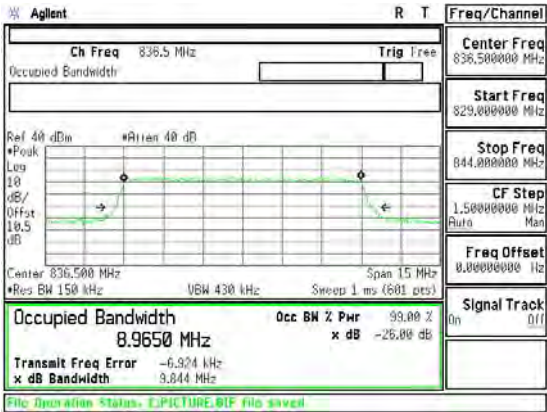
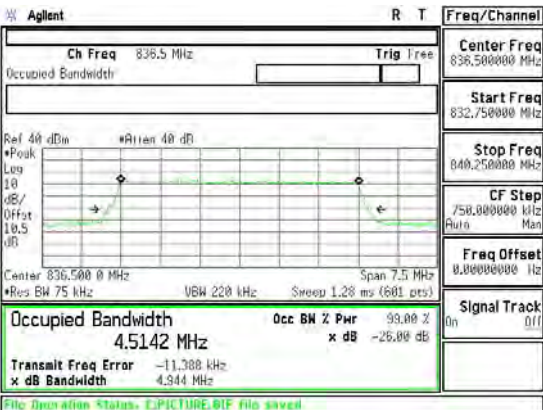
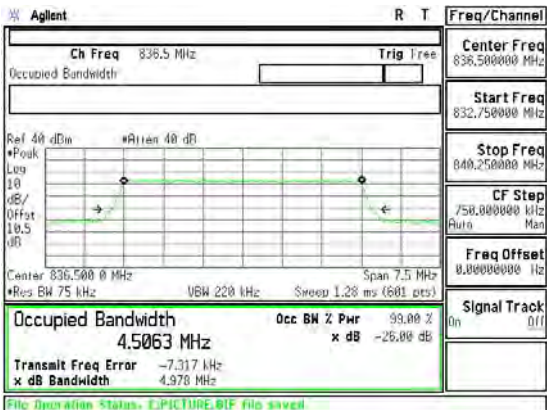
Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	3	QPSK	15/0	825.5	2.691	2.940
			15/0	836.5	2.672	2.970
			15/0	847.5	2.284	2.966
		16QAM	15/0	825.5	2.683	2.939
			15/0	836.5	2.682	2.952
			15/0	847.5	2.690	2.977

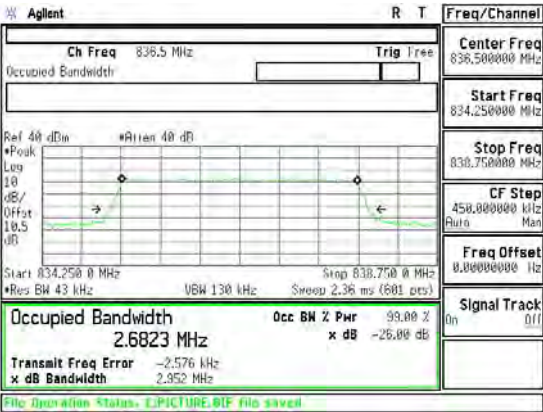
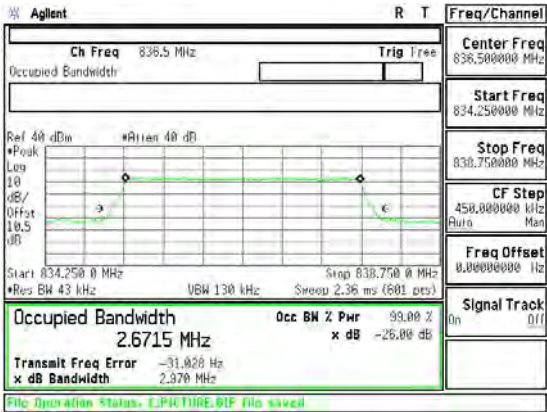
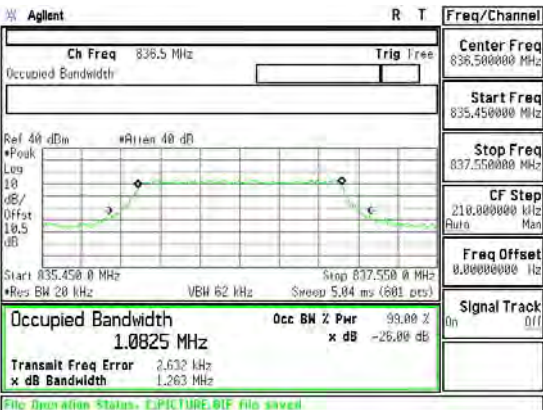
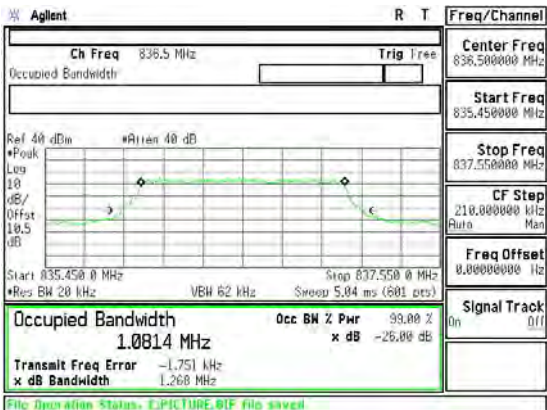
Band	BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE5	1.4	QPSK	6/0	824.7	1.085	1.284
			6/0	836.5	1.081	1.268
			6/0	848.3	1.087	1.279
		16QAM	6/0	824.7	1.081	1.285
			6/0	836.5	1.083	1.263
			6/0	848.3	1.089	1.287

10.1.2. OCCUPIED BANDWIDTH PLOTS

Band Band 2	 Band WCDMA B2 HSDPA OBW	 Band WCDMA B2 REL99 OBW
Band Band 5	 Band WCDMA B5 HSDPA OBW	 Band WCDMA B5 REL99 OBW

Band GSM1900	 Agilent R T Freq/Channel Ch Freq 1.88 GHz Trig Free Center Freq 1.88000000 GHz Start Freq 1.87950000 GHz Stop Freq 1.88050000 GHz CF Step 100.000000 kHz Freq Offset 0.00000000 Hz Signal Track Off Occupied Bandwidth 244.6966 kHz Transmit Freq Error -3.042 kHz x dB Bandwidth 299.234 kHz File Operation Status: C:\PICTURE\BIF file saved Band GSM1900 EGPRS OBW Mid channel
Band GSM850	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 836.100000 MHz Stop Freq 837.100000 MHz CF Step 100.000000 kHz Freq Offset 0.00000000 Hz Signal Track Off Occupied Bandwidth 248.5634 kHz Transmit Freq Error -1.031 kHz x dB Bandwidth 316.278 kHz File Operation Status: C:\PICTURE\BIF file saved Band GSM850 EGPRS OBW Mid channel
	 Agilent R T Freq/Channel Ch Freq 1.88 GHz Trig Free Center Freq 1.88000000 GHz Start Freq 1.87950000 GHz Stop Freq 1.88050000 GHz CF Step 100.000000 kHz Freq Offset 0.00000000 Hz Signal Track Off Occupied Bandwidth 245.0471 kHz Transmit Freq Error -1.798 kHz x dB Bandwidth 316.183 kHz File Operation Status: C:\PICTURE\BIF file saved Band GSM1900 GPRS OBW Mid channel
	 Agilent R T Freq/Channel Ch Freq 836.5 MHz Trig Free Center Freq 836.500000 MHz Start Freq 836.100000 MHz Stop Freq 837.100000 MHz CF Step 100.000000 kHz Freq Offset 0.00000000 Hz Signal Track Off Occupied Bandwidth 244.4493 kHz Transmit Freq Error -542.002 Hz x dB Bandwidth 308.998 kHz File Operation Status: C:\PICTURE\BIF file saved Band GSM850 GPRS OBW Mid channel

Band LTE5 10MHz	 Band LTE5 10MHz OBW 16QAM Mid Channel FRB.gif	 Band LTE5 10MHz OBW QPSK Mid Channel FRB.gif
Band LTE5 5MHz	 Band LTE5 5MHz OBW 16QAM Mid Channel FRB.gif	 Band LTE5 5MHz OBW QPSK Mid Channel FRB.gif

Band LTE5 3MHz	 Band LTE5 3MHz OBW 16QAM Mid Channel FRB.gif	 Band LTE5 3MHz OBW QPSK Mid Channel FRB.gif
Band LTE5 1.4MHz	 Band LTE5 1.4MHz OBW 16QAM Mid Channel FRB.gif	 Band LTE5 1.4MHz OBW QPSK Mid Channel FRB.gif

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

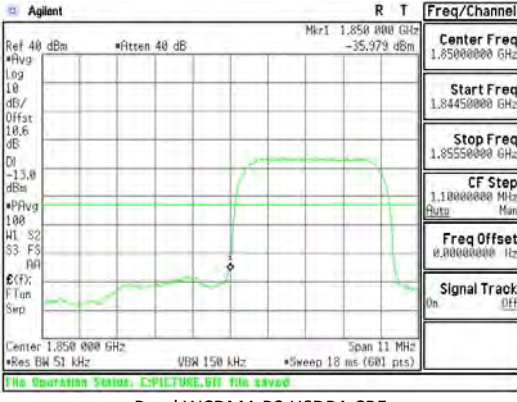
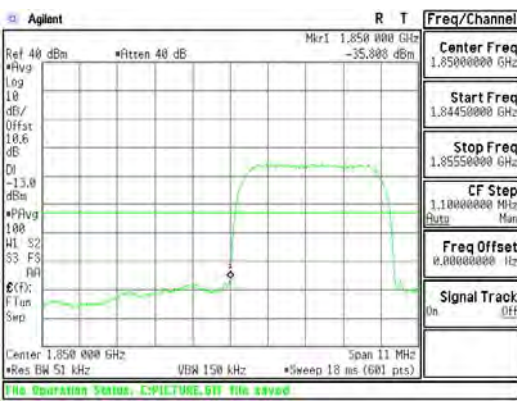
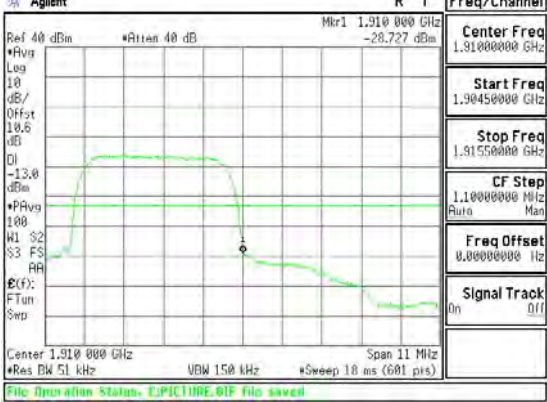
Per KDB 971168 D01 Power Meas License Digital Systems v02r01

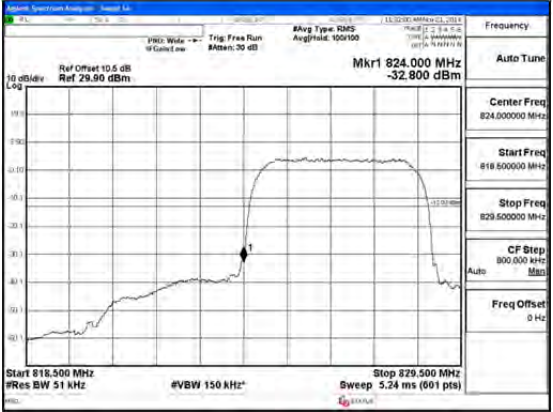
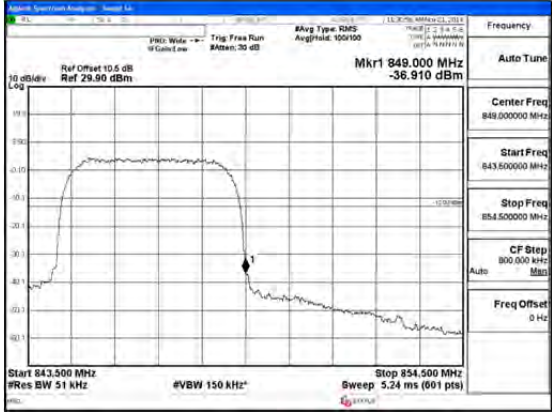
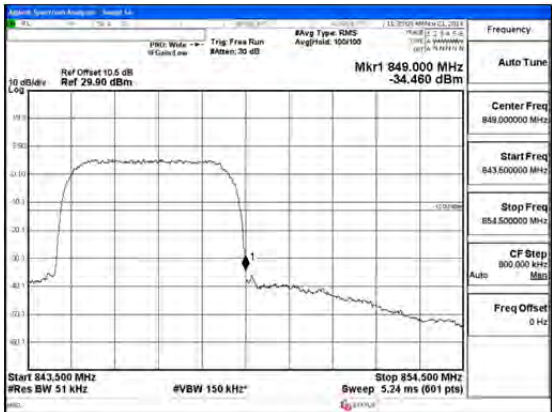
The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

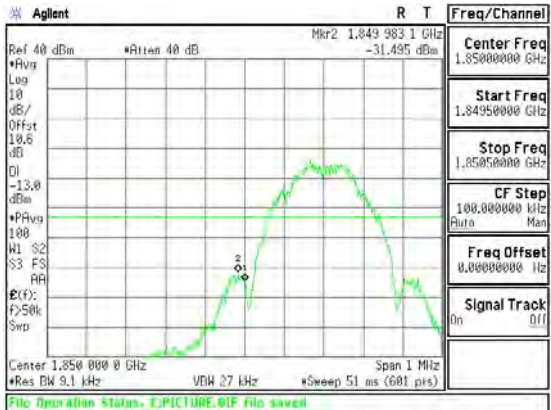
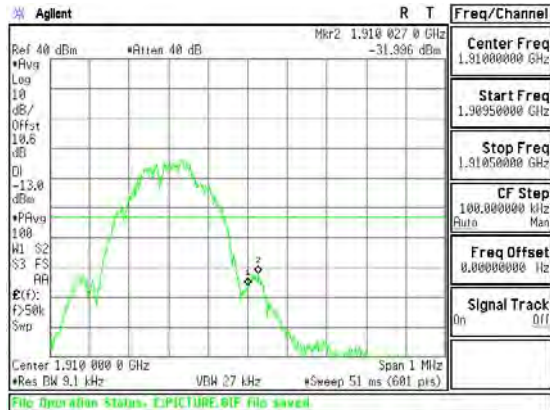
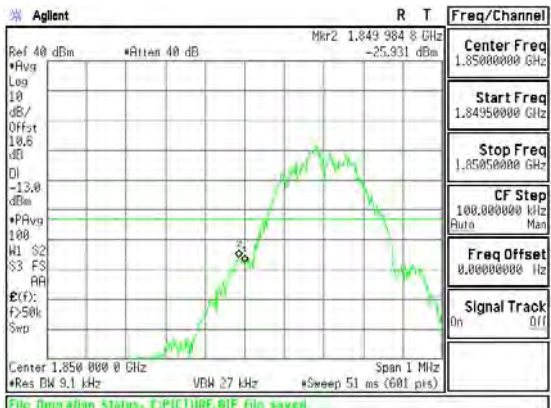
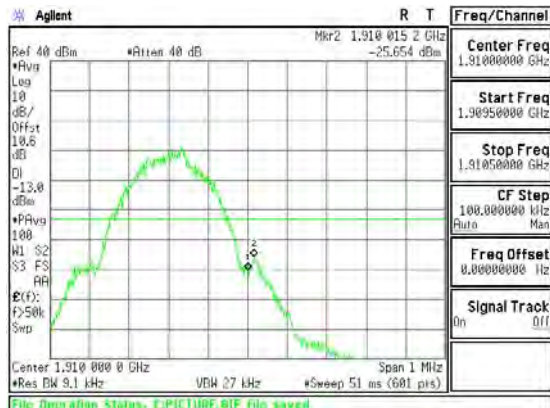
MODES TESTED

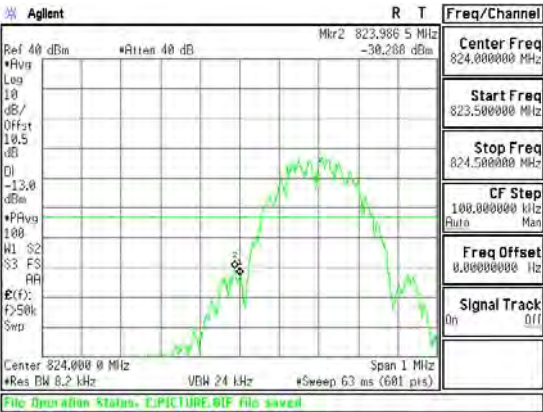
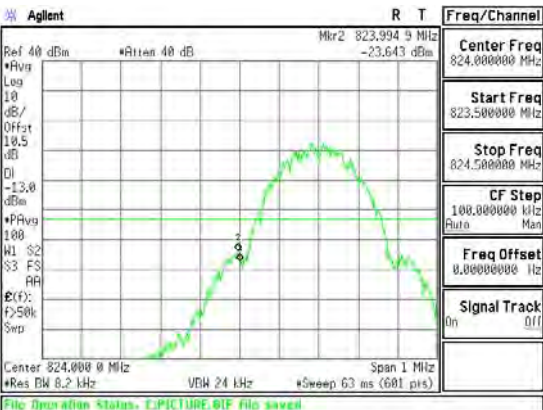
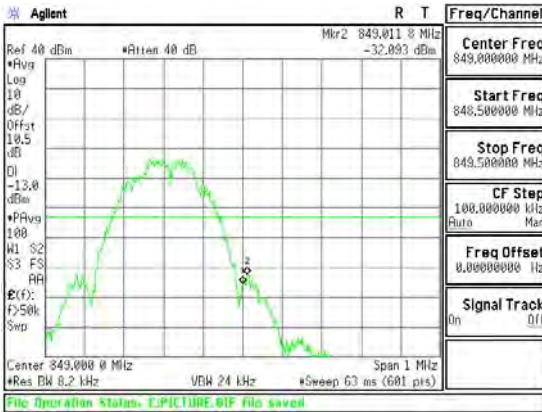
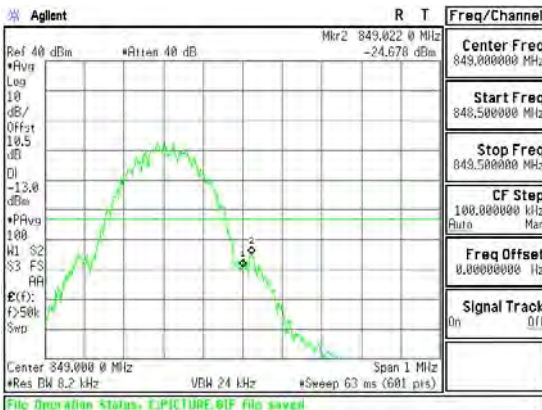
RESULTS

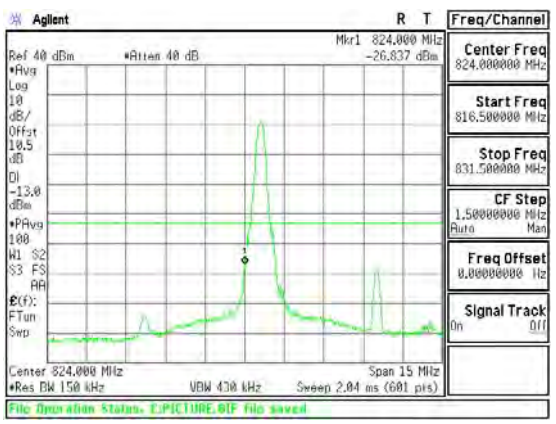
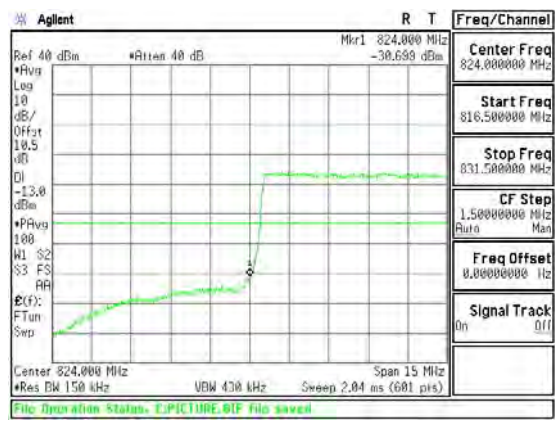
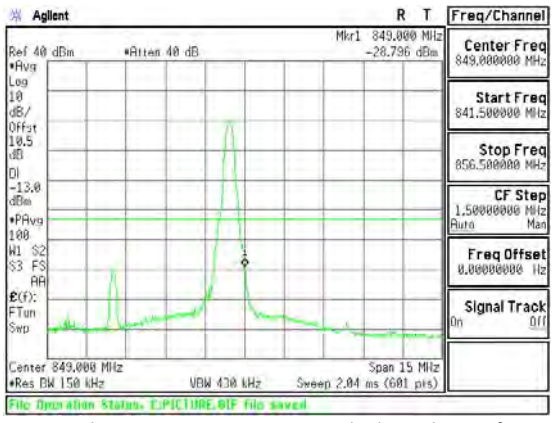
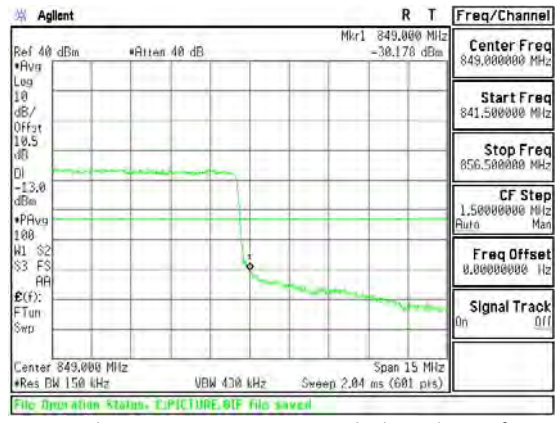
10.2.1. BAND EDGE PLOTS

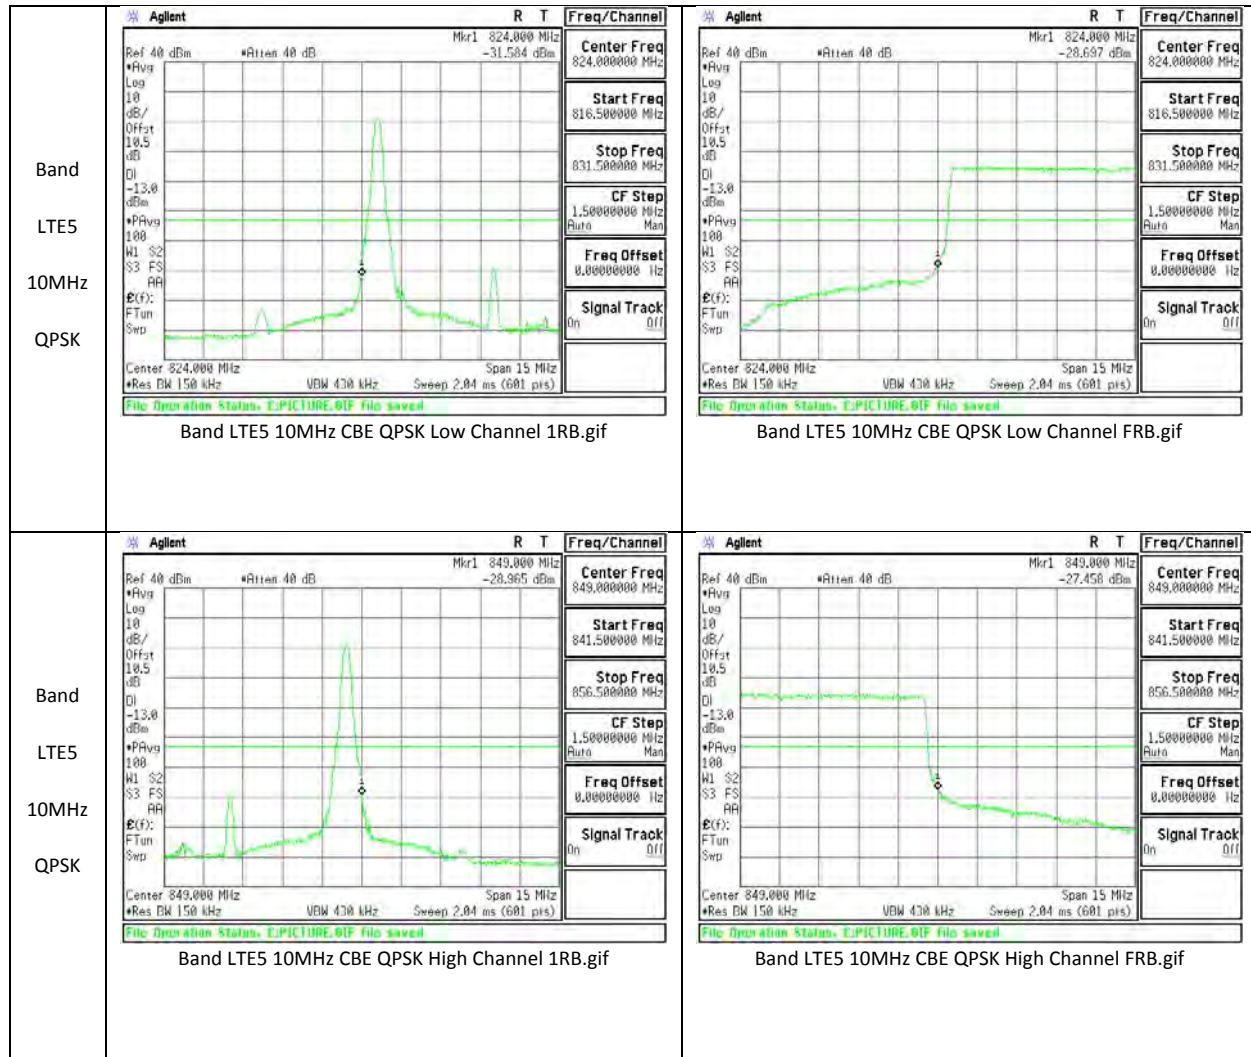
Band Band 2 WCDMA	 Band WCDMA B2 HSDPA CBE
Band Band 2 WCDMA	 Band WCDMA B2 REL99 CBE
 Band WCDMA B2 HSDPA CBE	 Band WCDMA B2 REL99 CBE

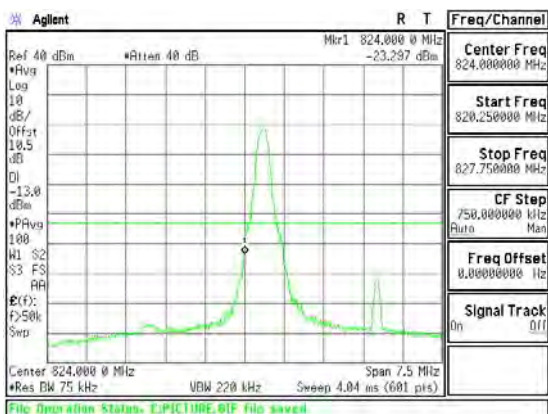
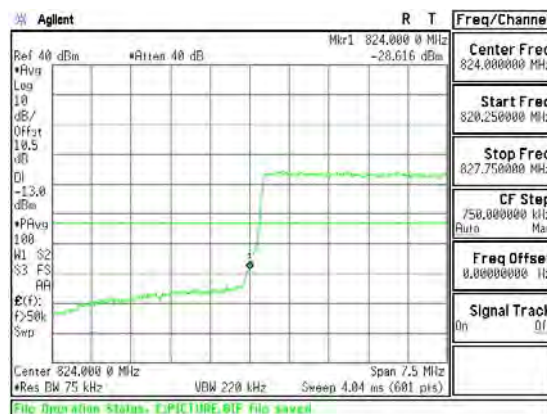
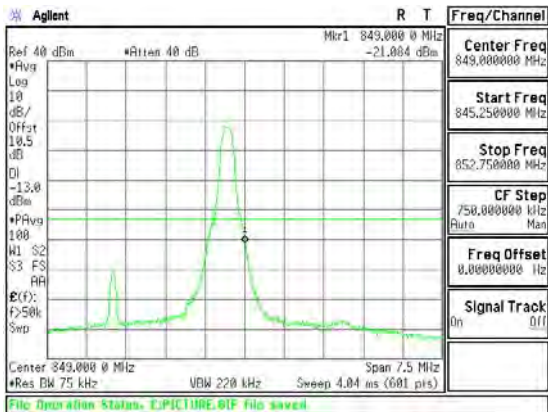
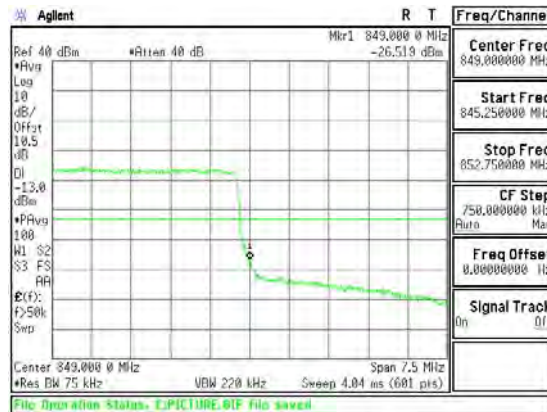
Band Band 5 HSDPA	 Band WCDMA B5 HSDPA CBE	 Band WCDMA B5 HSDPA CBE
Band Band 5 REL99	 Band WCDMA B5 REL99 CBE	 Band WCDMA B5 REL99 CBE

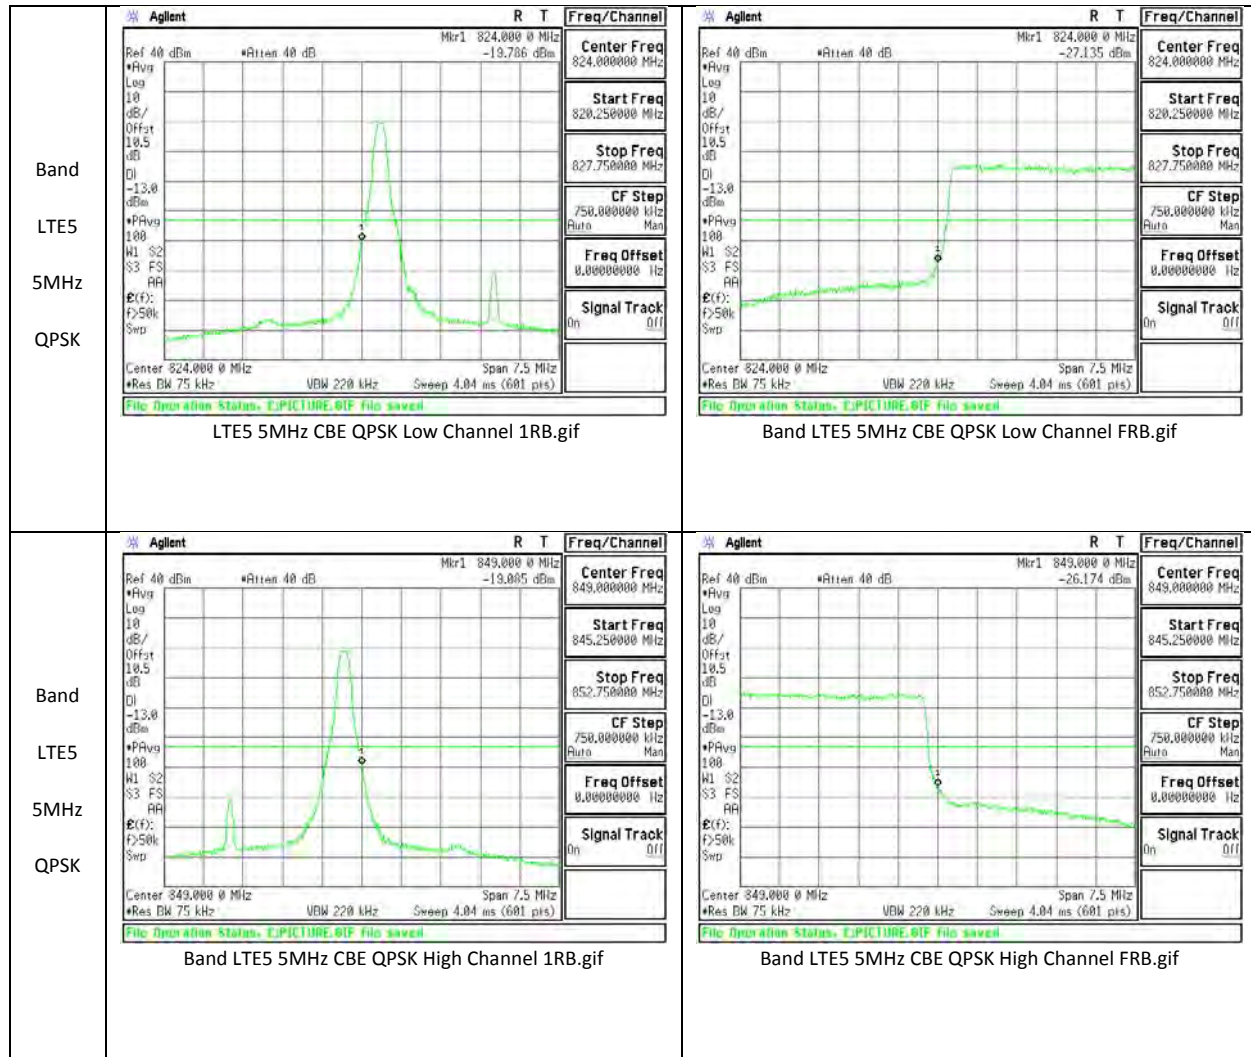
Band GSM1900 EGPRS	 Band GSM1900 EGPRS CBE Low channel	 Band GSM1900 EGPRS CBE High channel
Band GSM1900 GPRS	 Band GSM1900 GPRS CBE Low channel	 Band GSM1900 GPRS CBE High channel

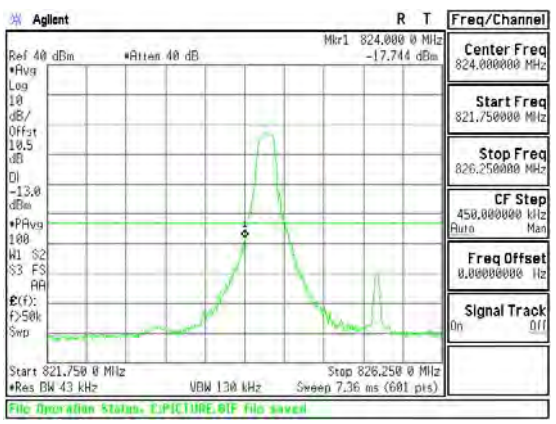
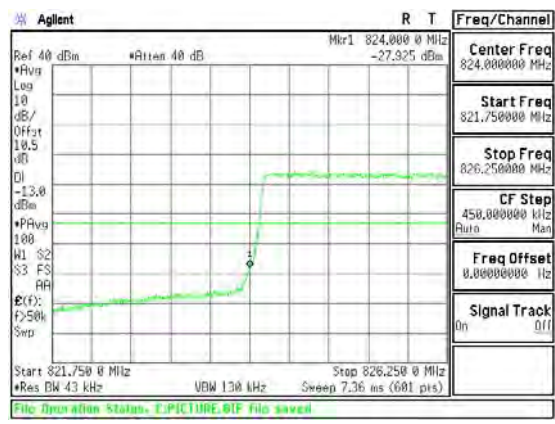
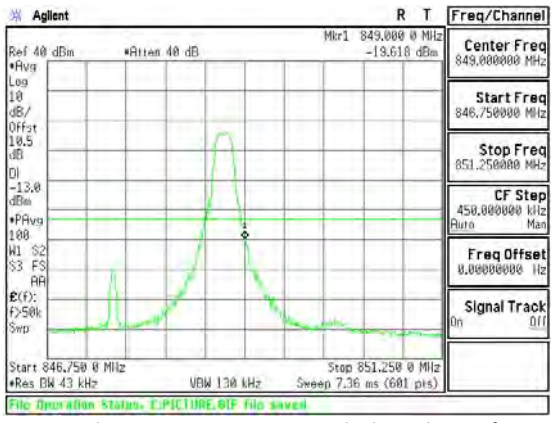
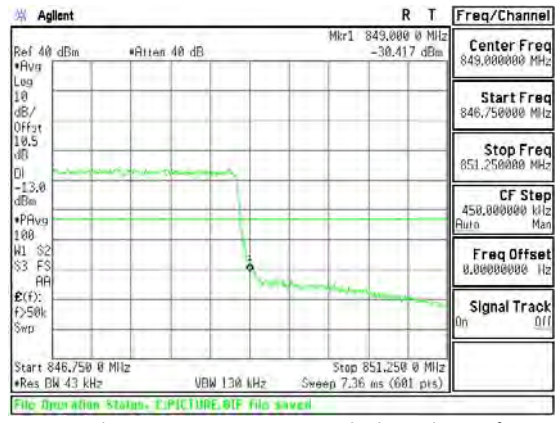
Band GSM850 EGPRS	 Agilent R T Freq/Channel Ref 40 dBm #Atten 40 dB Mhz2 823.986 5 MHz -30.288 dBm Center Freq 824.000000 MHz Start Freq 823.500000 MHz Stop Freq 824.500000 MHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Center 824.000 0 MHz Span 1 MHz #Res BW 8.2 kHz VFW 24 kHz #Sweep 63 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band GSM850 EGPRS CBE Low channel
Band GSM850 GPRS	 Agilent R T Freq/Channel Ref 40 dBm #Atten 40 dB Mhz2 823.994 5 MHz -23.643 dBm Center Freq 824.000000 MHz Start Freq 823.500000 MHz Stop Freq 824.500000 MHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Center 824.000 0 MHz Span 1 MHz #Res BW 8.2 kHz VFW 24 kHz #Sweep 63 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band GSM850 GPRS CBE Low channel
Band GSM850 EGPRS	 Agilent R T Freq/Channel Ref 40 dBm #Atten 40 dB Mhz2 849.011 8 MHz -32.093 dBm Center Freq 849.000000 MHz Start Freq 848.500000 MHz Stop Freq 849.500000 MHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Center 849.000 0 MHz Span 1 MHz #Res BW 8.2 kHz VFW 24 kHz #Sweep 63 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band GSM850 EGPRS CBE High channel
Band GSM850 GPRS	 Agilent R T Freq/Channel Ref 40 dBm #Atten 40 dB Mhz2 849.022 0 MHz -24.676 dBm Center Freq 849.000000 MHz Start Freq 848.500000 MHz Stop Freq 849.500000 MHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Center 849.000 0 MHz Span 1 MHz #Res BW 8.2 kHz VFW 24 kHz #Sweep 63 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band GSM850 GPRS CBE High channel

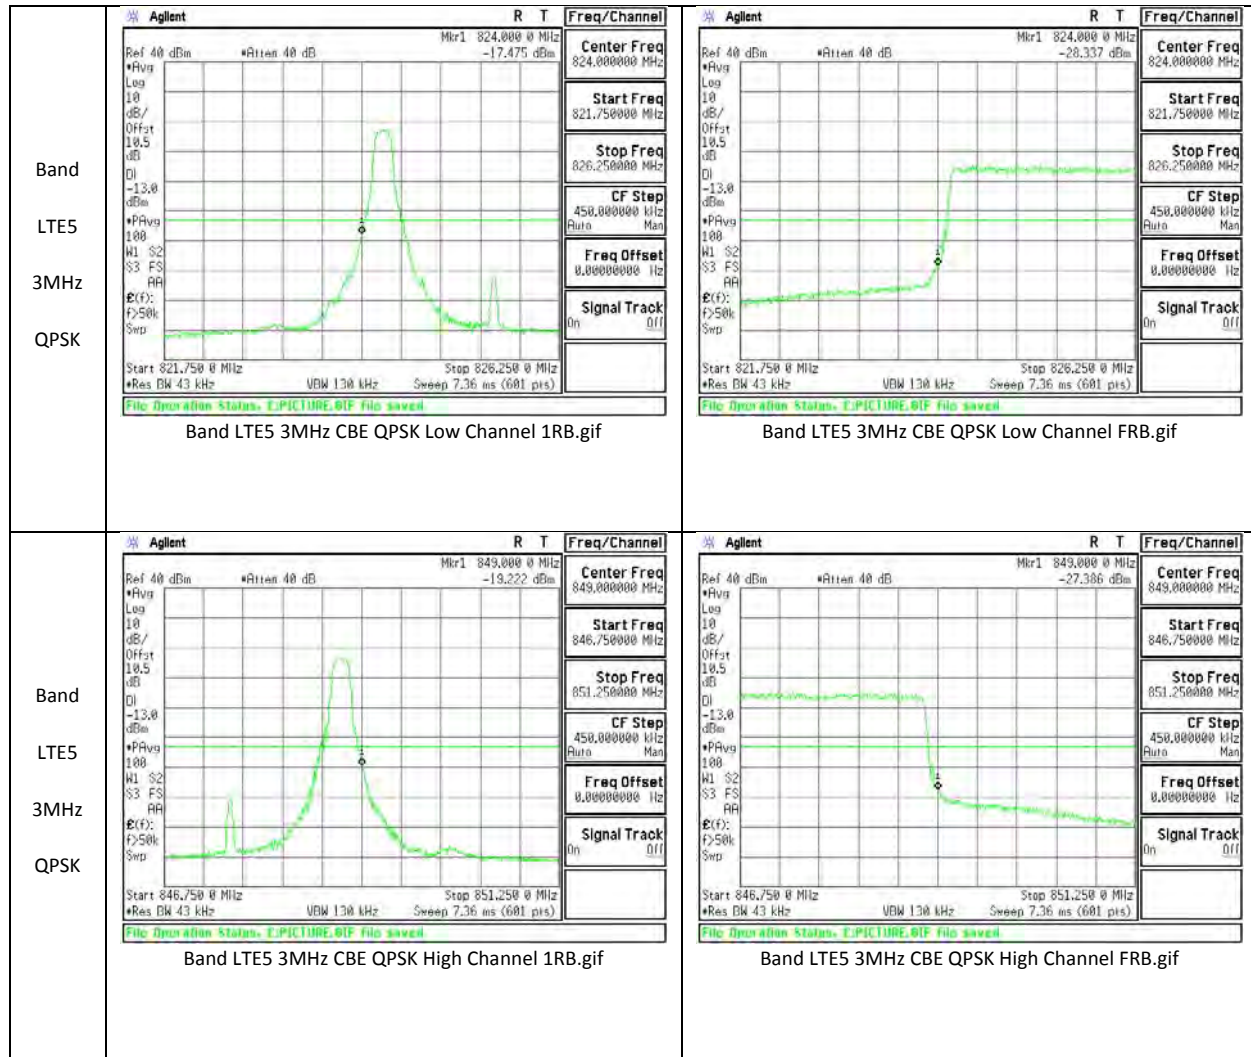
Band LTE5 10MHz 16QAM	 Agilent R T Freq/Channel Ref 40 dBm *Atten 40 dB Mkr1 824.000 MHz -26.837 dBm Center Freq 824.000000 MHz *Avg Log 10 dB/Offset 10.5 dB DI -13.0 dBm *PAvg 100 W1 S2 S3 FS RA CF Step 1.50000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 824.000 MHz Span 15 MHz *Res BW 150 kHz VBW 430 kHz Sweep 2.04 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band LTE5 10MHz CBE 16QAM Low Channel 1RB.gif	 Agilent R T Freq/Channel Ref 40 dBm *Atten 40 dB Mkr1 824.000 MHz -30.699 dBm Center Freq 824.000000 MHz *Avg Log 10 dB/Offset 10.5 dB DI -13.0 dBm *PAvg 100 W1 S2 S3 FS RA CF Step 1.50000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 824.000 MHz Span 15 MHz *Res BW 150 kHz VBW 430 kHz Sweep 2.04 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band LTE5 10MHz CBE 16QAM Low Channel FRB.gif
Band LTE5 10MHz 16QAM	 Agilent R T Freq/Channel Ref 40 dBm *Atten 40 dB Mkr1 849.000 MHz -28.796 dBm Center Freq 849.000000 MHz *Avg Log 10 dB/Offset 10.5 dB DI -13.0 dBm *PAvg 100 W1 S2 S3 FS RA CF Step 1.50000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 849.000 MHz Span 15 MHz *Res BW 150 kHz VBW 430 kHz Sweep 2.04 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band LTE5 10MHz CBE 16QAM High Channel 1RB.gif	 Agilent R T Freq/Channel Ref 40 dBm *Atten 40 dB Mkr1 849.000 MHz -30.176 dBm Center Freq 849.000000 MHz *Avg Log 10 dB/Offset 10.5 dB DI -13.0 dBm *PAvg 100 W1 S2 S3 FS RA CF Step 1.50000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Center 849.000 MHz Span 15 MHz *Res BW 150 kHz VBW 430 kHz Sweep 2.04 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band LTE5 10MHz CBE 16QAM High Channel FRB.gif

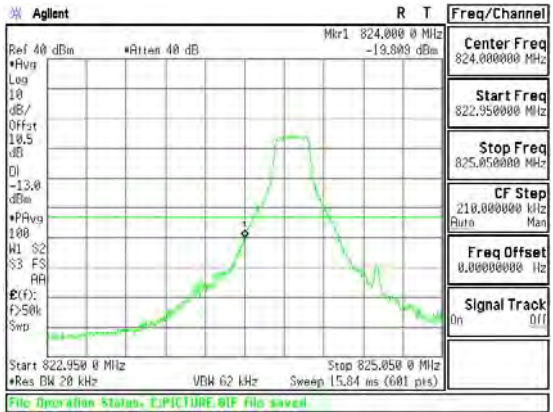
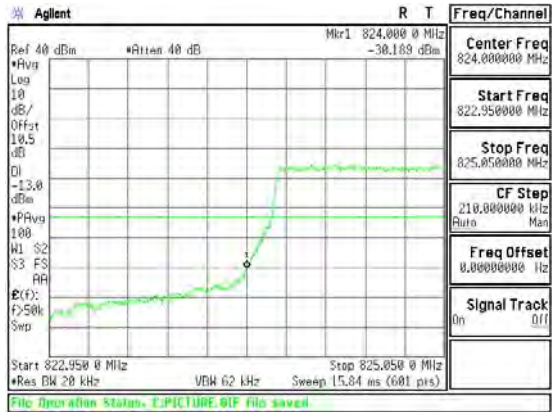
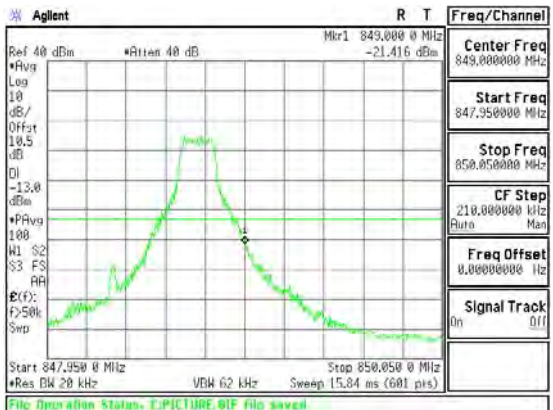
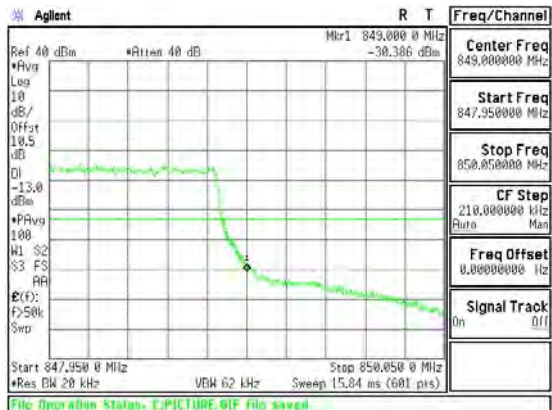


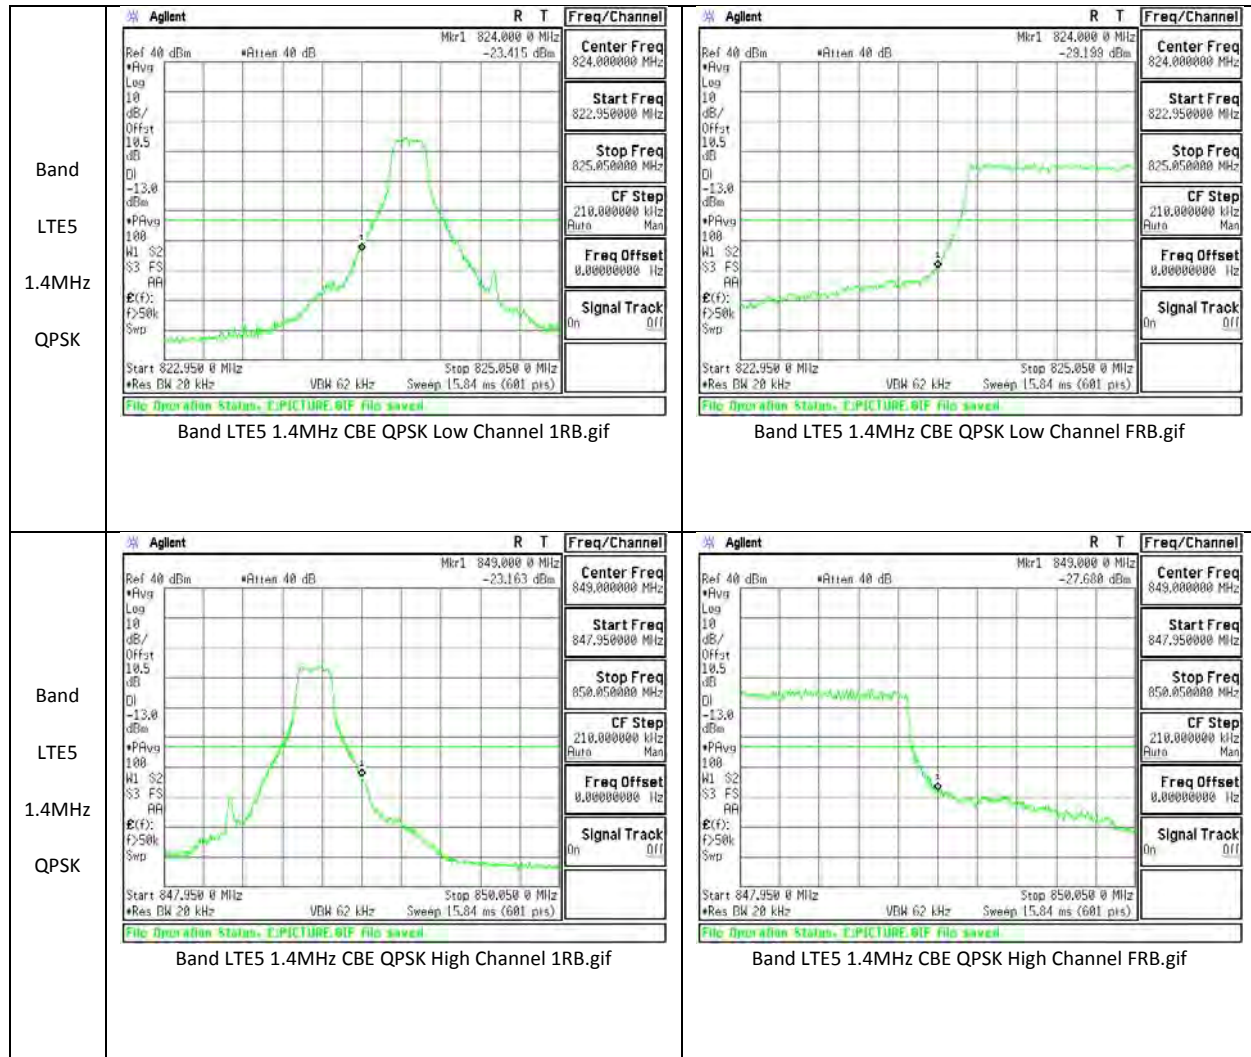
Band LTE5 5MHz 16QAM	 Band LTE5 5MHz CBE 16QAM Low Channel 1RB.gif	 Band LTE5 5MHz CBE 16QAM Low Channel FRB.gif
Band LTE5 5MHz 16QAM	 Band LTE5 5MHz CBE 16QAM High Channel 1RB.gif	 Band LTE5 5MHz CBE 16QAM High Channel FRB.gif



Band LTE5 3MHz 16QAM	 Agilent R T Freq/Channel Ref 40 dBm *Atten 40 dB Mtr1 824.000 0 MHz -17.744 dBm Center Freq 824.000000 MHz *Avg Log 10 dB/Offset 10.5 dB DI -13.0 dBm *PAvg 100 W1 S2 S3 FS RA CF Step 450.000000 kHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Start 821.750 0 MHz Stop 826.250 0 MHz *Res BW 43 kHz VBW 130 kHz Sweep 7.36 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band LTE5 3MHz CBE 16QAM Low Channel 1RB.gif	 Agilent R T Freq/Channel Ref 40 dBm *Atten 40 dB Mtr1 824.000 0 MHz -27.925 dBm Center Freq 824.000000 MHz *Avg Log 10 dB/Offset 10.5 dB DI -13.0 dBm *PAvg 100 W1 S2 S3 FS RA CF Step 450.000000 kHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Start 821.750 0 MHz Stop 826.250 0 MHz *Res BW 43 kHz VBW 130 kHz Sweep 7.36 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band LTE5 3MHz CBE 16QAM Low Channel FRB.gif
Band LTE5 3MHz 16QAM	 Agilent R T Freq/Channel Ref 40 dBm *Atten 40 dB Mtr1 849.000 0 MHz -19.618 dBm Center Freq 849.000000 MHz *Avg Log 10 dB/Offset 10.5 dB DI -13.0 dBm *PAvg 100 W1 S2 S3 FS RA CF Step 450.000000 kHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Start 846.750 0 MHz Stop 851.250 0 MHz *Res BW 43 kHz VBW 130 kHz Sweep 7.36 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band LTE5 3MHz CBE 16QAM High Channel 1RB.gif	 Agilent R T Freq/Channel Ref 40 dBm *Atten 40 dB Mtr1 849.000 0 MHz -30.417 dBm Center Freq 849.000000 MHz *Avg Log 10 dB/Offset 10.5 dB DI -13.0 dBm *PAvg 100 W1 S2 S3 FS RA CF Step 450.000000 kHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off Start 846.750 0 MHz Stop 851.250 0 MHz *Res BW 43 kHz VBW 130 kHz Sweep 7.36 ms (601 pts) File Operation Status: CAPTURE.BIF file saved Band LTE5 3MHz CBE 16QAM High Channel FRB.gif



Band LTE5 1.4MHz 16QAM	 Band LTE5 1.4MHz CBE 16QAM Low Channel 1RB.gif	 Band LTE5 1.4MHz CBE 16QAM Low Channel FRB.gif
Band LTE5 1.4MHz 16QAM	 Band LTE5 1.4MHz CBE 16QAM High Channel 1RB.gif	 Band LTE5 1.4MHz CBE 16QAM High Channel FRB.gif



10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238,

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-24.60	-13	-11.6
		836.6	-25.77	-13	-12.77
		848.8	-25.58	-13	-12.58
	EGPRS	824.2	-25.76	-13	-12.76
		836.6	-26.06	-13	-13.06
		848.8	-26.04	-13	-13.04
GSM1900	GPRS	1850.2	-25.99	-13	-12.99
		1880	-25.41	-13	-12.41
		1909.8	-26.20	-13	-13.20
	EGPRS	1850.2	-25.50	-13	-12.5
		1880	-26.08	-13	-13.08
		1909.8	-25.34	-13	-12.34

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
Band 5	REL99	826.4	-34.51	-13	-21.51
		836.6	-35.27	-13	-22.27
		846.6	-35.42	-13	-22.42
	HSDPA	826.4	-34.21	-13	-21.21
		836.6	-35.34	-13	-22.34
		846.6	-34.25	-13	-21.25
Band 2	REL99	1852.4	-24.52	-13	-11.52
		1880	-24.93	-13	-11.93
		1907.6	-25.05	-13	-12.05
	HSDPA	1852.4	-25.64	-13	-12.64
		1880	-25.54	-13	-12.54
		1907.6	-25.47	-13	-12.47

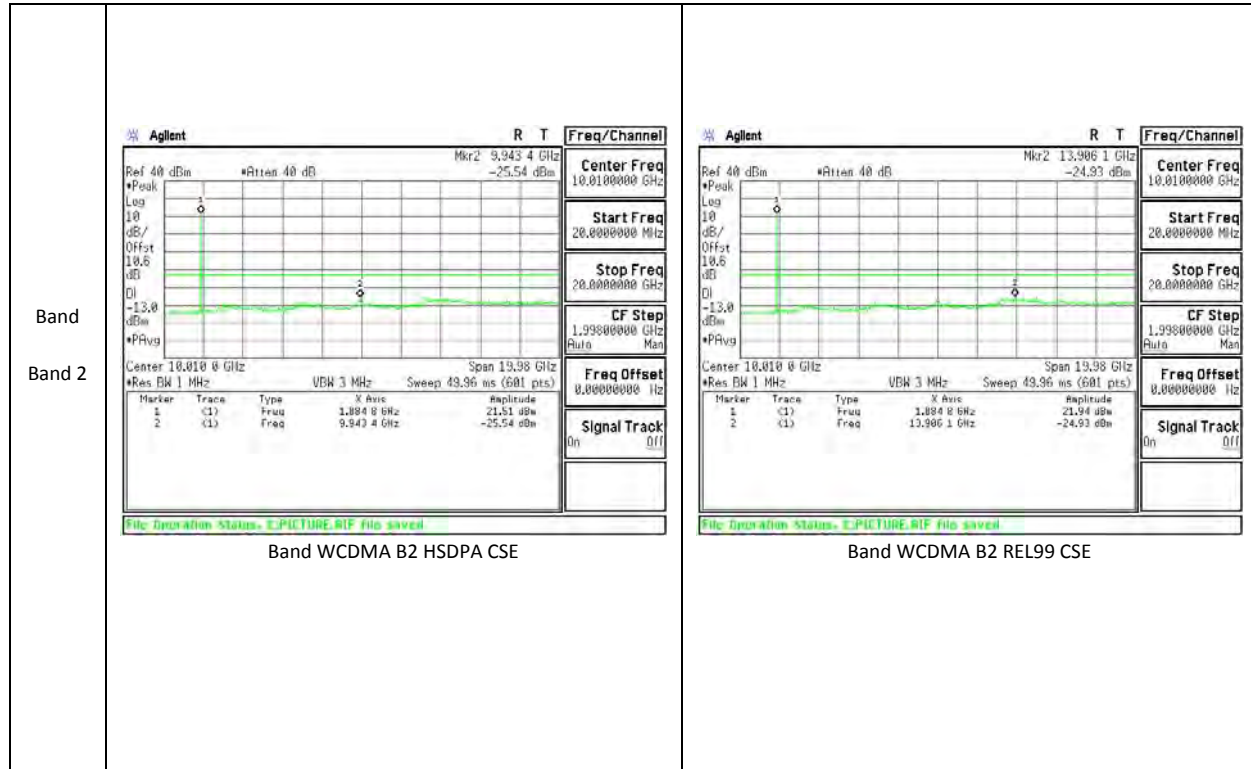
Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	10	QPSK	829	-34.76	-13	-21.76
			836.5	-35.20	-13	-22.20
			844	-34.76	-13	-21.76
		16QAM	829	-35.01	-13	-22.01
			836.5	-34.71	-13	-21.71
			844	-34.73	-13	-21.73

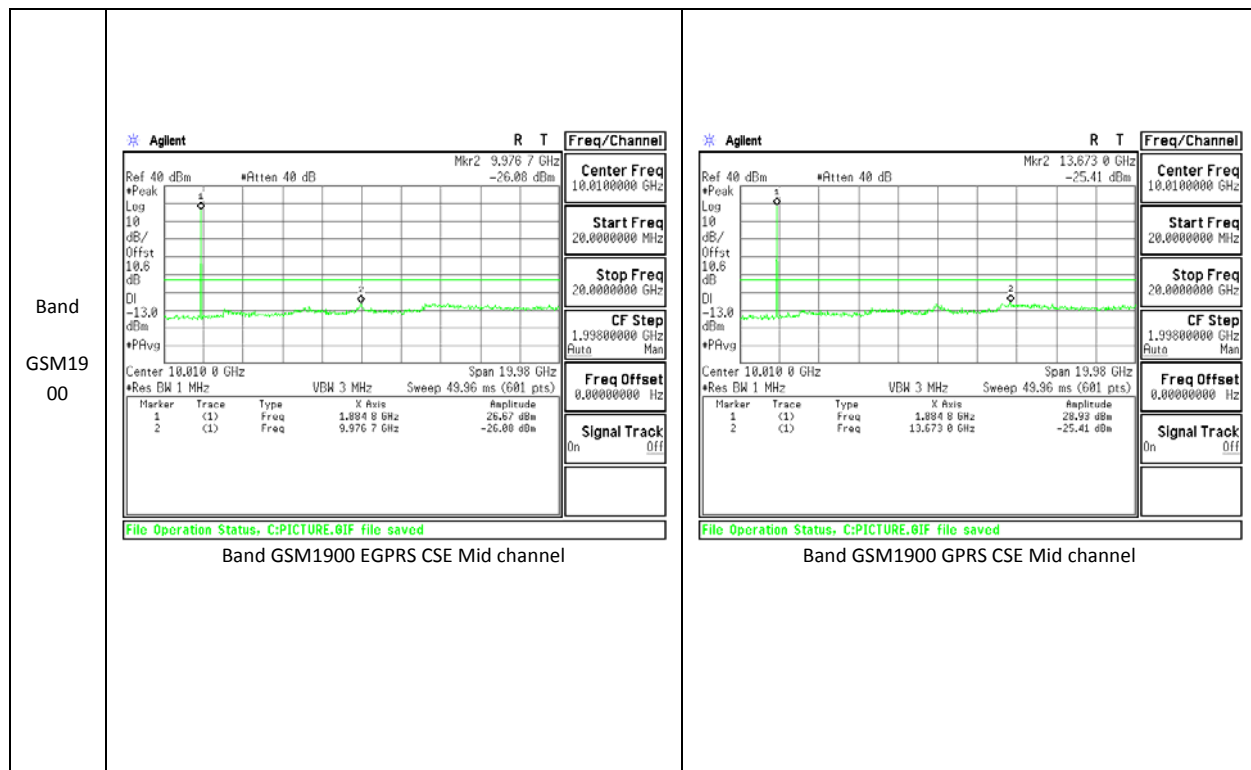
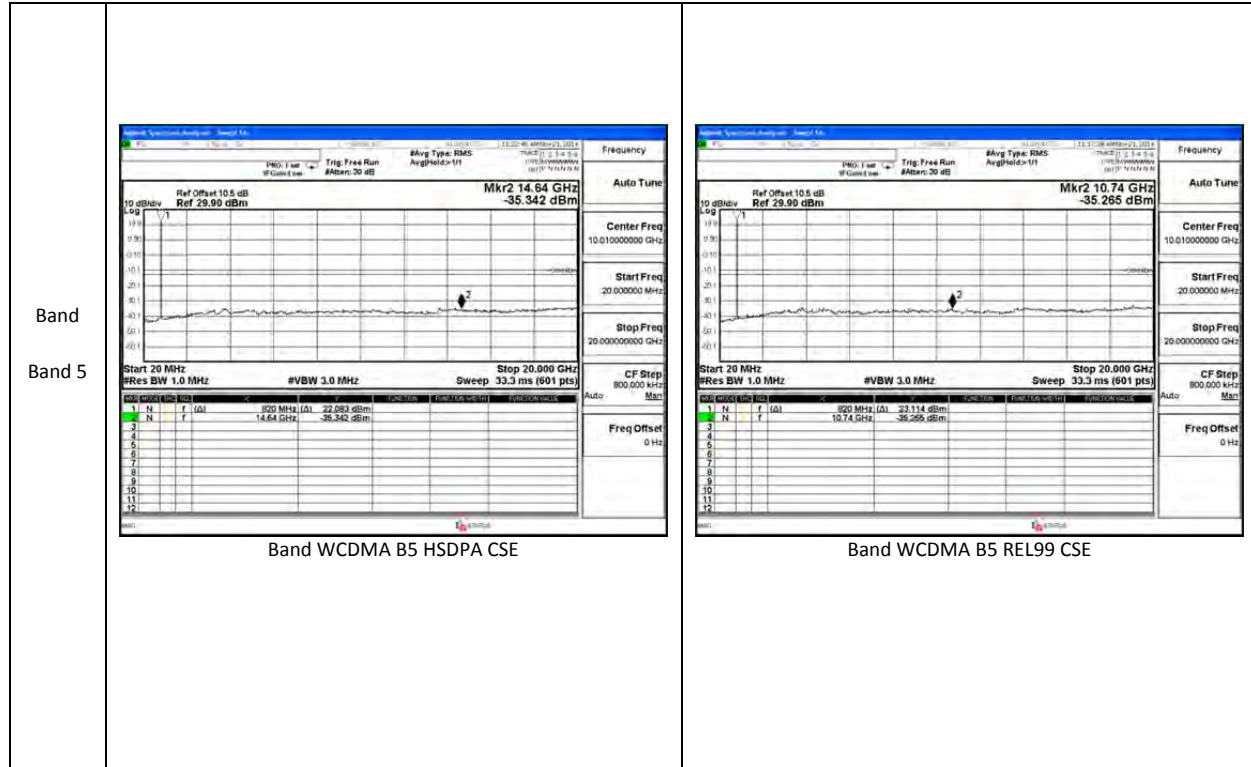
Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	5	QPSK	826.5	-35.72	-13	-22.72
			836.5	-35.24	-13	-22.24
			846.5	-35.43	-13	-22.43
		16QAM	826.5	-33.63	-13	-20.63
			836.5	-33.10	-13	-20.10
			846.5	-35.75	-13	-22.75

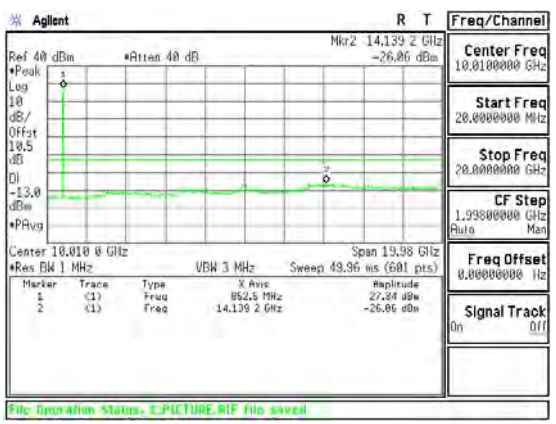
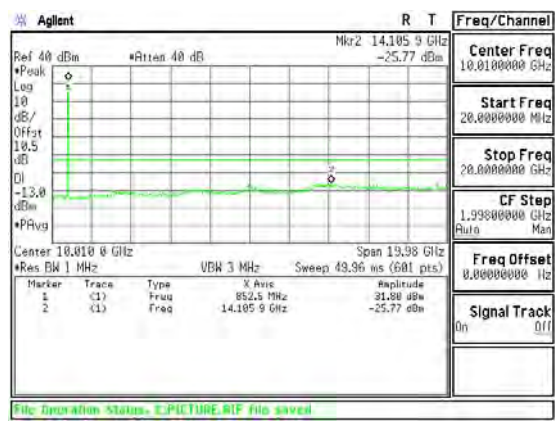
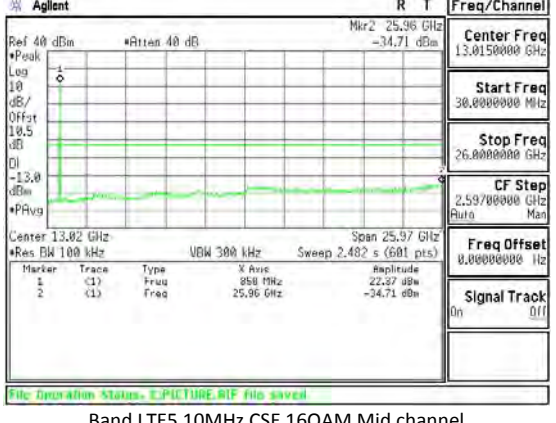
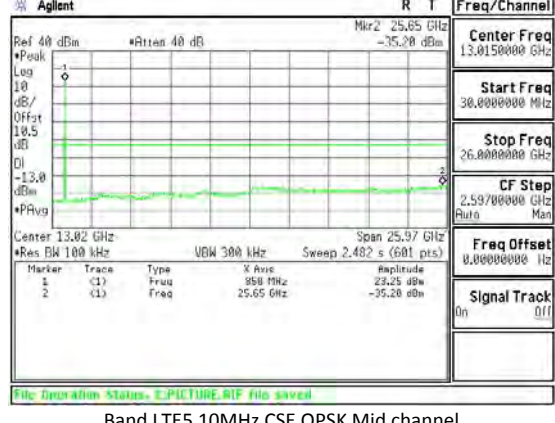
Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	3	QPSK	825.5	-35.76	-13	-22.76
			836.5	-34.51	-13	-21.51
			847.5	-34.81	-13	-21.81
		16QAM	825.5	-35.14	-13	-22.14
			836.5	-35.50	-13	-22.50
			847.5	-33.66	-13	-20.66

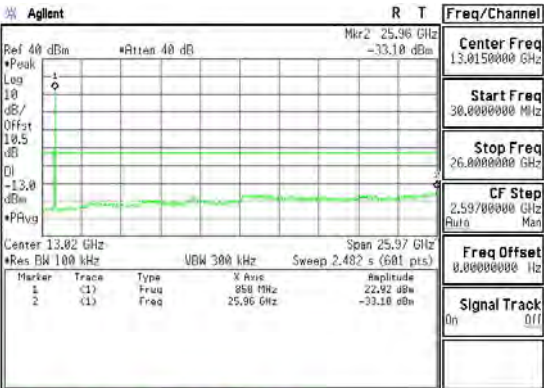
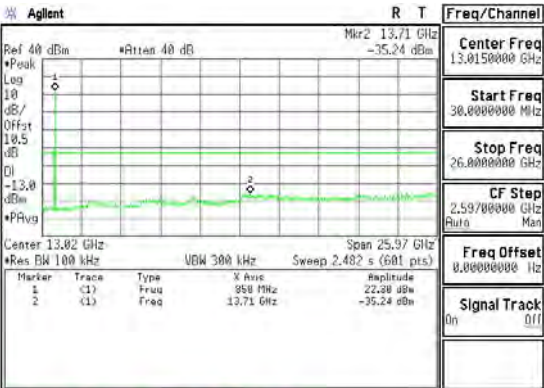
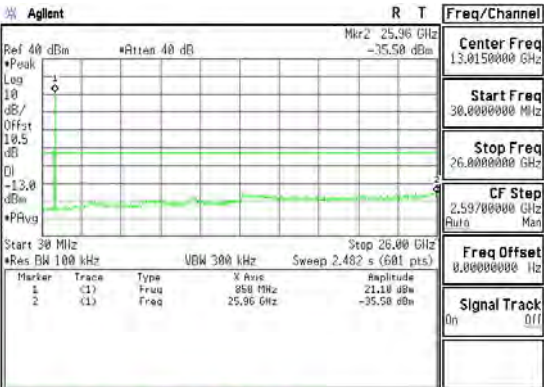
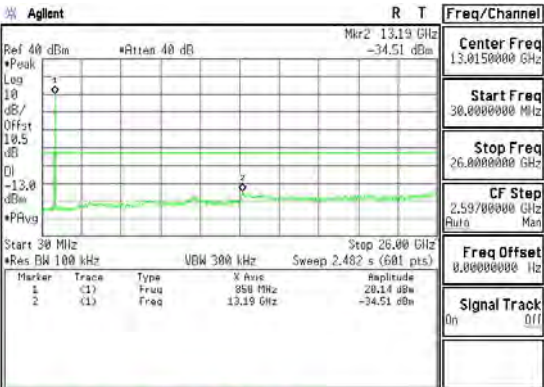
Band	BW (MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
LTE5	1.4	QPSK	824.7	-33.44	-13	-20.44
			836.5	-35.00	-13	-22.00
			848.3	-35.52	-13	-22.52
		16QAM	824.7	-34.65	-13	-21.65
			836.5	-34.81	-13	-21.81
			848.3	-35.39	-13	-22.39

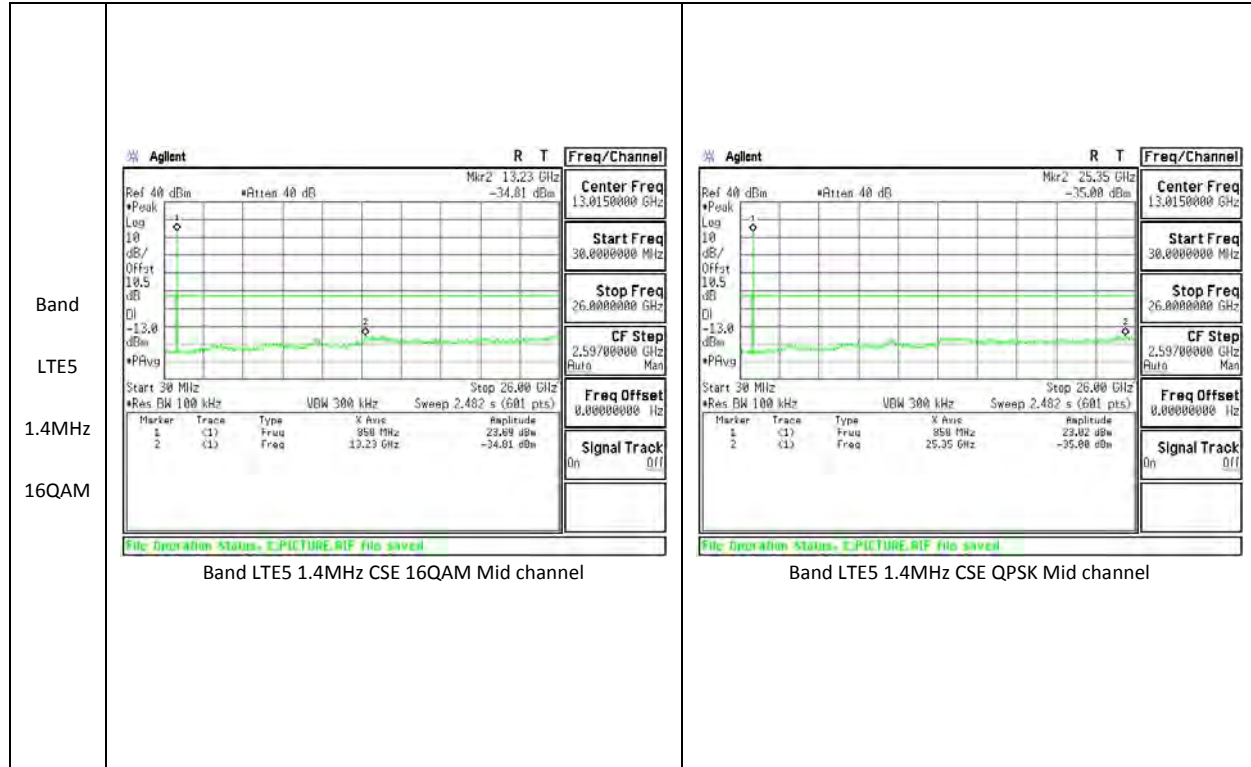
10.3.2. OUT OF BAND EMISSIONS PLOTS





Band GSM850	 Band GSM850 EGPRS CSE Mid channel	 Band GSM850 GPRS CSE Mid channel
Band LTE5 10MHz 16QAM	 Band LTE5 10MHz CSE 16QAM Mid channel	 Band LTE5 10MHz CSE QPSK Mid channel

Band LTE5 5MHz 16QAM	 File Operation Status: CAPTURE.BIF file saved Band LTE5 5MHz CSE 16QAM Mid channel	 File Operation Status: CAPTURE.BIF file saved Band LTE5 5MHz CSE QPSK Mid channel
Band LTE5 3MHz 16QAM	 File Operation Status: CAPTURE.BIF file saved Band LTE5 3MHz CSE 16QAM Mid channel	 File Operation Status: CAPTURE.BIF file saved Band LTE5 3MHz CSE QPSK Mid channel



10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

GPRS 1900, Channel 661 - 1880MHz

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999995	-0.001	2.5
3.80	40	1879.999995	-0.001	2.5
3.80	30	1879.999994	0.000	2.5
3.80	20	1879.999993	0	2.5
3.80	10	1879.999995	-0.001	2.5
3.80	0	1879.999995	-0.001	2.5
3.80	-10	1879.999990	0.002	2.5
3.80	-20	1879.999994	0.000	2.5
3.80	-30	1879.999990	0.002	2.5

Reference Frequency: PCS Mid Channel 1880 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1879.999993	0	2.5
4.37	20	1879.999989	0.003	2.5
3.23(end volt)	20	1879.999987	0.004	2.5

GPRS 850 CELL BAND, – CHANNEL 190, Frequency 836.6MHz

Reference Frequency: PCS Mid Channel 836.6 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599996	0.001	2.5
3.80	40	836.599995	0.002	2.5
3.80	30	836.599996	0.001	2.5
3.80	20	836.599997	0	2.5
3.80	10	836.599997	-0.001	2.5
3.80	0	836.599997	-0.001	2.5
3.80	-10	836.599995	0.002	2.5
3.80	-20	836.599995	0.002	2.5
3.80	-30	836.599996	0.001	2.5

Reference Frequency: PCS Mid Channel 836.6 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.599997	0	2.5
4.37	20	836.5999949	0.002	2.5
3.23(end volt)	20	836.5999957	0.001	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232.

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r01

For peak power measurement with a PSA:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW $\geq 3 \times$ RBW; d) Set number of points in sweep $\geq 2 \times$ span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle ≥ 98 ; h) Use trigger to capture bursts If burst duty cycle < 98 ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

TEST RESULTS

11.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	20.07	101.6
		9400	1880	20.13	103.0
		9538	1907.6	19.98	99.5
	HSDPA	9262	1852.4	19.64	92.0
		9400	1880	19.67	92.7
		9538	1907.6	19.39	86.9
	HSUPA	9262	1852.4		
		9400	1880		
		9538	1907.6		

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.4	18.19	65.9
		4183	836.6	19.49	88.9
		4233	846.6	19.81	95.7
	HSDPA	4132	826.4	17.06	50.8
		4183	836.6	18.52	71.1
		4233	846.6	18.55	71.6
	HSUPA	4132	826.4		
		4183	836.6		
		4233	846.6		

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	27.52	564.9
		661	1880	27.72	591.6
		810	1909.8	26.96	496.6
	EGPRS	512	1850.2	24.47	279.9
		661	1880	24.70	295.1
		810	1909.8	23.66	232.2

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	27.80	602.6
		190	836.6	29.91	979.5
		251	848.8	28.76	751.6
	EGPRS	128	824.2	23.81	240.4
		190	836.6	25.42	348.3
		251	848.8	25.73	374.1

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	10	QPSK	1/0	829	19.95	98.9
			1/0	836.5	20.27	106.4
			1/0	844	20.14	103.2
		16QAM	1/0	829	19.07	80.7
			1/0	836.5	19.05	80.4
			1/0	844	19.64	92.0

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	5	QPSK	1/0	826.5	19.30	85.1
			1/0	836.5	20.23	105.4
			1/0	846.5	20.31	107.4
		16QAM	1/0	826.5	18.06	64.0
			1/0	836.5	19.16	82.4
			1/0	846.5	19.00	79.4

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	3	QPSK	1/0	825.5	20.06	101.4
			1/0	836.5	20.26	106.2
			1/0	847.5	19.81	95.7
		16QAM	1/0	825.5	18.05	63.8
			1/0	836.5	19.00	79.4
			1/0	847.5	19.11	81.5

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE5	1.4	QPSK	1/0	824.7	20.66	116.4
			1/0	836.5	20.51	112.4
			1/0	848.3	19.75	94.4
		16QAM	1/0	824.7	19.65	92.2
			1/0	836.5	19.63	91.8
			1/0	848.3	19.85	96.6

Band

LTE5

10MHz

QPSK

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14U19435
Date: 11/20/14
Test Engineer: J. Hsu
Configuration: EUT Only X-pos
Mode: LTE5 QPSK 10M

Test Equipment:
Receiving: Horn T345, and Chamber B SMA Cables
Substitution: Dipole T273, 8ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
829.00	13.79	V	0.9	0.0	12.89	38.5	-25.6	
829.00	20.84	H	0.9	0.0	19.95	38.5	-18.5	
Mid Ch								
836.50	10.86	V	0.9	0.0	9.96	38.5	-28.5	
836.50	21.17	H	0.9	0.0	20.27	38.5	-18.2	
High Ch								
844.00	10.43	V	0.9	0.0	9.53	38.5	-28.9	
844.00	21.04	H	0.9	0.0	20.14	38.5	-18.3	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band LTE5 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B Company: Samsung Project #: 14U19435 Date: 11/20/14 Test Engineer: J. Hsu Configuration: EUT Only X-pos Mode: LTE5 16QAM 5M Test Equipment: Receiving: Horn T345, and Chamber B SMA Cables Substitution: Dipole T273, 8ft SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	826.50	13.22	V	0.9	0.0	12.33	38.5	-26.1	
	826.50	18.96	H	0.9	0.0	18.06	38.5	-20.4	
	Mid Ch								
	836.50	10.33	V	0.9	0.0	9.43	38.5	-29.0	
	836.50	20.06	H	0.9	0.0	19.16	38.5	-19.3	
	High Ch								
	846.50	10.36	V	0.9	0.0	9.46	38.5	-29.0	
	846.50	19.90	H	0.9	0.0	19.00	38.5	-19.4	
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band

LTE5

3MHz

16QAM

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14U19435
Date: 11/20/14
Test Engineer: J. Hsu
Configuration: EUT Only X-pos
Mode: LTE5 16QAM 3M

Test Equipment:
Receiving: Horn T345, and Chamber B SMA Cables
Substitution: Dipole T273, 8ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.50	12.21	V	0.9	0.0	11.32	38.5	-27.1	
826.50	18.95	H	0.9	0.0	18.05	38.5	-20.4	
Mid Ch								
836.50	9.04	V	0.9	0.0	8.14	38.5	-30.3	
836.50	19.90	H	0.9	0.0	19.00	38.5	-19.4	
High Ch								
846.50	11.99	V	0.9	0.0	11.09	38.5	-27.4	
846.50	20.01	H	0.9	0.0	19.11	38.5	-19.3	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band

LTE5

3MHz

QPSK

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14U19435
Date: 11/20/14
Test Engineer: J. Hsu
Configuration: EUT Only X-pos
Mode: LTE5 QPSK 3M

Test Equipment:
Receiving: Horn T345, and Chamber B SMA Cables
Substitution: Dipole T273, 8ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
826.50	12.32	V	0.9	0.0	11.43	38.5	-27.0	
826.50	20.96	H	0.9	0.0	20.06	38.5	-18.4	
Mid Ch								
836.50	9.08	V	0.9	0.0	8.18	38.5	-30.3	
836.50	21.16	H	0.9	0.0	20.26	38.5	-18.2	
High Ch								
846.50	10.46	V	0.9	0.0	9.56	38.5	-28.9	
846.50	20.71	H	0.9	0.0	19.81	38.5	-18.6	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band

LTE5

1.4MHz

16QAM

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14U19435
Date: 11/20/14
Test Engineer: J. Hsu
Configuration: EUT Only X-pos
Mode: LTE5 16QAM 1.4M

Test Equipment:
Receiving: Horn T345, and Chamber B SMA Cables
Substitution: Dipole T273, 8ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.70	10.06	V	0.9	0.0	9.16	38.5	-29.3	
824.70	20.55	H	0.9	0.0	19.65	38.5	-18.8	
Mid Ch								
836.50	9.86	V	0.9	0.0	8.96	38.5	-29.5	
836.50	20.53	H	0.9	0.0	19.63	38.5	-18.8	
High Ch								
848.30	10.14	V	0.9	0.0	9.24	38.5	-29.2	
848.30	20.75	H	0.9	0.0	19.85	38.5	-18.6	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band

Band 2

HSDPA

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B								
Company:	Samsung							
Project #:	14U19435							
Date:	11/19/14							
Test Engineer:	J. Hsu							
Configuration:	EUT Only X-position							
Mode:	HSDPA Band 2							
Test Equipment:								
Receiving: Horn T345, and Chamber B SMA Cables								
Substitution: Horn T961 Substitution, 8ft SMA Cable Warehouse								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
1852.40	8.84	V	0.9	7.8	15.74	33.0	-17.3	
1852.40	12.74	H	0.9	7.8	19.64	33.0	-13.4	
Mid Ch								
1880.00	10.59	V	0.9	7.8	17.49	33.0	-15.5	
1880.00	12.77	H	0.9	7.8	19.67	33.0	-13.3	
High Ch								
1907.60	11.11	V	0.9	7.8	18.01	33.0	-15.0	
1907.60	12.49	H	0.9	7.8	19.39	33.0	-13.6	
Rev. 3.17.11								
Note: For Band 4 EIRP limit is 30dBm								

Band Band 5 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B Company: Samsung Project #: 14U19435 Date: 11/19/14 Test Engineer: J. Hsu Configuration: EUT Only X-position Mode: HSDPA Band 5 Test Equipment: Receiving: Sunol T243, and Chamber B N-type Cable Substitution: Dipole T273, 8ft SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	826.40	9.94	V	0.9		9.04	38.5	-29.4	
	826.40	17.96	H	0.9		17.06	38.5	-21.4	
	Mid Ch								
	836.60	10.05	V	0.9		9.15	38.5	-29.3	
	836.60	19.42	H	0.9		18.52	38.5	-19.9	
	High Ch								
	846.60	9.79	V	0.9		8.89	38.5	-29.6	
	846.60	19.45	H	0.9		18.55	38.5	-19.9	
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band Band 5 REL99	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B Company: Samsung Project #: 14U19435 Date: 11/19/14 Test Engineer: J. Hsu Configuration: EUT Only X-position Mode: Rel99 Band 5 Test Equipment: Receiving: Sunol T243, and Chamber B N-type Cable Substitution: Dipole T273, 8ft SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	826.40	10.72	V	0.9		9.82	38.5	-28.6	
	826.40	19.09	H	0.9		18.19	38.5	-20.3	
	Mid Ch								
	836.60	10.83	V	0.9		9.93	38.5	-28.5	
	836.60	20.39	H	0.9		19.49	38.5	-19.0	
	High Ch								
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band GSM 1900 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B Company: Samsung Project #: 14U19435 Date: 11/19/14 Test Engineer: J. Hsu Configuration: EUT Only X-position Mode: EGPRS1900 Test Equipment: Receiving: Horn T345, and Chamber B SMA Cables Substitution: Horn T961 Substitution, 8ft SMA Cable Warehouse							
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Margin
	MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
	Notes							
	Low							
	1850.20	9.79	V	0.9	7.8	16.69	33.0	-16.3
	1850.20	17.57	H	0.9	7.8	24.47	33.0	-8.5
	Mid							
	1880.00	12.97	V	0.9	7.8	19.87	33.0	-13.1
	1880.00	17.80	H	0.9	7.8	24.70	33.0	-8.3
	High							
	1909.80	15.77	V	0.9	7.8	22.67	33.0	-10.3
	1909.80	16.76	H	0.9	7.8	23.66	33.0	-9.3
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm								

Band

GSM

850

EGPRS

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber B

Company: Samsung
Project #: 14U19435
Date: 11/19/14
Test Engineer: J. Hsu
Configuration: EUT Only X-position
Mode: EGPRS850

Test Equipment:
Receiving: Sunol T243, and Chamber B N-type Cable
Substitution: Dipole T273, 8ft SMA Cable Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	19.35	V	0.9		18.45	38.5	-20.0	
824.20	24.71	H	0.9		23.81	38.5	-14.6	
Mid Ch								
836.60	19.96	V	0.9		19.06	38.5	-19.4	
836.60	26.32	H	0.9		25.42	38.5	-13.0	
High Ch								
848.80	19.71	V	0.9		18.81	38.5	-19.6	
848.80	26.63	H	0.9		25.73	38.5	-12.7	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band GSM 850 GPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber B Company: Samsung Project #: 14U19435 Date: 11/19/14 Test Engineer: J. Hsu Configuration: EUT Only X-position Mode: GPRS850 Test Equipment: Receiving: Sunol T243, and Chamber B N-type Cable Substitution: Dipole T273, 8ft SMA Cable Warehouse.								
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Margin	Notes
	MHz	(dBm)	(H/V)	(dB)	(dBd)	(dBm)	(dBm)	(dB)	
	Low Ch								
	824.20	19.17	V	0.9		18.27	38.5	-20.2	
	824.20	28.70	H	0.9		27.80	38.5	-10.7	
	Mid Ch								
	836.60	19.78	V	0.9		18.88	38.5	-19.6	
	836.60	30.81	H	0.9		29.91	38.5	-8.5	
	High Ch								
Rev. 3.17.11 Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

UL Verification Services Above 1GHz High Frequency Substitution Measurement									
Company: Samsung Project #: 14U19435 Date: 11/20/14 Test Engineer: Jude Semana Configuration: EUT w/ AC Charger + HS Mode: HSDPA_B2									
Chamber 3m Chamber		Pre-amplifier T492		Filter Filter 1		Limit Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1852.4MHz									
3.705	-17.2	V	3.0	35.4	1.0	-51.6	-13.0	-38.6	
5.557	-15.5	V	3.0	34.7	1.0	-49.2	-13.0	-36.2	
7.410	-12.8	V	3.0	34.9	1.0	-46.7	-13.0	-33.7	
3.705	-16.1	H	3.0	35.4	1.0	-50.5	-13.0	-37.5	
5.557	-15.8	H	3.0	34.7	1.0	-49.5	-13.0	-36.5	
7.410	-11.3	H	3.0	34.9	1.0	-45.2	-13.0	-32.2	
Mid Ch, 1880MHz									
3.760	-15.1	V	3.0	35.3	1.0	-49.5	-13.0	-36.5	
5.640	-15.5	V	3.0	34.7	1.0	-49.2	-13.0	-36.2	
7.520	-11.6	V	3.0	34.9	1.0	-45.5	-13.0	-32.5	
3.760	-15.4	H	3.0	35.3	1.0	-49.7	-13.0	-36.7	
5.640	-12.7	H	3.0	34.7	1.0	-46.5	-13.0	-33.5	
7.520	-9.5	H	3.0	34.9	1.0	-43.5	-13.0	-30.5	
High Ch, 1907.6MHz									
3.815	-13.8	V	3.0	35.3	1.0	-48.1	-13.0	-35.1	
5.723	-14.7	V	3.0	34.7	1.0	-48.4	-13.0	-35.4	
7.630	-11.8	V	3.0	34.9	1.0	-45.8	-13.0	-32.8	
3.815	-18.6	H	3.0	35.3	1.0	-52.8	-13.0	-39.8	
5.723	-14.1	H	3.0	34.7	1.0	-47.8	-13.0	-34.8	
7.630	-10.2	H	3.0	34.9	1.0	-44.2	-13.0	-31.2	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: Samsung
Project #: 14U19435
Date: 11/20/14
Test Engineer: Jude Semana
Configuration: EUT w/ AC Charger + HS
Mode: Rel99_B2

Chamber
 3m Chamber

Pre-amplifier
 T34 8449B

Filter
 Filter 1

Limit
 Part 24

	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band	Low Ch, 1852.4MHz									
	3.705	-16.0	V	3.0	35.4	1.0	-50.4	-13.0	-37.4	
Band 2	5.557	-15.8	V	3.0	34.7	1.0	-49.6	-13.0	-36.6	
	7.410	-11.7	V	3.0	34.9	1.0	-45.6	-13.0	-32.6	
REL99	3.705	-18.2	H	3.0	35.4	1.0	-52.6	-13.0	-39.6	
	5.557	-15.3	H	3.0	34.7	1.0	-49.1	-13.0	-36.1	
	7.410	-11.1	H	3.0	34.9	1.0	-45.0	-13.0	-32.0	
	Mid Ch, 1880MHz									
	3.760	-16.1	V	3.0	35.3	1.0	-50.5	-13.0	-37.5	
	5.640	-15.7	V	3.0	34.7	1.0	-49.4	-13.0	-36.4	
	7.520	-12.1	V	3.0	34.9	1.0	-46.1	-13.0	-33.1	
	3.760	-18.4	H	3.0	35.3	1.0	-52.7	-13.0	-39.7	
	5.640	-14.7	H	3.0	34.7	1.0	-48.5	-13.0	-35.5	
	7.520	-11.0	H	3.0	34.9	1.0	-44.9	-13.0	-31.9	
	High Ch, 1907.6MHz									
	3.815	-15.7	V	3.0	35.3	1.0	-50.0	-13.0	-37.0	
	5.723	-15.1	V	3.0	34.7	1.0	-48.9	-13.0	-35.9	
	7.630	-11.7	V	3.0	34.9	1.0	-45.6	-13.0	-32.6	
	3.815	-15.0	H	3.0	35.3	1.0	-49.3	-13.0	-36.3	
	5.723	-13.5	H	3.0	34.7	1.0	-47.3	-13.0	-34.3	
	7.630	-10.6	H	3.0	34.9	1.0	-44.5	-13.0	-31.5	

Rev. 03.03.09
Note: No other emissions were detected above the system noise floor.

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14U19435								
Date:		11/20/14								
Test Engineer:		Jude Semana								
Configuration:		EUT w/ AC Charger + HS								
Mode:		HSDPA_B5								
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 22										
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Band Band 5 HSDPA	Low Ch, 826.4MHz									
	1.653	-28.4	V	3.0	37.4	1.0	-64.7	-13.0	-51.7	
	2.479	-22.4	V	3.0	36.4	1.0	-57.8	-13.0	-44.8	
	3.306	-21.6	V	3.0	35.8	1.0	-56.3	-13.0	-43.3	
	1.653	-28.7	H	3.0	37.4	1.0	-65.0	-13.0	-52.0	
	2.479	-24.6	H	3.0	36.4	1.0	-60.0	-13.0	-47.0	
	3.306	-22.1	H	3.0	35.8	1.0	-56.9	-13.0	-43.9	
	Mid Ch, 836.6MHz									
	1.673	-28.1	V	3.0	37.3	1.0	-64.4	-13.0	-51.4	
	2.510	-22.9	V	3.0	36.4	1.0	-58.3	-13.0	-45.3	
	3.346	-22.0	V	3.0	35.8	1.0	-56.7	-13.0	-43.7	
	1.673	-28.3	H	3.0	37.3	1.0	-64.6	-13.0	-51.6	
	2.510	-24.5	H	3.0	36.4	1.0	-59.8	-13.0	-46.8	
	3.346	-21.7	H	3.0	35.8	1.0	-56.5	-13.0	-43.5	
	High Ch, 846.6MHz									
	1.693	-27.9	V	3.0	37.3	1.0	-64.2	-13.0	-51.2	
	2.540	-22.9	V	3.0	36.3	1.0	-58.2	-13.0	-45.2	
	3.386	-21.7	V	3.0	35.7	1.0	-56.4	-13.0	-43.4	
1.693	-28.6	H	3.0	37.3	1.0	-64.9	-13.0	-51.9		
2.540	-24.6	H	3.0	36.3	1.0	-60.0	-13.0	-47.0		
3.386	-22.1	H	3.0	35.7	1.0	-56.8	-13.0	-43.8		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		14U19435							
Date:		11/20/14							
Test Engineer:		Jude Semana							
Configuration:		EUT w/ AC Charger + HS							
Mode:		REL99_B5							
Chamber 3m Chamber Pre-amplifier T348449B Filter Filter 1 Limit Part 22									
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1.653	-28.4	V	3.0	37.4	1.0	-64.8	-13.0	-51.8	
2.479	-22.7	V	3.0	36.4	1.0	-58.1	-13.0	-45.1	
3.306	-21.5	V	3.0	35.8	1.0	-56.3	-13.0	-43.3	
1.653	-29.1	H	3.0	37.4	1.0	-65.5	-13.0	-52.5	
2.479	-24.4	H	3.0	36.4	1.0	-59.8	-13.0	-46.8	
3.306	-21.5	H	3.0	35.8	1.0	-56.3	-13.0	-43.3	
Mid Ch, 836.6MHz									
1.673	-28.5	V	3.0	37.3	1.0	-64.8	-13.0	-51.8	
2.510	-22.7	V	3.0	36.4	1.0	-58.1	-13.0	-45.1	
3.346	-21.6	V	3.0	35.8	1.0	-56.4	-13.0	-43.4	
1.673	-28.4	H	3.0	37.3	1.0	-64.8	-13.0	-51.8	
2.510	-24.4	H	3.0	36.4	1.0	-59.7	-13.0	-46.7	
3.346	-22.0	H	3.0	35.8	1.0	-56.7	-13.0	-43.7	
High Ch, 846.6MHz									
1.693	-28.4	V	3.0	37.3	1.0	-64.7	-13.0	-51.7	
2.540	-23.3	V	3.0	36.3	1.0	-58.7	-13.0	-45.7	
3.386	-21.7	V	3.0	35.7	1.0	-56.4	-13.0	-43.4	
1.693	-28.2	H	3.0	37.3	1.0	-64.5	-13.0	-51.5	
2.540	-24.4	H	3.0	36.3	1.0	-59.8	-13.0	-46.8	
3.386	-22.4	H	3.0	35.7	1.0	-57.1	-13.0	-44.1	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	Samsung									
Project #:	14U19435									
Date:	11/20/14									
Test Engineer:	Jude Semana									
Configuration:	EUT w/ AC Charger + HS									
Mode:	EGPRS1900									
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 24										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM19 00 EGPRS	Low Ch, 1850.2MHz									
	3.700	-29.4	V	3.0	35.4	1.0	-63.8	-13.0	-50.8	
	5.551	-26.8	V	3.0	34.7	1.0	-60.6	-13.0	-47.6	
	7.401	-23.8	V	3.0	34.9	1.0	-57.7	-13.0	-44.7	
	3.700	-28.9	H	3.0	35.4	1.0	-63.3	-13.0	-50.3	
	5.551	-28.0	H	3.0	34.7	1.0	-61.7	-13.0	-48.7	
	7.401	-27.7	H	3.0	34.9	1.0	-61.6	-13.0	-48.6	
	Mid Ch, 1880.0MHz									
	3.760	-27.9	V	3.0	35.3	1.0	-62.2	-13.0	-49.2	
	5.640	-25.6	V	3.0	34.7	1.0	-59.3	-13.0	-46.3	
	7.520	-24.2	V	3.0	34.9	1.0	-58.1	-13.0	-45.1	
	3.760	-32.7	H	3.0	35.3	1.0	-67.0	-13.0	-54.0	
	5.640	-29.9	H	3.0	34.7	1.0	-63.6	-13.0	-50.6	
	7.520	-27.3	H	3.0	34.9	1.0	-61.2	-13.0	-48.2	
	High Ch, 1909.8MHz									
	3.820	-24.5	V	3.0	35.3	1.0	-58.8	-13.0	-45.8	
	5.729	-27.6	V	3.0	34.7	1.0	-61.4	-13.0	-48.4	
	7.639	-27.6	V	3.0	35.0	1.0	-61.5	-13.0	-48.5	
	3.820	-28.7	H	3.0	35.3	1.0	-63.0	-13.0	-50.0	
	5.729	-28.8	H	3.0	34.7	1.0	-62.5	-13.0	-49.5	
7.639	-27.9	H	3.0	35.0	1.0	-61.9	-13.0	-48.9		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	Samsung									
Project #:	14U19435									
Date:	11/20/14									
Test Engineer:	Jude Semana									
Configuration:	EUT w/ AC Charger + HS									
Mode:	GPRS1900									
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 24										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM1900 GPRS	Low Ch, 1850.2MHz									
	3.700	-30.8	V	3.0	35.4	1.0	-65.2	-13.0	-52.2	
	5.551	-27.3	V	3.0	34.7	1.0	-61.0	-13.0	-48.0	
	7.401	-24.4	V	3.0	34.9	1.0	-58.3	-13.0	-45.3	
	3.700	-31.9	H	3.0	35.4	1.0	-66.3	-13.0	-53.3	
	5.551	-28.7	H	3.0	34.7	1.0	-62.4	-13.0	-49.4	
	7.401	-27.3	H	3.0	34.9	1.0	-61.3	-13.0	-48.3	
	Mid Ch, 1880.0MHz									
	3.760	-28.8	V	3.0	35.3	1.0	-63.2	-13.0	-50.2	
	5.640	-25.4	V	3.0	34.7	1.0	-59.1	-13.0	-46.1	
	7.520	-24.2	V	3.0	34.9	1.0	-58.2	-13.0	-45.2	
	3.760	-32.0	H	3.0	35.3	1.0	-66.3	-13.0	-53.3	
	5.640	-30.0	H	3.0	34.7	1.0	-63.7	-13.0	-50.7	
	7.520	-27.2	H	3.0	34.9	1.0	-61.1	-13.0	-48.1	
	High Ch, 1909.8MHz									
	3.820	-24.7	V	3.0	35.3	1.0	-59.0	-13.0	-46.0	
	5.729	-27.2	V	3.0	34.7	1.0	-60.9	-13.0	-47.9	
	7.639	-27.7	V	3.0	35.0	1.0	-61.6	-13.0	-48.6	
3.820	-29.4	H	3.0	35.3	1.0	-63.7	-13.0	-50.7		
5.729	-28.8	H	3.0	34.7	1.0	-62.6	-13.0	-49.6		
7.639	-27.8	H	3.0	35.0	1.0	-61.7	-13.0	-48.7		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	Samsung									
Project #:	14U19435									
Date:	11/20/14									
Test Engineer:	Jude Semana									
Configuration:	EUT w/ AC Charger + HS									
Mode:	EGPRS850 Harm									
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 22										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM850 EGPRS	Low Ch, 824.2MHz									
	1.648	-29.2	V	3.0	37.4	1.0	-65.6	-13.0	-52.6	
	2.473	-22.3	V	3.0	36.4	1.0	-57.7	-13.0	-44.7	
	3.297	-21.7	V	3.0	35.8	1.0	-56.5	-13.0	-43.5	
	1.648	-31.0	H	3.0	37.4	1.0	-67.3	-13.0	-54.3	
	2.473	-25.8	H	3.0	36.4	1.0	-61.2	-13.0	-48.2	
	3.297	-25.1	H	3.0	35.8	1.0	-59.9	-13.0	-46.9	
	Mid Ch, 836.6MHz									
	1.673	-30.1	V	3.0	37.3	1.0	-66.5	-13.0	-53.5	
	2.510	-23.9	V	3.0	36.4	1.0	-59.3	-13.0	-46.3	
	3.346	-24.5	V	3.0	35.8	1.0	-59.2	-13.0	-46.2	
	1.673	-29.7	H	3.0	37.3	1.0	-66.1	-13.0	-53.1	
	2.510	-25.7	H	3.0	36.4	1.0	-61.1	-13.0	-48.1	
	3.346	-25.6	H	3.0	35.8	1.0	-60.3	-13.0	-47.3	
	High Ch, 848.8MHz									
	1.698	-28.2	V	3.0	37.3	1.0	-64.5	-13.0	-51.5	
	2.547	-22.7	V	3.0	36.3	1.0	-58.0	-13.0	-45.0	
	3.395	-21.4	V	3.0	35.7	1.0	-56.1	-13.0	-43.1	
1.698	-28.8	H	3.0	37.3	1.0	-65.1	-13.0	-52.1		
2.547	-24.4	H	3.0	36.3	1.0	-59.8	-13.0	-46.8		
3.395	-21.8	H	3.0	35.7	1.0	-56.5	-13.0	-43.5		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	Samsung									
Project #:	14U19435									
Date:	11/20/14									
Test Engineer:	Jude Semana									
Configuration:	EUT w/ AC Charger + HS									
Mode:	GPRS 850									
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 22										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM850 GPRS	Low Ch, 824.2MHz									
	1.648	-29.3	V	3.0	37.4	1.0	-65.7	-13.0	-52.7	
	2.473	-22.5	V	3.0	36.4	1.0	-57.9	-13.0	-44.9	
	3.297	-21.7	V	3.0	35.8	1.0	-56.5	-13.0	-43.5	
	1.648	-30.6	H	3.0	37.4	1.0	-67.0	-13.0	-54.0	
	2.473	-25.9	H	3.0	36.4	1.0	-61.3	-13.0	-48.3	
	3.297	-24.4	H	3.0	35.8	1.0	-59.2	-13.0	-46.2	
	Mid Ch, 836.6MHz									
	1.673	-29.6	V	3.0	37.3	1.0	-65.9	-13.0	-52.9	
	2.510	-24.0	V	3.0	36.4	1.0	-59.3	-13.0	-46.3	
	3.346	-25.1	V	3.0	35.8	1.0	-59.8	-13.0	-46.8	
	1.673	-30.3	H	3.0	37.3	1.0	-66.7	-13.0	-53.7	
	2.510	-25.6	H	3.0	36.4	1.0	-61.0	-13.0	-48.0	
	3.346	-25.2	H	3.0	35.8	1.0	-60.0	-13.0	-47.0	
	High Ch, 848.8MHz									
	1.698	-27.7	V	3.0	37.3	1.0	-64.0	-13.0	-51.0	
	2.547	-23.5	V	3.0	36.3	1.0	-58.8	-13.0	-45.8	
	3.395	-12.8	V	3.0	35.7	1.0	-47.5	-13.0	-34.5	
1.698	-28.1	H	3.0	37.3	1.0	-64.4	-13.0	-51.4		
2.547	-24.7	H	3.0	36.3	1.0	-60.1	-13.0	-47.1		
3.395	-21.8	H	3.0	35.7	1.0	-56.5	-13.0	-43.5		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14U19435								
Date:		11/21/14								
Test Engineer:		Jude Semana								
Configuration:		EUT w/ AC Adaptor + HS, X-pos								
Mode:		LTE5 10MHz 16QAM HARM								
Chamber		Pre-amplifier		Filter		Limit				
3m Chamber		T34 8449B		Filter 1		Part 22				
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 10MHz 16QAM	Low Ch, 829MHz									
	1.658	-29.1	V	3.0	37.4	1.0	-65.5	-13.0	-52.5	
	2.487	-22.8	V	3.0	36.4	1.0	-58.2	-13.0	-45.2	
	3.316	-22.1	V	3.0	35.8	1.0	-56.9	-13.0	-43.9	
	1.658	-29.5	H	3.0	37.4	1.0	-65.8	-13.0	-52.8	
	2.487	-24.6	H	3.0	36.4	1.0	-60.0	-13.0	-47.0	
	3.316	-22.4	H	3.0	35.8	1.0	-57.2	-13.0	-44.2	
	Mid Ch, 836.5MHz									
	1.673	-28.7	V	3.0	37.3	1.0	-65.0	-13.0	-52.0	
	2.510	-23.0	V	3.0	36.4	1.0	-58.4	-13.0	-45.4	
	3.346	-21.0	V	3.0	35.8	1.0	-55.8	-13.0	-42.8	
	1.673	-27.6	H	3.0	37.3	1.0	-63.9	-13.0	-50.9	
	2.510	-25.1	H	3.0	36.4	1.0	-60.5	-13.0	-47.5	
	3.346	-20.1	H	3.0	35.8	1.0	-54.9	-13.0	-41.9	
	High Ch, 844MHz									
	1.688	-28.1	V	3.0	37.3	1.0	-64.4	-13.0	-51.4	
	2.532	-22.9	V	3.0	36.3	1.0	-58.2	-13.0	-45.2	
	3.376	-20.3	V	3.0	35.7	1.0	-55.0	-13.0	-42.0	
	1.688	-28.6	H	3.0	37.3	1.0	-64.9	-13.0	-51.9	
	2.532	-24.4	H	3.0	36.3	1.0	-59.8	-13.0	-46.8	
	3.376	-20.1	H	3.0	35.7	1.0	-54.8	-13.0	-41.8	
	Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14U19435								
Date:		11/21/14								
Test Engineer:		Jude Semana								
Configuration:		EUT w/ AC Adaptor + HS, X-pos								
Mode:		LTE5 10MHz QPSK HARM								
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter 1 Limit Part 22										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 10MHz QPSK	Low Ch, 829MHz									
	1.658	-28.4	V	3.0	37.4	1.0	-64.8	-13.0	-51.8	
	2.487	-22.7	V	3.0	36.4	1.0	-58.1	-13.0	-45.1	
	3.316	-21.8	V	3.0	35.8	1.0	-56.6	-13.0	-43.6	
	1.658	-29.0	H	3.0	37.4	1.0	-65.4	-13.0	-52.4	
	2.487	-24.0	H	3.0	36.4	1.0	-59.4	-13.0	-46.4	
	3.316	-22.2	H	3.0	35.8	1.0	-57.0	-13.0	-44.0	
	Mid Ch, 836.5MHz									
	1.673	-28.3	V	3.0	37.3	1.0	-64.7	-13.0	-51.7	
	2.510	-22.6	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
	3.346	-21.8	V	3.0	35.8	1.0	-56.6	-13.0	-43.6	
	1.673	-26.7	H	3.0	37.3	1.0	-63.0	-13.0	-50.0	
	2.510	-25.0	H	3.0	36.4	1.0	-60.3	-13.0	-47.3	
	3.346	-20.2	H	3.0	35.8	1.0	-54.9	-13.0	-41.9	
	High Ch, 848.3MHz									
	1.688	-27.4	V	3.0	37.3	1.0	-63.7	-13.0	-50.7	
	2.532	-22.6	V	3.0	36.3	1.0	-57.9	-13.0	-44.9	
	3.376	-18.7	V	3.0	35.7	1.0	-53.4	-13.0	-40.4	
	1.688	-27.2	H	3.0	37.3	1.0	-63.5	-13.0	-50.5	
	2.532	-24.2	H	3.0	36.3	1.0	-59.5	-13.0	-46.5	
3.376	-19.9	H	3.0	35.7	1.0	-54.7	-13.0	-41.7		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14U19435								
Date:		11/20/14								
Test Engineer:		J. Hsu								
Configuration:		EUT X-pos/ AC Adapter/ Headset								
Mode:		LTE5 5M 16QAM								
Chamber Pre-amplifier Filter Limit 5m Chamber B T34 8449B Filter 1 Part 22										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 5MHz 16QAM	Low Ch, 826.5MHz									
	1.653	-28.3	V	3.0	37.4	1.0	-64.7	-13.0	-51.7	
	2.480	-22.5	V	3.0	36.4	1.0	-57.9	-13.0	-44.9	
	3.306	-21.8	V	3.0	35.8	1.0	-56.6	-13.0	-43.6	
	1.653	-28.0	H	3.0	37.4	1.0	-64.4	-13.0	-51.4	
	2.480	-25.3	H	3.0	36.4	1.0	-60.7	-13.0	-47.7	
	3.306	-22.3	H	3.0	35.8	1.0	-57.0	-13.0	-44.0	
	Mid Ch, 836.5MHz									
	1.673	-26.9	V	3.0	37.3	1.0	-63.2	-13.0	-50.2	
	2.510	-23.6	V	3.0	36.4	1.0	-59.0	-13.0	-46.0	
	3.346	-21.5	V	3.0	35.8	1.0	-56.3	-13.0	-43.3	
	1.673	-23.8	H	3.0	37.3	1.0	-60.2	-13.0	-47.2	
	2.510	-25.0	H	3.0	36.4	1.0	-60.3	-13.0	-47.3	
	3.346	-21.8	H	3.0	35.8	1.0	-56.6	-13.0	-43.6	
	High Ch, 846.5MHz									
	1.693	-28.5	V	3.0	37.3	1.0	-64.8	-13.0	-51.8	
	2.540	-24.6	V	3.0	36.3	1.0	-59.9	-13.0	-46.9	
	3.386	-22.5	V	3.0	35.7	1.0	-57.2	-13.0	-44.2	
	1.693	-27.4	H	3.0	37.3	1.0	-63.7	-13.0	-50.7	
	2.540	-25.8	H	3.0	36.3	1.0	-61.1	-13.0	-48.1	
	3.386	-21.9	H	3.0	35.7	1.0	-56.6	-13.0	-43.6	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company:		Samsung								
Project #:		14U19435								
Date:		11/20/14								
Test Engineer:		J. Hsu								
Configuration:		EUT X-pos/ AC Adapter/ Headset								
Mode:		LTE5 5M QPSK								
Chamber 5m Chamber B Pre-amplifier T34 8449B Filter Filter 1 Limit Part 22										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 5MHz QPSK	Low Ch, 826.5MHz									
	1.653	-28.4	V	3.0	37.4	1.0	-64.8	-13.0	-51.8	
	2.480	-23.1	V	3.0	36.4	1.0	-58.5	-13.0	-45.5	
	3.306	-21.4	V	3.0	35.8	1.0	-56.2	-13.0	-43.2	
	1.653	-28.2	H	3.0	37.4	1.0	-64.6	-13.0	-51.6	
	2.480	-24.8	H	3.0	36.4	1.0	-60.2	-13.0	-47.2	
	3.306	-22.6	H	3.0	35.8	1.0	-57.4	-13.0	-44.4	
	Mid Ch, 836.5MHz									
	1.673	-26.5	V	3.0	37.3	1.0	-62.8	-13.0	-49.8	
	2.510	-24.0	V	3.0	36.4	1.0	-59.3	-13.0	-46.3	
	3.346	-22.5	V	3.0	35.8	1.0	-57.3	-13.0	-44.3	
	1.673	-23.2	H	3.0	37.3	1.0	-59.6	-13.0	-46.6	
	2.510	-25.5	H	3.0	36.4	1.0	-60.8	-13.0	-47.8	
	3.346	-22.8	H	3.0	35.8	1.0	-57.6	-13.0	-44.6	
	High Ch, 846.5MHz									
	1.693	-28.4	V	3.0	37.3	1.0	-64.7	-13.0	-51.7	
	2.540	-23.8	V	3.0	36.3	1.0	-59.2	-13.0	-46.2	
	3.386	-22.0	V	3.0	35.7	1.0	-56.7	-13.0	-43.7	
	1.693	-26.8	H	3.0	37.3	1.0	-63.1	-13.0	-50.1	
	2.540	-25.8	H	3.0	36.3	1.0	-61.1	-13.0	-48.1	
	3.386	-22.6	H	3.0	35.7	1.0	-57.3	-13.0	-44.3	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company:	Samsung									
Project #:	14U19435									
Date:	11/20/14									
Test Engineer:	Jude Semana									
Configuration:	EUT w/ AC Adaptor + HS, X-pos									
Mode:	LTE5 16QAM 3MHz Harm									
Chamber 5m Chamber B Pre-amplifier T34 8449B Filter Filter 1 Limit Part 22										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 3MHz 16QAM	Low Ch, 825.5MHz									
	1.651	-27.8	V	3.0	37.4	1.0	-64.1	-13.0	-51.1	
	2.477	-23.7	V	3.0	36.4	1.0	-59.1	-13.0	-46.1	
	3.302	-20.2	V	3.0	35.8	1.0	-55.0	-13.0	-42.0	
	1.651	-27.2	H	3.0	37.4	1.0	-63.6	-13.0	-50.6	
	2.477	-25.8	H	3.0	36.4	1.0	-61.2	-13.0	-48.2	
	3.302	-19.8	H	3.0	35.8	1.0	-54.6	-13.0	-41.6	
	Mid Ch, 836.5MHz									
	1.673	-27.5	V	3.0	37.3	1.0	-63.8	-13.0	-50.8	
	2.510	-23.4	V	3.0	36.4	1.0	-58.8	-13.0	-45.8	
	3.346	-20.2	V	3.0	35.8	1.0	-55.0	-13.0	-42.0	
	1.673	-27.0	H	3.0	37.3	1.0	-63.4	-13.0	-50.4	
	2.510	-25.1	H	3.0	36.4	1.0	-60.4	-13.0	-47.4	
	3.346	-20.1	H	3.0	35.8	1.0	-54.8	-13.0	-41.8	
	High Ch, 847.5MHz									
	1.695	-27.6	V	3.0	37.3	1.0	-63.9	-13.0	-50.9	
	2.543	-22.6	V	3.0	36.3	1.0	-57.9	-13.0	-44.9	
	3.390	-19.9	V	3.0	35.7	1.0	-54.6	-13.0	-41.6	
	1.695	-27.6	H	3.0	37.3	1.0	-63.9	-13.0	-50.9	
	2.543	-24.7	H	3.0	36.3	1.0	-60.1	-13.0	-47.1	
3.390	-19.6	H	3.0	35.7	1.0	-54.4	-13.0	-41.4		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company:	Samsung									
Project #:	14U19435									
Date:	11/20/14									
Test Engineer:	Jude Semana									
Configuration:	EUT w/ AC Adaptor + HS, X-pos									
Mode:	LTE5 QPSK 3MHz Harm									
Chamber 3m Chamber Pre-amplifier T34 8449B Filter Filter1 Limit Part 22										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 3MHz QPSK	Low Ch, 825.5MHz									
	1.651	-27.3	V	3.0	37.4	1.0	-63.6	-13.0	-50.6	
	2.477	-23.8	V	3.0	36.4	1.0	-59.2	-13.0	-46.2	
	3.302	-20.6	V	3.0	35.8	1.0	-55.4	-13.0	-42.4	
	1.651	-27.8	H	3.0	37.4	1.0	-64.2	-13.0	-51.2	
	2.477	-24.9	H	3.0	36.4	1.0	-60.3	-13.0	-47.3	
	3.302	-20.6	H	3.0	35.8	1.0	-55.4	-13.0	-42.4	
	Mid Ch, 836.5MHz									
	1.673	-27.4	V	3.0	37.3	1.0	-63.7	-13.0	-50.7	
	2.510	-23.4	V	3.0	36.4	1.0	-58.7	-13.0	-45.7	
	3.346	-20.8	V	3.0	35.8	1.0	-55.6	-13.0	-42.6	
	1.673	-27.7	H	3.0	37.3	1.0	-64.0	-13.0	-51.0	
	2.510	-25.0	H	3.0	36.4	1.0	-60.4	-13.0	-47.4	
	3.346	-19.8	H	3.0	35.8	1.0	-54.5	-13.0	-41.5	
	High Ch, 847.5MHz									
	1.695	-27.6	V	3.0	37.3	1.0	-63.9	-13.0	-50.9	
	2.543	-22.4	V	3.0	36.3	1.0	-57.8	-13.0	-44.8	
	3.390	-20.1	V	3.0	35.7	1.0	-54.8	-13.0	-41.8	
1.695	-27.2	H	3.0	37.3	1.0	-63.5	-13.0	-50.5		
2.543	-24.2	H	3.0	36.3	1.0	-59.5	-13.0	-46.5		
3.390	-20.3	H	3.0	35.7	1.0	-55.0	-13.0	-42.0		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										

UL Verification Services Above 1GHz High Frequency Substitution Measurement										
Company: Project #: Date: Test Engineer: Configuration: Mode:		Samsung 14U19435 11/20/14 Jude Semana EUT w/ AC Adaptor + HS, X-pos LTE5 1.4MHz QPSK HARM								
		Chamber	Pre-amplifier	Filter	Limit					
		3m Chamber	T34 8449B	Filter 1	Part 22					
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
LTE5 1.4MHz QPSK	Low Ch, 824.7MHz									
	1.649	-28.4	V	3.0	37.4	1.0	-64.8	-13.0	-51.8	
	2.474	-22.7	V	3.0	36.4	1.0	-58.1	-13.0	-45.1	
	3.299	-21.9	V	3.0	35.8	1.0	-56.7	-13.0	-43.7	
	1.649	-29.3	H	3.0	37.4	1.0	-65.7	-13.0	-52.7	
	2.474	-24.1	H	3.0	36.4	1.0	-59.5	-13.0	-46.5	
	3.299	-22.3	H	3.0	35.8	1.0	-57.1	-13.0	-44.1	
	Mid Ch, 836.5MHz									
	1.673	-28.4	V	3.0	37.3	1.0	-64.8	-13.0	-51.8	
	2.510	-22.7	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
	3.346	-21.8	V	3.0	35.8	1.0	-56.6	-13.0	-43.6	
	1.673	-26.7	H	3.0	37.3	1.0	-63.1	-13.0	-50.1	
	2.510	-24.9	H	3.0	36.4	1.0	-60.2	-13.0	-47.2	
	3.346	-20.3	H	3.0	35.8	1.0	-55.0	-13.0	-42.0	
	High Ch, 848.3MHz									
	1.697	-27.3	V	3.0	37.3	1.0	-63.6	-13.0	-50.6	
	2.545	-22.6	V	3.0	36.3	1.0	-57.9	-13.0	-44.9	
	3.393	-19.0	V	3.0	35.7	1.0	-53.7	-13.0	-40.7	
1.697	-27.2	H	3.0	37.3	1.0	-63.5	-13.0	-50.5		
2.545	-24.2	H	3.0	36.3	1.0	-59.5	-13.0	-46.5		
3.393	-19.5	H	3.0	35.7	1.0	-54.2	-13.0	-41.2		
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.										