


60GHz - 90GHz

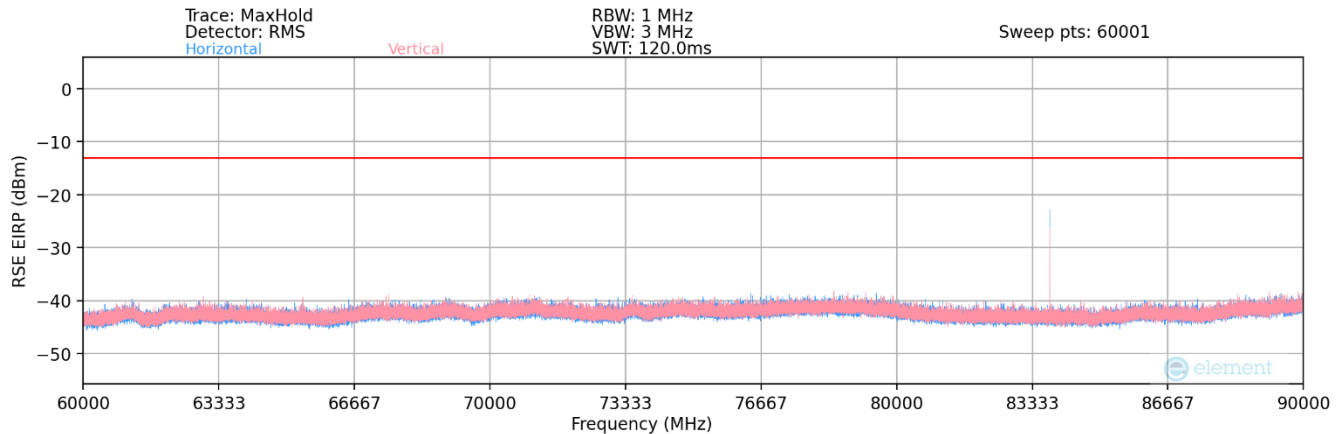

Plot 7-96. Ant1 - n261 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82575.00	Low	50	2Tx	QPSK	H	166	333	-24.20	-13.00	-11.20
83774.88	Mid	50	2Tx	QPSK	H	173	277	-21.74	-13.00	-8.74
84974.76	High	50	2Tx	QPSK	H	167	322	-21.65	-13.00	-8.65


Table 7-46. Ant1 - n261 Radiated Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 90 of 142

90GHz - 100GHz

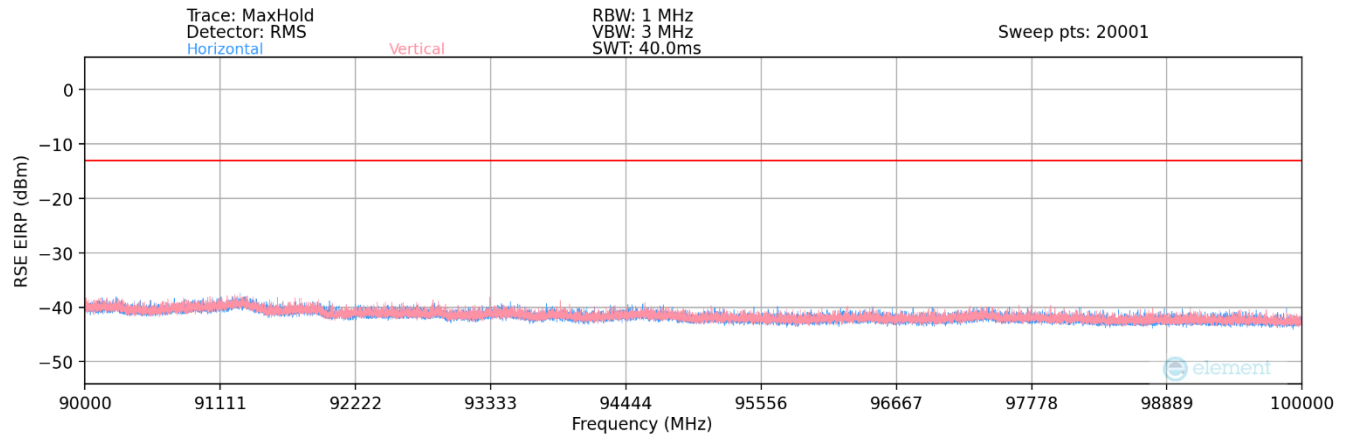

Plot 7-97. Ant1 - n261 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx - EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
91329.85	Low	50	2Tx	QPSK	H	-	-	-44.92	-13.00	-31.92
95076.27	Mid	50	2Tx	QPSK	H	-	-	-47.27	-13.00	-34.27
99486.59	High	50	2Tx	QPSK	H	-	-	-47.59	-13.00	-34.59

Table 7-47. Ant1 - n261 Radiated Spurious Emissions Table (90GHz - 100GHz)


Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 91 of 142

Band n260 – Ant1

30MHz - 1GHz

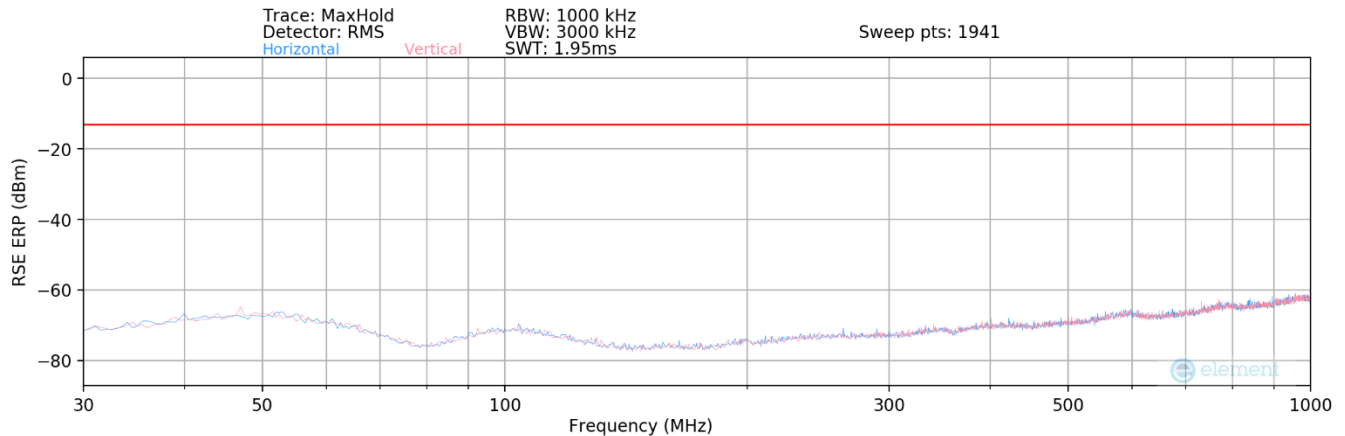

Plot 7-98. Ant1 - n260 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions ERP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE ERP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE ERP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8 - 2.15 \text{ (dB)}$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
114.31	Low	50	2Tx	QPSK	H	-	-	-81.31	-13.00	-68.31
411.36	Mid	50	2Tx	QPSK	H	-	-	-78.53	-13.00	-65.53
730.71	High	50	2Tx	QPSK	H	-	-	-74.98	-13.00	-61.98


Table 7-48. Ant1 - n260 Radiated Spurious Emissions Table (30MHz - 1GHz)

Notes

The RSE ERP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 92 of 142

1GHz - 18GHz

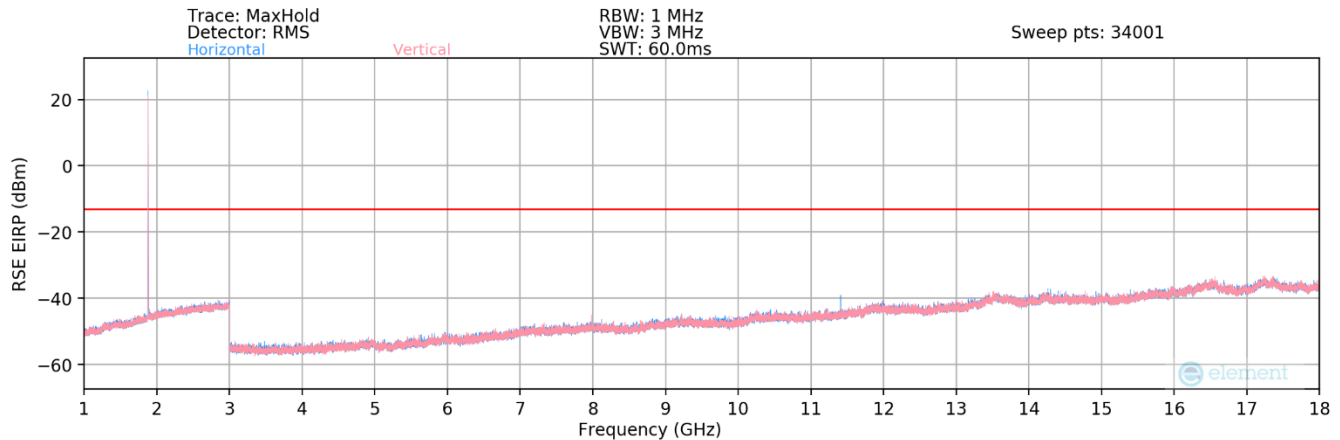

Plot 7-99. Ant1 - n260 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 3 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
11214.68	Low	50	2Tx	QPSK	H	2	272	-42.97	-13.00	-29.97
11409.82	Mid	50	2Tx	QPSK	H	7	133	-43.99	-13.00	-30.99
11707.32	High	50	2Tx	QPSK	H	8	124	-40.46	-13.00	-27.46


Table 7-49. Ant1 - n260 Radiated Spurious Emissions Table (1GHz - 18GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 3 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 93 of 142

18GHz - 37GHz

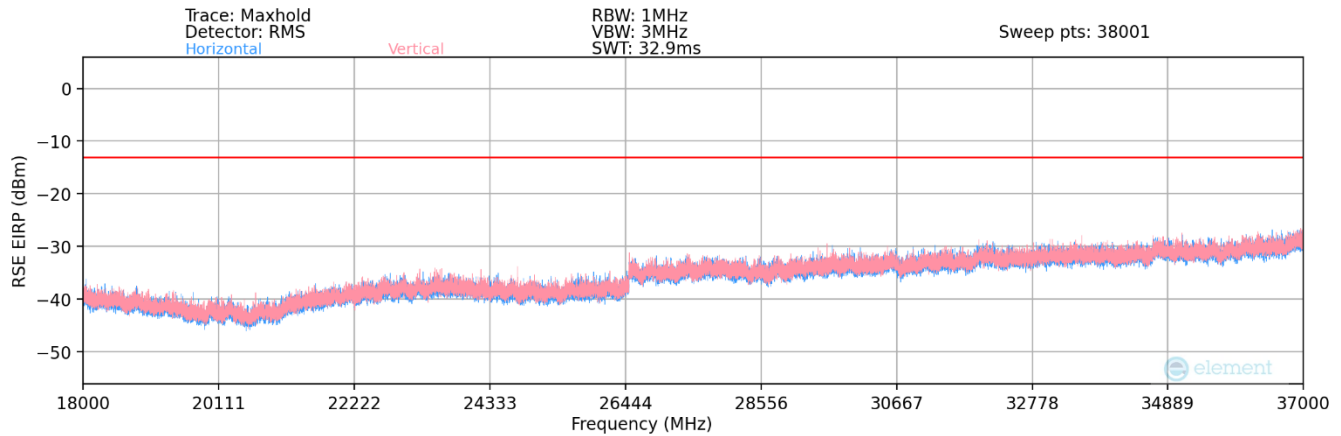

Plot 7-100. Ant1 - n260 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
23250.81	Low	50	2Tx	QPSK	H	-	-	-38.66	-13.00	-25.66
29896.04	Mid	50	2Tx	QPSK	H	-	-	-36.17	-13.00	-23.17
35479.20	High	50	2Tx	QPSK	H	-	-	-32.54	-13.00	-19.54


Table 7-50. Ant1 - n260 Radiated Spurious Emissions Table (18GHz - 37GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, and cable losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 94 of 142

40GHz - 60GHz

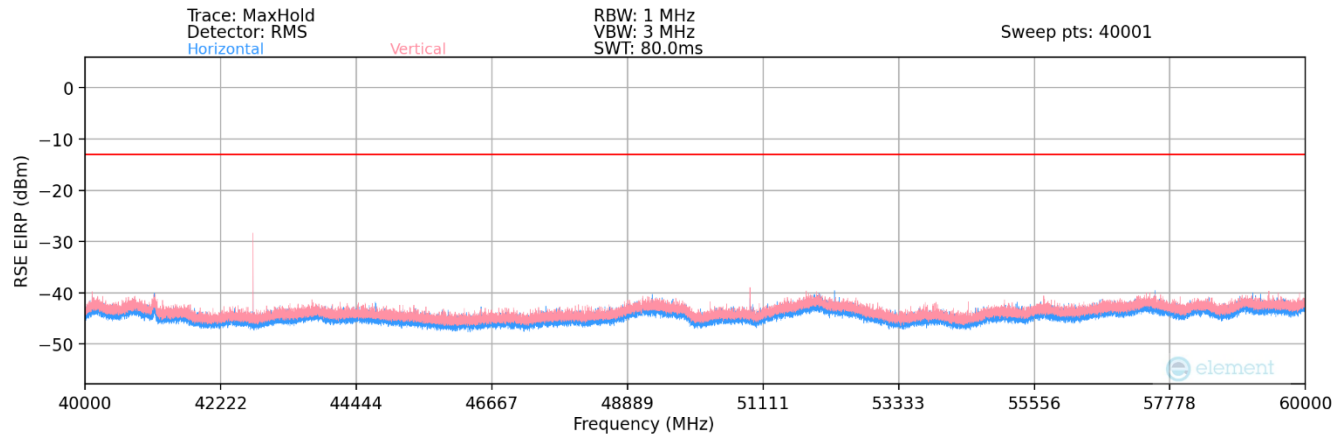

Plot 7-101. Ant1 - n260 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
40393.90	Low	50	2Tx	QPSK	H	104	259	-30.62	-13.00	-17.62
42751.60	Mid	50	2Tx	QPSK	H	108	259	-25.06	-13.00	-12.06
44819.00	High	50	2Tx	QPSK	H	194	329	-27.70	-13.00	-14.70


Table 7-51. Ant1 - n260 Radiated Spurious Emissions Table (40GHz - 60GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1.5 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 95 of 142

60GHz - 90GHz

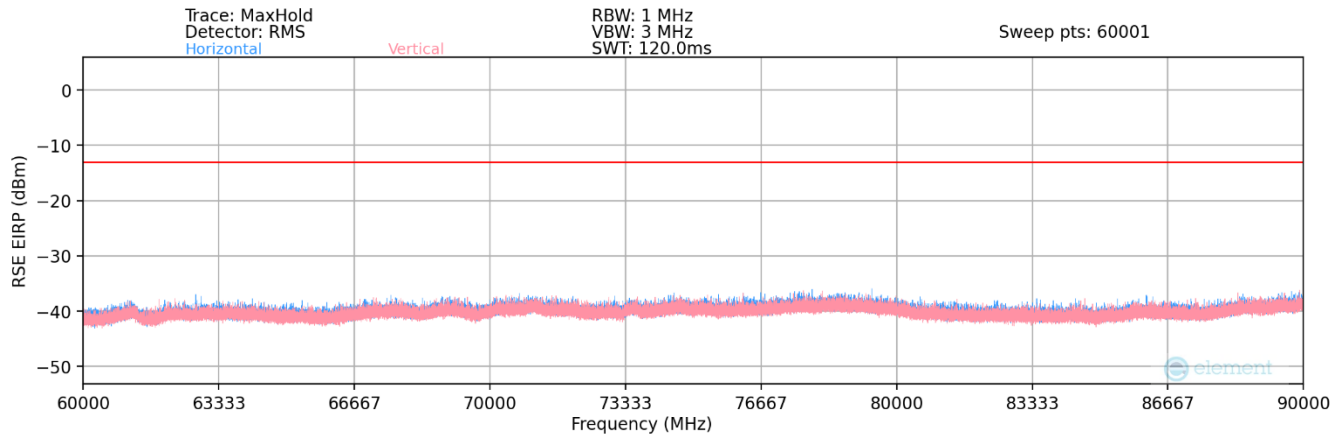

Plot 7-102. Ant1 - n260 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74050.08	Low	50	2Tx	QPSK	H	201	101	-42.96	-13.00	-29.96
76999.92	Mid	50	2Tx	QPSK	H	202	96	-38.88	-13.00	-25.88
79950.00	High	50	2Tx	QPSK	V	161	182	-35.15	-13.00	-22.15


Table 7-52. Ant1 - n260 Radiated Spurious Emissions Table (60GHz - 90GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 96 of 142

90GHz - 140GHz

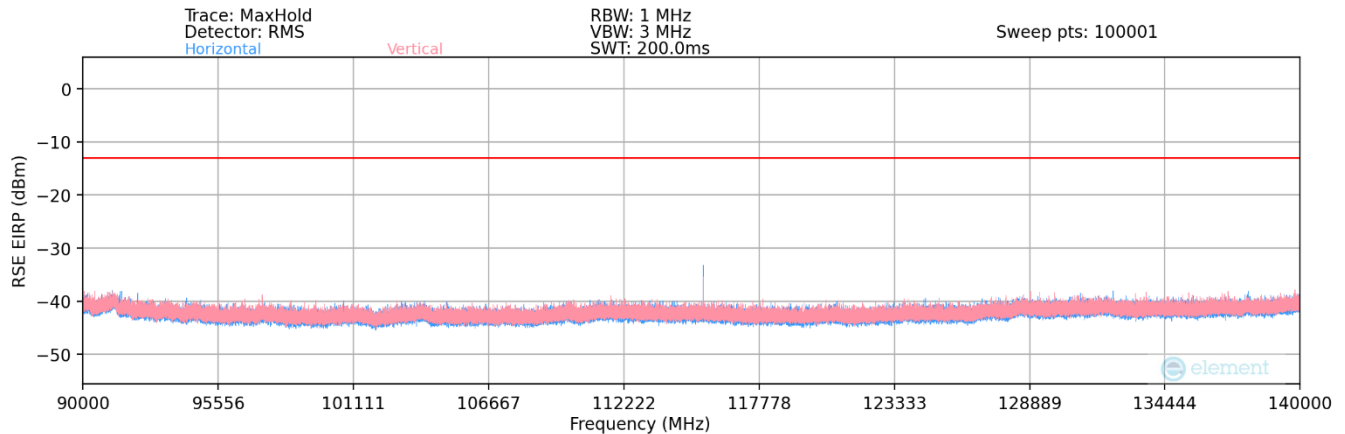

Plot 7-103. Ant1 - n260 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111075.12	Low	50	2Tx	QPSK	H	50	328	-39.35	-13.00	-26.35
115499.88	Mid	50	2Tx	QPSK	H	134	325	-29.30	-13.00	-16.30
119925.00	High	50	2Tx	QPSK	V	266	32	-30.77	-13.00	-17.77


Table 7-53. Ant1 - n260 Radiated Spurious Emissions Table (90GHz - 140GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 97 of 142

140GHz - 170GHz

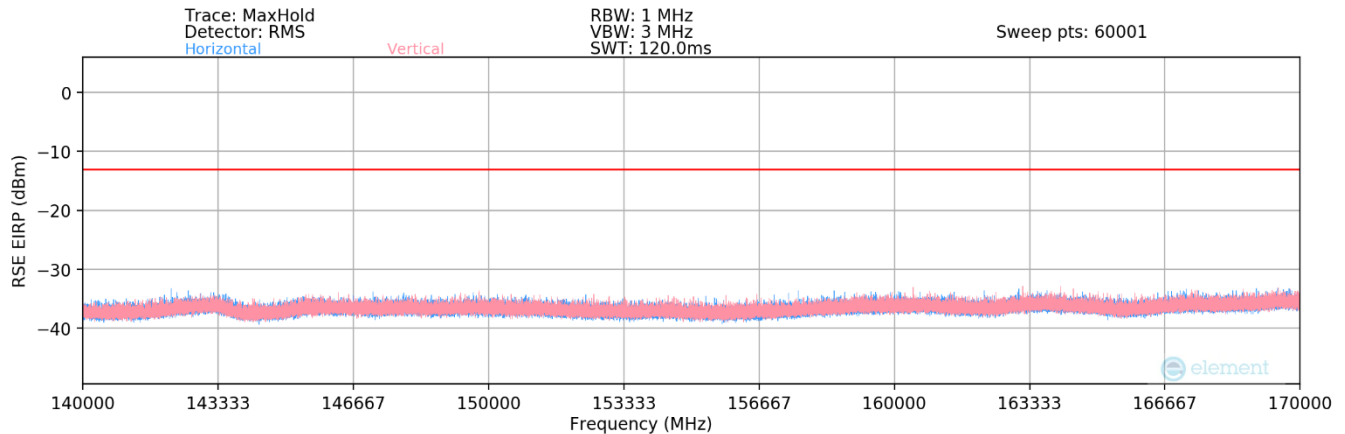

Plot 7-104. Ant1 - n260 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
148100.16	Low	50	2Tx	QPSK	H	-	-	-39.90	-13.00	-26.90
153999.84	Mid	50	2Tx	QPSK	H	-	-	-40.39	-13.00	-27.39
159900.00	High	50	2Tx	QPSK	V	-	-	-39.52	-13.00	-26.52


Table 7-54. Ant1 - n260 Radiated Spurious Emissions Table (140GHz - 170GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 98 of 142

170GHz - 200GHz

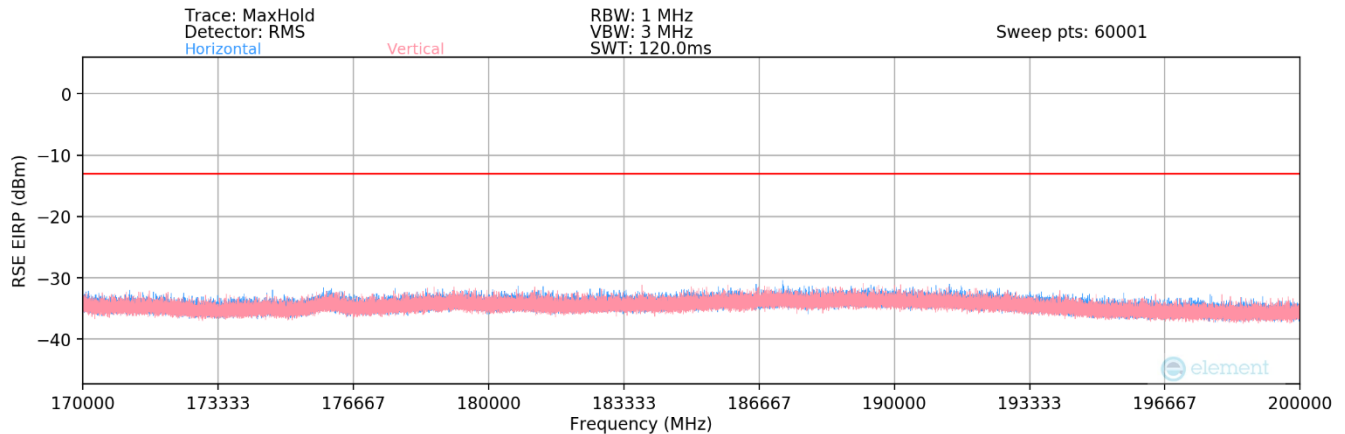

Plot 7-105. Ant1 - n260 Radiated Spurious Plot (1CC QPSK Mid Channel 2Tx – EN-DC Anchor Band 2)

Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
174277.66	Low	50	2Tx	QPSK	H	-	-	-39.70	-13.00	-26.70
184985.71	Mid	50	2Tx	QPSK	H	-	-	-38.64	-13.00	-25.64
196834.79	High	50	2Tx	QPSK	V	-	-	-40.13	-13.00	-27.13

Table 7-55. Ant1 - n260 Radiated Spurious Emissions Table (170GHz - 200GHz)

Notes

The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 99 of 142

7.5 Band Edge Emissions

Test Overview

All out of band emissions are measured in a radiated setup while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All modulations were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is -13dBm/1MHz. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.

Test Procedure Used

ANSI C63.26-2015 Section 5 and ANSI C63.26-2015 Section 6.4
KDB 842590 D01 – Section 4.4.2.4

Test Settings

1. Start and stop frequency were set such that both upper and lower band edges are measured.
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 1MHz
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning.
- 2) Band Edge emissions were measured at a 1 meter distance.
- 3) The spectrum analyzer for each measurement shows an offset value that was determined using the measurement antenna factor, cable loss, far field measurement distance. A sample calculation is shown on the following page.
- 4) This device supports transmission of H-polarized and V-polarized beams from the antenna array in both CP-OFDM and DFT-s-OFDM transmission schemes. SISO and MIMO operation is also supported for some configurations. As part of the testing, all modes were fully investigated and only the worst case has been included in this report.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 100 of 142

- 5) All combinations of 1CC and 2CC were fully investigated, and only the worst case has been included in this report.
- 6) All 2CC cases were investigated with PCC prioritization feature, which has the higher power PCC at the band edge for the worst case.
- 7) Unless otherwise specified, the radiated band edge plots in this section display the worst case EIRP measurements for the indicated bandwidth–component carrier configuration.
- 8) The plots in this section that display Total Radiated Power (TRP) were obtained from measurements that were performed in accordance with the guidance of Section 4.4.2.4 of KDB 842590 D01 for the Spherical Method.

Sample Analyzer Offset Calculation (at 27.5GHz)

Measurement Antenna Factor = 40.70dB/m

Cable Loss = 8.82dB


Analyzer Offset (dB) = AF (dB/m) + CL (dB) + 107 + 20log₁₀(D) – 104.8dB, where D = 1m

$$= 40.70\text{dB/m} + 8.82\text{dB} + 107 + 20\log_{10}(1\text{m}) - 104.8\text{dB}$$


$$= 51.72\text{dB}$$

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 101 of 142

Band n258-R1 – Worst-Case

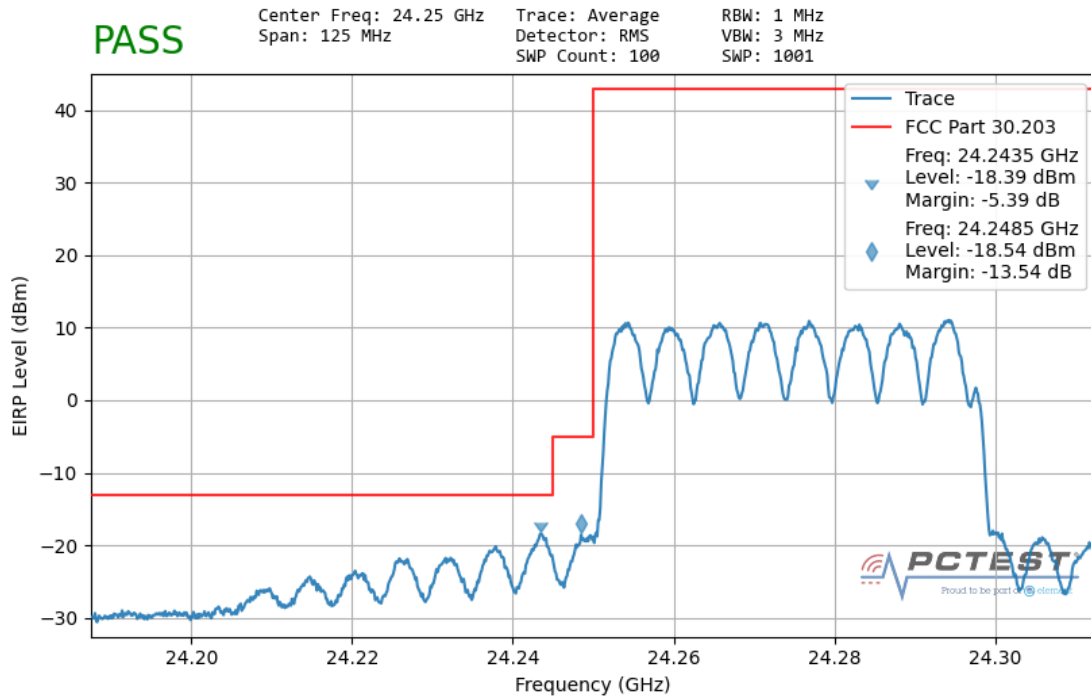


Plot 7-106. Ant1 Lower Band Edge (50MHz-1CC – QPSK Full RB)

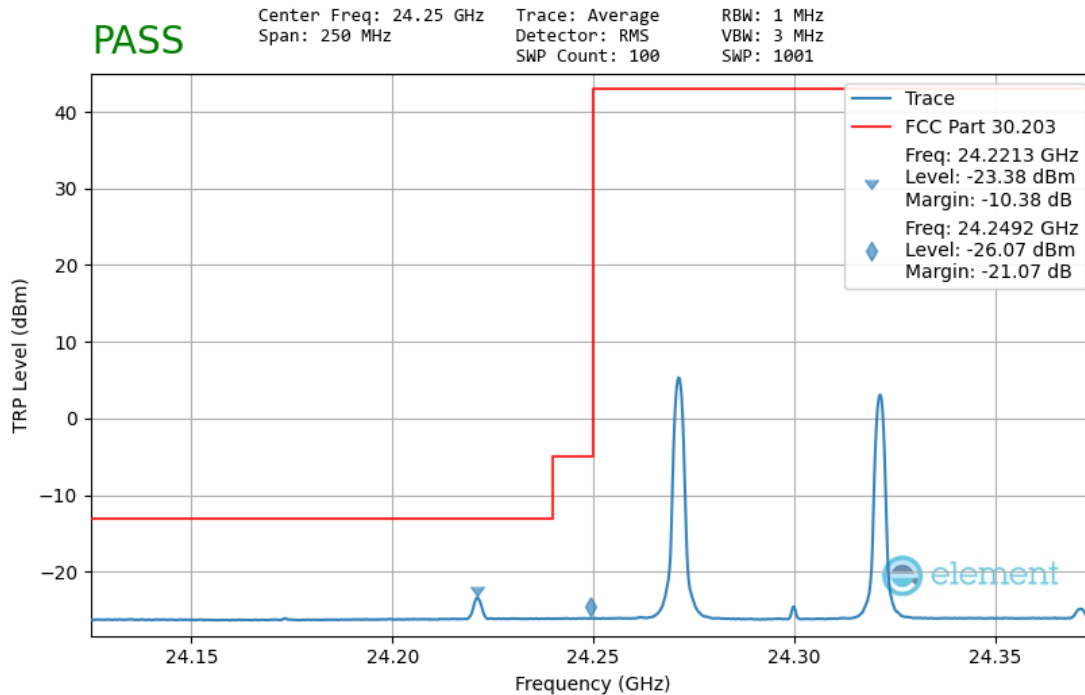


Plot 7-107. Ant1 Lower Band Edge – TRP (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 102 of 142

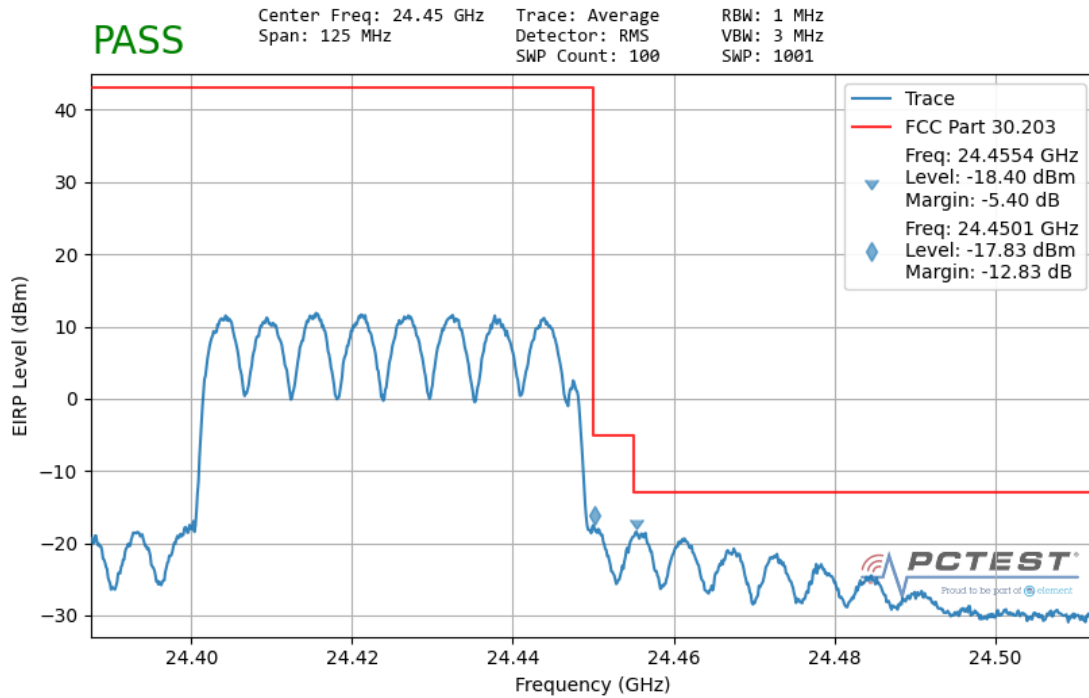


Plot 7-108. Ant1 Upper Band Edge (50MHz-1CC – QPSK Full RB)

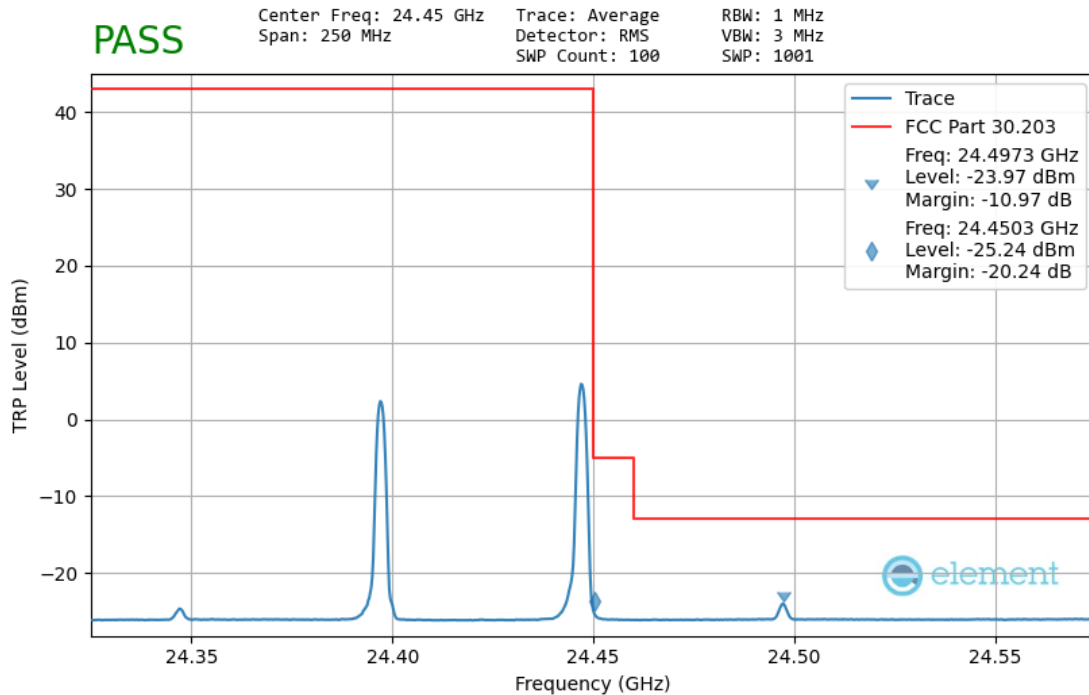


Plot 7-109. Ant1 Upper Band Edge – TRP (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 103 of 142

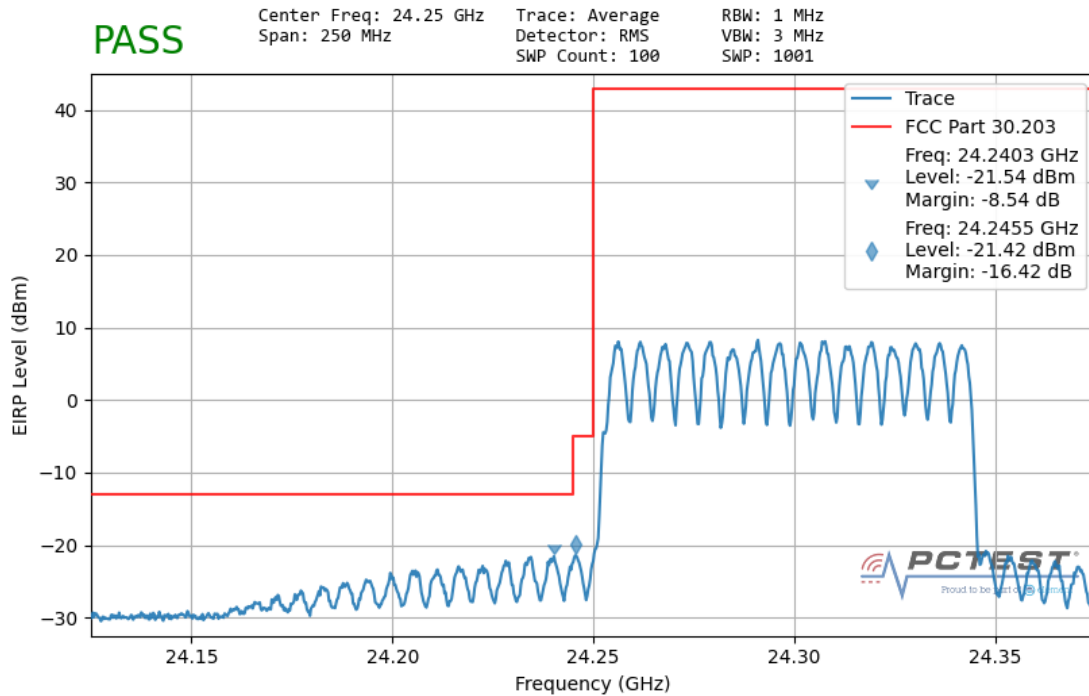


Plot 7-110. Ant1 Lower Band Edge (100MHz-1CC – QPSK Full RB)

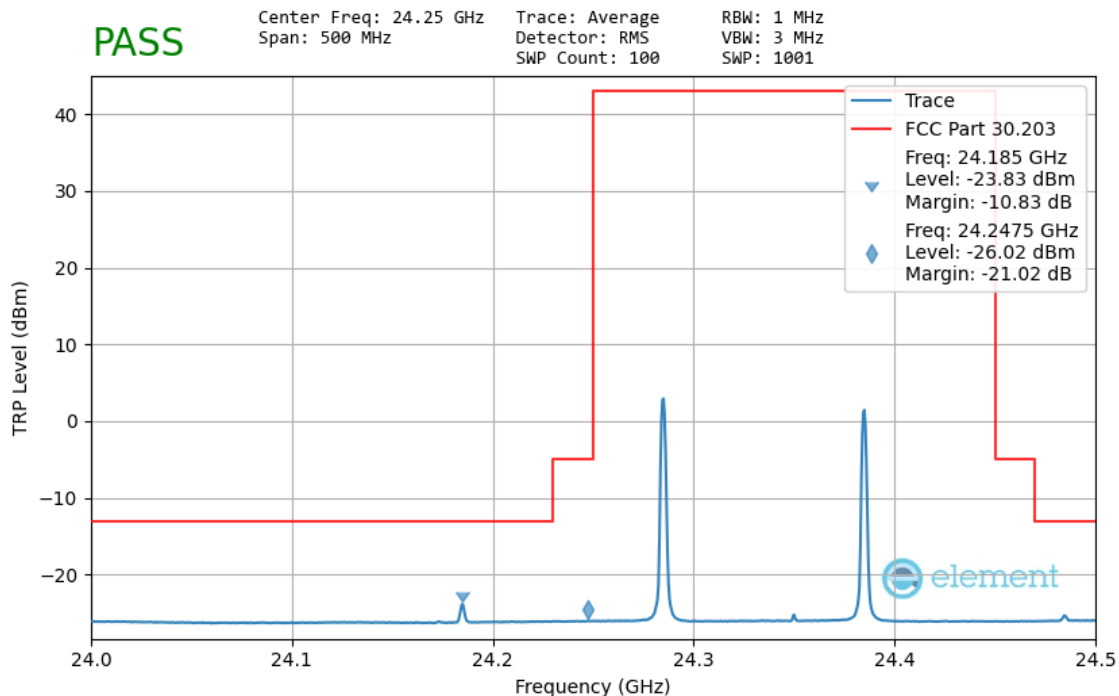


Plot 7-111. Ant1 Lower Band Edge – TRP (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 104 of 142

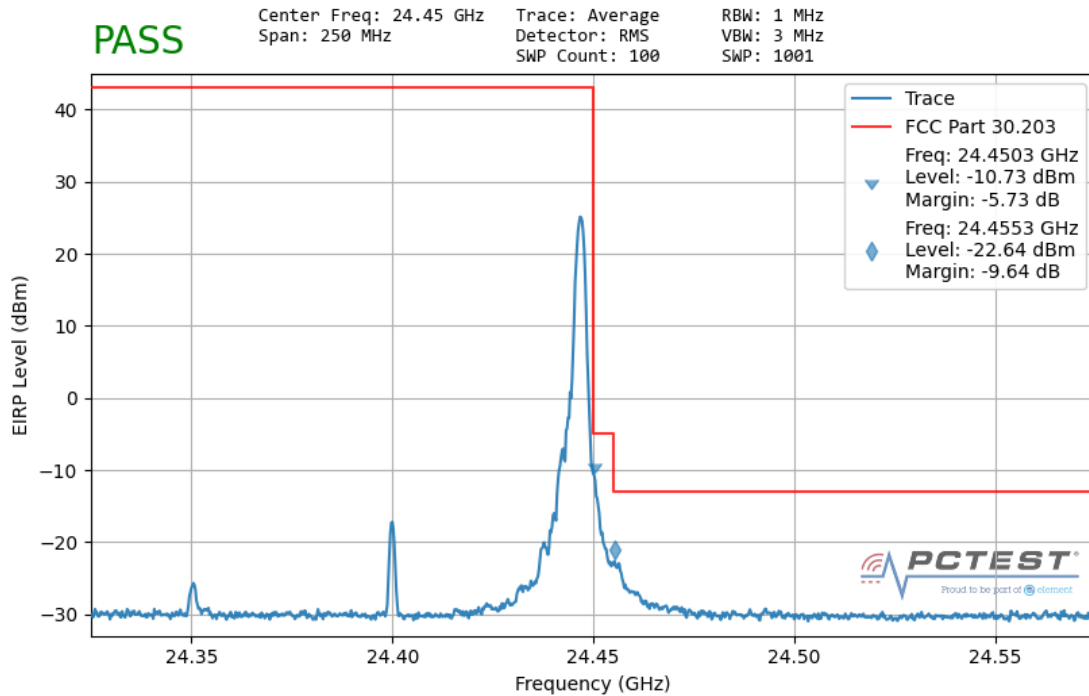

Plot 7-112. Ant1 Upper Band Edge (100MHz-1CC – $\pi/2$ -BPSK 1 RB)

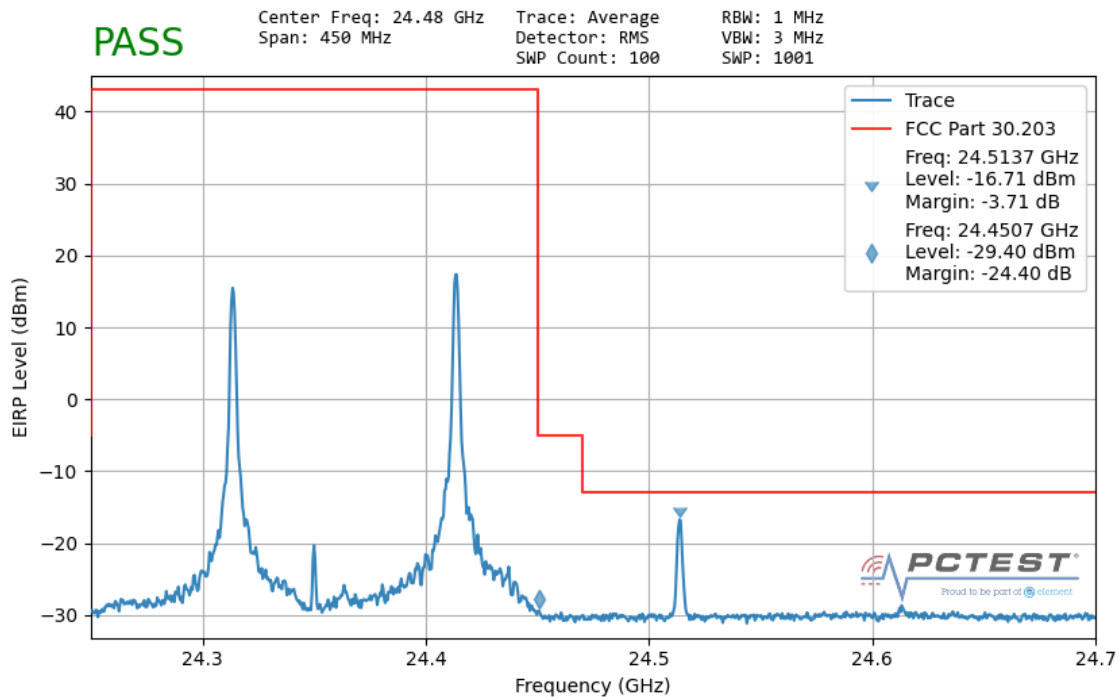


Plot 7-113. Ant1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)


FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 105 of 142

V1.0

Band n258-R2 – Worst-Case

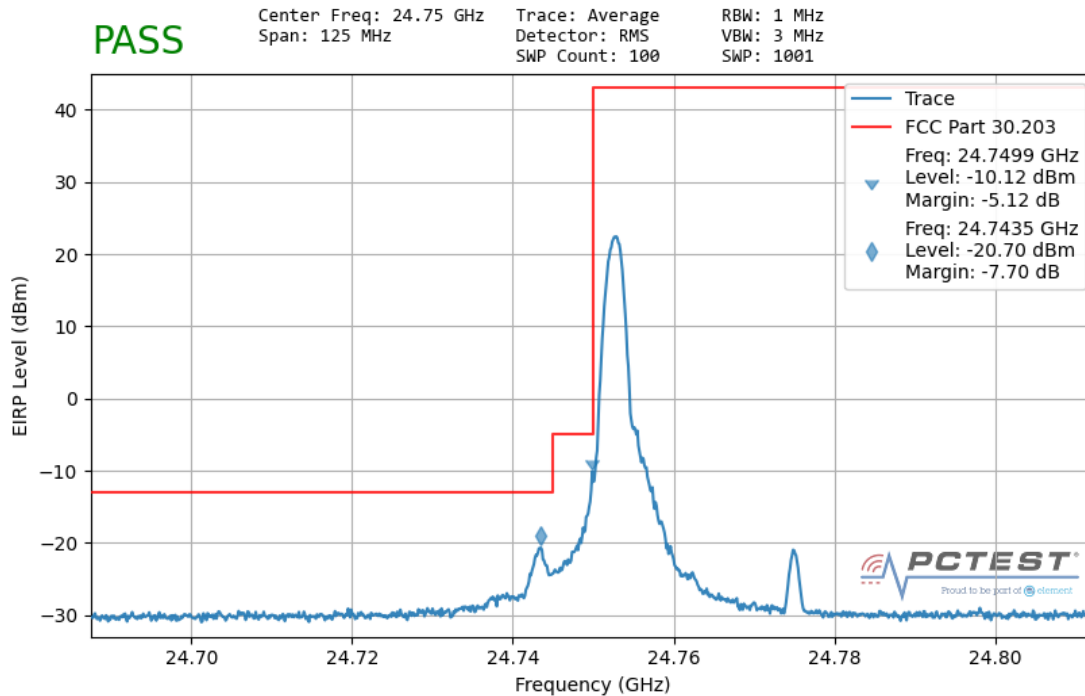


Plot 7-114. Ant1 Lower Band Edge (50MHz-1CC – $\pi/2$ -BPSK 1 RB)

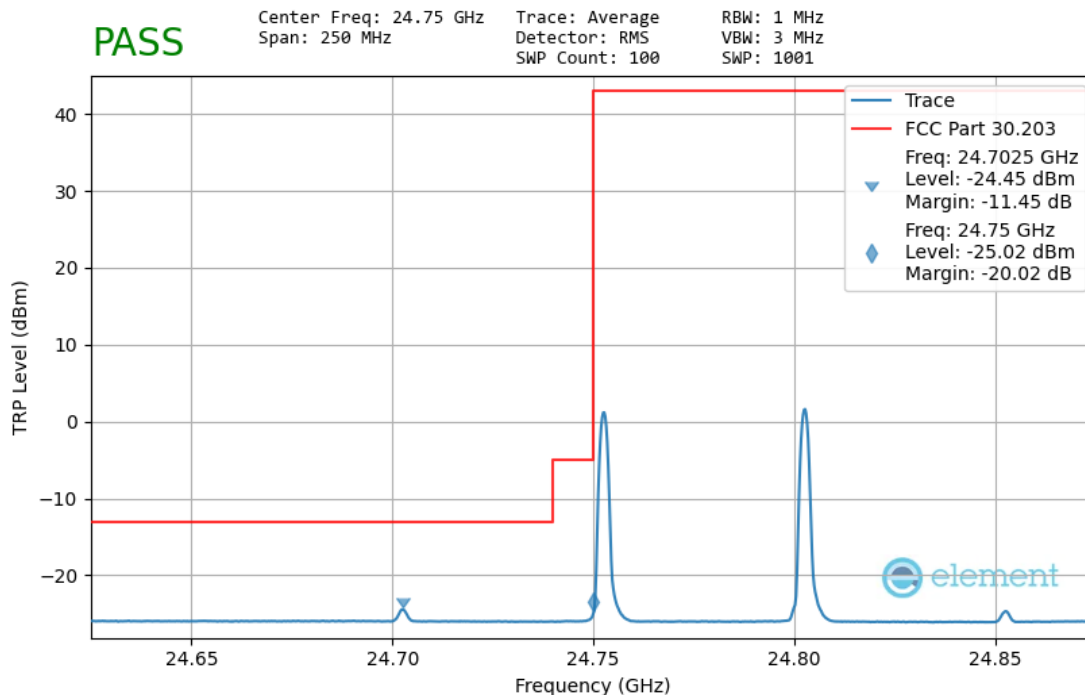


Plot 7-115. Ant1 Lower Band Edge – TRP (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 106 of 142

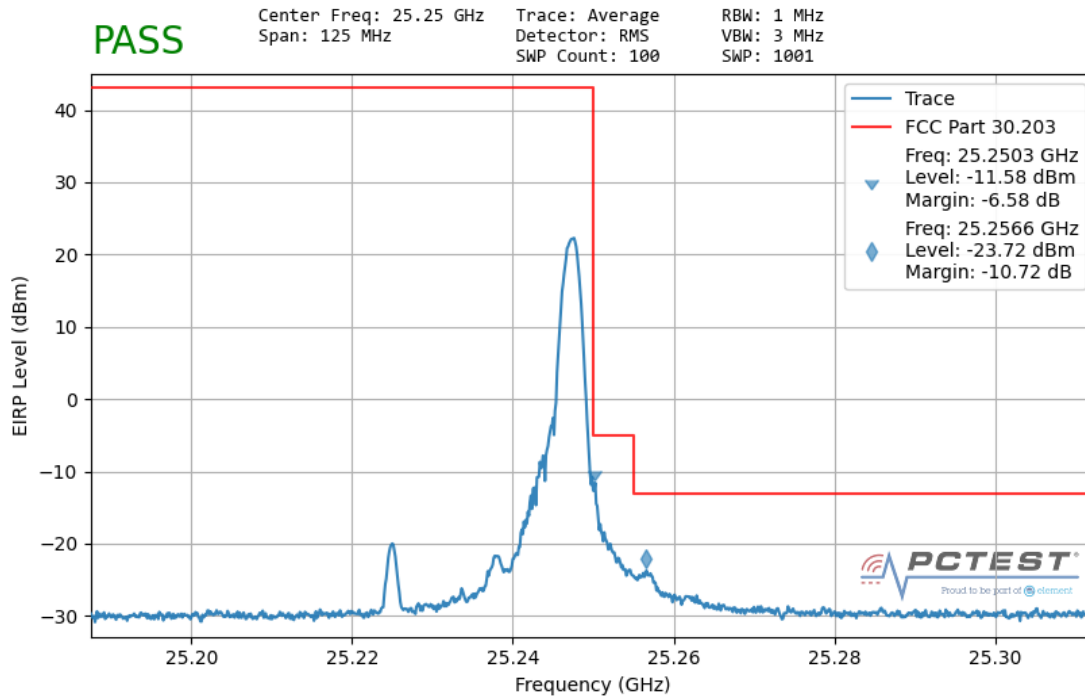


Plot 7-116. Ant1 Upper Band Edge (50MHz-1CC – $\pi/2$ -BPSK 1 RB)

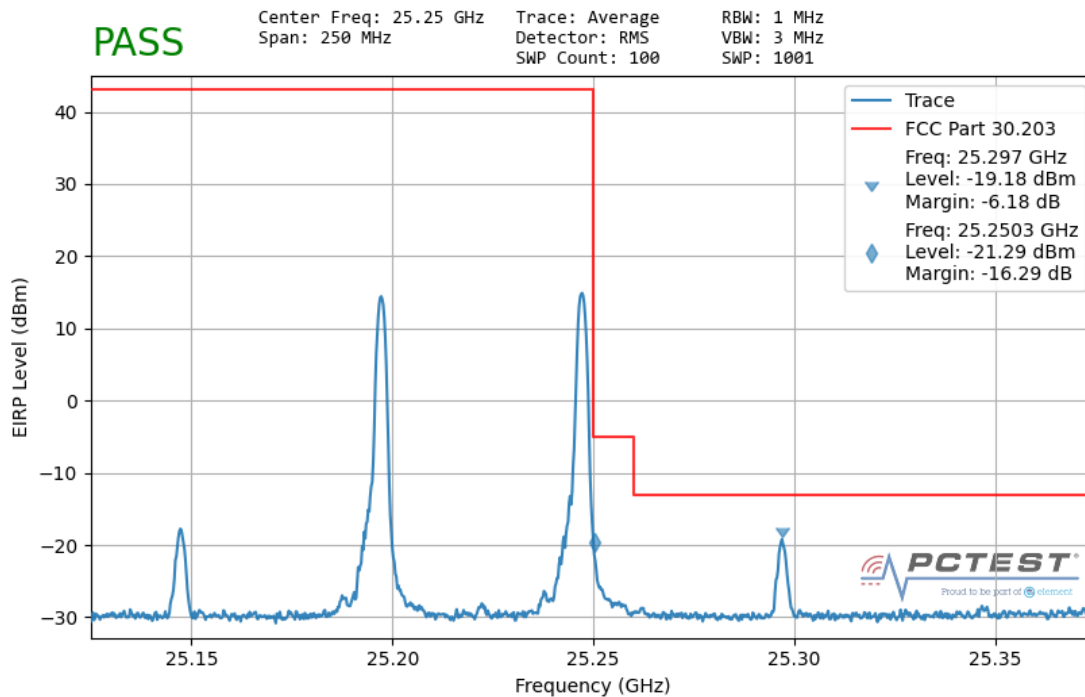


Plot 7-117. Ant1 Upper Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 107 of 142

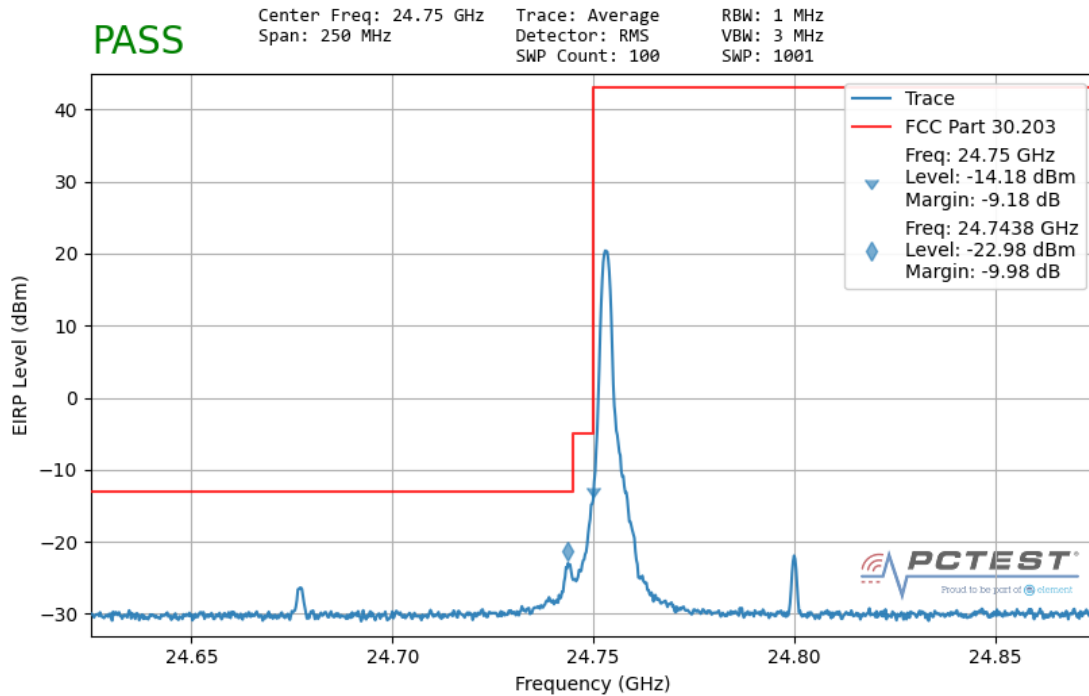


Plot 7-118. Ant1 Lower Band Edge (100MHz-1CC – QPSK 1 RB)

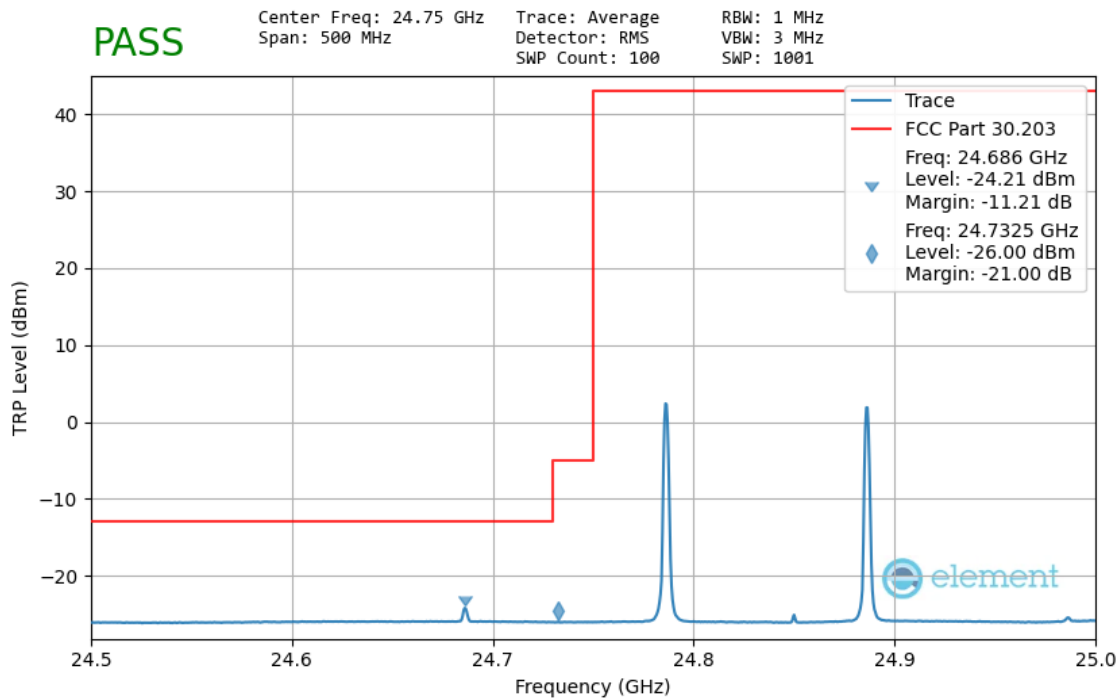


Plot 7-119. Ant1 Lower Band Edge – TRP (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 108 of 142

V1.0

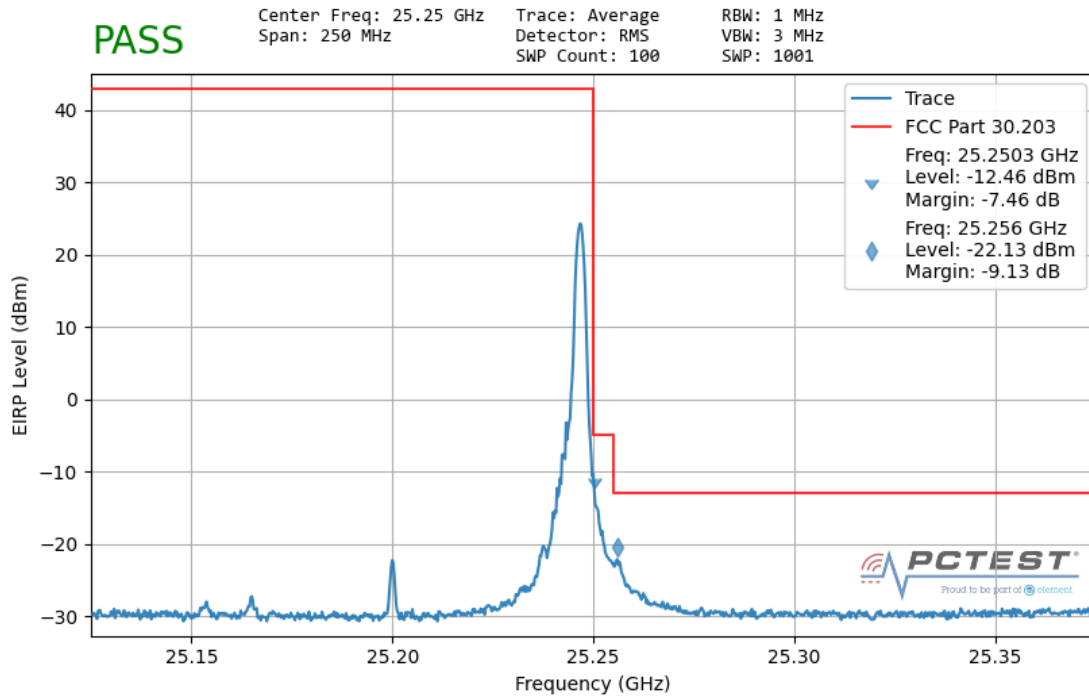


Plot 7-120. Ant1 Upper Band Edge (100MHz-1CC – QPSK 1 RB)

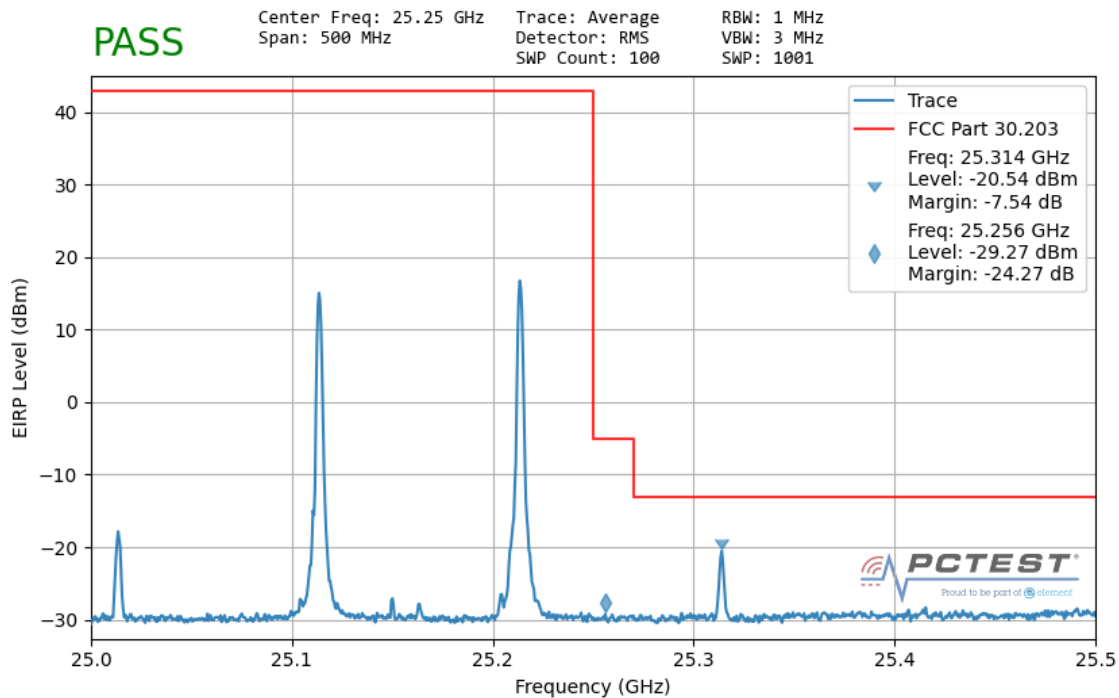


Plot 7-121. Ant1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 109 of 142

Band n261 – Worst-Case

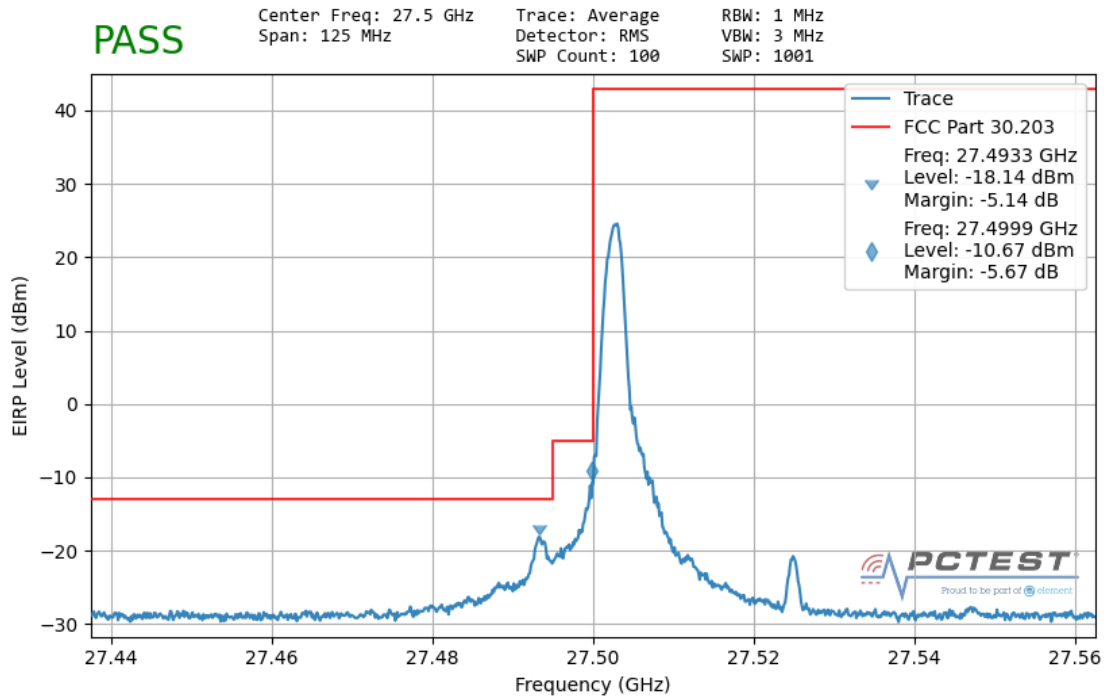


Plot 7-122. Ant1 Lower Band Edge (50MHz-1CC – $\pi/2$ -BPSK 1 RB)

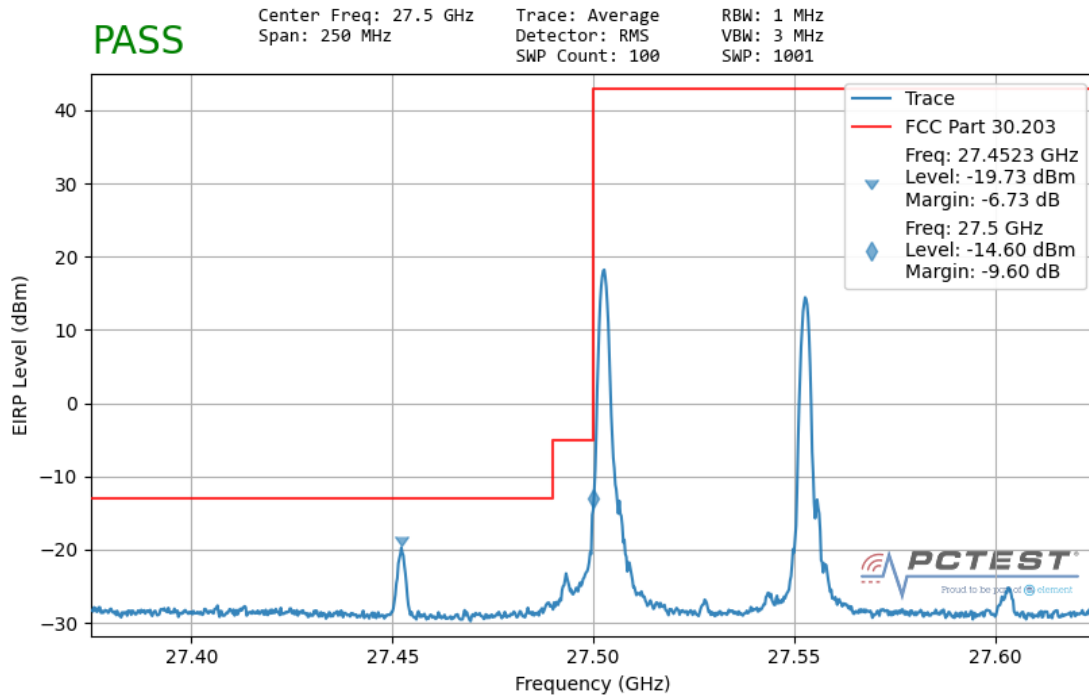


Plot 7-123. Ant1 Lower Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 110 of 142

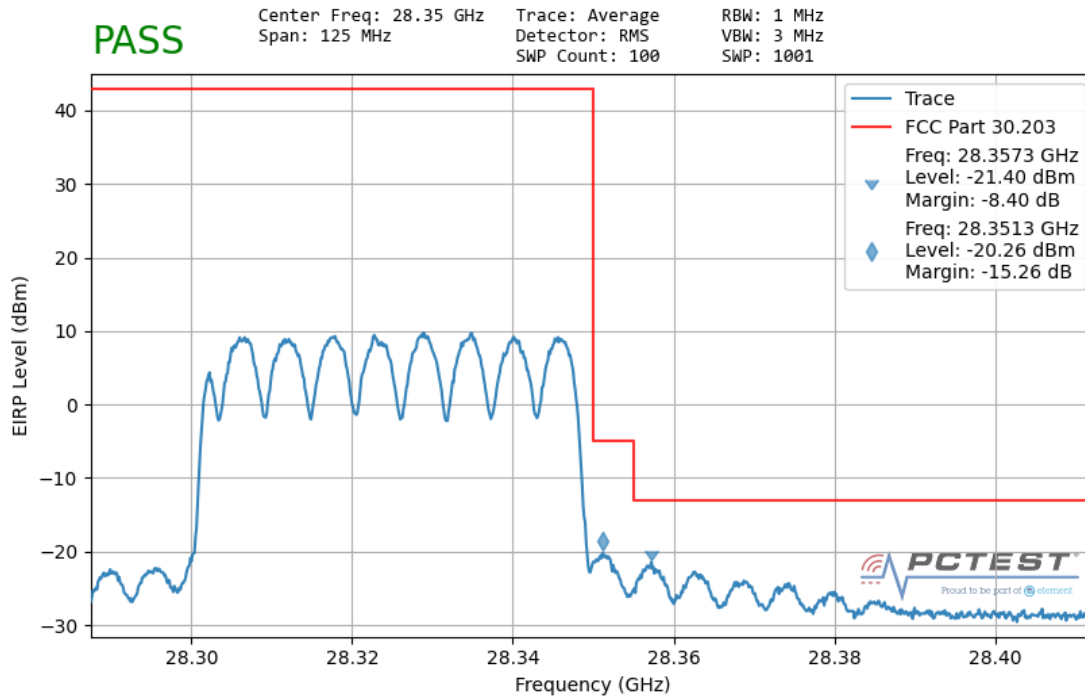


Plot 7-124. Ant1 Upper Band Edge (50MHz-1CC – QPSK Full RB)

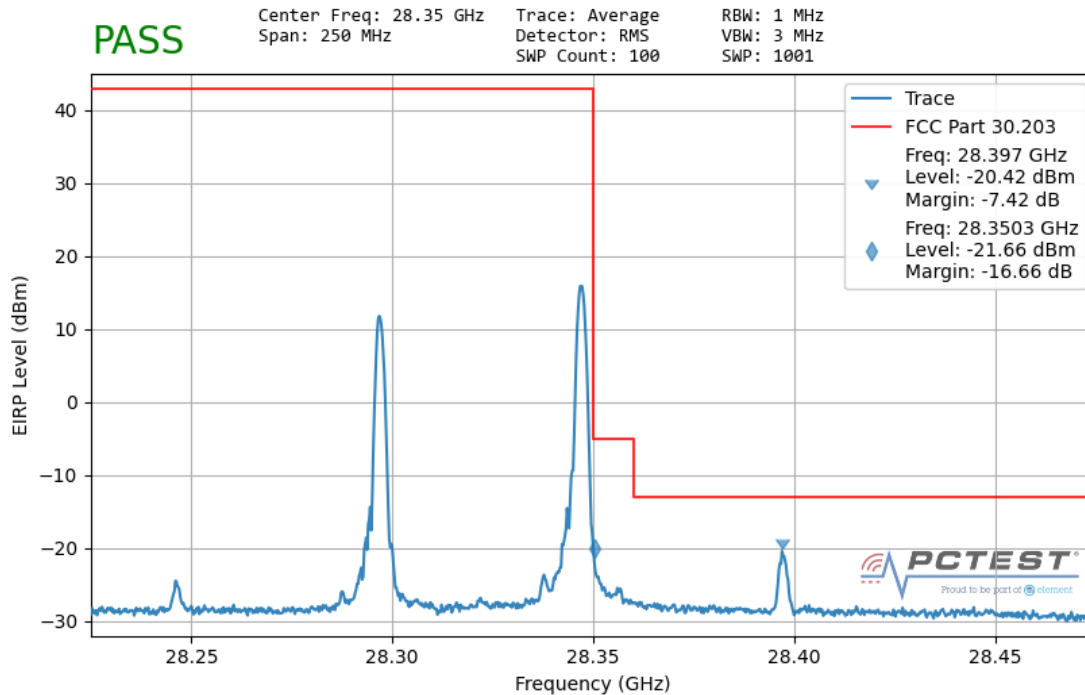


Plot 7-125. Ant1 Upper Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 111 of 142

V1.0

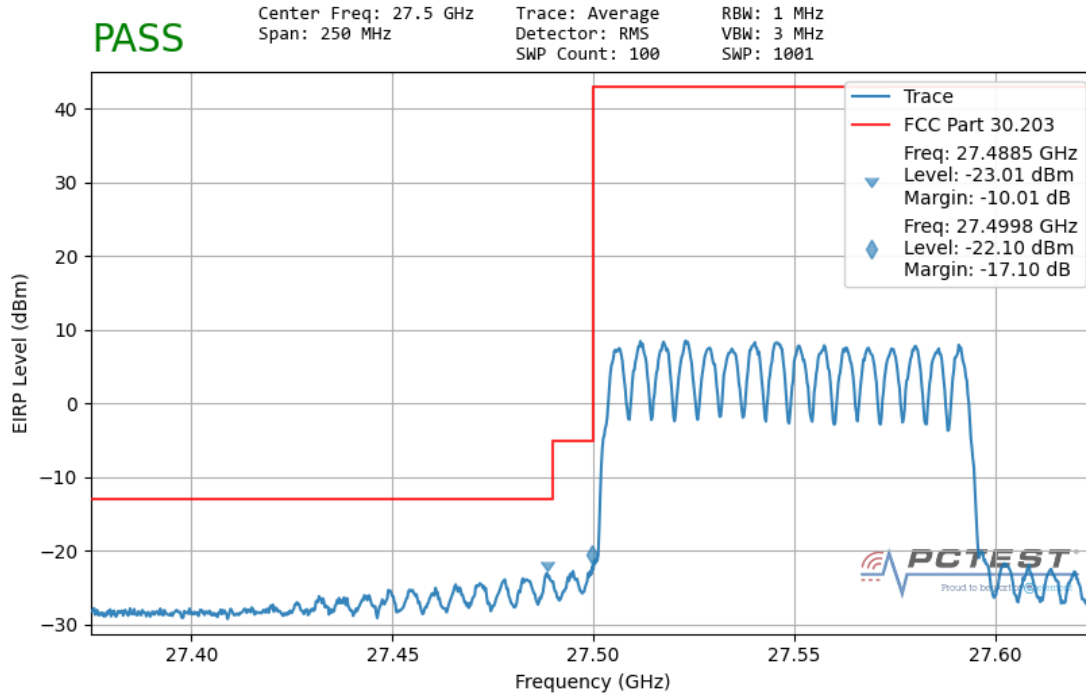


Plot 7-126. Ant1 Lower Band Edge (100MHz-1CC – QPSK Full RB)

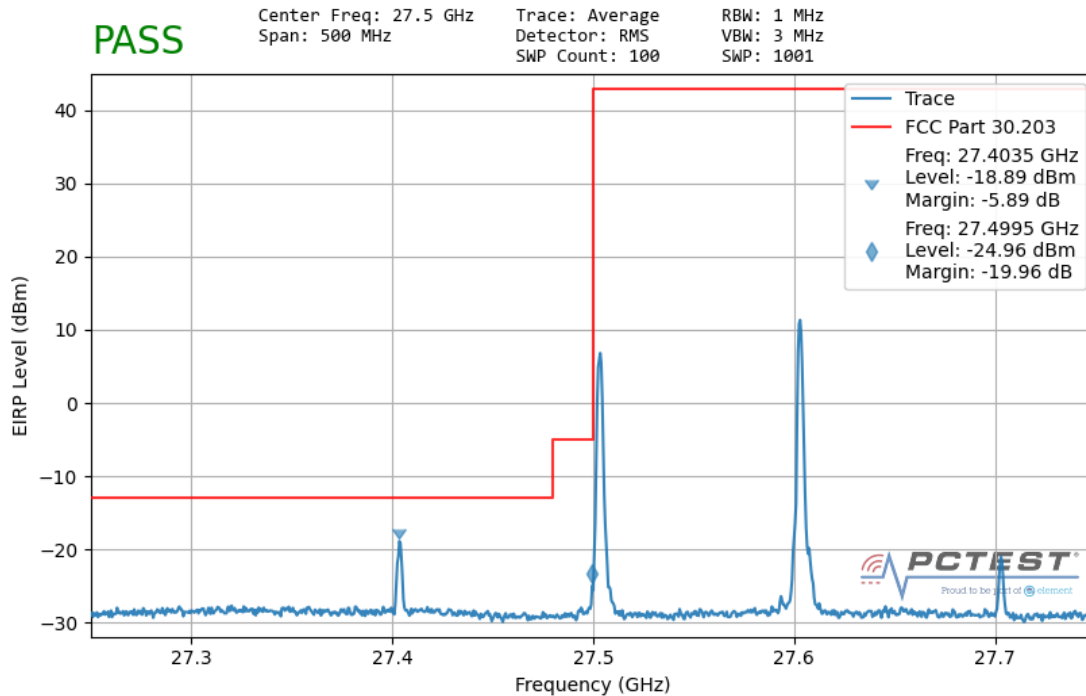


Plot 7-127. Ant1 Lower Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 112 of 142

V1.0

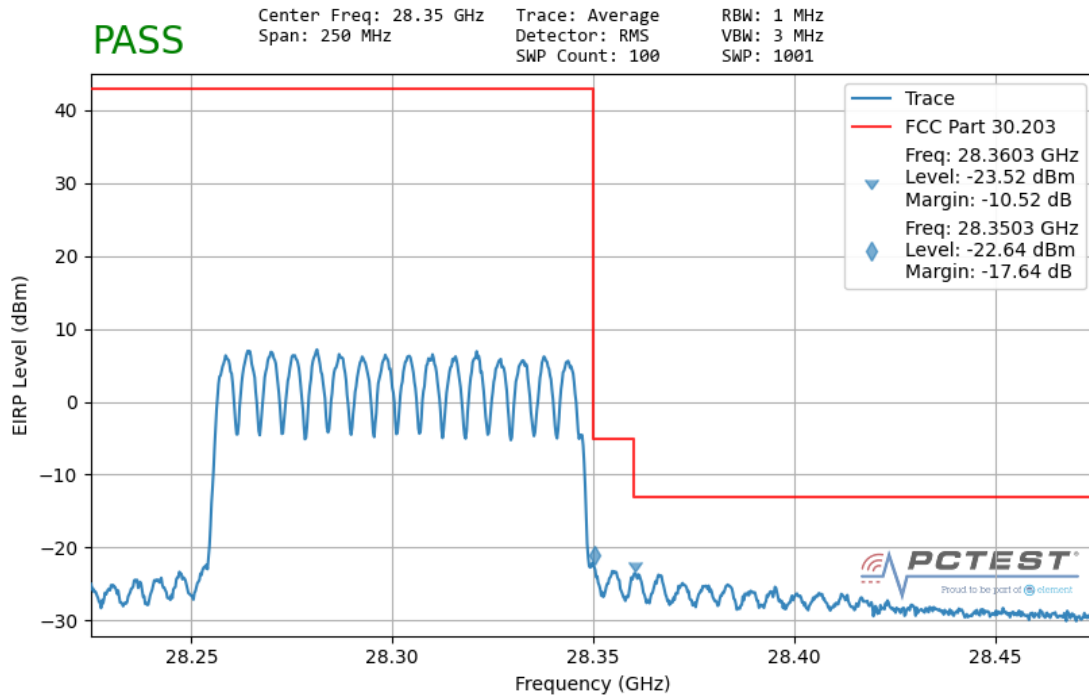


Plot 7-128. Ant1 Upper Band Edge (100MHz-1CC – QPSK Full RB)

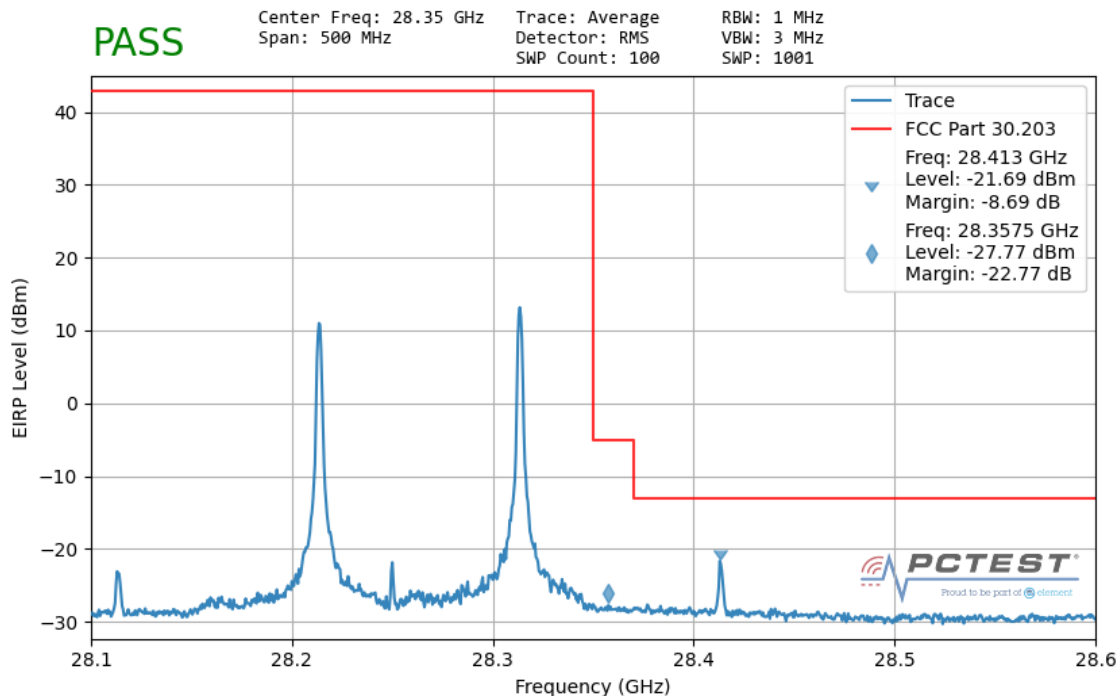


Plot 7-129. Ant1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 113 of 142

Band n260 – Worst Case

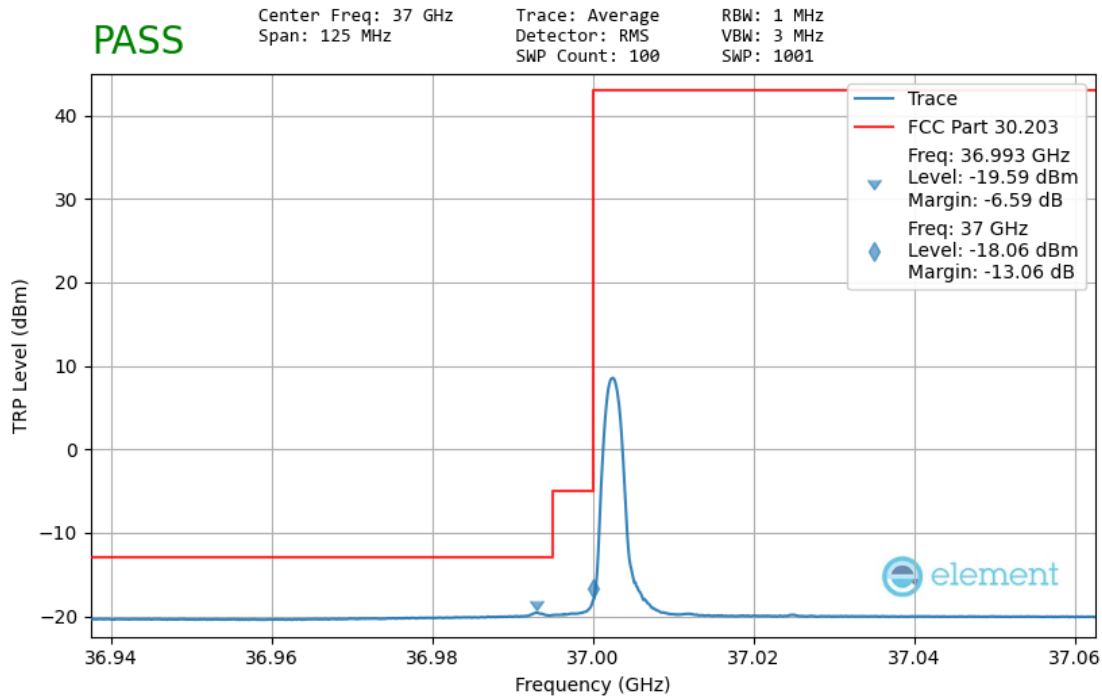


Plot 7-130. Ant1 Lower Band Edge – TRP (50MHz-1CC $\pi/2$ -BPSK 1 RB)

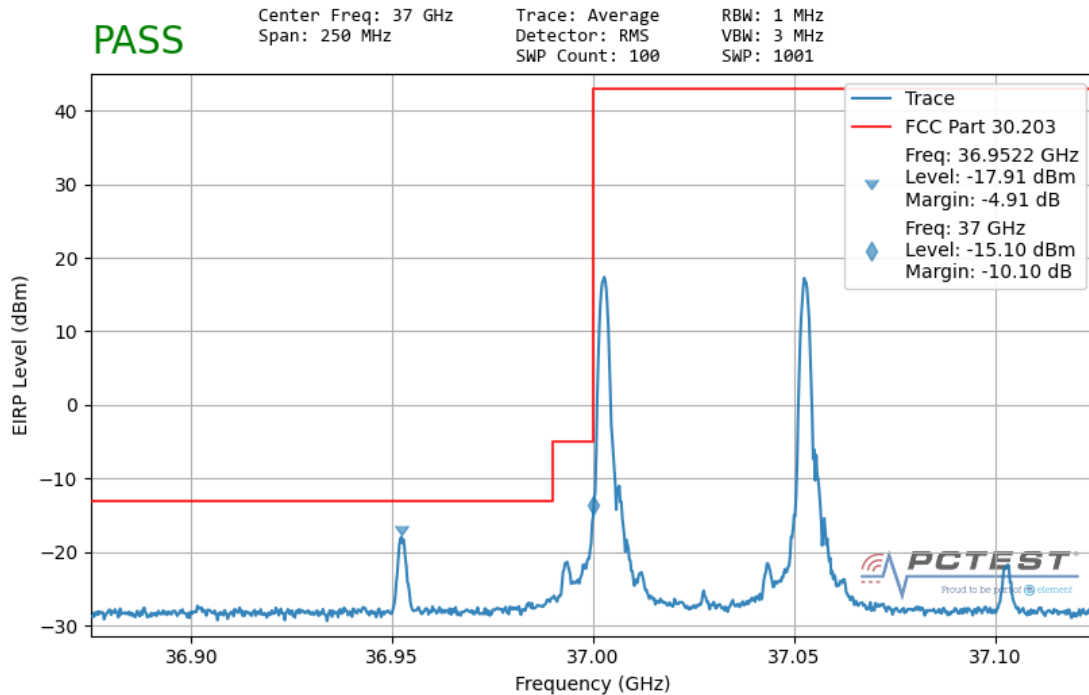


Plot 7-131. Ant1 Lower Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 114 of 142

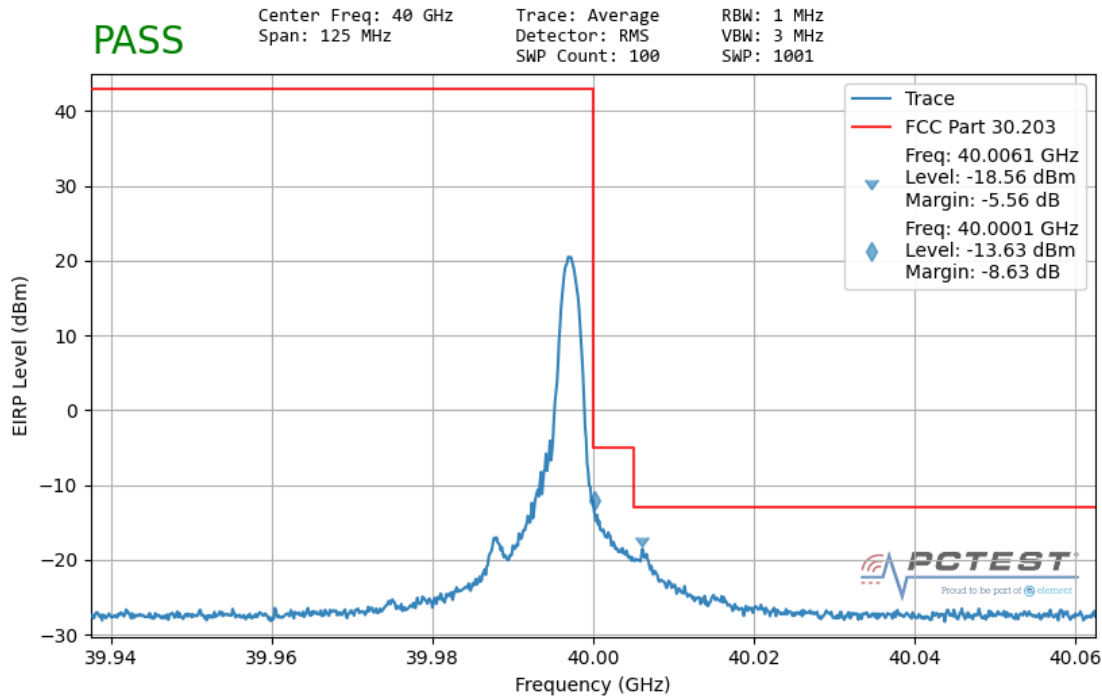


Plot 7-132. Ant1 Upper Band Edge (50MHz-1CC – $\pi/2$ -BPSK 1 RB)

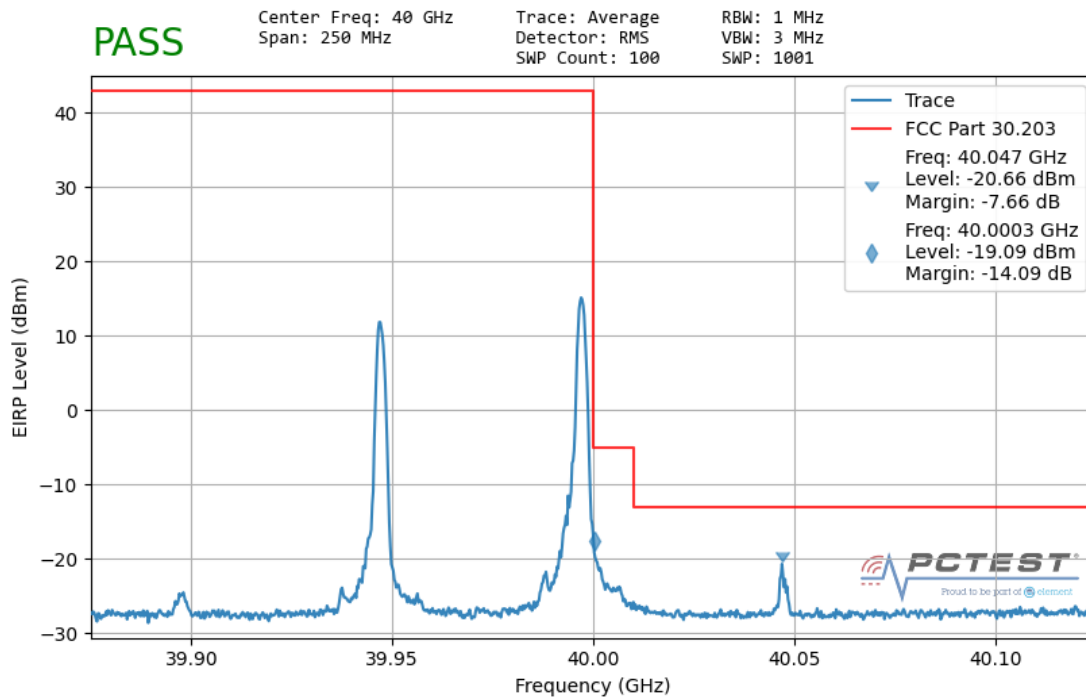


Plot 7-133. Ant1 Upper Band Edge (50MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 115 of 142

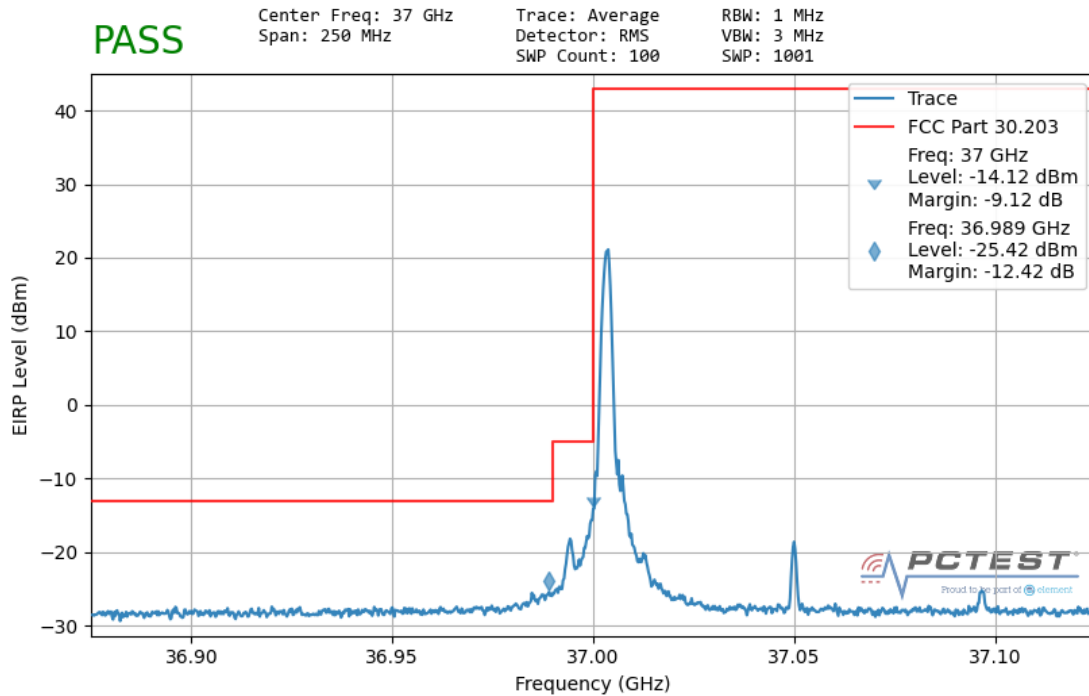


Plot 7-134. Ant1 Lower Band Edge (100MHz-1CC – $\pi/2$ -BPSK 1 RB)

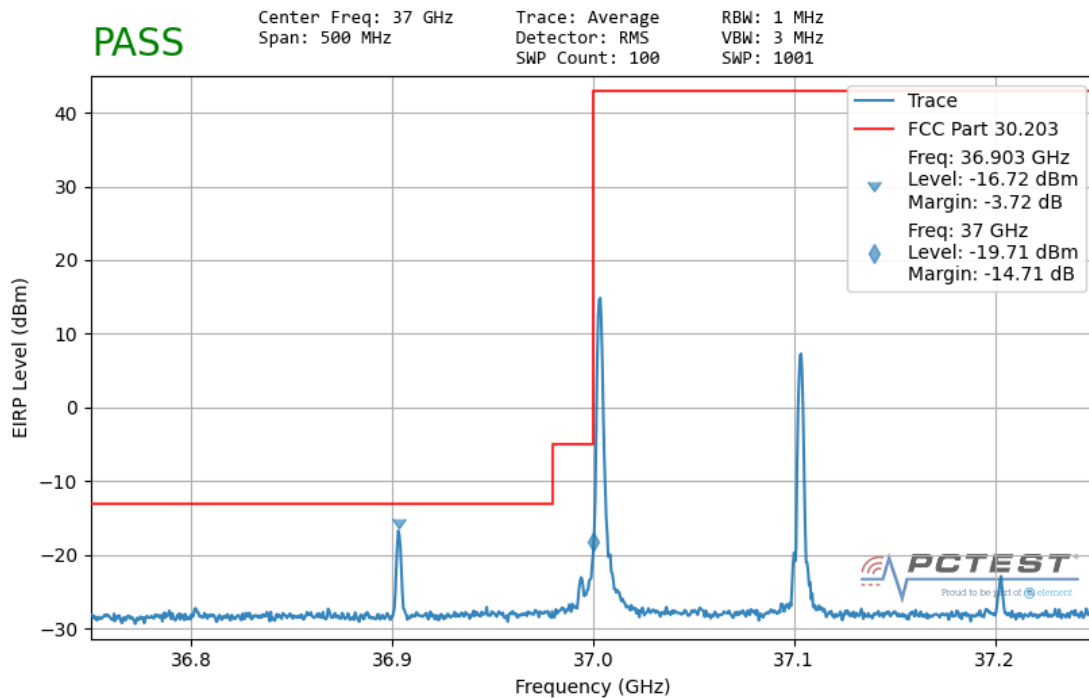


Plot 7-135. Ant1 Lower Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 116 of 142

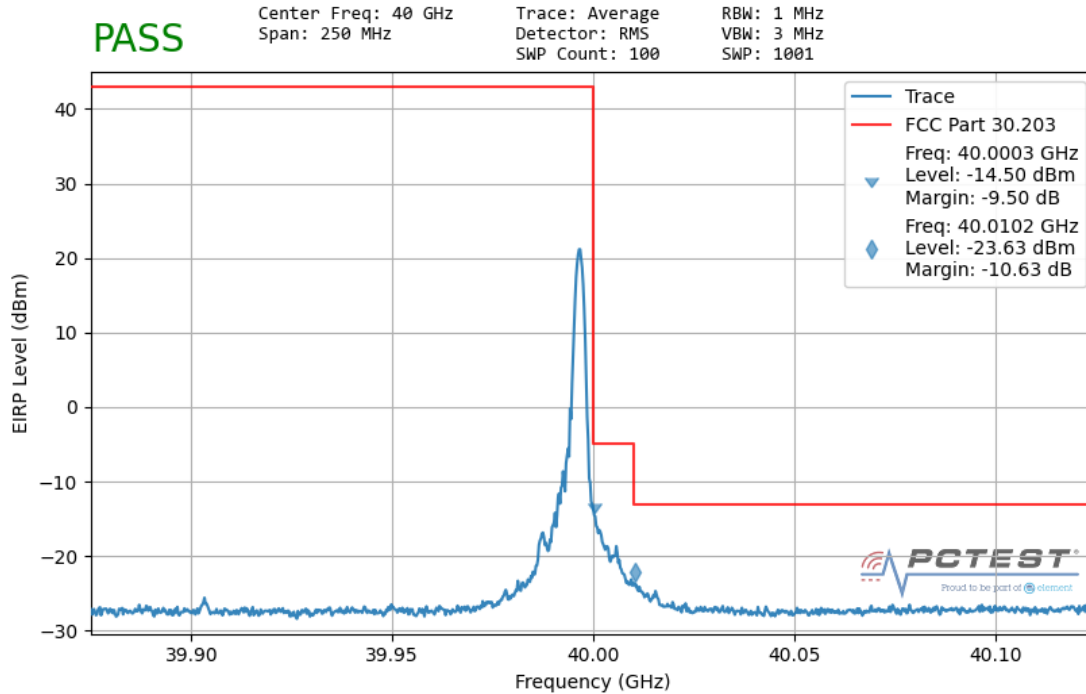

Plot 7-136. Ant1 Upper Band Edge (100MHz-1CC – QPSK 1 RB)

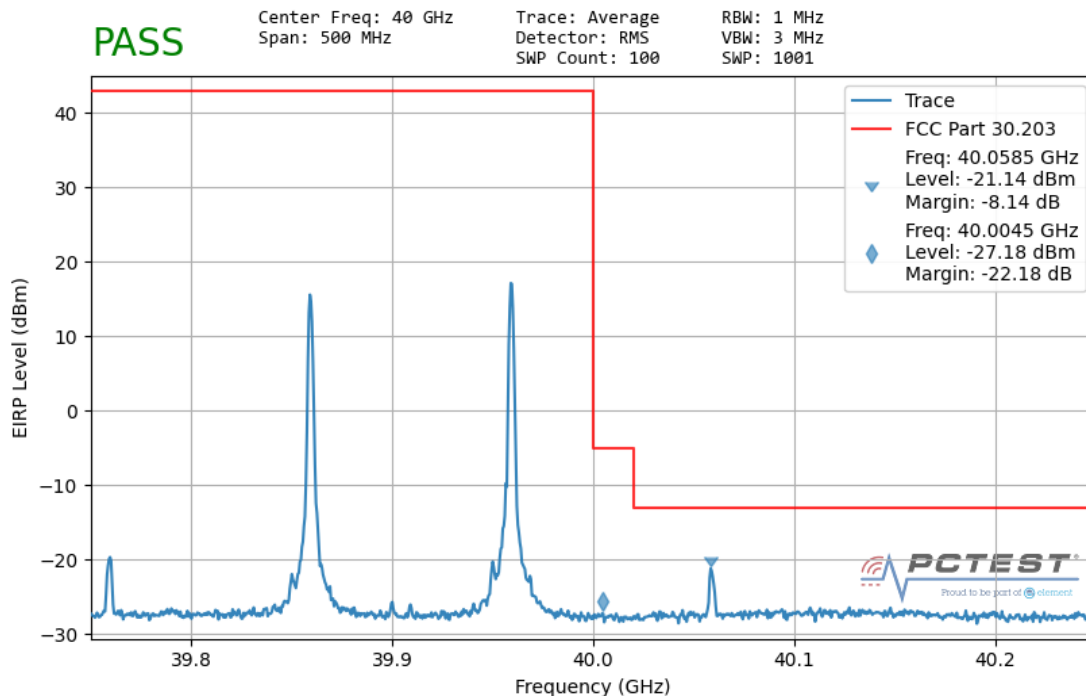

Plot 7-137. Ant1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 117 of 142

V1.0

7.6 Frequency Stability / Temperature Variation

§2.1055

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Test Procedure Used

ANSI C63.5-2015 Section 5.6
KDB 842590 D01 v01r02 Section 4.5

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was measured using horn antenna connected to a spectrum analyzer. The EUT was placed inside an environmental chamber that uses a foam plug to maintain the temperature condition inside the chamber. The horn antenna measured the frequency of the fundamental signal.

Test Notes

The Frequency Deviation column in the table below is the amount of deviation measured from the center frequency of the Reference measurement (first row).

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 118 of 142



Frequency Stability Measurements (Band n258)

§2.1055

OPERATING FREQUENCY: 24,349,920,000 Hz
CHANNEL: 2018331
REFERENCE VOLTAGE: 4.39 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.39	+ 20 (Ref)	24,346,095,910	0	0.0000000
100 %		- 30	24,346,130,892	-34,982	-0.0001437
100 %		- 20	24,346,140,764	-44,855	-0.0001842
100 %		- 10	24,346,142,170	-46,261	-0.0001900
100 %		0	24,346,132,340	-36,431	-0.0001496
100 %		+ 10	24,346,114,193	-18,284	-0.0000751
100 %		+ 30	24,346,077,440	18,469	0.0000759
100 %		+ 40	24,346,064,171	31,738	0.0001304
100 %		+ 50	24,346,061,093	34,817	0.0001430
BATT. ENDPOINT	3.54	+ 20	24,346,095,990	-80	-0.0000003

Table 7-56. Frequency Stability Data (n258)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 119 of 142

Frequency Stability Measurements (Band n258)

§2.1055

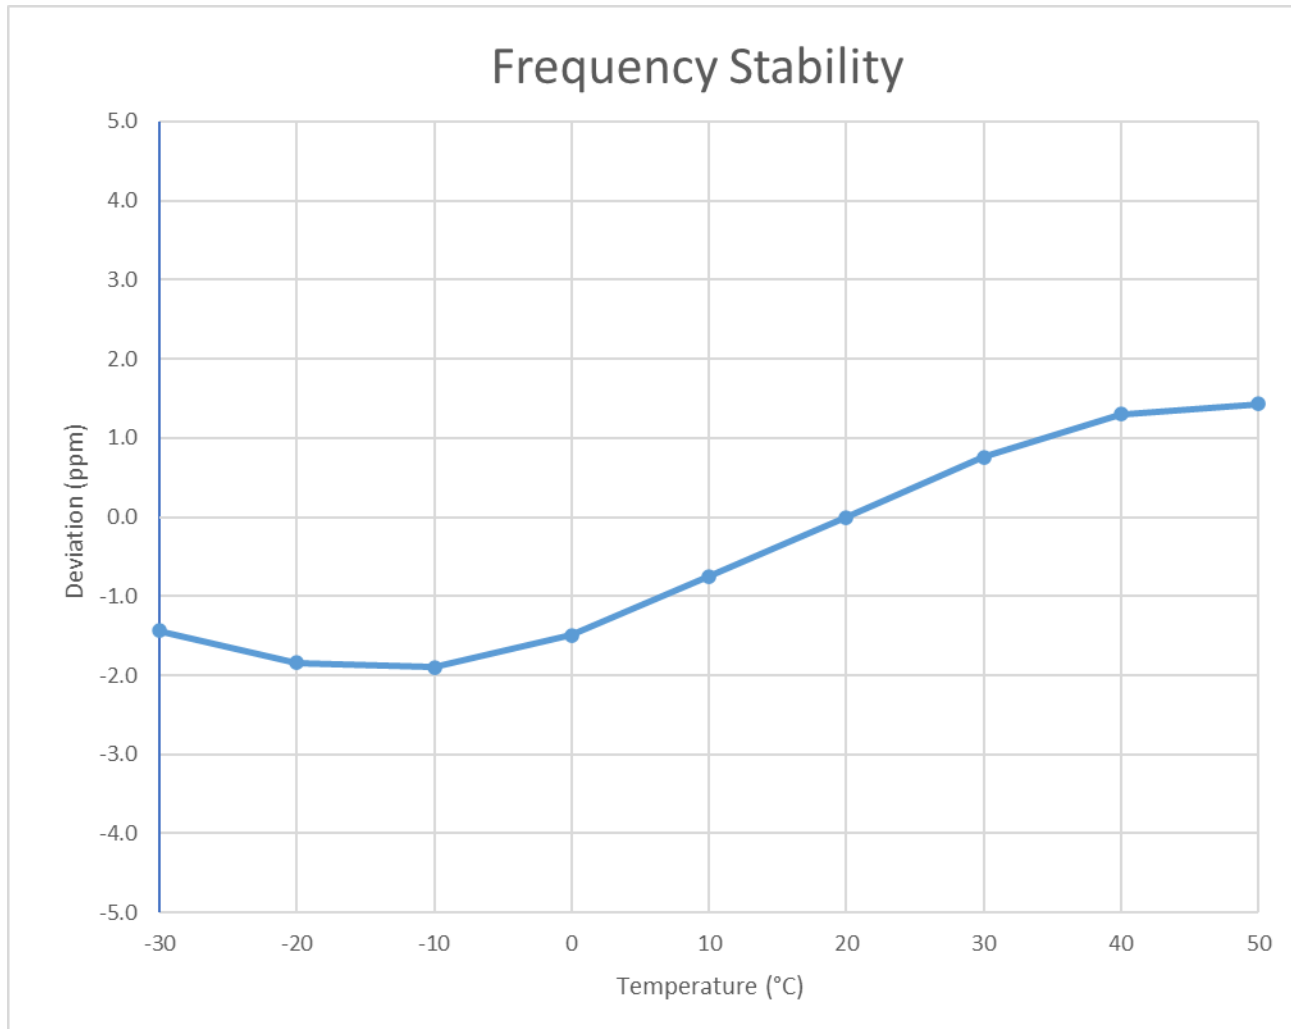


Figure 7-1. Frequency Stability Graph (n258)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 120 of 142

Frequency Stability Measurements (Band n261)

§2.1055

OPERATING FREQUENCY: 27,924,960,000 Hz
 CHANNEL: 2077915
 REFERENCE VOLTAGE: 4.39 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.39	+ 20 (Ref)	27,925,593,979	0	0.0000000
100 %		- 30	27,925,659,604	-65,625	-0.0002350
100 %		- 20	27,925,646,572	-52,593	-0.0001883
100 %		- 10	27,925,642,628	-48,649	-0.0001742
100 %		0	27,925,631,952	-37,974	-0.0001360
100 %		+ 10	27,925,615,826	-21,848	-0.0000782
100 %		+ 30	27,925,583,070	10,909	0.0000391
100 %		+ 40	27,925,574,076	19,902	0.0000713
100 %		+ 50	27,925,576,444	17,535	0.0000628
BATT. ENDPOINT	3.54	+ 20	27,925,588,722	5,256	0.0000188

Table 7-57. Frequency Stability Data (n261)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 121 of 142

Frequency Stability Measurements (Band n261)

§2.1055

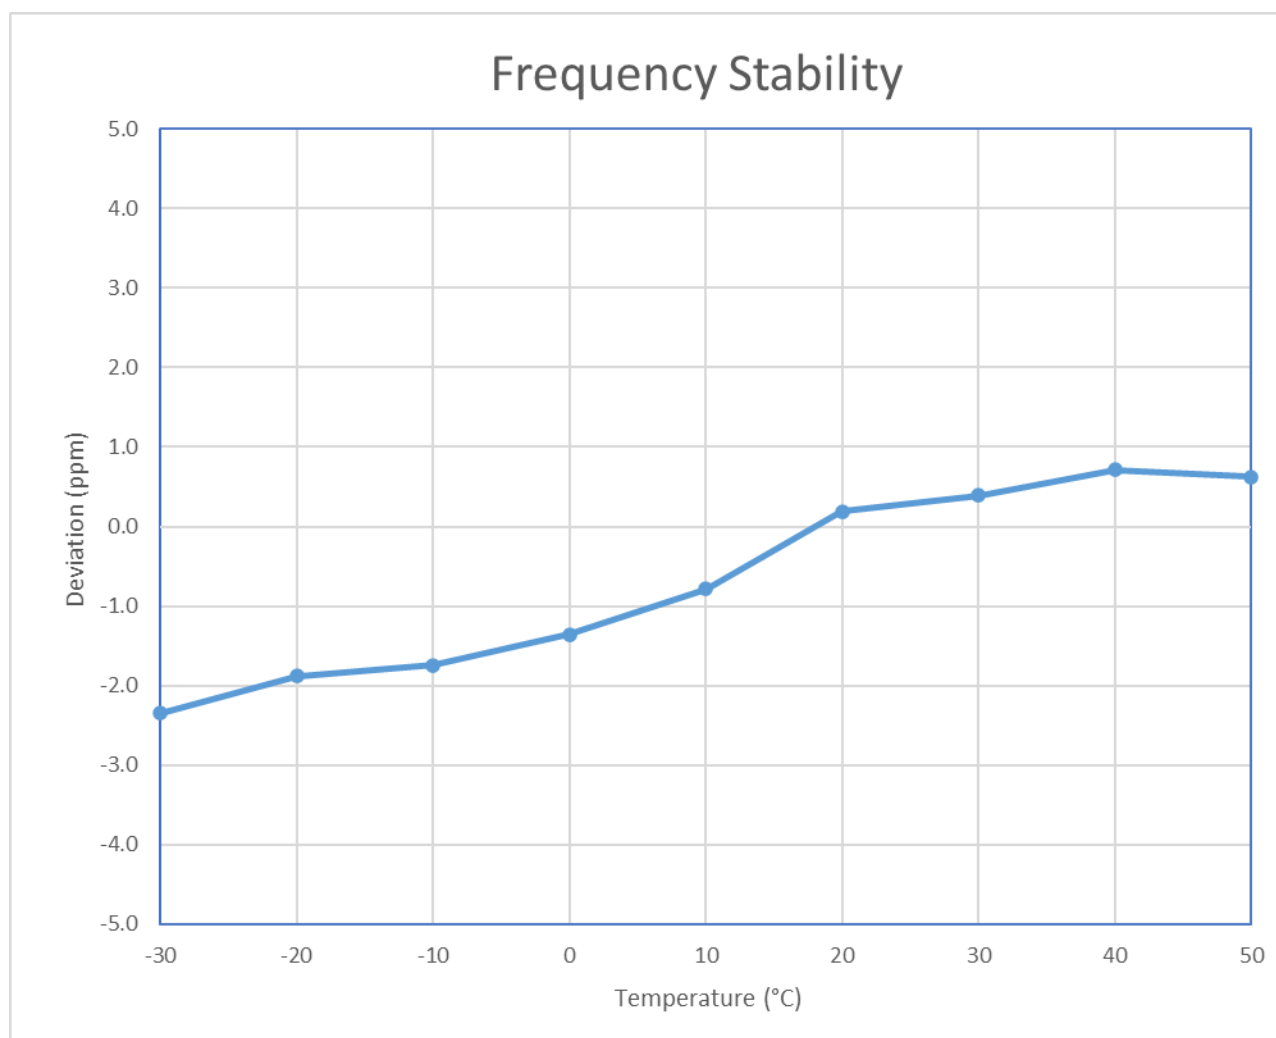


Figure 7-2. Frequency Stability Graph (n261)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 122 of 142

V1.0

Frequency Stability Measurements (Band n260)

§2.1055

OPERATING FREQUENCY: 38,495,520,000 Hz
 CHANNEL: 2254091
 REFERENCE VOLTAGE: 4.39 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.39	+ 20 (Ref)	38,500,822,838	0	0.0000000
100 %		- 30	38,500,895,626	-72,788	-0.0001891
100 %		- 20	38,500,910,534	-87,695	-0.0002278
100 %		- 10	38,500,906,048	-83,210	-0.0002161
100 %		0	38,500,880,619	-57,780	-0.0001501
100 %		+ 10	38,500,861,696	-38,857	-0.0001009
100 %		+ 30	38,500,786,376	36,462	0.0000947
100 %		+ 40	38,500,742,370	80,468	0.0002090
100 %		+ 50	38,500,731,976	90,862	0.0002360
BATT. ENDPOINT	3.54	+ 20	38,500,821,305	1,533	0.0000040

Table 7-58. Frequency Stability Data (n260)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 123 of 142

Frequency Stability Measurements (Band n260)

§2.1055

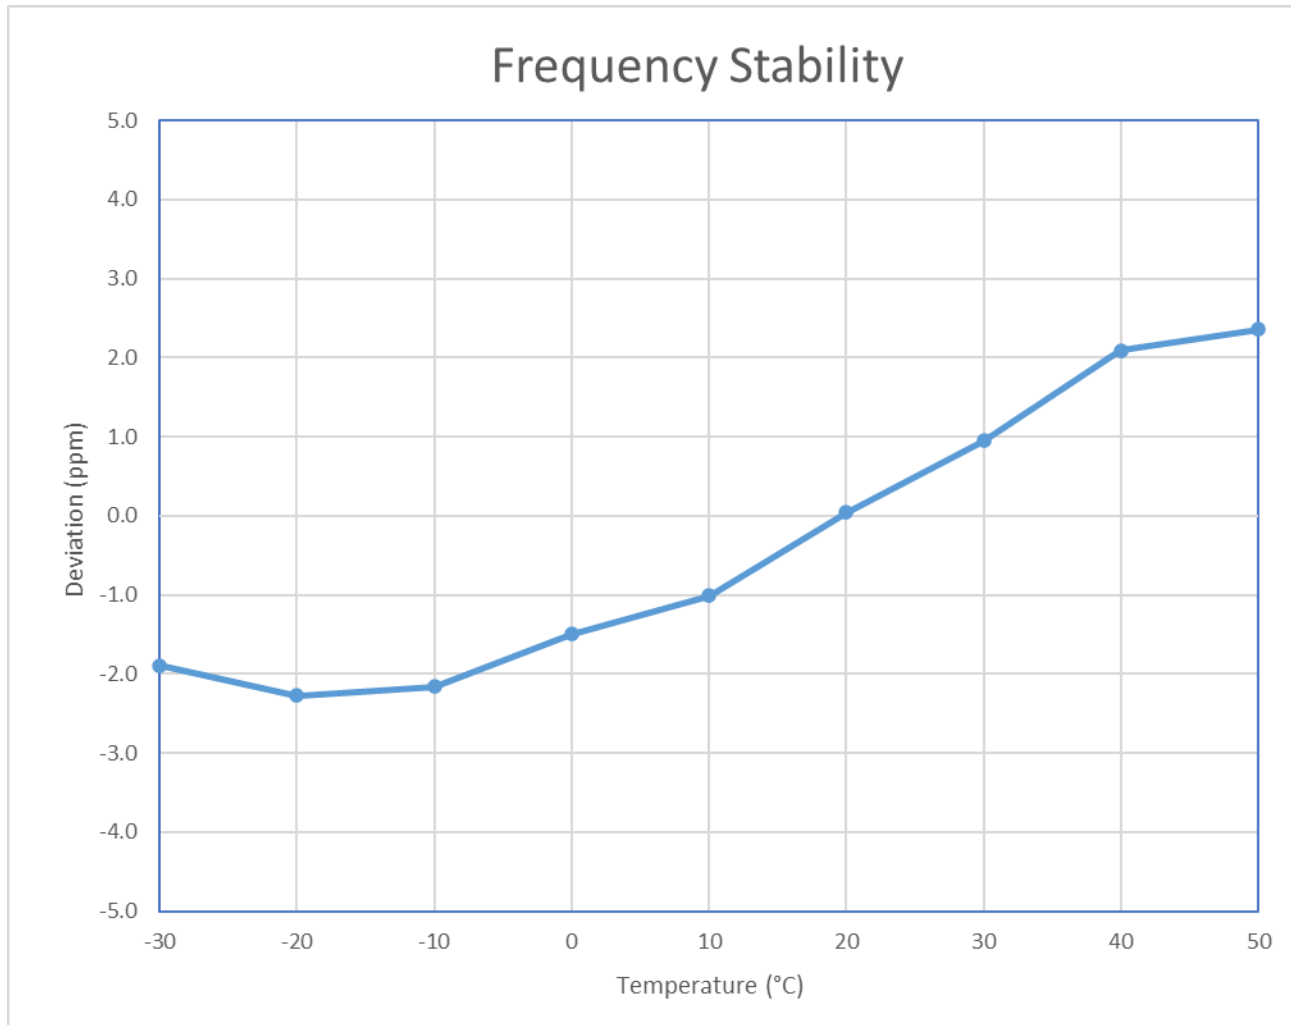


Figure 7-3. Frequency Stability Graph (n260)

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 124 of 142

V1.0

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF721U** complies with all the requirements of Part 30.

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 125 of 142

V1.0

9.0 APPENDIX A

9.1 VDI Mixer Verification Certificate



Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902
Phone: 434-297-3257
Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
7185 Oakland Mills Road
Columbia, MD 21046
United States


From: Virginia Diodes, Inc
979 2nd St. SE
Suite 309
Charlottesville, VA 22902

Packing List No: 202943
Shipping Date: 08/28/20

Today's Date: 08/28/20
PO Number: 200414.DP2

Quantity	Shipped	Unit	Description	Order-Job Number
1	EA	VDIWR19.0SAX-M-M4 WR19SAX-M-M4 / SN: SAX 679	20177A-01	

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).


 Authorized Signature
 Virginia Diodes, Inc

Page 1 of 1

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022-06/16/2022	EUT Type: Portable Handset	Page 126 of 142

V1.0



Virginia Diodes, Inc
 979 2nd St. SE
 Suite 309
 Charlottesville, VA 22902
 Phone: 434-297-3257
 Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
 7185 Oakland Mills Road
 Columbia, MD 21046
 United States

From: Virginia Diodes, Inc
 979 2nd St. SE
 Suite 309
 Charlottesville, VA 22902

Packing List No: 202695
 Shipping Date: 08/12/20

Today's Date: 08/14/20
 PO Number: 200414.DP2

Quantity	Shipped	Unit	Description	Order-Job Number
1		EA	VDIWR12.0SAX-M-M6 S/N: SAX 680	20177B-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

Authorized Signature
 Virginia Diodes, Inc



Page 1 of 1

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022-06/16/2022	EUT Type: Portable Handset	Page 127 of 142

V1.0



Virginia Diodes, Inc
 979 2nd St. SE
 Suite 309
 Charlottesville, VA 22902
 Phone: 434-297-3257
 Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
 7185 Oakland Mills Road
 Columbia, MD 21046
 United States

From: Virginia Diodes, Inc
 979 2nd St. SE
 Suite 309
 Charlottesville, VA 22902

Packing List No: 203623
Shipping Date: 10/22/20

Today's Date: 10/22/20
PO Number: 200414.DP2

Quantity	Shipped	Unit	Description	Order-Job Number
1		EA	VDIWR8.0SAX-M-M9 S/N: SAX 681	20177C-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).


 Authorized Signature
 Virginia Diodes, Inc

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022-06/16/2022	EUT Type: Portable Handset	Page 128 of 142



Virginia Diodes, Inc
 979 2nd St. SE
 Suite 309
 Charlottesville, VA 22902
 Phone: 434-297-3257
 Fax: 434-297-3258

Certificate of Conformance

To: PCTEST Engineering Laboratory
 7185 Oakland Mills Road
 Columbia, MD 21046
 United States

From: Virginia Diodes, Inc
 979 2nd St. SE
 Suite 309
 Charlottesville, VA 22902

Packing List No: 203281
 Shipping Date: 09/24/20

Today's Date: 09/24/20
 PO Number: 200414.DP2

Quantity	Shipped	Unit	Description	Order-Job Number
1	EA	VDIWR5.1SAX-M-M18	WR5.1SAX-M-M18 - Mini Spectrum Analyzer Extension Module; SN: SAX 682.	20177D-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).


 Authorized Signature
 Virginia Diodes, Inc

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022-06/16/2022	EUT Type: Portable Handset	Page 129 of 142

9.2 Test Scope Accreditation



SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELEMENT MATERIALS TECHNOLOGY WASHINGTON DC LLC
(formerly PCTEST)
7185 Oakland Mills Road
Columbia, MD 21046
Randy Ortanez Phone: 410 290 6652

ELECTRICAL¹

Valid To: September 30, 2022

Certificate Number: 2041.01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory at the location listed above, *as well as the three satellite laboratory locations listed below*, to perform the following Electromagnetic Compatibility, SAR, HAC, Telecommunications, OTA, Battery, RF, and Conformance and Protocol testing of wireless devices:

Test Technology:

Emissions
Radiated and Conducted

Test Method(s)²:

CFR 47, FCC Parts 15B/C/D/E/F/G/H (using ANSI C63.4:2014, ANSI C63.10:2013, ANSI C63.17:2013, and FCC KDB 905462 D02 (v02)), 18 (using MP-5:1986);
ANSI C63.10:2020; KDB 987594;
ETSI TS 134 124 Universal Mobile Telecommunications System (UMTS); (3GPP TS 34.124); (3GPP TS38.124 NR;
Electromagnetic Compatibility (EMC) Requirements for Mobile Terminals and Ancillary Equipment);
ETSI TS 136 124 LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); (3GPP TS 36.124);
ETSI TS 151 010-1 Digital Cellular Telecommunications System (Phase 2+) (GSM);
3GPP TS 51.010-1, Section 12 (Conducted and Radiated Spurious Emissions); EN55011; EN 55032; CNS 13438 (up to 6 GHz);
AS/NZS CISPR 11; IEC/CISPR 11; CISPR 32; FCC OET/MP-5;
ICES-003; KN 11; KN 32; VCCI V-3(2016.11);
VCCI V-3 (2015.04); VCCI 32-1: VCCI-CISPR 32

Accessibility

CFR 47, FCC Part 14

Transmitter/Receiver

RSS 111; RSS 112; RSS 117; RSS 119; RSS 123; RSS 125;
RSS 127; RSS 130; RSS 131; RSS 132; RSS 133; RSS 134;
RSS 135; RSS 137; RSS 139; RSS 140; RSS 141; RSS 142;
RSS 170; RSS 181; RSS 182; RSS 191; RSS 192; RSS 194;
RSS 195; RSS 196; RSS 197; RSS 199; RSS 210; RSS 211;
RSS 213; RSS 215; RSS 216; RSS 220; RSS 222; RSS 236;
RSS 238; RSS 243; RSS 244; RSS 246; RSS 247; RSS 248;
RSS 251; RSS 252; RSS 287; RSS 288; RSS 310; RSS Gen

(A2LA Cert. No. 2041.01) Revised 05/20/2022



Page 1 of 13

5202 Presidents Court, Suite 220 | Frederick, MD 21703-8515 | Phone: 301 644 3248 | Fax: 240 454 9449 | www.A2LA.org

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 130 of 142

V1.0

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Technology:

SAR/RF Exposure

Test Method(s) ²:

IEEE 1528-2013; RSS 102 Issue 5 (2015);
EN 50360-2017; EN 62209-1:2016; EN 62209-2:2010;
IEC 62209-1 2nd Edition 2016; IEC 62209-2 2010;
IEC PAS 63083-2017; EN 50566-2017; IEC 62209-2 AMD 1;
Australian Communications Authority Radio Communications
(Electromagnetic Radiation – Human Exposure) Standard 2014;
FCC KDB 248227 D01; FCC KDB 447498 D01, D02, and D03;
FCC KDB 615223 D01; FCC KDB 616217 D04;
FCC KDB 643646 D01; FCC KDB 648474 D03 and D04;
FCC KDB 680106 D01; FCC KDB 865664 D01 and D02;
FCC KDB 941225 D01, D05, D05A, D06, and D07;
EN 50401:2017; EN 50385:2017; IEC 62311:2008;
IEC 62479:2010; EN 62479:2010; EN 50663:2017;
EN 62311:2007; EN 62232:2017; IEC 62232:2017;
IEEE C95.1-2005; IEEE C95.1-1992; IEEE C95.3-2002;
RSS-102 (SAR, RF Exposure, NS), SPR-003; SPR-002; SPR-001;
SPR-004;
IEC TR 62630:2010; IEEE C95.3.1:2010; IEC TR 63170:2018;
AS/NZS 2772.2:2016; EN 62209-3: 2019; IEC 62209-3:2019;
C95.1: 2019; ICNIRP (100KHz – 300 GHz): 2020;
IEC 62311:2019; EN 62311:2020; IEC/IEEE 62209-1528:2020;
RRA Public Notification 2018-18, December 7, 2018

Hearing Aid Compatibility

ANSI C63.19:2007; ANSI C63.19:2011; ANSI C63.19:2019;
CTIA Test Plan for Hearing Aid Compatibility v.3.1.1 (2017);
FCC KDB 285076, D01 & D02; RSS-HAC

United States Radio

47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95,
96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E,
ANSI C63.26:2015); ANSI/TIA-603-D; TIA-102.CAAA-D;
FCC KDB 935210 D03 (v04); FCC KDB 935210 D04 (v02);
FCC KDB 935210 D05 (v01)

European Radio

ETSI EN 302 065-1 Version 2.1.1 (2016-11);
ETSI EN 302 065-2 Version 2.1.1 (2016-11);
ETSI EN 302 065-3 Version 2.1.1 (2016-11);
ETSI EN 302 065-4 Version 1.1.1 (2016-11);
ETSI EN 302 291-1 Version 1.1.1 (2005-07);
ETSI EN 302 291-2 Version 1.1.1 (2005-07);
ETSI EN 302 502 Version 2.1.3 (2017-07);
ETSI EN 302 510-1 Version 1.1.1;
ETSI EN 302 510-2 Version 1.1.1;
ETSI EN 302 537 Version 2.1.1 (2016-10);
ETSI EN 301 511 Version 12.5.1 (2017-03);
ETSI EN 301 839 Version 2.1.1 (2016-04);
ETSI EN 301 893 Version 2.1.1 (2017-05);
ETSI EN 301 893 Version 1.8.1 (2015-03);
ETSI EN 301 908-1 Version 13.1.1 (2019-11);
ETSI EN 301 908-13 Version 13.1.1 (2019-11);

(A2LA Cert. No. 2041.01) Revised 05/20/2022



Page 2 of 13

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 131 of 142

V1.0

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Technology:
Test Method(s) ²:

European Radio (cont'd)

ETSI EN 300 220-1 Version 3.1.1 (2017-02);
ETSI EN 300 220-2 Version 3.2.1 (2018-06);
ETSI EN 300 328 Version 2.1.1 (2016-11);
ETSI EN 300 328 Version 2.2.2 (2019-07);
ETSI EN 300 330 Version 2.1.1 (2017-02);
ETSI EN 300 440 Version 2. (22.1 (2018-07);
ETSI EN 300 440-2 Version 1.4.1 (2010-08);
KS X 3123, KS X 3142, KS X 3270, KS X 3271;
LP0002; DGT LP0002;

Korean Radio

Regulations on Radio Equipment
(MSIT Ordinance MSIT No. 63, Dec. 24, 2020);
Unlicensed Radio Equipment Established Without Notice
(MSIT Public Notification 2020-59, Oct. 16, 2020);
Technical Requirements for the Human Protection against
Electromagnetic Waves
(MSIT Public Notification 2019-4, January 16, 2019);
Equipment to be Subject of the Test Procedure for Electromagnetic
Field Strength and Specific Absorption Rate
(RRA Public Notification 2019-1, January 17, 2019);
Technical Requirements for Radio Equipment for
Telecommunication Services
(RRA Public Notification 2019-9, June 3, 2019);
Technical Requirements for Measurement and Test Procedure of
Specific Absorption Rate
(RRA Public Notification 2018-18, Dec 7, 2018);
Technical Requirements for Measurement of Electromagnetic Field
Strength (RRA Public Notification 2019-3, March 4, 2019)

Australia/New Zealand Radio

AS/NZS 4268:2017

Licensed Wireless Devices

ANSI C63.26:2015

Wired and Wireless Conformance

5G NR

3GPP TS 38.508-1; 3GPP TS 38.508-2; 3GPP TS 38.521-1;
3GPP TS 38.521-2; 3GPP TS 38.521-3; 3GPP TS 38.521-4;
3GPP TS 38.522; 3GPP TS 38.523-1; 3GPP TS 38.523-2;
3GPP TS 38.523-3; 3GPP TS 38.533; VZW 5G NR FR2 RFOTA;
VZW 5G Protocol Pre-Conformance (TS 38.523-1);
VZW 5G NR FR1 Supp RF;
VZW 5G NR RF Pre Conformance (TS 38.521-3);
VZW 5G NR Radio Resource Management (RRM)
Pre-Conformance (TS 38.533)

(A2LA Cert. No. 2041.01) Revised 05/20/2022



Page 3 of 13

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 132 of 142

V1.0

Test Technology:

Test Method(s) ²:

LTE

3GPP TS 36.521-1; 3GPP TS 36.521-3; 3GPP TS 36.523-1;
3GPP 37.571-1; 3GPP 37.571-2; 3GPP TS 34.229;
3GPP Carrier Aggregation;
PTCRB NAPRD.03; PTCRB PPMD;
PTCRB Cat-M (per RFT132 eMTC);
PVG.09 LTE Data Throughput & TR 37.901 Data Throughput
Performance;
PVG.04 PTCRB Radiated Spurious Emissions;
Global Certification Forum (GCF-CC) Certification / LTE Field
Test (TS.11) ³;
3GPP Cat-NB & Cat-M;
MetroPCS Lab Conformance; AT&T LTE Conformance;
AT&T IoT Accelerator Conformance, 19263;
VZW Lab Conformance; VZW Supl RF;
VZW FR2 Supplementary RF, VZW FR1 Supplementary RF;
VZW Supl Signaling Conformance;
VZW Supl RRM;
VZW LTE LBS Performance;
VZW Safe for Network (SFN), VZW Phase 1, VZW Open
Development and Field Interoperability Testing (FIT) ³;
VZW Network Extender; VZW PCO; VZW Data Retry;
VZW Data Throughput; VZW SMS; VZW AT Commands;
VZW CMAS; VZW eMBMS; VZW APN; VZW Cat-M VoLTE;
Live Network Extender and Android Test Plan;
Sprint LTE Test Plan; Sprint LTE Safe for Network (SFN);
Sprint LTE Conformance; Sprint LTE IoT;
Sprint Lab Conformance; USCC Lab Conformance;
KDDI LTE Device Testing; SoftBank LTE Testing

WCDMA (UTRA)

3GPP TS 34.121-1; 3GPP TS 34.123-1;
SoftBank Mobile WCDMA Testing

SVLTE / Multimode

CDMA-LTE Inter-RAT (iRAT); CDMA-LTE Inter-RAT SVD;
SVLTE: 1x RF with LTE Data Cal;
SVLTE: LTE RF with 1x Voice Call;
SVD and SVLTE: LTE Data Throughput with 1x Voice Call;
eHRPD; GMSS; SVD GMSS; E911 Data Call Processing;
Stress Testing; RSSI for MM Devices; SVD Interband;
LTE LBS Performance; VZW Multimode Supl Signaling;
VZW Multimode SMS; VZW Multimode Data Retry

VoLTE

IMS VoIP; Rich Communication Services (RCS);
VoLTE to 1xRTT Fallback for SVLTE (1xRTT Fallback);
IMS Registration and Retry; ePDG Live Network;
E911 for VoLTE; VZW hVoLTE;
VZW VoIP and VT Performance;
VZW Interband RRM and Protocol

(A2LA Cert. No. 2041.01) Revised 05/20/2022



Page 4 of 13

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 133 of 142

V1.0

Test Technology:

Test Method(s) ²:

Carrier Aggregation

VZW Carrier Aggregation Supplementary RF;
VZW Carrier Aggregation Data Throughout

UICC

USIM/USAT/CSIM/ISIM Interaction Test Plan
(LTE/WCDMA/GSM/CDMA/MM);
3GPP TS 31.121; 3GPP TS 31.124;
ETSI TS 102 230;
SIM Application Interaction Test Plan;
UICC USIM ISIM Electrical;
UICC USIM ISIM Protocol
(LTE/WCDMA/GSM/CDMA);
SWP/HCI ETSI TS 102 694-1; ETSI TS 102 695-1

SunSpec Alliance

SunSpec – CSIP (Common Smart Inverter Profile) Conformance
Test Procedures;
SunSpec – Advanced Function Inverter Test Lab Specification;
SunSpec – UL1741 Supplement SA/Rule 21 Implementation
Guide;
IEEE 2030.5-2018 Smart Energy Profile Application Protocol

CBRS (OnGo) / WinnForum

CBRS Alliance Certification Test Plan;
WinnForum Conformance and Performance Test Technical
Standards

¹ This accreditation covers testing performed at the main laboratory listed above, and the three satellite laboratories listed below:

(A2LA Cert. No. 2041.01) Revised 05/20/2022



Page 5 of 13

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 134 of 142

V1.0

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7195 Oakland Mills Rd, Suite A
Columbia, MD 21046

Test Technology:

Wireless

Test Method(s) ²:

3GPP2 C.S0011-C 20-Feb-2006 (TIA-98D/E/F)
(excluding Sections 3.2.1.3, 3.2.3.2, 3.3.3, 3.3.4, 3.3.5, 3.3.6,
3.4.6, 3.4.8, 3.4.10, 3.4.11, 3.4.12, 3.4.13, 3.7.2, 4.4.8, 4.4.9.2.1,
4.4.10, 4.4.11);
3GPP2 C.S0043-0 24-Sep-2004 (TIA-1035);
3GPP2 C.S0036-0 11-Mar-2002 (TIA-916);
3GPP2 C.S0036-A 23-May-2011 (TIA-916-A);
3GPP2 C.S0037-0 19-Apr-2002 (TIA-918);
3GPP2 C.S0056-0 22-Jul-2005 (TIA-1042);
3GPP2 C.S0059-0 20-Aug-2008 (TIA-1038);
3GPP2 C.S0060-0 06-Dec-2005 (TIA-1044);
3GPP2 C.S0061-0 22-Jun-2005 (TIA-1045);
3GPP2 C.S0062-0 14-May-2007 (TIA-1046);
3GPP2 C.S0073-0 26-Sep-2005 (TIA-1084);
3GPP2 C.S0073-B 21-Aug-2009 (TIA n/a);
3GPP2 C.S0094-0 30-Oct-2008 (TIA-1157);
CTIA Conformance Test Plan for CDMA Wireless Devices;
GCF Certification Criteria 2 (CAG2) Test Plan;
VZW Wireless Priority Services (WPS);
VZW Safe for Network (SFN);
VZW Open Development (OD) Device Specifications;
VZW Location Based Services (LBS);
VZW CMAS; VZW NBPCD; VZW Phase 1

EVDO

3GPP2 C.S0033-0 12-Dec-2003 (TIA-866);
3GPP2 C.S0033-A 14-Dec-2005 (TIA-866);
3GPP2 C.S0038-0 19-Apr-2002 (TIA-919);
3GPP2 C.S0038-A 26-Sep-2005 (TIA-919);
3GPP2 C.S0038-B 30-Mar-2009 (TIA n/a);
3GPP2 C.S0037-0 19-Apr-2002 (TIA-918);
CTIA Conformance Test Plan for CDMA Wireless Devices;
GCF Certification Criteria 2 (CAG2) Test Plan

(A2LA Cert. No. 2041.01) Revised 05/20/2022



Page 6 of 13

FCC ID: A3LSMF721U	PART 30 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204080051-01.A3L	Test Dates: 05/11/2022–06/16/2022	EUT Type: Portable Handset	Page 135 of 142

V1.0

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.