



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

**Model: SM-G110M
FCC ID: A3LSMG110M**

**Report Number: 14I18253-S5
Issue Date: 07/15/2014**

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO, 443-742, South Korea**

Prepared by
**UL Verification Services Inc.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
--	07/15/2014	Initial Issue	--

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System	7
4.2.	Test Equipment.....	8
5.	Measurement Uncertainty.....	9
6.	Device Under Test (DUT) Information	10
6.1.	DUT Description	10
6.2.	Wireless Technologies.....	10
6.3.	Nominal and Maximum Output Power.....	11
6.4.	Simultaneous Transmission Condition	11
6.5.	Antenna Dimensions and Separation Distances	12
7.	RF Exposure Conditions (Test Configurations)	13
7.1.	Head.....	13
7.2.	Body-worn Accessory.....	13
7.3.	Wireless Router (Hotspot).....	13
8.	Conducted Output Power Measurements.....	14
8.1.	GSM850 and GSM1900.....	14
8.2.	W-CDMA Band V and II	15
8.3.	Wi-Fi (2.4 GHz Band) (reference to additional KDB in footnote).....	19
8.4.	Bluetooth	19
9.	Dielectric Property Measurements.....	20
9.1.	Tissue Dielectric Parameters	20
9.2.	Dielectric Property Measurements Results	21
10.	System Check.....	22
10.1.	Reference Target SAR Values	22
10.2.	System Check Results	22
11.	Measured and Reported (Scaled) SAR Results.....	23
11.1.	GSM850.....	24
11.2.	GSM1900.....	24
11.3.	W-CDMA Band V	25
11.4.	W-CDMA Band II.....	25

11.5.	Wi-Fi (DTS Band).....	25
11.6.	Bluetooth.....	26
11.6.1.	Standalone SAR Test Exclusion Considerations	26
11.6.2.	Estimated SAR.....	26
12.	SAR Measurement Variability.....	27
12.1.	The Highest Measured SAR Configuration in Each Frequency Band	27
12.2.	Repeated Measurement Results	27
13.	Simultaneous Transmission SAR Analysis.....	28
13.1.	Sum of the SAR for GSM850 & Wi-Fi & BT	29
13.2.	Sum of the SAR for GSM1900 & Wi-Fi & BT	29
13.3.	Sum of the SAR for WCDMA Band V & Wi-Fi & BT.....	30
13.4.	Sum of the SAR for WCDMA Band II & Wi-Fi & BT	30
14.	Appendixes.....	31
14.1.	Photos and Antenna Locations.....	31
14.2.	System Performance Check Plots.....	31
14.3.	Highest SAR Test Plots.....	31
14.4.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3773	31
14.5.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3991	31
14.6.	Calibration Certificate for D835V2 - SN 4d002	31
14.7.	Calibration Certificate for D1900V2- SN 5d043	31
14.8.	Calibration Certificate for D2450V2 - SN 899	31

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO., LTD.		
Application Purpose	☒ Original Grant ☐ Class II Permissive Change		
FCC ID	A3LSMG110M		
DUT Description	GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n		
Exposure Category	General Population/Uncontrolled Exposure (1g SAR limit: 1.6 W/kg)		
The highest reported SAR	RF Exposure Conditions	Equipment Class	
		Licensed	DTS
	Head	1.057 W/kg	0.413 W/kg
	Body-worn Accessory	1.107 W/kg	0.207 W/kg
	Wireless Router (Hotspot)	1.107 W/kg	0.207 W/kg
	Simultaneous Transmission	Head: 1.470 W/kg Body: 1.310 W/kg	
Highest SAR across exposure conditions	1.107 W/kg		
Applicable Standards	FCC 47 CFR § 2.1093 KDB publication IEEE Std 1528-2013		
Test Results	Pass		
Date tested	07/09/2014 – 07/14/2014		
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.			
Approved & Released By:		Prepared By:	
			
Devin Chang Senior Engineer UL Verification Services Inc.		Tony Soares Laboratory Technician UL Verification Services Inc.	

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2003 & 2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D06 Hotspot Mode SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

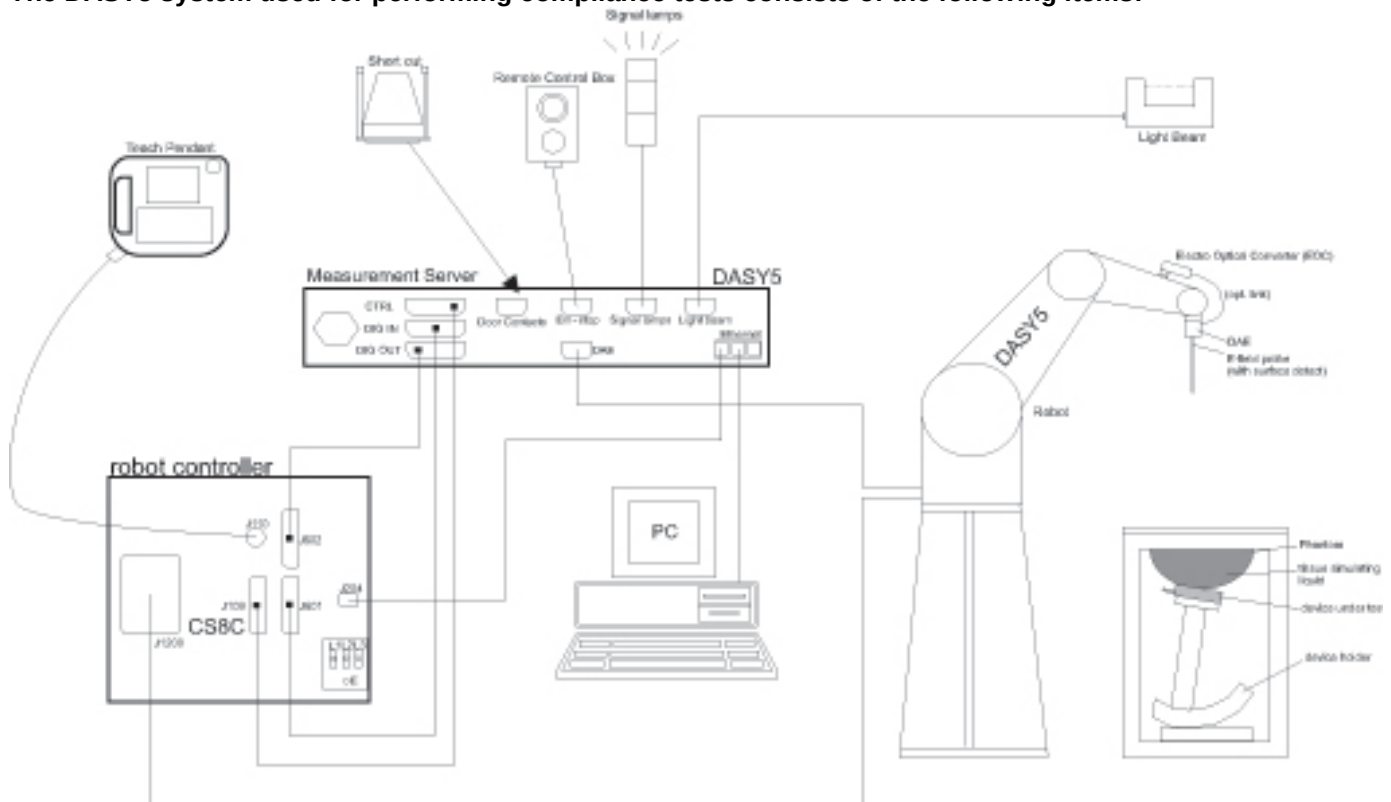

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	ENA Series/E5071B	MY42100131	2/24/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1087	11/13/2014
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529163	9/19/2014
Thermometer	EXTECH	445703	CCS-200	3/24/2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
ESG Vecto Signal Generator	Agilent	E4438C	MY47271507	6/17/2015
Power Meter	HP	438A	2822A05684	10/10/2014
Power Sensor	Agilent	8481A	2237A31744	10/2/2014
Power Sensor	Agilent	8481A	2349A36506	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808939	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	Sorensen Ametek	XT15-4	1319A02778	N/A
ESG Vecto Signal Generator	Agilent	E4438C	MY47271045	6/18/2015
Power Meter	HP	438A	3513U04320	10/2/2014
Power Sensor	Agilent	8481A	2702A66876	9/30/2014
Power Sensor	Agilent	8481A	3318A95392	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR 3)	SPEAG	EX3DV4	3773	4/22/2015
E-Field Probe (SAR 5)	SPEAG	EX3DV4	3991	5/6/2015
Data Acquisition Electronics (SAR 3)	SPEAG	DAE4	1343	7/24/2014
Data Acquisition Electronics (SAR 5)	SPEAG	DAE4	1439	5/14/2015
System Validation Dipole	SPEAG	D835V2	4d002	11/15/2014
System Validation Dipole	SPEAG	D1900V2	5d043	11/12/2014
System Validation Dipole	SPEAG	D2450V2	899	9/10/2014
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/3/2015
Thermometer (SAR Lab 5)	EXTECH	445703	CCS-239	6/3/2015

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53040015	6/29/2015
Power Sensor	Agilent	N1921A	MY52020011	5/6/2015
Base Station Simulator	Agilent	8960	GB46160222	11/21/2014
Base Station Simulator	R & S	CMW500	132910-cp	4/25/2015
Base Station Simulator	R & S	CMW500	124594-HX	7/2/2015

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 & 2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Model: SM-G110M	
Device Dimension	Overall (Length x Width): 110 mm x 60mm Overall Diagonal: 116mm Display Diagonal: 83mm
Battery Back Cover	☒ Normal Battery Cover ☐ Normal Battery Cover with NFC ☐ Wireless Charger Battery Cover ☐ Wireless Charger Battery Cover with NFC.
Battery Options	☒ Standard – Lithium-ion battery, Rating 3.7Vdc, 4.44Wh ☐ Extended (large capacity)
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☐ Wi-Fi Direct (Wi-Fi 5 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
GSM	850, 1900	Voice (GMSK), GPRS (GMSK) EGPRS (EDGE) Rx Only	GSM Voice: 12.5%; GPRS: 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%,
	GPRS Multi-Slot Class: ☐ Class 8 - One Up ☐ Class 10 - Two Up ☒ Class 12 - Four Up ☐ Class 33 - Four Up DTM (Dual Transfer Mode): Not support		
W-CDMA (UMTS)	Band V and II	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5, CAT 14) HSUPA (Rel. 6, CAT 6) HSPA+ (Rel. 6, CAT 6)	100%
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
Bluetooth	2.4 GHz	Version 4.0 LE + EDR	32.25% (DH1), 66.68% (DH3), 77.52% (DH5)

6.3. Nominal and Maximum Output Power

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
GSM850	Voice	32.5	33.0
	GPRS 1 slot	32.5	33.0
	GPRS 2 slots	29.5	30.0
	GPRS 3 slot	27.5	28.0
	GPRS 4 slots	26.0	26.5
GSM1900	Voice	29.5	30.0
	GPRS 1 slot	29.5	30.0
	GPRS 2 slots	28.0	28.5
	GPRS 3 slot	26.0	26.5
	GPRS 4 slots	24.0	24.5
W-CDMA Band V	R99	22.5	23.0
	HSDPA	22.0	22.5
	HSUPA	22.0	22.5
W-CDMA Band II	R99	22.5	23.0
	HSDPA	22.0	22.5
	HSUPA	22.0	22.5

Upper limit (dB): 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	17.0	17.5
	802.11g	13.0	13.5
	802.11n HT20	12.0	12.5
Bluetooth		8.5	9.0
Bluetooth LE		7.0	7.5

6.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	1. GSM 850/1900 Voice + Wi-Fi 2.4GHz 2. GSM 850/1900 (GPRS) + Wi-Fi 2.4GHz 3. WCDMA Band II/IV + Wi-Fi 2.4GHz
Body-worn Accessory	1. GSM 850/1900 Voice + Wi-Fi 2.4GHz 2. GSM 850/1900 Voice + BT 3. GSM 850/1900 (GPRS) + Wi-Fi 2.4GHz (VoIP) 4. GSM 850/1900 (GPRS) + BT(VoIP) 5. WCDMA Band II/IV + Wi-Fi 2.4GHz 6. WCDMA Band II/IV + BT
Wireless Router (Hotspot)	1. GSM 850/1900 (GPRS) + Wi-Fi 2.4GHz 2. WCDMA Band II/IV + Wi-Fi 2.4GHz
Notes: 1. Wi-Fi only 2.4GHz supports Hotspot. 2. GPRS and WCDMA support Hotspot. 3. VoIP is supported in WCDMA and GPRS. 4. Wi-Fi 2.4 GHz Radio cannot transmit simultaneously with Bluetooth Radio.	


6.5. Antenna Dimensions and Separation Distances

① Wi-Fi / BT Ant (TX & RX)

② Main Ant (TX & RX)

- GSM 850/1900

-W-CDMA 850/1900

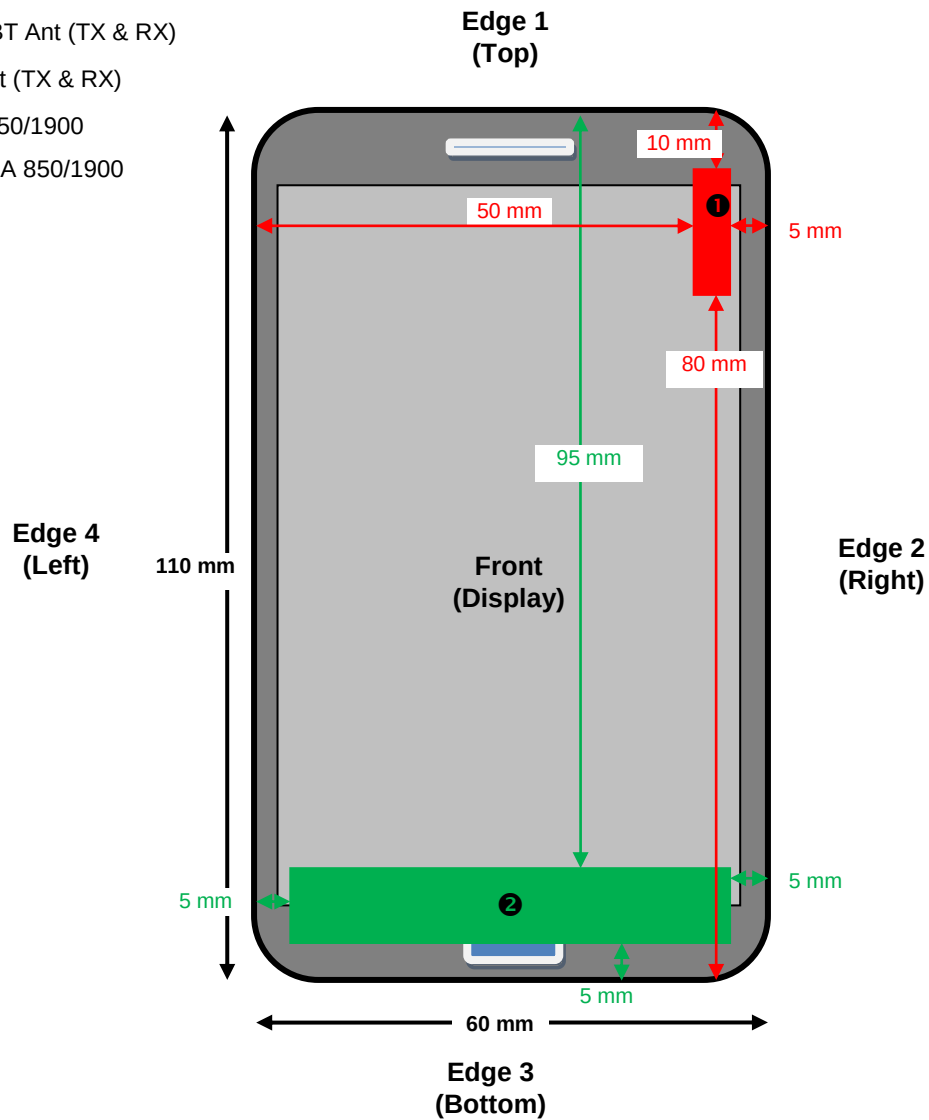

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix “Antenna Locations and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Head

For WWAN and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

7.2. Body-worn Accessory

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

7.3. Wireless Router (Hotspot)

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	95 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 2 (Right)	5 mm	Yes	
Edge 3 (Bottom)	5 mm	Yes	
Edge 4 (Left)	5 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	10 mm	Yes	
Edge 2 (Right)	5 mm	Yes	
Edge 3 (Bottom)	80 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 4 (Left)	50 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR

8. Conducted Output Power Measurements

The proprietary logic is used to determine when head/body power table is used.

8.1. GSM850 and GSM1900

GSM850

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
850	GSM (Voice)	CS1	1	128	824.2	32.3	23.3
				190	836.6	32.4	23.4
				251	848.8	32.5	23.5
	GPRS (GMSK)	CS1	1	128	824.2	32.3	23.3
				190	836.6	32.4	23.4
				251	848.8	32.5	23.5
			2	128	824.2	29.3	23.3
				190	836.6	29.4	23.4
				251	848.8	29.4	23.4
			3	128	824.2	27.5	23.2
				190	836.6	27.5	23.2
				251	848.8	27.5	23.2
			4	128	824.2	25.6	22.6
				190	836.6	25.6	22.6
				251	848.8	25.6	22.6

EGPRS(8PSK) is Rx only

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above

GSM1900

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	29.7	20.7
				661	1880.0	29.7	20.7
				810	1909.8	29.7	20.7
	GPRS (GMSK)	CS1	1	512	1850.2	29.7	20.7
				661	1880.0	29.7	20.7
				810	1909.8	29.7	20.7
			2	512	1850.2	27.9	21.9
				661	1880.0	28.0	22.0
				810	1909.8	28.1	22.1
			3	512	1850.2	25.7	21.4
				661	1880.0	25.8	21.5
				810	1909.8	26.0	21.7
			4	512	1850.2	23.8	20.8
				661	1880.0	24.0	21.0
				810	1909.8	24.1	21.1

EGPRS(8PSK) is Rx only

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above

8.2. W-CDMA Band V and II

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	22.4
		4183	836.6	22.3
		4233	846.6	22.2
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	22.8
		9400	1880.0	22.6
		9538	1907.6	22.5

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	1	1.5	1.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	21.3
		4183	836.6	0	21.2
		4233	846.6	0	21.3
	Subtest 2	4132	826.4	0	21.4
		4183	836.6	0	21.2
		4233	846.6	0	21.4
	Subtest 3	4132	826.4	0.5	21.4
		4183	836.6	0.5	21.2
		4233	846.6	0.5	21.5
	Subtest 4	4132	826.4	0.5	21.4
		4183	836.6	0.5	21.2
		4233	846.6	0.5	21.4
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.6
		9400	1880.0	0	21.6
		9538	1907.6	0	21.5
	Subtest 2	9262	1852.4	0	21.8
		9400	1880.0	0	21.7
		9538	1907.6	0	21.5
	Subtest 3	9262	1852.4	0.5	21.8
		9400	1880.0	0.5	21.7
		9538	1907.6	0.5	21.6
	Subtest 4	9262	1852.4	0.5	21.7
		9400	1880.0	0.5	21.7
		9538	1907.6	0.5	21.5

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	134/15
	CM (dB)	1.0	3.0	2.0	3.0	1.0
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11		E-TFCI 11	E-TFCI 11	
		E-TFCI PO 4			E-TFCI PO 4	
		E-TFCI 67			E-TFCI 67	
		E-TFCI PO 18			E-TFCI PO 18	
E-TFCI 71		E-TFCI 71				
E-TFCI PO 23	E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18	E-TFCI PO 23				
E-TFCI 75		E-TFCI 75				
E-TFCI PO 26		E-TFCI PO 26				
E-TFCI 81		E-TFCI 81				
E-TFCI PO 27		E-TFCI PO 27				

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	20.8
		4183	836.6	0	20.7
		4233	846.6	0	20.6
	Subtest 2	4132	826.4	2	20.1
		4183	836.6	2	19.9
		4233	846.6	2	19.9
	Subtest 3	4132	826.4	1	21.3
		4183	836.6	1	21.1
		4233	846.6	1	21.1
	Subtest 4	4132	826.4	2	20.5
		4183	836.6	2	20.5
		4233	846.6	2	20.5
W-CDMA Band II	Subtest 1	4132	826.4	0	22.4
		4183	836.6	0	22.2
		4233	846.6	0	22.2
	Subtest 2	9262	1852.4	0	20.5
		9400	1880.0	0	20.5
		9538	1907.6	0	20.5
	Subtest 3	9262	1852.4	2	20.0
		9400	1880.0	2	19.8
		9538	1907.6	2	19.7
	Subtest 4	9262	1852.4	1	21.3
		9400	1880.0	1	21.1
		9538	1907.6	1	21.0
	Subtest 5	9262	1852.4	2	20.4
		9400	1880.0	2	20.5
		9538	1907.6	2	20.4

HSPA+

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

8.3. Wi-Fi (2.4 GHz Band) (reference to additional KDB in footnote)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	∇
		2.437	6	√	∇
		2.462	11 [#]	√	∇

Notes:

√ = "default test channels"

∇ = possible 802.11g channels with maximum average output $\frac{1}{4}$ dB $\geq$ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	17.1	Yes
			6	2437	17.3	
			11	2462	17.4	
	802.11g	6 Mbps	1	2412	12.8	No
			6	2437	12.9	
			11	2462	13.0	
	802.11n (HT20)	MCS0	1	2412	12.4	No
			6	2437	11.8	
			11	2462	12.0	

Note(s):

- Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	17.3	Yes
			2 Mbps	17.2	No
			5.5 Mbps	17.1	No
			11 Mbps	16.9	No

8.4. Bluetooth

Maximum tune-up tolerance limit is 9 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

9. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

9.1. Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3

9.2. Dielectric Property Measurements Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Lab 3

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
7/8/2014	Head 1900	e'	38.4600	Relative Permittivity (ϵ_r):	38.46	40.00	-3.85	5
		e"	13.6600	Conductivity (σ):	1.44	1.40	3.08	5
	Head 1850	e'	38.6500	Relative Permittivity (ϵ_r):	38.65	40.00	-3.38	5
		e"	13.5400	Conductivity (σ):	1.39	1.40	-0.51	5
	Head 1910	e'	38.4000	Relative Permittivity (ϵ_r):	38.40	40.00	-4.00	5
		e"	13.6600	Conductivity (σ):	1.45	1.40	3.62	5
7/8/2014	Body 1900	e'	51.0800	Relative Permittivity (ϵ_r):	51.08	53.30	-4.17	5
		e"	14.4400	Conductivity (σ):	1.53	1.52	0.36	5
	Body 1850	e'	51.2000	Relative Permittivity (ϵ_r):	51.20	53.30	-3.94	5
		e"	14.3200	Conductivity (σ):	1.47	1.52	-3.09	5
	Body 1910	e'	51.0600	Relative Permittivity (ϵ_r):	51.06	53.30	-4.20	5
		e"	14.4300	Conductivity (σ):	1.53	1.52	0.82	5

SAR Lab 5

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
7/10/2014	Head 2450	e'	40.05	Relative Permittivity (ϵ_r):	40.05	39.2	2.17	5
		e"	12.9	Conductivity (σ):	1.76	1.8	-2.37	5
	Head 2410	e'	40.17	Relative Permittivity (ϵ_r):	40.17	39.28	2.27	5
		e"	12.81	Conductivity (σ):	1.72	1.76	-2.49	5
	Head 2475	e'	39.96	Relative Permittivity (ϵ_r):	39.96	39.17	2.02	5
		e"	12.97	Conductivity (σ):	1.78	1.83	-2.31	5
7/10/2014	Body 2450	e'	51.08	Relative Permittivity (ϵ_r):	51.08	52.7	-3.07	5
		e"	14.86	Conductivity (σ):	2.02	1.95	3.81	5
	Body 2410	e'	51.23	Relative Permittivity (ϵ_r):	51.23	52.76	-2.9	5
		e"	14.71	Conductivity (σ):	1.97	1.91	3.34	5
	Body 2475	e'	50.99	Relative Permittivity (ϵ_r):	50.99	52.67	-3.19	5
		e"	14.98	Conductivity (σ):	2.06	1.99	3.85	5
7/11/2014	Head 835	e'	40.8200	Relative Permittivity (ϵ_r):	40.82	41.50	-1.64	5
		e"	19.5900	Conductivity (σ):	0.91	0.90	1.06	5
	Head 820	e'	41.0100	Relative Permittivity (ϵ_r):	41.01	41.60	-1.42	5
		e"	19.6400	Conductivity (σ):	0.90	0.90	-0.33	5
	Head 850	e'	40.6300	Relative Permittivity (ϵ_r):	40.63	41.50	-2.10	5
		e"	19.5300	Conductivity (σ):	0.92	0.92	0.88	5
7/11/2014	Body 835	e'	52.5900	Relative Permittivity (ϵ_r):	52.59	55.20	-4.73	5
		e"	21.9300	Conductivity (σ):	1.02	0.97	4.97	5
	Body 820	e'	52.7600	Relative Permittivity (ϵ_r):	52.76	55.28	-4.55	5
		e"	21.9900	Conductivity (σ):	1.00	0.97	3.53	5
	Body 850	e'	52.4100	Relative Permittivity (ϵ_r):	52.41	55.16	-4.98	5
		e"	21.8700	Conductivity (σ):	1.03	0.99	4.71	5

10. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

10.1. Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d002	11/15/2013	835	1g	9.49	9.43
				10g	6.18	6.21
D1900V2	5d043	11/12/2013	1900	1g	40.1	39.0
				10g	21.1	20.8
D2450V2	899	9/10/2013	2450	1g	51.3	49.7
				10g	23.9	23.3

10.2. System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 3

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
7/8/2014	D1900V2	5d043	Head	1g	4.27	4.11	41.1	40.1	2.49	
				10g	2.19	2.12	21.2	21.1	0.47	
7/8/2014	D1900V2	5d043	Body	1g	4.04	4.01	40.1	39.0	2.82	1,2
				10g	2.03	2.10	21.0	20.8	0.96	

SAR Lab 5

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
7/10/2014	D2450V2	899	Head	1g	5.09	5.11	51.1	51.3	-0.39	
				10g	2.22	2.32	23.2	23.9	-2.93	
7/10/2014	D2450V2	899	Body	1g	5.26	5.23	52.3	49.7	5.23	3,4
				10g	2.28	2.43	24.3	23.3	4.29	
7/11/2014	D835V2	4d002	Body	1g	1.06	1.03	10.3	9.43	9.23	5,6
				10g	0.706	0.68	6.8	6.21	9.50	
7/11/2014	D835V2	4d002	Head	1g	1.02	1.01	10.1	9.49	6.43	
				10g	0.685	0.661	6.6	6.18	6.96	

11. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least $\frac{1}{4}$ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2.

KDB 248227 D01 SAR Measurements Procedures for 802.11 a/b/g Transmitters v01r02 (pg.6):

Each channel should be tested at the lowest data rate in each a-b/g mode or 4.9 GHz channel BW configuration.

When the extrapolated maximum peak SAR for the maximum output channel is ≤ 1.6 W/kg and the 1-g averaged SAR is ≤ 0.8 W/kg, testing of other channels in the "default test channels" or "required test channels" configuration is optional.

11.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	128	824.2	33.0	32.3	0.740	0.869	1
				190	836.6	33.0	32.4	0.642	0.737	
				251	848.8	33.0	32.5	0.546	0.613	
			Left Tilt	190	836.6	33.0	32.4	0.285	0.327	
			Right Touch	190	836.6	33.0	32.4	0.511	0.587	
			Right Tilt	190	836.6	33.0	32.4	0.275	0.316	
Head VoIP	GPRS 2 Slots	0	Left Touch	128	824.4	30.0	29.3	0.900	1.057	2
				190	836.6	30.0	29.4	0.809	0.929	
				251	848.8	30.0	29.4	0.670	0.769	
			Left Tilt	190	836.6	30.0	29.4	0.410	0.471	
			Right Touch	190	836.6	30.0	29.4	0.578	0.664	
			Right Tilt	190	836.6	30.0	29.4	0.318	0.365	
Body-worn	Voice	10	Rear	190	836.6	33.0	32.4	0.621	0.713	3
			Front	190	836.6	33.0	32.4	0.517	0.594	
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	10	Rear	128	824.4	30.0	29.3	0.787	0.925	4
				190	836.6	30.0	29.4	0.660	0.758	
				251	848.8	30.0	29.4	0.524	0.602	
Hotspot			Front	190	836.6	30.0	29.4	0.573	0.658	
			Edge 2	190	836.6	30.0	29.4	0.264	0.303	
			Edge 3	190	836.6	30.0	29.4	0.106	0.122	
			Edge 4	190	836.6	30.0	29.4	0.470	0.540	

11.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	
						Tune-up limit	Meas.	Meas.	Scaled		
Head	Voice	0	Left Touch	661	1880.0	30.0	29.7	0.517	0.554	5	
			Left Tilt	661	1880.0	30.0	29.7	0.206	0.221		
			Right Touch	661	1880.0	30.0	29.7	0.486	0.521		
			Right Tilt	661	1880.0	30.0	29.7	0.248	0.266		
Head VoIP	GPRS 2 Slots	0	Left Touch	661	1880.0	28.5	28.0	0.663	0.744	6	
			Left Tilt	661	1880.0	28.5	28.0	0.279	0.313		
			Right Touch	661	1880.0	28.5	28.0	0.653	0.733		
			Right Tilt	661	1880.0	28.5	28.0	0.328	0.368		
Body-worn	Voice	10	Rear	661	1880.0	30.0	29.7	0.557	0.597	7	
			Front	661	1880.0	30.0	29.7	0.500	0.536		
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	10	Rear	512	1850.2	28.5	27.9	0.706	0.811		
				661	1880.0	28.5	28.0	0.758	0.850		
				819	1909.8	28.5	28.1	0.776	0.851	8	
			Hotspot	Front	661	1880.0	28.5	28.0	0.669	0.751	
Edge 2					661	1880.0	28.5	28.0	0.190	0.213	
Edge 3					661	1880.0	28.5	28.0	0.409	0.459	
				Edge 4	661	1880.0	28.5	28.0	0.134	0.150	

11.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	23.0	22.3	0.576	0.677	9
			Left Tilt	4183	836.6	23.0	22.3	0.230	0.270	
			Right Touch	4183	836.6	23.0	22.3	0.442	0.519	
			Right Tilt	4183	836.6	23.0	22.3	0.208	0.244	
Body-worn & Hptspot	Rel 99 RMC	10	Rear	4183	836.6	23.0	22.3	0.564	0.663	10
			Front	4183	836.6	23.0	22.3	0.478	0.562	
Hotspot	Rel 99 RMC	10	Edge 2	4183	836.6	23.0	22.3	0.243	0.286	
			Edge 3	4183	836.6	23.0	22.3	0.093	0.109	
			Edge 4	4183	836.6	23.0	22.3	0.365	0.429	

11.4. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9262	1852.4	23.0	22.8	0.965	1.010	
				9400	1880.0	23.0	22.6	0.935	1.025	
				9538	1907.6	23.0	22.5	0.791	0.888	
			Left Tilt	9400	1880.0	23.0	22.6	0.375	0.411	
				9262	1852.4	23.0	22.8	0.992	1.039	11
				9400	1880.0	23.0	22.6	0.908	0.996	
			Right Touch	9538	1907.6	23.0	22.5	0.834	0.936	
				9400	1880.0	23.0	22.6	0.441	0.484	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	9262	1852.4	23.0	22.8	0.948	0.993	
				9400	1880.0	23.0	22.6	1.010	1.107	12
				9538	1907.6	23.0	22.5	0.883	0.991	
			Front	9262	1852.4	23.0	22.8	0.842	0.882	
				9400	1880.0	23.0	22.6	0.869	0.953	
				9538	1907.6	23.0	22.5	0.784	0.880	
Hotspot	Rel 99 RMC	10	Edge 2	9400	1880.0	23.0	22.6	0.267	0.293	
			Edge 3	9400	1880.0	23.0	22.6	0.582	0.638	
			Edge 4	9400	1880.0	23.0	22.6	0.193	0.212	

11.5. Wi-Fi (DTS Band)

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Head	802.11b 1 Mbps	0	Left Touch	6	2437.0	17.5	17.3	0.394	0.413	13
				Left Tilt	6	2437.0	17.5	17.3	0.295	0.309	
				Right Touch	6	2437.0	17.5	17.3	0.290	0.304	
				Right Tilt	6	2437.0	17.5	17.3	0.373	0.391	
	Body-worn & Hotspot	802.11b 1 Mbps	10	Rear	6	2437.0	17.5	17.3	0.194	0.203	
				Front	6	2437.0	17.5	17.3	0.198	0.207	14
	Hotspot	802.11b 1 Mbps	10	Edge 1	6	2437.0	17.5	17.3	0.114	0.119	
				Edge 2	6	2437.0	17.5	17.3	0.133	0.139	

11.6. Bluetooth

11.6.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
9.0	8	10	2.480	1.3

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

11.6.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	8	10	2.480	0.168

12. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

12.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Wireless Router (Hotspot) (W/kg)	Repeated SAR (Yes/No)
850	GSM 850	0.900			Yes
	WCDMA Band V				No
1900	GSM 1900				No
	WCDMA Band II		1.010		Yes
2400	Wi-Fi 802.11b/g/n	0.394			No

12.2. Repeated Measurement Results

Head

Frequency band	Test Position	Antenna	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
						Original	Repeated		
GSM850	Left Touch	1	GPRS 2 slots	128	826.4	0.900	0.889	1.01	1

Body-worn Accessory & Wireless Router (Hotspot)

Frequency band	Test Position	Antenna	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
						Original	Repeated		
W-CDMA Band II	Rear	1	Rel 99 RMC 12.2 kbps	9400	1880.0	1.010	0.961	1.05	1

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

13. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04 \text{ Sum of the SAR for GSM850 \& Wi-Fi \& BT}$$

13.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM850	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	1.057	0.413		1.470	No
	Left Tilt	① + ②	0.471	0.309		0.780	No
	Right Touch	① + ②	0.664	0.304		0.968	No
	Right Tilt	① + ②	0.365	0.391		0.756	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.925	0.203		1.128	No
		① + ③	0.925		0.168	1.093	No
	Front	① + ②	0.658	0.207		0.865	No
		① + ③	0.658		0.168	0.826	No
Hotspot	Edge 1	① + ②		0.119		0.119	No
	Edge 2	① + ②	0.303	0.139		0.442	No
	Edge 3	① + ②	0.122			0.122	No
	Edge 4	① + ②	0.540			0.540	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

13.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM1900	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.744	0.413		1.157	No
	Left Tilt	① + ②	0.313	0.309		0.622	No
	Right Touch	① + ②	0.733	0.304		1.037	No
	Right Tilt	① + ②	0.368	0.391		0.759	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.851	0.203		1.054	No
		① + ③	0.851		0.168	1.019	No
	Front	① + ②	0.751	0.207		0.958	No
		① + ③	0.751		0.168	0.919	No
Hotspot	Edge 1	① + ②		0.119		0.119	No
	Edge 2	① + ②	0.213	0.139		0.352	No
	Edge 3	① + ②	0.459			0.459	No
	Edge 4	① + ②	0.150			0.150	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

13.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band V	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.677	0.413		1.090	No
	Left Tilt	① + ②	0.270	0.309		0.579	No
	Right Touch	① + ②	0.519	0.304		0.823	No
	Right Tilt	① + ②	0.244	0.391		0.635	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.663	0.203		0.866	No
		① + ③	0.663		0.168	0.831	No
	Front	① + ②	0.562	0.207		0.769	No
		① + ③	0.562		0.168	0.730	No
Hotspot	Edge 1	① + ②		0.119		0.119	No
	Edge 2	① + ②	0.286	0.139		0.425	No
	Edge 3	① + ②	0.109			0.109	No
	Edge 4	① + ②	0.429			0.429	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

13.4. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band II	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	1.025	0.413		1.438	No
	Left Tilt	① + ②	0.411	0.309		0.720	No
	Right Touch	① + ②	1.039	0.304		1.343	No
	Right Tilt	① + ②	0.484	0.391		0.875	No
Body-worn Accessory & Hotspot	Rear	① + ②	1.107	0.203		1.310	No
		① + ③	1.107		0.168	1.275	No
	Front	① + ②	0.953	0.207		1.160	No
		① + ③	0.953		0.168	1.121	No
Hotspot	Edge 1	① + ②		0.119		0.119	No
	Edge 2	① + ②	0.293	0.139		0.432	No
	Edge 3	① + ②	0.638			0.638	No
	Edge 4	① + ②	0.212			0.212	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14. Appendixes

Refer to separated files for the following appendixes.

- 14.1. Photos and Antenna Locations**
- 14.2. System Performance Check Plots**
- 14.3. Highest SAR Test Plots**
- 14.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3773**
- 14.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3991**
- 14.6. Calibration Certificate for D835V2 - SN 4d002**
- 14.7. Calibration Certificate for D1900V2- SN 5d043**
- 14.8. Calibration Certificate for D2450V2 - SN 899**

END OF REPORT