



**FCC 47 CFR Parts 1 & 2
Published RF Exposure KDB Procedures
IEEE Std 1528-2013**

SAR EVALUATION REPORT

For
GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC

**Model: SM-G313MU
FCC ID: A3LSMG313MU**

**Report Number: 14I17974-S6
Issue Date: 6/19/2014**

Prepared for
**SAMSUNG ELECTRONICS CO. LTD.
416 MAETAN 3-DONG, WEONGTONG-GU
SUWON CITY, GYEONGGI-DO, SOUTH KOREA, 443-742**

Prepared by
**UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	6/19/2014	Initial Issue	--

Table of Contents

1. Attestation of Test Results.....	6
2. Test Methodology	7
3. Facilities and Accreditation	7
4. Calibration and Uncertainty	8
4.1. Measuring Instrument Calibration	8
4.2. Measurement Uncertainty	9
5. Measurement System Description and Setup.....	10
6. SAR Measurement Procedure.....	11
6.1. Normal SAR Measurement Procedure.....	11
6.2. Volume Scan Procedures	13
7. Device Under Test.....	14
7.1. General Information	14
7.2. Wireless Technologies.....	15
7.3. RF Output Power Tolerance	16
7.4. Simultaneous Transmission Condition	17
7.5. General LTE SAR Test and Reporting Considerations.....	18
8. RF Exposure Conditions	19
8.1. Head Exposure Conditions	19
8.2. Body-worn Accessory Exposure Conditions.....	19
8.3. Hotspot Exposure Conditions and Wi-Fi Direct	19
9. RF Output Power Measurement.....	20
9.1. GSM	20
9.2. W-CDMA	22
9.3. LTE Band.....	28
9.4. Wi-Fi (2.4 GHz Band).....	36
9.5. Bluetooth	36
10. Tissue Dielectric Properties	37
10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests	38
10.2. Tissue Dielectric Parameter Check Results.....	39
11. System Performance Check	41
11.1. System Performance Check Measurement Conditions.....	41
11.2. Reference SAR Values for System Performance Check.....	41

11.3.	System Performance Check Results	42
12.	SAR Test Results	43
12.1.	GSM850	44
12.2.	GSM1900	44
12.3.	W-CDMA Band V	45
12.4.	W-CDMA Band IV	45
12.5.	W-CDMA Band II	45
12.6.	LTE Band 2 (20MHz Bandwidth)	46
12.7.	LTE Band 4 (20MHz Bandwidth)	47
12.8.	LTE Band 5 (10MHz Bandwidth)	47
12.9.	LTE Band 17 (10MHz Bandwidth)	48
12.10.	Wi-Fi (DTS Band)	48
12.11.	Bluetooth	49
12.11.1.	Standalone SAR Test Exclusion Considerations	49
12.11.2.	Estimated SAR	49
13.	SAR Measurement Variability	50
13.1.	The Highest Measured SAR Configuration in Each Frequency Band	50
13.2.	Repeated Measurement Results	50
14.	Simultaneous Transmission SAR Analysis	51
14.1.	Sum of the SAR for GSM850 & Wi-Fi & BT	52
14.2.	Sum of the SAR for GSM1900 & Wi-Fi & BT	52
14.3.	Sum of the SAR for WCDMA Band V & Wi-Fi & BT	53
14.4.	Sum of the SAR for WCDMA Band IV & Wi-Fi & BT	53
14.5.	Sum of the SAR for WCDMA Band II & Wi-Fi & BT	54
14.6.	Sum of the SAR for LTE Band 2 & Wi-Fi & BT	54
14.7.	Sum of the SAR for LTE Band 4 & Wi-Fi & BT	55
14.8.	Sum of the SAR for LTE Band 5 & Wi-Fi & BT	55
14.9.	Sum of the SAR for LTE Band 17 & Wi-Fi & BT	56
15.	Appendixes	57
15.1.	Photos and Antenna Locations	57
15.2.	System Performance Check Plots	57
15.3.	Highest SAR Test Plots	57
15.4.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3531	57
15.5.	Calibration Certificate for E-Field Probe EX3DV4 - SN 3773	57
15.6.	Calibration Certificate for E-Field Probe EX3DV3 - SN 3936	57

15.7.	Calibration Certificate for D750V3 - SN 1071	57
15.8.	Calibration Certificate for D835V2 - SN 4d002	57
15.9.	Calibration Certificate for D1750V2 - SN 1077	57
15.10.	Calibration Certificate for D1900V2- SN 5d043	57
15.11.	Calibration Certificate for D2450V2 - SN 899	57

1. Attestation of Test Results

Applicant	SAMSUNG ELECTRONICS CO. LTD.			
DUT description	GSM/WCDMA/LTE Phone + Bluetooth, WLAN 2.4GHz b/g/n & NFC			
Model	SM-G313MU			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	06/4/2014 – 6/18/2014			
The highest reported SAR values	RF exposure condition	Licensed	DTS	UNII
	Head	1.08 W/kg	0.150 W/kg	N/A
	Body-worn Accessory	1.058 W/kg	0.054 W/kg	
	Wireless Router (Hotspot)			
	Simultaneous Transmission	1.155 W/kg		
Applicable Standards	FCC 47 CFR Parts 1 & 2 Published RF Exposure KDB Procedures, and TCB workshop updates IEEE Std 1528-2013			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:

Prepared By:




Devin Chang
WiSE Senior Engineer
UL Verification Services Inc.

Coltyce Sanders
WiSE Laboratory Engineer
UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR Parts 1 & 2, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D06 Hotspot Mode SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Tissue Dielectric Properties

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071B	MY42100131	2/24/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1087	11/13/2014
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529163	9/19/2014
Thermometer	EXTECH	445703	CCS-200	3/24/2015

System Performance Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator*	HP	8665B	3438A00633	6/13/2014
Base Station Simulator (Signal Generator)	R & S	CMU200	16233	7/23/2014
Power Meter	HP	438A	2822A05684	10/10/2014
Power Sensor	HP	8481A	2237A31744	10/2/2014
Power Sensor	HP	8481A	2349A36506	9/3/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808939	N/A
Directional coupler	Werlatone	C8060-102	2710	N/A
DC Power Supply	AMETEK	XT15-4	1319A02778	N/A
E-Field Probe	SPEAG	EX3DV3	3531	11/21/2014
E-Field Probe	SPEAG	EX3DV4	3773	4/22/2015
E-Field Probe	SPEAG	EX3DV4	3936	7/22/2014
Data Acquisition Electronics	SPEAG	DAE4	1359	2/17/2015
Data Acquisition Electronics	SPEAG	DAE4	1377	7/15/2014
Data Acquisition Electronics	SPEAG	DAE4	1380	7/15/2014
System Validation Dipole	SPEAG	D750V3	1071	11/15/2014
System Validation Dipole	SPEAG	D835V2	4d002	11/15/2014
System Validation Dipole	SPEAG	D1750V2	1077	9/12/2014
System Validation Dipole	SPEAG	D1900V2	5d043	11/12/2014
System Validation Dipole	SPEAG	D2450V2	899	9/10/2014
Thermometer (SAR Lab 2)	EXTECH	445703	CCS-203	3/28/2015
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-238	6/3/2015
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/3/2015

Notes:

*: HP Signal Generator was used for System Checks performed 6/7/2014 thru 6/10/2014 (before the calibration due date). HP Signal Generator was then replaced with the R&S CMU200 for every system check thereafter.

Others


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Sensor	Agilent	N1921A	MY52200012	9/25/2014
Power Meter	Agilent	N1912A	MY53040015	6/29/2014
Base Station Simulator	R & S	CMU200	16233	7/23/2014
Base Station Simulator	R & S	CMW500	15697	7/2/2014
Base Station Simulator	R & S	CMW500	20613(A2LA)	5/29/2015
Base Station Simulator	Agilent	8960	GB46160222	11/21/2014

4.2. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is $< 1.5 \text{ W/kg}$, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

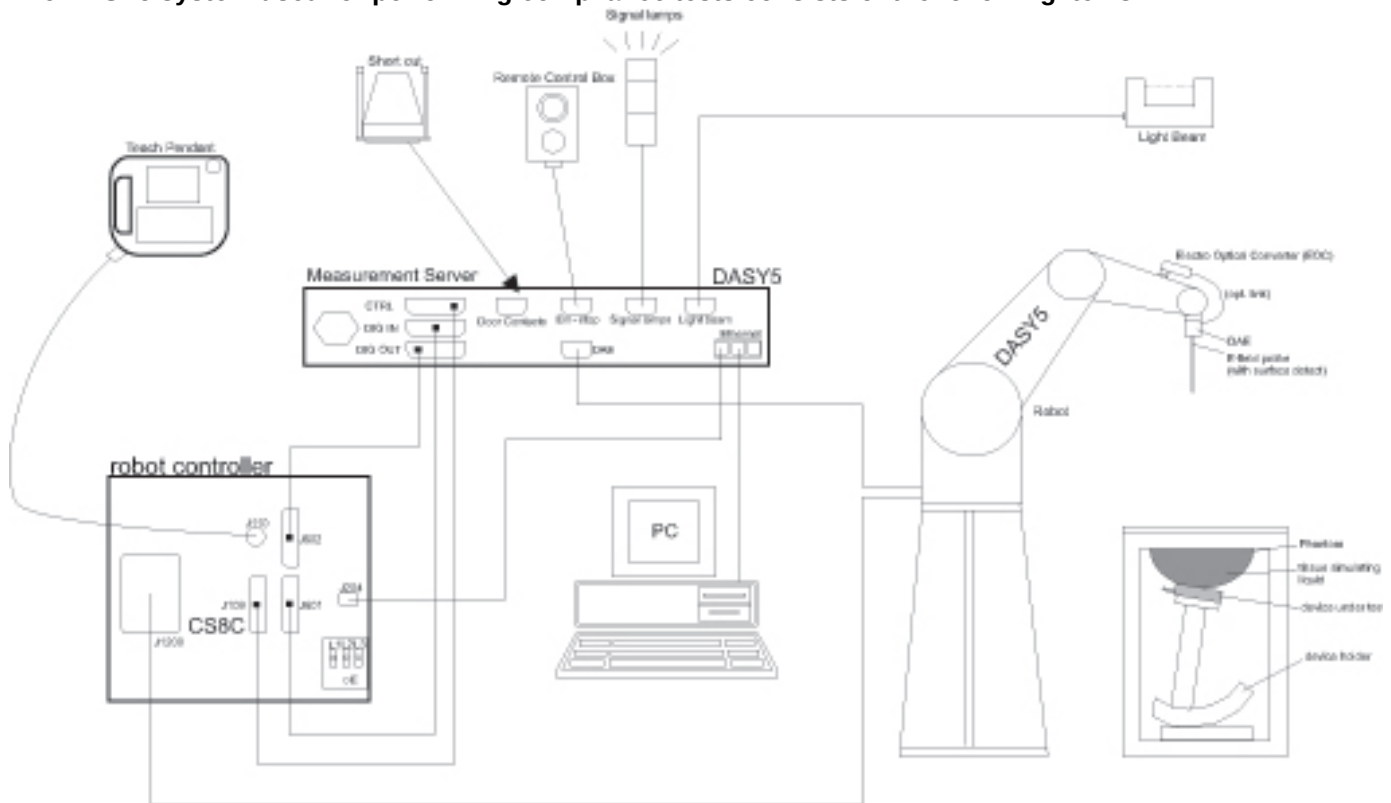

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

Operating Configuration(s)	Held to head, Body-worn (Voice call)
Mobile Hotspot	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi -enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☐ Wi-Fi Direct (Wi-Fi 5 GHz)
Device dimension	Overall (Length x Width): 121 mm x 63mm Overall Diagonal: 115mm Display Diagonal: 101mm
Back Cover	☐ Normal Battery Cover ☒ Normal Battery Cover with NFC ☐ Wireless Charger Battery Cover ☐ Wireless Charger Battery Cover with NFC
Accessory	☒ Headset
Battery Options	☒ Standard – Lithium-ion battery, Rating 3.8Vdc, 6.84Wh ☐ Extended (large capacity)

7.2. Wireless Technologies

Wireless Technology and Frequency Bands	GSM: 850 / 1900 W-CDMA Band: V / IV / II LTE Band 2 / 4 / 5 / 17 Wi-Fi : 2.4 GHz Bluetooth: 2.4 GHz.
Mode	GSM ☒ Voice (GMSK) ☒ GPRS (GMSK) ☒ EGPRS (8PSK) W-CDMA ☒ UMTS Rel. 99 (Voice & Data) ☒ HSDPA (Rel. 5) ☒ HSUPA (Rel. 6) ☒ DC-HSDPA (Rel. 8) LTE ☒ QPSK ☒ 16QAM Wi-Fi 2.4GHz (802.11b/g/n) ☒ 802.11b ☒ 802.11g ☒ 802.11n (HT20) Bluetooth ☒ Version 4.0 LE
Duty Cycle	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%, W-CDMA: 100% LTE: 100% Duty Cycle Wi-Fi 802.11b/g/n: 100%
GPRS Multi-Slot Class	☐ Class 8 - One Up ☐ Class 10 - Two Up ☐ Class 12 - Four Up ☒ Class 33 - Four Up
DTM (Dual Transfer Mode)	☐ Supported
VoIP (GPRS)	☒ Supported
SV-LTE & SV-DO	☐ Supported

7.3. RF Output Power Tolerance

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
GSM850	Voice	32.0	32.5
	GPRS 1 slot	32.0	32.5
	GPRS 2 slots	30.0	30.5
	GPRS 3 slots	28.0	28.5
	GPRS 4 slots	26.5	27.0
	EGPRS 1 slot	26.0	26.5
	EGPRS 2 slots	23.0	23.5
	EGPRS 3 slots	21.5	22.0
	EGPRS 4 slots	20.0	20.5
GSM1900	Voice	29.5	30.0
	GPRS 1 slot	29.5	30.0
	GPRS 2 slots	27.5	28.0
	GPRS 3 slots	25.5	26.0
	GPRS 4 slots	24.0	24.5
	EGPRS 1 slot	25.5	26.0
	EGPRS 2 slots	22.5	23.0
	EGPRS 3 slots	20.5	21.0
	EGPRS 4 slots	19.5	20.0
W-CDMA Band V	R99	22.0	22.5
	HSDPA	22.0	22.5
	HSUPA	20.7	21.2
	DC-DSPA	22.0	22.5
W-CDMA Band IV	R99	21.5	22.0
	HSDPA	21.5	22.0
	HSUPA	20.7	21.2
	DC-DSPA	21.5	22.0
W-CDMA Band II	R99	21.5	22.0
	HSDPA	21.5	22.0
	HSUPA	20.7	21.2
	DC-DSPA	21.5	22.0
LTE Band 2	QPSK	22.5	23.0
LTE Band 4	QPSK	22.5	23.0
LTE Band 5	QPSK	22.5	23.0
LTE Band 17	QPSK	22.5	23.0

Upper limit (dB): 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	14.0	14.5
	802.11g	12.0	12.5
	802.11n HT20	11.0	11.5
Bluetooth		10.0	10.5
Bluetooth LE		7.0	7.5

7.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	1. GSM 850/1900 Voice + Wi-Fi 2.4GHz 2. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz (VoIP) 3. WCDMA Band V/IV/II + Wi-Fi 2.4GHz 4. LTE B2/B4/B5/B17 + Wi-Fi 2.4GHz
Body-worn Accessory	5. GSM 850/1900 Voice + Wi-Fi 2.4GHz 6. GSM 850/1900 Voice + BT 7. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz (VoIP) 8. GSM 850/1900 (GPRS/EDGE) + BT(VoIP) 9. WCDMA Band V/IV/II + Wi-Fi 2.4GHz 10. WCDMA Band V/IV/II + BT 11. LTE B2/B4/B5/B17 + Wi-Fi 2.4GHz 12. LTE B2/B4/B5/B17 + BT
Wireless Router (Hotspot) & Wi-Fi Direct	13. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4GHz 14. WCDMA Band V/IV/II + Wi-Fi 2.4GHz 15. LTE B2/B4/B5/B17 + Wi-Fi 2.4GHz
Notes: 1. Wi-Fi 2.4GHz supports Hotspot and Wi-Fi Direct. 2. GPRS/EDGE, WCDMA and LTE support Hotspot. 3. VoIP is support in GPRS/EDGE, WCDMA, CDMA and LTE. 4. Wi-Fi 2.4 GHz Radio cannot transmit simultaneously with Bluetooth Radio.	

7.5. General LTE SAR Test and Reporting Considerations

Item	Description																																												
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7																																						
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880																																						
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3																																						
	Band 4	Frequency range: 1710 - 1755 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7																																						
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5																																						
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3																																						
	Band 5	Frequency range: 824 - 849 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																						
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																						
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																						
	Band 17	Frequency range: 704 - 716 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low				23755/ 706.5																																								
	Mid			23790/ 710	23790/ 710																																								
	High				23825/ 713.5																																								
LTE transmitter and antenna implementation	LTE has one (1) TX/RX antenna Refer to Appendix 15.1. Photos and Antenna Locations.																																												
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3 <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	No																																												
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

8. RF Exposure Conditions

Refer to Appendix "Antenna Locations and Separation Distances" for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Conditions

For WWAN, LTE and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

8.3. Hotspot Exposure Conditions and Wi-Fi Direct

For WWAN and LTE

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	0 mm	Yes	
Front	6.6 mm	Yes	
Edge 1 (Top)	108 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR
Edge 2 (Right)	2 mm	Yes	
Edge 3 (Bottom)	4 mm	Yes	
Edge 4 (Left)	2 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	6.5 mm	Yes	
Edge 1 (Top)	4 mm	Yes	
Edge 2 (Right)	22 mm	Yes	
Edge 3 (Bottom)	114 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 648474 D04 Handset SAR
Edge 4 (Left)	18 mm	Yes	

9. RF Output Power Measurement

9.1. GSM

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
850	GSM (Voice)	CS1	1	128	824.2	32.3	23.3
				190	836.6	32.3	23.3
				251	848.8	32.3	23.3
	GPRS (GMSK)	CS1	1	128	824.2	32.3	23.3
				190	836.6	32.3	23.3
				251	848.8	32.3	23.3
			2	128	824.2	30.0	24.0
				190	836.6	30.0	24.0
				251	848.8	30.0	24.0
			3	128	824.2	28.3	24.0
				190	836.6	28.3	24.0
				251	848.8	28.3	24.0
			4	128	824.2	26.7	23.7
				190	836.6	26.8	23.8
				251	848.8	26.7	23.7
	EGPRS (8PSK)	MCS5	1	128	824.2	26.1	17.1
				190	836.6	26.2	17.2
				251	848.8	26.3	17.3
			2	128	824.2	23.4	17.4
				190	836.6	23.4	17.4
				251	848.8	23.4	17.4
			3	128	824.2	21.6	17.3
				190	836.6	21.7	17.4
				251	848.8	21.7	17.4
			4	128	824.2	20.3	17.3
				190	836.6	20.3	17.3
				251	848.8	20.3	17.3

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	29.7	20.7
				661	1880.0	29.7	20.7
				810	1909.8	29.8	20.8
	GPRS (GMSK)	CS1	1	512	1850.2	29.7	20.7
				661	1880.0	29.7	20.7
				810	1909.8	29.8	20.8
			2	512	1850.2	27.2	21.2
				661	1880.0	27.2	21.2
				810	1909.8	27.2	21.2
			3	512	1850.2	25.6	21.3
				661	1880.0	25.7	21.4
				810	1909.8	25.7	21.4
			4	512	1850.2	24.1	21.1
				661	1880.0	24.2	21.2
				810	1909.8	24.2	21.2
	EGPRS (8PSK)	MCS5	1	512	1850.2	25.9	16.9
				661	1880.0	25.9	16.9
				810	1909.8	25.8	16.8
			2	512	1850.2	22.8	16.8
				661	1880.0	22.8	16.8
				810	1909.8	22.8	16.8
			3	512	1850.2	20.9	16.6
				661	1880.0	21.0	16.7
				810	1909.8	20.9	16.6
			4	512	1850.2	19.8	16.8
				661	1880.0	19.9	16.9
				810	1909.8	19.8	16.8

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	22.0
		4183	836.6	22.0
		4233	846.6	22.0
W-CDMA Band IV	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	21.2
		1413	1732.6	21.3
		1513	1752.6	21.3
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	21.6
		9400	1880.0	21.7
		9538	1907.6	21.5

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121-1. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D _{ACK}	8			
	D _{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	A _{hs} = β_{hs}/β_c	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	22.1
		4183	836.6	0	22.0
		4233	846.6	0	22.1
	Subtest 2	4132	826.4	0	22.0
		4183	836.6	0	22.1
		4233	846.6	0	22.1
	Subtest 3	4132	826.4	0.5	21.7
		4183	836.6	0.5	21.7
		4233	846.6	0.5	21.8
	Subtest 4	4132	826.4	0.5	21.7
		4183	836.6	0.5	21.7
		4233	846.6	0.5	21.8
W-CDMA Band IV	Subtest 1	1312	1712.4	0	22.0
		1413	1732.6	0	21.8
		1513	1752.6	0	22.0
	Subtest 2	1312	1712.4	0	22.0
		1413	1732.6	0	22.0
		1513	1752.6	0	22.1
	Subtest 3	1312	1712.4	0.5	21.5
		1413	1732.6	0.5	21.5
		1513	1752.6	0.5	21.5
	Subtest 4	1312	1712.4	0.5	21.5
		1413	1732.6	0.5	21.5
		1513	1752.6	0.5	21.5
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.6
		9400	1880.0	0	21.7
		9538	1907.6	0	21.7
	Subtest 2	9262	1852.4	0	21.7
		9400	1880.0	0	21.9
		9538	1907.6	0	21.8
	Subtest 3	9262	1852.4	0.5	21.1
		9400	1880.0	0.5	21.3
		9538	1907.6	0.5	21.3
	Subtest 4	9262	1852.4	0.5	21.1
		9400	1880.0	0.5	21.3
		9538	1907.6	0.5	21.3

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	11/15	15/9	2/15	15/0
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelisation Codes	2xSF2				SF4

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	20.4
		4183	836.6	0	19.7
		4233	846.6	0	19.8
	Subtest 2	4132	826.4	2	19.2
		4183	836.6	2	19.2
		4233	846.6	2	19.2
	Subtest 3	4132	826.4	1	20.2
		4183	836.6	1	20.2
		4233	846.6	1	20.2
	Subtest 4	4132	826.4	2	19.2
		4183	836.6	2	19.2
		4233	846.6	2	19.2
	Subtest 5	4132	826.4	0	21.2
		4183	836.6	0	21.2
		4233	846.6	0	21.2
W-CDMA Band IV	Subtest 1	1312	1712.4	0	20.3
		1413	1732.6	0	19.9
		1513	1752.6	0	20.1
	Subtest 2	1312	1712.4	2	19.2
		1413	1732.6	2	19.2
		1513	1752.6	2	19.2
	Subtest 3	1312	1712.4	1	20.2
		1413	1732.6	1	20.2
		1513	1752.6	1	20.2
	Subtest 4	1312	1712.4	2	19.2
		1413	1732.6	2	19.2
		1513	1752.6	2	19.2
	Subtest 5	1312	1712.4	0	21.2
		1413	1732.6	0	21.2
		1513	1752.6	0	21.2
W-CDMA Band II	Subtest 1	9262	1852.4	0	19.2
		9400	1880.0	0	19.8
		9538	1907.6	0	19.7
	Subtest 2	9262	1852.4	2	18.6
		9400	1880.0	2	18.7
		9538	1907.6	2	18.0
	Subtest 3	9262	1852.4	1	19.2
		9400	1880.0	1	19.2
		9538	1907.6	1	19.5
	Subtest 4	9262	1852.4	2	18.3
		9400	1880.0	2	18.6
		9538	1907.6	2	18.6
	Subtest 5	9262	1852.4	0	20.6
		9400	1880.0	0	20.7
		9538	1907.6	0	20.7

DC-HSDPA

The following 4 Sub-tests were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121-1, since DC-HSDPA has only one transmitting uplink. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	22.2
		4183	836.6	0	22.2
		4233	846.6	0	22.2
	Subtest 2	4132	826.4	0	22.2
		4183	836.6	0	22.2
		4233	846.6	0	22.2
	Subtest 3	4132	826.4	0.5	21.9
		4183	836.6	0.5	21.9
		4233	846.6	0.5	22.0
	Subtest 4	4132	826.4	0.5	21.9
		4183	836.6	0.5	22.0
		4233	846.6	0.5	22.0
W-CDMA Band IV	Subtest 1	1312	1712.4	0	21.8
		1413	1732.6	0	21.8
		1513	1752.6	0	21.8
	Subtest 2	1312	1712.4	0	21.8
		1413	1732.6	0	21.8
		1513	1752.6	0	21.8
	Subtest 3	1312	1712.4	0.5	21.5
		1413	1732.6	0.5	21.5
		1513	1752.6	0.5	21.5
	Subtest 4	1312	1712.4	0.5	21.5
		1413	1732.6	0.5	21.5
		1513	1752.6	0.5	21.5
W-CDMA Band II	Subtest 1	9262	1852.4	0	21.1
		9400	1880.0	0	21.4
		9538	1907.6	0	21.6
	Subtest 2	9262	1852.4	0	21.5
		9400	1880.0	0	21.7
		9538	1907.6	0	21.7
	Subtest 3	9262	1852.4	0.5	21.1
		9400	1880.0	0.5	21.3
		9538	1907.6	0.5	21.2
	Subtest 4	9262	1852.4	0.5	21.0
		9400	1880.0	0.5	21.3
		9538	1907.6	0.5	21.3

9.3. LTE Band

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	0	22.7	22.9	23.0
			1	49	0	0	22.7	22.9	22.7
			1	99	0	0	22.7	22.9	22.8
			50	0	1	1	21.8	21.9	21.9
			50	25	1	1	21.8	21.9	21.9
			50	49	1	1	21.8	21.9	21.9
			100	0	1	1	21.9	21.9	22.0
		16QAM	1	0	1	1	21.5	21.7	21.2
			1	49	1	1	21.5	21.8	21.5
			1	99	1	1	21.5	21.8	22.0
			50	0	2	2	20.7	20.9	20.9
			50	25	2	2	20.8	20.9	20.9
			50	49	2	2	20.8	21.0	20.9
			100	0	2	2	20.8	20.9	20.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	0	22.7	22.7	22.6
			1	37	0	0	22.7	22.7	22.6
			1	74	0	0	22.7	22.7	22.6
			36	0	1	1	21.7	21.7	21.8
			36	18	1	1	21.8	21.7	21.9
			36	35	1	1	21.8	21.7	21.9
			75	0	1	1	21.8	21.7	21.8
		16QAM	1	0	1	1	21.6	21.7	21.4
			1	37	1	1	21.6	21.7	21.4
			1	74	1	1	21.6	21.7	21.5
			36	0	2	2	20.7	20.7	20.8
			36	18	2	2	20.8	20.7	20.8
			36	35	2	2	20.8	20.7	20.9
			75	0	2	2	20.8	20.7	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	0	22.7	22.7	22.9
			1	24	0	0	22.7	22.7	22.9
			1	49	0	0	22.7	22.7	22.9
			25	0	1	0	21.7	21.8	21.9
			25	12	1	0	21.7	21.8	21.9
			25	24	1	0	21.8	21.8	21.9
			50	0	1	0	21.7	21.8	21.9
		16QAM	1	0	1	0	21.5	21.8	21.9
			1	24	1	0	21.6	21.9	21.8
			1	49	1	0	21.7	21.8	21.8
			25	0	2	0	20.7	20.7	20.9
			25	12	2	0	20.7	20.7	20.9
			25	24	2	0	20.7	20.7	21.0
			50	0	2	0	20.7	20.8	20.9

LTE Band 2 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	0	22.8	23.0	22.9
			1	12	0	0	22.8	23.0	22.9
			1	24	0	0	22.9	23.0	22.9
			12	0	1	1	21.8	21.9	21.9
			12	6	1	1	21.9	21.9	21.9
			12	11	1	1	21.9	21.9	21.9
			25	0	1	1	21.8	21.9	21.9
		16QAM	1	0	1	1	22.0	21.9	21.9
			1	12	1	1	22.0	21.8	21.9
			1	24	1	1	21.9	21.8	21.9
			12	0	2	2	20.6	20.9	20.8
			12	6	2	2	20.6	20.8	20.9
			12	11	2	2	20.6	20.9	20.9
			25	0	2	2	20.8	20.9	20.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	0	22.6	22.8	22.9
			1	7	0	0	22.6	22.8	22.9
			1	14	0	0	22.5	22.8	22.8
			8	0	1	1	21.7	21.8	21.9
			8	4	1	1	21.7	21.9	21.9
			8	7	1	1	21.7	21.9	21.9
			15	0	1	1	21.7	21.9	21.9
		16QAM	1	0	1	1	22.0	21.9	22.0
			1	7	1	1	22.0	21.9	22.0
			1	14	1	1	21.9	21.8	22.0
			8	0	2	2	20.8	20.7	20.7
			8	4	2	2	20.8	20.7	20.7
			8	7	2	2	20.8	20.7	20.7
			15	0	2	2	20.6	20.8	20.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	0	22.7	22.8	22.9
			1	2	0	0	22.7	22.8	22.9
			1	5	0	0	22.7	22.8	22.8
			3	0	0	0	22.7	22.8	22.8
			3	1	0	0	22.7	22.7	22.8
			3	2	0	0	22.7	22.7	22.8
			6	0	1	0	21.8	21.8	21.8
		16QAM	1	0	1	0	21.9	21.9	22.0
			1	2	1	0	22.0	21.8	22.0
			1	5	1	0	22.0	21.8	22.0
			3	0	1	0	22.0	21.8	21.9
			3	1	1	0	22.0	21.8	21.9
			3	2	1	0	22.0	21.8	22.0
			6	0	2	0	20.5	20.7	20.7

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	0	22.8	22.9	22.8
			1	49	0	0	22.8	22.9	22.8
			1	99	0	0	22.8	22.9	22.7
			50	0	1	1	21.9	21.8	21.9
			50	25	1	1	21.9	21.8	21.8
			50	49	1	1	21.9	21.8	21.8
			100	0	1	1	22.0	22.0	21.9
		16QAM	1	0	1	1	21.9	21.1	22.0
			1	49	1	1	21.8	21.1	22.0
			1	99	1	1	21.8	21.1	22.0
			50	0	2	2	21.0	20.9	20.9
			50	25	2	2	20.9	20.9	20.9
			50	49	2	2	21.0	20.9	20.9
			100	0	2	2	21.0	20.9	20.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	0	22.7	22.8	22.7
			1	37	0	0	22.7	22.8	22.7
			1	74	0	0	22.8	22.8	22.6
			36	0	1	1	21.8	21.8	21.8
			36	18	1	1	21.8	21.7	21.8
			36	35	1	1	21.8	21.7	21.8
			75	0	1	1	21.8	21.8	21.8
		16QAM	1	0	1	1	21.7	21.9	21.7
			1	37	1	1	21.7	21.8	21.6
			1	74	1	1	21.8	21.7	21.5
			36	0	2	2	20.8	20.8	20.8
			36	18	2	2	20.8	20.8	20.8
			36	35	2	2	20.8	20.8	20.8
			75	0	2	2	20.9	20.9	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	0	22.7	22.9	22.9
			1	24	0	0	22.7	22.9	22.9
			1	49	0	0	22.7	22.9	22.8
			25	0	1	0	21.8	21.9	21.8
			25	12	1	0	21.8	21.9	21.8
			25	24	1	0	21.8	21.9	21.8
			50	0	1	0	21.8	21.9	21.7
		16QAM	1	0	1	0	21.7	21.9	21.9
			1	24	1	0	21.8	21.9	21.9
			1	49	1	0	21.8	21.8	21.8
			25	0	2	0	20.8	20.9	20.9
			25	12	2	0	20.8	20.9	20.8
			25	24	2	0	20.8	20.9	20.8
			50	0	2	0	20.9	21.0	20.8

LTE Band 4 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	0	22.9	23.0	22.8
			1	12	0	0	22.9	23.0	22.8
			1	24	0	0	22.9	23.0	22.8
			12	0	1	1	21.7	21.8	21.7
			12	6	1	1	21.7	21.8	21.7
			12	11	1	1	21.7	21.8	21.7
			25	0	1	1	21.7	21.8	21.7
		16QAM	1	0	1	1	21.9	22.0	21.8
			1	12	1	1	21.9	22.0	21.8
			1	24	1	1	21.9	22.0	21.9
			12	0	2	2	20.7	20.9	20.7
			12	6	2	2	20.7	20.9	20.7
			12	11	2	2	20.7	20.9	20.7
			25	0	2	2	20.8	20.9	20.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	0	22.8	22.9	22.9
			1	7	0	0	22.8	22.9	22.9
			1	14	0	0	22.8	22.9	22.9
			6	0	1	1	21.9	21.8	21.8
			6	3	1	1	21.9	21.8	21.8
			6	5	1	1	21.9	21.8	21.8
			15	0	1	1	21.9	21.8	21.7
		16QAM	1	0	1	1	21.8	21.8	21.8
			1	7	1	1	21.7	21.8	21.9
			1	14	1	1	21.8	21.8	21.9
			6	0	2	2	21.0	20.8	20.8
			6	3	2	2	21.0	20.8	20.8
			6	5	2	2	21.0	20.8	20.8
			15	0	2	2	21.0	20.8	20.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	0	22.8	22.9	22.9
			1	2	0	0	22.8	22.9	22.9
			1	5	0	0	22.8	22.9	22.9
			3	0	0	0	22.7	22.8	22.9
			3	1	0	0	22.7	22.8	22.9
			3	2	0	0	22.7	22.8	22.9
			6	0	1	0	21.8	21.8	21.8
		16QAM	1	0	1	0	21.9	21.8	21.9
			1	2	1	0	21.9	21.8	21.9
			1	5	1	0	21.7	21.8	21.9
			3	0	1	0	21.8	21.8	22.0
			3	1	1	0	21.8	21.8	22.0
			3	2	1	0	22.0	21.8	22.0
			6	0	2	0	20.5	20.8	20.8

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	0	22.5	22.6	22.6
			1	24	0	0	22.5	22.7	22.7
			1	49	0	0	22.6	22.6	22.7
			25	0	1	1	21.4	21.6	21.5
			25	12	1	1	21.5	21.6	21.6
			25	24	1	1	21.5	21.6	21.6
			50	0	1	1	21.4	21.6	21.5
		16QAM	1	0	1	1	21.7	21.8	21.6
			1	24	1	1	22.0	21.7	21.6
			1	49	1	1	21.7	21.7	21.7
			25	0	2	2	20.2	20.5	20.3
			25	12	2	2	20.3	20.4	20.4
			25	24	2	2	20.3	20.4	20.4
			50	0	2	2	20.3	20.5	20.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	0	22.6	22.8	22.8
			1	12	0	0	22.6	22.8	22.8
			1	24	0	0	22.7	22.8	22.8
			12	0	1	1	21.5	21.6	21.6
			12	6	1	1	21.4	21.6	21.7
			12	11	1	1	21.5	21.6	21.7
			25	0	1	1	21.4	21.6	21.7
		16QAM	1	0	1	1	21.6	21.8	21.5
			1	12	1	1	21.5	21.8	21.5
			1	24	1	1	21.6	21.8	21.6
			12	0	2	2	20.2	20.4	20.4
			12	6	2	2	20.1	20.4	20.4
			12	11	2	2	20.1	20.4	20.4
			25	0	2	2	20.3	20.5	20.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	0	22.5	22.6	22.8
			1	7	0	0	22.4	22.6	22.8
			1	14	0	0	22.4	22.6	22.8
			6	0	1	0	21.3	21.5	21.6
			6	3	1	0	21.3	21.6	21.7
			6	5	1	0	21.3	21.6	21.7
			15	0	1	0	21.3	21.5	21.7
		16QAM	1	0	1	0	22.0	21.6	21.9
			1	7	1	0	22.0	21.6	21.9
			1	14	1	0	21.9	21.6	21.8
			6	0	2	0	20.3	20.3	20.4
			6	3	2	0	20.3	20.3	20.3
			6	5	2	0	20.3	20.3	20.3
			15	0	2	0	20.1	20.2	20.6

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	5	0	0	22.4	22.6	22.7
			3	0	0	0	22.5	22.6	22.7
			3	1	0	0	22.4	22.6	22.7
			3	2	0	0	22.5	22.6	22.7
			6	0	0	0	22.5	22.6	22.7
			1	0	0	0	22.5	22.6	22.7
			1	2	1	0	21.5	21.6	21.5
		16QAM	1	5	1	0	22.0	21.6	21.7
			3	0	1	0	22.0	21.6	21.8
			3	1	1	0	21.9	21.6	21.7
			3	2	1	0	21.7	21.6	21.6
			6	0	1	0	21.7	21.6	21.6
			3	3	1	0	21.7	21.6	21.6
			6	0	2	0	20.1	20.3	20.3

LTE Band 17 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)
							710 MHz
LTE Band 17	10	QPSK	1	0	0	0	22.3
			1	25	0	0	22.4
			1	49	0	0	22.5
			25	0	1	1	21.4
			25	12	1	1	21.4
			25	25	1	1	21.6
			50	0	1	1	21.3
		16QAM	1	0	1	1	21.4
			1	25	1	1	21.5
			1	49	1	1	21.7
			25	0	2	2	20.3
			25	12	2	2	20.3
			25	25	2	2	20.4
			50	0	2	2	20.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)
							710 MHz
LTE Band 17	5	QPSK	1	0	0	0	22.5
			1	12	0	0	22.5
			1	24	0	0	22.6
			12	0	1	0	21.5
			12	6	1	0	21.4
			12	11	1	0	21.4
			25	0	1	0	21.4
		16QAM	1	0	1	0	21.5
			1	12	1	0	21.4
			1	24	1	0	21.5
			12	0	2	0	20.3
			12	6	2	0	20.2
			12	11	2	0	20.3
			25	0	2	0	20.3

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

9.4. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	▽
		2.437	6	√	▽
		2.462	11 [#]	√	▽

Notes:

√ = "default test channels"

▽ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	13.6	Yes
			6	2437	13.6	
			11	2462	13.6	
	802.11g	6 Mbps	1	2412	11.7	No
			6	2437	11.7	
			11	2462	11.7	
	802.11n (HT20)	MCS0	1	2412	11.5	No
			6	2437	11.5	
			11	2462	11.5	

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	13.6	Yes
			2 Mbps	13.6	No
			5.5 Mbps	13.4	No
			11 Mbps	13.2	No

9.5. Bluetooth

Maximum tune-up tolerance limit is 10.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

Refer to Standalone SAR Test Exclusion Considerations Section.

10. Tissue Dielectric Properties

IEEE Std 1528-2013

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1500	40.4	1.23
1640	40.2	1.31
1750	40.1	1.37
1800	40.0	1.40
1900	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2300	39.5	1.67
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48

NOTE—For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

MSL/HSL750 (Body and Head liquids for 700 – 800 MHz)

Item	Head Tissue Simulation Liquids HSL750 Muscle (body) Tissue Simulation Liquids MSL750
Type No	SL AAH 075
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H ₂ O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40-60%
NaCl	Sodium Chloride, 0-6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1-0.7%

MSL/HSL1750 (Body and Head liquids for 1700 – 1800 MHz)

Item	Head Tissue Simulation Liquids HSL1750 Muscle (body) Tissue Simulation Liquids MSL1750
Type No	SL AAM 175
Manufacturer	SPEAG
-The item is composed of the following ingredients:	
H ₂ O	Water, 52 – 75%
C8H18O3	Diethylene glycol monobutyl ether (DGBE), 25-48%
NaCl	Sodium Chloride, <1.0%

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Lab 2

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
6/9/2014	Head 750	e'	40.7300	Relative Permittivity (ϵ_r):	40.73	41.96	-2.93	5
		e"	22.4600	Conductivity (σ):	0.94	0.89	4.88	5
	Head 700	e'	41.4300	Relative Permittivity (ϵ_r):	41.43	42.22	-1.87	5
		e"	22.6900	Conductivity (σ):	0.88	0.89	-0.68	5
	Head 710	e'	41.2100	Relative Permittivity (ϵ_r):	41.21	42.17	-2.27	5
		e"	22.5800	Conductivity (σ):	0.89	0.89	0.16	5
6/9/2014	Body 750	e'	53.9000	Relative Permittivity (ϵ_r):	53.90	55.55	-2.96	5
		e"	24.1600	Conductivity (σ):	1.01	0.96	4.62	5
	Body 700	e'	54.4300	Relative Permittivity (ϵ_r):	54.43	55.74	-2.35	5
		e"	24.4600	Conductivity (σ):	0.95	0.96	-0.75	5
	Body 710	e'	54.2500	Relative Permittivity (ϵ_r):	54.25	55.70	-2.60	5
		e"	24.3500	Conductivity (σ):	0.96	0.96	0.13	5
6/16/2014	Head 835	e'	40.8200	Relative Permittivity (ϵ_r):	40.82	41.50	-1.64	5
		e"	20.0100	Conductivity (σ):	0.93	0.90	3.23	5
	Head 820	e'	41.0200	Relative Permittivity (ϵ_r):	41.02	41.60	-1.40	5
		e"	20.0600	Conductivity (σ):	0.91	0.90	1.80	5
	Head 850	e'	40.6200	Relative Permittivity (ϵ_r):	40.62	41.50	-2.12	5
		e"	19.9700	Conductivity (σ):	0.94	0.92	3.15	5
6/16/2014	Body 835	e'	53.0600	Relative Permittivity (ϵ_r):	53.06	55.20	-3.88	5
		e"	21.3800	Conductivity (σ):	0.99	0.97	2.33	5
	Body 820	e'	53.2100	Relative Permittivity (ϵ_r):	53.21	55.28	-3.74	5
		e"	21.4700	Conductivity (σ):	0.98	0.97	1.08	5
	Body 850	e'	52.9000	Relative Permittivity (ϵ_r):	52.90	55.16	-4.09	5
		e"	21.3400	Conductivity (σ):	1.01	0.99	2.17	5

Tissue Dielectric Parameter Check Results (continued)

SAR Lab 3

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
6/4/2014	Head 2450	e'	38.0900	Relative Permittivity (ϵ_r):	38.09	39.20	-2.83	5
		e"	13.8400	Conductivity (σ):	1.89	1.80	4.74	5
	Head 2410	e'	38.2600	Relative Permittivity (ϵ_r):	38.26	39.28	-2.59	5
		e"	13.7300	Conductivity (σ):	1.84	1.76	4.51	5
	Head 2475	e'	37.9800	Relative Permittivity (ϵ_r):	37.98	39.17	-3.03	5
		e"	13.9100	Conductivity (σ):	1.91	1.83	4.77	5
6/4/2014	Body 2450	e'	50.4700	Relative Permittivity (ϵ_r):	50.47	52.70	-4.23	5
		e"	14.6500	Conductivity (σ):	2.00	1.95	2.35	5
	Body 2410	e'	50.6300	Relative Permittivity (ϵ_r):	50.63	52.76	-4.04	5
		e"	14.4900	Conductivity (σ):	1.94	1.91	1.79	5
	Body 2475	e'	50.3800	Relative Permittivity (ϵ_r):	50.38	52.67	-4.35	5
		e"	14.7500	Conductivity (σ):	2.03	1.99	2.25	5
6/6/2014	Head 1900	e'	38.5100	Relative Permittivity (ϵ_r):	38.51	40.00	-3.73	5
		e"	13.2600	Conductivity (σ):	1.40	1.40	0.06	5
	Head 1850	e'	38.7500	Relative Permittivity (ϵ_r):	38.75	40.00	-3.13	5
		e"	13.1800	Conductivity (σ):	1.36	1.40	-3.16	5
	Head 1910	e'	38.4600	Relative Permittivity (ϵ_r):	38.46	40.00	-3.85	5
		e"	13.2700	Conductivity (σ):	1.41	1.40	0.66	5
6/6/2014	Body 1900	e'	51.1700	Relative Permittivity (ϵ_r):	51.17	53.30	-4.00	5
		e"	14.8200	Conductivity (σ):	1.57	1.52	3.00	5
	Body 1850	e'	51.4200	Relative Permittivity (ϵ_r):	51.42	53.30	-3.53	5
		e"	14.9800	Conductivity (σ):	1.54	1.52	1.38	5
	Body 1910	e'	51.1000	Relative Permittivity (ϵ_r):	51.10	53.30	-4.13	5
		e"	14.8100	Conductivity (σ):	1.57	1.52	3.48	5
6/16/2014	Body 1900	e'	55.0200	Relative Permittivity (ϵ_r):	55.02	53.30	3.23	5
		e"	15.0100	Conductivity (σ):	1.59	1.52	4.33	5
	Body 1850	e'	55.2000	Relative Permittivity (ϵ_r):	55.20	53.30	3.56	5
		e"	14.9800	Conductivity (σ):	1.54	1.52	1.38	5
	Body 1910	e'	54.9900	Relative Permittivity (ϵ_r):	54.99	53.30	3.17	5
		e"	15.0100	Conductivity (σ):	1.59	1.52	4.87	5
6/16/2014	Head 1900	e'	38.5800	Relative Permittivity (ϵ_r):	38.58	40.00	-3.55	5
		e"	13.2500	Conductivity (σ):	1.40	1.40	-0.01	5
	Head 1850	e'	38.7800	Relative Permittivity (ϵ_r):	38.78	40.00	-3.05	5
		e"	13.1400	Conductivity (σ):	1.35	1.40	-3.45	5
	Head 1910	e'	38.5300	Relative Permittivity (ϵ_r):	38.53	40.00	-3.68	5
		e"	13.2500	Conductivity (σ):	1.41	1.40	0.51	5

SAR Lab 4

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
6/17/2014	Body 1750	e'	52.0500	Relative Permittivity (ϵ_r):	52.05	53.44	-2.60	5
		e"	15.5400	Conductivity (σ):	1.51	1.49	1.75	5
	Body 1710	e'	52.1900	Relative Permittivity (ϵ_r):	52.19	53.54	-2.53	5
		e"	15.4600	Conductivity (σ):	1.47	1.46	0.58	5
	Body 1755	e'	52.0400	Relative Permittivity (ϵ_r):	52.04	53.43	-2.60	5
		e"	15.5700	Conductivity (σ):	1.52	1.49	2.02	5
6/17/2014	Head 1750	e'	39.1300	Relative Permittivity (ϵ_r):	39.13	40.08	-2.38	5
		e"	13.9000	Conductivity (σ):	1.35	1.37	-1.20	5
	Head 1710	e'	39.2900	Relative Permittivity (ϵ_r):	39.29	40.15	-2.13	5
		e"	13.8300	Conductivity (σ):	1.31	1.35	-2.33	5
	Head 1755	e'	39.1000	Relative Permittivity (ϵ_r):	39.10	40.08	-2.44	5
		e"	13.9200	Conductivity (σ):	1.36	1.37	-0.98	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D750V3	1071	11/15/2013	750	1g	8.46	8.64
				10g	5.51	5.72
D835V2	4d002	11/15/2013	835	1g	9.49	9.43
				10g	6.18	6.21
D1750V2	1077	9/12/2013	1750	1g	37.6	37.7
				10g	20.0	20.3
D1900V2	5d043	11/12/2013	1900	1g	40.1	39.0
				10g	21.1	20.8
D2450V2	899	9/10/2013	2450	1g	51.3	49.7
				10g	23.9	23.3

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Room 2

Date Tested	System Dipole		T.S. Liquid		Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.
	Type	Serial #			Area Scan	Zoom Scan	Normalize to 1 W				
6/9/2014	D750V3	1071	Head	1g	0.85	0.83	8.3	8.46	-2.36	2.48	
				10g	0.579	0.543	5.4	5.51	-1.45		
6/9/2014	D750V3	1071	Body	1g	0.89	0.90	9.0	8.64	4.05	-1.35	1, 2
				10g	0.606	0.602	6.0	5.72	5.24		
6/16/2014	D835V2	4d002	Head	1g	1.02	1.00	10.0	9.49	5.06	2.25	3, 4
				10g	0.687	0.659	6.6	6.18	6.63		
6/16/2014	D835V2	4d002	Body	1g	0.96	0.93	9.3	9.43	-1.06	2.61	
				10g	0.644	0.623	6.2	6.21	0.32		

SAR Room 3

SAK ROOM 8

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
6/4/2014	D2450V2	899	Head	1g	5.00	5.00	50.00	51.30	-2.53	0.00	5, 6
				10g	2.20	2.27	22.70	23.90	-5.02		
6/4/2014	D2450V2	899	Body	1g	4.88	4.93	49.30	49.70	-0.80	-1.02	
				10g	2.12	2.28	22.80	23.30	-2.15		
6/6/2014	D1900V2	5d043	Head	1g	4.08	4.01	40.10	40.10	0.00	1.72	
				10g	2.10	2.08	20.80	21.10	-1.42		
6/6/2014	D1900V2	5d043	Body	1g	4.05	4.04	40.40	39.00	3.59	0.25	7, 8
				10g	2.08	2.10	21.00	20.80	0.96		
6/16/2014	D1900V2	5d043	Body	1g	3.97	3.92	39.20	39.0	0.51	1.26	
				10g	2.03	2.03	20.30	20.8	-2.40		
6/16/2014	D1900V2	5d043	Head	1g	4.03	3.90	39.00	40.1	-2.74	3.23	
				10g	2.08	1.99	19.90	21.1	-5.69		

SAR Room 4

Chart Room

Date Tested	System Dipole		T.S. Liquid		Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.
	Type	Serial #			Area Scan	Zoom Scan	Normalize to 1 W				
6/17/2014	D1750V2	1077	Body	1g	3.76	3.75	37.50	37.70	-0.53	0.27	
				10g	1.99	2.01	20.10	20.30	-0.99		
6/17/2014	D1750V2	1077	Head	1g	3.67	3.51	35.10	37.60	-6.65	4.36	9, 10
				10g	1.96	1.85	18.50	20.00	-7.50		

12. SAR Test Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least $\frac{1}{4}$ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR Measurements Procedures for 802.11 a/b/g Transmitters v01r02 (pg.6):

Each channel should be tested at the lowest data rate in each a-b/g mode or 4.9 GHz channel BW configuration.

When the extrapolated maximum peak SAR for the maximum output channel is ≤ 1.6 W/kg and the 1-g averaged SAR is ≤ 0.8 W/kg, testing of other channels in the "default test channels" or "required test channels" configuration is optional.

12.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	128	824.2	32.5	32.3	0.682	0.714	
				190	836.6	32.5	32.3	0.757	0.793	
				251	848.8	32.5	32.3	0.747	0.782	
			Left Tilt	190	836.6	32.5	32.3	0.376	0.394	
			Right Touch	128	824.2	32.5	32.3	0.647	0.677	
				190	836.6	32.5	32.3	0.775	0.812	1
				251	848.8	32.5	32.3	0.754	0.790	
			Right Tilt	251	848.8	32.5	32.3	0.368	0.385	
Head VoIP	GPRS 2 Slots	0	Left Touch	128	824.2	30.5	30.0	0.651	0.730	
				190	836.6	30.5	30.0	0.812	0.911	
				251	848.8	30.5	30.0	0.837	0.939	
			Left Tilt	190	836.6	30.5	30.0	0.362	0.406	
			Right Touch	128	824.2	30.5	30.0	0.673	0.755	
				190	836.6	30.5	30.0	0.843	0.946	
				251	848.8	30.5	30.0	0.896	1.005	2
			Right Tilt	190	836.6	30.5	30.0	0.403	0.452	
Body-worn	Voice	10	Rear	128	824.2	32.5	32.3	0.761	0.797	
				190	836.6	32.5	32.3	0.778	0.815	3
				251	848.8	32.5	32.3	0.778	0.815	
			Front	190	836.6	32.5	32.3	0.696	0.729	
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	10	Rear	128	824.2	30.5	30.0	0.659	0.739	
				190	836.6	30.5	30.0	0.774	0.868	
				251	848.8	30.5	30.0	0.775	0.870	
			Front	128	824.2	30.5	30.0	0.647	0.726	
				190	836.6	30.5	30.0	0.788	0.884	4
				251	848.8	30.5	30.0	0.769	0.863	
Hotspot			Edge 2	190	836.6	30.5	30.0	0.523	0.587	
			Edge 3	190	836.6	30.5	30.0	0.096	0.108	
			Edge 4	190	836.6	30.5	30.0	0.496	0.557	

12.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	30.0	29.7	0.516	0.553	5
			Left Tilt	661	1880.0	30.0	29.7	0.189	0.203	
			Right Touch	661	1880.0	30.0	29.7	0.245	0.263	
			Right Tilt	661	1880.0	30.0	29.7	0.188	0.201	
Head VoIP	GPRS 2 Slots	0	Left Touch	512	1850.2	28.0	27.2	0.537	0.646	
				661	1880.0	28.0	27.2	0.547	0.658	
				810	1909.8	28.0	27.2	0.551	0.662	6
			Left Tilt	661	1880.0	28.0	27.2	0.191	0.230	
			Right Touch	661	1880.0	28.0	27.2	0.251	0.302	
			Right Tilt	661	1880.0	28.0	27.2	0.187	0.225	
Body-worn	Voice	10	Rear	661	1880.0	30.0	29.7	0.520	0.557	7
			Front	661	1880.0	30.0	29.7	0.382	0.409	
Body-worn(VoIP) & Hotspot			Rear	661	1880.0	28.0	27.2	0.523	0.629	8
			Front	661	1880.0	28.0	27.2	0.380	0.457	
Hotspot	GPRS 2 Slots	10	Edge 2	661	1880.0	28.0	27.2	0.038	0.046	
			Edge 3	661	1880.0	28.0	27.2	0.177	0.213	
			Edge 4	661	1880.0	28.0	27.2	0.286	0.344	

12.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	22.5	22.0	0.593	0.665	9
			Left Tilt	4183	836.6	22.5	22.0	0.353	0.396	
			Right Touch	4183	836.6	22.5	22.0	0.618	0.693	
			Right Tilt	4183	836.6	22.5	22.0	0.362	0.406	
Body-worn & Hptspot	Rel 99 RMC	10	Rear	4132	826.4	22.5	22.0	0.723	0.811	10
				4183	836.6	22.5	22.0	0.774	0.868	
				4233	846.6	22.5	22.0	0.742	0.833	
			Front	4132	826.4	22.5	22.0	0.602	0.675	
				4183	836.6	22.5	22.0	0.683	0.766	
				4233	846.6	22.5	22.0	0.634	0.711	
Hotspot	Rel 99 RMC	10	Edge 2	4183	836.6	22.5	22.0	0.422	0.473	
			Edge 3	4183	836.6	22.5	22.0	0.071	0.080	
			Edge 4	4183	836.6	22.5	22.0	0.373	0.419	

12.4. W-CDMA Band IV

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	1312	1712.4	22.0	21.2	0.803	0.965	11
				1413	1732.6	22.0	21.3	0.814	0.956	
				1513	1752.6	22.0	21.3	0.832	0.978	
			Left Tilt	1413	1732.6	22.0	21.3	0.193	0.227	
			Right Touch	1413	1732.6	22.0	21.3	0.485	0.570	
			Right Tilt	1413	1732.6	22.0	21.3	0.239	0.281	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	1413	1732.6	22.0	21.3	0.452	0.531	12
			Front	1413	1732.6	22.0	21.3	0.424	0.498	
Hotspot	Rel 99 RMC	10	Edge 2	1413	1732.6	22.0	21.3	0.062	0.073	
			Edge 3	1413	1732.6	22.0	21.3	0.170	0.200	
			Edge 4	1413	1732.6	22.0	21.3	0.370	0.435	

12.5. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9262	1852.4	22.0	21.6	0.786	0.862	13
				9400	1880.0	22.0	21.7	0.870	0.932	
				9538	1907.6	22.0	21.5	0.842	0.945	
			Left Tilt	9400	1880.0	22.0	21.7	0.287	0.308	
			Right Touch	9400	1880.0	22.0	21.7	0.524	0.561	
			Right Tilt	9400	1880.0	22.0	21.7	0.304	0.326	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	9262	1852.4	22.0	21.6	0.648	0.711	14
				9400	1880.0	22.0	21.7	0.668	0.716	
				9538	1907.6	22.0	21.5	0.697	0.782	
			Front	9400	1880.0	22.0	21.7	0.521	0.558	
Hotspot	Rel 99 RMC	10	Edge 2	9400	1880.0	22.0	21.7	0.074	0.080	
			Edge 3	9400	1880.0	22.0	21.7	0.180	0.193	
			Edge 4	9400	1880.0	22.0	21.7	0.404	0.433	

12.6. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	18700	1860.0	1	49	23.0	22.7	0.892	0.956	
						50	25	22.0	21.8	0.701	0.734	
				18900	1880.0	1	99	23.0	22.9	0.926	0.948	
						50	49	22.0	21.9	0.735	0.752	
				19100	1900.0	1	0	23.0	23.0	1.080	1.080	15
						50	49	22.0	21.9	0.762	0.780	
			Left Tilt	18900	1880.0	100	0	22.0	22.0	0.850	0.850	
						1	99	23.0	22.9	0.344	0.352	
			Right Touch	18900	1880.0	50	49	22.0	21.9	0.264	0.270	
						1	99	23.0	22.9	0.450	0.460	
			Right Tilt	18900	1880.0	50	49	22.0	21.9	0.372	0.381	
						1	99	23.0	22.9	0.372	0.381	
Body-worn & Hotspot	QPSK	10	Rear	18700	1860.0	1	49	23.0	22.7	0.944	1.012	16
						50	25	22.0	21.8	0.753	0.788	
				18900	1880.0	1	99	23.0	22.9	0.947	0.969	
						50	49	22.0	21.9	0.779	0.797	
				19100	1900.0	1	0	23.0	23.0	0.974	0.974	
						50	49	22.0	21.9	0.761	0.779	
			Front	18700	1860.0	100	0	22.0	22.0	0.760	0.760	
						1	49	23.0	22.7	0.712	0.763	
				18900	1880.0	1	99	23.0	22.9	0.803	0.822	
						50	49	22.0	21.9	0.598	0.612	
				19100	1900.0	1	0	23.0	23.0	0.791	0.791	
						50	49	22.0	21.9	0.439	0.449	
Hotspot	QPSK	10	Edge 2	18900	1880.0	1	99	23.0	22.9	0.098	0.100	
						50	49	22.0	21.9	0.078	0.080	
			Edge 3	18900	1880.0	1	99	23.0	22.9	0.288	0.295	
						50	49	22.0	21.9	0.231	0.236	
			Edge 4	18900	1880.0	1	99	23.0	22.9	0.534	0.546	
						50	49	22.0	21.9	0.439	0.449	

12.7. LTE Band 4 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20050	1720.0	1	99	23.0	22.8	0.886	0.921	17
						50	0	22.0	21.9	0.676	0.692	
				20175	1732.5	1	49	23.0	22.9	0.881	0.895	
						50	0	22.0	21.8	0.681	0.707	
				20300	1745.0	1	0	23.0	22.8	0.899	0.935	
						50	0	22.0	21.9	0.700	0.723	
			Left Tilt	20175	1732.5	1	49	23.0	22.9	0.209	0.212	
						50	0	22.0	21.8	0.162	0.168	
			Right Touch	20175	1732.5	1	49	23.0	22.9	0.479	0.487	
						50	0	22.0	21.8	0.375	0.389	
			Right Tilt	20175	1732.5	1	49	23.0	22.9	0.211	0.214	
						50	0	22.0	21.8	0.165	0.171	
Body-worn & Hotspot	QPSK	10	Rear	20050	1720.0	1	99	23.0	22.8	1.000	1.047	18
						50	0	22.0	21.9	0.816	0.835	
				20175	1732.5	1	49	23.0	22.9	0.984	1.007	
						50	0	22.0	21.8	0.784	0.821	
				20300	1745.0	1	0	23.0	22.8	1.010	1.058	
						50	0	22.0	21.9	0.827	0.846	
			Front	20175	1732.5	1	49	23.0	22.9	0.750	0.762	
						50	0	22.0	21.8	0.580	0.602	
			Edge 2	20175	1732.5	1	49	23.0	22.9	0.097	0.098	
						50	0	22.0	21.8	0.073	0.076	
Hotspot	QPSK	10	Edge 3	20175	1732.5	1	49	23.0	22.9	0.544	0.553	
						50	0	22.0	21.8	0.420	0.436	
			Edge 4	20175	1732.5	1	49	23.0	22.9	0.494	0.502	
						50	0	22.0	21.8	0.385	0.399	
			Edge 2	20175	1732.5	1	49	23.0	22.9	0.097	0.098	
						50	0	22.0	21.8	0.073	0.076	

12.8. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20525	836.5	1	24	23.0	22.7	0.452	0.481	19
						25	12	22.0	21.6	0.367	0.400	
			Left Tilt	20525	836.5	1	24	23.0	22.7	0.269	0.286	
						25	12	22.0	21.6	0.209	0.228	
			Right Touch	20525	836.5	1	24	23.0	22.7	0.439	0.467	
						25	12	22.0	21.6	0.342	0.372	
			Right Tilt	20525	836.5	1	24	23.0	22.7	0.259	0.276	
						25	12	22.0	21.6	0.248	0.270	
			Rear	20525	836.5	1	24	23.0	22.7	0.617	0.657	20
						25	12	22.0	21.6	0.479	0.522	
Body-worn & Hotspot	QPSK	10	Front	20525	836.5	1	24	23.0	22.7	0.466	0.496	
						25	12	22.0	21.6	0.369	0.402	
			Edge 2	20525	836.5	1	24	23.0	22.7	0.312	0.332	
						25	12	22.0	21.6	0.242	0.264	
			Edge 3	20525	836.5	1	24	23.0	22.7	0.054	0.057	
						25	12	22.0	21.6	0.042	0.046	
Hotspot	QPSK	10	Edge 4	20525	836.5	1	24	23.0	22.7	0.298	0.317	
						25	12	22.0	21.6	0.234	0.255	
			Edge 2	20525	836.5	1	24	23.0	22.7	0.312	0.332	
						25	12	22.0	21.6	0.242	0.264	
			Edge 3	20525	836.5	1	24	23.0	22.7	0.054	0.057	
						25	12	22.0	21.6	0.042	0.046	

12.9. LTE Band 17 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23790	710.0	1	49.0	23.0	22.5	0.189	0.212	21
						25	25.0	22.0	21.6	0.138	0.151	
			Left Tilt	23790	710.0	1	49.0	23.0	22.5	0.114	0.128	
						25	25.0	22.0	21.6	0.083	0.091	
			Right Touch	23790	710.0	1	49.0	23.0	22.5	0.163	0.183	
						25	25.0	22.0	21.6	0.119	0.130	
			Right Tilt	23790	710.0	1	49.0	23.0	22.5	0.108	0.121	
						25	25.0	22.0	21.6	0.087	0.095	
Body-worn & Hotspot	QPSK	10	Rear	23790	710.0	1	49.0	23.0	22.5	0.296	0.332	22
						25	25.0	22.0	21.6	0.219	0.240	
			Front	23790	710.0	1	49.0	23.0	22.5	0.228	0.256	
						25	25.0	22.0	21.6	0.168	0.184	
Hotspot	QPSK	10	Edge 2	23790	710.0	1	49.0	23.0	22.5	0.157	0.176	
						25	25.0	22.0	21.6	0.113	0.124	
			Edge 3	23790	710.0	1	49.0	23.0	22.5	0.030	0.034	
						25	25.0	22.0	21.6	0.022	0.024	
			Edge 4	23790	710.0	1	49.0	23.0	22.5	0.162	0.182	
						25	25.0	22.0	21.6	0.119	0.130	

12.10. Wi-Fi (DTS Band)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	802.11b 1 Mbps	0	Left Touch	6	2437.0	14.5	13.6	0.059	0.072	
			Left Tilt	6	2437.0	14.5	13.6	0.051	0.063	
			Right Touch	6	2437.0	14.5	13.6	0.122	0.150	23
			Right Tilt	6	2437.0	14.5	13.6	0.094	0.116	
Body-worn & Hotspot	802.11b 1 Mbps	10	Rear	6	2437.0	14.5	13.6	0.044	0.054	24
			Front	6	2437.0	14.5	13.6	0.011	0.014	
Hotspot	802.11b 1 Mbps	10	Edge 1	6	2437.0	14.5	13.6	0.037	0.046	
			Edge 2	6	2437.0	14.5	13.6	<0.001	<0.001	
			Edge 4	6	2437.0	14.5	13.6	0.016	0.019	

12.11. Bluetooth

12.11.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
10.5	11	10	2.480	1.8

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

12.11.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	11	10	2.480	0.231

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Hotspot/Wi-Fi Direct (W/kg)	Repeated SAR (Yes/No)
750	LTE Band 17		0.296		No
850	GSM 850	0.896			Yes
	WCDMA Band V				No
	LTE Band 5				No
1900	GSM 1900				No
	WCDMA Band II				No
	LTE Band 2	1.080			Yes
1750	LTE Band 4		1.010		Yes
	WCDMA Band IV				No
2400	Wi-Fi 802.11b/g/n				No

13.2. Repeated Measurement Results

Head Exposure Condition

Frequency band	Test Position	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
					Original	Repeated		
GSM 850	Right Touch	QPSK	251	848.8	0.896	0.874	1.03	1
LTE Band 2	Left Touch	QPSK	19100	1900.0	1.080	1.080	1.00	1

Body-worn Accessory & Hotspot Mode Exposure Condition

Frequency band	Test Position	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
					Original	Repeated		
LTE Band 4	Rear	QPSK	20300	1745.0	1.010	0.999	1.01	1

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured for both antennas in the pair, it is determined by the actual x, y, and z coordinates in the 1-g SAR for each SAR Peak Location; based on the extrapolated and interpolated result in the zoom scan measurement using the formula:

$$[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$$

A new threshold of 0.04 is also introduced in the KDB 447498. Thus, in order for a pair of simultaneously transmitting antennas, with the sum of 1-g SAR > 1.6 W/kg, to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM 850	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.939	0.072		1.011	No
	Left Tilt	① + ②	0.406	0.063		0.469	No
	Right Touch	① + ②	1.005	0.150		1.155	No
	Right Tilt	① + ②	0.452	0.116		0.568	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.870	0.054		0.924	No
		① + ③	0.870		0.231	1.101	No
	Front	① + ②	0.884	0.014		0.898	No
		① + ③	0.884		0.231	1.115	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.587	0.000		0.587	No
	Edge 3	① + ②	0.108			0.108	No
	Edge 4	① + ②	0.557	0.019		0.576	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM 1900	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.662	0.072		0.734	No
	Left Tilt	① + ②	0.230	0.063		0.293	No
	Right Touch	① + ②	0.302	0.150		0.452	No
	Right Tilt	① + ②	0.225	0.116		0.341	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.629	0.054		0.683	No
		① + ③	0.629		0.231	0.860	No
	Front	① + ②	0.457	0.014		0.471	No
		① + ③	0.457		0.231	0.688	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.046	0.000		0.046	No
	Edge 3	① + ②	0.213			0.213	No
	Edge 4	① + ②	0.344	0.019		0.363	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band V	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.665	0.072		0.737	No
	Left Tilt	① + ②	0.396	0.063		0.459	No
	Right Touch	① + ②	0.693	0.150		0.843	No
	Right Tilt	① + ②	0.406	0.116		0.522	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.868	0.054		0.922	No
		① + ③	0.868		0.231	1.099	No
	Front	① + ②	0.766	0.014		0.780	No
		① + ③	0.766		0.231	0.997	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.473	0.000		0.473	No
	Edge 3	① + ②	0.080			0.080	No
	Edge 4	① + ②	0.419	0.019		0.438	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.4. Sum of the SAR for WCDMA Band IV & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band IV	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.978	0.072		1.050	No
	Left Tilt	① + ②	0.227	0.063		0.290	No
	Right Touch	① + ②	0.570	0.150		0.720	No
	Right Tilt	① + ②	0.281	0.116		0.397	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.531	0.054		0.585	No
		① + ③	0.531		0.231	0.762	No
	Front	① + ②	0.498	0.014		0.512	No
		① + ③	0.498		0.231	0.729	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.073	0.000		0.073	No
	Edge 3	① + ②	0.200			0.200	No
	Edge 4	① + ②	0.435	0.019		0.454	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.5. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① W-CDMA Band II	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.945	0.072		1.017	No
	Left Tilt	① + ②	0.308	0.063		0.371	No
	Right Touch	① + ②	0.561	0.150		0.711	No
	Right Tilt	① + ②	0.326	0.116		0.442	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.782	0.054		0.836	No
		① + ③	0.782		0.231	1.013	No
	Front	① + ②	0.558	0.014		0.572	No
		① + ③	0.558		0.231	0.789	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.080	0.000		0.080	No
	Edge 3	① + ②	0.193			0.193	No
	Edge 4	① + ②	0.433	0.019		0.452	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.6. Sum of the SAR for LTE Band 2 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE band 2	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	1.080	0.072		1.152	No
	Left Tilt	① + ②	0.352	0.063		0.415	No
	Right Touch	① + ②	0.460	0.150		0.610	No
	Right Tilt	① + ②	0.381	0.116		0.497	No
Body-worn Accessory & Hotspot	Rear	① + ②	1.012	0.054		1.066	No
		① + ③	1.012		0.231	1.243	No
	Front	① + ②	0.822	0.014		0.836	No
		① + ③	0.822		0.231	1.053	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.100	0.000		0.100	No
	Edge 3	① + ②	0.295			0.295	No
	Edge 4	① + ②	0.546	0.019		0.565	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.7. Sum of the SAR for LTE Band 4 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE band 4	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.935	0.072		1.007	No
	Left Tilt	① + ②	0.212	0.063		0.275	No
	Right Touch	① + ②	0.487	0.150		0.637	No
	Right Tilt	① + ②	0.214	0.116		0.330	No
Body-worn Accessory & Hotspot	Rear	① + ②	1.058	0.054		1.112	No
		① + ③	1.058		0.231	1.289	No
	Front	① + ②	0.762	0.014		0.776	No
		① + ③	0.762		0.231	0.993	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.098	0.000		0.098	No
	Edge 3	① + ②	0.553			0.553	No
	Edge 4	① + ②	0.502	0.019		0.521	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.8. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE band 5	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.481	0.072		0.553	No
	Left Tilt	① + ②	0.286	0.063		0.349	No
	Right Touch	① + ②	0.467	0.150		0.617	No
	Right Tilt	① + ②	0.276	0.116		0.392	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.657	0.054		0.711	No
		① + ③	0.657		0.231	0.888	No
	Front	① + ②	0.496	0.014		0.510	No
		① + ③	0.496		0.231	0.727	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.332	0.000		0.332	No
	Edge 3	① + ②	0.057			0.057	No
	Edge 4	① + ②	0.317	0.019		0.336	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.9. Sum of the SAR for LTE Band 17 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① LTE Band 17	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.212	0.072		0.284	No
	Left Tilt	① + ②	0.128	0.063		0.191	No
	Right Touch	① + ②	0.183	0.150		0.333	No
	Right Tilt	① + ②	0.121	0.116		0.237	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.332	0.054		0.386	No
		① + ③	0.332		0.231	0.563	No
	Front	① + ②	0.256	0.014		0.270	No
		① + ③	0.256		0.231	0.487	No
Hotspot	Edge 1	① + ②		0.046		0.046	No
	Edge 2	① + ②	0.176	0.000		0.176	No
	Edge 3	① + ②	0.034			0.034	No
	Edge 4	① + ②	0.182	0.019		0.201	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. Photos and Antenna Locations**
- 15.2. System Performance Check Plots**
- 15.3. Highest SAR Test Plots**
- 15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3531**
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3773**
- 15.6. Calibration Certificate for E-Field Probe EX3DV3 - SN 3936**
- 15.7. Calibration Certificate for D750V3 - SN 1071**
- 15.8. Calibration Certificate for D835V2 - SN 4d002**
- 15.9. Calibration Certificate for D1750V2 - SN 1077**
- 15.10. Calibration Certificate for D1900V2- SN 5d043**
- 15.11. Calibration Certificate for D2450V2 - SN 899**

END OF REPORT