



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT

FOR

GSM Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G350E

FCC ID: A3LSMG350E

REPORT NUMBER: 14I17784-1

ISSUE DATE: MAY 19, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY
GYEONGGI-DO, 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Issue			
Rev.	Date	Revisions	Revised By
-	5/17/14	Initial Issue	P. Zhang

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	7
5.1.	DESCRIPTION OF EUT	7
5.2.	MAXIMUM OUTPUT POWER.....	7
5.3.	DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4.	DESCRIPTION OF TEST SETUP.....	9
6.	TEST AND MEASUREMENT EQUIPMENT	11
7.	Summary Table.....	13
8.	RF POWER OUTPUT VERIFICATION.....	14
8.1.	GSM/GPRS/EDGE	14
9.	LIMITS AND CONDUCTED RESULTS.....	16
9.1.	OCCUPIED BANDWIDTH	16
9.1.1.	OCCUPIED BANDWIDTH RESULTS	17
9.1.2.	OCCUPIED BANDWIDTH PLOTS	18
9.2.	BAND EDGE EMISSIONS	21
9.2.1.	BAND EDGE PLOTS	22
9.3.	OUT OF BAND EMISSIONS.....	24
9.3.1.	OUT OF BAND EMISSIONS RESULT	25
9.3.2.	OUT OF BAND EMISSIONS PLOTS	26
9.4.	FREQUENCY STABILITY.....	29
9.4.1.	FREQUENCY STABILITY RESULTS	30
10.	RADIATED TEST RESULTS	32
10.1.	RADIATED POWER (ERP & EIRP).....	32
10.1.1.	ERP/EIRP Results.....	32

10.1.2.	ERP/EIRP DATA.....	33
10.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	35
10.2.1.	SPURIOUS RADIATION DATA.....	36
11.	SETUP PHOTOS	38

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM Phone + Bluetooth & WLAN 2.4GHz b/g/n
MODEL: SM-G350E
SERIAL NUMBER: FL-179-B (Radiated & Conducted)
DATE TESTED: May 9 - 19, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For

UL Verification Services Inc. By:



Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL VERIFICATION SERVICES

STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL VERIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A	☐ Chamber D
☒ Chamber B	☐ Chamber E
☐ Chamber C	☐ Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss(between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss(between the SG and substitution antenna)}$$

$$(\text{Path loss} = \text{Signal generator output} - \text{PSA reading with substitution antenna})$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM Phone + Bluetooth & WLAN 2.4GHz b/g/n

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/2 4						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Peak(dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
GSM850	824~849	GMSK	32.8	1905.46		
	824~849	GPRS	32.8	1905.46	25.841	383.8
GSM1900	1850~1910	GMSK	29.7	933.25		
	1850~1910	GPRS	29.7	933.25	31.214	1322.51

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850, 824~849MHz	-2.97
GSM1900, 1850~1910MHz	1.21

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	SM-G350E	N/A	N/A
Earphone	Samsung	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

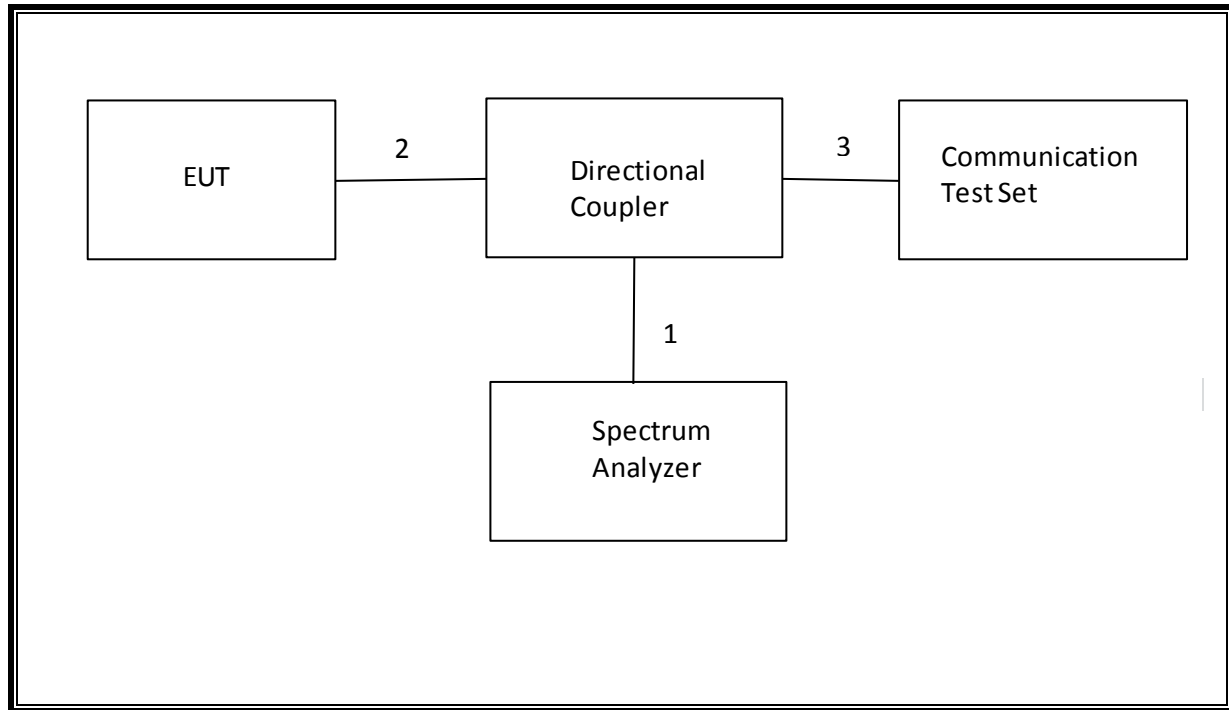
I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

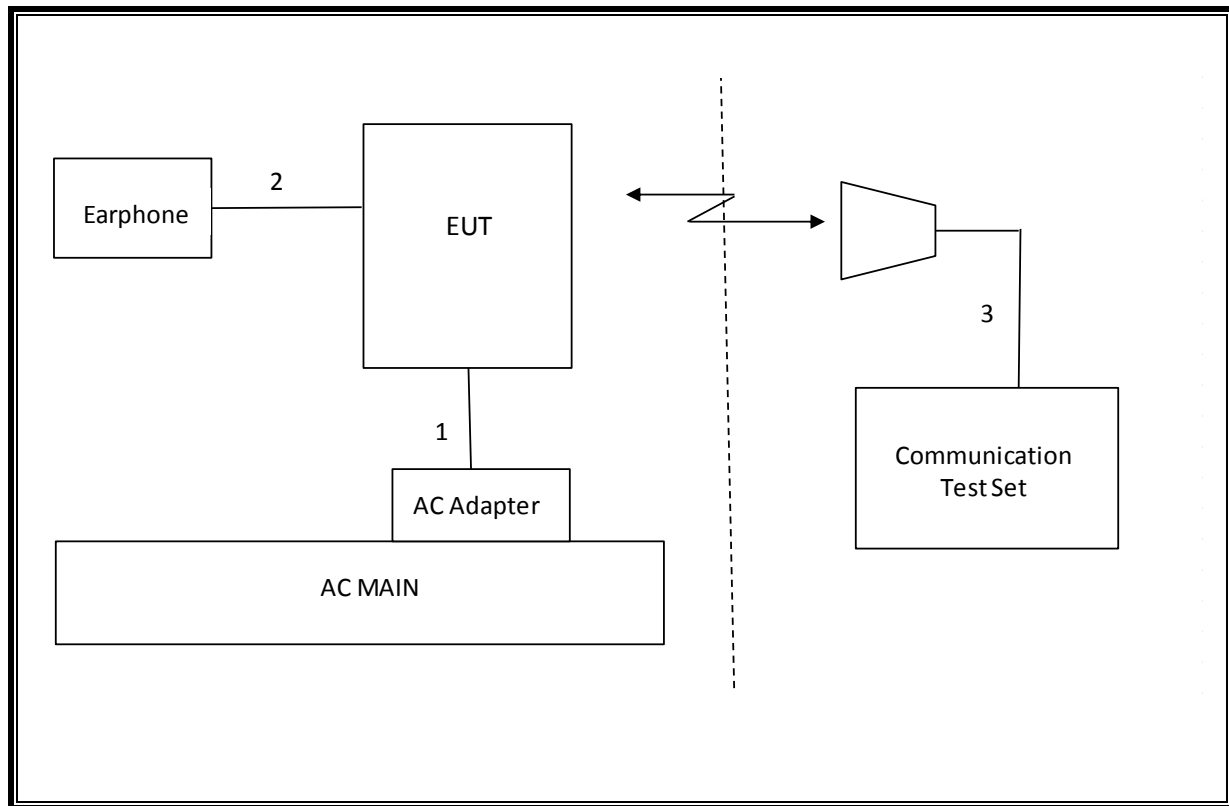
I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**6. TEST AND MEASUREMENT EQUIPMENT**

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	09/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/14
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/14
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/15
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS Gen	Occupied Band width (99%)	N/A	Conducted	Pass	250.26KHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-21.635dBm
2.1046	N/A	Conducted output power	N/A		Pass	32.8dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.008PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	25.628dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	31.214dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-41.1dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

- > Slot configuration > Uplink/Gamma
- > 33 dBm for GPRS 850/900
- > 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

8.1.1.

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot	3 time slot	4 time slot
				Peak (dBm)	Peak (dBm)	Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	32.8			
		190	836.6	32.7			
		251	848.8	32.7			
	GPRS	128	824.2	32.8	29.9	28.4	26.9
		190	836.6	32.7	30.1	28.4	26.8
		251	848.8	32.7	30.2	28.5	27.0
GSM1900	GMSK	512	1850.2	29.6			
		661	1880	29.7			
		810	1909.8	29.7			
	GPRS	512	1850.2	29.6	26.6	24.7	23.6
		661	1880	29.7	26.8	24.8	23.6
		810	1909.8	29.7	26.7	24.8	23.8

9. LIMITS AND CONDUCTED RESULTS

9.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

IC: RSS-132, 4.5; RSS-133, 6.5

LIMITS

For reporting purposes only

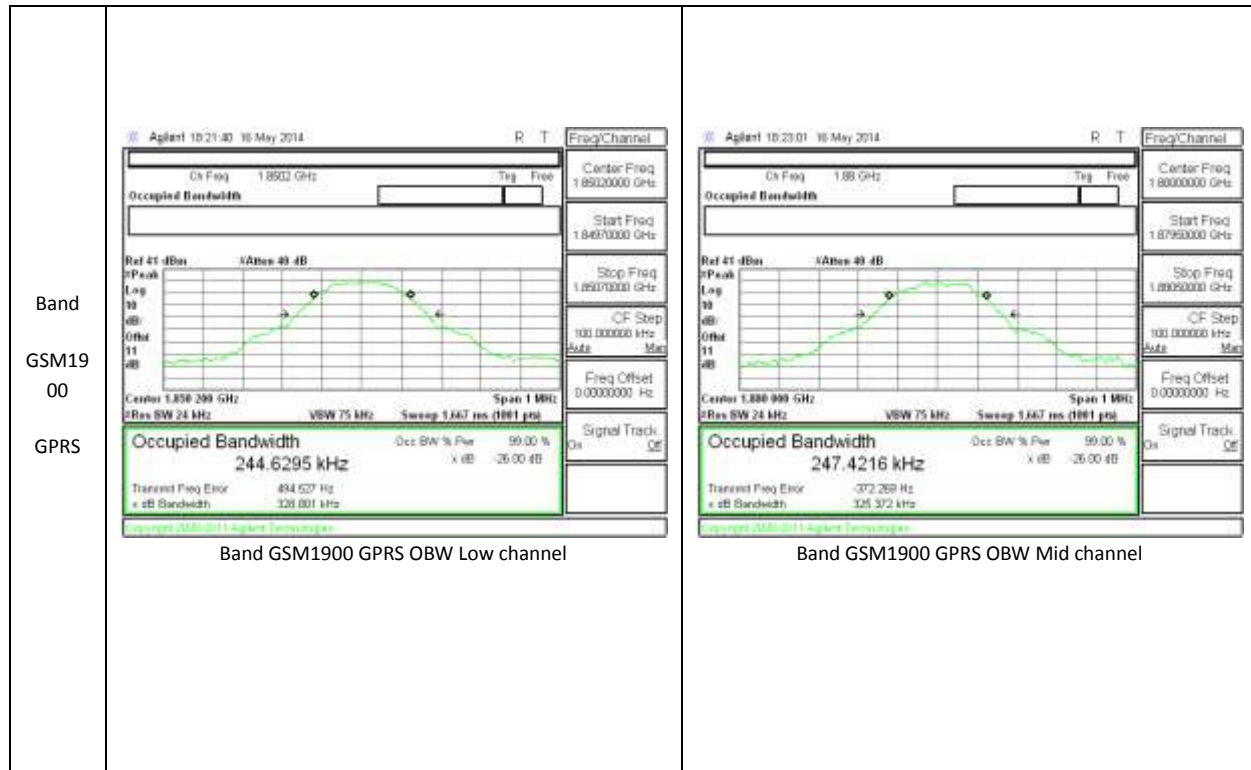
TEST PROCEDURE

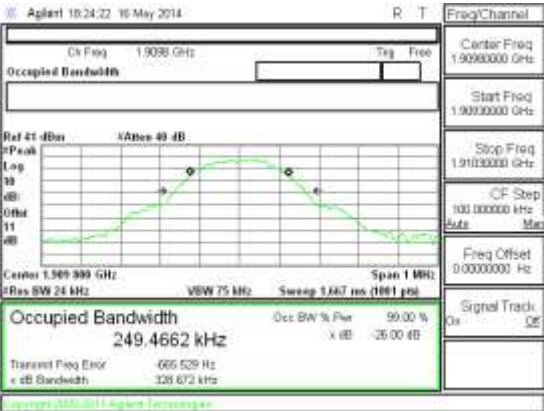
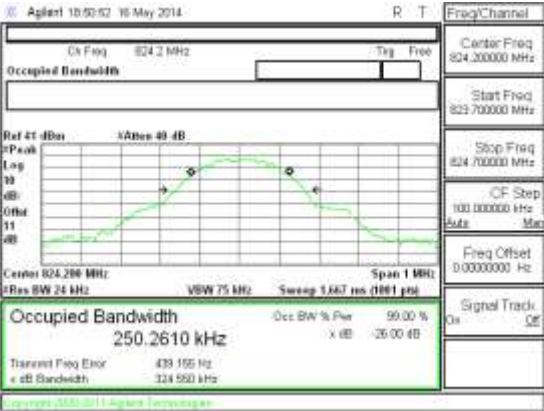
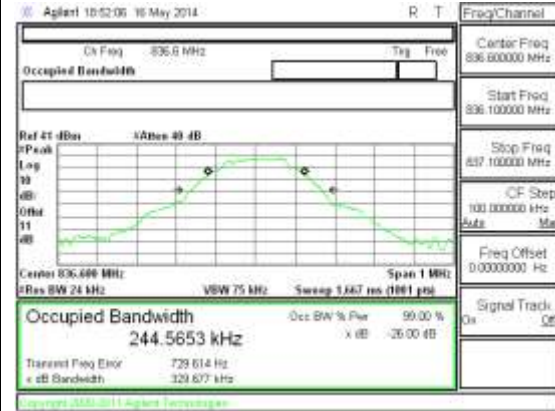
The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

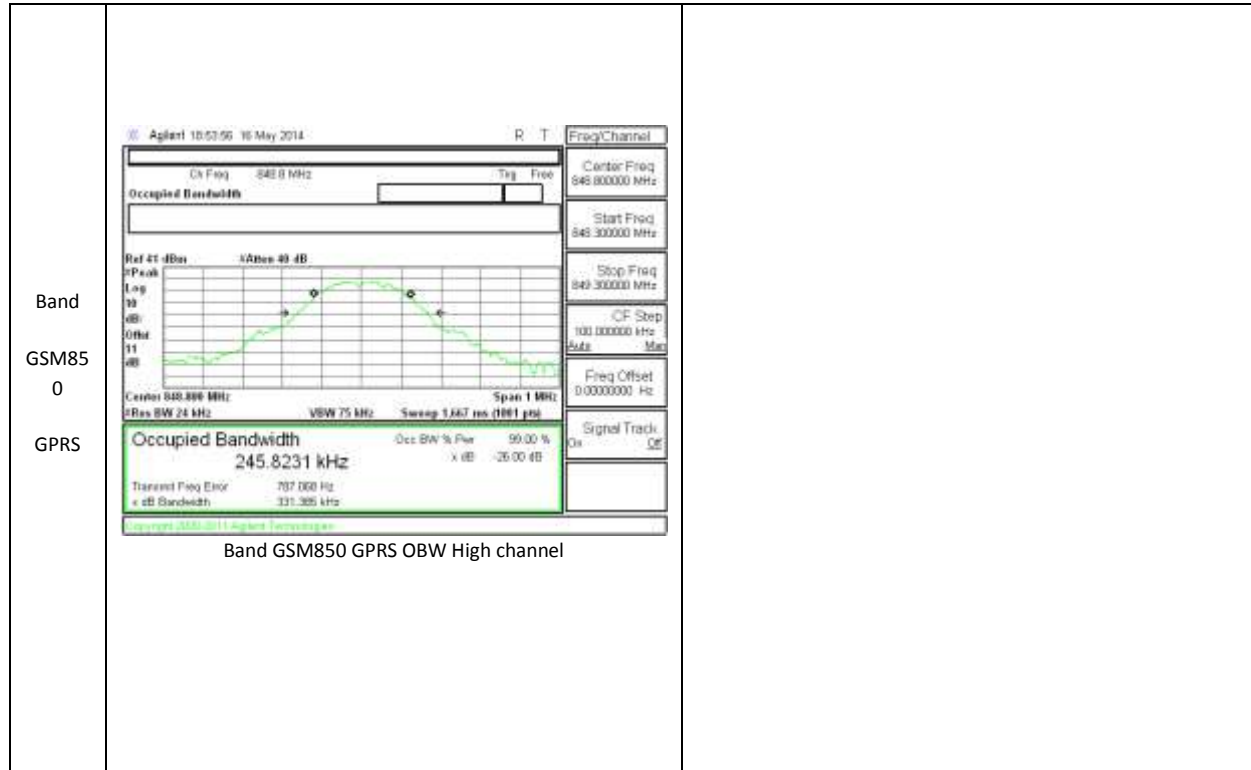
(KDB 971168 D01 Power Meas License Digital Systems v02r01 - 06/07/2013)

9.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (KHz)	-26dB BW (KHz)
GSM850	GPRS	128	824.2	250.26	324.55
		190	836.6	244.57	329.68
		251	848.8	245.82	331.39
GSM1900	GPRS	512	1850.2	244.63	328.80
		661	1880	247.42	325.37
		810	1909.8	249.47	328.67

9.1.2. OCCUPIED BANDWIDTH PLOTS

Band GSM1900 GPRS	 Agilent 19:24:22 19-May-2014 R T Freq/Channel Ch Freq 1.909399 GHz Tag Free Center Freq 1.909399000 GHz Start Freq 1.909399000 GHz Stop Freq 1.910399000 GHz CF Step 100.000000 kHz Freq Offset 0.00000000 Hz Signal Track Off Ref 41 dBm VBW 75 kHz Span 1 MHz Res BW 24 kHz Occupied Bandwidth 249.4662 kHz Dec BW % Per 99.00 % Transmit Freq Error -665.529 Hz RBW Bandwidth 328.672 kHz Band GSM1900 GPRS OBW High channel	
Band GSM850 GPRS	 Agilent 19:50:52 19-May-2014 R T Freq/Channel Ch Freq 824.200 MHz Tag Free Center Freq 824.200000 MHz Start Freq 823.700000 MHz Stop Freq 824.700000 MHz CF Step 100.000000 kHz Freq Offset 0.00000000 Hz Signal Track Off Ref 41 dBm VBW 75 kHz Span 1 MHz Res BW 24 kHz Occupied Bandwidth 250.2610 kHz Dec BW % Per 99.00 % Transmit Freq Error 439.155 Hz RBW Bandwidth 324.580 kHz Band GSM850 GPRS OBW Low channel	 Agilent 19:52:06 19-May-2014 R T Freq/Channel Ch Freq 836.600 MHz Tag Free Center Freq 836.600000 MHz Start Freq 836.100000 MHz Stop Freq 837.100000 MHz CF Step 100.000000 kHz Freq Offset 0.00000000 Hz Signal Track Off Ref 41 dBm VBW 75 kHz Span 1 MHz Res BW 24 kHz Occupied Bandwidth 244.5653 kHz Dec BW % Per 99.00 % Transmit Freq Error 729.614 Hz RBW Bandwidth 329.672 kHz Band GSM850 GPRS OBW Mid channel



9.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

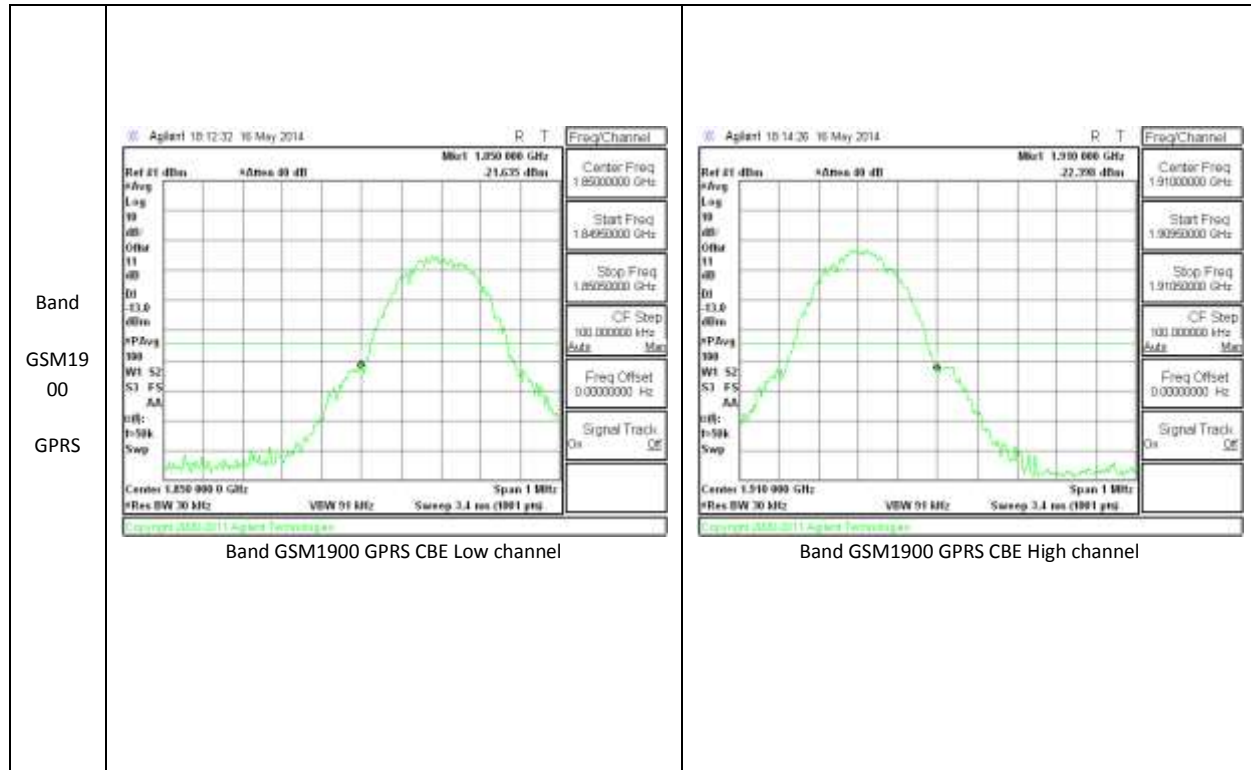
The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

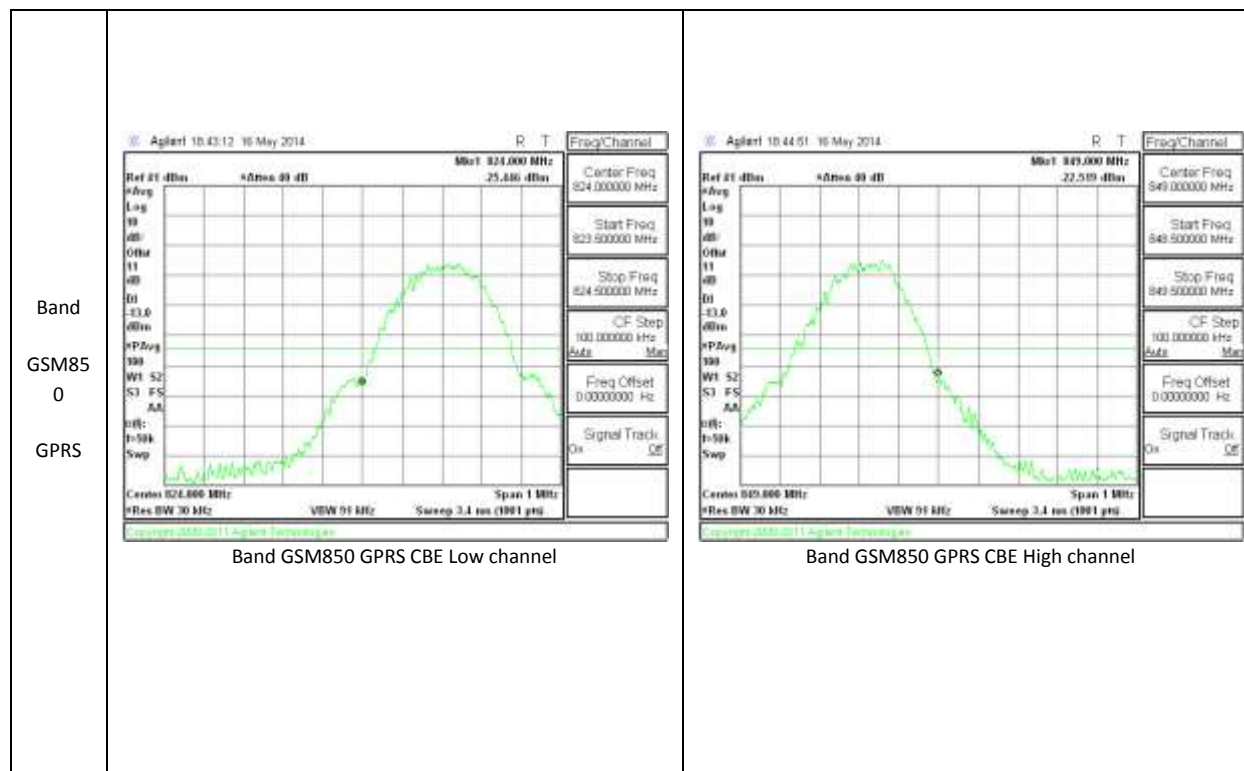
TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

RESULTS

9.2.1.BAND EDGE PLOTS



9.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238 and §90.691

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

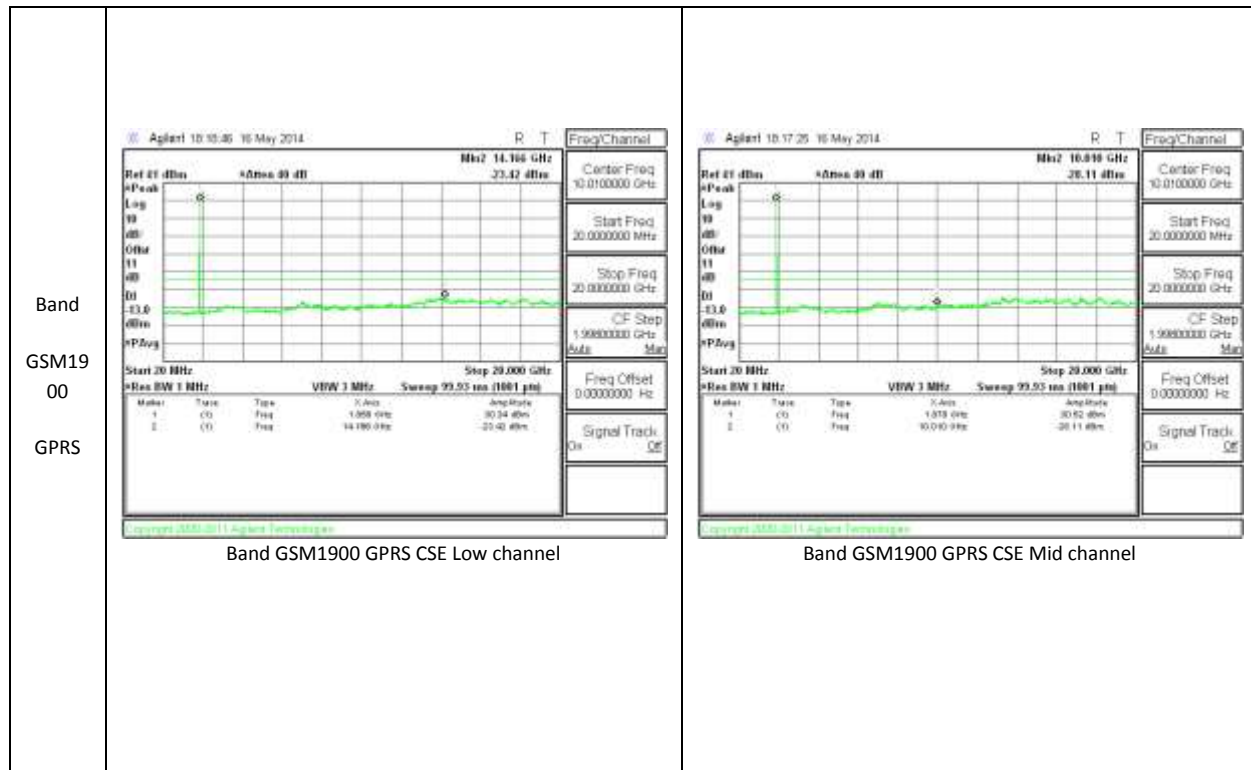
Per KDB 971168 D01 Power Meas License Digital Systems v02r01

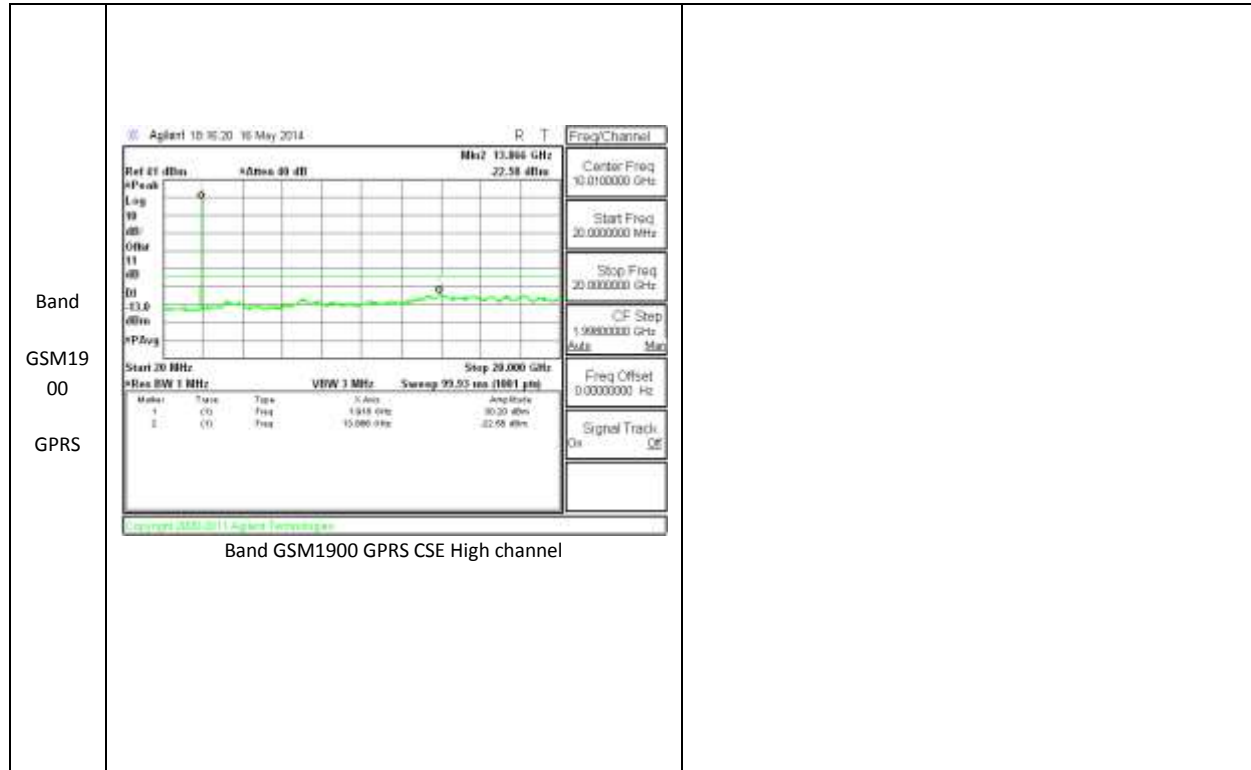
The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

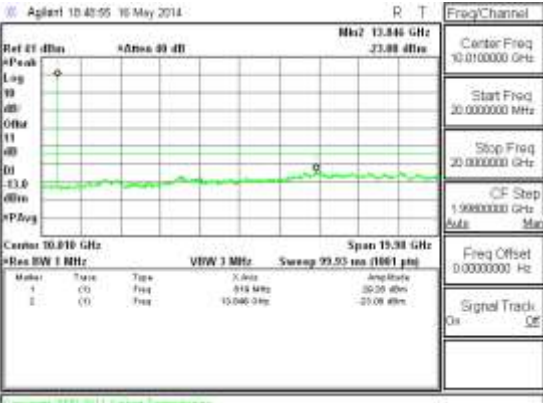
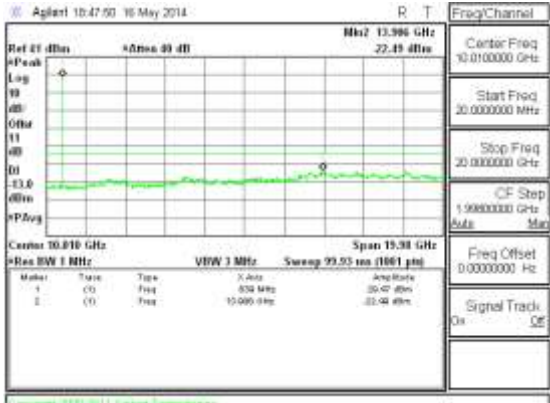
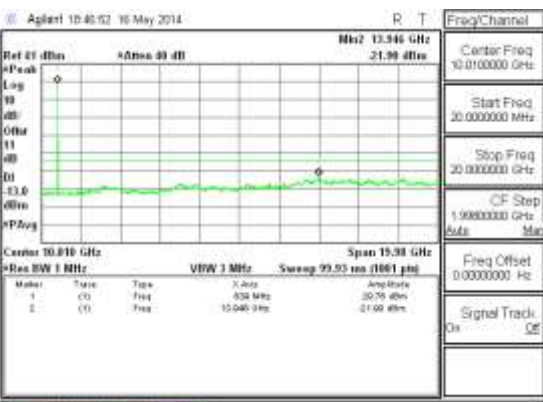
RESULTS

9.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM850	GPRS	824.2	-23.08	-13	-10.08
		836.6	-22.49	-13	-9.49
		848.8	-21.9	-13	-8.9
GSM1900	GPRS	1850.2	-23.42	-13	-10.42
		1880	-28.11	-13	-15.11
		1909.8	-22.58	-13	-9.58

9.3.2. OUT OF BAND EMISSIONS PLOTS



Band GSM850 0 GPRS	 Band GSM850 GPRS CSE Low channel	 Band GSM850 GPRS CSE Mid channel
Band GSM850 0 GPRS	 Band GSM850 GPRS CSE High channel	

9.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

RESULTS

See the following pages.

9.4.1. FREQUENCY STABILITY RESULTS

CELL, GPRS MODULATION – MID CHANNEL

Reference Frequency: Cellular Mid Channel 836.599993MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.599986	0.008	2.5
3.80	40	836.599988	0.006	2.5
3.80	30	836.59999	0.004	2.5
3.80	20	836.599993	0	2.5
3.80	10	836.599989	0.005	2.5
3.80	0	836.599990	0.004	2.5
3.80	-10	836.599992	0.001	2.5
3.80	-20	836.599992	0.001	2.5
3.80	-30	836.599988	0.006	2.5

Reference Frequency: Cellular Mid Channel 836.599993MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.500 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.599993	0	2.5
4.30	20	836.599988	0.006	2.5
3.30	20	836.599986	0.008	2.5

PCS, GPRS MODULATION – MID CHANNEL

Reference Frequency: PCS Mid Channel 1880.000007 MHz @ 20°C Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1880.000009	-0.001	2.5
3.80	40	1880.000010	-0.002	2.5
3.80	30	1880.000004	0.002	2.5
3.80	20	1880.000007	0	2.5
3.80	10	1880.000009	-0.001	2.5
3.80	0	1880.000006	0.001	2.5
3.80	-10	1879.999993	0.007	2.5
3.80	-20	1879.999994	0.007	2.5
3.80	-30	1879.999987	0.011	2.5

Reference Frequency: PCS Mid Channel 1880.000007MHz @ 20°C Limit: within the authorized block or +/- 2.5 ppm = 4700.000 Hz				
Power Supply (Vdc)	Environment Temperature (*C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1880.000007	0.00000	2.5
4.30	20	1880.000005	0.00106	2.5
3.30	20	1880.000012	-0.00266	2.5

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

TEST RESULTS

10.1.1. ERP/EIRP Results

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GPRS	512	1850.2	31.138	1299.57
		661	1880	31.214	1322.51
		810	1909.8	30.7406	1185.93

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GPRS	128	824.2	25.321	340.49
		190	836.6	25.628	365.43
		251	848.8	25.841	383.8

10.1.2. ERP/EIRP DATA

Band GSM19 00 GPRS								
	High Frequency Fundamental Measurement Compliance Certification Services Chamber A Company: SAMSUNG Project #: 14I17784 Date: 05/16/14 Test Engineer: O. Stoelting Configuration: EUT ONLY, X Position Mode: GPRS 1900MHz Test Equipment: Receiving: T136, and Chamber A SMA Cables Substitution: Horn T60 Substitution, 8ft SMA Cable (228995006) Warehouse							
	f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta
	GHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)
	Low Ch							
	1.850	12.1	V	0.85	8.49	19.76	33.0	-13.2
	1.850	23.5	H	0.85	8.49	31.14	33.0	-1.9
	Mid Ch							
	1.880	14.7	V	0.85	8.34	22.20	33.0	-10.8
	1.880	23.7	H	0.85	8.34	31.21	33.0	-1.8
	High Ch							
	1.910	20.7	V	0.85	8.21	28.08	33.0	-4.9
	1.910	23.4	H	0.85	8.21	30.74	33.0	-2.3
Rev. 3.17.11								

Band GSM850 GPRS	High Frequency Substitution Measurement Compliance Certification Services Chamber B								
	Company:		Samsung						
	Project #:		14I17784						
	Date:		05/17/14						
	Test Engineer:		D. Soper						
	Configuration:		EUT, X Position						
	Mode:		GRPS 850MHz						
	Test Equipment:								
	Receiving: Sunol T243, and Chamber B N-type Cable.								
	Substitution: Dipole S/N: 00022117, 2ft SMA Cable.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	824.20	16.70	V	0.5	0.0	16.20	38.5	-22.2	
	824.20	25.82	H	0.5	0.0	25.32	38.5	-13.1	
	Mid Ch								
	836.60	16.87	V	0.5	0.0	16.37	38.5	-22.1	
	836.60	26.13	H	0.5	0.0	25.63	38.5	-12.8	
	High Ch								
	848.80	17.20	V	0.5	0.0	16.70	38.5	-21.7	
	848.80	26.34	H	0.5	0.0	25.84	38.5	-12.6	
	Rev. 3.17.11								

10.2. FIELD STRENGTH OF SPURIOUS RADIATION**RULE PART(S)**

FCC: §2.1053, §22.917, §24.238

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB

RESULTS

10.2.1. SPURIOUS RADIATION DATA

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:	SAMSUNG									
Project #:	14I17784									
Date:	05/16/14									
Test Engineer:	O. Stoelting									
Configuration:	X-pos. EUT w/ ac charger & HS									
Mode:	GPRS 1900									
Chamber Pre-amplifier Filter Limit 5m Chamber A T343 8449B Filter 1 Part 24										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM1900 GPRS	Low Ch, 1850MHz									
	3.700	-16.6	V	3.0	35.4	1.0	-51.0	-13.0	-38.0	
	5.550	-13.8	V	3.0	34.7	1.0	-47.5	-13.0	-34.5	
	7.400	-11.9	V	3.0	34.9	1.0	-45.8	-13.0	-32.8	
	3.700	-15.4	H	3.0	35.4	1.0	-49.8	-13.0	-36.8	
	5.550	-12.1	H	3.0	34.7	1.0	-45.8	-13.0	-32.8	
	7.400	-10.2	H	3.0	34.9	1.0	-44.1	-13.0	-31.1	
	Mid Ch, 1880.0MHz									
	3.760	-14.2	V	3.0	35.3	1.0	-48.6	-13.0	-35.6	
	5.640	-12.3	V	3.0	34.7	1.0	-46.0	-13.0	-33.0	
	7.520	-11.5	V	3.0	34.9	1.0	-45.5	-13.0	-32.5	
	3.760	-15.4	H	3.0	35.3	1.0	-49.7	-13.0	-36.7	
	5.640	-13.2	H	3.0	34.7	1.0	-46.9	-13.0	-33.9	
	7.520	-10.3	H	3.0	34.9	1.0	-44.2	-13.0	-31.2	
	High Ch, 1909.8 MHz									
3.820	-14.9	V	3.0	35.3	1.0	-49.2	-13.0	-36.2		
5.729	-10.8	V	3.0	34.7	1.0	-44.6	-13.0	-31.6		
7.639	-11.9	V	3.0	35.0	1.0	-45.8	-13.0	-32.8		
3.820	-14.4	H	3.0	35.3	1.0	-48.7	-13.0	-35.7		
5.729	-12.0	H	3.0	34.7	1.0	-45.8	-13.0	-32.8		
7.639	-10.3	H	3.0	35.0	1.0	-44.3	-13.0	-31.3		
Rev. 03.03.09										

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company:
Project #:
Date:
Test Engineer:
Configuration:
Mode:

Samsung
 14I17784
 05/19/14
 D. Soper
 EUT X Position, AC Charger and headphone
 GPRS 850

Chamber

Pre-amplifier

Filter

Limit

5m Chamber B

T34 8449B

Filter 1

Part 22

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 824.2MHz									
1.648	-26.5	V	3.0	37.4	1.0	-62.8	-13.0	-49.8	
2.473	-21.1	V	3.0	36.4	1.0	-56.5	-13.0	-43.5	
3.297	-16.5	V	3.0	35.8	1.0	-51.3	-13.0	-38.3	
1.648	-25.9	H	3.0	37.4	1.0	-62.3	-13.0	-49.3	
2.473	-22.8	H	3.0	36.4	1.0	-58.2	-13.0	-45.2	
3.297	-16.7	H	3.0	35.8	1.0	-51.5	-13.0	-38.5	
Mid Ch, 836.6MHz									
1.673	-26.3	V	3.0	37.3	1.0	-62.6	-13.0	-49.6	
2.510	-20.8	V	3.0	36.4	1.0	-56.2	-13.0	-43.2	
3.346	-16.2	V	3.0	35.8	1.0	-51.0	-13.0	-38.0	
1.673	-25.9	H	3.0	37.3	1.0	-62.2	-13.0	-49.2	
2.510	-22.6	H	3.0	36.4	1.0	-58.0	-13.0	-45.0	
3.346	-16.0	H	3.0	35.8	1.0	-50.7	-13.0	-37.7	
High Ch, 848.8MHz									
1.698	-25.8	V	3.0	37.3	1.0	-62.1	-13.0	-49.1	
2.547	-20.5	V	3.0	36.3	1.0	-55.9	-13.0	-42.9	
3.395	-16.3	V	3.0	35.7	1.0	-51.0	-13.0	-38.0	
1.698	-25.9	H	3.0	37.3	1.0	-62.2	-13.0	-49.2	
2.547	-22.6	H	3.0	36.3	1.0	-57.9	-13.0	-44.9	
3.395	-15.9	H	3.0	35.7	1.0	-50.6	-13.0	-37.6	

Rev. 03.03.09
 Note: No other emissions were detected above the system noise floor.