



**FCC 47 CFR Parts 1 & 2
Published RF Exposure KDB Procedures
IEEE Std 1528-2013**

SAR EVALUATION REPORT

For
GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHZb/g/n + NFC

**Model: SM-G3518
FCC ID: A3LSMG3518**

**Report Number: 13I16695-6B
Issue Date: 1/22/2014**

Prepared for
**Samsung Electronics Co., Ltd.
416, Maetan 3-Dong, Yeongtong-Gu
Suwon-City, Gyeonggi-Do 443-742, South Korea**

Prepared by
**UL Verification Services Inc.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	1/13/2014	Initial Issue	--
A	1/21/2014	1. Section 7.3: Updated Wi-Fi 2.4 GHz Output Power Tune-up Tolerance table. 2. Section 9.1: Updated GSM1900 notes. 3. Section 9.3: Updated Wi-Fi 2.4 GHz output power table. 4. Section 12.2: Updated GSM1900 SAR table. 5. Section 14.2: Updated GSM1900 simultaneous table.	Devin Chang
B	1/22/2014	1. Section 7.3: Updated W-CDMA Band V and Bluetooth Output Power Tune-up Tolerance table. 2. Section 9.4: Updated Bluetooth maximum output power. 3. Section 12.6.1 and 12.6.2: Updated Bluetooth maximum output power. 4. Section 14.1 ~ 14.4: Updated Bluetooth estimated SAR.	Devin Chang

Table of Contents

1. Attestation of Test Results.....	5
2. Test Methodology	6
3. Facilities and Accreditation	6
4. Calibration and Uncertainty	7
4.1. Measuring Instrument Calibration	7
4.2. Measurement Uncertainty	7
5. Measurement System Description and Setup.....	8
6. SAR Measurement Procedure.....	9
6.1. Normal SAR Measurement Procedure.....	9
6.2. Volume Scan Procedures	11
7. Device Under Test.....	12
7.1. General Information	12
7.2. Wireless Technologies.....	12
7.3. Output Power Tune-up Tolerance	13
7.4. Simultaneous Transmission Condition	13
8. RF Exposure Conditions	14
8.1. Head Exposure Conditions	14
8.2. Body-worn Accessory Exposure Conditions.....	14
8.3. Hotspot Exposure Conditions.....	14
9. RF Output Power Measurement.....	16
9.1. GSM	16
9.2. W-CDMA	17
9.3. Wi-Fi (2.4 GHz Band).....	21
9.4. Bluetooth	21
10. Tissue Dielectric Properties	22
10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests	23
10.2. Tissue Dielectric Parameter Check Results.....	24
11. System Performance Check	25
11.1. System Performance Check Measurement Conditions.....	25
11.2. Reference SAR Values for System Performance Check.....	25
11.3. System Performance Check Results	26

12. SAR Test Results	27
12.1. GSM 850.....	27
12.2. GSM 1900.....	27
12.3. W-CDMA Band V	28
12.4. W-CDMA Band II.....	28
12.5. Wi-Fi (DTS Bands)	29
12.6. Bluetooth.....	30
12.6.1. Standalone SAR Test Exclusion Considerations	30
12.6.2. Estimated SAR.....	30
13. SAR Measurement Variability.....	31
13.1. The Highest Measured SAR Configuration in Each Frequency Band	31
13.2. Repeated Measurement Results	31
14. Simultaneous Transmission SAR Analysis.....	32
14.1. Sum of the SAR for GSM 850, Wi-Fi, and BT	33
14.2. Sum of the SAR for GSM 1900, Wi-Fi, and BT	33
14.3. Sum of the SAR for W-CDMA Band V, Wi-Fi, and BT	34
14.4. Sum of the SAR for W-CDMA Band II, Wi-Fi, and BT.....	34
15. Appendixes.....	35
15.1. Photos and Antenna Locations.....	35
15.2. System Performance Check Plots	35
15.3. Highest SAR Test Plots.....	35
15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3929	35
15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3902	35
15.6. Calibration Certificate for E-Field Probe EX3DV4 - SN 3936	35
15.7. Calibration Certificate for D835V2- SN 4d142	35
15.8. Calibration Certificate for D1900V2- SN 5d163	35
15.9. Calibration Certificate for D2450V2 - SN 706	35

1. Attestation of Test Results

Applicant	Samsung Electronics Co., Ltd.			
DUT description	GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHZb/g/n + NFC			
Model	SM-G3518			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	12/13/2013 – 1/2/2014			
The highest reported SAR values	RF exposure condition	Licensed	DTS	UNII
	Head	0.992 W/kg	0.126 W/kg	N/A
	Body-worn Accessory	0.846 W/kg	0.028 W/kg	N/A
	Wireless Router (Hotspot)	0.846 W/kg	0.028 W/kg	N/A
	Simultaneous Transmission	1.118 W/kg		
Applicable Standards	FCC 47 CFR Parts 1 & 2 Published RF Exposure KDB Procedures, and TCB workshop updates IEEE Std 1528-2013			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:



Devin Chang
WiSE Engineer
UL Verification Services Inc.

Prepared By:



Vinky IP
WiSE Laboratory Technician
UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR Parts 1 & 2, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r01
- 648474 D04 Handset SAR v01r01
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D06 Hot Spot SAR v01r01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 & 47266 Benicia Street, Fremont, California, USA.

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Tissue Dielectric Properties

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40000980	2/20/2014
Dielectronic Probe kit	SPEAG	DAK-3.5	1103	2/5/2014
Thermometer	Control Company	4242	122529163	9/19/2014

System Performance Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	8665B	3438A00633	6/13/2014
Power Meter	Agilent	N1912A	MY53040016	4/4/2014
Power Sensor	Agilent	E93223A	MY53070008	4/3/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808939	N/A
Directional coupler	Werlatone	C8060-102	2710	N/A
DC Power Supply	AMETEK	XT15-4	1319A02778	N/A
Synthesized Signal Generator	HP	8665B	3744A01155	3/6/2014
Power Meter	Agilent	N1911A	MY53060002	4/4/2014
Power Meter	Agilent	N1911A	MY53060016	8/3/2014
Power Sensor	Agilent	E9323A	MY53070003	4/3/2014
Power Sensor	Agilent	E9323A	MY53070007	9/30/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Directional coupler	Werlatone	C8060-102	2149	N/A
DC Power Supply	KENWOOD	PA36-3A	7060074	N/A
Thermometer	TRACEABLE	4242	122529163	9/19/2014
E-Field Probe	SPEAG	EX3DV4	3929	6/24/2014
E-Field Probe	SPEAG	EX3DV4	3902	7/12/2014
E-Field Probe	SPEAG	EX3DV4	3936	7/22/2014
Data Acquisition Electronics	SPEAG	DAE4	1259	2/7/2014
Data Acquisition Electronics	SPEAG	DAE4	1377	7/15/2014
Data Acquisition Electronics	SPEAG	DAE4	1380	7/15/2014
System Validation Dipole	SPEAG	D835V2	4d142	9/17/2014
System Validation Dipole	SPEAG	D1900V2	5d163	9/17/2014
System Validation Dipole	SPEAG	D2450V2	706	5/29/2014

Others


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMU200	106301	7/3/2014
Base Station Simulator	R & S	CMW500	124594-HX	7/2/2014
Base Station Simulator	R & S	CMW500	132909-bp	2/19/2014
Power Meter	Agilent	N1912A	MY53040016	4/4/2014
Power Sensor	Agilent	N1921A	MY52020011	5/13/2014

4.2. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01 Section 2.8.1., when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

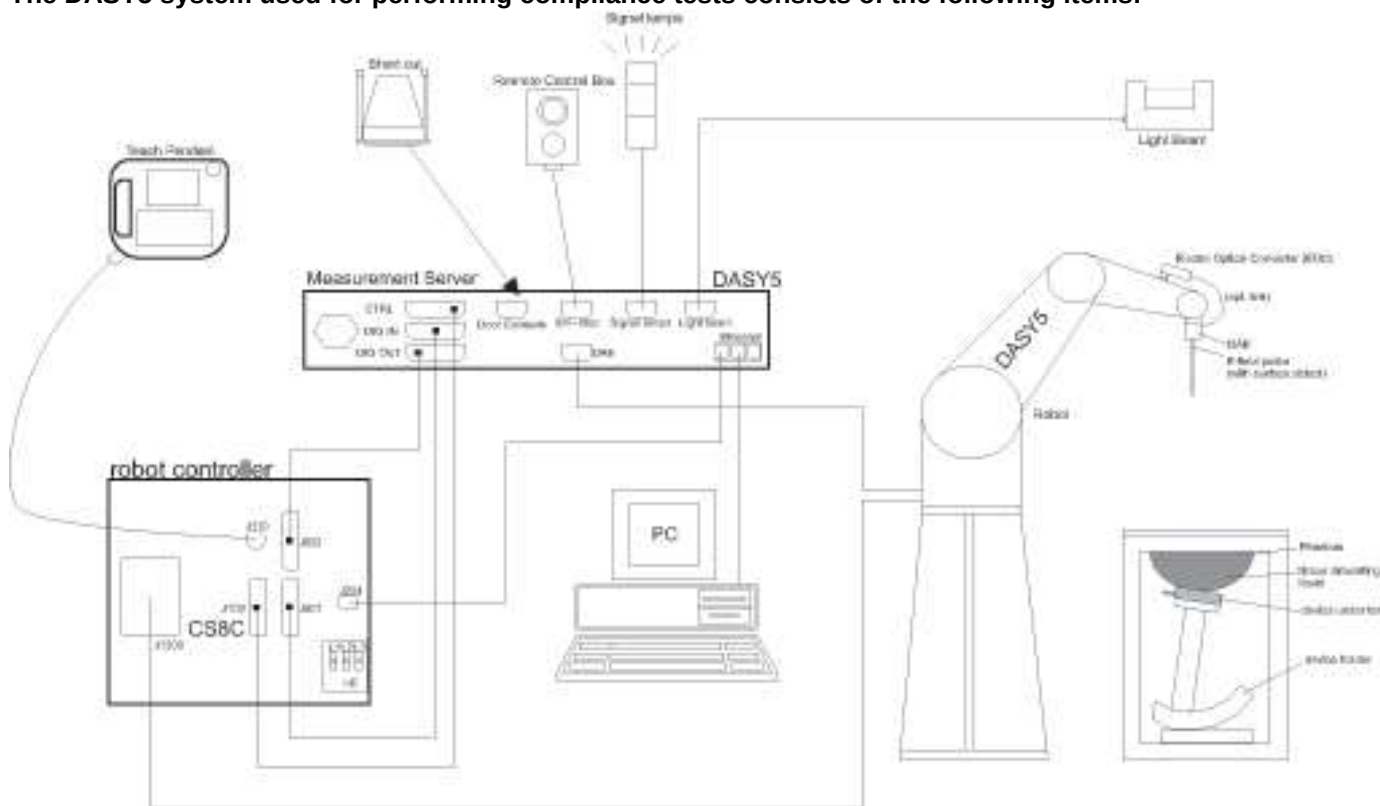

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

Operating Configuration(s)	Held to head, Body-worn (Voice call)
Mobile Hotspot	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☐ Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☐ Wi-Fi Direct (Wi-Fi 5 GHz)
Device dimensions	Overall (Length x Width): 129.9 mm x 68.9 mm Overall Diagonal: 138 mm Display Diagonal: 115 mm
Back Cover	☐ Normal Battery Cover ☐ Wireless Charger Battery Cover ☒ Normal Battery Cover with NFC
Accessory	☒ Headset
Battery Options	☒ Standard – Lithium-ion battery, Rating 3.8 Vdc, 7.6 Wh ☐ Extended (large capacity)

7.2. Wireless Technologies

Wireless Technology and Frequency Bands	GSM: 850/1900 W-CDMA Band: V / II Wi-Fi: 2.4 GHz Bluetooth: 2.4 GHz.
Mode	GSM - ☒ Voice (GMSK) - ☒ GPRS (GMSK) - ☒ EGPRS (8PSK) W-CDMA - ☒ UMTS Rel. 99 - ☒ HSDPA (Rel. 5) - ☒ HSUPA (Rel. 6) Wi-Fi 2.4GHz (802.11b/g/n) - ☒ 802.11b - ☒ 802.11g - ☒ 802.11n (20MHz) Bluetooth Ver. 4.0 (LE)
Duty Cycle (used for SAR testing)	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%, W-CDMA: 100% Wi-Fi 802.11b/g/n: 100%
GPRS Multi-Slot Class	☐ Class 8 - One Up ☐ Class 10 - Two Up ☒ Class 12 - Four Up
DTM (Dual Transfer Mode)	☐ Supported
VoIP (GPRS)	☒ Supported
SV-LTE & SV-DO	☐ Supported

7.3. Output Power Tune-up Tolerance

Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
		Target				Max. tune-up tolerance limit			
RF Air interface	Mode	1 Slot	2 Slot	3 Slot	4 Slot	1 Slot	2 Slot	3 Slot	4 Slot
GSM850	Voice	32.5				33.0			
	GPRS	32.5	29.5	28.5	26.5	33.0	30.0	29.0	27.0
	EGPRS	28.5	28.5	28.0	21.5	29.0	29.0	28.5	22.0
GSM1900	Voice	29.5				30.0			
	GPRS	29.5	26.5	26.0	24.0	30.0	27.0	26.5	24.5
	EGPRS	28.0	27.5	27.0	21.0	28.5	28.0	27.5	21.5
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
W-CDMA Band V	Rel. 99	22.5				23.0			
	HSDPA	22.5				23.0			
	HSUPA	21.0				21.5			
W-CDMA Band II	Rel. 99	22.5				23.0			
	HSDPA	22.5				23.0			
	HSUPA	22.5				23.0			
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface	Mode	Target				Max. tune-up tolerance limit			
Wi-Fi 2.4 GHz	802.11b	17.0				17.5			
	802.11g	14.0				14.5			
	802.11n (HT20)	14.0				14.5			
Upper limit (dB): 0.5 ~ -1.5		RF Output Power (dBm)							
RF Air interface		Target				Max. tune-up tolerance limit			
Bluetooth		10.0				10.5			
Bluetooth LE		1.0				1.5			

7.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	1. GSM 850/1900 Voice + Wi-Fi 2.4 2. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4(VoIP) 3. W-CDMA Band V / II+ Wi-Fi 2.4
Body-worn Accessory	1. GSM 850/1900 Voice + Wi-Fi 2.4 2. GSM 850/1900 Voice + BT 3. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4 (VoIP) 4. GSM 850/1900 (GPRS/EDGE) + BT(VoIP) 5. W-CDMA Band V / II + Wi-Fi 2.4 6. W-CDMA Band V / II + BT
Wireless Router (Hotspot) & Wi-Fi Direct	1. GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4 GHz 2. W-CDMA Band V / II + Wi-Fi 2.4 GHz
Notes: 1. Wi-Fi 2.4 GHz supports Hotspot. 2. Wi-Fi 2.4 GHz supports Wi-Fi Direct. 3. GPRS/EDGE and W-CDMA support Hotspot. 4. VoIP is supported in GPRS/EDGE and W-CDMA. 5. 2.4 GHz WLAN and Bluetooth share the same antenna path and cannot transmit simultaneously.	

8. RF Exposure Conditions

Refer to Appendix "Antenna Locations and Separation Distances" for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Conditions

For GSM, W-CDMA and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For GSM

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For W-CDMA

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

8.3. Hotspot Exposure Conditions

For GSM

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	2 mm	Yes	
Edge 2 (Right)	43 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 3 (Bottom)	107.9 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 4 (Left)	2 mm	Yes	

For W-CDMA

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	109 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 2 (Right)	2 mm	Yes	
Edge 3 (Bottom)	2 mm	Yes	
Edge 4 (Left)	2 mm	Yes	

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	51 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 2 (Right)	3 mm	Yes	
Edge 3 (Bottom)	55 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 4 (Left)	60 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01

9. RF Output Power Measurement

9.1. GSM

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	31.8
	190	836.6	31.6
	251	848.8	31.8

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	31.8	22.8	29.9	23.9	28.0	23.8	25.8	22.8
	190	836.6	31.6	22.6	29.6	23.6	27.9	23.6	25.8	22.8
	251	848.8	31.8	22.8	29.8	23.7	27.9	23.6	25.8	22.8

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)							
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
850	128	824.2	28.9	19.9	28.8	22.8	27.8	21.8	22.0	18.9
	190	836.6	28.6	19.6	28.6	22.6	28.4	22.4	21.7	18.7
	251	848.8	28.7	19.7	28.6	22.6	28.1	22.1	21.8	18.8

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
1900	512	1850.2	29.9
	661	1880.0	29.8
	810	1909.8	29.8

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	30.0	21.0	27.0	21.0	26.4	22.2	24.4	21.4
	661	1880.0	29.9	20.8	27.0	20.9	26.5	22.2	24.5	21.5
	810	1909.8	29.8	20.7	27.0	21.0	26.4	22.2	24.4	21.4

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)				Avg Power (dBm)			
			1 time slot		2 time slots		3 time slots		4 time slots	
			Burst	Frame	Burst	Frame	Burst	Frame	Burst	Frame
1900	512	1850.2	28.2	19.2	27.9	21.9	26.9	22.7	21.3	18.3
	661	1880.0	28.0	19.0	27.9	21.8	27.1	22.9	21.4	18.4
	810	1909.8	27.9	18.9	27.7	21.6	27.0	22.8	21.1	18.1

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: EGPRS (8PSK) mode with 3 time slots, based on the output power measurements above

9.2. W-CDMA

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
W-CDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	21.9
		4183	836.6	21.9
		4233	846.6	22.0
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	21.9
		9400	1880.0	22.0
		9538	1907.6	22.0

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	21.9
		4183	836.6	21.9
		4233	846.6	22.0
	Subtest 2	4132	826.4	21.5
		4183	836.6	21.6
		4233	846.6	21.6
	Subtest 3	4132	826.4	21.4
		4183	836.6	21.5
		4233	846.6	21.5
	Subtest 4	4132	826.4	21.4
		4183	836.6	21.5
		4233	846.6	21.5
W-CDMA Band II	Subtest 1	9262	1852.4	21.9
		9400	1880.0	21.9
		9538	1907.6	22.0
	Subtest 2	9262	1852.4	21.5
		9400	1880.0	21.6
		9538	1907.6	21.6
	Subtest 3	9262	1852.4	21.4
		9400	1880.0	21.5
		9538	1907.6	21.5
	Subtest 4	9262	1852.4	21.4
		9400	1880.0	21.5
		9538	1907.6	21.5

Maximum output power levels that are possible for all subtests reported.

Note(s):

KDB 941225 D01 – Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is < 75% of the SAR limit.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
W-CDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15	56/75	134/15
	CM (dB)	1.0	3.0	2.0	3.0	1.0
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	21.0
		4183	836.6	20.8
		4233	846.6	20.9
	Subtest 2	4132	826.4	20.5
		4183	836.6	20.3
		4233	846.6	20.4
	Subtest 3	4132	826.4	21.0
		4183	836.6	20.9
		4233	846.6	20.8
	Subtest 4	4132	826.4	21.0
		4183	836.6	20.8
		4233	846.6	20.9
	Subtest 5	4132	826.4	21.0
		4183	836.6	20.8
		4233	846.6	20.8
W-CDMA Band II	Subtest 1	9262	1852.4	21.9
		9400	1880.0	21.9
		9538	1907.6	22.0
	Subtest 2	9262	1852.4	21.4
		9400	1880.0	21.5
		9538	1907.6	21.5
	Subtest 3	9262	1852.4	21.6
		9400	1880.0	21.9
		9538	1907.6	22.0
	Subtest 4	9262	1852.4	21.9
		9400	1880.0	21.9
		9538	1907.6	21.9
	Subtest 5	9262	1852.4	21.9
		9400	1880.0	21.9
		9538	1907.6	21.9

Note(s):

KDB 941225 D01 – Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit.

9.3. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	“Default Test Channels”	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	▽
		2.437	6	√	▽
		2.462	11 [#]	√	▽
Notes: √ = “default test channels” ▽ = possible 802.11g channels with maximum average output ¼ dB ≥ the “default test channels” # = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.					

Measured Results

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1	2412	15.8	Yes
		6	2437	16.1	
		11	2462	15.9	
	802.11g	1	2412	14.2	No
		6	2437	14.3	
		11	2462	13.8	
	802.11n (HT20)	1	2412	14.2	No
		6	2437	14.4	
		11	2462	13.8	

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	16.1	Yes
			2 Mbps	16.0	No
			5.5 Mbps	16.0	No
			11 Mbps	16.0	No

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

9.4. Bluetooth

Maximum tune-up tolerance limit is 10.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

Refer to Standalone SAR Test Exclusion Considerations Section.

10. Tissue Dielectric Properties

IEEE Std 1528-2013

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Lab 1

Tested date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
1/2/2014	Body 1900	e'	53.1300	Relative Permittivity (ϵ_r):	53.13	53.30	-0.32	5
		e"	14.3000	Conductivity (σ):	1.51	1.52	-0.61	5
	Body 1850	e'	53.2700	Relative Permittivity (ϵ_r):	53.27	53.30	-0.06	5
		e"	14.1700	Conductivity (σ):	1.46	1.52	-4.10	5
	Body 1910	e'	53.1000	Relative Permittivity (ϵ_r):	53.10	53.30	-0.38	5
		e"	14.3300	Conductivity (σ):	1.52	1.52	0.12	5
1/2/2014	Head 1900	e'	41.1900	Relative Permittivity (ϵ_r):	41.19	40.00	2.97	5
		e"	13.3400	Conductivity (σ):	1.41	1.40	0.67	5
	Head 1850	e'	41.3500	Relative Permittivity (ϵ_r):	41.35	40.00	3.38	5
		e"	13.2100	Conductivity (σ):	1.36	1.40	-2.94	5
	Head 1910	e'	41.1400	Relative Permittivity (ϵ_r):	41.14	40.00	2.85	5
		e"	13.3600	Conductivity (σ):	1.42	1.40	1.35	5

SAR Lab 3

Tested date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
12/14/2013	Head 2450	e'	40.0200	Relative Permittivity (ε _r):	40.02	39.20	2.09	5
		e"	13.5500	Conductivity (σ):	1.85	1.80	2.55	5
	Head 2410	e'	40.1800	Relative Permittivity (ε _r):	40.18	39.28	2.29	5
		e"	13.4400	Conductivity (σ):	1.80	1.76	2.30	5
	Head 2475	e'	39.9200	Relative Permittivity (ε _r):	39.92	39.17	1.92	5
		e"	13.6000	Conductivity (σ):	1.87	1.83	2.44	5
12/14/2013	Body 2450	e'	51.5100	Relative Permittivity (ε _r):	51.51	52.70	-2.26	5
		e"	14.9200	Conductivity (σ):	2.03	1.95	4.23	5
	Body 2410	e'	51.6800	Relative Permittivity (ε _r):	51.68	52.76	-2.05	5
		e"	14.7700	Conductivity (σ):	1.98	1.91	3.76	5
	Body 2475	e'	51.4000	Relative Permittivity (ε _r):	51.40	52.67	-2.41	5
		e"	15.0000	Conductivity (σ):	2.06	1.99	3.99	5

SAR Room 4

Tested date	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit $\pm$ (%)
12/16/2013	Head 1900	e'	38.8800	Relative Permittivity (ϵ_r):	38.88	40.00	-2.80	5
		e"	13.4500	Conductivity (σ):	1.42	1.40	1.50	5
	Head 1850	e'	39.0900	Relative Permittivity (ϵ_r):	39.09	40.00	-2.27	5
		e"	13.3200	Conductivity (σ):	1.37	1.40	-2.13	5
	Head 1910	e'	38.8500	Relative Permittivity (ϵ_r):	38.85	40.00	-2.88	5
		e"	13.4800	Conductivity (σ):	1.43	1.40	2.26	5
12/16/2013	Body 1900	e'	51.0500	Relative Permittivity (ϵ_r):	51.05	53.30	-4.22	5
		e"	14.5600	Conductivity (σ):	1.54	1.52	1.20	5
	Body 1850	e'	51.2100	Relative Permittivity (ϵ_r):	51.21	53.30	-3.92	5
		e"	14.4100	Conductivity (σ):	1.48	1.52	-2.48	5
	Body 1910	e'	51.0100	Relative Permittivity (ϵ_r):	51.01	53.30	-4.30	5
		e"	14.5900	Conductivity (σ):	1.55	1.52	1.94	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D835V2	4d142	9/17/2013	835	1g	9.44	9.36
				10g	6.12	6.2
D1900V2	5d163	9/17/2013	1900	1g	40.9	40.1
				10g	21.2	21.2
D2450V2	706	5/29/2013	2450	1g	53.7	49.9
				10g	25	23.3

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio $\pm 3\%$	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
1/2/2014	D1900V2	5d163	Body	1g	4.09	4.07	40.70	40.10	1.50	0.49
				10g	2.06	2.12	21.20	21.20	0.00	
1/2/2014	D1900V2	5d163	Head	1g	4.25	4.27	42.70	40.90	4.40	-0.47
				10g	2.33	2.22	22.20	21.20	4.72	

SAR Lab 3

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio $\pm 3\%$	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
12/14/2013	D2450V2	706	Body	1g	5.34	5.34	53.40	49.9	7.01	0.00
				10g	2.25	2.46	24.60	23.3	5.58	
12/14/2013	D2450V2	706	Head	1g	5.15	5.14	51.40	53.7	-4.28	0.19
				10g	2.25	2.33	23.30	25.0	-6.80	

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio $\pm 3\%$	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
12/27/2013	D835V2	4d142	Head	1g	1.03	0.98	9.80	9.44	3.81	4.85
				10g	0.68	0.64	6.41	6.12	4.74	
12/27/2013	D835V2	4d142	Body	1g	1.01	0.99	9.87	9.36	5.45	2.28
				10g	0.68	0.65	6.51	6.20	5.00	

12. SAR Test Results

12.1. GSM 850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	33.0	31.6	0.117	0.162	7
			Left Tilt	190	836.6	33.0	31.6	0.063	0.087	
			Right Touch	190	836.6	33.0	31.6	0.247	0.341	
			Right Tilt	190	836.6	33.0	31.6	0.129	0.178	
Head (VoIP)	GPRS2 Slots	0	Left Touch	190	836.6	30.0	29.6	0.140	0.154	8
			Left Tilt	190	836.6	30.0	29.6	0.074	0.081	
			Right Touch	190	836.6	30.0	29.6	0.247	0.271	
			Right Tilt	190	836.6	30.0	29.6	0.129	0.141	
Body-worn	Voice	10	Rear	190	836.6	33.0	31.6	0.049	0.038	9
			Front	190	836.6	33.0	31.6	0.051	0.045	
Body-worn (VoIP) & Hotspot	GPRS 2 Slots	10	Rear	190	836.6	30.0	29.6	0.055	0.060	10
Front			190	836.6	30.0	29.6	0.059	0.065		
Hotspot			Edge 1	190	836.6	30.0	29.6	0.022	0.024	
			Edge 4	190	836.6	30.0	29.6	0.056	0.062	

12.2. GSM 1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	30.0	29.8	0.329	0.345	
			Left Tilt	661	1880.0	30.0	29.8	0.268	0.281	
			Right Touch	661	1880.0	30.0	29.8	0.502	0.526	11
			Right Tilt	661	1880.0	30.0	29.8	0.363	0.380	
Head (VoIP)	EGPRS 3 Slots	0	Left Touch	661	1880.0	27.5	27.1	0.481	0.527	
			Left Tilt	661	1880.0	27.5	27.1	0.383	0.420	
			Right Touch	661	1880.0	27.5	27.1	0.693	0.760	12
			Right Tilt	661	1880.0	27.5	27.1	0.495	0.543	
Body-worn	Voice	10	Rear	661	1880.0	30.0	29.8	0.167	0.175	
			Front	661	1880.0	30.0	29.8	0.206	0.216	13
Body-worn (VoIP) & Hotspot	EGPRS 3 Slots	10	Rear	661	1880.0	27.5	27.1	0.208	0.228	
Front			661	1880.0	27.5	27.1	0.251	0.275	14	
Hotspot			Edge 1	661	1880.0	27.5	27.1	0.118	0.129	
			Edge 4	661	1880.0	27.5	27.1	0.155	0.170	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	23.0	21.9	0.238	0.310	15
			Left Tilt	4183	836.6	23.0	21.9	0.195	0.254	
			Right Touch	4183	836.6	23.0	21.9	0.259	0.338	
			Right Tilt	4183	836.6	23.0	21.9	0.202	0.263	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	4183	836.6	23.0	21.9	0.372	0.485	16
			Front	4183	836.6	23.0	21.9	0.363	0.473	
Hotspot	Rel 99 RMC	10	Edge 2	4183	836.6	23.0	21.9	0.221	0.288	
			Edge 3	4183	836.6	23.0	21.9	0.041	0.054	
			Edge 4	4183	836.6	23.0	21.9	0.126	0.164	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.4. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	23.0	22.0	0.398	0.501	17
			Left Tilt	9400	1880.0	23.0	22.0	0.223	0.281	
			Right Touch	9262	1852.4	23.0	21.9	0.644	0.830	
				9400	1880.0	23.0	22.0	0.708	0.891	
			Right Tilt	9538	1907.6	23.0	22.0	0.788	0.992	
				9400	1880.0	23.0	22.0	0.262	0.330	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	9262	1852.4	23.0	21.9	0.592	0.763	18
				9400	1880.0	23.0	22.0	0.597	0.752	
				9538	1907.6	23.0	22.0	0.649	0.817	
			Front	9262	1852.4	23.0	21.9	0.594	0.765	
				9400	1880.0	23.0	22.0	0.621	0.782	
				9538	1907.6	23.0	22.0	0.672	0.846	
Hotspot	Rel 99 RMC	10	Edge 2	9400	1880.0	23.0	22.0	0.297	0.374	
			Edge 3	9400	1880.0	23.0	22.0	0.072	0.091	
			Edge 4	9400	1880.0	23.0	22.0	0.210	0.264	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.5. Wi-Fi (DTS Bands)

RF Exposure Conditions	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Left Touch	802.11b	0	6	2437	17.5	16.1	0.047	0.065	
	Left Tilt	802.11b	0	6	2437	17.5	16.1	0.013	0.018	
	Right Touch	802.11b	0	6	2437	17.5	16.1	0.091	0.126	19
	Righttt Tilt	802.11b	0	6	2437	17.5	16.1	0.005	0.006	
Body & Hotspot	Rear	802.11b	10	6	2437	17.5	16.1	0.020	0.028	20
	Front	802.11b	10	6	2437	17.5	16.1	0.011	0.015	
Hotspot	Edge 2	802.11b	10	6	2437	17.5	16.1	0.018	0.025	

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- With headset attached. According to KDB 648474 Section 2.3, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

12.6. Bluetooth

12.6.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
10.5	11	10	2.480	1.8

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

12.6.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	11	10	2.480	0.231

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Hotspot/Wi-Fi Direct (W/kg)
850	GSM 850	0.247		
	W-CDMA Band V		0.365	
1900	GSM 1900	0.693		
	W-CDMA Band II	0.788		
2400	Wi-Fi 802.11b/g/n		0.091	

13.2. Repeated Measurement Results

Head Exposure Condition

Not Applicable.

Body-worn Accessory Exposure Condition

Not Applicable.

Hotspot Mode Exposure Conditions

Not Applicable.

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Sum of the SAR for GSM 850, Wi-Fi, and BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		GSM 850	WiFi DTS Band	Bluetooth		
Head	Left Touch	0.162	0.065		0.227	No
	Left Tilt	0.087	0.018		0.105	No
	Right Touch	0.341	0.126		0.467	No
	Right Tilt	0.178	0.006		0.184	No
Body-worn Accessory & Hotspot	Rear	0.060	0.028		0.088	No
		0.060		0.231	0.291	No
	Front	0.065	0.015		0.080	No
		0.065		0.231	0.296	No
Hotspot	Edge 1	0.024	0		0.024	No
	Edge 2	0	0.025		0.025	No
	Edge 3	0	0		0	No
	Edge 4	0.062	0		0.062	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.2. Sum of the SAR for GSM 1900, Wi-Fi, and BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		GSM 1900	WiFi DTS Band	Bluetooth		
Head	Left Touch	0.527	0.065		0.592	No
	Left Tilt	0.420	0.018		0.438	No
	Right Touch	0.760	0.126		0.886	No
	Right Tilt	0.543	0.006		0.549	No
Body-worn Accessory & Hotspot	Rear	0.228	0.028		0.256	No
		0.228		0.231	0.459	No
	Front	0.275	0.015		0.290	No
		0.275		0.231	0.506	No
Hotspot	Edge 1	0.129	0		0.129	No
	Edge 2	0	0.025		0.025	No
	Edge 3	0	0		0	No
	Edge 4	0.170	0		0.170	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.3. Sum of the SAR for W-CDMA Band V, Wi-Fi, and BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		W-CDMA Band V	WiFi DTS Band	Bluetooth		
Head	Left Touch	0.310	0.065		0.375	No
	Left Tilt	0.254	0.018		0.272	No
	Right Touch	0.338	0.126		0.464	No
	Right Tilt	0.263	0.006		0.269	No
Body-worn Accessory & Hotspot	Rear	0.485	0.028		0.513	No
		0.485		0.231	0.716	No
	Front	0.473	0.015		0.488	No
		0.473		0.231	0.704	No
Hotspot	Edge 1	0	0		0	No
	Edge 2	0.288	0.025		0.313	No
	Edge 3	0.054	0		0.054	No
	Edge 4	0.164	0		0.164	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.4. Sum of the SAR for W-CDMA Band II, Wi-Fi, and BT

RF Exposure conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
		W-CDMA Band II	WiFi DTS Band	Bluetooth		
Head	Left Touch	0.501	0.065		0.566	No
	Left Tilt	0.281	0.018		0.299	No
	Right Touch	0.992	0.126		1.118	No
	Right Tilt	0.330	0.006		0.336	No
Body-worn Accessory & Hotspot	Rear	0.817	0.028		0.845	No
		0.817		0.231	1.048	No
	Front	0.846	0.015		0.861	No
		0.846		0.231	1.077	No
Hotspot	Edge 1	0	0		0	No
	Edge 2	0.374	0.025		0.399	No
	Edge 3	0.091	0		0.091	No
	Edge 4	0.264	0		0.264	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. Photos and Antenna Locations**
- 15.2. System Performance Check Plots**
- 15.3. Highest SAR Test Plots**
- 15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3929**
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3902**
- 15.6. Calibration Certificate for E-Field Probe EX3DV4 - SN 3936**
- 15.7. Calibration Certificate for D835V2- SN 4d142**
- 15.8. Calibration Certificate for D1900V2- SN 5d163**
- 15.9. Calibration Certificate for D2450V2 - SN 706**

END OF REPORT